
AmebaDocs

发布 *0.0.1*

Ameba IoT

2021 年 12 月 29 日

开源 SDK 平台

1	Arduino SDK	3
2	MicroPython SDK	2553
3	瑞昱标准 SDK	2599



我们支持 3 个独立的软体开发平台（SDK），它们分别是瑞昱 **Arduino SDK**, **Standard SDK** 和 **MicroPython SDK**.

所有的快速入门手册、范例演示、教程、API 参考文档、相关资料下载和数据手册都可以在下方链接中找到。

CHAPTER 1

Arduino SDK

Arduino SDK is supported on the following 3 development boards listed below:

1.1 Ameba RTL8722DM

Welcome to Ameba RTL8722DM Arduino online documentation.



1.1.1 Getting Started

Ameba ARDUINO: Getting Started with RTL8722


Required Environment

AmebaD RTL8722DM board currently supports Windows OS 32-bits and 64-bits (WIN7/8/10), Linux OS (Ubuntu 18 LTS/20 LTS/latest) and macOS operating systems. Please use the latest OS version to have the best experiences. In this documentation, please use the latest version Arduino IDE (at least version 1.8.12).

Introduction to AmebaD RTL8722CSM/RTL8722DM

Ameba is an easy-to-program platform for developing all kind of IoT applications. AmebaD is equipped with various peripheral interfaces, including WiFi, GPIO INT, I2C, UART, SPI, PWM, ADC. Through these interfaces, AmebaD can connect with electronic components such as LED, switches, manometer, hygrometer, PM2.5 dust sensors, ...etc.


The collected data can be uploaded via WiFi and be utilized by applications on smart devices to realize IoT implementation.

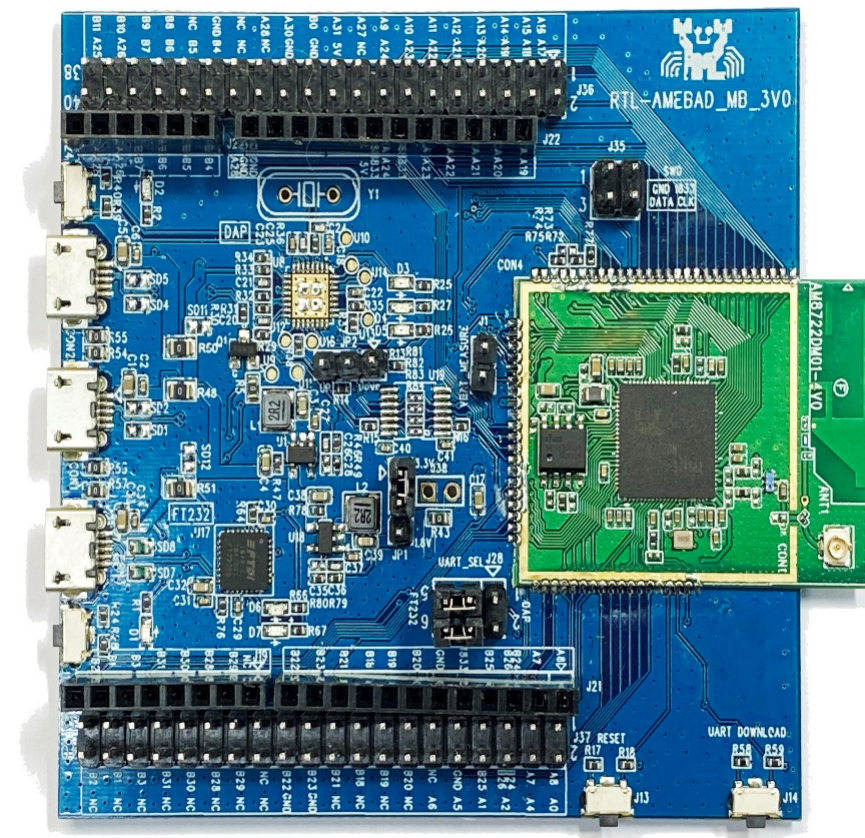


RTL8722DM and Arduino Uno have similar size, as shown in the above figure, and the pins on RTL8722DM are compatible with Arduino Uno.

RTL8722DM uses Micro USB to supply power, which is common in many smart devices.

Please refer to the following figure and table for the pin diagram and function of RTL8722DM.

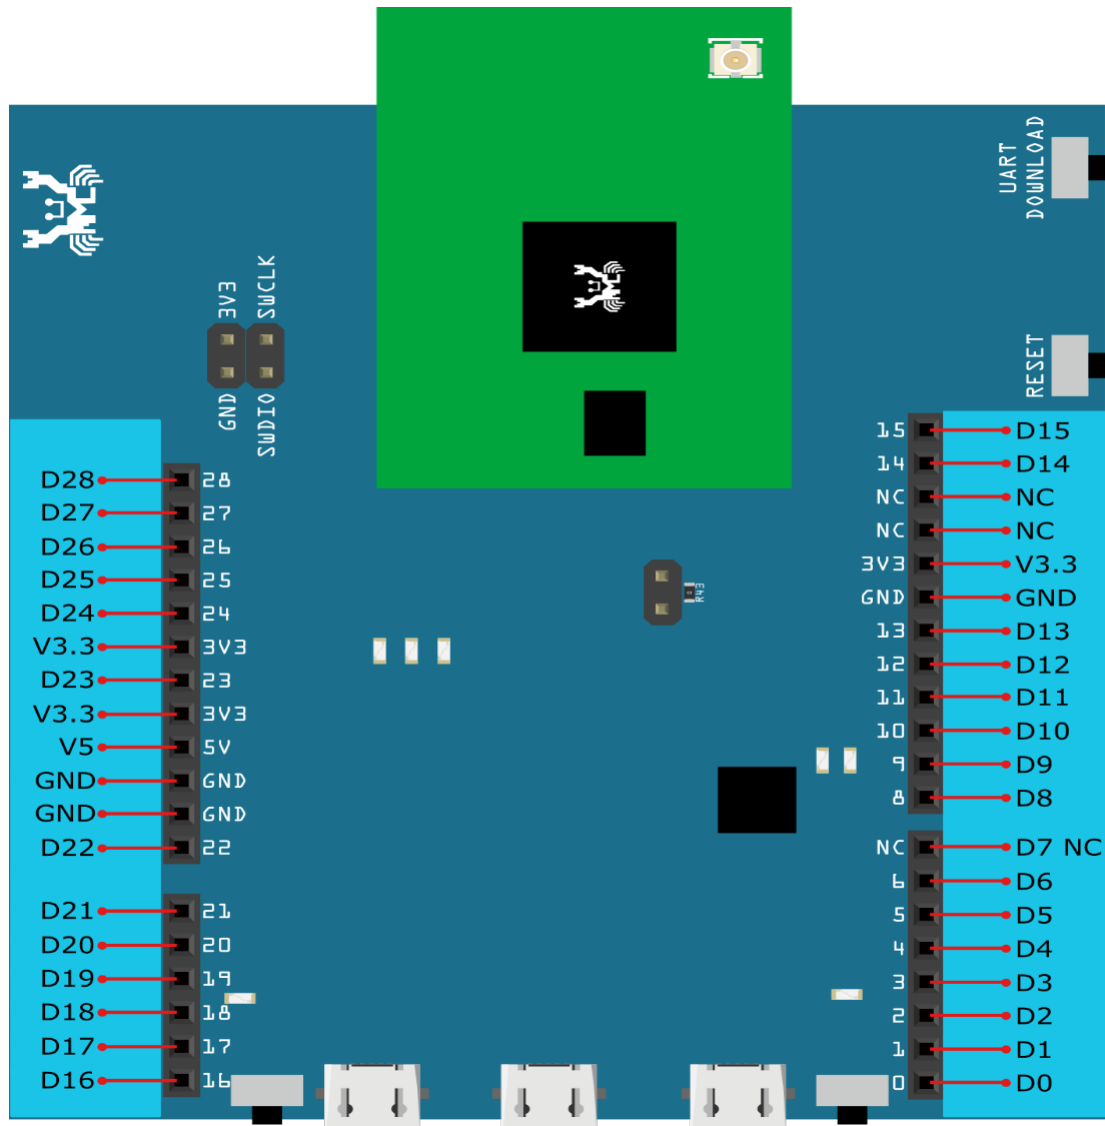


#	PIN name	GPIO	ADC	PWM	UART	SPI	I2C
D00	GPIOB_2	✓	ADC5		UART3_RX(b)		
D01	GPIOB_1	✓	ADC4		UART3_TX(b)		
D02	GPIOB_3	✓	ADC6				
D03	GPIOB_31	✓					
D04	GPIOB_30	✓					
D05	GPIOB_28	✓					
D06	GPIOB_29	✓					
D07	NC						
D08	GPIOB_22	✓		PWM14			
D09	GPIOB_23	✓		PWM15			
D10	GPIOB_21	✓		PWM13	UART0_RTS(b)	SPI0_CS	
D11	GPIOB_18	✓		PWM10	UART0_RX(b)	SPI0_MOSI	
D12	GPIOB_19	✓		PWM11	UART0_TX(b)	SPI0_MISO	
D13	GPIOB_20	✓		PWM12	UART0_CTS(b)	SPI0_CLK	
D14	GPIOA_7	✓			UART2_TX(log)		
D15	GPIOA_8	✓			UART2_RX(log)		
D16	GPIOA_25	✓		PWM4	UART3_RX(a)	I2C0_SCL	
D17	GPIOA_26	✓		PWM5	UART3_TX(a)	I2C0_SDA	
D18	GPIOB_7	✓	ADC3	PWM17		SPI1_CS	
D19	GPIOB_6	✓	ADC2			SPI1_CLK	
D20	GPIOB_5	✓	ADC1	PWM9		SPI1_MISO	
D21	GPIOB_4	✓	ADC0	PWM8		SPI1_MOSI	
D22	GPIOA_28	✓					
D23	GPIOA_24	✓		PWM3	UART0_CTS(a)	I2C1_SDA	
D24	GPIOA_23	✓		PWM2	UART0_RTS(a)	I2C1_SCL	
D25	GPIOA_22	✓			UART0_RX(a)		
D26	GPIOA_21	✓			UART0_TX(a)		
D27	GPIOA_20	✓					
D28	GPIOA_19	✓					

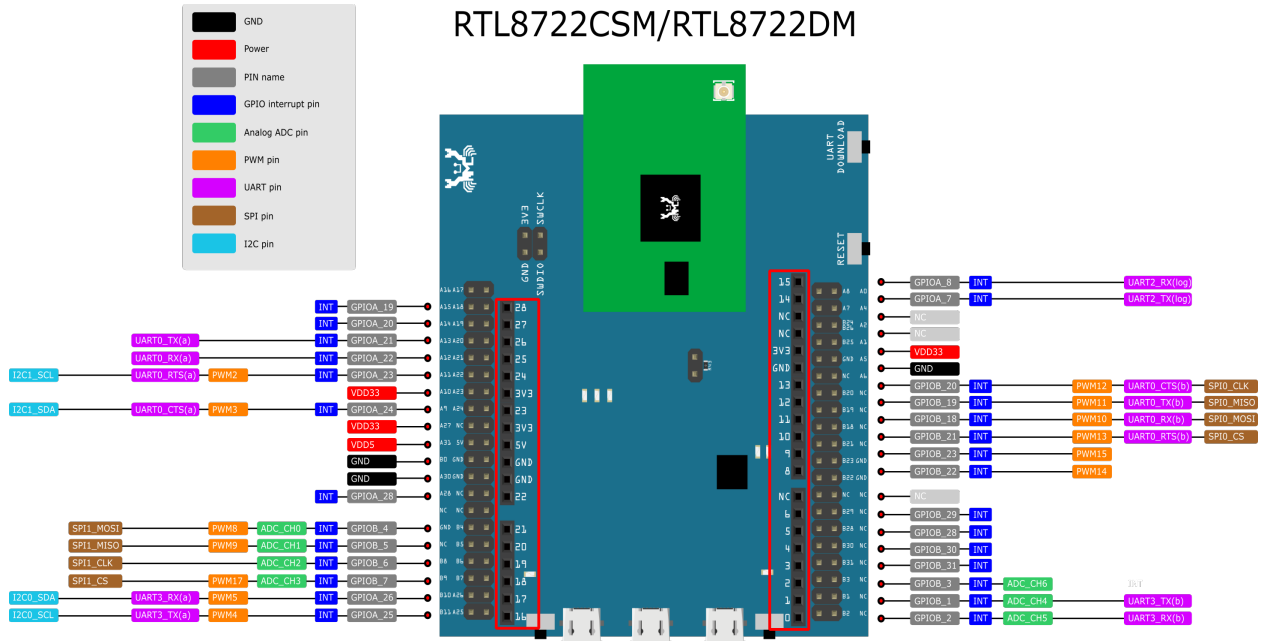

Setting up Development Environment

Step 1. Installing the Driver


First, connect RTL8722DM to the computer via Micro USB:

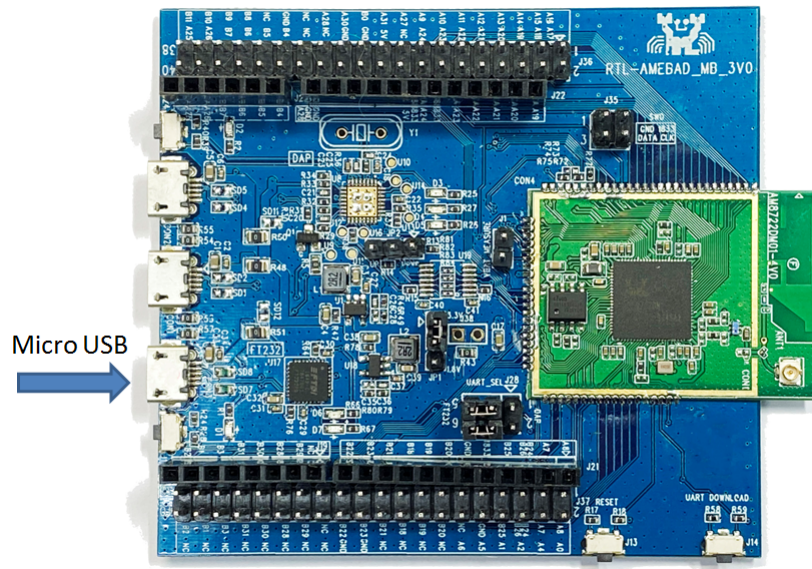

If this is the first time you connect RTL8722DM to your computer, the USB driver for RTL8722DM will be automatic installed.

If you have driver issue of connect board to your computer please go to [here](#) for USB driver.


You can check the COM port number in Device Manager of your computer:

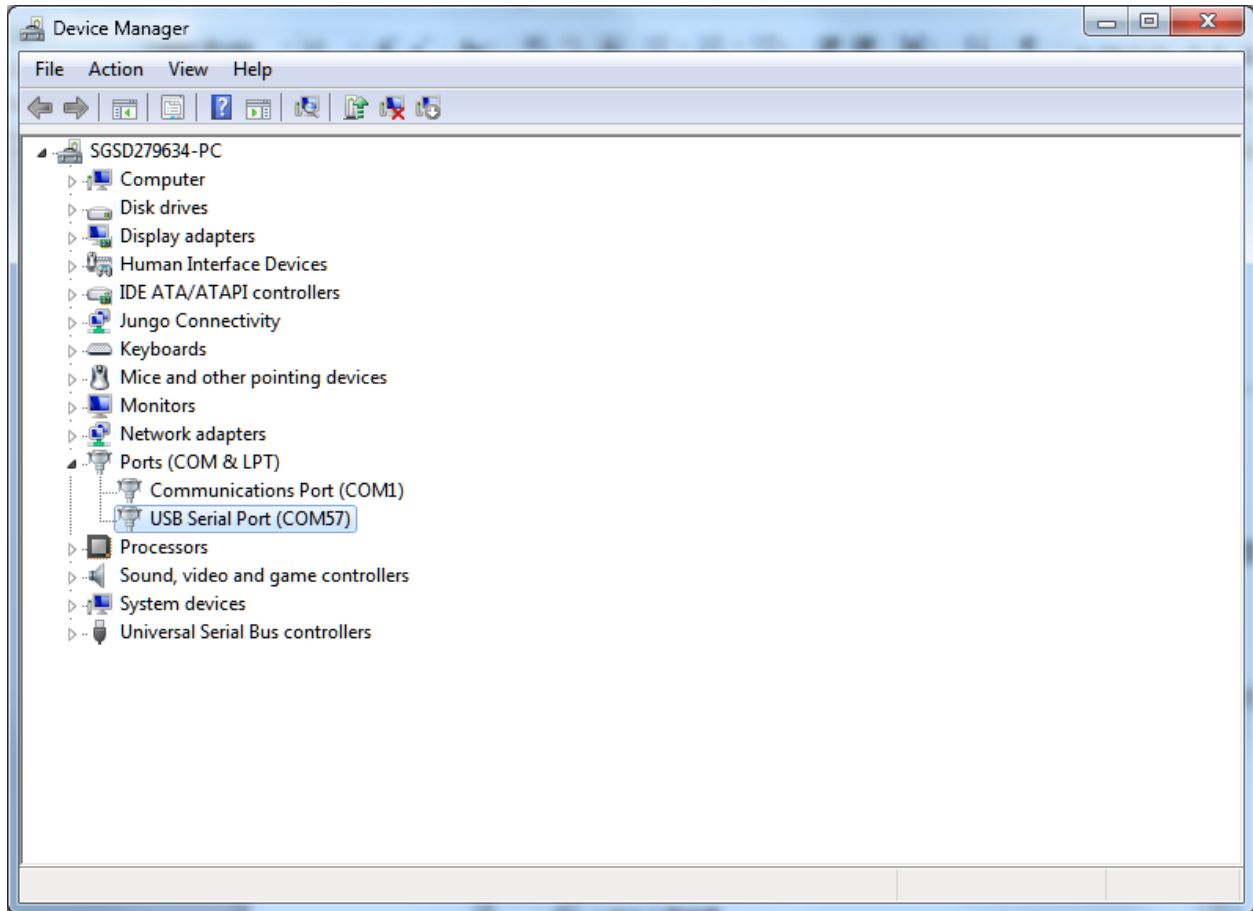

Step 2. Set up Arduino IDE

From version 1.6.5, Arduino IDE supports third-party hardware. Therefore, we can use Arduino IDE to develop applications on RTL8722DM, and the examples of Arduino can run on RTL8722DM too. Arduino IDE can be downloaded in the [Arduino website](#).


When the installation is finished, open Arduino IDE. To set up RTL8722DM correctly in Arduino IDE, go to “File” -> “Preferences” .

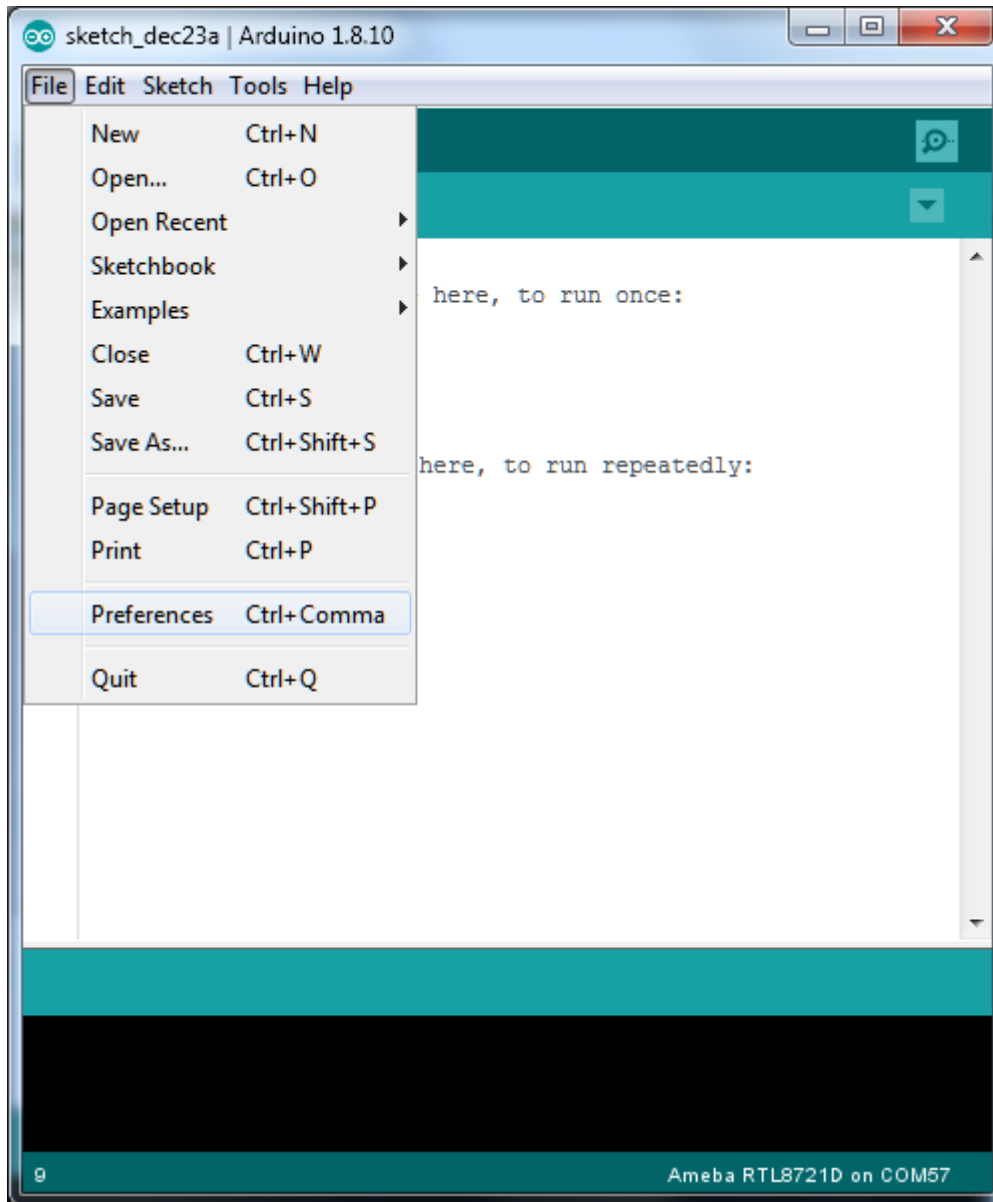


And paste the following URL into “Additional Boards Manager URLs” field:

```
https://github.com/ambiot/ambd_arduino/raw/master/Arduino_package/package_realtek.com_amebad_index.json
```

Next, go to “Tools” -> “Board” -> “Boards Manager” :

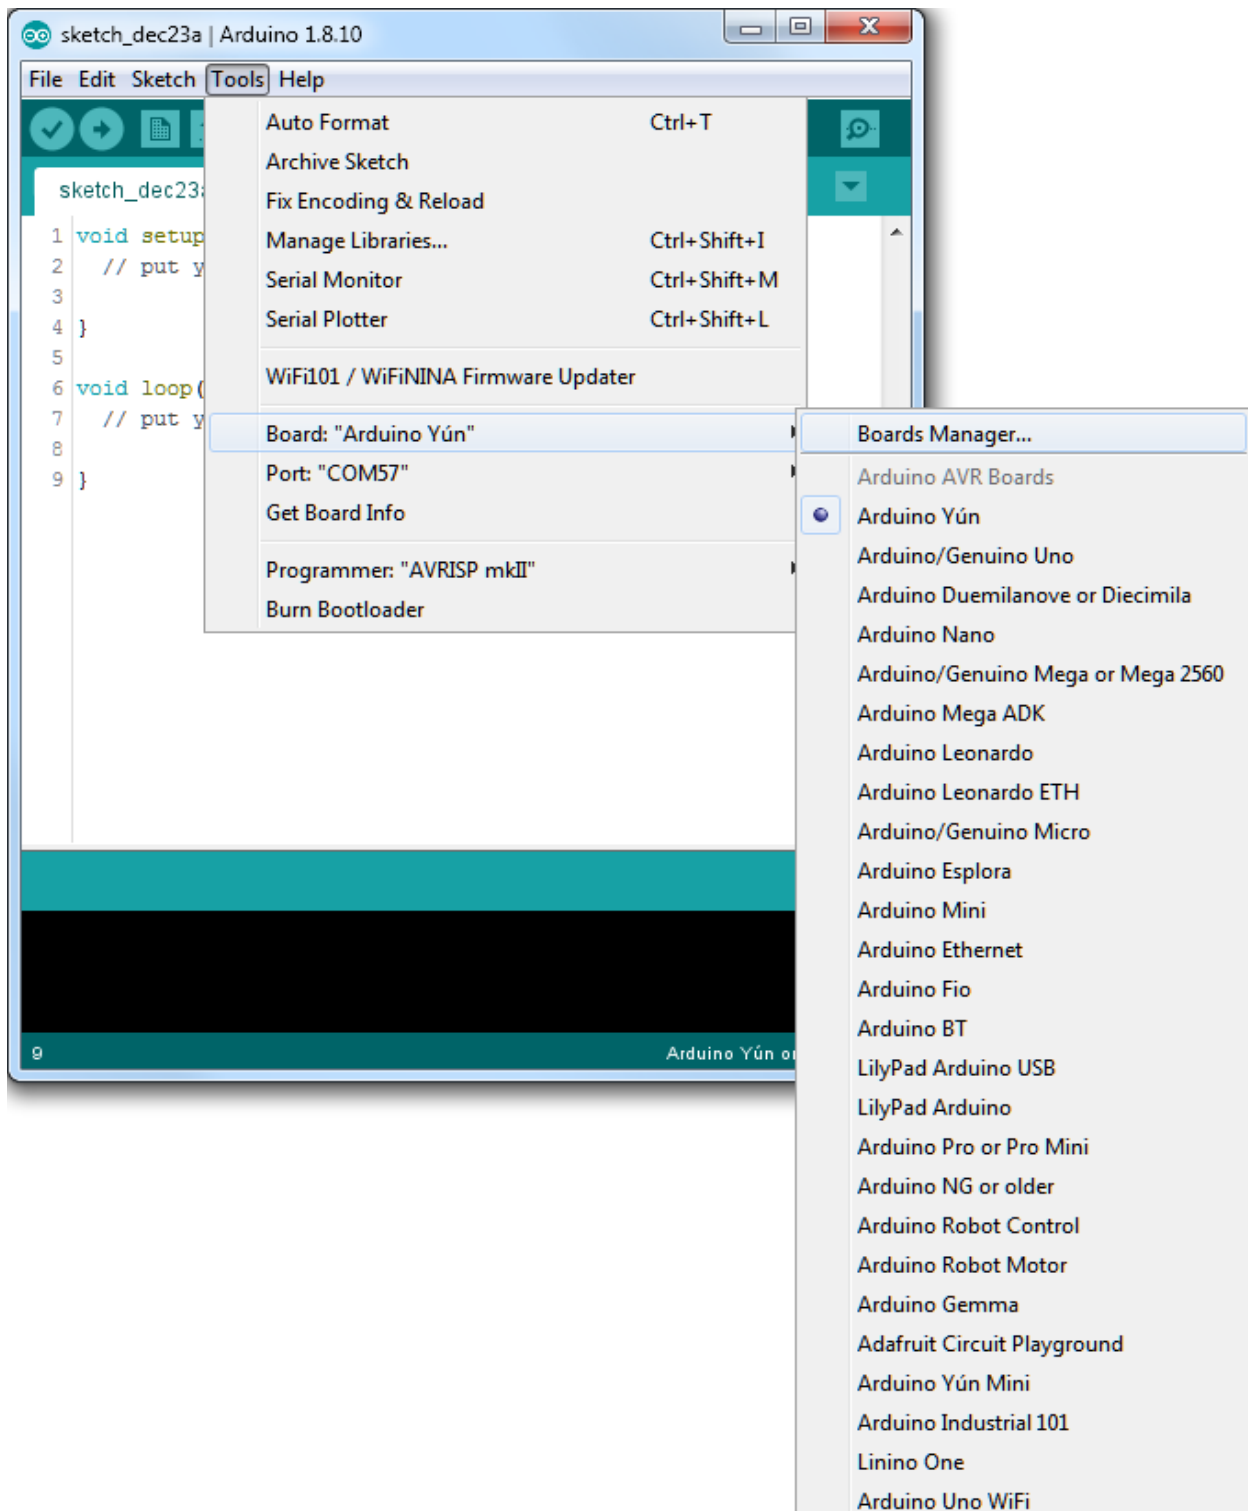

The “Boards Manager” requires about 10~20 seconds to refresh all hardware files (if the network is in bad condition, it may take longer). Every time the new hardware is connected, we need to reopen the Board Manager. So, we close the “Boards Manager”, and then open it again. Find “Realtek AmebaD Boards (32-bits ARM Cortex-M4 @200MHz)” in the list, click “Install”, then the Arduino IDE starts to download required files for RTL8722DM.

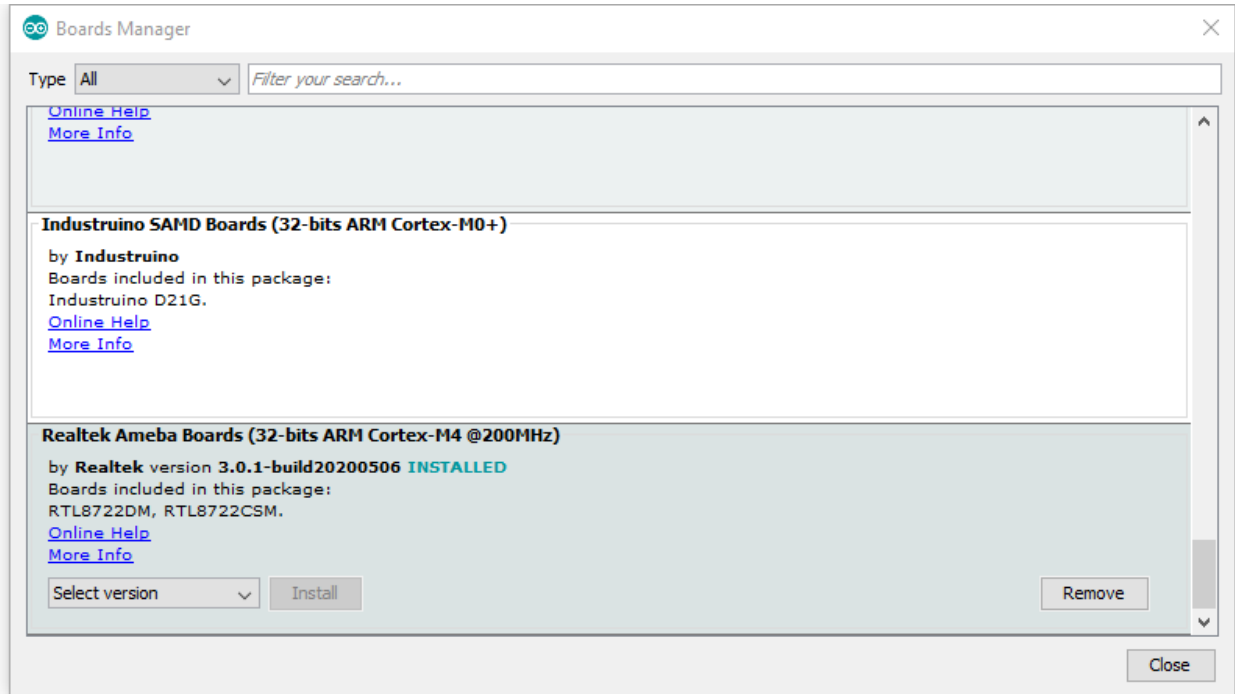


If you are facing GitHub downloading issue, please refer to the following link at [Download/Software Development Kit](#). There are 3 sections:

1. “AmebaD_Arduino_patch1_SDK”, please select at least 1 of the SDKs. There are 5 latest released SDK options.
2. “AmebaD_Arduino_patch2_Tools”, please select according to your operation system. There are Windows, Linux and MacOS.
3. “AmebaD_Arduino_Source_Code”, this section is optional download only wants to refer the latest source code.

Download the files selected, then unzip (patch1 and patch2 are compulsory). There are “Install.doc” / “Install.pdf” for you to refer installation steps. According to your system, please run the installation tool in the “Offline_SDK_installation_tool” folder.

After the installation tool running successfully, you may open Arduino IDE and proceed to “Tools” -> “Board” -> “Boards Manager...”. Try to find “Realtek AmebaD Boards (32-bits ARM Cortex-M4 @200MHz)” in the list, click “Install”, then the Arduino IDE starts to download required files for RTL8722DM.

Finally, we select RTL8722DM as current connected board in “Tools” -> “Board” -> “Ameba ARM (32-bits) Boards” -> “RTL8722DM”:

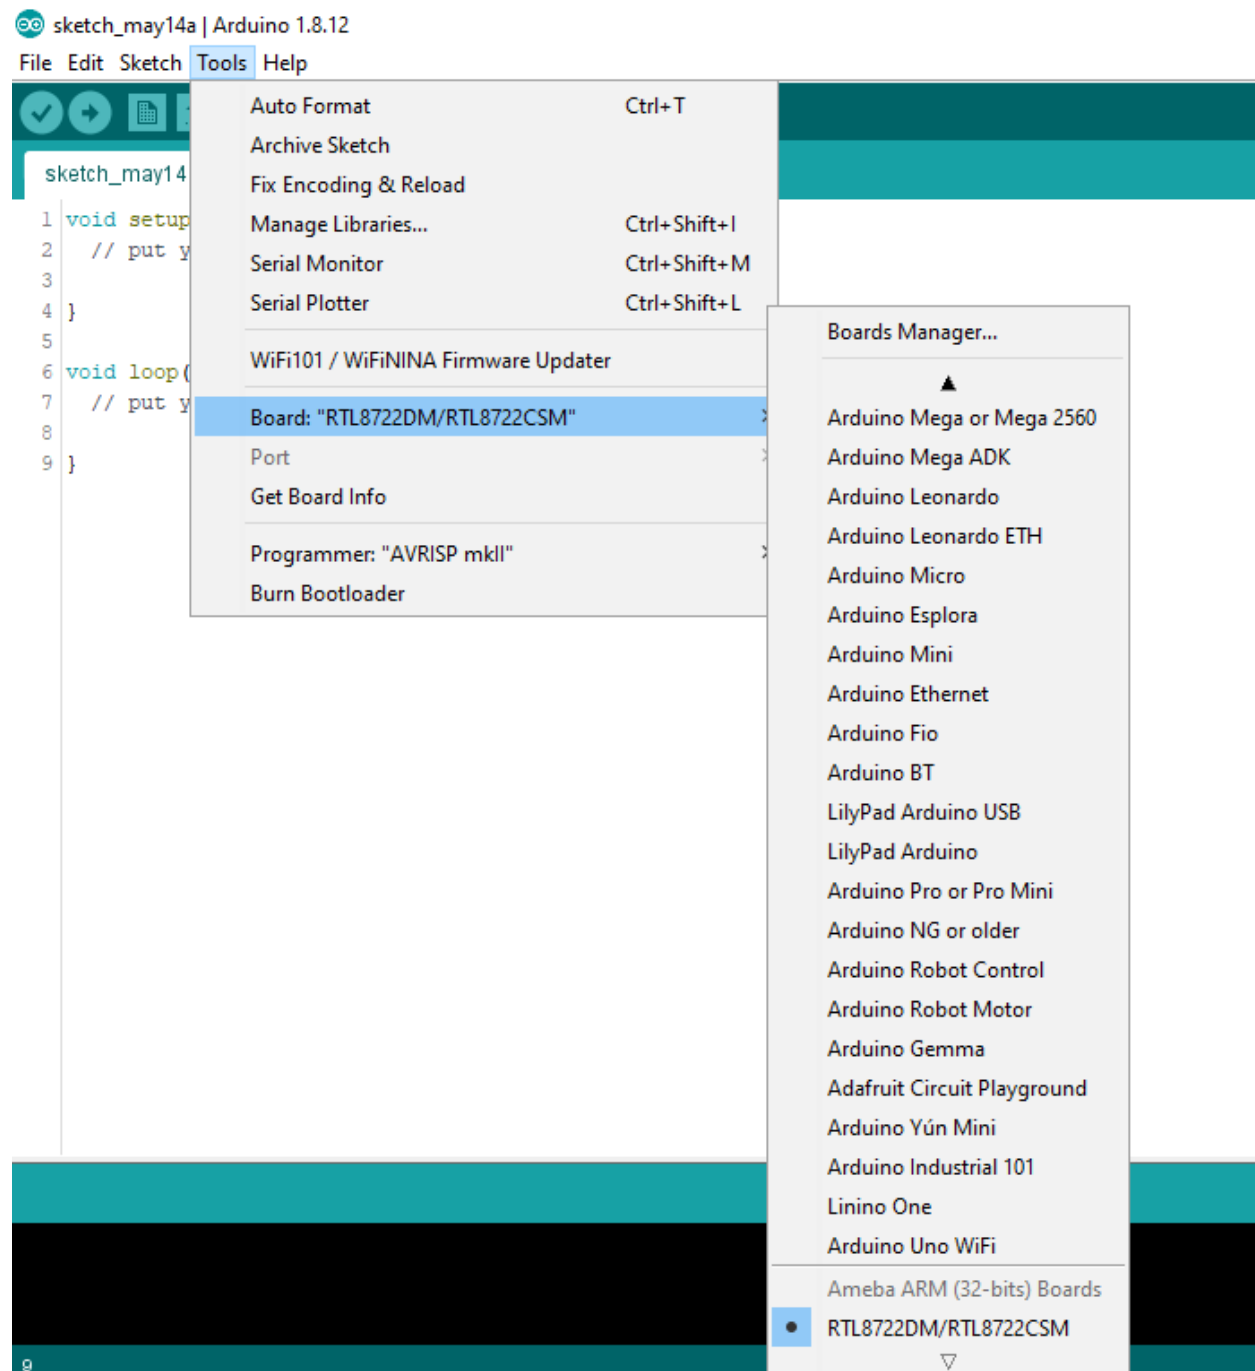


Try the First Example


Step 1. Compile & Upload

Arduino IDE provides many built-in examples, which can be compiled, uploaded and run directly on the boards. Here, we take the “Blink” example as the first try.


Open “File” -> “Examples” -> “01.Basics” -> “Blink” :

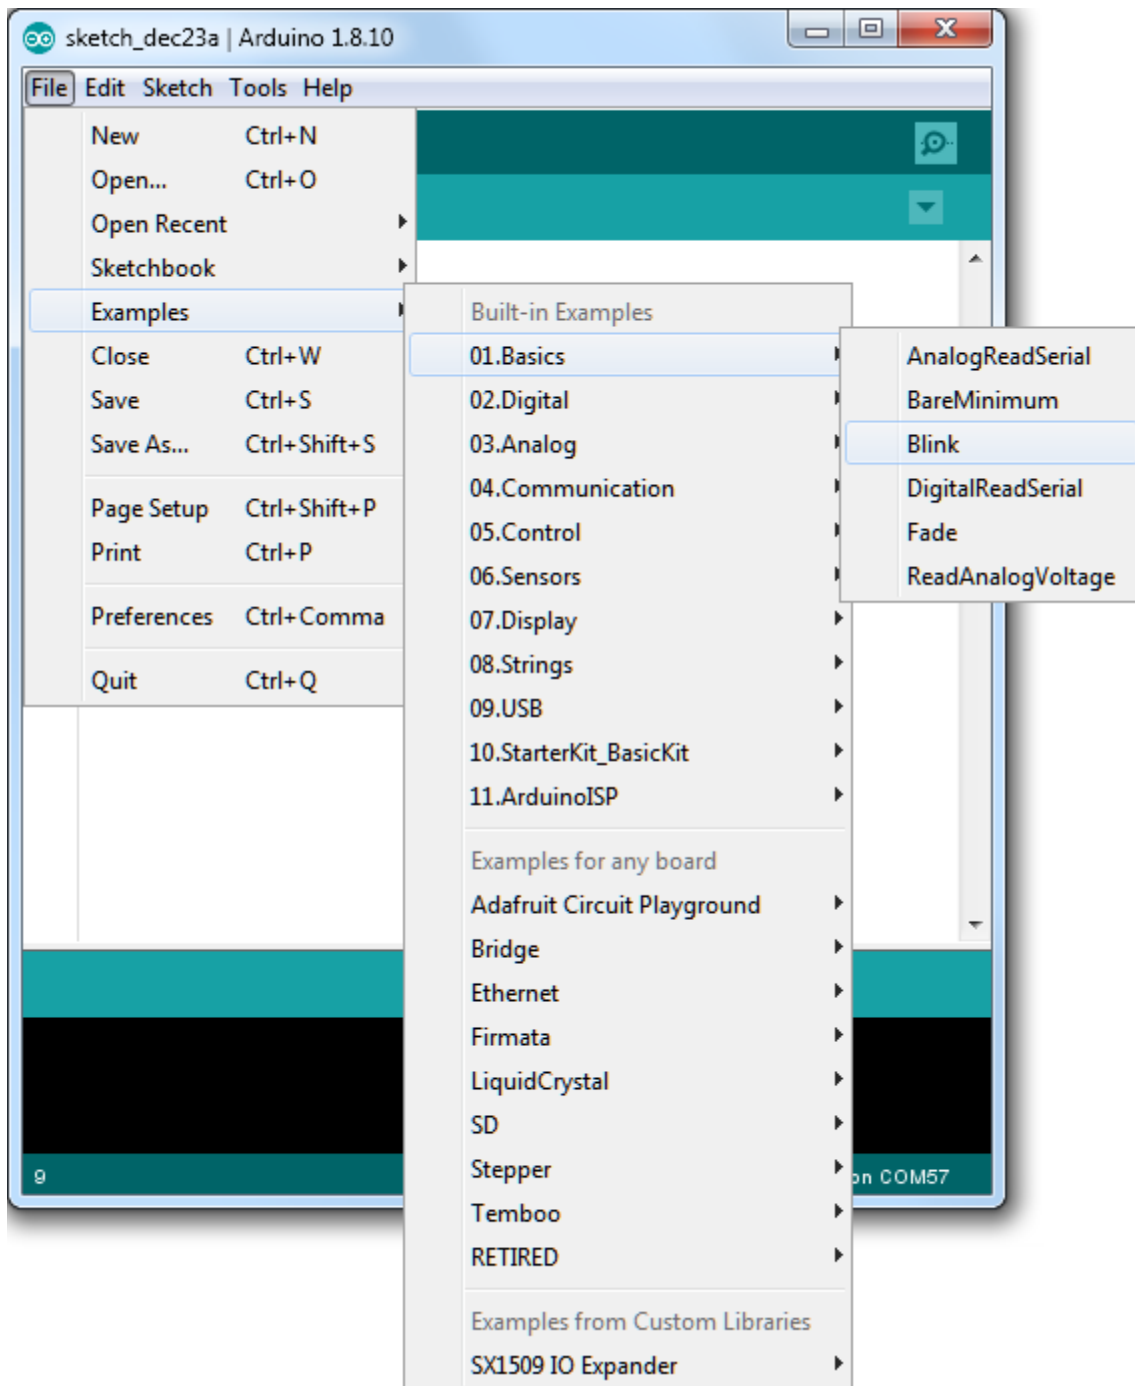


Arduino IDE opens a new window with the complete sample code.

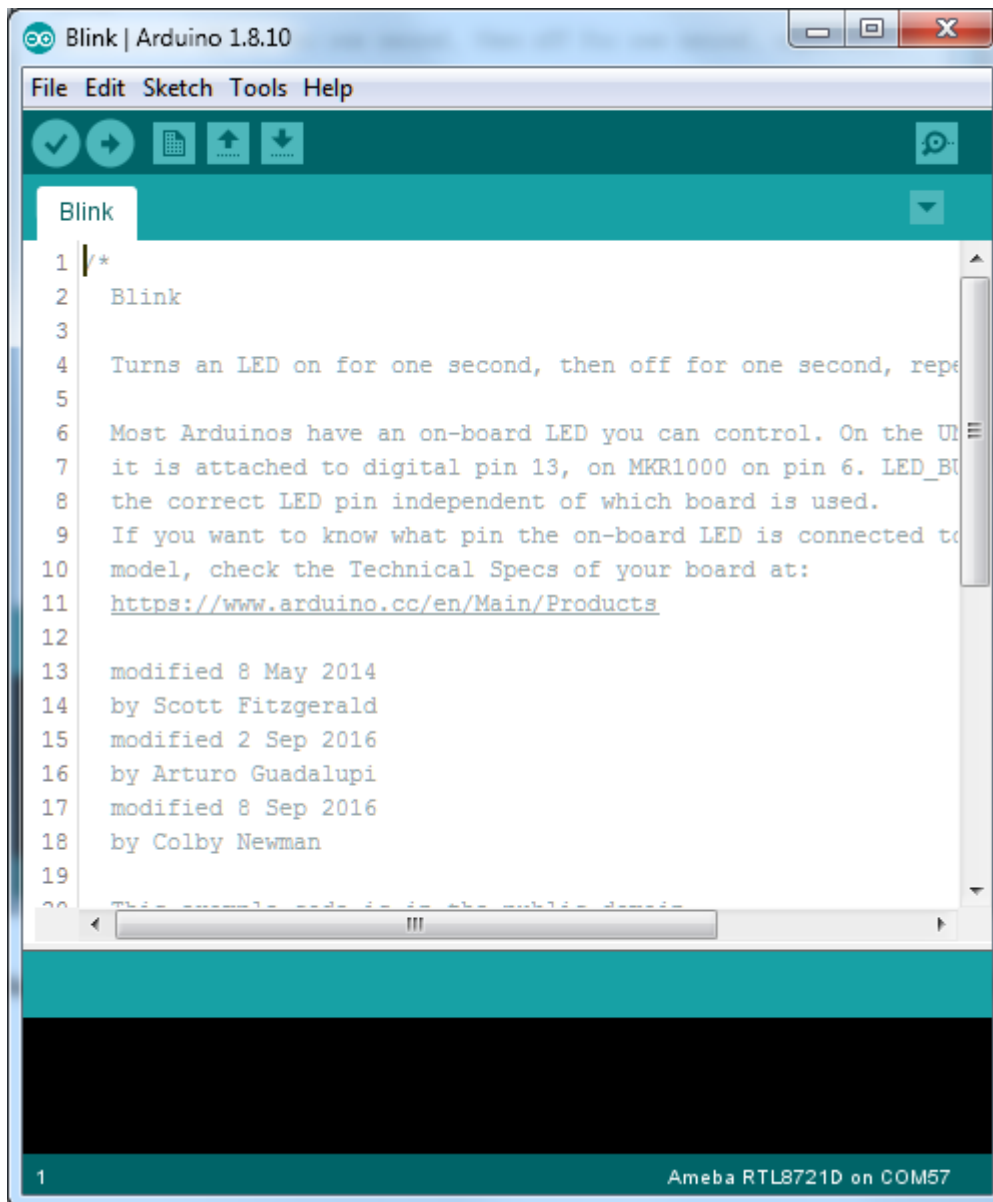

Next, we compile the sample code directly; click “Sketch” -> “Verify/Compile”

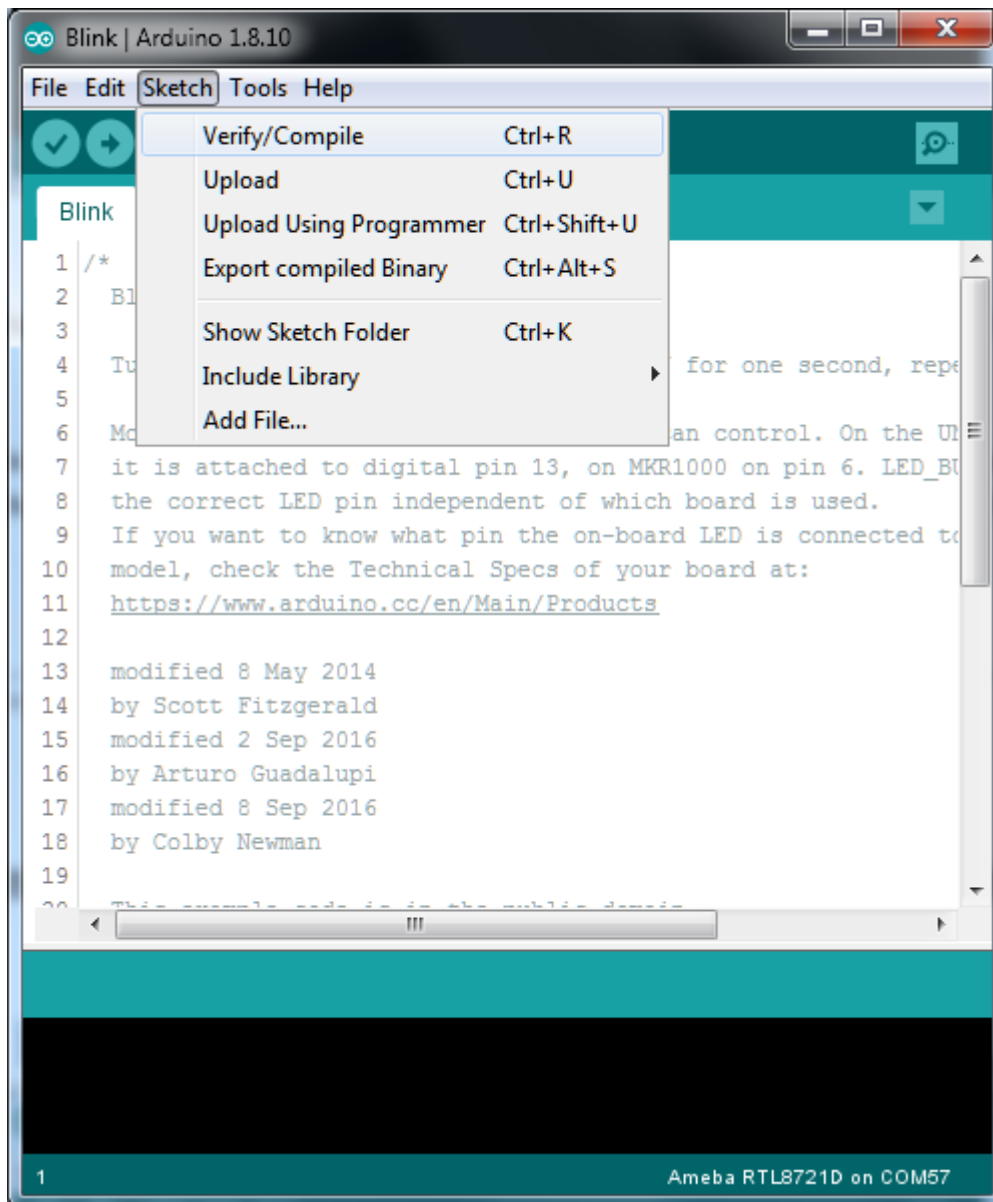

Arduino IDE prints the compiling messages in the bottom area of the IDE window. When the compilation is finished, you will get the message similar to the following figure:

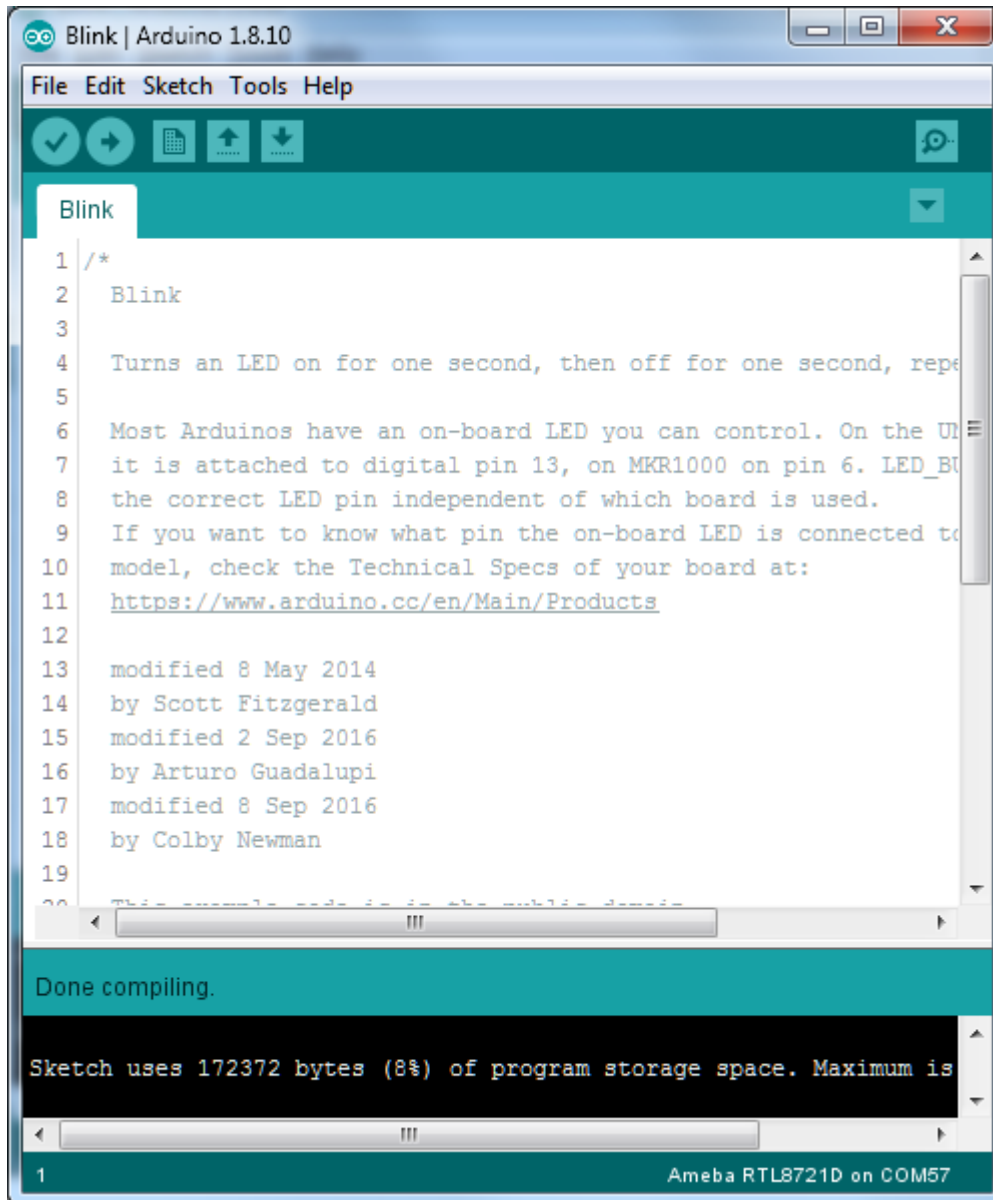

Afterwards, we will upload the compiled code to RTL8722DM.


Please make sure RTL8722DM is connected to your computer, then click “Sketch” -> “Upload” .

The Arduino IDE will compile first then upload. During the uploading process, users are required to enter the upload mode of the board. Arduino IDE will wait 5s for DEV board to enter the upload mode.



```
Uploading...

Sketch uses 172372 bytes (8%) of program storage space. Maximum is 2097152 bytes.
  1 file(s) copied.
Please enter the upload mode (wait 5s)
05
04
03
02
01
```


To enter the upload mode, first press and hold the `UART_DOWNLOAD` button, then press the `RESET` button. If success, you should see the LED flashing on the DEV board.

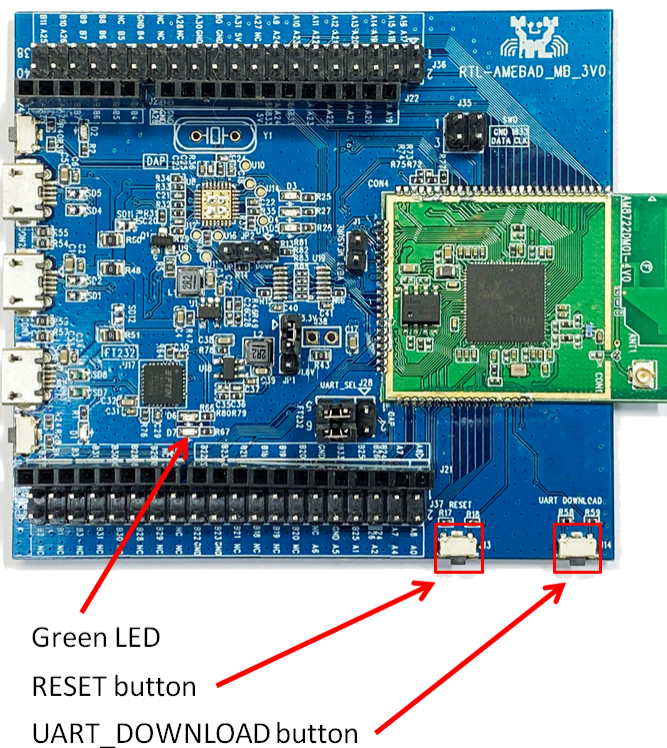

It is optional for users to check if the board entered the upload mode. Open serial monitor/terminal and look for “#Flash Download Start” . Note, it is normal that some serial terminals may show unknown characters as following picture.

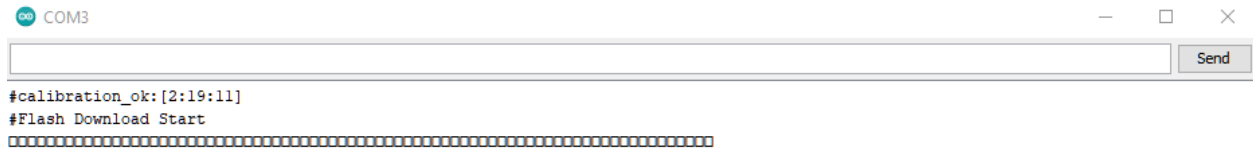

Again, during the uploading procedure the IDE prints messages. Uploading procedure takes considerably longer time (about 30 seconds to 1 minute). When upload completed, the “Done uploading” message is printed.

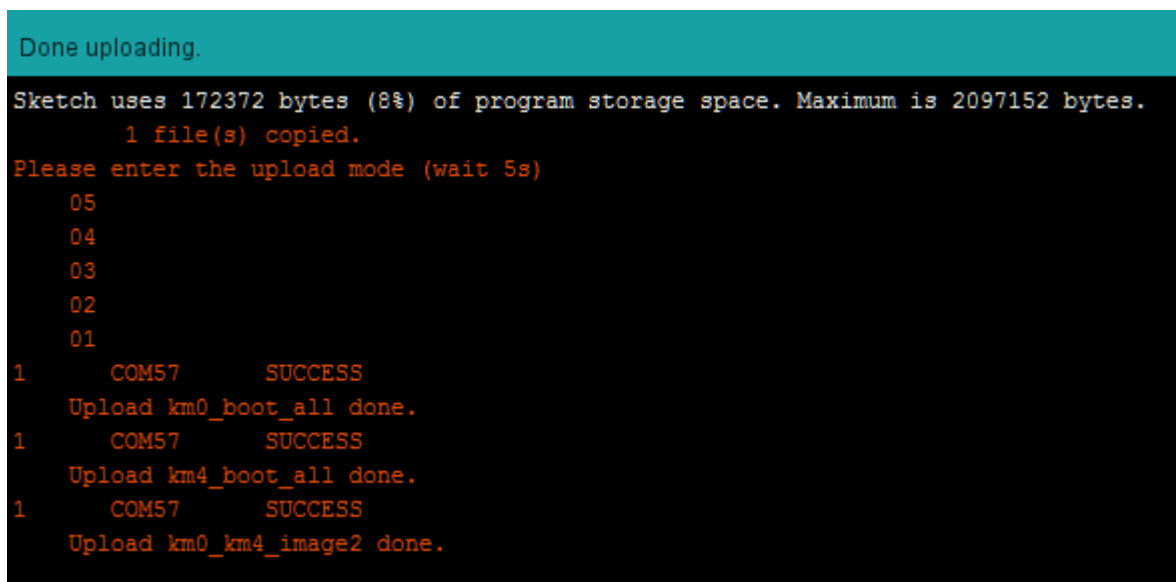


Step 2.Run the Blink example

In each example, Arduino not only provides sample code, but also detailed documentation, including wiring diagram, sample code explanation, technical details, ...etc. These examples can be directly used on RTL8722DM.

So, we find the detailed information of the [Blink example](#).

In short, this example makes LED blinks, and it uses GPIO pin 08 (refer to the pin diagram D08). Then we connect the LED and resistance as the following figure:

(NOTE: In an LED, the longer pin is the positive pole, and shorter pin is the negative pole. So we connect the longer pin to D08, and connect the shorter pin to GND. In addition, please use a resistor with suitable resistance in series between LED and GND to protect LED)

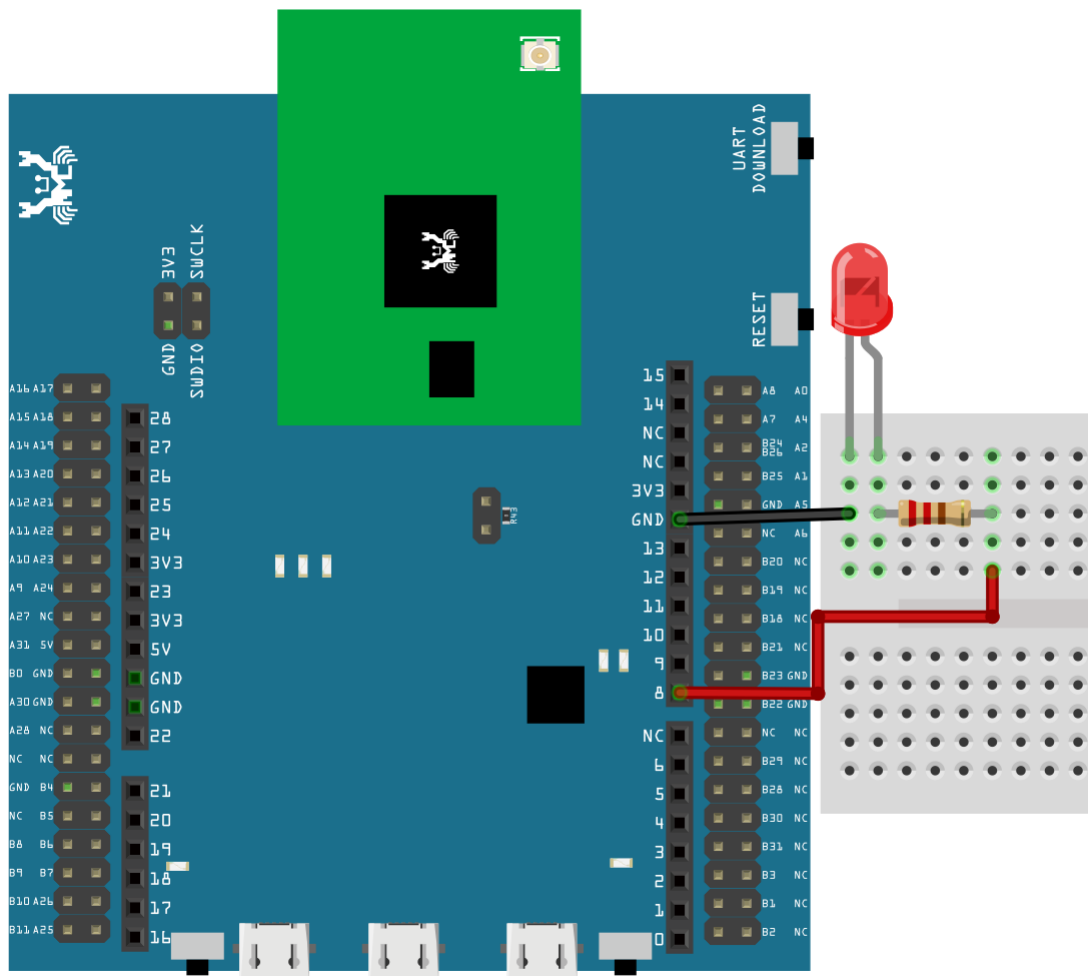

Finally, press the *RESET* button, and you can see the *LED* blinking.

(End)

注解: If you face any issue, please refer to the FAQ and Trouble shooting sections on [../support/index](#) page.

1.1.2 Download

Release History

Version 3.1.1 - 2021/12/25

- Feature:
 - Add BLE HID and examples
 - BLEHIDGamepad, BLEHIDKeyboard, and BLEHIDMouse
 - Update PowerSave examples
 - Support RTL8722DM MINI and RTL8720DN/BW16
 - Enable LwIP hostname edit
- API Updates:
 - Update API for PowerSave
 - Update ameba_d_tools 1.0.7 for all 3 platforms
 - Support RTL8720DN/BW16 and RTL8722DM MINI
 - Add more Aon wake up pins
 - Update API for IR
 - Removed requirement to define both IR TX and RX pins in IRDevice::begin
 - Removed previous limit on number of time durations IRDevice::send can accept
 - Update GPIO Int
 - Enable INPUT_IRQ_CHANGE
 - Add definition inside wiring_constants.h and wiring_digital.c, also complete the TODO part for attachInterrupt() as well
 - Update UART, for RTL8720DN/BW16 not showing log issue
 - Fix wrong attribute permissions for characteristic CCCD descriptor. Remove unused variable warnings

- Update GTimer, for the internal timer ID validation test
 - Updated SPI connection for RTL8720DN/BW16
 - Update Google_Cloud_IoT example with new Google TLS cert
 - Update Analog Pin remove A0 and A1
 - Update Platform.txt for Windows OS with User Name having a space in between
 - Update all libs
 - Misc:
 - Update AmebaEink.zip, SPI connection for RTL8720DN/BW16
 - Add Autoflash_patch folder
 - Update the Fritzing of RTL8720DN/BW16, remove A0 and A1
-

Version 3.1.0 - 2021/11/05

- Feature:
 - Support board RTL8720DN(BW16)
 - Add WiFiControlCar example
 - Add Arduboy zip library
 - Add WPA3 support
 - Add Amebad_HMI_MQTT zip library
 - Add support for IPV6 wiht 4 examples
 - WLAN lib update
 - Minor bug fix
- API Updates:
 - Support Microsoft Azure IoT cloud
 - Enable “strlen” from rom
 - Add “#define yield” for compilation
 - Update PubSubClient lib
 - Update APIs for RTL8720DN(BW16) (SPI, I2C, Fatfs, Audiocodec and UART)
 - Update jtag enable functions
 - Update wifi security option
 - Remove the unused libs lib_wifi_fw.a lib_wifi_ucps_fw.a

- Update watchdog
 - Update AudioCodec
 - Pin mapping updates
 - Remove unused marcos
 - RTL8720DN(BW16) related naming update for all examples
 - Update PowerSave
 - Misc
 - Add RTL8720DN_BW16 fritzing folder
 - Move RTL8720DN_BW16 fritzing files to correct folder
 - Rename folder name to short the length of path
 - Add Offline_SDK_installation_tool (Windows, Linux and MacOS)
 - Update linux tools for compatibility issue
 - Update RTL8722DM MINI and RTL8720DN(BW16) Fritzing and Pinmux
 - Update ameba_d_tools V1.0.6
 - Add Image_Related folder
 - Correct the core from Cortex-M4 to Cortex-M33
-

Version 3.0.11 - 2021/10/26

- Feature:
 - Add example, FatfsSDIO - Read and open HTML file from SD card
 - API Updates:
 - RTL8720DN/BW16 related compatibility update for all examples
 - Misc
 - Update RTL8722DM MINI and RTL8720DN Fritzing and Pinmux
-

Version 3.0.10 - 2021/09/22

- Feature:
 - Add AudioCodec wav examples
- API Updates:
 - Pin mapping updates for RTL8722DM MINI
 - Remove unused marcos

- Update platform.txt for bin files process
 - rollback for “wifi.h” update
 - Minor bug fix patch
-

Version 3.0.9 - 2021/09/13

- API Updates:
 - Pin mapping updates
 - Remove unused marcos
 - “wifi.h” related files change to “Amebawifi.h”
-

Version 3.0.8 - 2021/05/06

- Feature:
 - Add RTL8722DM_mini board
 - Add fatfs for SD card
 - Add AudioCodec
 - Add TensorFlow lite support with examples
 - Add zip libraries for TensorFlow lite support
 - Update SDK for supporting Arduino IDE 2.0
 - Update wlan lib
 - API Updates:
 - Update zip libraries of Eink
 - ADC updates, Change calculation method to use EFUSE calibration parameters and SDK formula to improve accuracy
 - writing_analog updates, minor bug fix and support for mini board
 - SPI updates, minor bug fix and support for mini board
 - I2S updates, minor bug fix and support for mini board
 - IRDevice updates, minor bug fix
-

Version 3.0.7 - 2020/11/19

- Feature:
 - Add AmebaIRDevice example IRSendSONY
-

- Update Ameba Arduino IRDevice API
 - Update Ameba Arduino SSL related API
 - Update Ameba Arduino Wlan API to support static IP function
-

Version 3.0.6 - 2020/10/28

- Feature:
 - Add Ameba RTC support
 - Add AmebaRTC example RTC and RTCArm
 - Add Ameba Watchdog support
 - Add AmebaWatchdog example WatchdogTimer
 - Update Ameba BLE support
 - Add AmebaBLE example BLEUartService, DHT_over_BLEUart
 - Update Ameba Wlan library
 - Update Ameba Wlan SDK structure, add AP mode hidden SSID support
-

Version 3.0.5 - 2020/09/09

- Feature:
 - Build in tool updates V1.0.4
 - Add zip lib AmebaEink
 - Add AmebaEink example EinkDisplayImage, EinkDisplayQR, and EinkDisplayText
 - Add google cloud examples
 - Update Amazon AWS related examples
 - Add power save support
 - Add AmebaPowerSave example TicklessMode, DeepSleepMode, DeepSleep_DHT_LCD_Example, and DeepSleep_DHT_Eink_Example
-

Version 3.0.4 - 2020/07/27

- Feature:
 - Update BLE library. Add example BLEBatteryClient and BLEWifiConfig
 - Update from polarssl to mbedtls 2.4.0
-

Version 3.0.3 - 2020/07/03

- Feature:
 - Build in Image tool updates V1.0.3
 - Upload log clean up
-

Version 3.0.2 - 2020/06/30

- Feature:
 - Windows, Linux and macOS X support
 - Build in Image tool updates
-

Version 3.0.1 - 2020/05/15

- Feature:
 - Official release of AmebaD Arduino SDK
 - warning cleaning
 - I2C lib updates
-

Version 3.0.0 - 2020/05/01

- Feature:
 - Support Boards Manager and Arduino IDE development
 - WiFi scan AP, connect to AP, TCP Server/Client, including 5G
 - Bluetooth, BLE
 - GPIO digital in/out and interrupt
 - ADC analog in/out (0 ~ 3.3V)
 - PWM getting analog results with digital means
 - SPI master and slave mode
 - UART 1 for log, 2 for customize usage
 - I2C master mode

1.1.3 Peripherals & Examples

Basic Examples

Ameba ARDUINO: [RTL8722CSM][RTL8722DM] Supported ARDUINO built-in example list

There are many built-in examples in Arduino. In the table below, we list all examples that are compatible with Ameba.

Category	Name	Comment
01.Basics	AnalogReadSerial	Connect potentiometer to 3.3V
	BareMinimum	
	Blink	Connect LED to pin 8
	DigitalReadSerial	
	Fade	
	ReadAnalogVoltage	ADC can read a maximum of 3.3V.
02.Digital	BlinkWithoutDelay	Connect LED to pin 8
	Button	Connect LED to pin 13
	Debounce	Connect LED to pin 13
	DigitalInputPullup	Connect LED to pin 13
	StateChangeDetection	Connect LED to pin 13
	toneKeyboard	
	toneMelody	
	toneMultiple	
	tonePitchFollower	
03.Analog	AnalogInOutSerial	
	AnalogInput	Connect LED to pin 13
	Analog Write Mega	
	Calibration	Connect another LED to pin 13
	Fading	
	Smoothing	
04.Communication	ASCIITable	
	Dimmer	Use serial baud rate 115200
	Graph	Use serial baud rate 115200, Connect potentiometer to 3.3V
	Midi	Please use Serial1 and pin 26, or use Serial2 and pin 17
	MultiSerial	
	PhysicalPixel	Use serial baud rate 115200
	ReadASCIIString	
	SerialCallResponse	Use serial baud rate 115200

下页继续

表 1 – 续上页

Category	Name	Comment
	Serial CallResponseASCII	Use serial baud rate 115200
	SerialEvent	
	SerialPassthrough	
	VirtualColorMixer	Use serial baud rate 115200
05.Control	Arrays	Use pins 1, 2, 3, 4, 5, 6
	ForLoopIteration	Use pins 1, 2, 3, 4, 5, 6
	IfStatementConditional	
	switchCase	
	switchCase2	
	While StatementConditional	Connect another LED to pin 13
06.Display	barGraph	Use another pin to replace pin 7
	RowColumnScanning	
07.Strings	CharacterAnalysis	
	String AdditionOperator	
	StringAppendOperator	
	StringCaseChanges	
	StringCharacters	
	String ComparisonOperators	
	StringIndexOf	
	StringLength	
	StringLengthTrim	
	StringReplace	
	String StartsWithEndsWith	
	StringSubstring	
	StringToInt	

Network Examples

Connect to WiFi

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1

Procedure

There three common encryption type in WiFi connection. The first one is “OPEN” , which means there is no password


needed to connect to this network. The second type of encryption is WPA, which requires the correct password to access. The third type is WEP, which requires a hexadecimal password and a keyindex.

In the following, we will give a brief introduction on how to establish WiFi connection with these three types of encryption on Ameba.

First, make sure the correct Ameba development board is selected in “Tools” -> “Board” .

- Open (WiFi connection without password)

Open the “ConnectNoEncryption” example in “File” -> “Examples” -> “AmebaWiFi” -> “ConnectWithWiFi” -> “ConnectNoEncryption”

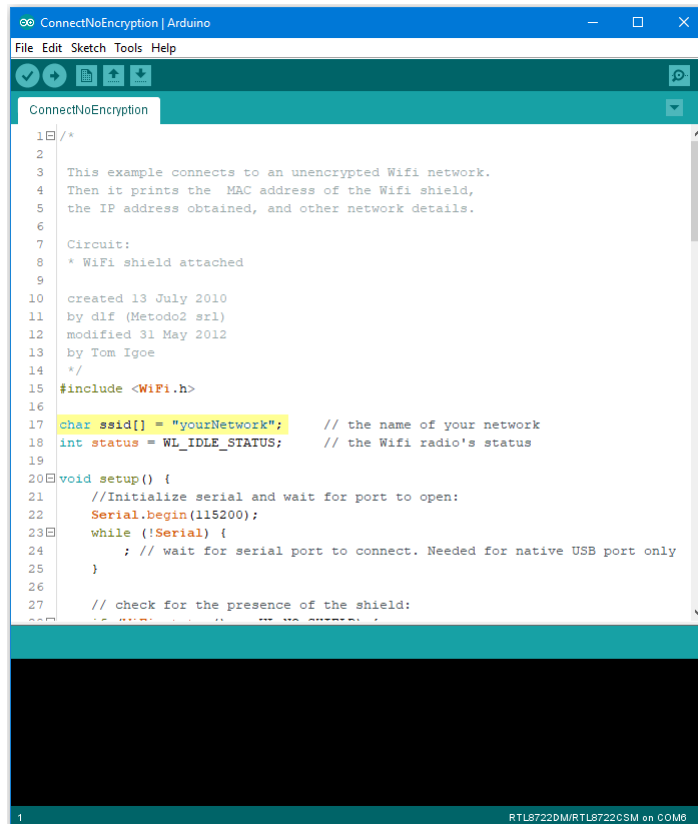

```

1  /*
2
3  This example connects to an unencrypted Wifi network.
4  Then it prints the MAC address of the Wifi shield,
5  the IP address obtained, and other network details.
6
7  Circuit:
8  * Wifi shield attached
9
10 created 13 July 2010
11 by dlf (Metodo2 srl)
12 modified 31 May 2012
13 by Tom Igoe
14 */
15 #include <WiFi.h>
16
17 char ssid[] = "yourNetwork"; // the name of your network
18 int status = WL_IDLE_STATUS; // the Wifi radio's status
19
20 void setup() {
21   //Initialize serial and wait for port to open:
22   Serial.begin(115200);
23   while (!Serial) {
24     ; // wait for serial port to connect. Needed for native USB port only
25   }
26
27   // check for the presence of the shield:

```

In the sample code, modify “ssid” to be the same as the WiFi SSID to be connected to.

Next, upload the sample code, and press the reset button on Ameba. Then you will see a message “You’re connected to the networkSSID: XXXXX”, and the information of this WiFi connection is printed in the serial monitor every 10 seconds.

```

COM6
Interface 0 IP address : 192.168.43.32
You're connected to the networkSSID: Test network
BSSID: EE:C0:E7:86:9E:E
signal strength (RSSI):-55
Encryption Type:0
IP Address: 192.168.43.32
192.168.43.32
MAC address: 70:1D:8:4:55:32
NetMask: 255.255.255.0
Gateway: 192.168.43.235
SSID: Test network
BSSID: EE:C0:E7:86:9E:E
signal strength (RSSI):-55
Encryption Type:0
SSID: Test network
BSSID: EE:C0:E7:86:9E:E
signal strength (RSSI):-58
Encryption Type:0
SSID: Test network
BSSID: EE:C0:E7:86:9E:E
signal strength (RSSI):-57
Encryption Type:0

```

- WiFi connection with WPA encryption

Open the “ConnectWithWPA” example in “File” -> “Examples”
 -> “AmebaWiFi” -> “ConnectWithWiFi” -> “ConnectWithWPA”

```

ConnectWithWPA | Arduino
File Edit Sketch Tools Help
ConnectWithWPA
1 /*
2
3 This example connects to an unencrypted Wifi network.
4 Then it prints the MAC address of the Wifi shield,
5 the IP address obtained, and other network details.
6
7 Circuit:
8 * Wifi shield attached
9
10 created 13 July 2010
11 by dlf (Metodo2 srl)
12 modified 31 May 2012
13 by Tom Igoe
14 */
15 #include <WiFi.h>
16
17 char ssid[] = "yourNetwork"; // your network SSID (name)
18 char pass[] = "secretPassword"; // your network password
19 int status = WL_IDLE_STATUS; // the Wifi radio's status
20
21 void setup() {
22 //Initialize serial and wait for port to open:
23 Serial.begin(115200);
24 while (!Serial) {
25 // wait for serial port to connect. Needed for native USB port only
26 }
27
28 // ...
29 }
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223
2224
2225
2226
2227
2228
2229
2230
2231
2232
2233
2234
2235
2236
2237
2238
2239
2240
2241
2242
2243
2244
2245
2246
2247
2248
2249
2250
2251
2252
2253
2254
2255
2256
2257
2258
2259
2260
2261
2262
2263
2264
2265
2266
2267
2268
2269
2270
2271
2272
2273
2274
2275
2276
2277
2278
2279
2280
2281
2282
2283
2284
2285
2286
2287
2288
2289
2290
2291
2292
2293
2294
2295
2296
2297
2298
2299
2300
2301
2302
2303
2304
2305
2306
2307
2308
2309
2310
2311
2312
2313
2314
2315
2316
2317
2318
2319
2320
2321
2322
2323
2324
2325
2326
2327
2328
2329
2330
2331
2332
2333
2334
2335
2336
2337
2338
2339
2340
2341
2342
2343
2344
2345
2346
2347
2348
2349
2350
2351
2352
2353
2354
2355
2356
2357
2358
2359
2360
2361
2362
2363
2364
2365
2366
2367
2368
2369
2370
2371
2372
2373
2374
2375
2376
2377
2378
2379
2380
2381
2382
2383
2384
2385
2386
2387
2388
2389
2390
2391
2392
2393
2394
2395
2396
2397
2398
2399
2400
2401
2402
2403
2404
2405
2406
2407
2408
2409
2410
2411
2412
2413
2414
2415
2416
2417
2418
2419
2420
2421
2422
2423
2424
2425
2426
2427
2428
2429
2430
2431
2432
2433
2434
2435
2436
2437
2438
2439
2440
2441
2442
2443
2444
2445
2446
2447
2448
2449
2450
2451
2452
2453
2454
2455
2456
2457
2458
2459
2460
2461
2462
2463
2464
2465
2466
2467
2468
2469
2470
2471
2472
2473
2474
2475
2476
2477
2478
2479
2480
2481
2482
2483
2484
2485
2486
2487
2488
2489
2490
2491
2492
2493
2494
2495
2496
2497
2498
2499
2500
2501
2502
2503
2504
2505
2506
2507
2508
2509
2510
2511
2512
2513
2514
2515
2516
2517
2518
2519
2520
2521
2522
2523
2524
2525
2526
2527
2528
2529
2530
2531
2532
2533
```


- WiFi connection with WEP encryption

```
Open      the      "ConnectWithWEP" example      in      "File" -> "Examples"
-> "AmebaWiFi" -> "ConnectWithWiFi" -> "ConnectWithWEP"
```

```
16
17 Circuit:
18 * WiFi shield attached
19
20 created 13 July 2010
21 by dlf (Metodo2 srl)
22 modified 31 May 2012
23 by Tom Igoe
24 */
25 #include <WiFi.h>
26
27 char ssid[] = "yourNetwork";           // your network SSID (name)
28 char key[] = "D0D0DEADF00DABBADEAFBEADED"; // your network key
29 int keyIndex = 0;                       // your network key Index number
30 int status = WL_IDLE_STATUS;           // the Wifi radio's status
31
32 void setup() {
33   //Initialize serial and wait for port to open:
34   Serial.begin(115200);
35   while (!Serial) {
36     ; // wait for serial port to connect. Needed for native USB port only
37   }
38
39   // check for the presence of the shield:
40   if (WiFi.status() == WL_NO_SHIELD) {
41     Serial.println("WiFi shield not present");
42     // don't continue
43   }
44 }
```

In the sample code, modify “ssid” to the SSID to be connected, “key” to the hexadecimal password, “keyIndex” to your key index number.

Next, upload the sample code, and press the reset button on Ameba. Then you will see a message “You’re connected to the networkSSID: XXXXX” , and the information of this WiFi connection is printed in the IDE every 10 seconds.

Code Reference

<https://www.arduino.cc/en/Reference/WiFiBegin>

To get the information of a WiFi connection:

Use `WiFi.SSID()` to get SSID of the current connected network.

<https://www.arduino.cc/en/Reference/WiFiSSID>

Use `WiFi.RSSI()` to get the signal strength of the connection.

<https://www.arduino.cc/en/Reference/WiFiRSSI>

Use `WiFi.encryptionType()` to get the encryption type of the WiFi connection.

<https://www.arduino.cc/en/Reference/WiFiEncryptionType>

Use `WiFi.BSSID()` to get the MAC address of the router you are connected to.

<https://www.arduino.cc/en/Reference/WiFiBSSID>

To get the information of Ameba:

Use `WiFi.macAddress()` to get the MAC address of Ameba.

<https://www.arduino.cc/en/Reference/WiFiMACAddress>

Use `WiFi.localIP()` to get the IP address of Ameba.

<https://www.arduino.cc/en/Reference/WiFiLocalIP>

Use `WiFi.subnetMask()` to get the subnet mask.

<https://www.arduino.cc/en/Reference/WiFiSubnetMask>

Use `WiFi.gatewayIP()` to get the WiFi shield's gateway IP address.

<https://www.arduino.cc/en/Reference/WiFiGatewayIP>

Comparison with Arduino

In the Arduino platform, we need to add an extra WiFi shield to be the WiFi module to realize the WiFi connection.

And we must `#include` to use SPI to communicate with WiFi module.

However, Ameba is already equipped with WiFi module. Therefore, `#include` is not needed.

Use Ameba as Server to communicate with Client

Materials


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Laptop (Make sure it is connected to the same network domain as Ameba, and tcp tools are installed.)

Example

In this example, we first connect Ameba to WiFi, then we use Ameba as server to communicate with client.

First, we make sure the correct Ameba development board is set in “Tools” -> “Board”

Then, open the Simple WiFi Server example in “File” -> “Examples” -> “AmebaWiFi” -> “SimpleServerWiFi”

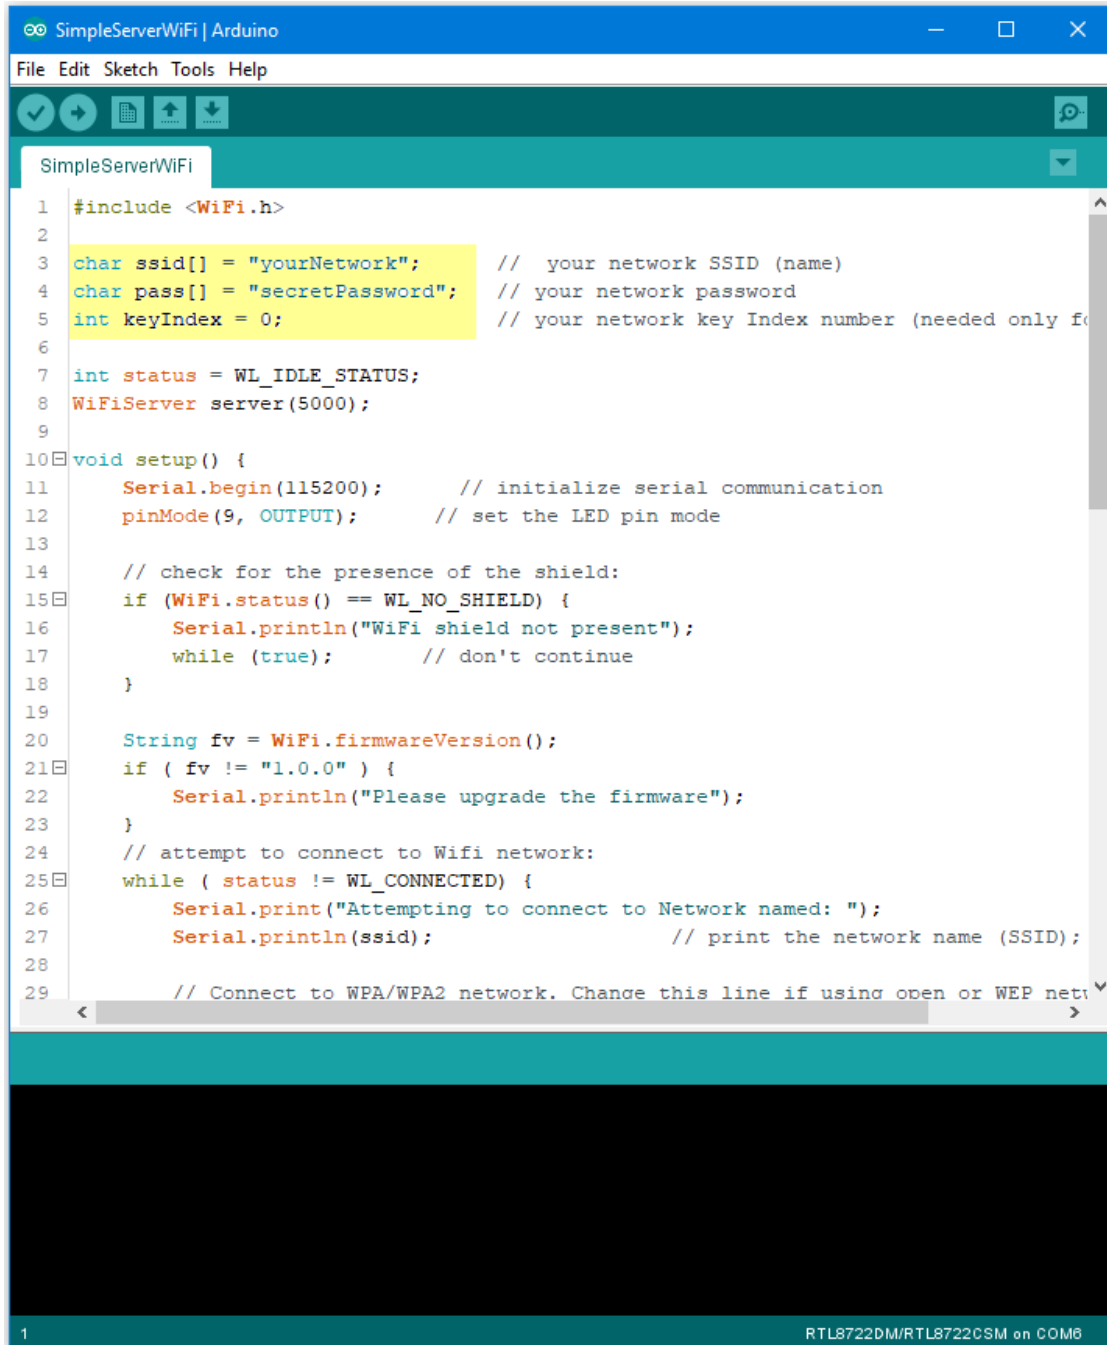


```

1 #include <WiFi.h>
2
3 char ssid[] = "yourNetwork"; // your network SSID (name)
4 char pass[] = "secretPassword"; // your network password
5 int keyIndex = 0; // your network key Index number (needed only for WEP)
6
7 int status = WL_IDLE_STATUS;
8 WiFiServer server(5000);
9
10 void setup() {
11     Serial.begin(115200); // initialize serial communication
12     pinMode(9, OUTPUT); // set the LED pin mode
13
14     // check for the presence of the shield:
15     if (WiFi.status() == WL_NO_SHIELD) {
16         Serial.println("WiFi shield not present");
17         while (true); // don't continue
18     }
19
20     String fv = WiFi.firmwareVersion();
21     if ( fv != "1.0.0" ) {
22         Serial.println("Please upgrade the firmware");
23     }
24     // attempt to connect to Wifi network:
25     while ( status != WL_CONNECTED) {
26         Serial.print("Attempting to connect to Network named: ");
27         Serial.println(ssid); // print the network name (SSID);
28
29         // Connect to WPA/WPA2 network. Change this line if using open or WEP network

```

In the sample code, modify the highlighted parameters and enter the ssid and password for your WiFi connection.

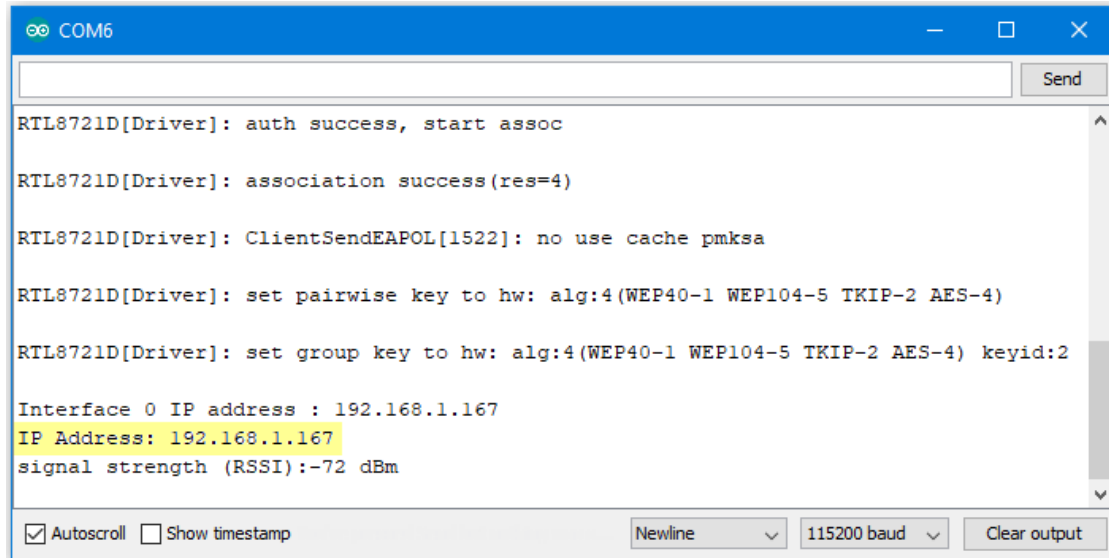

```

COM6
Send

RTL8721D[Driver]: auth success, start assoc

RTL8721D[Driver]: association success(res=4)

RTL8721D[Driver]: ClientSendEAPOL[1522]: no use cache pmksa

RTL8721D[Driver]: set pairwise key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4)

RTL8721D[Driver]: set group key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4) keyid:2


Interface 0 IP address : 192.168.1.167
IP Address: 192.168.1.167
signal strength (RSSI):-72 dBm

☒ Autoscroll ☐ Show timestamp
Newline 115200 baud Clear output

```

Next, upload the code, then press the reset button on Ameba. At this moment, you will see the connection information is displayed in the console.

Next, we use the socket tool in the laptop to be the client and connect to the IP address of the Ameba board shown in the connection information at port 5000. (Note: The socket tool we used in this example is “sokit”)

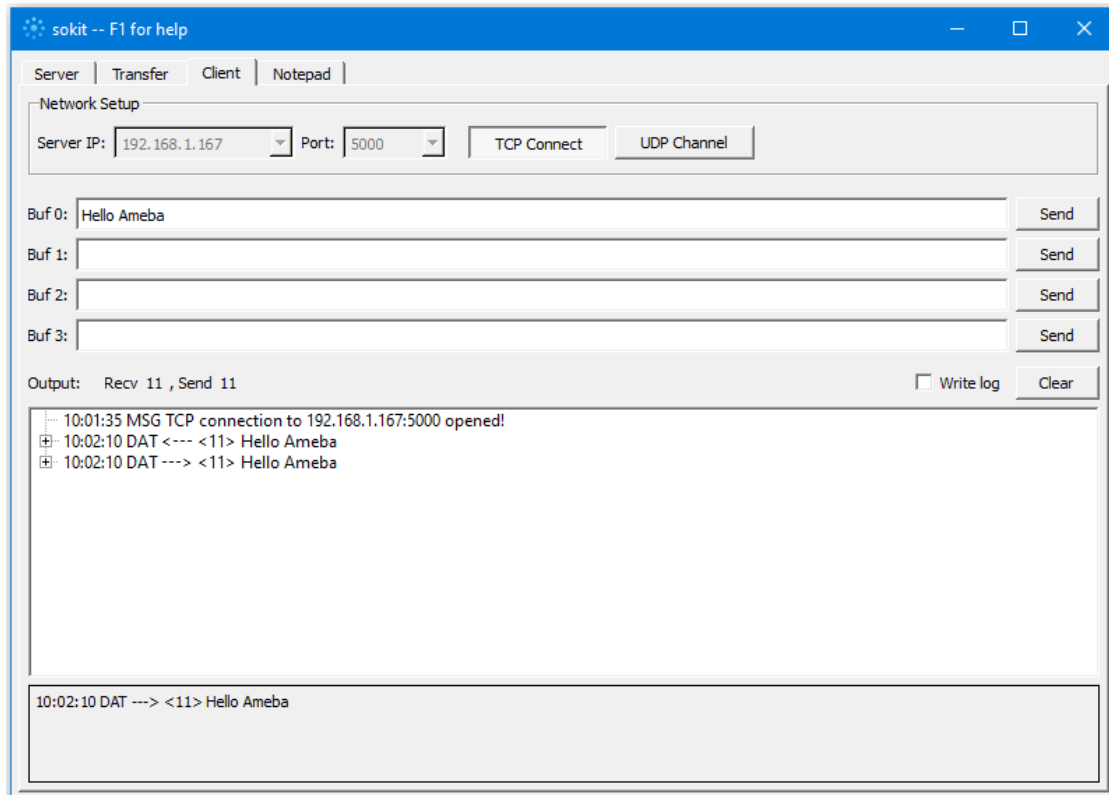

```

sokit -- F1 for help
Server | Transfer | Client | Notepad |
Network Setup
Server IP: 192.168.1.167 Port: 5000 TCP Connect UDP Channel

Buf 0: Hello Ameba Send
Buf 1: Send
Buf 2: Send
Buf 3: Send

Output: Recv 11 , Send 11 ☐ Write log Clear

10:01:35 MSG TCP connection to 192.168.1.167:5000 opened!
10:02:10 DAT <--- <11> Hello Ameba
10:02:10 DAT ---> <11> Hello Ameba

10:02:10 DAT ---> <11> Hello Ameba


```

Click on the “Client” tab to choose the client mode, specify the IP and port of the server, then click “TCP Connect” .

If the connection is established successfully, the server shows a message: “A client connected to this Server” , and the

IP and port of the connected client.

In this example, when the client and server are connected and the client sends a string to Ameba server, the Ameba server returns the identical string back to the client.

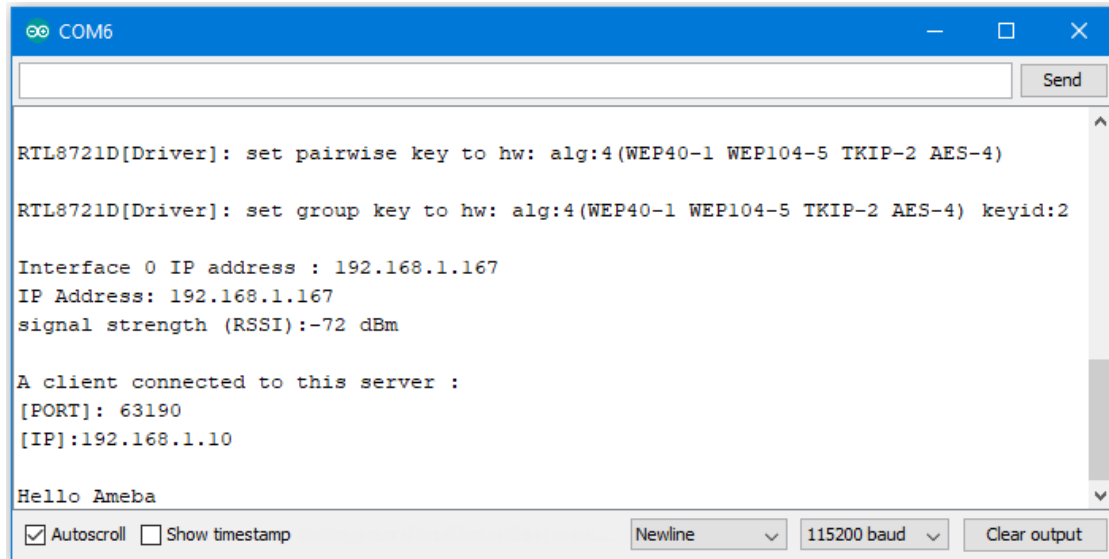

```

COM6

RTL8721D[Driver]: set pairwise key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4)

RTL8721D[Driver]: set group key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4) keyid:2

Interface 0 IP address : 192.168.1.167
IP Address: 192.168.1.167
signal strength (RSSI):-72 dBm

A client connected to this server :
[PORT]: 63190
[IP]:192.168.1.10

Hello Ameba
  
```

The string sent to server is returned and showed at the client side.

Code Reference

Use `WiFi.begin()` to establish WiFi connection;

<https://www.arduino.cc/en/Reference/WiFiBegin>

To get the information of a WiFi connection:

Use `WiFi.SSID()` to get SSID of the current connected network.

<https://www.arduino.cc/en/Reference/WiFiSSID>

Use `WiFi.RSSI()` to get the signal strength of the connection.

<https://www.arduino.cc/en/Reference/WiFiRSSI>

Use `WiFi.localIP()` to get the Ameba WiFi shield's IP address.

<https://www.arduino.cc/en/Reference/WiFiLocalIP>

Create server and transmitting data:

Use `Server(port)` to create a server that listens on the specified port.

<https://www.arduino.cc/en/Reference/WiFiServer>

Use `server.begin()` to tell the server to begin listening for incoming connections.

<https://www.arduino.cc/en/Reference/WiFiServerBegin>

Use `server.available()` to get a client that is connected to the server and has data available for reading.

<https://www.arduino.cc/en/Reference/WiFiServerAvailable>

Use `client.read()` to read the next byte received from the server.

<https://www.arduino.cc/en/Reference/WiFiClientRead>

Use `client.write()` to write data to the server.

<https://www.arduino.cc/en/Reference/WiFiClientWrite>

Use `client.stop()` to disconnect from the server.

<https://www.arduino.cc/en/Reference/WiFiClientStop>

Use Ameba to retrieve HTTP websites from the internet

Materials


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1

Example


In this example, the `HttpClient` library is used to retrieve a webpage using the HTTP protocol.

First, make sure that the correct Ameba development board is selected in “Tools” -> “Board”

Then open “File” -> “Examples” -> “AmebaHttp” -> “SimpleHttpExample”

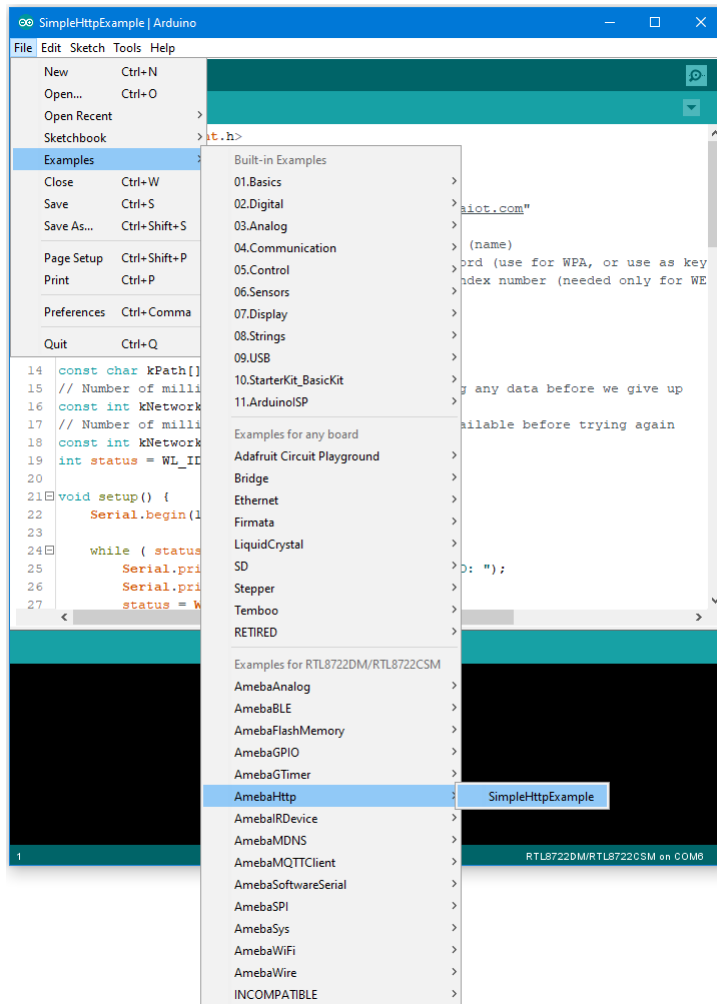

In the sample code, modify the highlighted section to enter the information required (ssid, password, key index) to connect to your WiFi network.

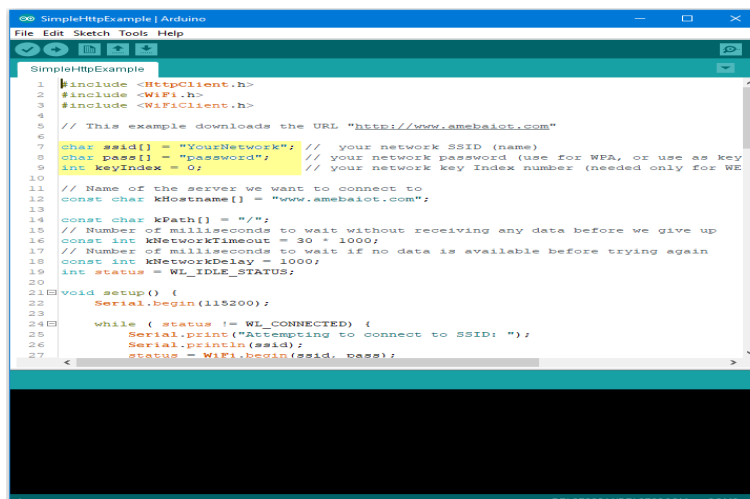

Upload the code and press the reset button on Ameba once the upload is finished. Open the serial monitor in the Arduino IDE and you can see the information retrieved from the website.

```

COM4

Interface 0 IP address : 172.25.24.188Connected to wifi
SSID: RealEZ
IP Address: 172.25.24.188
signal strength (RSSI):-56 dBm

Connect to Server successful!
startedRequest ok
Got status code: 200
Content length is: 0

Body returned follows:
<!doctype html><html itemscope="" itemtype="http://schema.org/WebPage" lang="en-SG"><head><meta content=
document.documentElement.addEventListener("submit",function(b){var a;if(a=b.target){var c=a.getAttribute
var a=window.location,b=a.href.indexOf("#");if(0<=b){var c=a.href.substring(b+1);/^\/s)/.test(c)}s-l==
</style><style>body,td,a,p,h{font-family:arial,sans-serif}body{margin:0;overflow-y:scroll}#gog{padding:
if (!iesg){document.f&&document.f.q.focus();document.gbqf&&document.gbqf.q.focus();}
}
})();</script><div id="mnbg"><div id=gbar><nobr><b class=gbl>Search</b><a class=gbl href="http://www.g
else top.location='/doodles/';})();</script><input value="AAPIEIEAAAAAKjAd2Cy4lLwKhgibG7of5MoLQmLDRW2G
setTimeout(function(){var b=document;var a="SCRIPT";"application/xhtml+xml"===b.contentType&&(a=a.toLowe
function _F_installCss(c){
(function(){google.spjs=false;google.snet=true;google.em=[];google.emm=false;})();(function(){var pnc='
<
>

☒ Autoscroll ☐ Show timestamp
No line ending 9600 baud Clear output

```

Code Reference

Use `WiFi.begin()` to establish WiFi connection:

<https://www.arduino.cc/en/Reference/WiFiBegin>

To get the information of a WiFi connection:

Use `WiFi.SSID()` to get SSID of the current connected network.

<https://www.arduino.cc/en/Reference/WiFiSSID>

Use `WiFi.RSSI()` to get the signal strength of the connection.

<https://www.arduino.cc/en/Reference/WiFiRSSI>

Use `WiFi.localIP()` to get the IP address of Ameba.

<https://www.arduino.cc/en/Reference/WiFiLocalIP>

Use `WiFiClient` to create a client to handle the WiFi connection.

<https://www.arduino.cc/en/Reference/WiFiClient>

Use `HTTPClient` to create a client to handle the HTTP connection.

Use `http.get()` to send a GET request to the website.

Use Ameba to retrieve information from the Internet

Materials


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1

Example


In this example, we use Ameba to be a web client to retrieve information from the Internet.

First, make sure the correct Ameba development board is selected in “Tools” -> “Board”

Then open “File” -> “Examples” -> “AmebaWiFi” -> “WiFiWebClient”

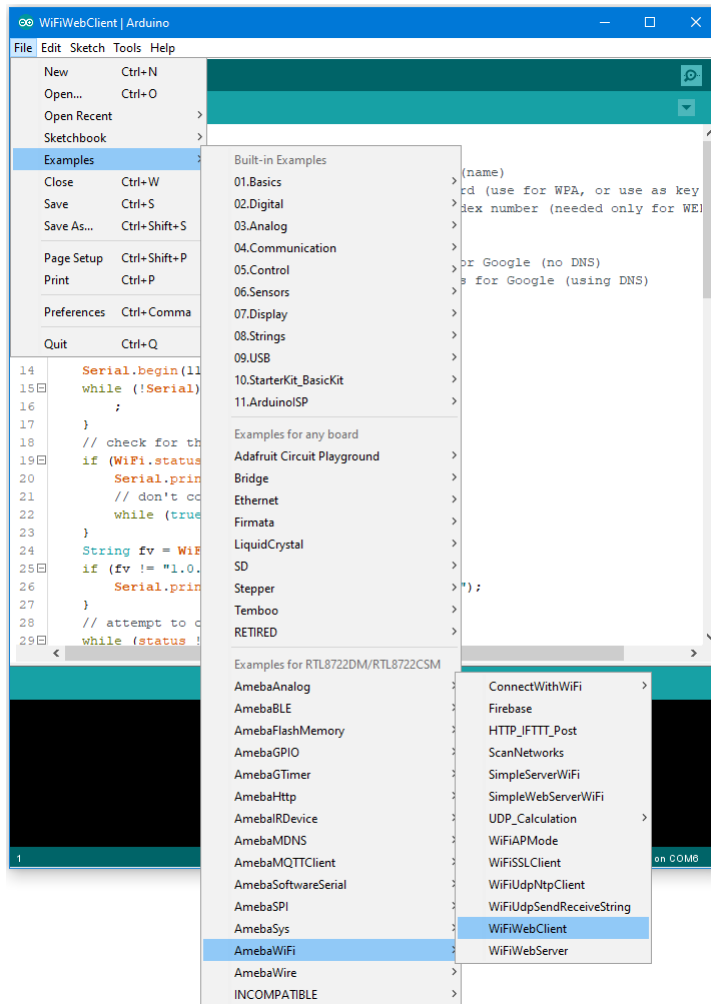

In the sample code, modify the highlighted snippet and enter the required information (ssid, password, key index) required to connect to your WiFi network.

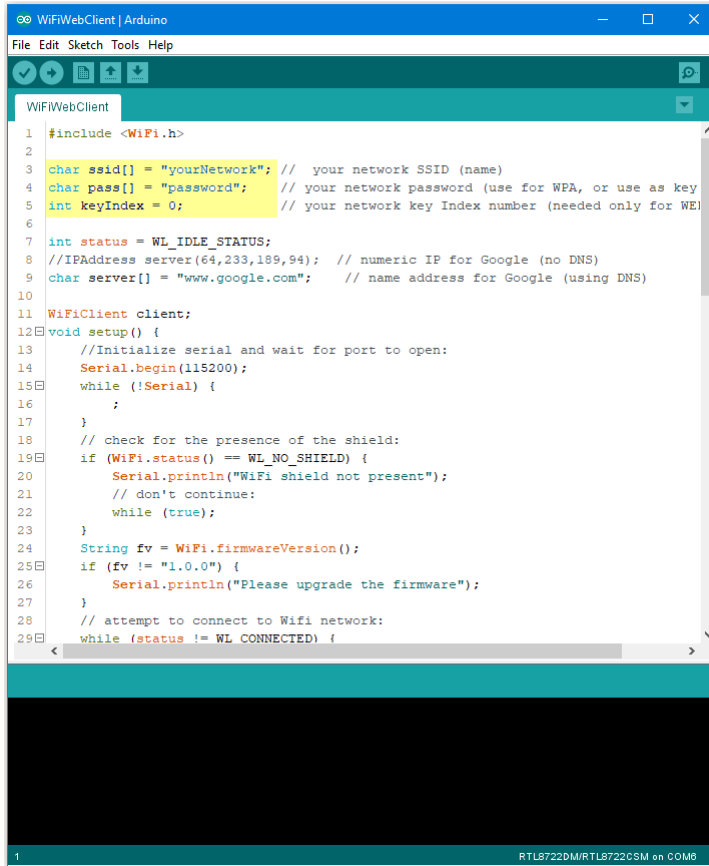


```

1 #include <WiFi.h>
2
3 char ssid[] = "yourNetwork"; // your network SSID (name)
4 char pass[] = "password"; // your network password (use for WPA, or use as key
5 int keyIndex = 0; // your network key Index number (needed only for WEP)
6
7 int status = WL_IDLE_STATUS;
8 //IPAddress server(64,233,189,94); // numeric IP for Google (no DNS)
9 char server[] = "www.google.com"; // name address for Google (using DNS)
10
11 WiFiClient client;
12 void setup() {
13     //Initialize serial and wait for port to open:
14     Serial.begin(115200);
15     while (!Serial) {
16         ;
17     }
18     // check for the presence of the shield:
19     if (WiFi.status() == WL_NO_SHIELD) {
20         Serial.println("WiFi shield not present");
21         // don't continue:
22         while (true);
23     }
24     String fv = WiFi.firmwareVersion();
25     if (fv != "1.0.0") {
26         Serial.println("Please upgrade the firmware");
27     }
28     // attempt to connect to Wifi network:
29     while (status != WL_CONNECTED) {

```

Upload the code and press the reset button on Ameba. Then you can see the information retrieved from Google is shown in the Arduino serial monitor.

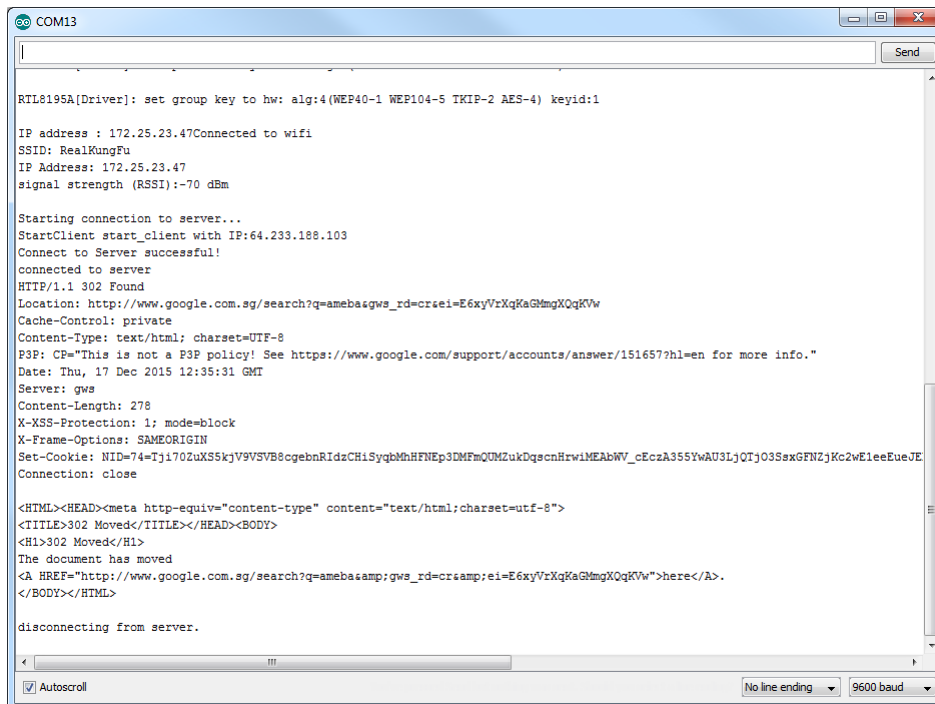

```

RTL8195A[Driver]: set group key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4) keyid:1

IP address : 172.25.23.47Connected to wifi
SSID: RealKungFu
IP Address: 172.25.23.47
signal strength (RSSI): -70 dBm

Starting connection to server...
StartClient start_client with IP:64.233.188.103
Connect to Server successful!
connected to server
HTTP/1.1 302 Found
Location: http://www.google.com.sg/search?q=amebas&gws_rd=cr&ei=E6xyVrXqKaGmngXQqKVw
Cache-Control: private
Content-Type: text/html; charset=UTF-8
P3P: CP="This is not a P3P policy! See https://www.google.com/support/accounts/answer/151657?hl=en for more info."
Date: Thu, 17 Dec 2015 12:35:31 GMT
Server: gws
Content-Length: 278
X-XSS-Protection: 1; mode=block
X-Frame-Options: SAMEORIGIN
Set-Cookie: NID=74=Tji70ZuX55kjV9VSVB8cgebnRIdzChISyqkMhHFNEp3DMFmQUMZukDqscnHrwiMEAbWV_cEcA355YwAU3LjQTjO3SsxGFNZjKc2wE1eeEueJE
Connection: close

<HTML><HEAD><meta http-equiv="content-type" content="text/html; charset=utf-8">
<TITLE>302 Moved</TITLE></HEAD><BODY>
<H1>302 Moved</H1>
The document has moved
<A HREF="http://www.google.com.sg/search?q=amebas&gws_rd=cr&ei=E6xyVrXqKaGmngXQqKVw">here</A>.
</BODY></HTML>

disconnecting from server.

```

Code Reference

<https://www.arduino.cc/en/Reference/WiFiBegin>

To get the information of a WiFi connection: Use `WiFi.SSID()` to get SSID of the current connected network.

<https://www.arduino.cc/en/Reference/WiFiSSID>

Use `WiFi.RSSI()` to get the signal strength of the connection.

<https://www.arduino.cc/en/Reference/WiFiRSSI>

Use `WiFi.localIP()` to get the IP address of Ameba.

<https://www.arduino.cc/en/Reference/WiFiLocalIP>

Use `WiFiClient()` to create a client.

<https://www.arduino.cc/en/Reference/WiFiClient>

Use `client.connect()` to connect to the IP address and port specified.

<https://www.arduino.cc/en/Reference/WiFiClientConnect>

Use `client.println()` to print data followed by a carriage return and newline.

<https://www.arduino.cc/en/Reference/WiFiClientPrintln>

Use `client.available()` to return the number of bytes available for reading.

<https://www.arduino.cc/en/Reference/WiFiClientAvailable>

Use `client.read()` to read the next byte received from the server the client is connected to.

<https://www.arduino.cc/en/Reference/WiFiClientRead>

Use `client.stop()` to disconnect from the server the client is connected to.

<https://www.arduino.cc/en/Reference/WiFiClientStop>

Use Ameba as Server to control LED

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Breadboard x 1
- LED x 1
- 1K Ω Resistor x 1


Procedure


In this example, we connect Ameba to WiFi and use Ameba as server, the user can control the LED on/off through a webpage.

First, connect Ameba with the LED.


In a LED, the longer pin is the positive pole, and the shorter pin is the negative pole. So, we connect the shorter pin to GND and connect the longer pin to D13. Additionally, to avoid the electric current exceeds the tolerance of the LED and causes damage, we connect a resistance on the positive pole.

RTL8722DM / RTL8722CSM Wiring Diagram:

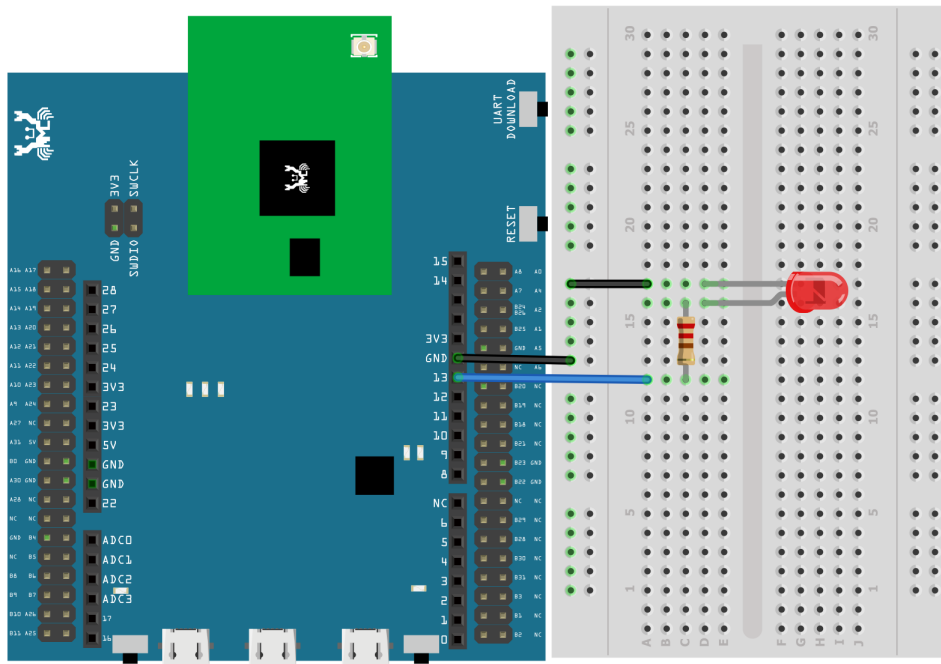

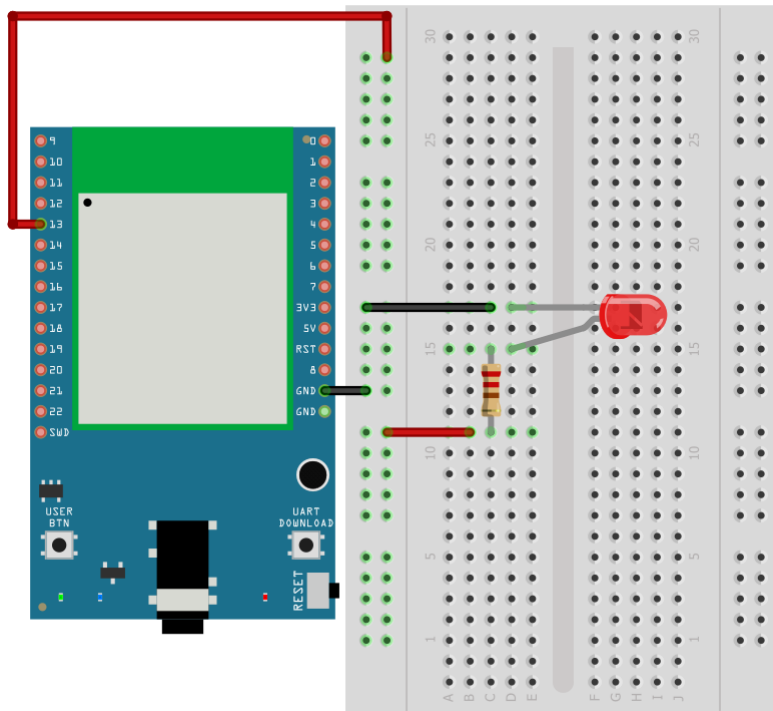

Then open “File” -> “Examples” -> “AmebaWiFi” -> “SimpleWebServerWiFi”

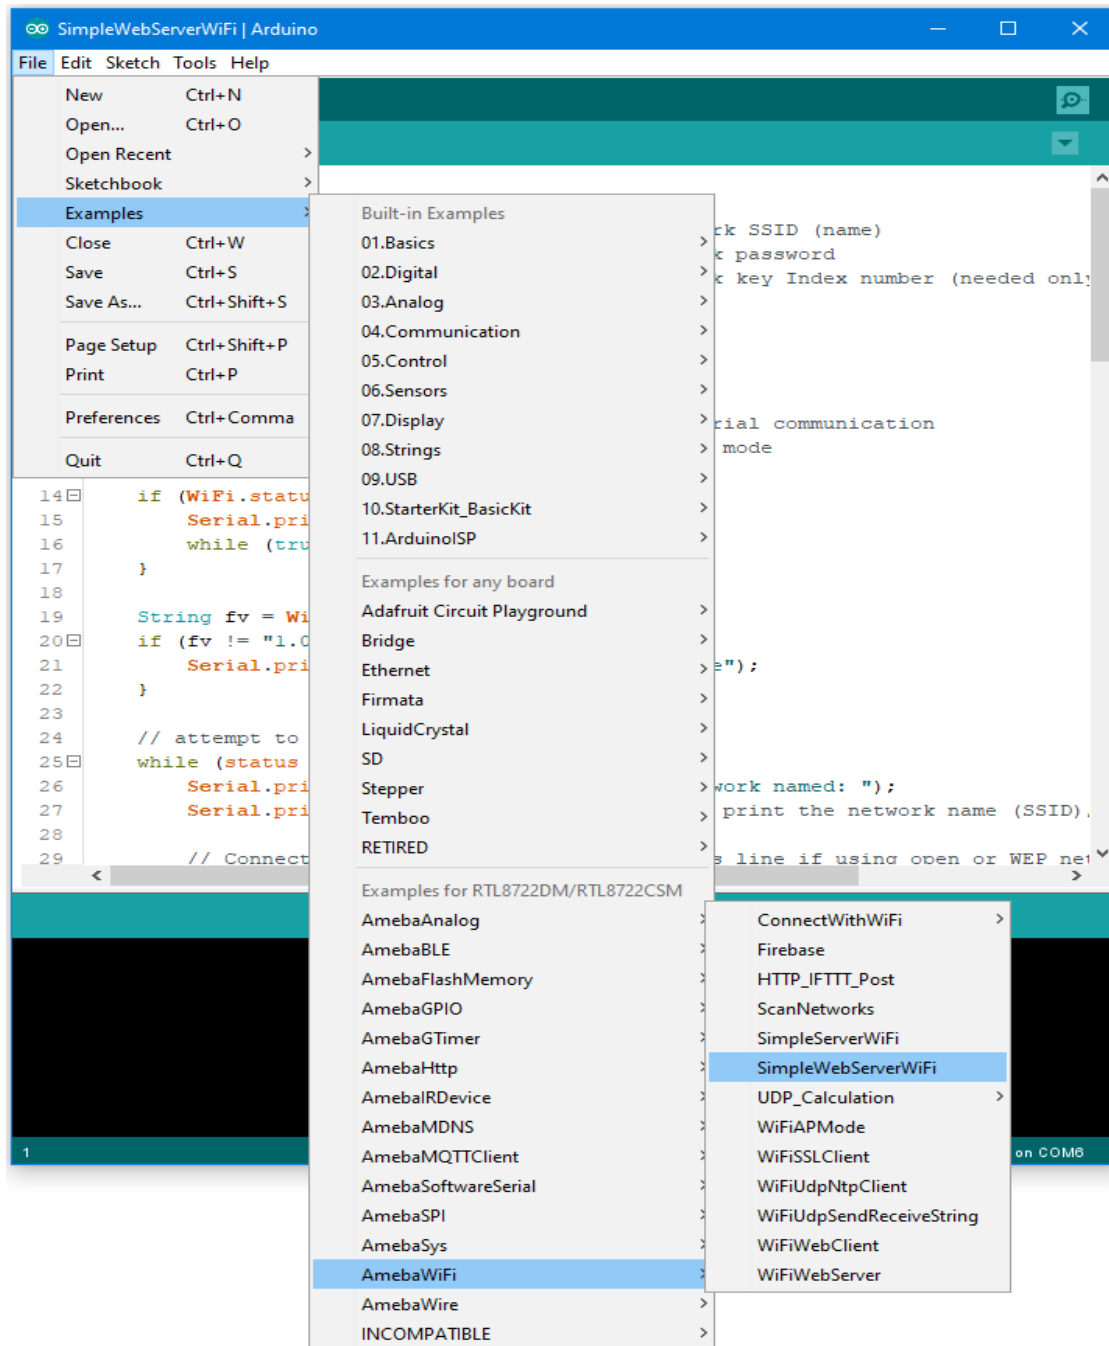


In the sample code, modify the highlighted snippet to corresponding information.

The bottom status bar shows '1' and 'RTL8722DM/RTL8722CSM on COM8'."/>


Upload the code and press the reset button on Ameba. When the connection is established, you will see the message:

"To see this page in action, open a browser to `http://xxx.xxx.xxx.xxx`"

in the Arduino IDE as shown in the figure:

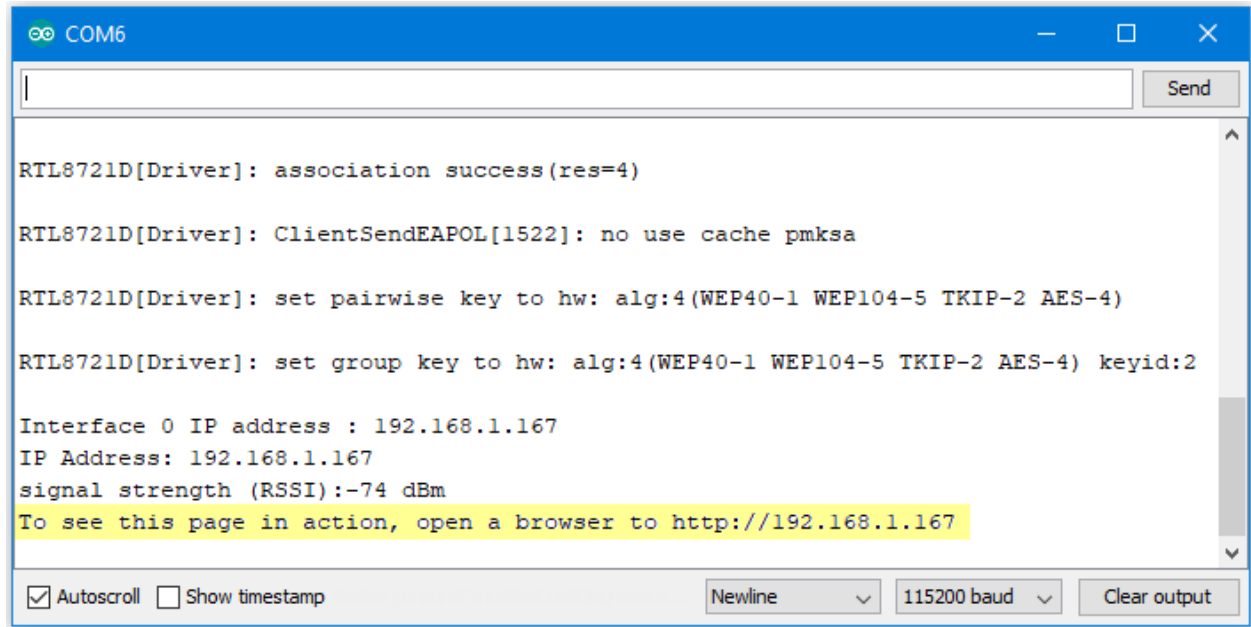

Next, open the browser of a computer or a cell phone under the same WiFi domain, enter the address in the message.

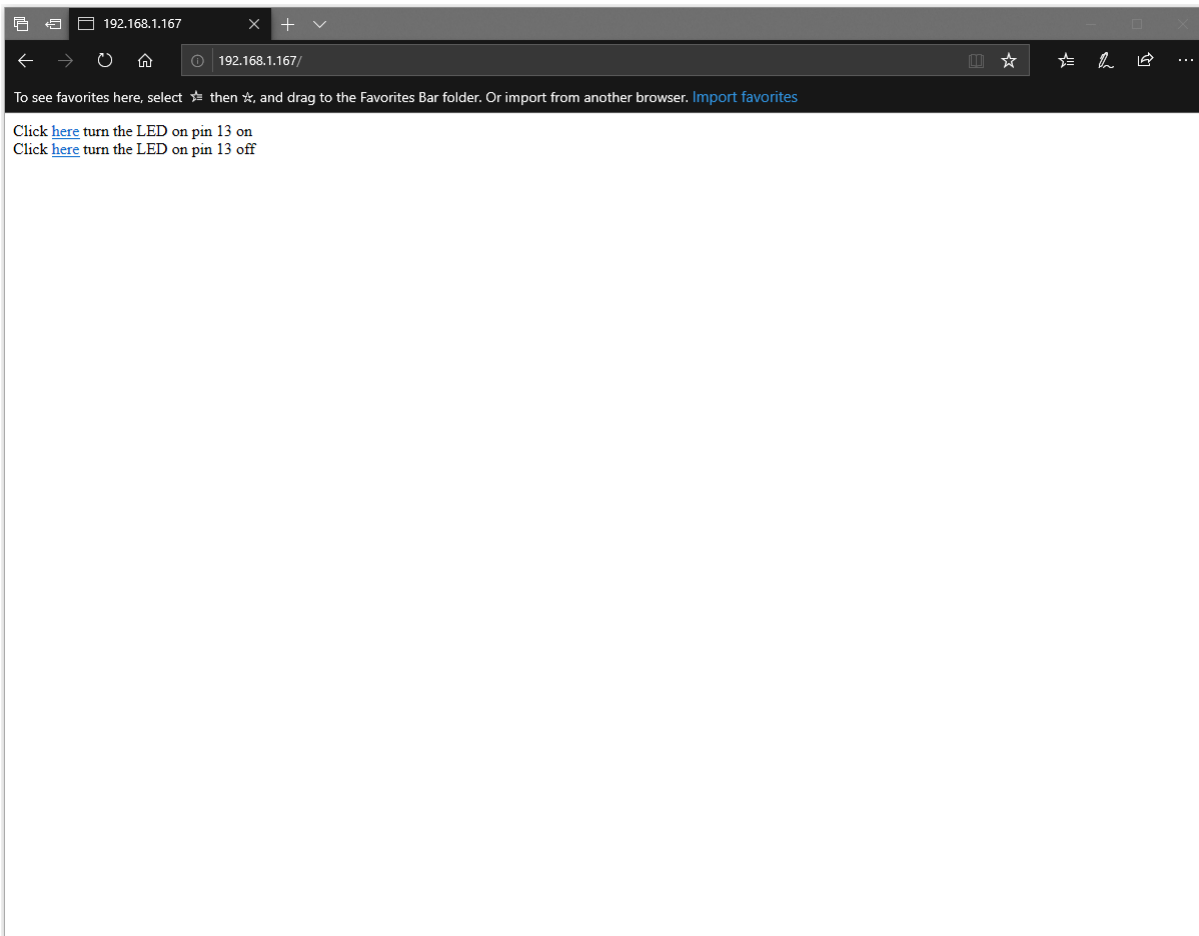

In the webpage, you can turn on/off the LED.

Code Reference

Use `WiFi.begin()` to establish WiFi connection.

<https://www.arduino.cc/en/Reference/WiFiBegin>

To get the information of a WiFi connection:

Use `WiFi.SSID()` to get SSID of the current connected network.

<https://www.arduino.cc/en/Reference/WiFiSSID>

Use `WiFi.RSSI()` to get the signal strength of the connection.

<https://www.arduino.cc/en/Reference/WiFiRSSI>

Use `WiFi.localIP()` to get the IP address of Ameba.

<https://www.arduino.cc/en/Reference/WiFiLocalIP>

Use `WiFiServer server()` to create a server that listens on the specified port.

<https://www.arduino.cc/en/Reference/WiFiServer>

Use `server.begin()` to tell the server to begin listening for incoming connections.

<https://www.arduino.cc/en/Reference/WiFiServerBegin>

Use `server.available()` to get a client that is connected to the server and has data available for reading.

<https://www.arduino.cc/en/Reference/WiFiServerAvailable>

Use `client.connected()` to get whether or not the client is connected.

<https://www.arduino.cc/en/Reference/WiFiClientConnected>

Use `client.println()` to print data followed by a carriage return and newline.

<https://www.arduino.cc/en/Reference/WiFiClientPrintln>

Use `client.print()` to print data to the server that a client is connected to.

<https://www.arduino.cc/en/Reference/WiFiClientPrint>

Use `client.available()` to return the number of bytes available for reading.

<https://www.arduino.cc/en/Reference/WiFiClientAvailable>

Use `client.read()` to read the next byte received from the server the client is connected to.

<https://www.arduino.cc/en/Reference/WiFiClientRead>

Use `client.stop()` to disconnect from the server the client is connected to.

<https://www.arduino.cc/en/Reference/WiFiClientStop>

Use Ameba as Server to send Ameba status


Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1


Example

In this example, we connect Ameba to WiFi and use Ameba as server to send message to connected client.

First, open “File” -> “Examples” -> “AmebaWiFi” -> “WiFiWebServer”

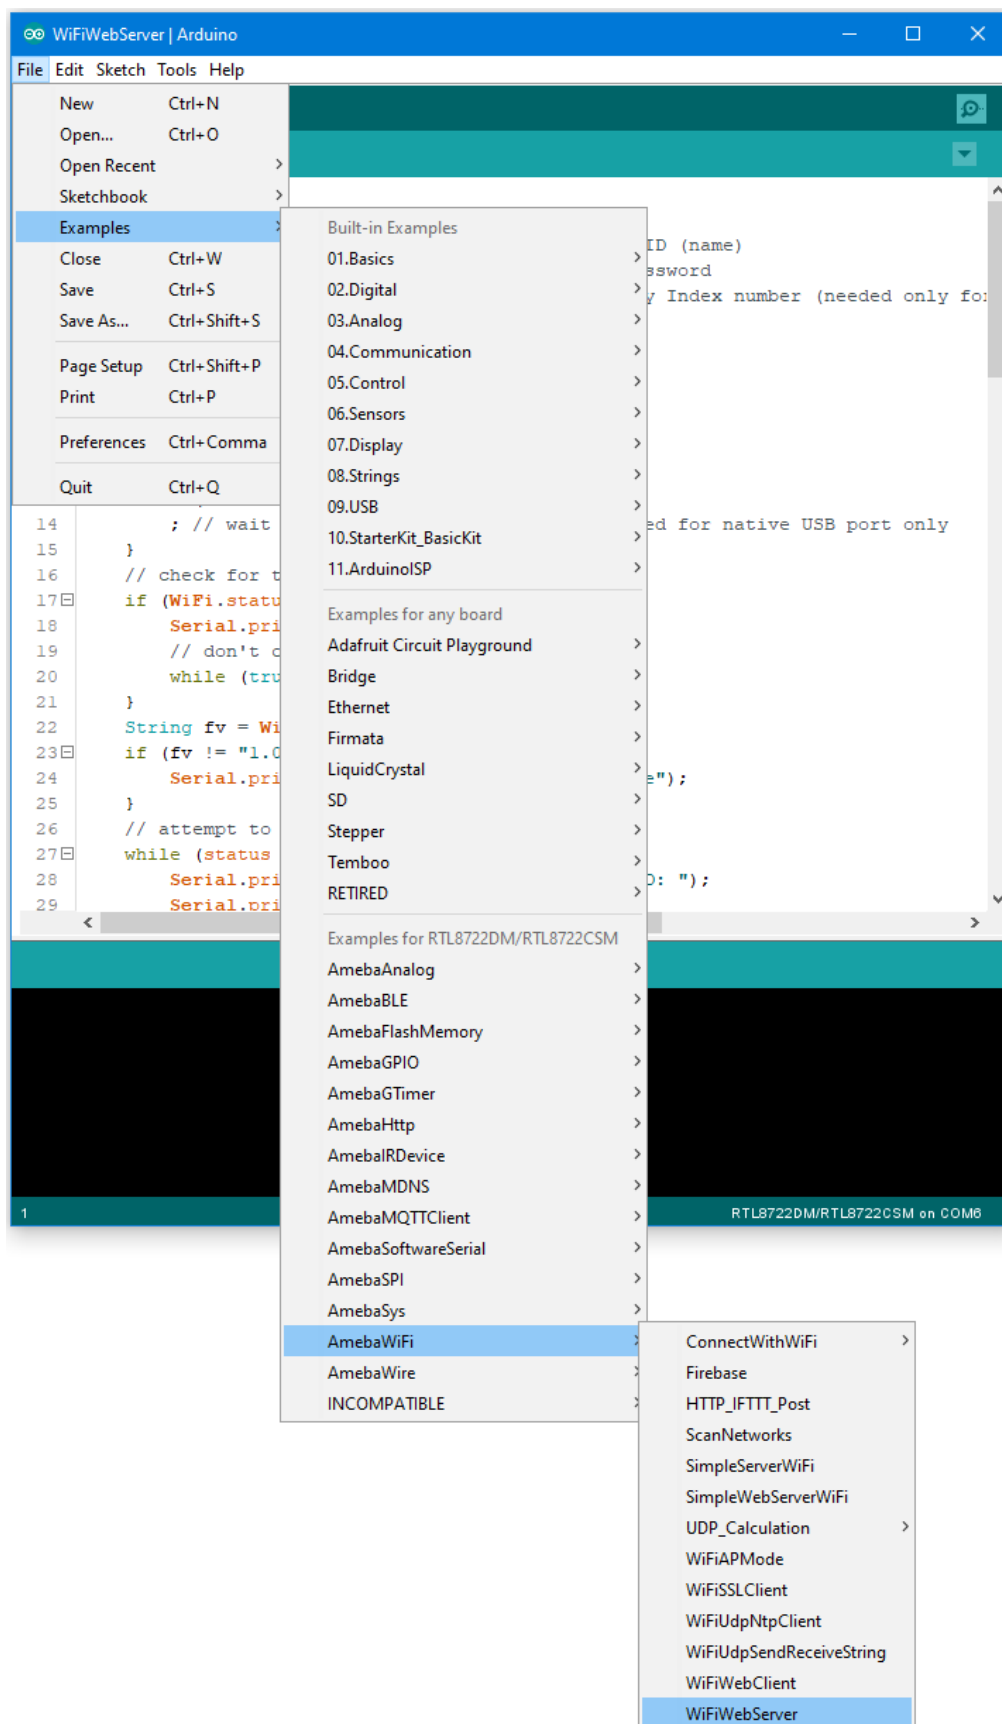

In the sample code, modify the highlighted snippet and enter the required information (ssid, password, key index) required to connect to your WiFi network.

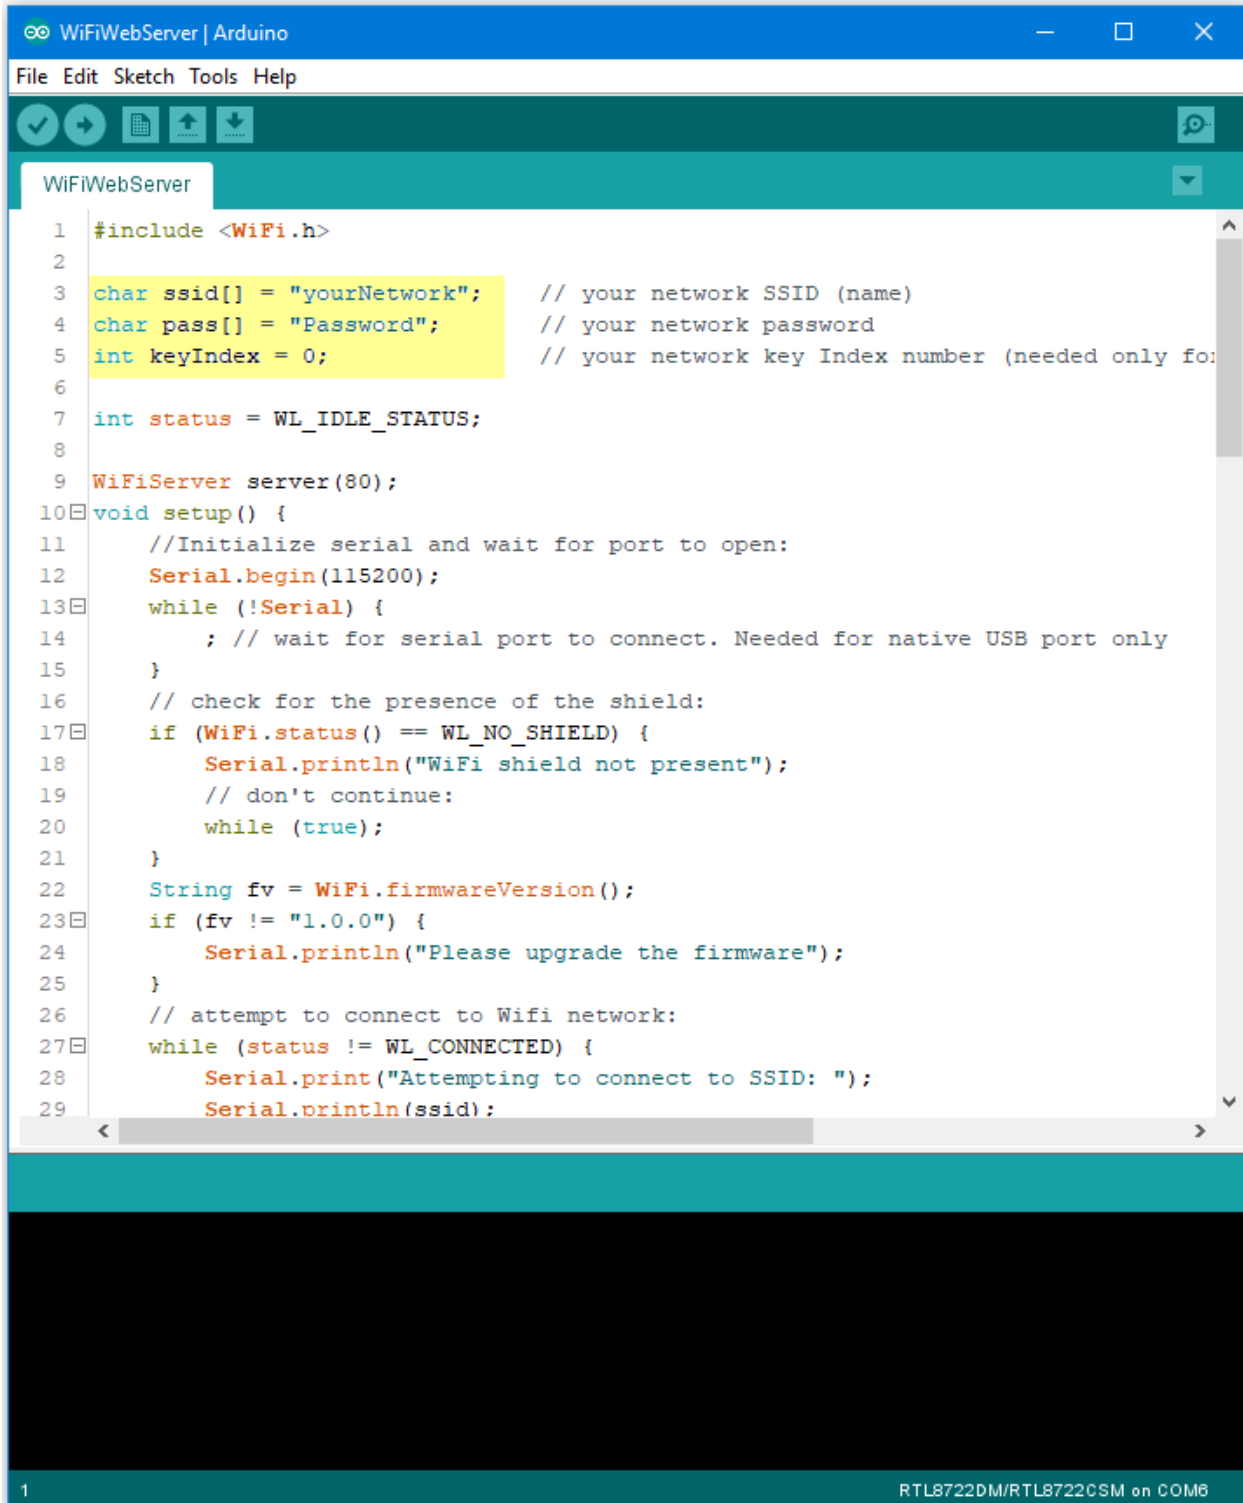


```

1  #include <WiFi.h>
2
3  char ssid[] = "yourNetwork";    // your network SSID (name)
4  char pass[] = "Password";       // your network password
5  int keyIndex = 0;               // your network key Index number (needed only for
6
7  int status = WL_IDLE_STATUS;
8
9  WiFiServer server(80);
10 void setup() {
11     //Initialize serial and wait for port to open:
12     Serial.begin(115200);
13     while (!Serial) {
14         ; // wait for serial port to connect. Needed for native USB port only
15     }
16     // check for the presence of the shield:
17     if (WiFi.status() == WL_NO_SHIELD) {
18         Serial.println("WiFi shield not present");
19         // don't continue:
20         while (true);
21     }
22     String fv = WiFi.firmwareVersion();
23     if (fv != "1.0.0") {
24         Serial.println("Please upgrade the firmware");
25     }
26     // attempt to connect to Wifi network:
27     while (status != WL_CONNECTED) {
28         Serial.print("Attempting to connect to SSID: ");
29         Serial.println(ssid);

```

Upload the code and press the reset button on Ameba. After connecting to WiFi, Ameba starts to run as server. The IP of the server is shown in the serial monitor, and port is 80.

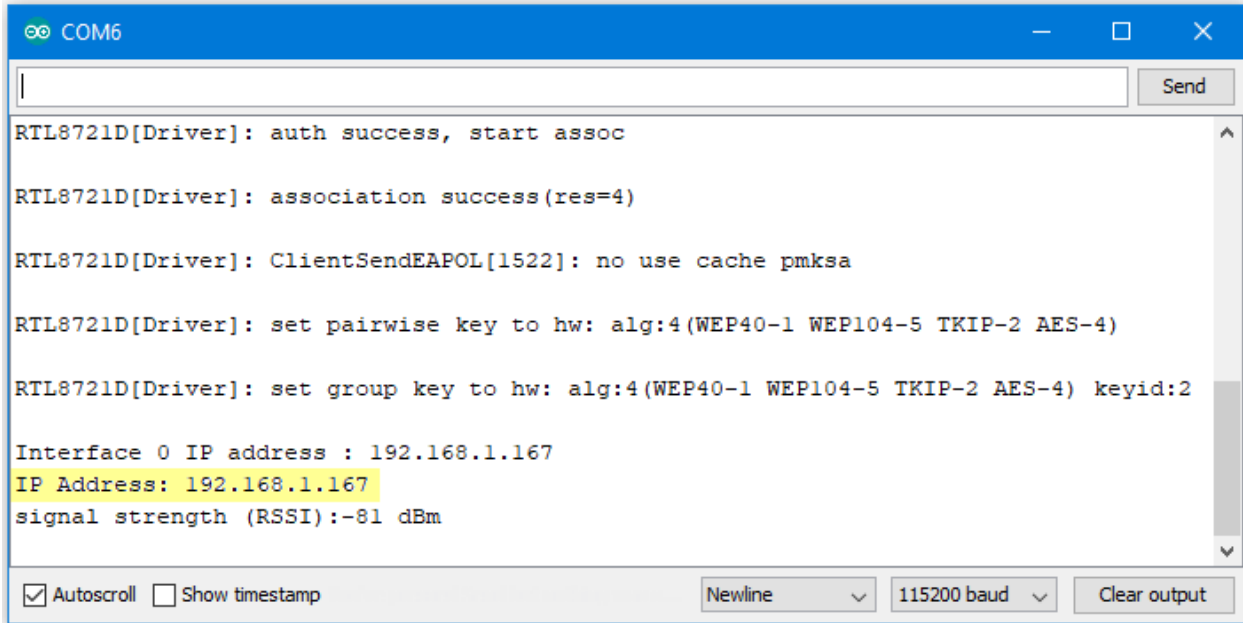

```
COM6

RTL8721D[Driver]: auth success, start assoc

RTL8721D[Driver]: association success(res=4)

RTL8721D[Driver]: ClientSendEAPOL[1522]: no use cache pmksa


RTL8721D[Driver]: set pairwise key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4)

RTL8721D[Driver]: set group key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4) keyid:2

Interface 0 IP address : 192.168.1.167
IP Address: 192.168.1.167
signal strength (RSSI):-81 dBm

☒ Autoscroll ☐ Show timestamp Newline 115200 baud Clear output
```

We connect to the server in a browser, and we can see the data sent from the server.

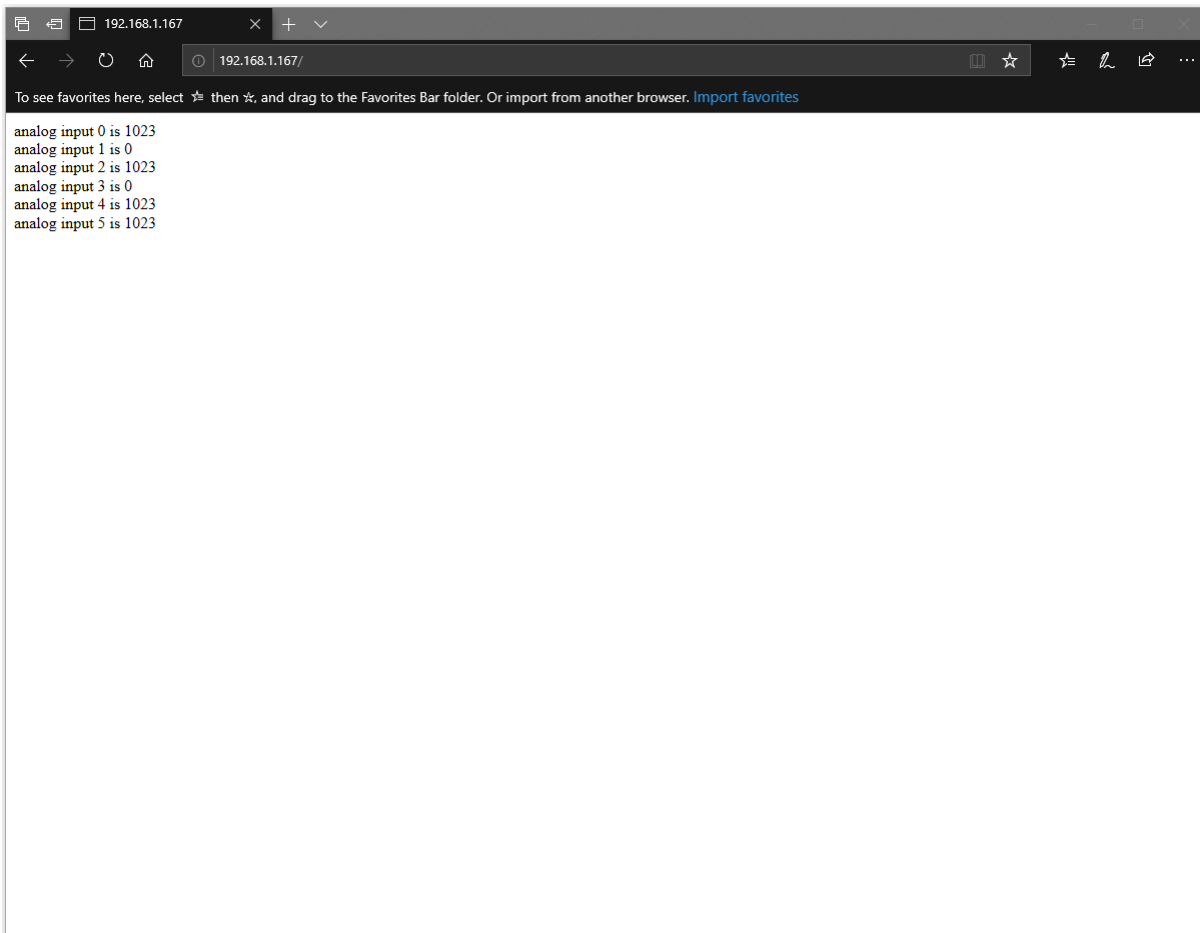

```
192.168.1.167

analog input 0 is 1023
analog input 1 is 0
analog input 2 is 1023
analog input 3 is 0
analog input 4 is 1023
analog input 5 is 1023
```

Code Reference

Use `WiFi.begin()` to establish WiFi connection.

<https://www.arduino.cc/en/Reference/WiFiBegin>

To get the information of a WiFi connection:

Use `WiFi.SSID()` to get SSID of the current connected network.

<https://www.arduino.cc/en/Reference/WiFiSSID>

Use `WiFi.RSSI()` to get the signal strength of the connection.

<https://www.arduino.cc/en/Reference/WiFiRSSI>

Use `WiFi.localIP()` to get the IP address of Ameba.

<https://www.arduino.cc/en/Reference/WiFiLocalIP>

Use `WiFiServer server()` to create a server that listens on the specified port.

<https://www.arduino.cc/en/Reference/WiFiServer>

Use `server.begin()` to tell the server to begin listening for incoming connections.

<https://www.arduino.cc/en/Reference/WiFiServerBegin>

Use `server.available()` to get a client that is connected to the server and has data available for reading.

<https://www.arduino.cc/en/Reference/WiFiServerAvailable>

Use `client.connected()` to check whether or not the client is connected.

<https://www.arduino.cc/en/Reference/WiFiClientConnected>

Use `client.println()` to print data followed by a carriage return and newline.

<https://www.arduino.cc/en/Reference/WiFiClientPrintln>

Use `client.print()` to print data to the server that a client is connected to.

<https://www.arduino.cc/en/Reference/WiFiClientPrint>

Use `client.available()` to return the number of bytes available for reading.

<https://www.arduino.cc/en/Reference/WiFiClientAvailable>

Use `client.read()` to read the next byte received from the server the client is connected to.

<https://www.arduino.cc/en/Reference/WiFiClientRead>

Use `client.stop()` to disconnect from the server the client is connected to.

<https://www.arduino.cc/en/Reference/WiFiClientStop>

Use Ameba as UDP server


Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1

Example

In this example, we connect Ameba to WiFi and use Ameba to be an UDP server. When Ameba receives a message from UDP client, it replies “acknowledged” message to client.

Open the WiFi Web Server example. “File” -> “Examples” -> “AmebaWiFi” -> “WiFiUdpSendReceiveString”

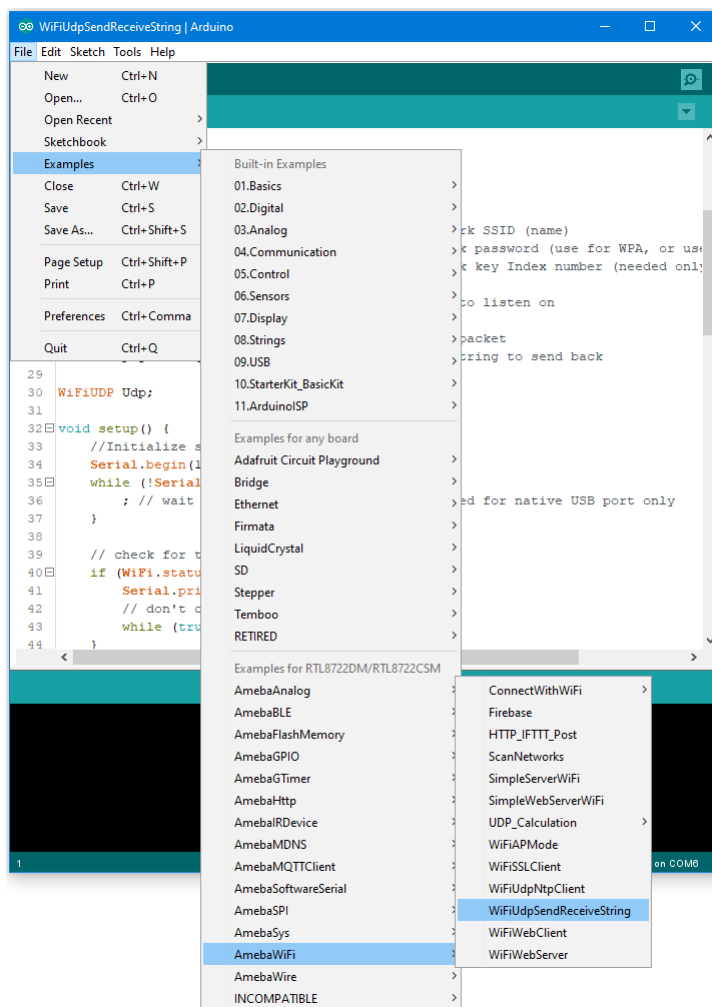

Modify the highlighted code section (ssid, password, keyindex) to connect to your WiFi network.


```


16
17 #include <WiFi.h>
18 #include <WiFiUdp.h>
19
20 int status = WL_IDLE_STATUS;
21 char ssid[] = "yourNetwork"; // your network SSID (name)
22 char pass[] = "secretPassword"; // your network password (use for WPA, or use
23 int keyIndex = 0; // your network key Index number (needed only)
24
25 unsigned int localPort = 2390; // local port to listen on
26
27 char packetBuffer[255]; //buffer to hold incoming packet
28 char ReplyBuffer[] = "acknowledged"; // a string to send back
29
30 WiFiUDP Udp;
31
32 void setup() {
33     //Initialize serial and wait for port to open:
34     Serial.begin(115200);
35     while (!Serial) {
36         ; // wait for serial port to connect. Needed for native USB port only
37     }
38
39     // check for the presence of the shield:
40     if (WiFi.status() == WL_NO_SHIELD) {
41         Serial.println("WiFi shield not present");
42         // don't continue:
43         while (true);
44     }

```

1

RTL8722DM/RTL8722CSM on COM8


Compile the code and upload it to Ameba. After pressing the Reset button, Ameba connects to WiFi and starts the UDP server with port 2390. After the UDP server starts service, Ameba prints the “Starting connection to server” message and waits for client connection.

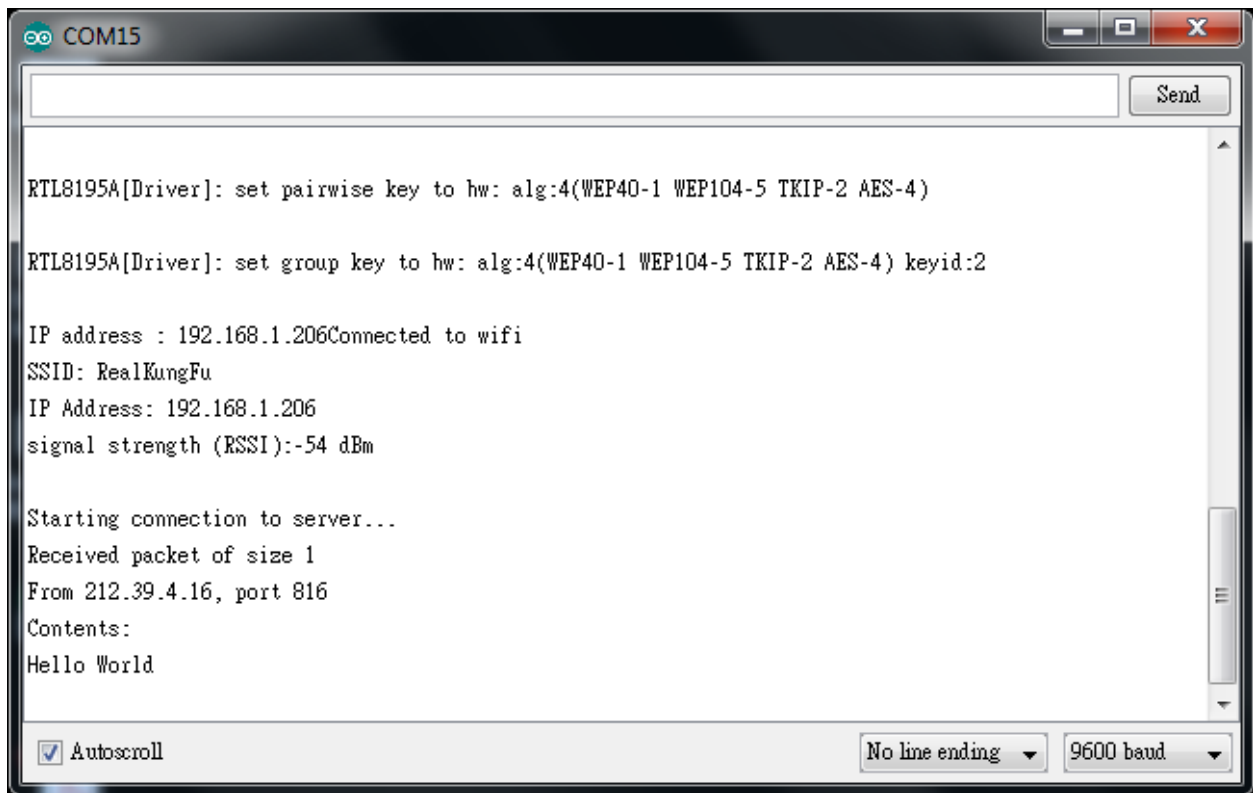

As to the UDP client, we use “sokit” program in the computer to connect to UDP server.

Choose client mode and fill in the IP of UDP server (which is the IP of Ameba) and port 2390, then click “UDP Connect” .

After the connection is established, fill in “Hello World” in the Buf 0 field in sokit and click “Send” . Then you can see the Ameba UDP server replies “acknowledged” .

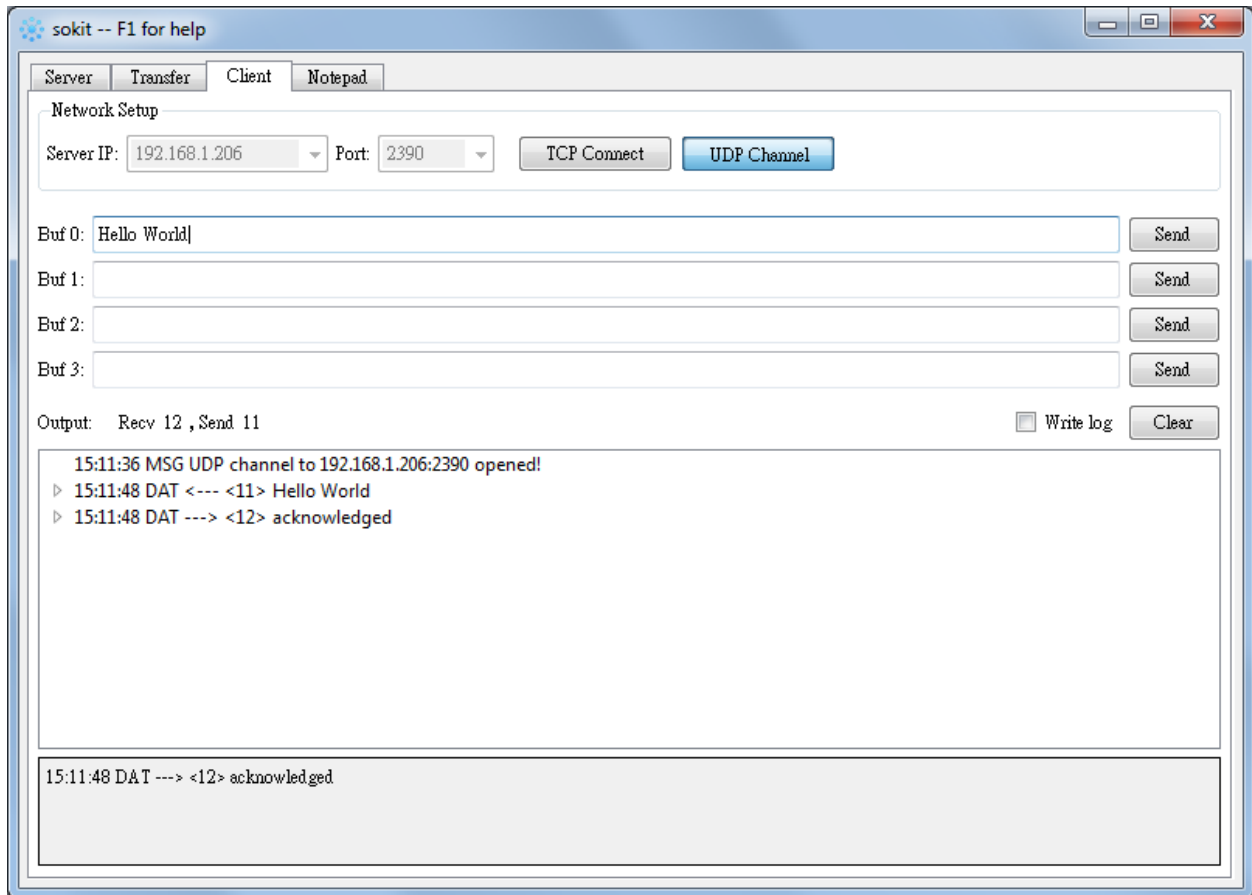

Code Reference

Refer to the Arduino tutorial for detailed information about this example.

<https://www.arduino.cc/en/Tutorial/WiFiSendReceiveUDPString>

First, use `begin()` to open an UDP port on Ameba.

<https://www.arduino.cc/en/Reference/WiFiUDPBgin>

Use `parsePacket()` to wait for data from client.

<https://www.arduino.cc/en/Reference/WiFiUDPParsePacket>

When a connection is established, use `remoteIP()` and `remotePort()` to get the IP and port of the client.

<https://www.arduino.cc/en/Reference/WiFiUDPRemoteIP>

Then use `read()` to read the data sent by client.

<https://www.arduino.cc/en/Reference/WiFiUDPRead>

To send reply, use `beginPacket()`, `write()`, `end()`.

<https://www.arduino.cc/en/Reference/WiFiUDPBeginPacket>

<https://www.arduino.cc/en/Reference/WiFiUDPWrite>

<https://www.arduino.cc/en/Reference/WiFiUDPEndPacket>

Retrieve Universal Time (UTC) By Ameba


Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1

Example

In this example, we connect Ameba to WiFi. Then send NTP (Network Time Protocol, RFC 1305) request to NTP server using UDP. After receiving the NTP request, the NTP server replies current UTC (Coordinated Universal Time) packet. We will parse the UTC packet to show current UTC time in the serial monitor.

Open the example: “File” -> “Examples” -> “AmebaWiFi” -> “WiFiUdpNtpClient”

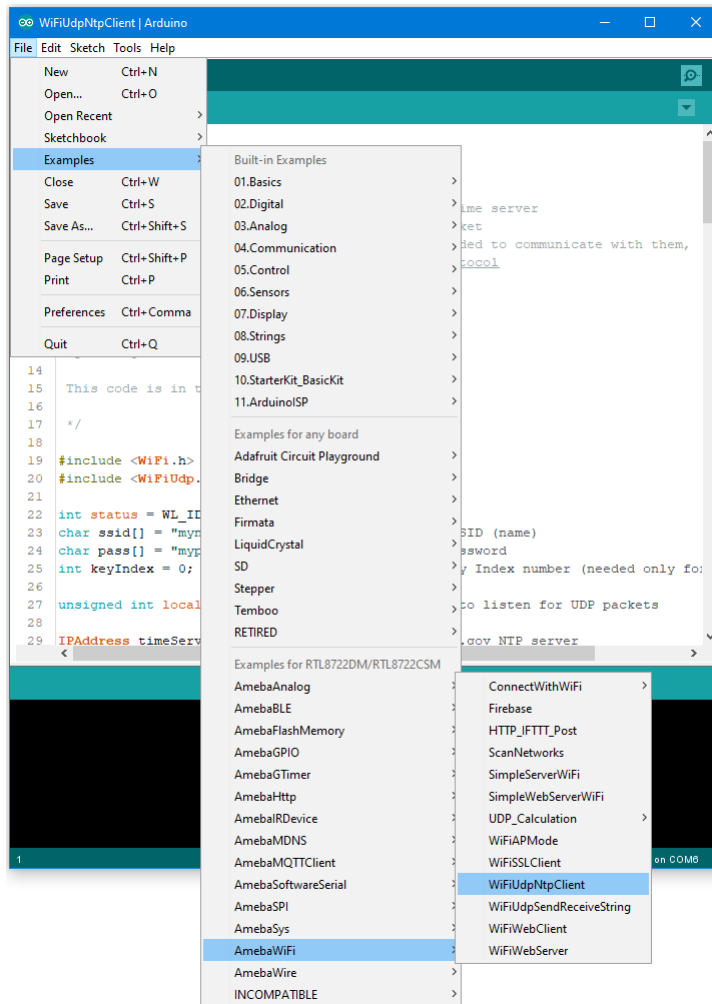

Modify the highlighted code section (ssid, password, keyindex) to connect to your WiFi network.

```

11  by Michael Margolis
12  modified 9 Apr 2012
13  by Tom Igoe
14
15  This code is in the public domain.
16
17  */
18
19  #include <WiFi.h>
20  #include <WiFiUdp.h>
21
22  int status = WL_IDLE_STATUS;
23  char ssid[] = "mynetwork"; // your network SSID (name)
24  char pass[] = "mypassword"; // your network password
25  int keyIndex = 0; // your network key Index number (needed only for
26
27  unsigned int localPort = 2390; // local port to listen for UDP packets
28
29  IPAddress timeServer(129, 6, 15, 28); // time.nist.gov NTP server
30
31  const int NTP_PACKET_SIZE = 48; // NTP time stamp is in the first 48 bytes of the
32
33  byte packetBuffer[ NTP_PACKET_SIZE]; //buffer to hold incoming and outgoing packe
34
35  // A UDP instance to let us send and receive packets over UDP
36  WiFiUDP Udp;
37
38  void setup() {
39    // Open serial communications and wait for port to open:

```

Compile the code and upload it to Ameba. After pressing the Reset button, Ameba connects to WiFi and sends NTP request packet to NTP server “129.6.15.28” .

We parse the replied packet and show UTC time in serial monitor:

```

Interface 0 IP address : 192.168.1.167Connected to wifi

IP Address: 192.168.1.167
signal strength (RSSI):-80 dBm


Starting connection to server...
1
packet received
Seconds since Jan 1 1900 = 3798154620
Unix time = 1589165820
The UTC time is 2:57:00
1
packet received
Seconds since Jan 1 1900 = 3798154631
Unix time = 1589165831
The UTC time is 2:57:11
1

```

Use MQTT To Upload And Listen To Data

Intro to MQTT

MQTT (Message Queuing Telemetry Transport) is a protocol proposed by IBM and Eurotech. The introduction in [MQTT Official Website](#): MQTT is a machine-to-machine (M2M)/"Internet of Things" connectivity protocol. It was designed as an extremely lightweight publish/subscribe messaging transport. We can say MQTT is a protocol designed for IoT. MQTT is based on TCP/IP and transmits/receives data via publish/subscribe. Please refer to the figure below:

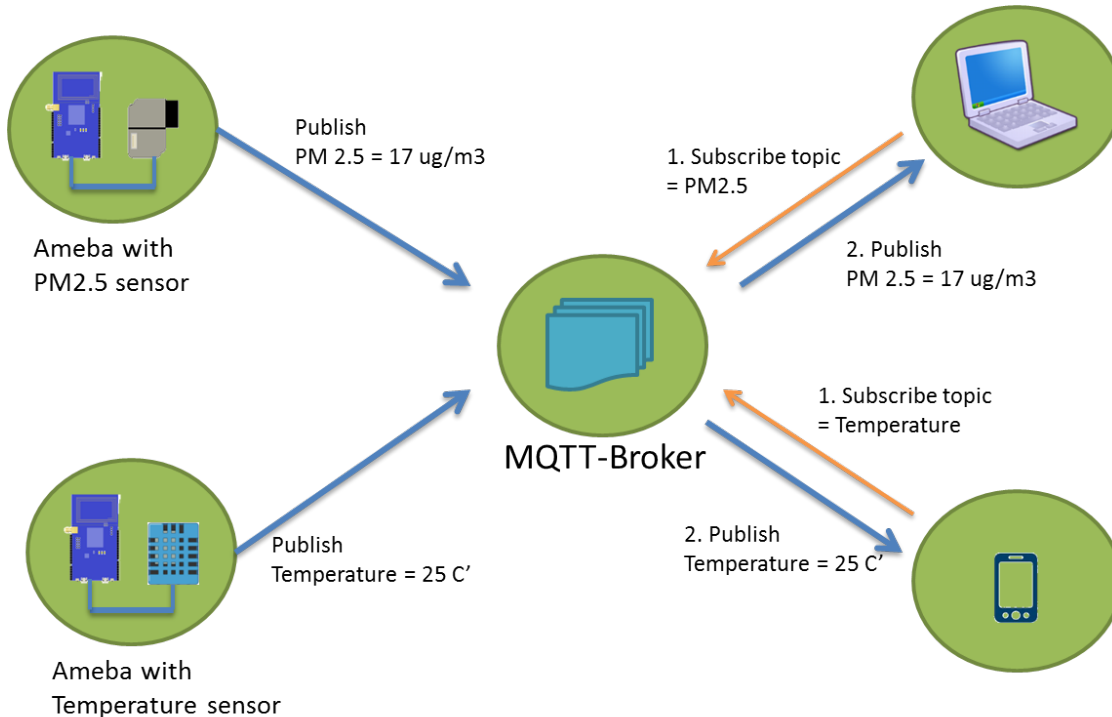

In the operation of MQTT, there are several roles:

- **Publisher:** Usually publishers are the devices equipped with sensors (ex. Ameba). Publishers uploads the data of the sensors to MQTT-Broker, which serves as a database with MQTT service.
- **Subscriber:** Subscribers are referred to the devices which receive and observe messages, such as a laptop or a mobile phone.
- **Topic:** Topic is used to categorized the messages, for example the topic of a message can be "PM2.5" or "Temperature". Subscribers can choose messages of which topics they want to receive.


Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1

Example


In this example, we connect Ameba to MQTT-Broker. Then send messages as publisher and receive messages from MQTT-Broker as subscriber.

Open the MQTT example “File” -> “Examples” -> “AmebaMQTTClient” -> “MQTT_Basic”

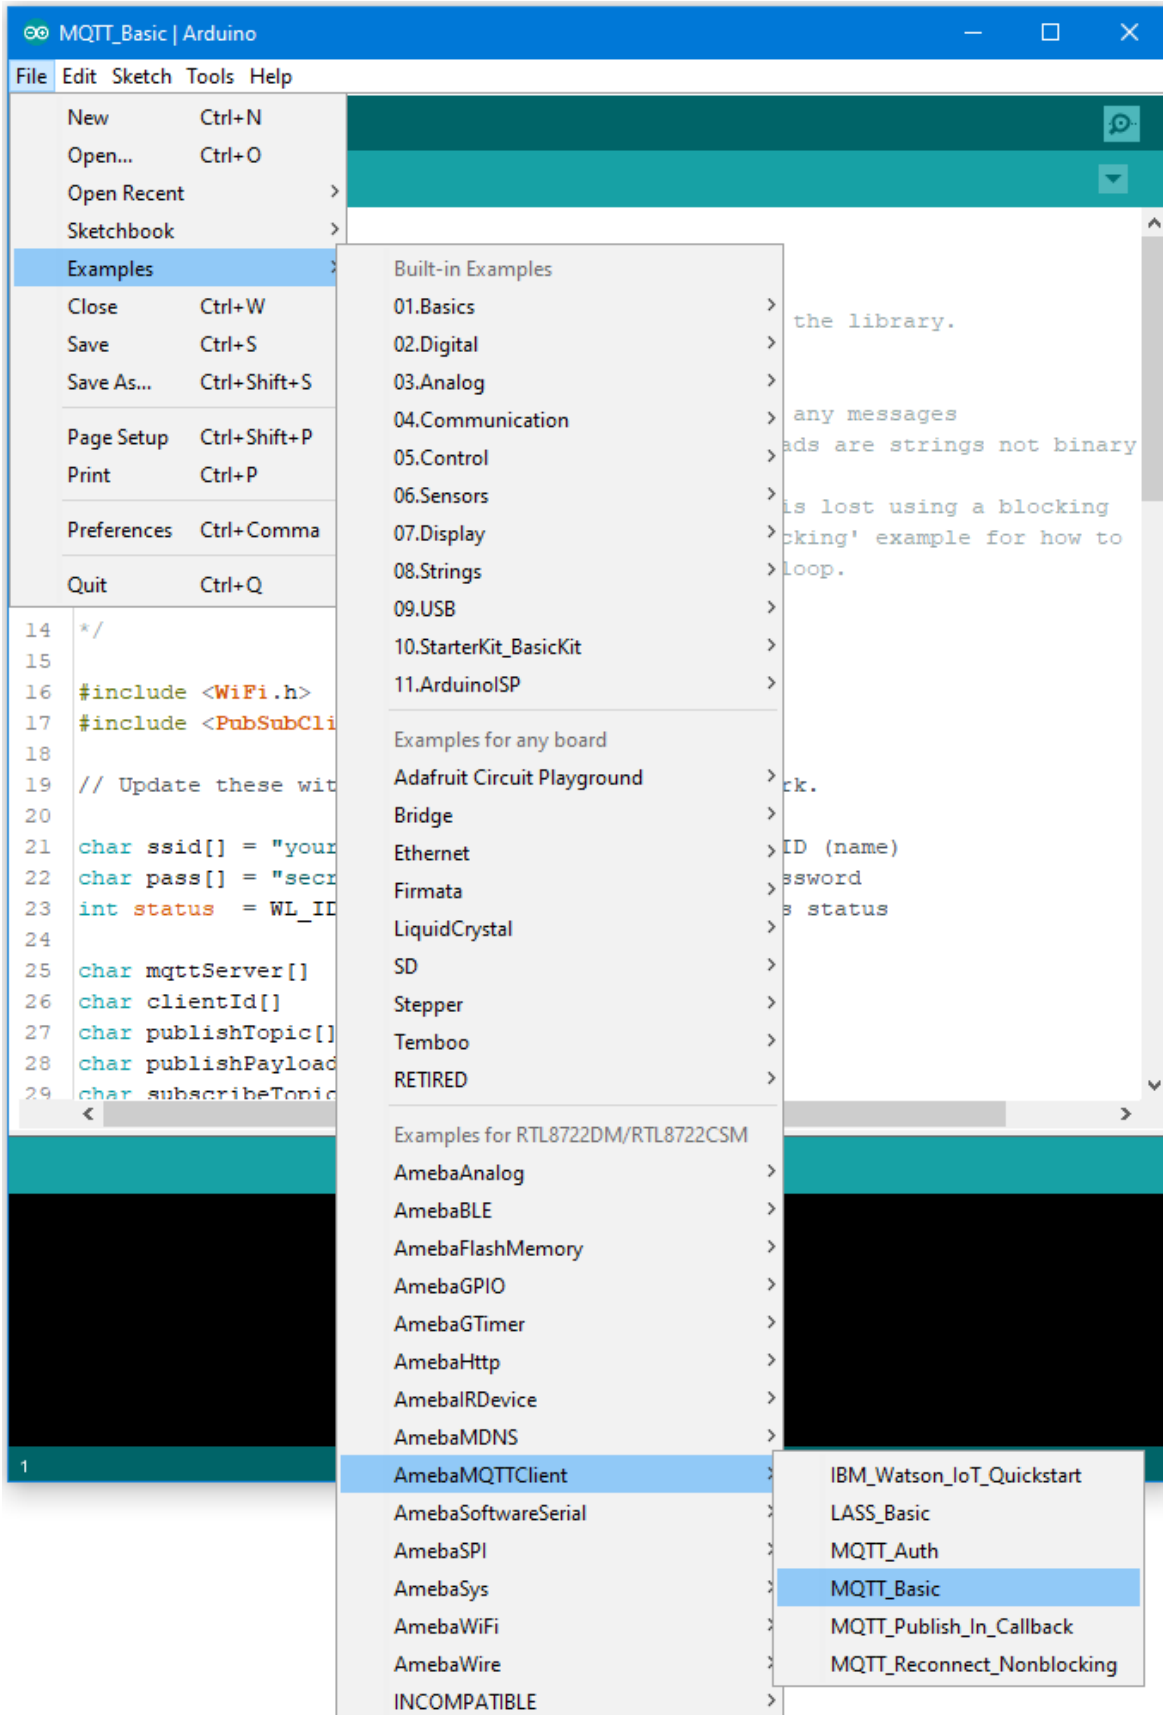

Please modify some WiFi-related parameters.

And some information related to MQTT:

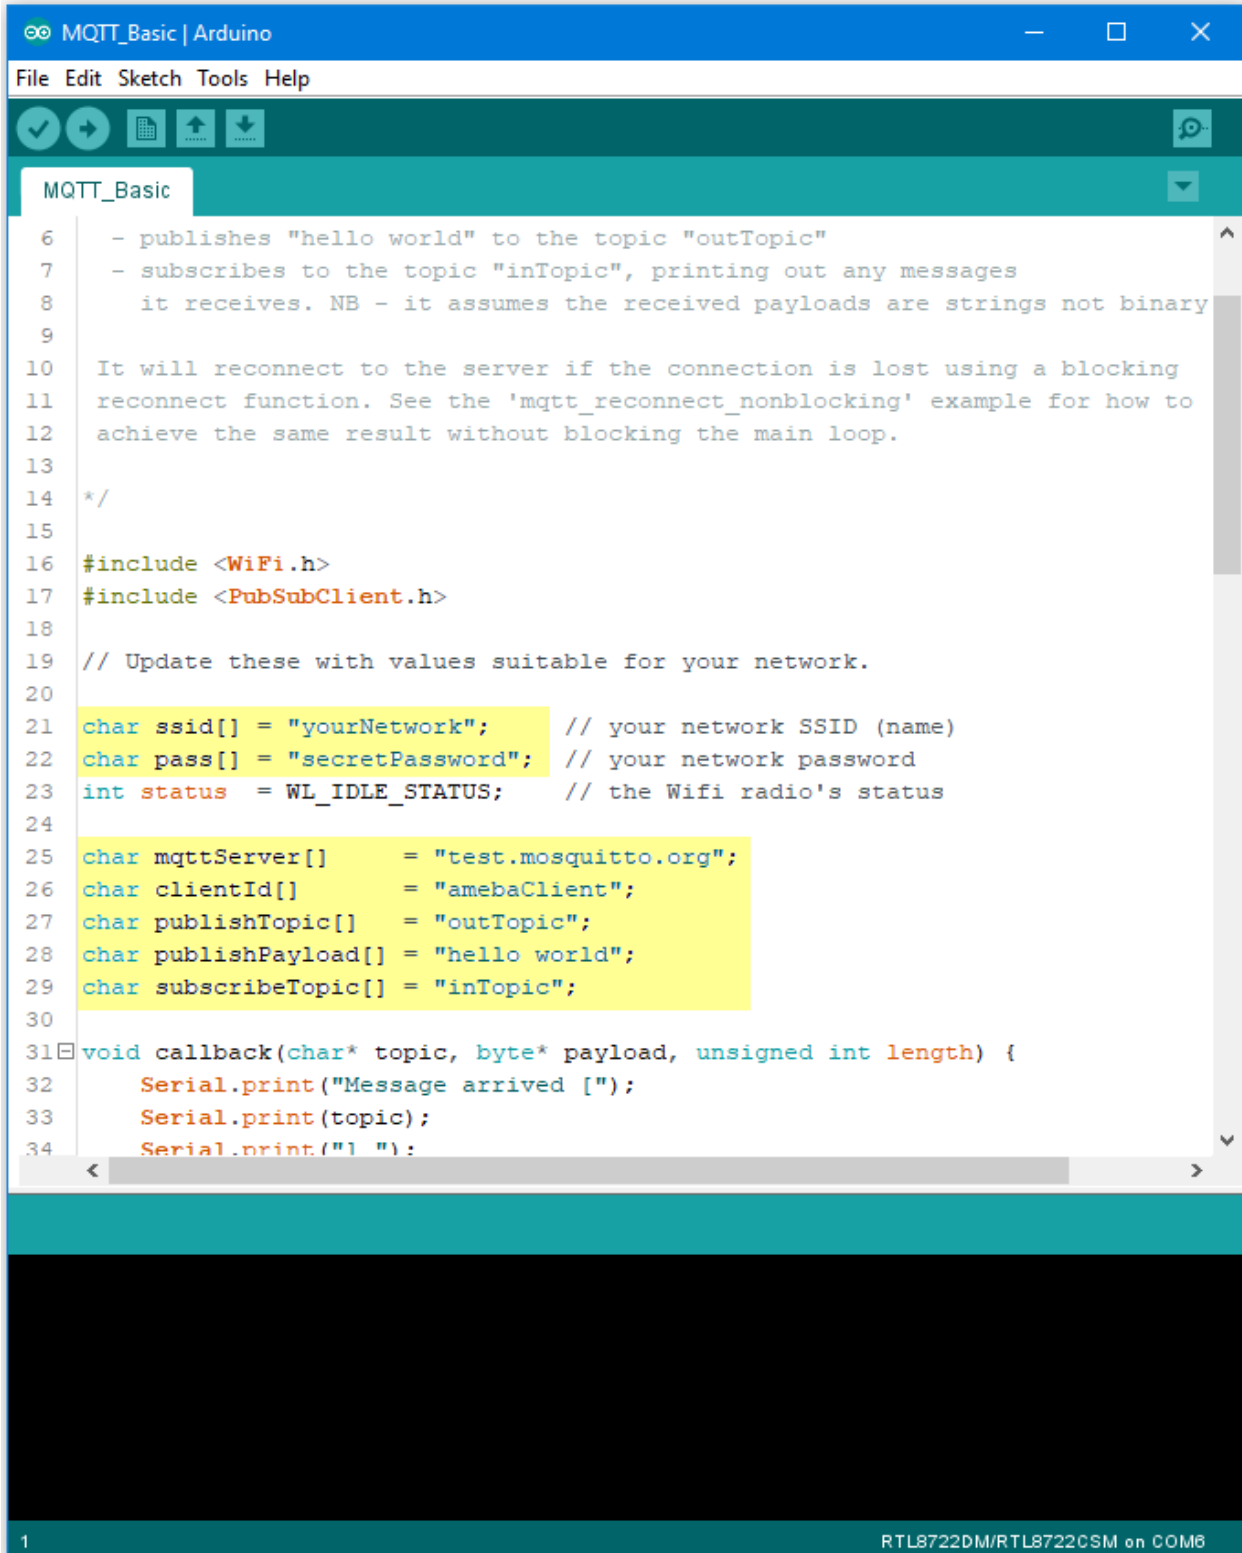

```
MQTT_Basic | Arduino
File Edit Sketch Tools Help

MQTT_Basic

6   - publishes "hello world" to the topic "outTopic"
7   - subscribes to the topic "inTopic", printing out any messages
8     it receives. NB - it assumes the received payloads are strings not binary
9
10  It will reconnect to the server if the connection is lost using a blocking
11  reconnect function. See the 'mqtt_reconnect_nonblocking' example for how to
12  achieve the same result without blocking the main loop.
13
14  */
15
16  #include <WiFi.h>
17  #include <PubSubClient.h>
18
19  // Update these with values suitable for your network.
20
21  char ssid[] = "yourNetwork";    // your network SSID (name)
22  char pass[] = "secretPassword"; // your network password
23  int status = WL_IDLE_STATUS;    // the Wifi radio's status
24
25  char mqttServer[] = "test.mosquitto.org";
26  char clientId[] = "amebaClient";
27  char publishTopic[] = "outTopic";
28  char publishPayload[] = "hello world";
29  char subscribeTopic[] = "inTopic";
30
31  void callback(char* topic, byte* payload, unsigned int length) {
32    Serial.print("Message arrived [");
33    Serial.print(topic);
34    Serial.print("] ");
```


1

RTL8722DM/RTL8722CSM on COM8

The “mqttServer” refers to the MQTT-Broker, we use the free MQTT sandbox “test.mosquitto.org” for testing.

- “clientId” is an identifier for MQTT-Broker to identify the connected device.
- “publishTopic” is the topic of the published message, we use “outTopic” in the example. The devices subscribe to “outTopic” will receive the message.
- “publishPayload” is the content to be published.
- “subscribeTopic” is to tell MQTT-broker which topic we want to subscribe to.

Next, compile the code and upload it to Ameba. Press the reset button, then open the serial monitor

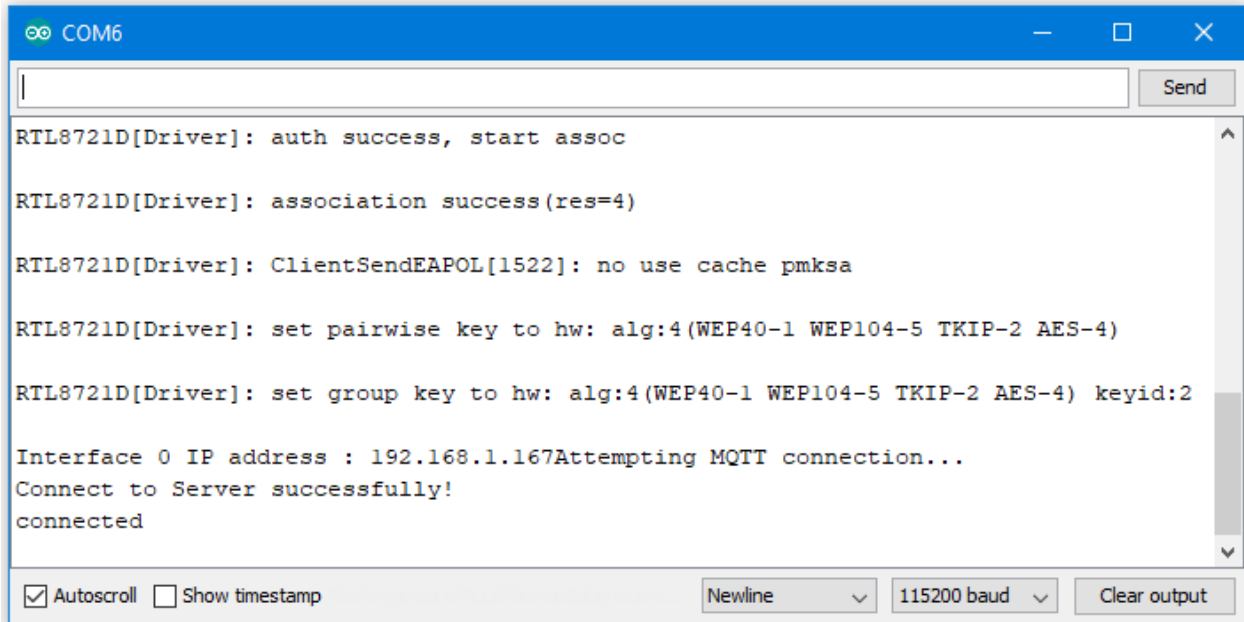


```
COM6
|
| Send
RTL8721D[Driver]: auth success, start assoc
RTL8721D[Driver]: association success(res=4)
RTL8721D[Driver]: ClientSendEAPOL[1522]: no use cache pmksa
RTL8721D[Driver]: set pairwise key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4)
RTL8721D[Driver]: set group key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4) keyid:2
Interface 0 IP address : 192.168.1.167Attempting MQTT connection...
Connect to Server successfully!
connected
☒ Autoscroll ☐ Show timestamp Newline 115200 baud Clear output
```

After Ameba is connected to MQTT server, it sends the message “hello world” to “outTopic” .

To see the message, we need another MQTT client.


Here we use a chrome plugin “MQTTLens” to be the MQTT client. You can find it in google webstore.

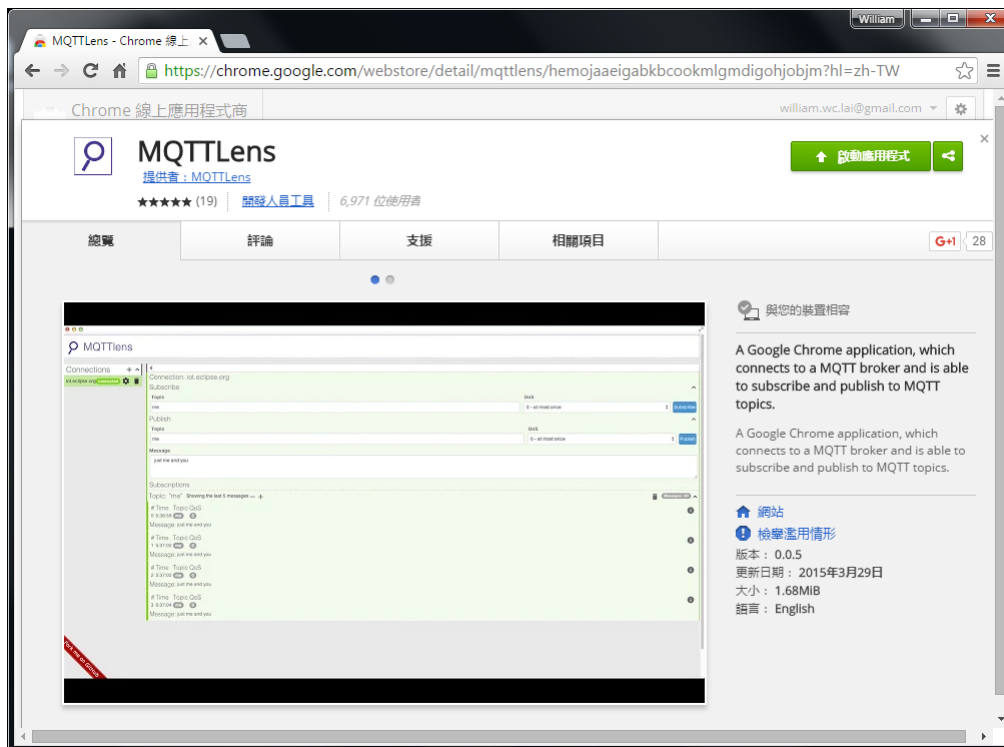

Install and open the MQTTLens, click “+” next to “Connection” on the left, and fill in the required information

- **Connection Name:** Used to identify the connection, you can choose a name you like.
- **Hostname:** The MQTT-Broker server, here we use “iot.eclipse.org”
- **Client ID:** We use the default randomly generated ID.


Then click “CREATE CONNECTION” .

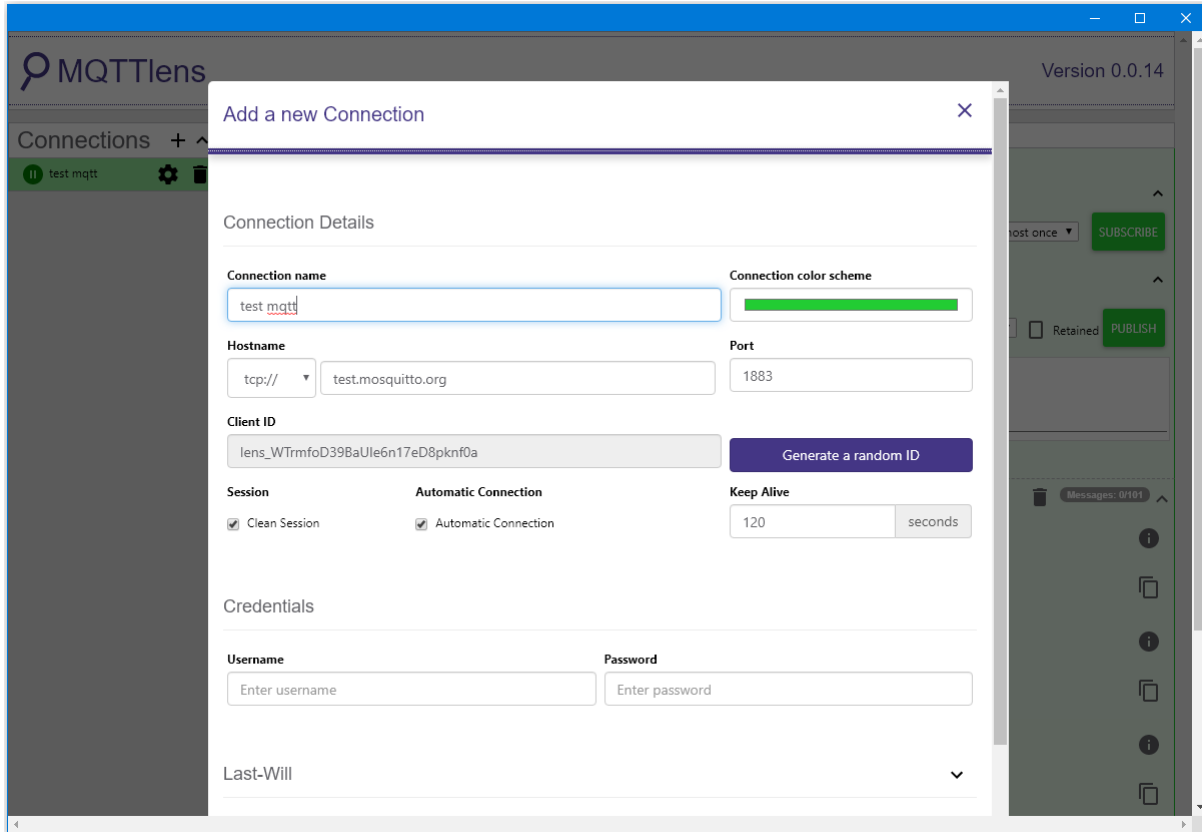

Since we have not registered the topic we want to listen to, we would not receive any messages now.

Fill in “outTopic” in the “Topic” field and click “Subscribe” .

Wait for Ameba to send next message (or you can press the reset button). Then you can see the “hello world” message show up.

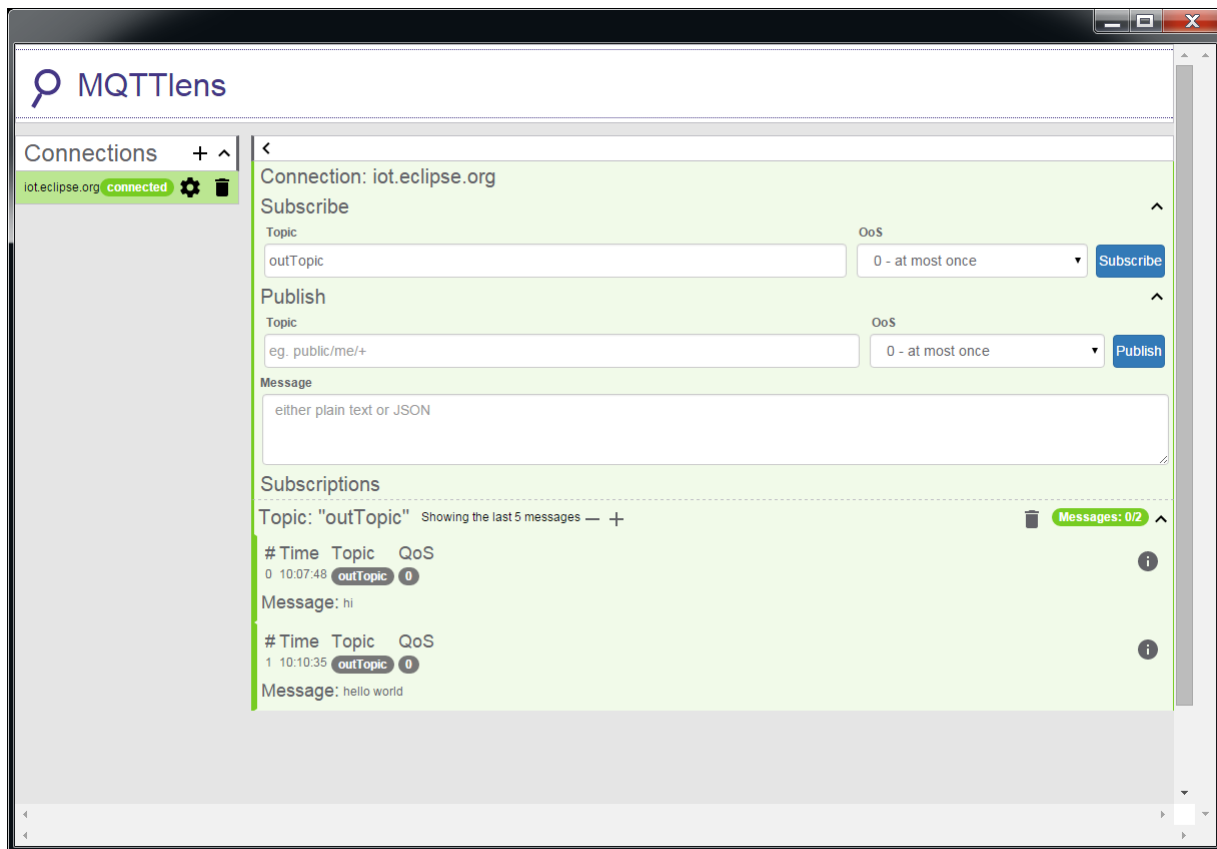

Use Amazon AWS IoT Shadow Service

Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1


Example

Introduction

Amazon AWS IoT is a cloud IoT service platform:

Amazon AWS IoT is a platform that enables you to connect devices to AWS Services and other devices, secure data and interactions, process and act upon device data, and enable applications to interact with devices even when they are offline. (<https://aws.amazon.com/iot/how-it-works/>)

The service architecture of AWS IoT:

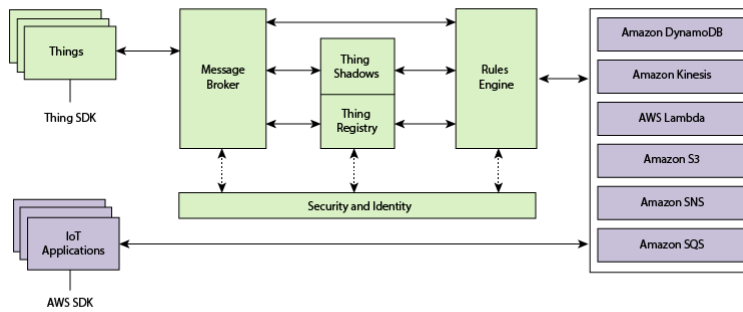

(Picture from <http://docs.aws.amazon.com/iot/latest/developerguide/aws-iot-how-it-works.html>)

In the architecture, Ameba belongs to the upper-left “Things” block. A TLS secure channel will be established between “Things” and the MQTT Message Broker. Afterwards, “Things” and “Message Broker” communicate using MQTT Protocol via this secure channel. Behind the “Message Broker”, the “Thing Shadows” keeps messages temporarily when Ameba is offline, and sends the control message to Ameba next time it is connected. The “Rules Engine” allows you to place restrictions to the behavior of Things or to connect Things to other services of Amazon.


AWS Management Console

First, create an account and sign up for AWS IoT [service:https://aws.amazon.com/](https://aws.amazon.com/)

Afterwards, log in to the Amazon Management Console and click “IoT Core” found under services -> Internet of Things.

Then you will enter the home page of AWS IoT. To offer the best service quality, Amazon offers servers in different regions for users to choose from.

Click the region dropdown menu at the upper-right:

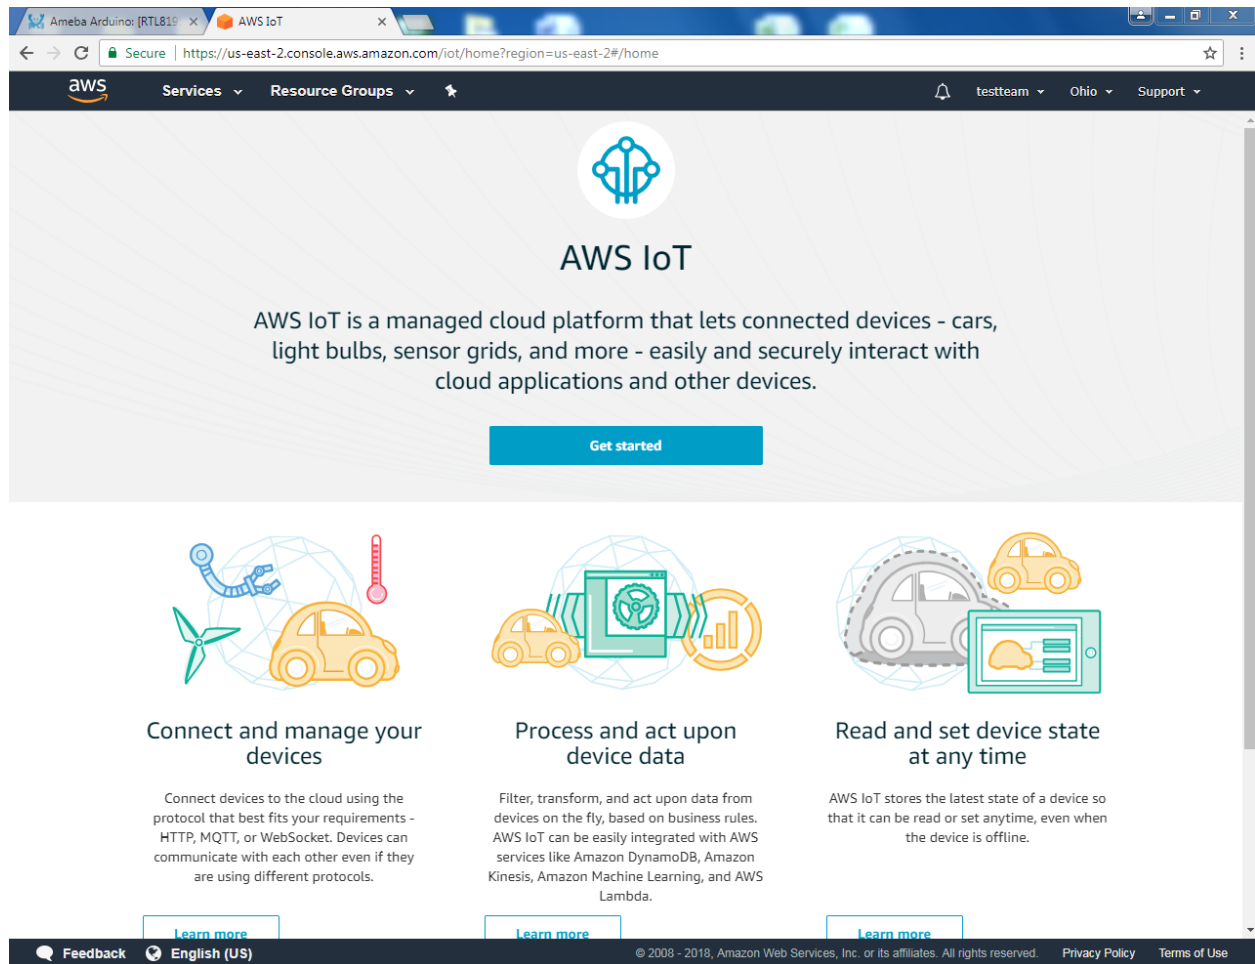

Choose a nearby region.

Ameba Arduino: [RTL819] x AWS IoT x

Secure | <https://us-east-2.console.aws.amazon.com/iot/home?region=us-east-2#/home>

aws Services Resource Groups testteam Ohio Support

AWS IoT

AWS IoT is a managed cloud platform that lets connected devices like light bulbs, sensor grids, and more - easily and securely interact with cloud applications and other devices.

[Get started](#)

Connect and manage your devices

Connect devices to the cloud using the protocol that best fits your requirements - HTTP, MQTT, or WebSocket. Devices can communicate with each other even if they are using different protocols.

[Learn more](#)

Process and act upon device data

Filter, transform, and act upon data from devices on the fly, based on business rules. AWS IoT can be easily integrated with AWS services like Amazon DynamoDB, Amazon Kinesis, Amazon Machine Learning, and AWS Lambda.

[Learn more](#)

Read and set device state at any time


AWS IoT stores the latest state of a device so that it can be read or set anytime, even when the device is offline.

[Learn more](#)


Feedback English (US) © 2008 - 2018, Amazon Web Services, Inc. or its affiliates. All rights reserved. Privacy Policy Terms of Use

- US East (N. Virginia)
- US East (Ohio)**
- US West (N. California)
- US West (Oregon)
- Asia Pacific (Mumbai)
- Asia Pacific (Seoul)
- Asia Pacific (Singapore)
- Asia Pacific (Sydney)
- Asia Pacific (Tokyo)
- Canada (Central)
- EU (Frankfurt)
- EU (Ireland)
- EU (London)
- EU (Paris)
- South America (São Paulo)

Then from Services, go to Onboard then Get Started.

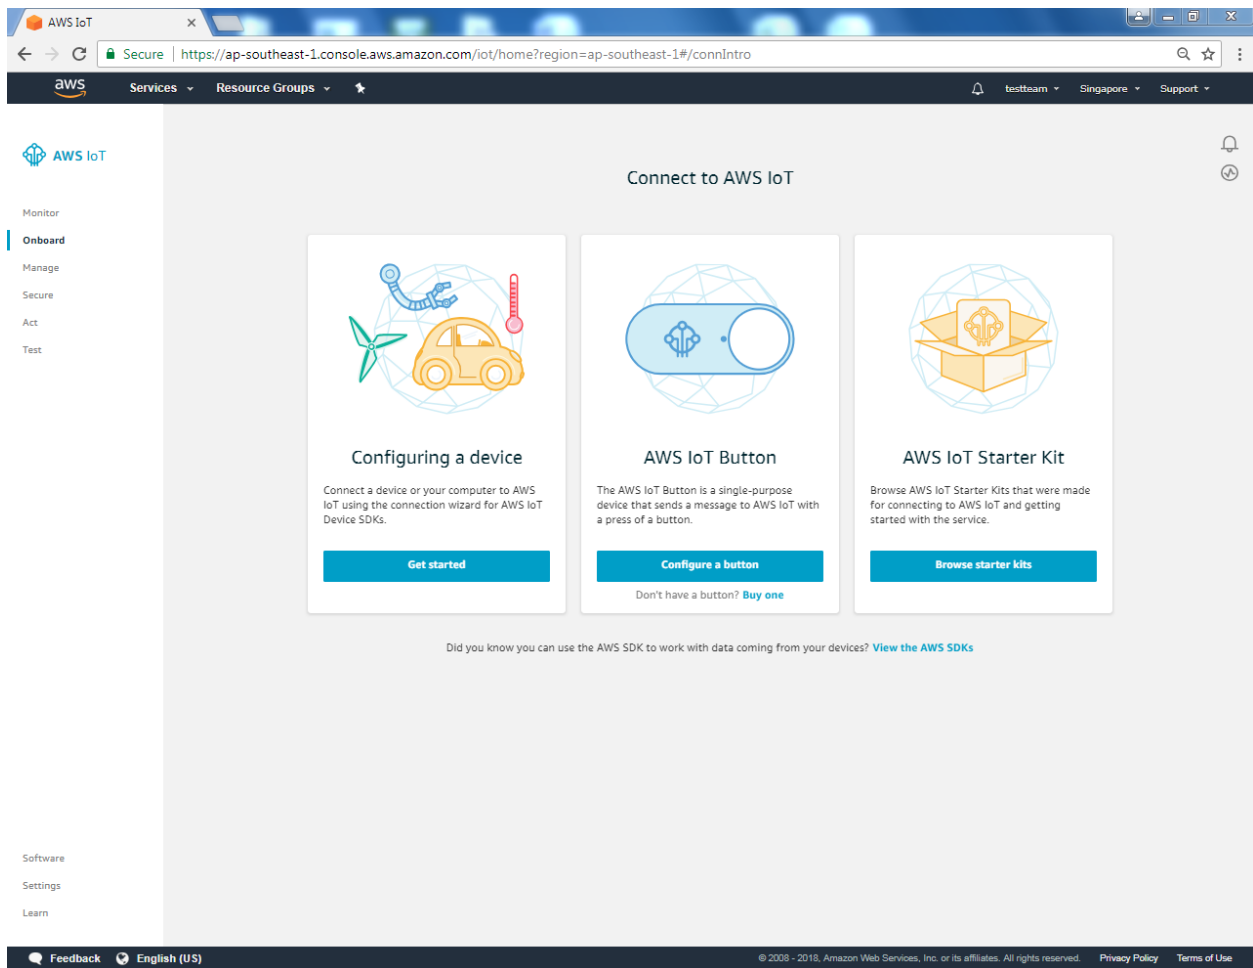

Enter the main page of AWS IoT. Under the Onboard a device, click Get started.

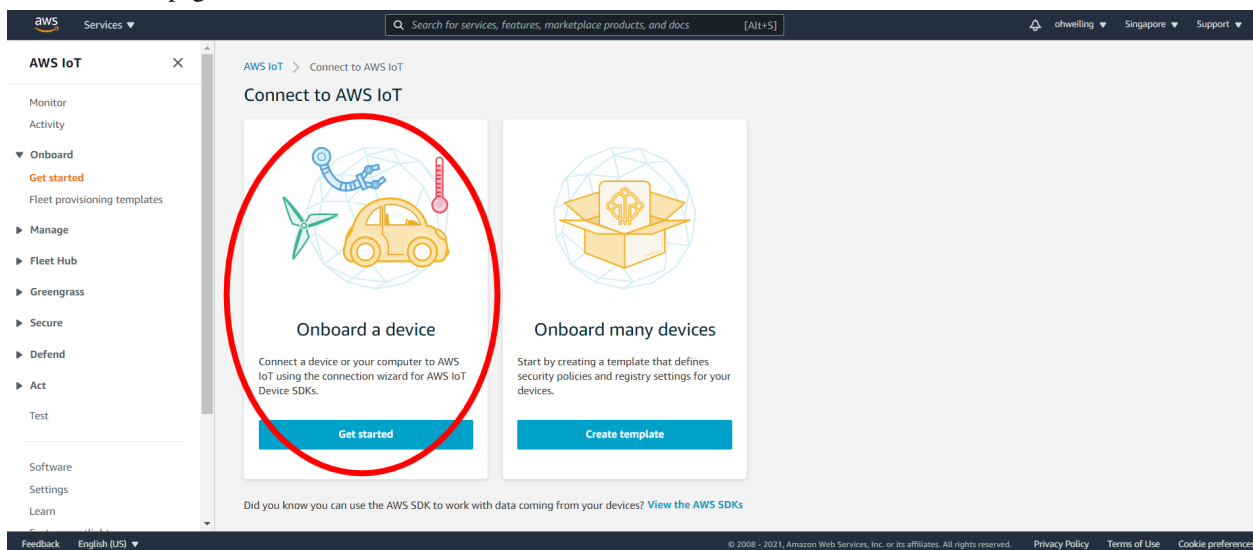

Click Create single thing

Create things [info](#)

A thing resource is a digital representation of a physical device or logical entity in AWS IoT. Your device or entity needs a thing resource in the registry to use AWS IoT features such as Device Shadows, events, jobs, and device management features.

Number of things to create

☒ **Create single thing**
Create a thing resource to register a device. Provision the certificate and policy necessary to allow the device to connect to AWS IoT.

☐ **Create many things**
Create a task that creates multiple thing resources to register devices and provision the resources those devices require to connect to AWS IoT.

[Cancel](#) [Next](#)

Fill in “ameba” on the name field. Attributes represent the status of Ameba.

Specify thing properties [info](#)

A thing resource is a digital representation of a physical device or logical entity in AWS IoT. Your device or entity needs a thing resource in the registry to use AWS IoT features such as Device Shadows, events, jobs, and device management features.

Thing properties [info](#)

Thing name

ameba

Enter a unique name containing only: letters, numbers, hyphens, colons, or underscores. A thing name can't contain any spaces.

Additional configurations
You can use these configurations to add detail that can help you to organize, manage, and search your things.

- ▶ **Thing type** - optional
- ▶ **Searchable thing attributes** - optional
- ▶ **Thing groups** - optional
- ▶ **Billing group** - optional

Under the searchable thing attributes. The value of the attributes can be updated directly by Ameba or by the control side and control side can request Ameba to set the attribute to desired value.

Here we add an attribute named “led” with value “0” and click “Next” .

Step 2 - optional
Configure device certificate

Step 3 - optional
Attach policies to certificate

Thing properties [Info](#)

Thing name
ameba
Enter a unique name containing only: letters, numbers, hyphens, colons, or underscores. A thing name can't contain any spaces.

Additional configurations
You can use these configurations to add detail that can help you to organize, manage, and search your things.

▶ Thing type - optional

▼ Searchable thing attributes - optional
Add searchable attributes to allow your thing to be grouped and searched without using fleet indexing.

Searchable attribute Value - optional Remove

led 0

Add new attribute
You can add up to 2 more attributes.

▶ Thing groups - optional

▶ Billing group - optional

Feedback English (US) © 2008 - 2021, Amazon Web Services, Inc. or its affiliates. All rights reserved. Privacy Policy Terms of Use Cookie preferences

Click Skip creating a certificate at this time and then Create thing

AWS IoT > Manage > Things > Create things > Create single thing

Step 1
Specify thing properties

Step 2 - optional
Configure device certificate

Configure device certificate - optional [Info](#)

A device requires a certificate to connect to AWS IoT. You can choose how you to register a certificate for your device now, or you can create and register a certificate for your device later. Your device won't be able to connect to AWS IoT until it has an active certificate with an appropriate policy.

Device certificate

☐ Auto-generate a new certificate (recommended)
Generate a certificate, public key, and private key using AWS IoT's certificate authority.

☐ Use my certificate
Use a certificate signed by your own certificate authority.

☐ Upload CSR
Register your CA and use your own certificates on one or many devices.

☒ Skip creating a certificate at this time
You can create a certificate for this thing and attach a policy to the certificate at a later time.


Cancel Previous Create thing

Feedback English (US) © 2008 - 2021, Amazon Web Services, Inc. or its affiliates. All rights reserved. Privacy Policy Terms of Use Cookie preferences


Next, click Policy, and create a policy. Policy is used to restrict the functions that a “thing” can do, it can limit the MQTT actions or specific topic that can be performed. Learn more about policy:

<http://docs.aws.amazon.com/iot/latest/developerguide/authorization.html>


Here we do not place policy on Ameba. Fill in “amebaPolicy” in the Name field, “iot:” in Action field and “*” in resources field. Then “Allow”. Finally, click “Create”.

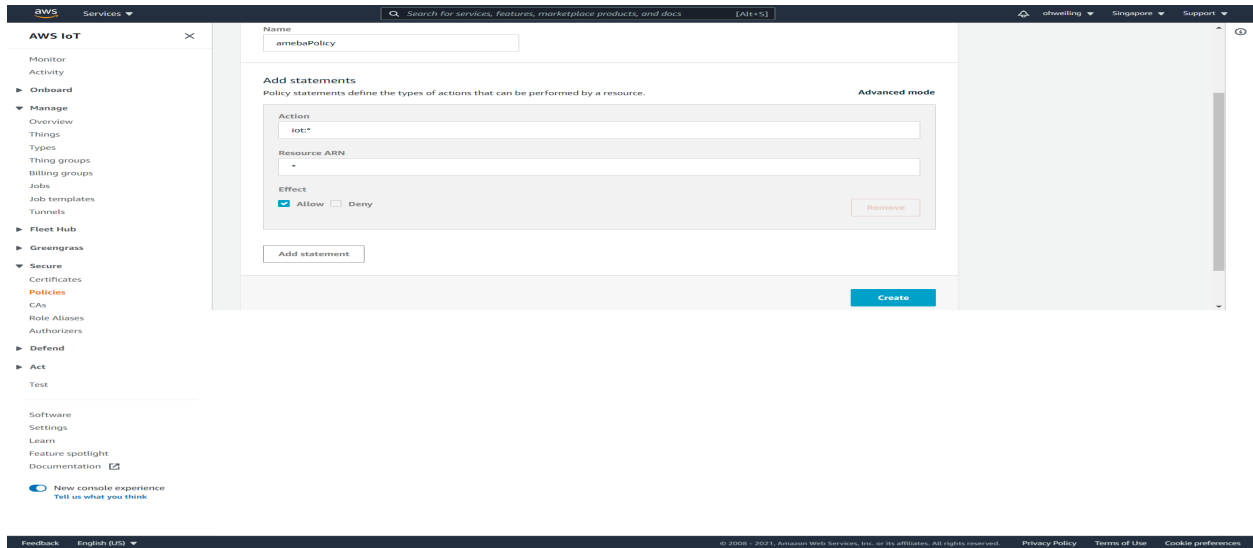


Next, we have to setup the TLS certificate. You can choose to user-defined or generate a certificate by AWS IoT. In this example we click Create Certificate to generate a TLS certificate.

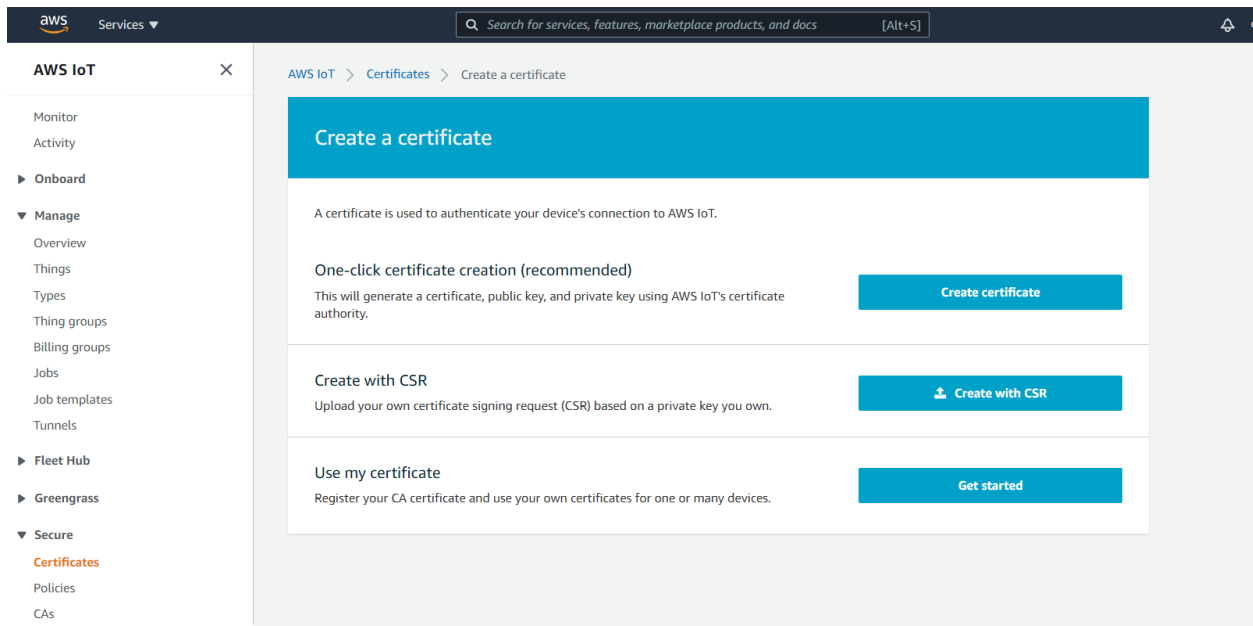


You can see 4 Links. Please download each of the link, “public key” , “private key” , “Certificate” and “rootCA” . After downloading the 4 files, click Done and go back to the certificate main page.

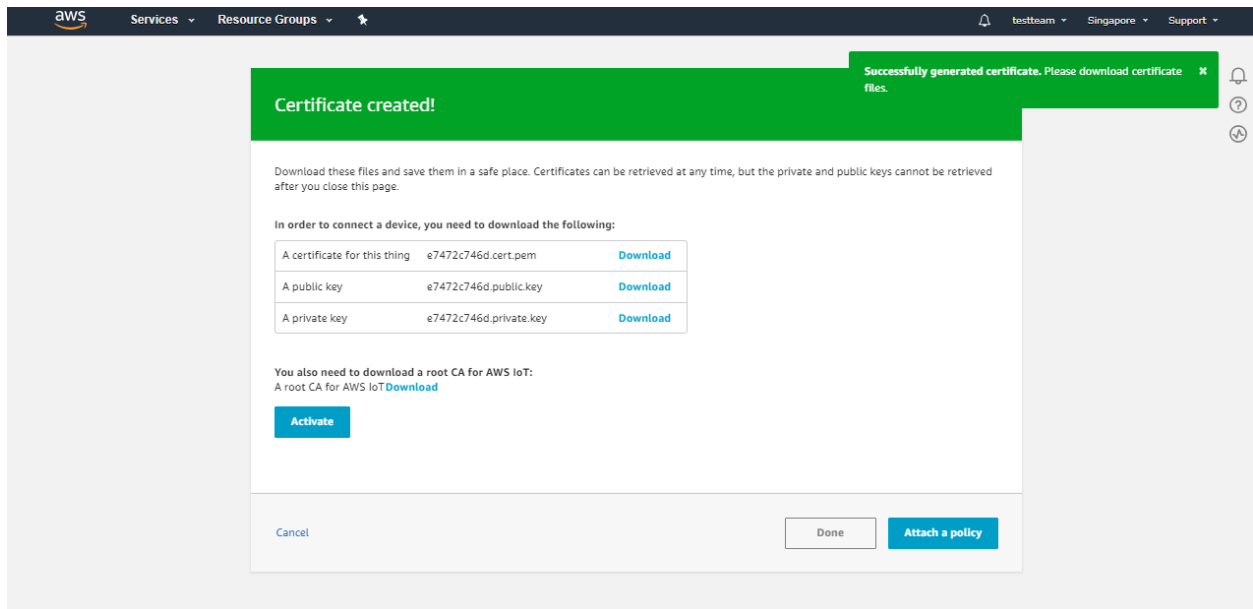


Click Attach a policy in the Actions dropdown menu.

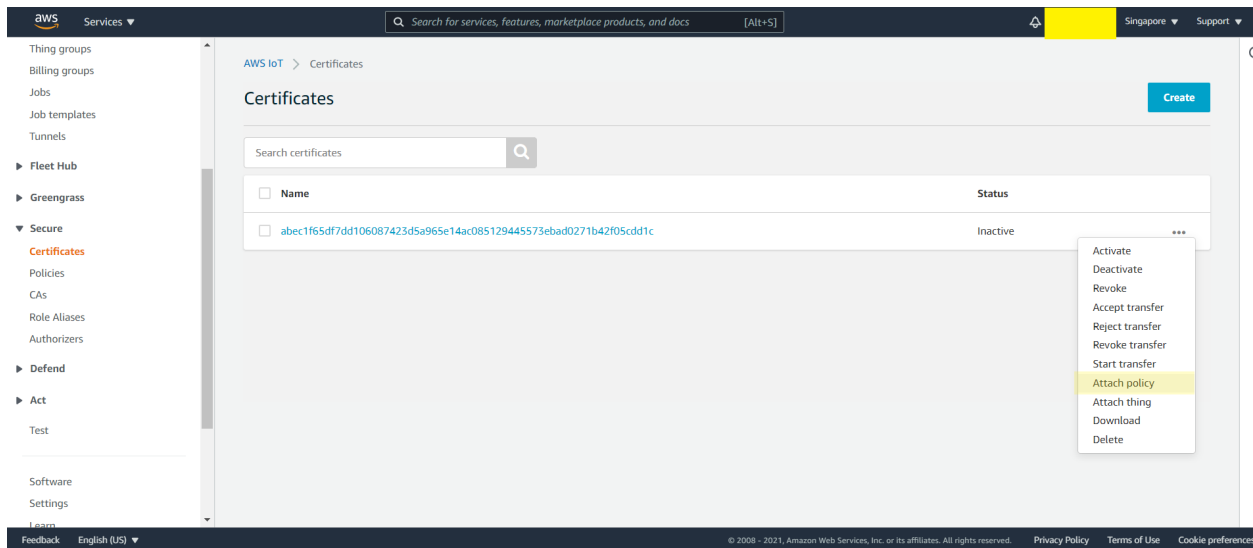


Choose amebaPolicy and click attach.

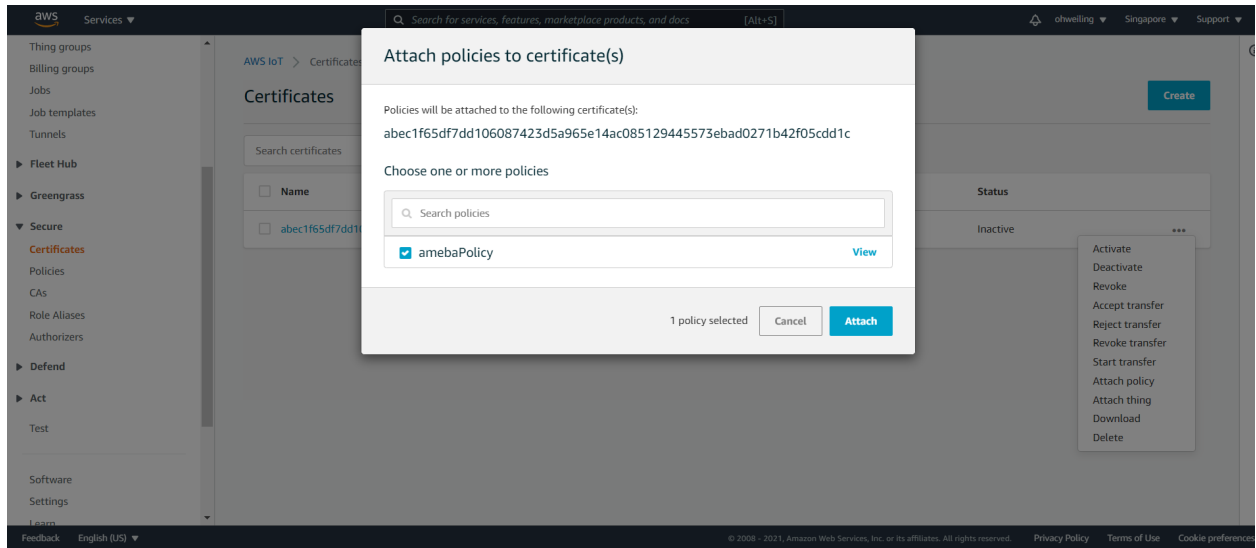

Then go back to the “Actions” drop-down menu at the top right of the certificates homepage, click on “Attach thing” , select the thing “ameba” you just created when the window below appears, then click on “Attach”

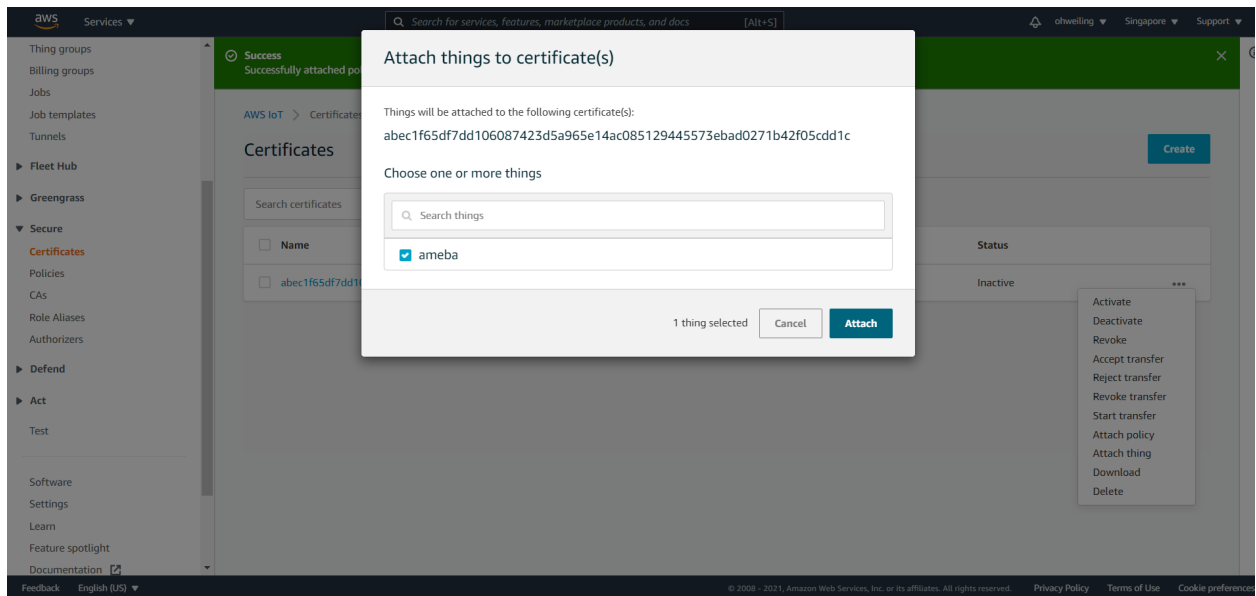


Go back to certificate main page and click Certificate and click Activate in the Actions drop down menu.

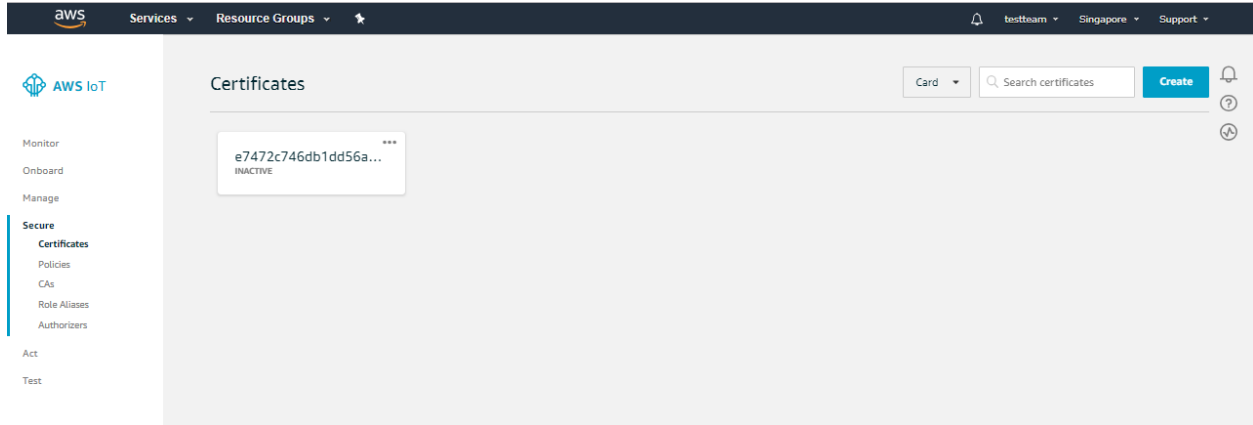

Next, click Manage, and click Things, then click “ameba” the thing we created just now.

Click on Interact and View settings.

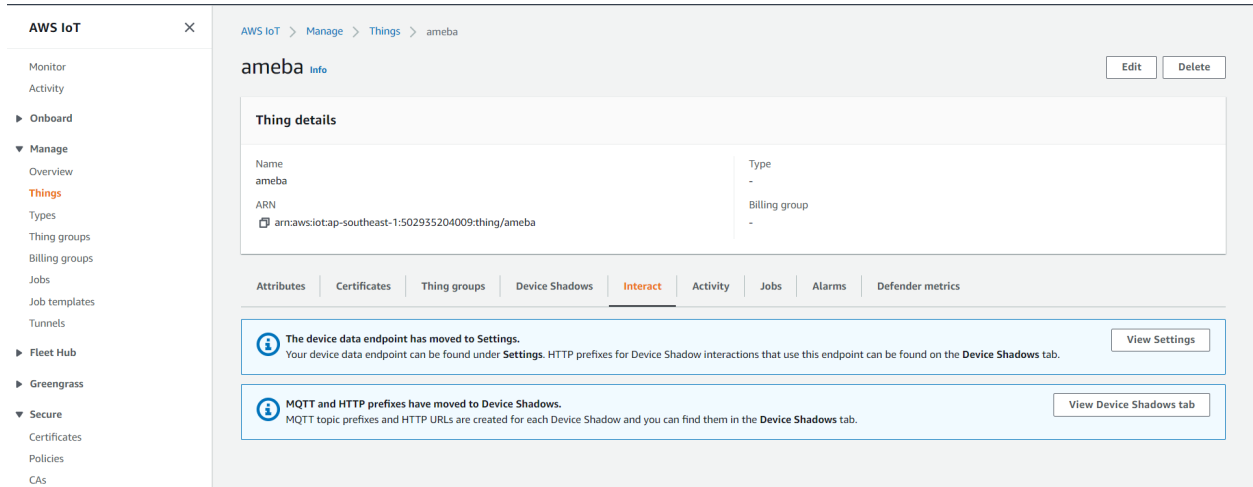

Find out the information of Rest API Endpoint to set Amazon Alexa:

- REST API endpoint: In the value “<https://a1a7004baosggy.iot.us-east-1.amazonaws.com/things/ameba/shadow>”, the part “a1a7004baosggy.iot.us-east-1.amazonaws.com” is the MQTT Broker server address.
- MQTT topic: The value “\$aws/things/ameba/shadow/update” represents the MQTT topic we will use in the AWS IoT Shadow service (if we use MQTT only, without AWS IoT Shadow service, then we can specify other topic name). It is recommended to use “\$aws/things/ameba/shadow/update” here.

Ameba setting

Open “File” -> “Examples” -> “AmebaMQTTClient” -> “Amazon_AWS_IoT_Basic”

In the sample code, modify the highlighted snippet to reflect your WiFi network settings.


```

1  /*
2   Basic Amazon AWS IoT example
3  */
4
5  #include <WiFi.h>
6  #include <PubSubClient.h>
7
8  // Update these with values suitable for your network.
9  char ssid[] = "yourNetwork";      // your network SSID (name)
10 char pass[] = "yourPassword";     // your network password (use for WPA, or use e
11 int status = WL_IDLE_STATUS;      // the Wifi radio's status
12
13 WiFiSSLClient wifiClient;
14 PubSubClient client(wifiClient);
15
16 #define THING_NAME "ameba"
17
18 char mqttServer[] = "a4adrtgyzxov42-ats.iot.ap-southeast-1.amazonaws.com";
19 char clientId[] = "amebaClient";
20 char publishTopic[] = "$aws/things/" THING_NAME "/shadow/update";
21 char publishPayload[MQTT_MAX_PACKET_SIZE];
22 char *subscribeTopic[5] = {
23   "$aws/things/" THING_NAME "/shadow/update/accepted",
24   "$aws/things/" THING_NAME "/shadow/update/rejected",
25   "$aws/things/" THING_NAME "/shadow/update/delta",
26   "$aws/things/" THING_NAME "/shadow/get/accepted",
27   "$aws/things/" THING_NAME "/shadow/get/rejected"
28 };
29
30 /* Amazon Root CA can be download here:

```

Then fill in the “thing” name “ameba” .

```


1  /*
2   Basic Amazon AWS IoT example
3  */
4
5  #include <WiFi.h>
6  #include <PubSubClient.h>
7
8  // Update these with values suitable for your network.
9  char ssid[] = "yourNetwork";      // your network SSID (name)
10 char pass[] = "yourPassword";     // your network password (use for WPA, or use a
11 int status = WL_IDLE_STATUS;      // the Wifi radio's status
12
13 WiFiSSLClient wifiClient;
14 PubSubClient client(wifiClient);
15
16 #define THING_NAME "ameba"
17
18 char mqttServer[] = "a4adrtgyzxov42-ats.iot.ap-southeast-1.amazonaws.com";
19 char clientId[] = "amebaClient";
20 char publishTopic[] = "$aws/things/" THING_NAME "/shadow/update";
21 char publishPayload[MQTT_MAX_PACKET_SIZE];
22 char *subscribeTopic[5] = {
23   "$aws/things/" THING_NAME "/shadow/update/accepted",
24   "$aws/things/" THING_NAME "/shadow/update/rejected",
25   "$aws/things/" THING_NAME "/shadow/update/delta",
26   "$aws/things/" THING_NAME "/shadow/get/accepted",
27   "$aws/things/" THING_NAME "/shadow/get/rejected"
28 };
29
30 /* Amazon Root CA can be download here:

```

23

RTL8722DM/RTL8722CSM on COM9

And the MQTT Broker server address we found earlier in AWS IoT.

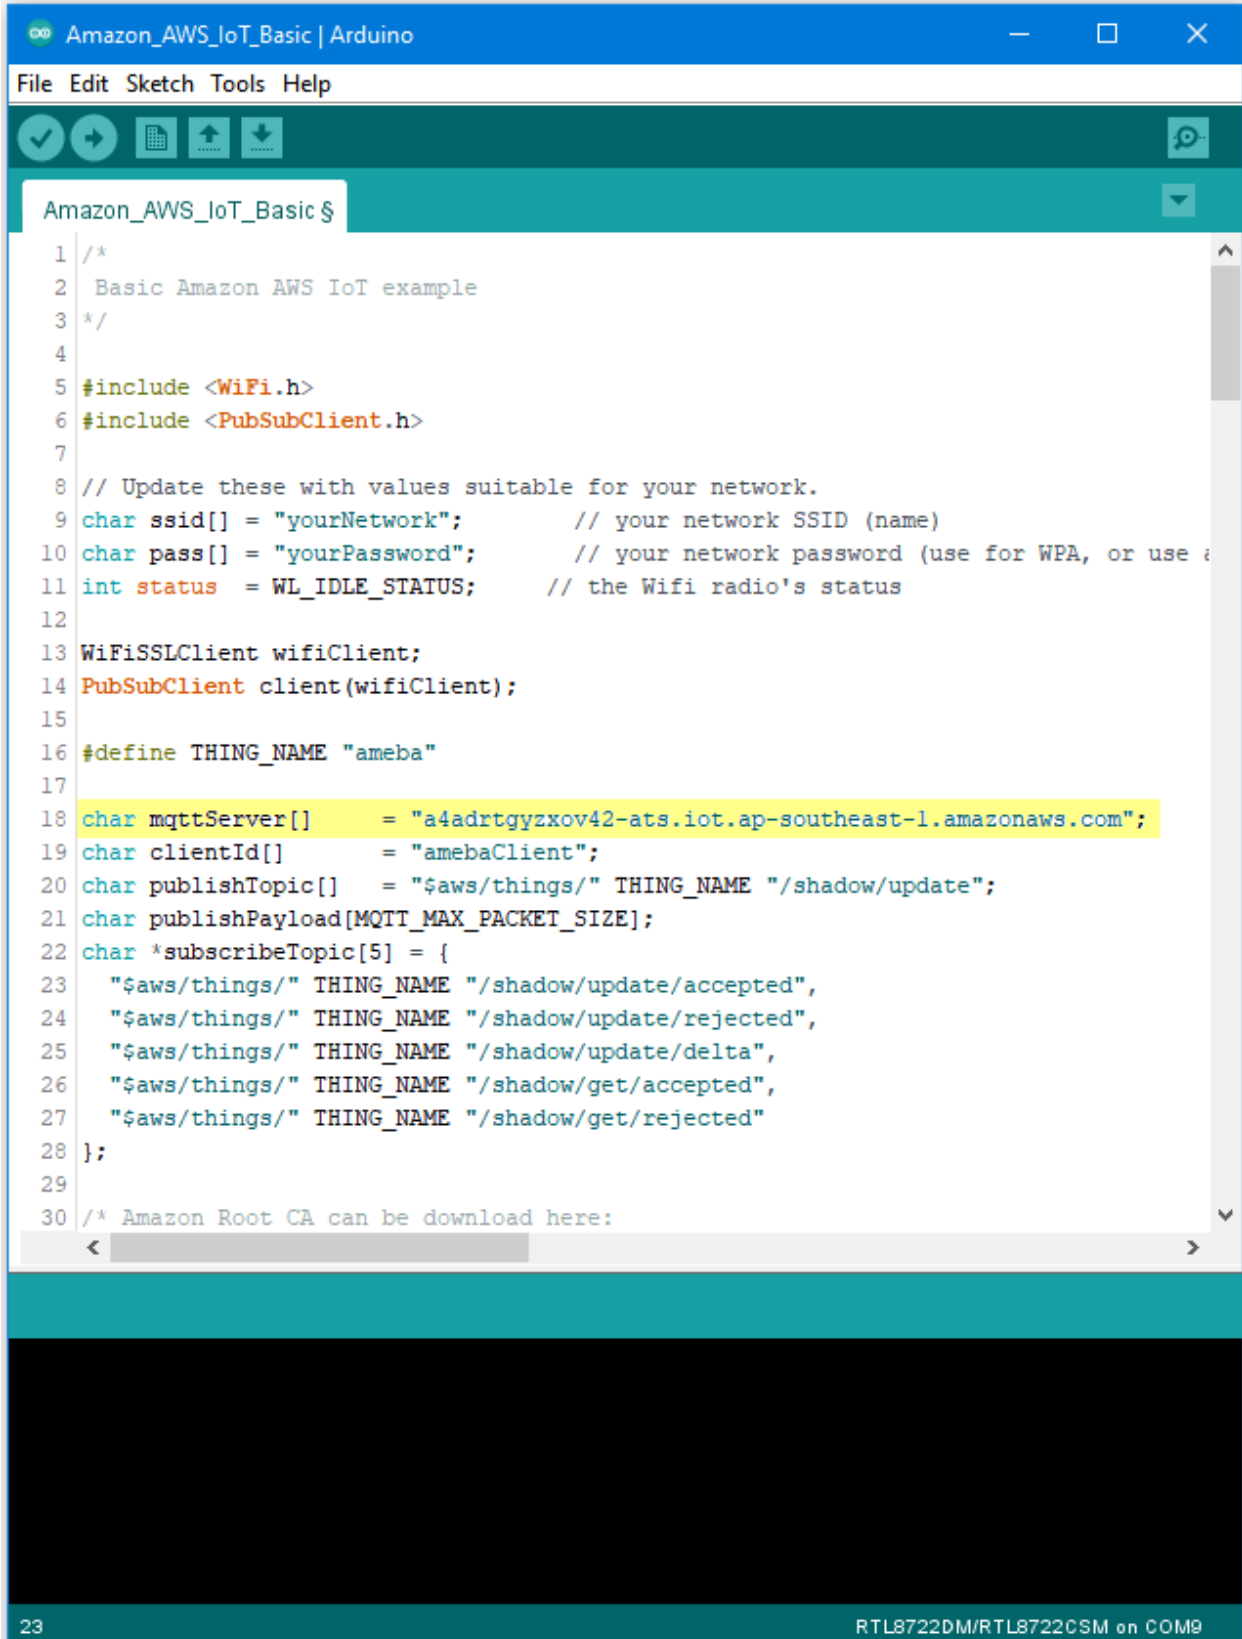

```


1  /*
2   Basic Amazon AWS IoT example
3  */
4
5  #include <WiFi.h>
6  #include <PubSubClient.h>
7
8  // Update these with values suitable for your network.
9  char ssid[] = "yourNetwork";      // your network SSID (name)
10 char pass[] = "yourPassword";     // your network password (use for WPA, or use a
11 int status  = WL_IDLE_STATUS;     // the Wifi radio's status
12
13 WiFiSSLClient wifiClient;
14 PubSubClient client(wifiClient);
15
16 #define THING_NAME "ameba"
17
18 char mqttServer[] = "a4adrtgyzxov42-ats.iot.ap-southeast-1.amazonaws.com";
19 char clientId[] = "amebaClient";
20 char publishTopic[] = "$aws/things/" THING_NAME "/shadow/update";
21 char publishPayload[MQTT_MAX_PACKET_SIZE];
22 char *subscribeTopic[5] = {
23   "$aws/things/" THING_NAME "/shadow/update/accepted",
24   "$aws/things/" THING_NAME "/shadow/update/rejected",
25   "$aws/things/" THING_NAME "/shadow/update/delta",
26   "$aws/things/" THING_NAME "/shadow/get/accepted",
27   "$aws/things/" THING_NAME "/shadow/get/rejected"
28 };
29
30 /* Amazon Root CA can be download here:

```

23

RTL8722DM/RTL8722C5M on COM9

Next, fill in the root CA used in TLS. Download and make sure the downloaded root CA contents conforms to the root CA used in the sketch.

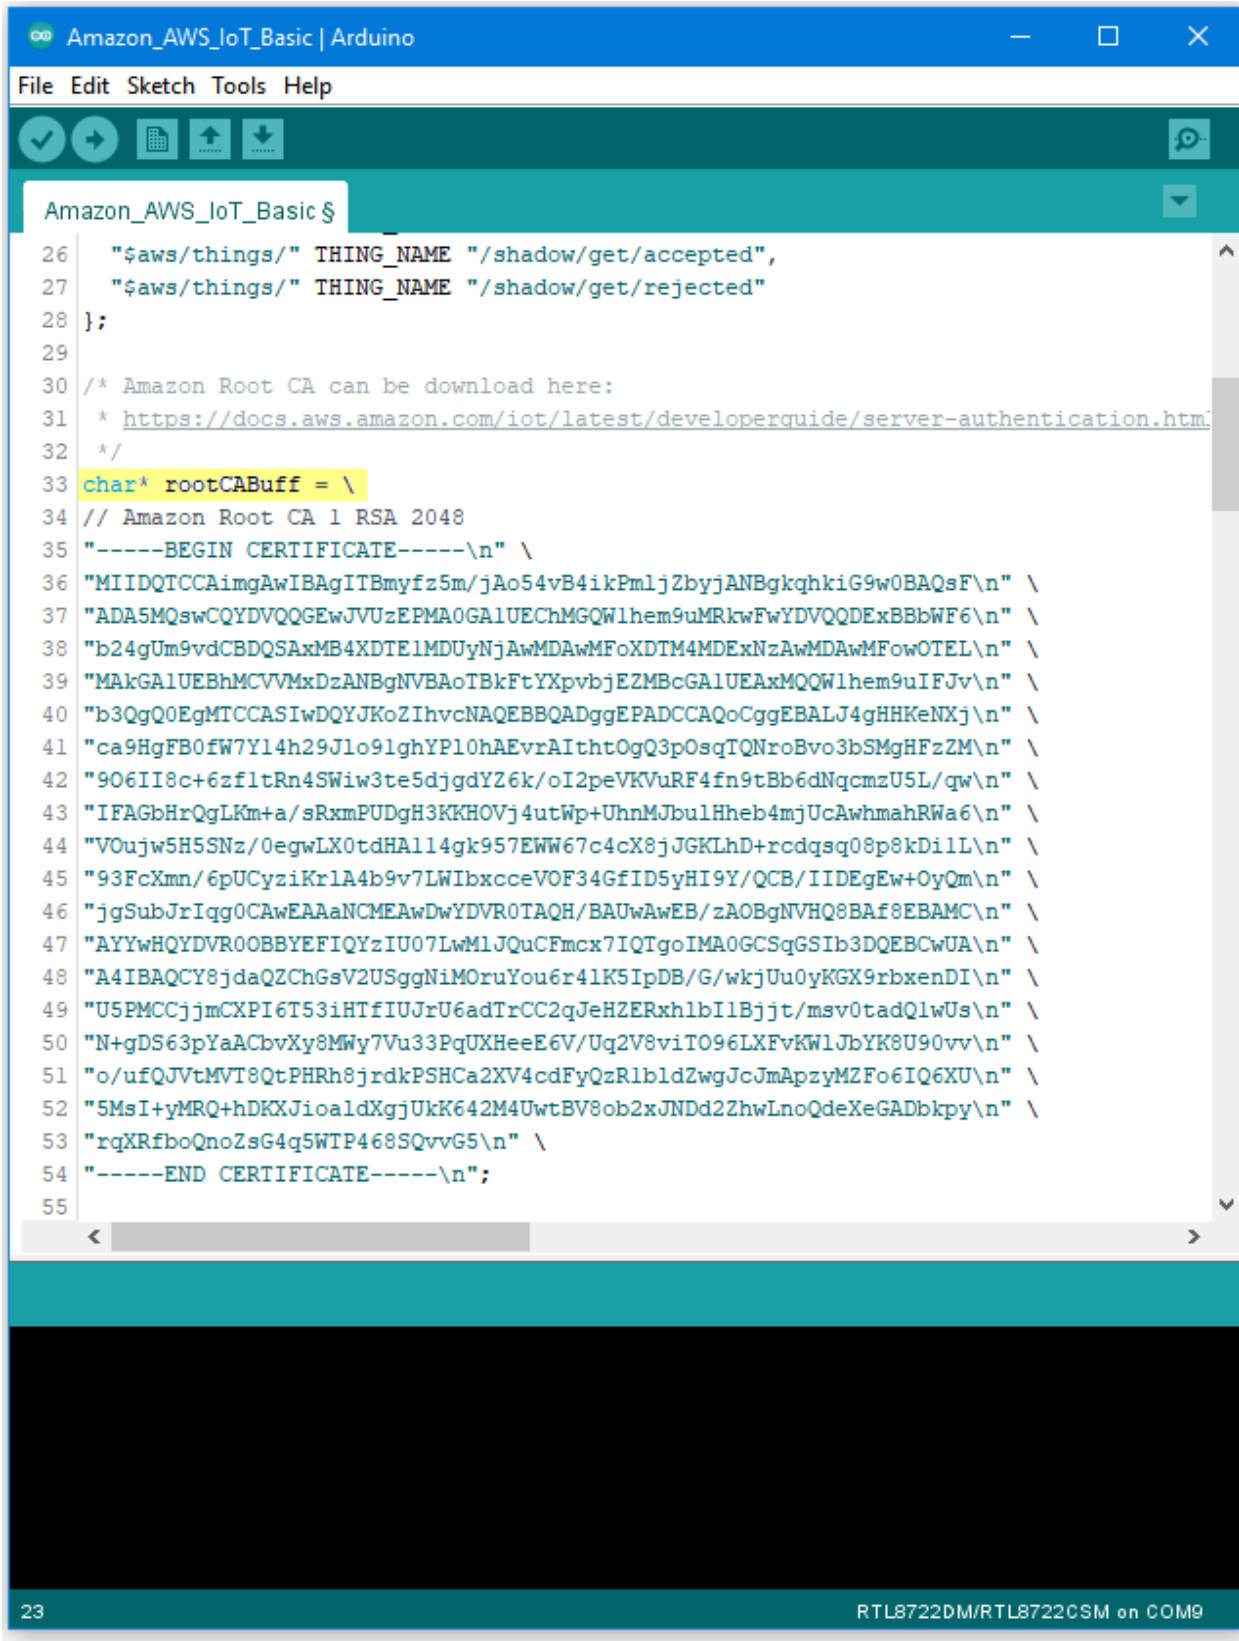

```

Amazon_AWS_IoT_Basic | Arduino
File Edit Sketch Tools Help

Amazon_AWS_IoT_Basic $
26  "$aws/things/" THING_NAME "/shadow/get/accepted",
27  "$aws/things/" THING_NAME "/shadow/get/rejected"
28  };
29
30  /* Amazon Root CA can be download here:
31   * https://docs.aws.amazon.com/iot/latest/developerguide/server-authentication.htm
32   */
33  char* rootCABuff = \
34  // Amazon Root CA 1 RSA 2048
35  "-----BEGIN CERTIFICATE-----\n" \
36  "MIIDQTCCAimgAwIBAgITBmyfz5m/jAo54vB4ikPmljZbyjANBgkqhkiG9w0BAQsF\n" \
37  "ADA5MQswCQYDVQQGEwJVUzEPMA0GA1UEChMGMGQwLhem9uMRkwFwYDVQQDExBBbWF6\n" \
38  "b24gUm9vdCBDQSAxMB4XDTE1MDUyNjAwMDAwMFoXDTE1MDUyNjAwMDAwMFowOTEL\n" \
39  "MAkGA1UEBhMCVVMxMC4ANBgNVBAoTBBkFTYXpvcjEzMDEwGA1UEAxMQQWwLhem9u\n" \
40  "b24gUm9vdCB0eG90eG90eG90eG90eG90eG90eG90eG90eG90eG90eG90eG90eG90e\n" \
41  "ca9HgFB0fW7Y14h29Jl091ghYP10hAEvrAIthtOgQ3pOsQTONroBvo3bSMgHFzZM\n" \
42  "906II8c+6zfltRn4SWiw3te5djgdYZ6k/oI2peVKVuRF4fn9tBb6dNqcmzU5L/qw\n" \
43  "IFAGbHrQgLKm+a/sRxmPUDgH3KKHOVj4utWp+UhnMJbulHheb4mjUcAwhmahRWa6\n" \
44  "VOUjw5H5SNz/0egwLX0tdHA114gk957EWW67c4cX8jJGKLhD+rcdqsq08p8kDilL\n" \
45  "93FcXmn/6pUCyziKrlA4b9v7LWIbxcceVOF34GfID5yHI9Y/QCB/IIDEgEw+OyQm\n" \
46  "jgSubJrIqq0CAwEAaNCMEAwDwYDVR0TAQH/BAUwAwEB/zA0BgNVHQ8BAf8EBAMC\n" \
47  "AYYwHQYDVRR0OBByEFIQYzIU07LwMlJQuCFmcx7IQTgoIMA0GCSqGSIb3DQEBCwUA\n" \
48  "A4IBAQCjY8jdaQZChGsV2USggNiMOruYou6r4lK5IpDB/G/wkjUu0yKGX9rbxenDI\n" \
49  "U5PMCCjjmCXPI6T53iHTfIUJrU6adTrCC2qJeH2ERxhlb1lBjtt/msv0tadQ1wUs\n" \
50  "N+gDS63pYaACbvXy8MWy7Vu33PqUXHeeE6V/Uq2V8viT096LXFvKW1JbYK8U90vv\n" \
51  "o/ufQJvtMVT8QtPHRh8jrdkPSHCa2XV4cdFyQzR1bldZwgJcJmApzyMZFo6IQ6XU\n" \
52  "5MsI+yMRQ+hDKXJioaldXgjUkK642M4UwtBV8ob2xJNDd2ZhwLnoQdeXeGADbkpy\n" \
53  "rqXRfboQnoZsG4q5WTP468SQvvG5\n" \
54  "-----END CERTIFICATE-----\n";
55
23
RTL8722DM/RTL8722CSM on COM9

```

Next, fill in the certificate we created in the AWS IoT Console (i.e., client certificate), usually its file name ends with “-certificate.pem.crt” (e.g., “efae24a533-certificate.pem.crt”). Open the certificate with a text editor, and adjust its format as follows to use in the sketch:

- Add the new line character “\n” at the end of each line.
- Add double-quote at the beginning and the end of each line.
- To concatenate each line as a string, add “” at the end of each line.
- The last line ends with semicolon.

Adjust the format of the private key in the same way and add it to privateKeyBuff.

```

56 /* Fill in YOUR certificate.pem.crt with LINE ENDINGS */
57 char* certificateBuff = \
58 "-----BEGIN CERTIFICATE-----\n" \
59 "MIIDWjCCAKKgAwIBAgIVAPsRFvnxpgcxvXwyMKczt/eeebcAMA0GCSqGSIb3DQEBA\n" \
60 "CwUAME0xSzBjBgNVBASMQkFtYXpviBXZWIGU2Vydm1jZXMGtZlBbWF6b24uY29t\n" \
61 "IEluYy4gTD1TZWF0dGx1IFNUPVdhc2hpbmd0b24gQz1VUzAeFw0yMDA3MDYwNjUy\n" \
62 "MzZaFw00OTYyMzYyMzU5NTlaMB4xHDAaBgNVBAMME0FXUyBjblQgQ2VydGhmaWNh\n" \
63 "dGUwgGElMA0GCSqGSIb3DQEBAQUAA4IBDwAwggEKAoIBAQDKcYAWmFZwzGadgTlP\n" \
64 "4LK4uCs9vx9iHisnXl8pC1DeBXxKt0QB2InvTtXGahjmUSLqnOBthabAxNTu+mo3\n" \
65 "N96KpQlmedBldkFfJtMG+2bQaFzjOEge0k3qFNqQdaM8JQkg+dv2VkhFoXVxrnwH\n" \
66 "WKcwWcqWjexmb9hVFYKm8AlaNHyh+yHsv5J0xg9KP/2ThWqVG89kx/ssei+kwNhD\n" \
67 "9pk7ghGpldszKmvSlwdTHcQJj1b3UC+22soJj1CICBqmOxMVBbQT575KNKFi+UOK\n" \
68 "yneF3oIYgwnDotX5kxHq3Cw0cUteaYmzYKITIUYBxXq5B2CRZJsrNG46FK49ZNV\n" \
69 "3TR/AgMBAAGjYDBeMB8GA1UdIwQYMBaFAFFJEaISt+QJLn05x8h7kXmC5WaQpMB0G\n" \
70 "AlUdDgQWBBTQuDC06walAD36MRM0Cz9TtRCPlzAMBgNVHRMBAf8EAjAAMA4GA1Ud\n" \
71 "DwEB/wQEAwIHgDANBgkqhkiG9w0BAQsFAAOCAQEAFIzoSivJZyay6ltW0tMkqs4\n" \
72 "EXg3eXIhohXfkkxqKJNN4nUrp7hMYfII/HPf/6+JL9/ltvEth6QjvW9xfXFptivJ\n" \
73 "KvgIMyjqzILVpi5hUxM9ewdQJFK0b+v1X/VtkXHvgXYAHTceDOVC39blz/W7mjXW\n" \
74 "wDKB69E8Hhp4/8YP0Bs+GOvAM8pnxJrVoNnCHpjerDFDSjmNoq33iaNtPws8FCbq\n" \
75 "Dd65aHrDlcyRSYp+lC2Ovg0w2v2ECWWLuZDZOPPuyRdcRABLiAJYLakjE9G/nBw\n" \
76 "NbQjhqs3h0r43SWbU0zunJbJfpbWEBMDEB2gke2adCyD+lFauwTyQDb+nXrSHA==\n" \
77 "-----END CERTIFICATE-----\n";
78
79 /* Fill in YOUR private.pem.key with LINE ENDINGS */
80 char* privateKeyBuff = \
81 "-----BEGIN RSA PRIVATE KEY-----\n" \
82 "MIIEowIBAAKCAQEAynGAFphWcMxmnyE9T+CyuLgrPb8fYh4rJl5fKQtQ3gV8SrdE\n" \
83 "AdiJ707VxmoY51Ei6pzgbYWmwMTU7vpqNzfeiqUNZhHQ2XZBXybTBvtm0Ghc4zhK\n" \
84 "ntJN6hTakHWjPCUJIPnb9lZIRaFlca58BlinMFnKlo3sZm/YVRWCpvAJWjR8ofsh\n" \
85 "7L+SdMYPSj/9k4VqlRvPZMf7LHovpMDYQ/aSu4IRqdXbMzJL0tcHUx3ECY9W91Av\n"

```


23

RTL8722DM/RTL8722DSM on COM9

Compile and run

Upload the code and press the reset button on Ameba once the upload is finished.

Open the serial monitor in the Arduino IDE and observe as Ameba connects to the AWS IoT server and sends updates on the LED state variable.

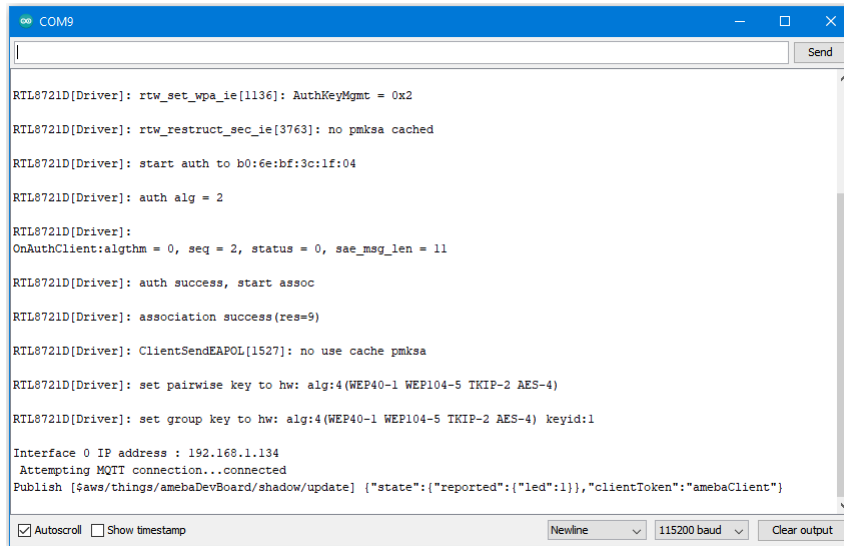

```
RTL8721D[Driver]: rtw_set_wpa_ie[1136]: AuthKeyMgmt = 0x2
RTL8721D[Driver]: rtw_restruct_sec_ie[3763]: no pmksa cached
RTL8721D[Driver]: start auth to b0:6e:bf:3c:1f:04
RTL8721D[Driver]: auth alg = 2
RTL8721D[Driver]:
OnAuthClient:alghth = 0, seq = 2, status = 0, sae_msg_len = 11
RTL8721D[Driver]: auth success, start assoc
RTL8721D[Driver]: association success(res=9)
RTL8721D[Driver]: ClientSendEAPOL[1527]: no use cache pmksa
RTL8721D[Driver]: set pairwise key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4)
RTL8721D[Driver]: set group key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4) keyid:1
Interface 0 IP address : 192.168.1.134
Attempting MQTT connection...connected
Publish [saws/things/amebaDevBoard/shadow/update] {"state":{"reported":{"led":1}}, "clientToken":"amebaClient"}
```

Alternatives

Ameba can also retrieve the current LED status variable from the AWS shadow. This is done by sending a message to the “shadow/get” topic. Refer to the [Amazon_AWS_IoT_with_ACK](#) example code for more information.

Code Reference

Change led state:

In this example, we use GPIO interface to control the led. We set led_pin to 10 and led_state to 1 by default in the sample code.

```
pinMode(led_pin, OUTPUT);
digitalWrite(led_pin, led_state);
```

Set up certificate:

Note that we use the WiFiSSLClient type of wifiClient.


```
WiFiSSLClient wifiClient;
```

WiFiSSLClient inherits Client, so it can be passed as the parameter of PubSubClient constructor.

Next, set up TLS certificate required in connection.

```
wifiClient.setRootCA((unsigned char*)rootCABuff);
wifiClient.setClientCertificate((unsigned char*)certificateBuff, (unsigned_
↳char*)privateKeyBuff);
```

Configure MQTT Broker server

Then MQTT PubClient set MQTT Broker server to connect

```
client.setServer(mqttServer, 8883);
client.setCallback(callback);
```

Connect to MQTT Broker server:

In loop(), call reconnect() function and try to connect to MQTT Broker server and do the certificate verification.

```
while (!client.connected()) {
```

Subscribe & Publish

Next, subscribe to topics.

```
for (int i=0; i<5; i++) {
    client.subscribe(subscribeTopic[i]);
}
```

There are some common topics:

“\$aws/things/ameba/shadow/update/accepted” ,

“\$aws/things/ameba/shadow/update/rejected” ,

“\$aws/things/ameba/shadow/update/delta” ,
“\$aws/things/ameba/shadow/get/accepted” ,
“\$aws/things/ameba/shadow/get/rejected”

Related documentation:

<http://docs.aws.amazon.com/iot/latest/developerguide/thing-shadow-data-flow.html>

Then publish current status::

```
sprintf(publishPayload,
        "{\"state\":{\"reported\":{\"led\":%d}},\"clientToken\":\"%s\"}\",
        led_state, clientId);
```

```
client.publish(publishTopic, publishPayload);
```

Listen to topic and make response:

In the callback function, we listen to the 5 subscribed topics and check if there are messages of “/shadow/get/accepted” :

```
if (strstr(topic, "/shadow/get/accepted") != NULL) {
```

If there is, the message is from the control side. If the attribute state in the message is different from current state, publish the new state.

```
updateLedState(desired_led_state);
```

Use MQTT over TLS


Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1

Example


In this example, we connect Ameba to a MQTT broker using TLS authentication. Then send messages as a publisher

and receive messages from as a subscriber. Open the MQTT example “File” -> “Examples” -> “AmebaMQTTClient” -> “MQTT_TLS”

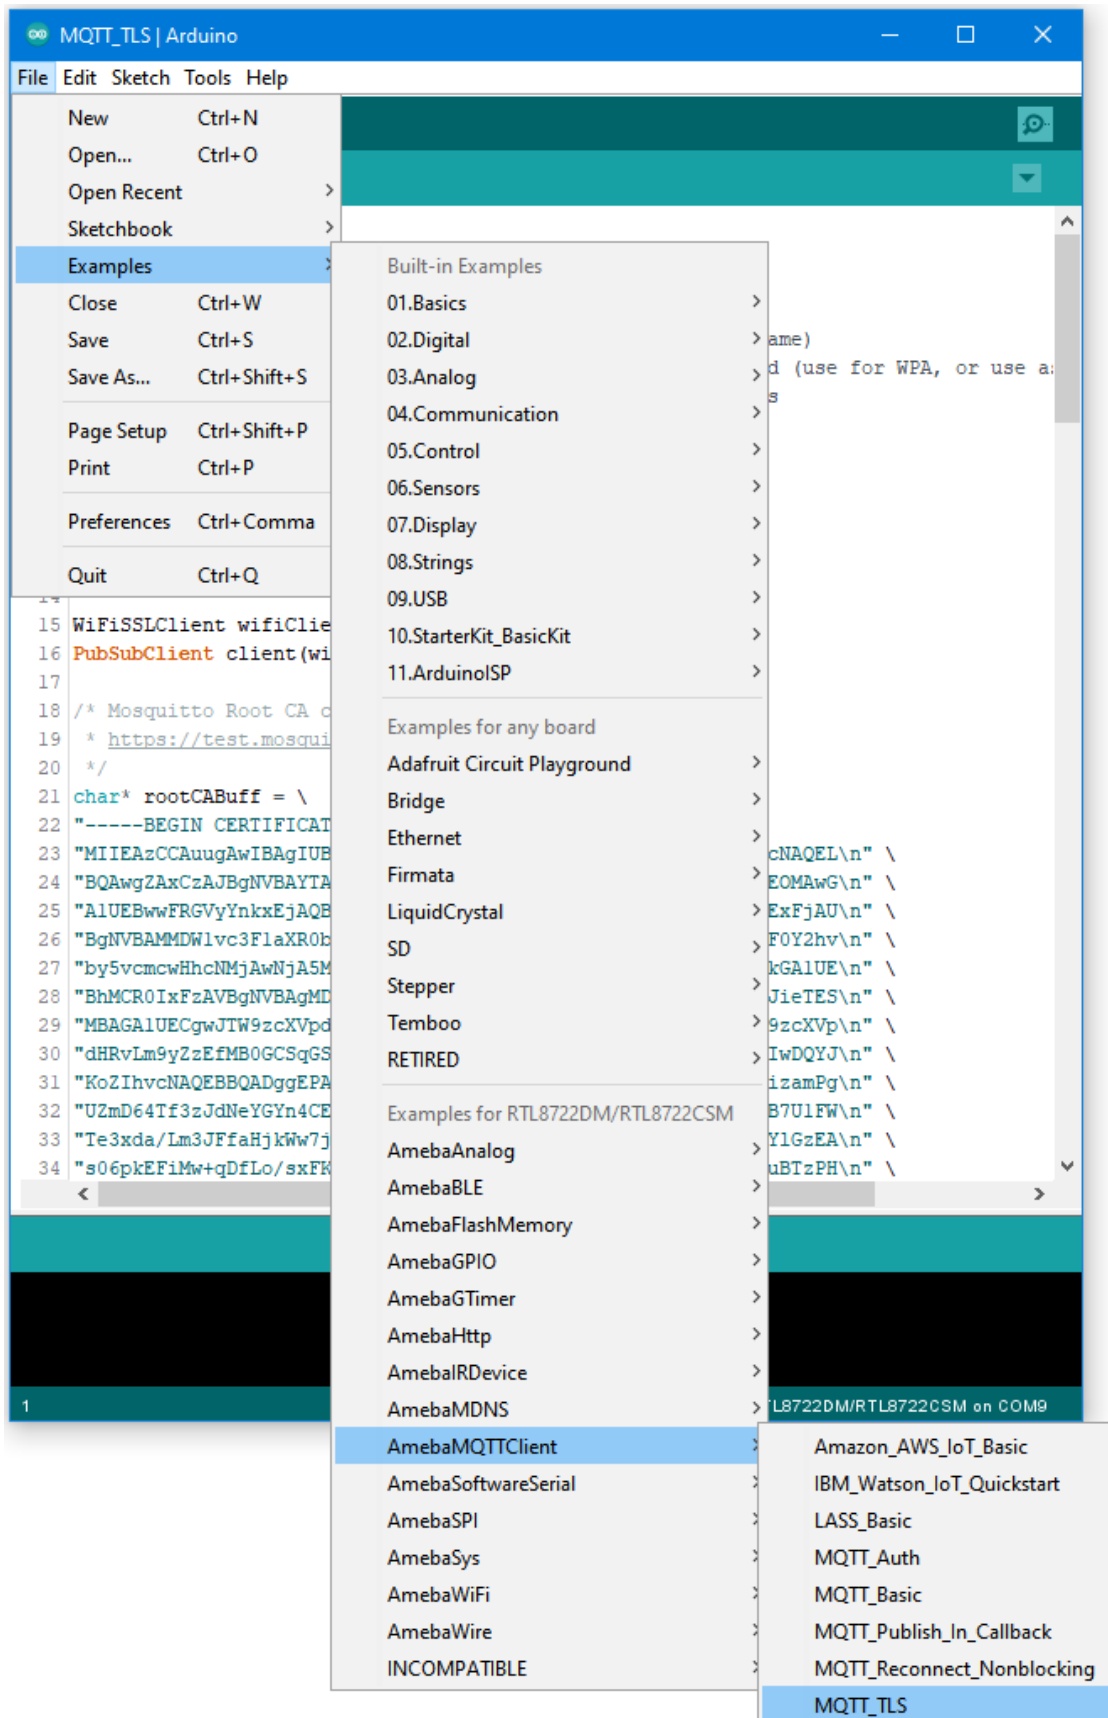

Please modify the WiFi-related parameters to connect to your WiFi network.

Modify the MQTT parameters to fit your application:

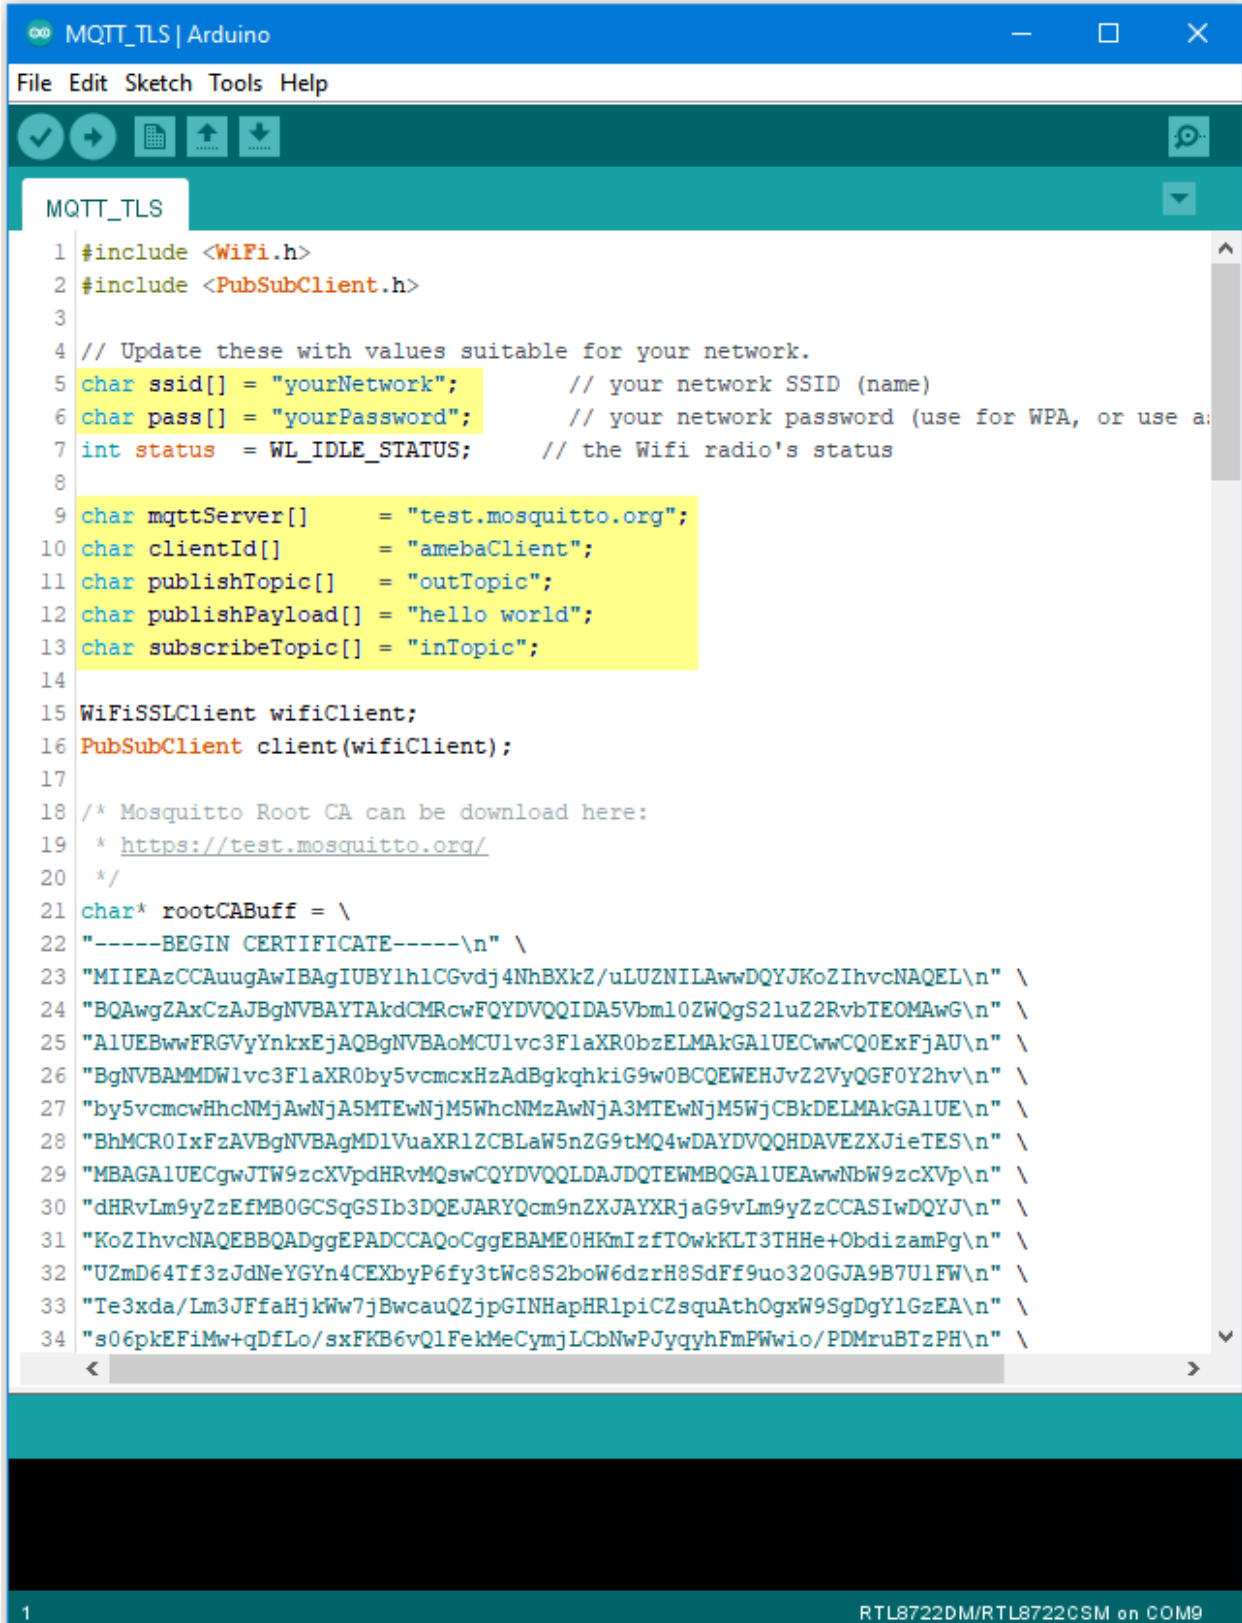

```

MQTT_TLS | Arduino
File Edit Sketch Tools Help

MQTT_TLS
1 #include <WiFi.h>
2 #include <PubSubClient.h>
3
4 // Update these with values suitable for your network.
5 char ssid[] = "yourNetwork"; // your network SSID (name)
6 char pass[] = "yourPassword"; // your network password (use for WPA, or use a:
7 int status = WL_IDLE_STATUS; // the Wifi radio's status
8
9 char mqttServer[] = "test.mosquitto.org";
10 char clientId[] = "amebaClient";
11 char publishTopic[] = "outTopic";
12 char publishPayload[] = "hello world";
13 char subscribeTopic[] = "inTopic";
14
15 WiFiSSLClient wifiClient;
16 PubSubClient client(wifiClient);
17
18 /* Mosquitto Root CA can be download here:
19 * https://test.mosquitto.org/
20 */
21 char* rootCABuff = \
22 "-----BEGIN CERTIFICATE-----\n" \
23 "MIIEAzCCAaugAwIBAgIUBYlh1CGvdj4NhBXkZ/uLUZNIkAwDQYJKoZIhvcNAQEL\n" \
24 "BQAwZAXCZAJBgNVBAYTAkdCMRcwFQYDVQQIDA5Vbm10ZWQgS2luZ2RvbTEOMAwG\n" \
25 "AlUEBwwFRGVyYnknxEjAQBgNVBAoMCUlv3FlaXR0bzELMAkGA1UECwwCQ0ExFjAU\n" \
26 "BgNVBAMMDWlv3FlaXR0by5vcmcxH2AdBgkqhkiG9w0BCQEWElJvZ2VyQG90Y2hv\n" \
27 "by5vcmcwHhcnMjAwNjA3MTEwNjM5WjCBkDELMAkGA1UE\n" \
28 "BhMCR0IxZjZAVBgNVBAGMD1VuaXRlZCBLaW5nZG9tMQ4wDAYDVQQHDAVEZXJieTES\n" \
29 "MBAGA1UECgwJTW9zcXVpdHRvMQswCQYDVQQLDAJDQTEWMBQGA1UEAwNbW9zcXVp\n" \
30 "dHRvLm9yZzEfMB0GCSqGSIb3DQEJARYQcm9nZXJAYXRjaG9vLm9yZzCCASIwDQYJ\n" \
31 "KoZIhvcNAQEBBQADggEPADCCAQoCggEBAME0HKmIzftOwkKLT3THHe+ObdizamPg\n" \
32 "UZmD64Tf3zJdNeYGYn4CEXbyP6fy3tWc8S2boW6dZrH8SdFf9uo320GJA9B7U1FW\n" \
33 "Te3xda/Lm3JffaHjkWw7jBwcauQZjpGINHapHRlpiCZsquAthOgxW9SgDgYlGzEA\n" \
34 "s06pkEFiMw+qDfLo/sxFKB6vQ1FekMeCymjLCbNwPJyqyFmPWwio/PDMruBTzPH\n"

```

1 RTL8722DM/RTL8722CSM on COM9

The “mqttServer” refers to the MQTT-Broker, we use the free MQTT sandbox “test.mosquitto.org” for testing.


“clientId” is an identifier for MQTT-Broker to identify the connected device.

“publishTopic” is the topic of the published message, we use “outTopic” in the example. The devices subscribe to “outTopic” will receive the message.

“publishPayload” is the content to be published.

“subscribeTopic” is to tell MQTT-broker which topic we want to subscribe to.

Next, compile the code and upload it to Ameba. Press the reset button, then open the serial monitor

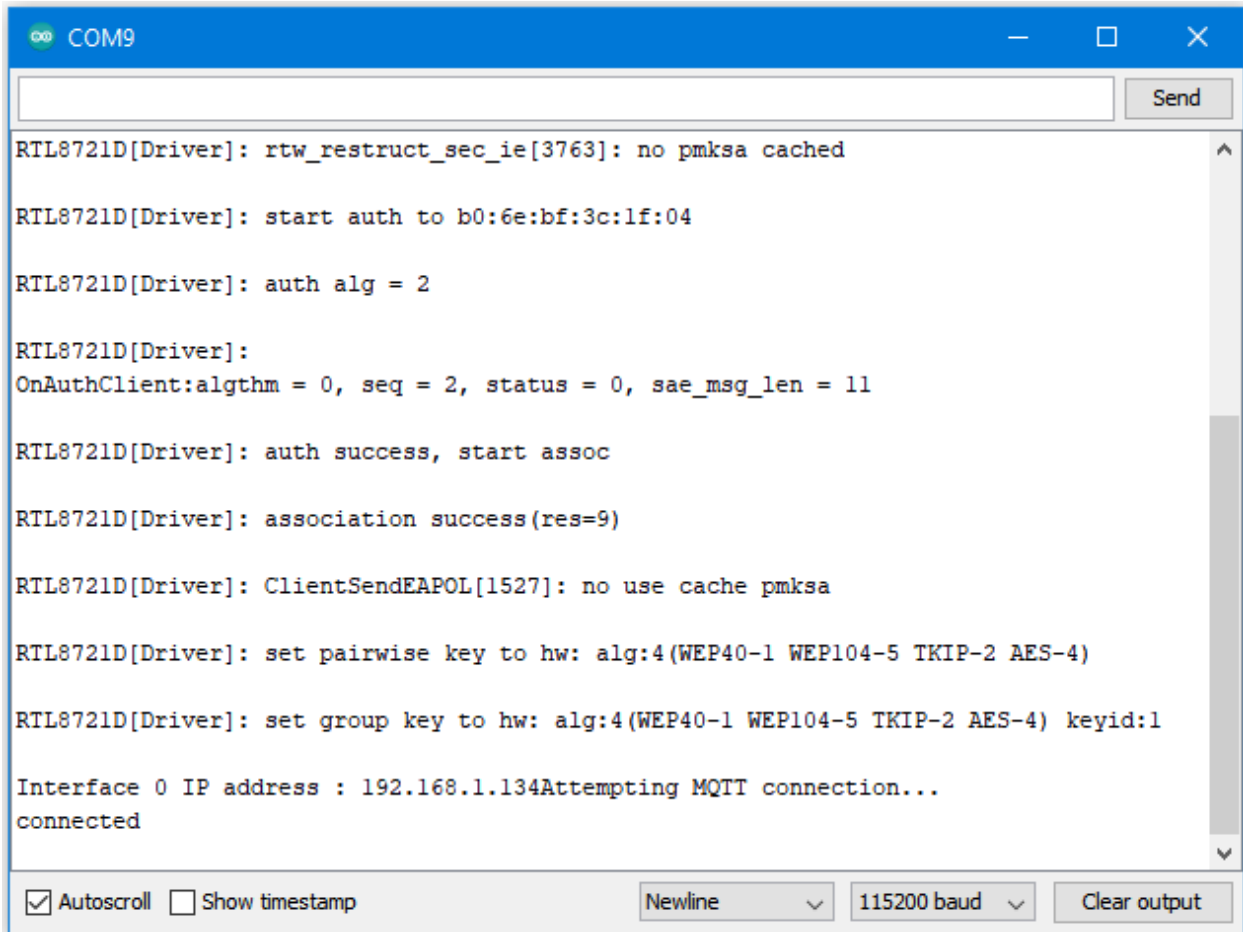


```
COM9
RTL8721D[Driver]: rtw_restruct_sec_ie[3763]: no pmksa cached
RTL8721D[Driver]: start auth to b0:6e:bf:3c:1f:04
RTL8721D[Driver]: auth alg = 2
RTL8721D[Driver]:
OnAuthClient:alghm = 0, seq = 2, status = 0, sae_msg_len = 11
RTL8721D[Driver]: auth success, start assoc
RTL8721D[Driver]: association success(res=9)
RTL8721D[Driver]: ClientSendEAPOL[1527]: no use cache pmksa
RTL8721D[Driver]: set pairwise key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4)
RTL8721D[Driver]: set group key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4) keyid:1
Interface 0 IP address : 192.168.1.134Attempting MQTT connection...
connected
```

After Ameba is connected to MQTT server, it sends the message “hello world” to “outTopic” . To see the message, use another MQTT client. Refer to the MQTT_Basic example guide on how to setup a PC-based MQTT client.

If you wish to use TLS client authentication in addition to server authentication, you will need to generate an OpenSSL private key and obtain a signed certificate from the server. For testing purposes, signed certificates can be obtained from test.mosquitto.org by following the guide at <https://test.mosquitto.org/ssl/>.

Replace the character strings “certificateBuff” and “privateKeyBuff” with your signed certificate and OpenSSL private key, ensuring that they are formatted the same way as the shown in the example code. Also uncomment the highlighted code to enable client authentication, and to change the MQTT port number.

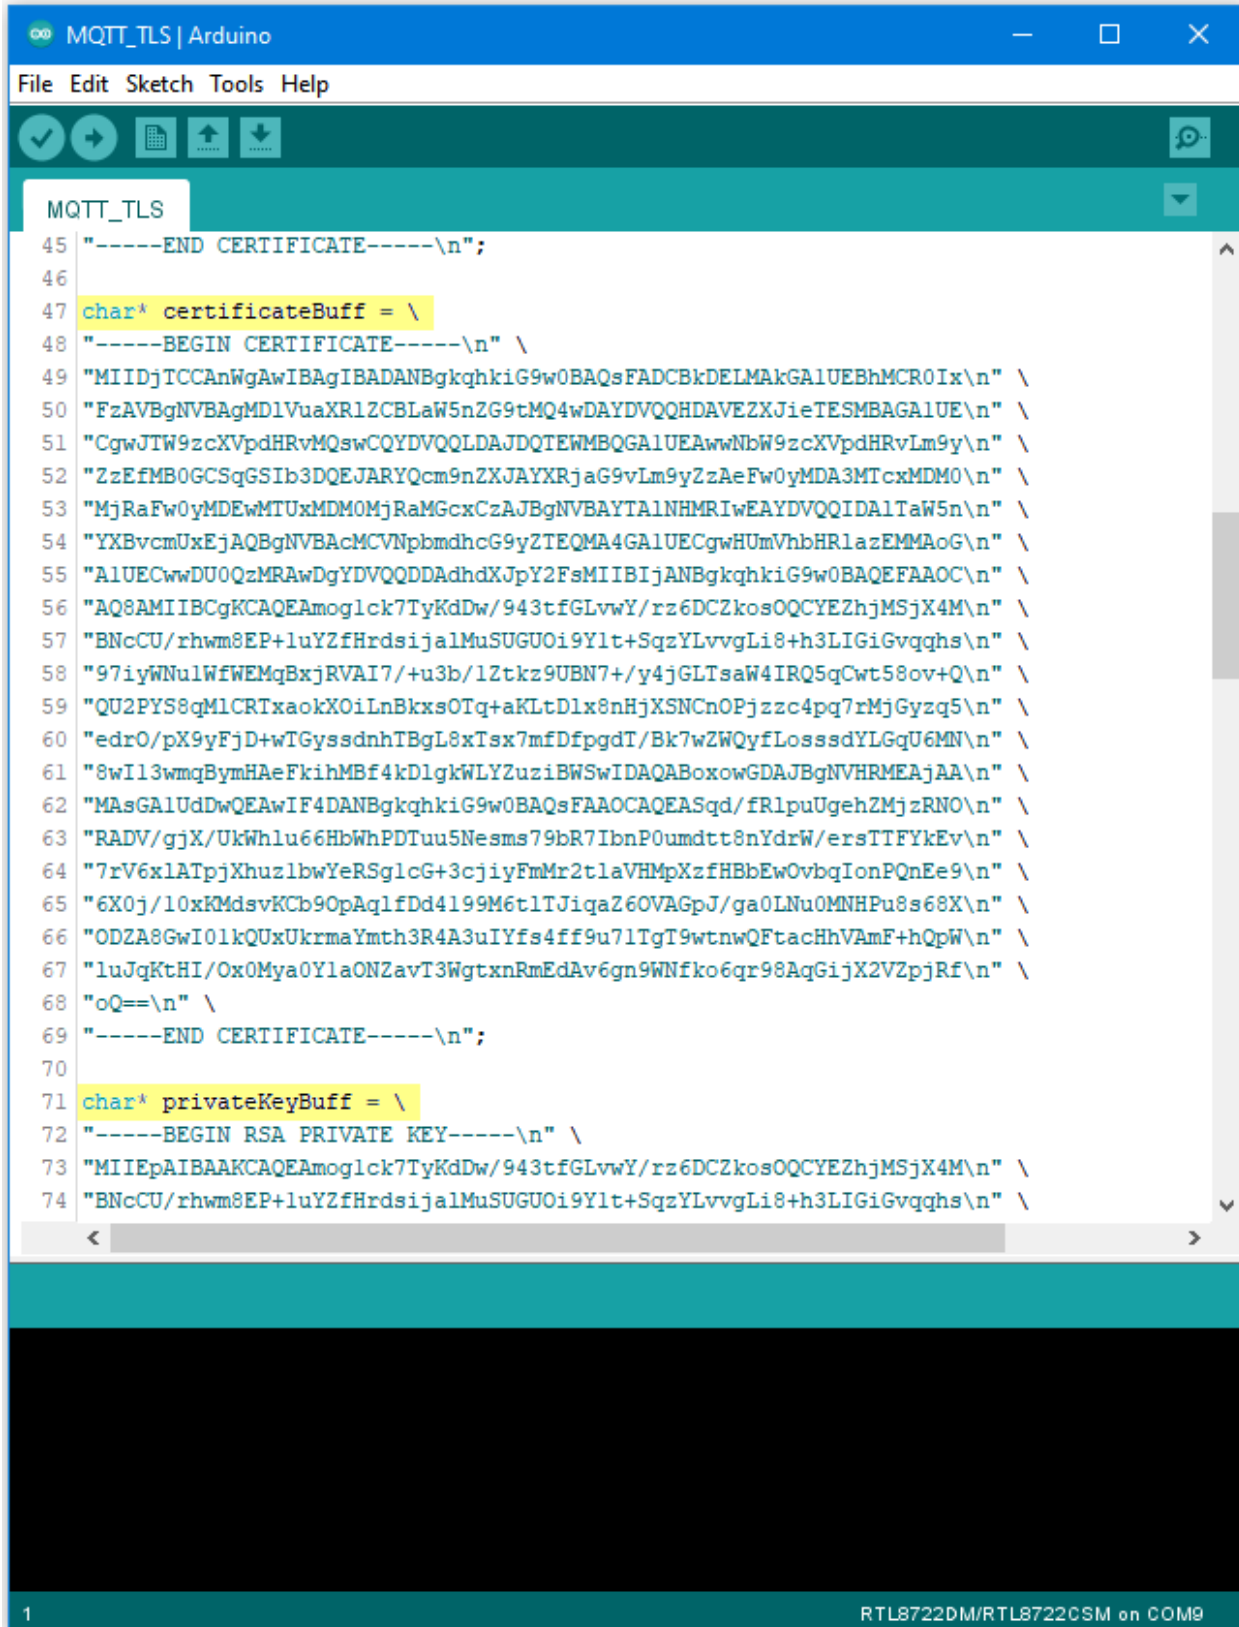

```

MQTT_TLS | Arduino
File Edit Sketch Tools Help

MQTT_TLS
45 "-----END CERTIFICATE-----\n";
46
47 char* certificateBuff = \
48 "-----BEGIN CERTIFICATE-----\n" \
49 "MIIDjTCCAnWgAwIBAgIBADANBgkqhkiG9w0BAQsFADCBkDELMAkGA1UEBhMCR0Ix\n" \
50 "FzAVBgNVBAGMD1VuaXRlZCBLaW5nZG9tMQ4wDAYDVQQHDAVEZXJieTESMBAGAlUE\n" \
51 "CgwJTW9zcXVpdHRvMQswCQYDVQQLDAJQTEWMBQGA1UEAwNBW9zcXVpdHRvLm9y\n" \
52 "ZzEfMB0GCsqGSIB3DQEJARYQcm9nZXJAYXRjaG9vLm9yZzAeFw0yMDA3MTcxMDM0\n" \
53 "MjRaFw0yMDEwMTUxMDM0MjRaMGcxZzAJBgNVBAYTA1NHMRIwEAYDVQQIDA1TaW5n\n" \
54 "YXBvcnUxEjAQBgNVBACMCVnpbmdhcG9yZTEQMA4GA1UECgwHUmVhbHRlZEMMAoG\n" \
55 "AlUECwwDU0QzMRAwDgYDVQQDDAdhdXJpY2FsMIIBIjANBgkqhkiG9w0BAQEFAAO\n" \
56 "CQAMIIIBCAQEA moglck7TyKdDw/943tfGLvwY/rz6DCZkosOQCYEZhjMSjX4M\n" \
57 "BNcCU/rhwm8EP+luYZfHrdsijalMuSUGUOi9Ylt+SqzYLvvgLi8+h3LIGiGvqghs\n" \
58 "97iyWNulWfWEMqBxjRVAI7/+u3b/lZtkz9UBN7+/y4jGLTsaW4IRQ5qCwt58ov+Q\n" \
59 "QU2PYS8qMlCRTxaokXOiLnBkxsOTq+aKLTdlx8nHjXSNCnOPjzzc4pq7rMjGyzq5\n" \
60 "edrO/pX9yFjD+wTGyssdnhTBgL8xTsx7mfDfpgdT/Bk7wZWQyfLosssdYLGqU6MN\n" \
61 "8wIl3wmqBymHAeFkihMBf4kDlglWLYZuziBWSwIDAQABoxowGDAJBgNVHRMEAjAA\n" \
62 "MAsGAlUdDwQEAwIF4DANBgkqhkiG9w0BAQsFAAOCAQEASqd/fRlpuUgehZMjzRNO\n" \
63 "RADV/gjX/UkWhlu66HbWhPDTuu5Nesms79bR7IbnP0umdt8nYdrW/ersTTFYkEv\n" \
64 "7rV6xlatPjXhuzlbwYeRSglcG+3cjiyFmMr2tlaVHMPXzfHBBEwOvbqIonPQnEe9\n" \
65 "6X0j/10xKMdsVKCb9OpAqlfDd4199M6t1tJiqaZ6OVAGpJ/ga0LNu0MNHPU8s68X\n" \
66 "ODZA8GwI0lkQUxUkrmaYmth3R4A3uIYfs4ff9u71TgT9wtnwQftacHhVAmF+hQpW\n" \
67 "luJqKtHI/Ox0Mya0YlaONZavT3WgtxnRmEdAv6gn9WNfko6qr98AqGijX2VZpjRf\n" \
68 "oQ==\n" \
69 "-----END CERTIFICATE-----\n";
70
71 char* privateKeyBuff = \
72 "-----BEGIN RSA PRIVATE KEY-----\n" \
73 "MIIEpAIBAAKCAQEAmoglck7TyKdDw/943tfGLvwY/rz6DCZkosOQCYEZhjMSjX4M\n" \
74 "BNcCU/rhwm8EP+luYZfHrdsijalMuSUGUOi9Ylt+SqzYLvvgLi8+h3LIGiGvqghs\n"

```

1 RTL8722DM/RTL8722CSM on COM9


```

MQTT_TLS $
130
131 void setup() {
132   Serial.begin(115200);
133
134   while (status != WL_CONNECTED) {
135     Serial.print("\r\n Attempting to connect to SSID: ");
136     Serial.println(ssid);
137     // Connect to WPA/WPA2 network. Change this line if using open or WEP network:
138     status = WiFi.begin(ssid, pass);
139     if (status == WL_CONNECTED) break;
140     // retry after 1 second
141     delay(1000);
142   }
143
144   wifiClient.setRootCA((unsigned char*)rootCABuff);
145   wifiClient.setClientCertificate((unsigned char*)certificateBuff, (unsigned char*)privateKeyBuff);
146   client.setServer(mqttServer, 8884);
147   /*
148   wifiClient.setRootCA((unsigned char*)rootCABuff);
149   client.setServer(mqttServer, 8883);
150   /*
151   client.setCallback(callback);
152
153   // Allow the hardware to sort itself out
154   delay(1500);
155 }
156
157 void loop()
158 {
159   if (!client.connected()) {
160
144
RTL8722DM/RTL8722CSM on COM9

```

Upload PM2.5 Data to LASS System

Intro to LASS

The LASS stands for “Location Aware Sensor System” . It is an open project and was started only for the interest of public welfare. Find detailed introduction [here](#).

Practically, LASS is based on MQTT protocol to collect all kinds of uploaded data, and for those who need these data can subscribe top as well.

Find more LASS information at their [official hackpad](#).

Preparation


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- PlanTower PMS3003 or PMS5003 x1

Example

In this example, we use applications mentioned at our website, including:


- **MQTT**: a MQTT-Broker to connect to LASS. The Client is “FT1_0XXXX” , the XXXX are the four last digits of Ameba’ s Wi-Fi MAC, and the outTopic is “LASS/Test/Pm25Ameba/**clientID**” , where clientID is the actual Ameba’ s MQTT client ID.
- **NTP**: uploaded data must have time notation
- **PM2.5**: uploaded data includes PM2.5 information

Open the example. “File” -> “Examples” -> “AmebaMQTTClient” -> “lass_basic”

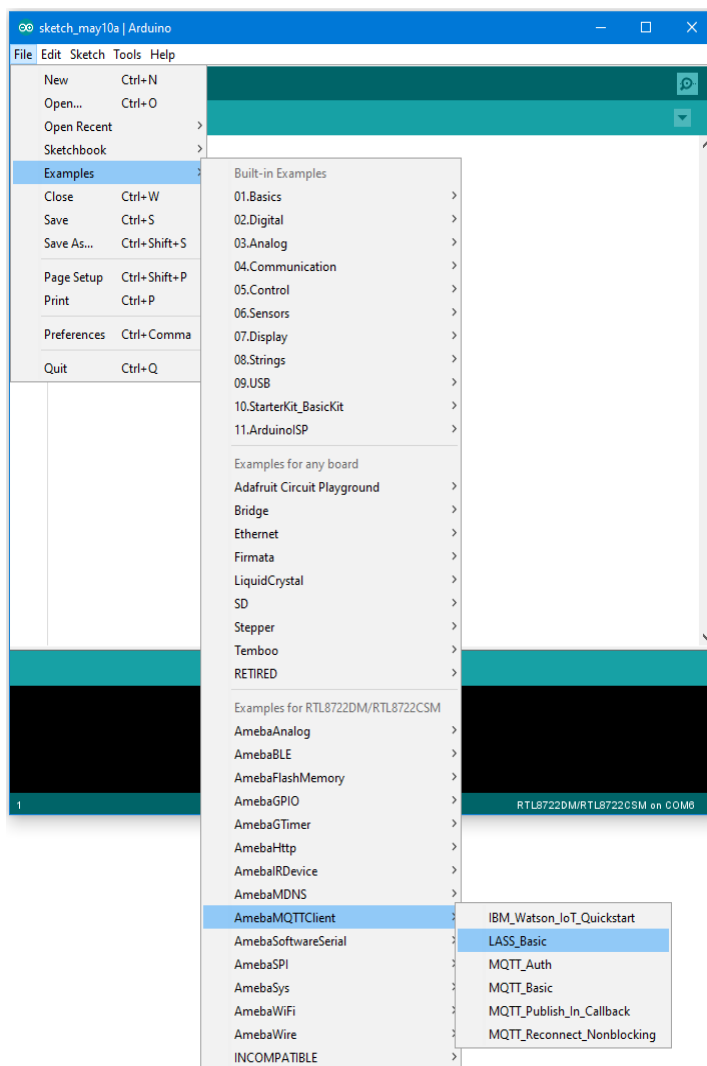

This example requires internet connection, so make sure you fill in SSID and PASS into AP information that you wish to connect.

Also, LASS requires GPS information. There is no GPS sensor included in this example, so you must manually provide GPS information. Use Google Map to find the coordinates you plan to place your Ameba. You can see in this example that the latitude is 24.7814033, and the longitude is 120.9933676

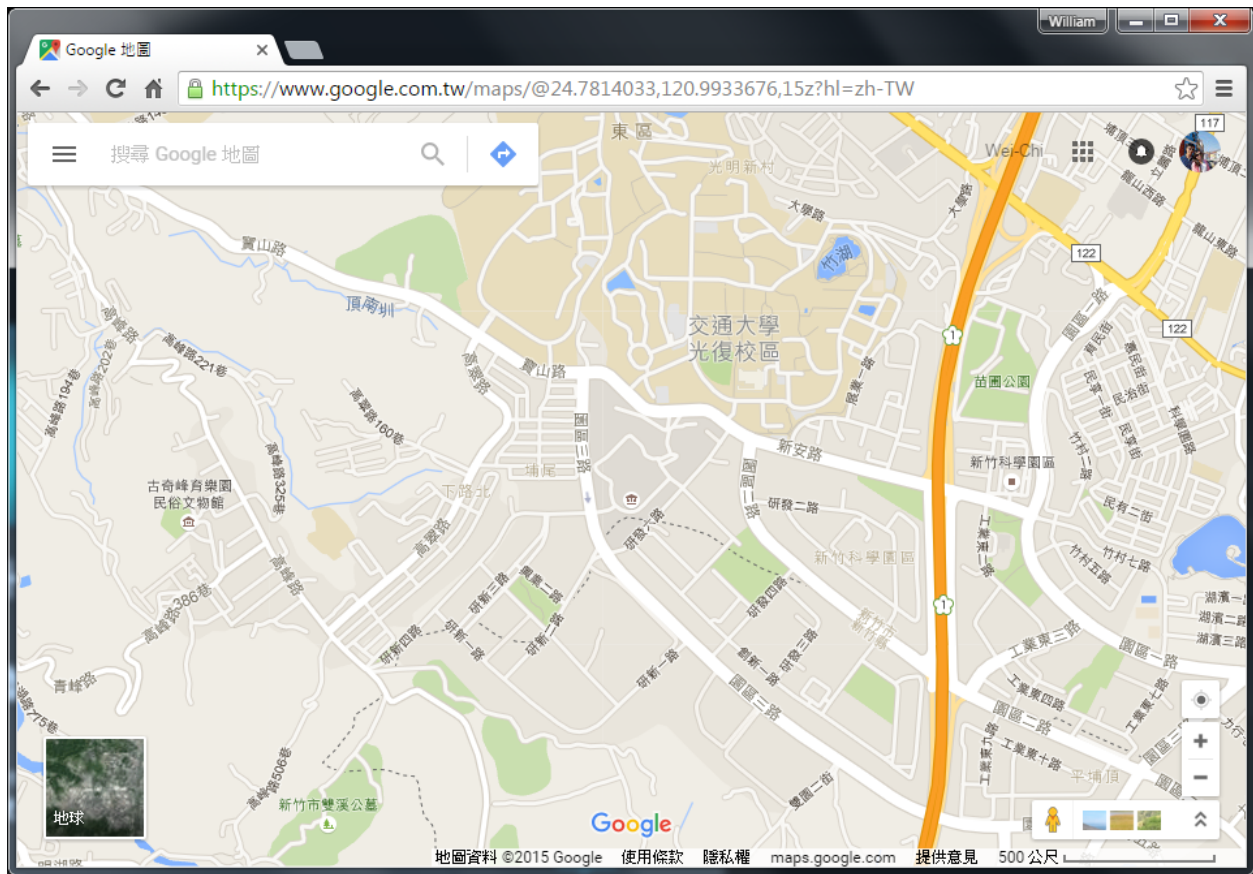

Fill in GPS info at `gps_lat` and `gps_lon`.

```


1  /*
2   This example demonstrate how to upload sensor data to MQTT server of LASS.
3   It include features:
4       (1) Connect to WiFi
5       (2) Retrieve NTP time with WiFiUDP
6       (3) Get PM 2.5 value from PMS3003 air condition sensor with UART
7       (4) Connect to MQTT server and try reconnect when disconnect
8
9   You can find more information at this site:
10
11      https://lass.hackpad.com/LASS-README-DtZ5T6DXLbu
12
13  */
14
15  #include <WiFi.h>
16  #include <PubSubClient.h>
17  #include <WiFiUDP.h>
18  #include <PMS3003.h>
19
20  char ssid[] = "yourNetwork"; // your network SSID (name)
21  char pass[] = "secretPassword"; // your network password
22  int keyIndex = 0; // your network key Index number (needed onl
23
24  char gps_lat[] = "24.7814033"; // device's gps latitude
25  char gps_lon[] = "120.9933676"; // device's gps longitude
26
27  char server[] = "gpssensor.ddns.net"; // the MQTT server of LASS
28  char clientId[17] = ""; // client id for MQTT
29  char outTopic[20] = "LASS/Test/PM25/live"; // MQTT publish topic
30

```


1 RTL8722DM/RTL8722CSM on COM6

Then connect sensors according to UART-PlanTower PMS3003 wiring example.


RTL8722DM / RTL8722CSM:

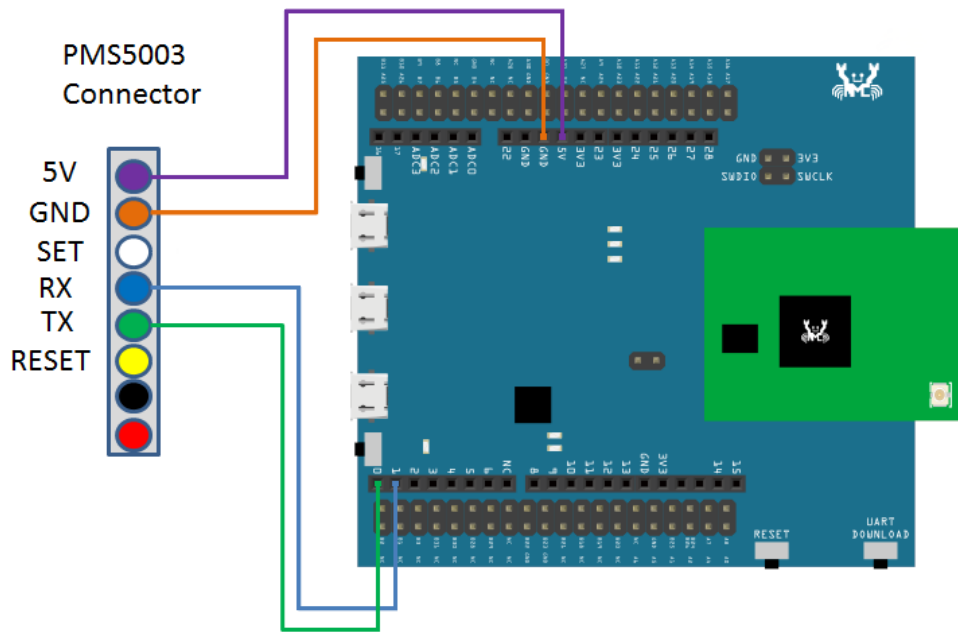

RTL8722DM MINI:

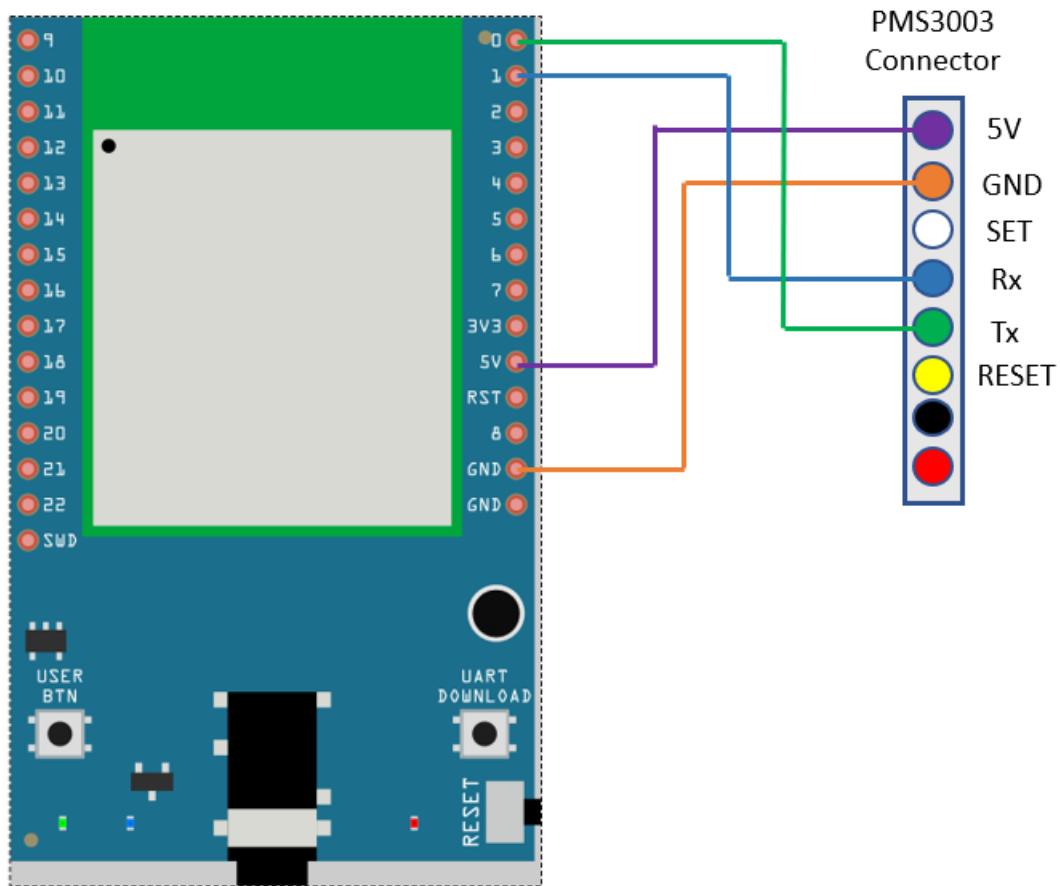


Compile the code and upload it to Ameba. After pressing the Reset button, Ameba will attempt to read PM2.5 data every minute and upload it to LASS MQTT-Broker. Open Serial Monitor to see the uploaded data, including client id, topic, and current PM2.5 status.

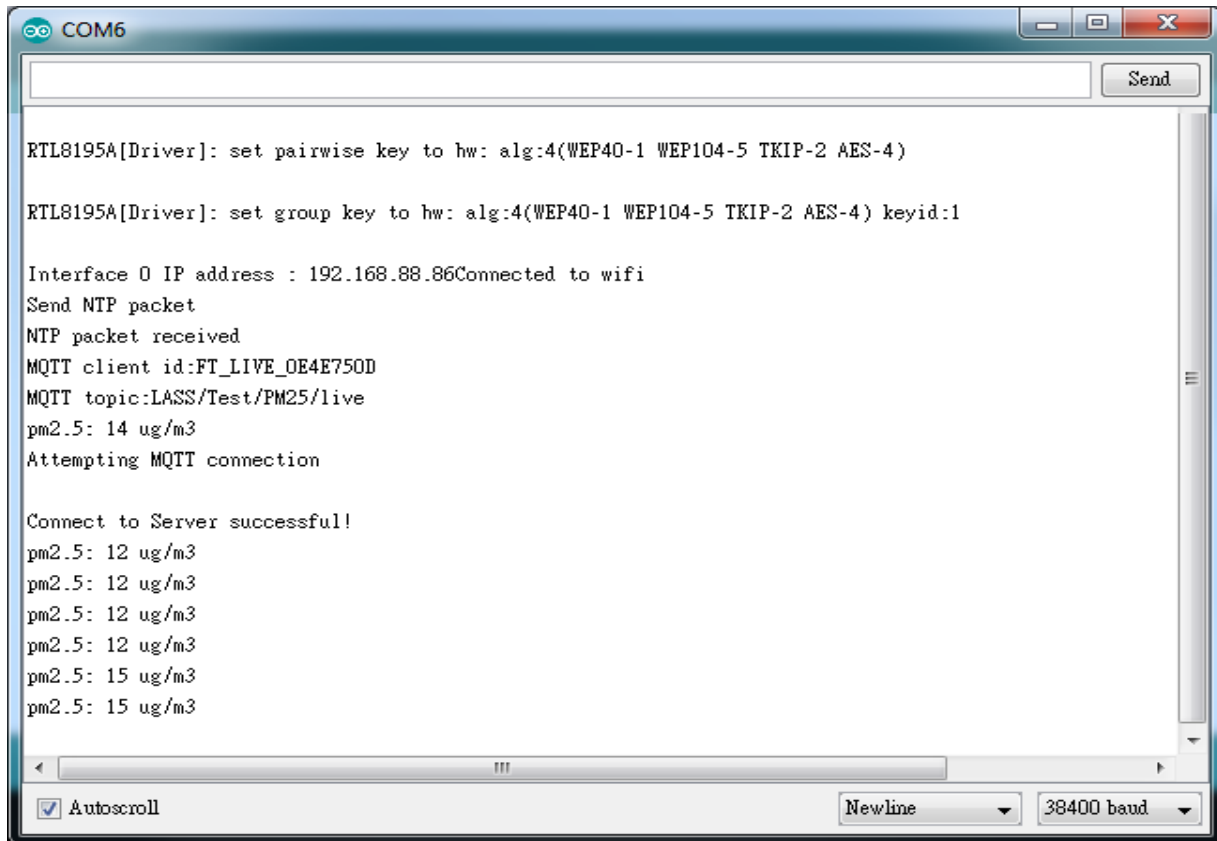

We can also use MQTTlens to verify if the data is properly uploaded.

Enter “gpssensor.ddns.net” as the MQTT-Broker server and “LASS/Test/PM25/live” as the subscribe topic to receive data.

The time uses UTC format, and the PM2.5 data stores in s-d0. In the figure, s_d0 = 9 represents that the PM2.5 is 9, meaning that the entire publish/subscribe process is working successfully.

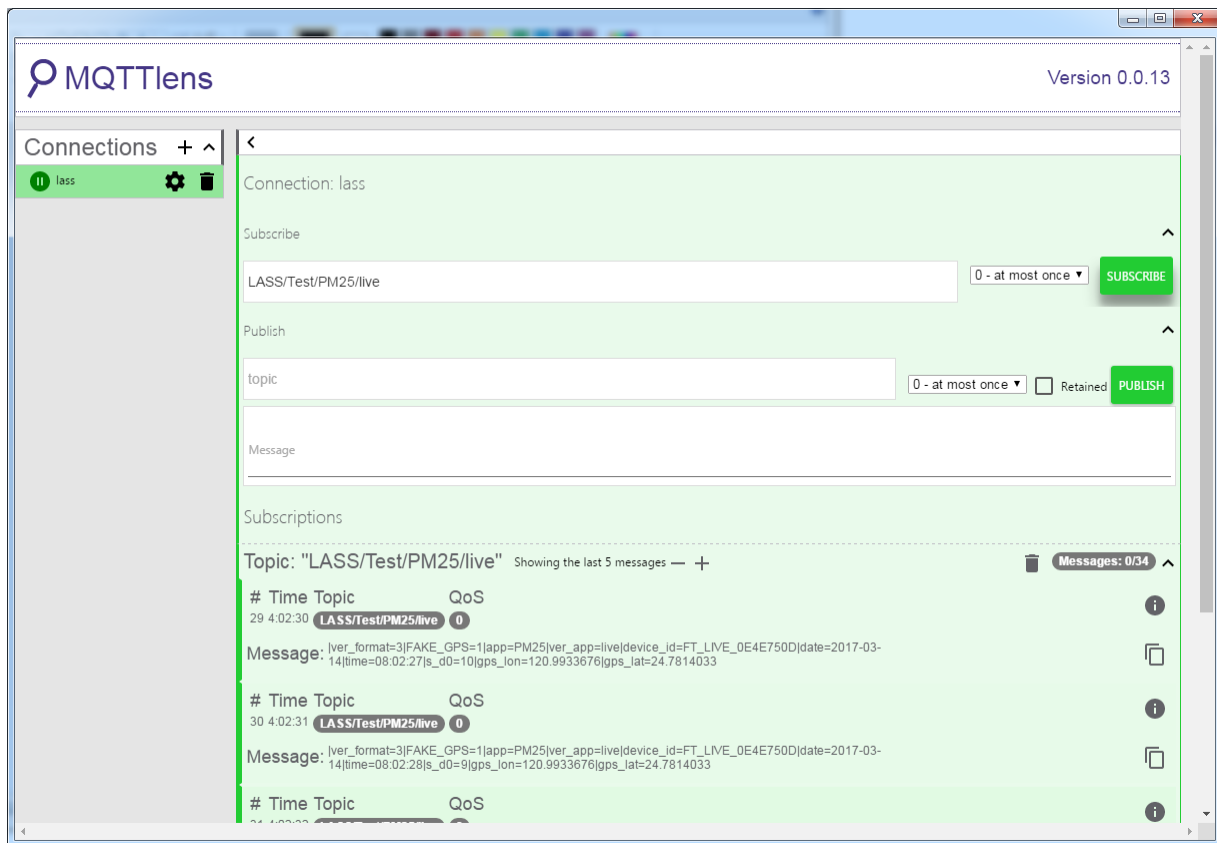

Ameba AP Mode

In AP mode, Ameba can accept at most 3 station connections, and can be set to open mode or WPA2 mode.


Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1

Example

In this example, we turn on the AP mode of Ameba and connect station to Ameba.

Open the WiFi AP example, “File” -> “Examples” -> “AmebaWiFi” -> “WiFiAPMode”

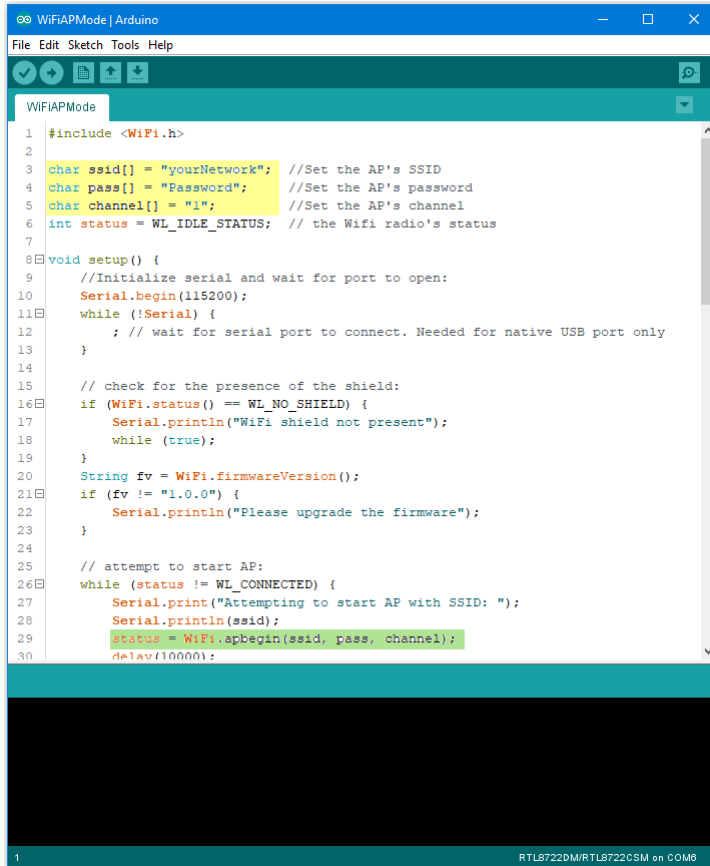

```
1 #include <WiFi.h>
2
3 char ssid[] = "yourNetwork"; //Set the AP's SSID
4 char pass[] = "Password"; //Set the AP's password
5 char channel[] = "1"; //Set the AP's channel
6 int status = WL_IDLE_STATUS; // the Wifi radio's status
7
8 void setup() {
9     //Initialize serial and wait for port to open:
10    Serial.begin(115200);
11    while (!Serial) {
12        ; // wait for serial port to connect. Needed for native USB port only
13    }
14
15    // check for the presence of the shield:
16    if (WiFi.status() == WL_NO_SHIELD) {
17        Serial.println("WiFi shield not present");
18        while (true);
19    }
20    String fw = WiFi.firmwareVersion();
21    if (fw != "1.0.0") {
22        Serial.println("Please upgrade the firmware");
23    }
24
25    // attempt to start AP:
26    while (status != WL_CONNECTED) {
27        Serial.print("Attempting to start AP with SSID: ");
28        Serial.println(ssid);
29        status = WiFi.softAPSecure(ssid, pass, channel);
30        delay(10000);
31    }
```


In the highlighted code snippet, fill in your SSID, PASSWORD and CHANNEL.

The code highlighted in green is the API we used to turn on the AP mode in security mode.

If you want to turn on the AP mode in open mode, please modify the code to

```
status = WiFi.softAP(ssid, channel);
```

Then upload the sample code and press reset, and you can see related information shown in serial monitor.

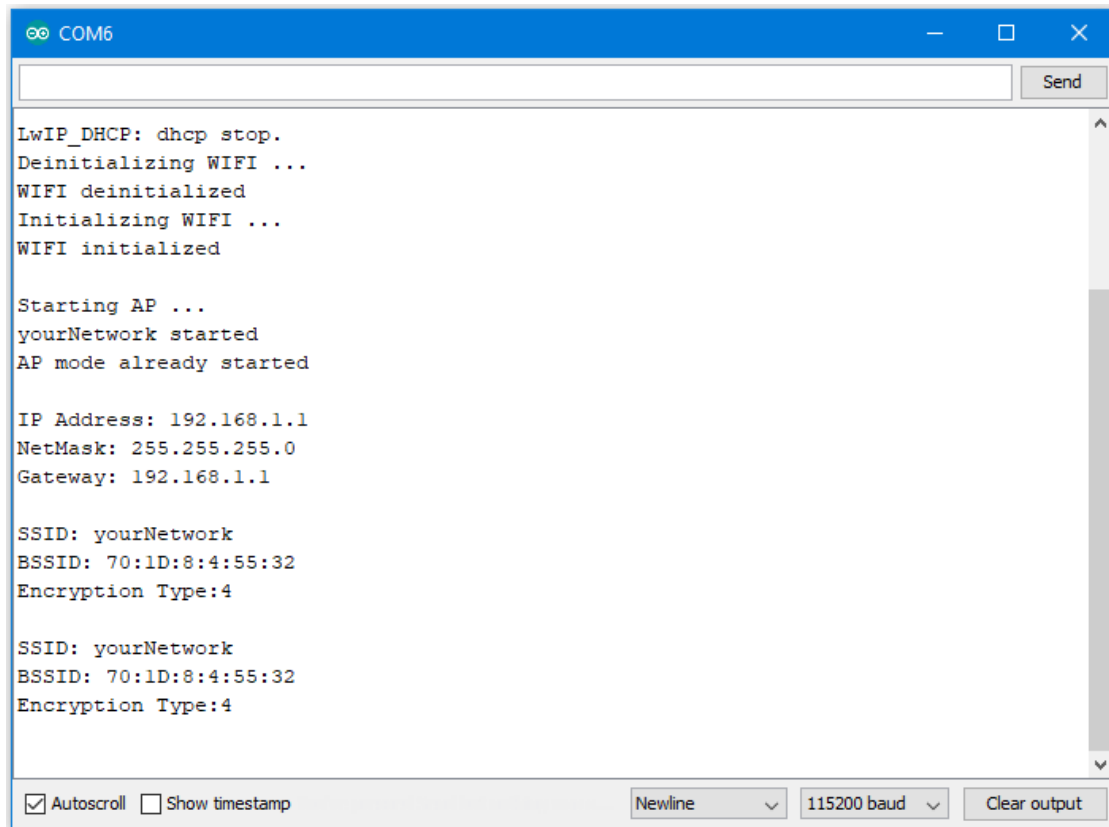

```
COM6
LwIP_DHCP: dhcp stop.
Deinitializing WIFI ...
WIFI deinitialized
Initializing WIFI ...
WIFI initialized

Starting AP ...
yourNetwork started
AP mode already started


IP Address: 192.168.1.1
NetMask: 255.255.255.0
Gateway: 192.168.1.1

SSID: yourNetwork
BSSID: 70:1D:8:4:55:32
Encryption Type:4


SSID: yourNetwork
BSSID: 70:1D:8:4:55:32
Encryption Type:4
```

Autoscroll ☒ Show timestamp Newline 115200 baud Clear output

In the figure below, we show the messages shown in serial monitor when two stations connect to Ameba AP in open mode:

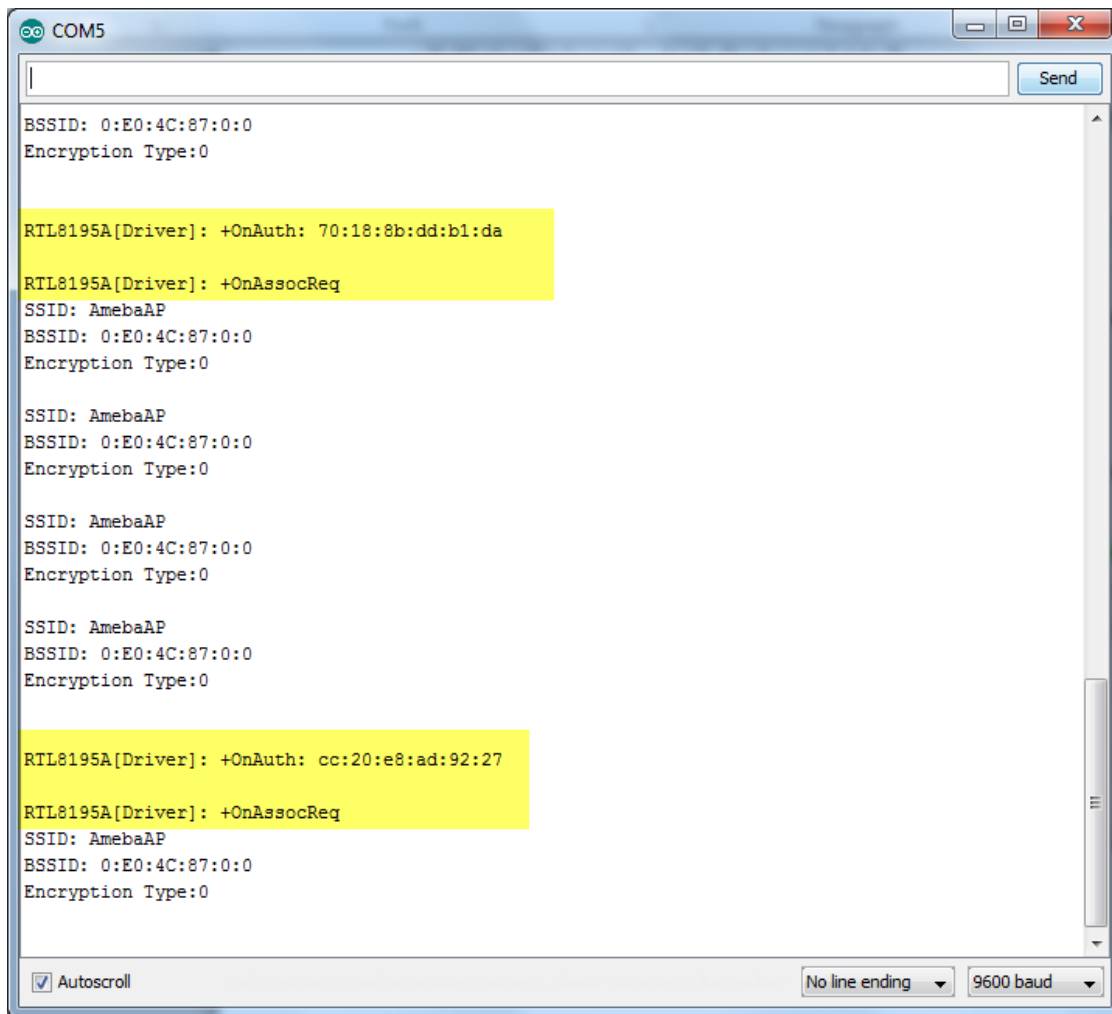

In the figure below, we show the messages shown in serial monitor when a station connects to Ameba AP in security mode:

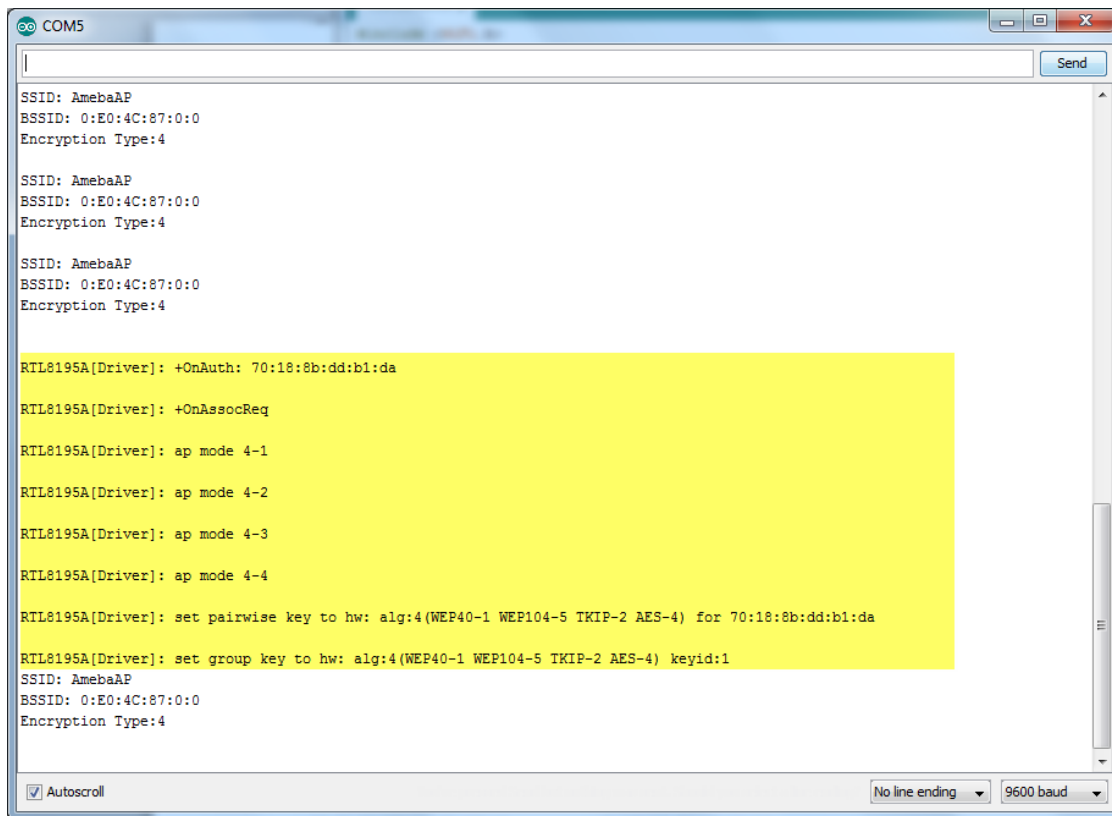

Use mDNS To Let Arduino IDE Find Ameba

Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1

Example

mDNS (Multicast DNS) is a protocol used in the local area network. It delivers the network information like IP address and provided services to others. mDNS is based on the UDP protocol, and it sends packets to 224.0.0.251 with port 5353 under IPv4 address. The naming style for the service follows the format: **{Instance Name}.{Protocol Name}.{Domain}**

- Instance Name: used to identify the name of the service
- Protocol Name: Divided into two parts, the front end is in regard to the name of the service, and it adds baseline as a prefix. The rear end is in regard to the transport protocol name it used, and it also adds baseline as a prefix
- Domain: Local area network in normal cases

For example, Arduino IDE adopts the naming for the mDNS service which is used in OTA as


following: **MyAmeba._arduino._tcp.local**

Among the naming example, “MyAmeba” can identify the Ameba device name and the name “MyAmeba” is changeable. “_arduino._tcp” is the protocol that Arduino IDE adopts, and the Domain is set as local in common.

Open the example, “File” -> “Examples” -> “AmebaMDNS” -> “mdns_on_arduino_ide”

You need to input ssid and password of the AP because the example will use WiFi connection.

And you can find out the naming of the service at the place where it declares MDNS Service. The example uses the default name “MyAmeba” and the name is changeable.

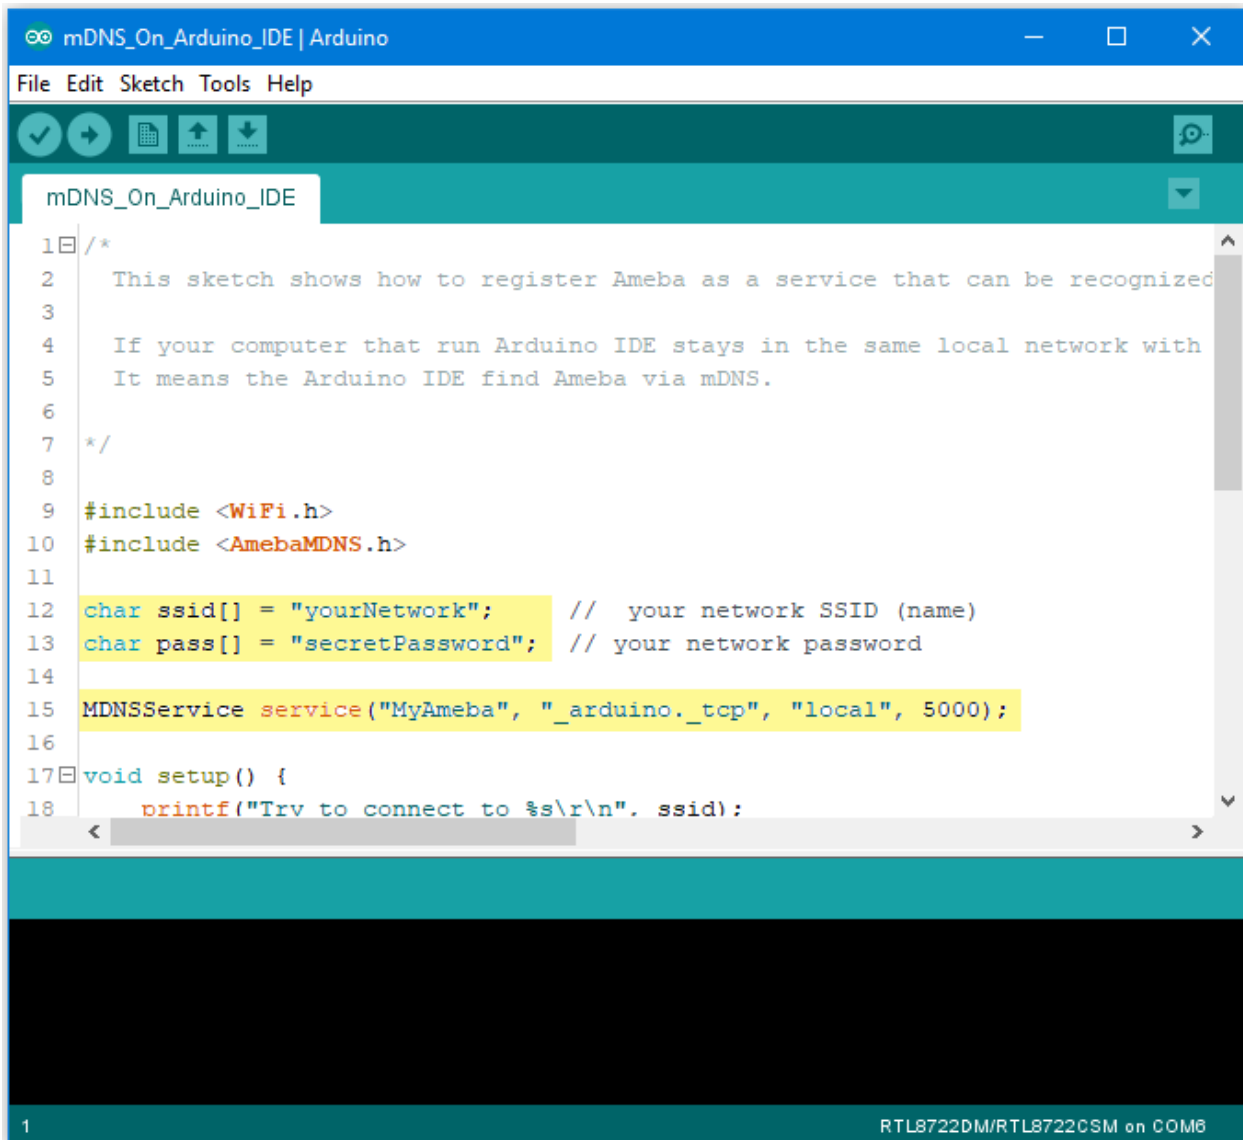


```


1  /*
2   This sketch shows how to register Ameba as a service that can be recognized
3
4   If your computer that run Arduino IDE stays in the same local network with
5   It means the Arduino IDE find Ameba via mDNS.
6
7  */
8
9  #include <WiFi.h>
10 #include <AmebaMDNS.h>
11
12 char ssid[] = "yourNetwork"; // your network SSID (name)
13 char pass[] = "secretPassword"; // your network password
14
15 MDNSService service("MyAmeba", "_arduino._tcp", "local", 5000);
16
17 void setup() {
18   printf("Try to connect to %s\r\n", ssid);

```

Next, go to (“Tools” -> “Port”), and you can find out at least one Serial Port. This port is simulated by Ameba board via USB. Choose this port and upload the compiled code to

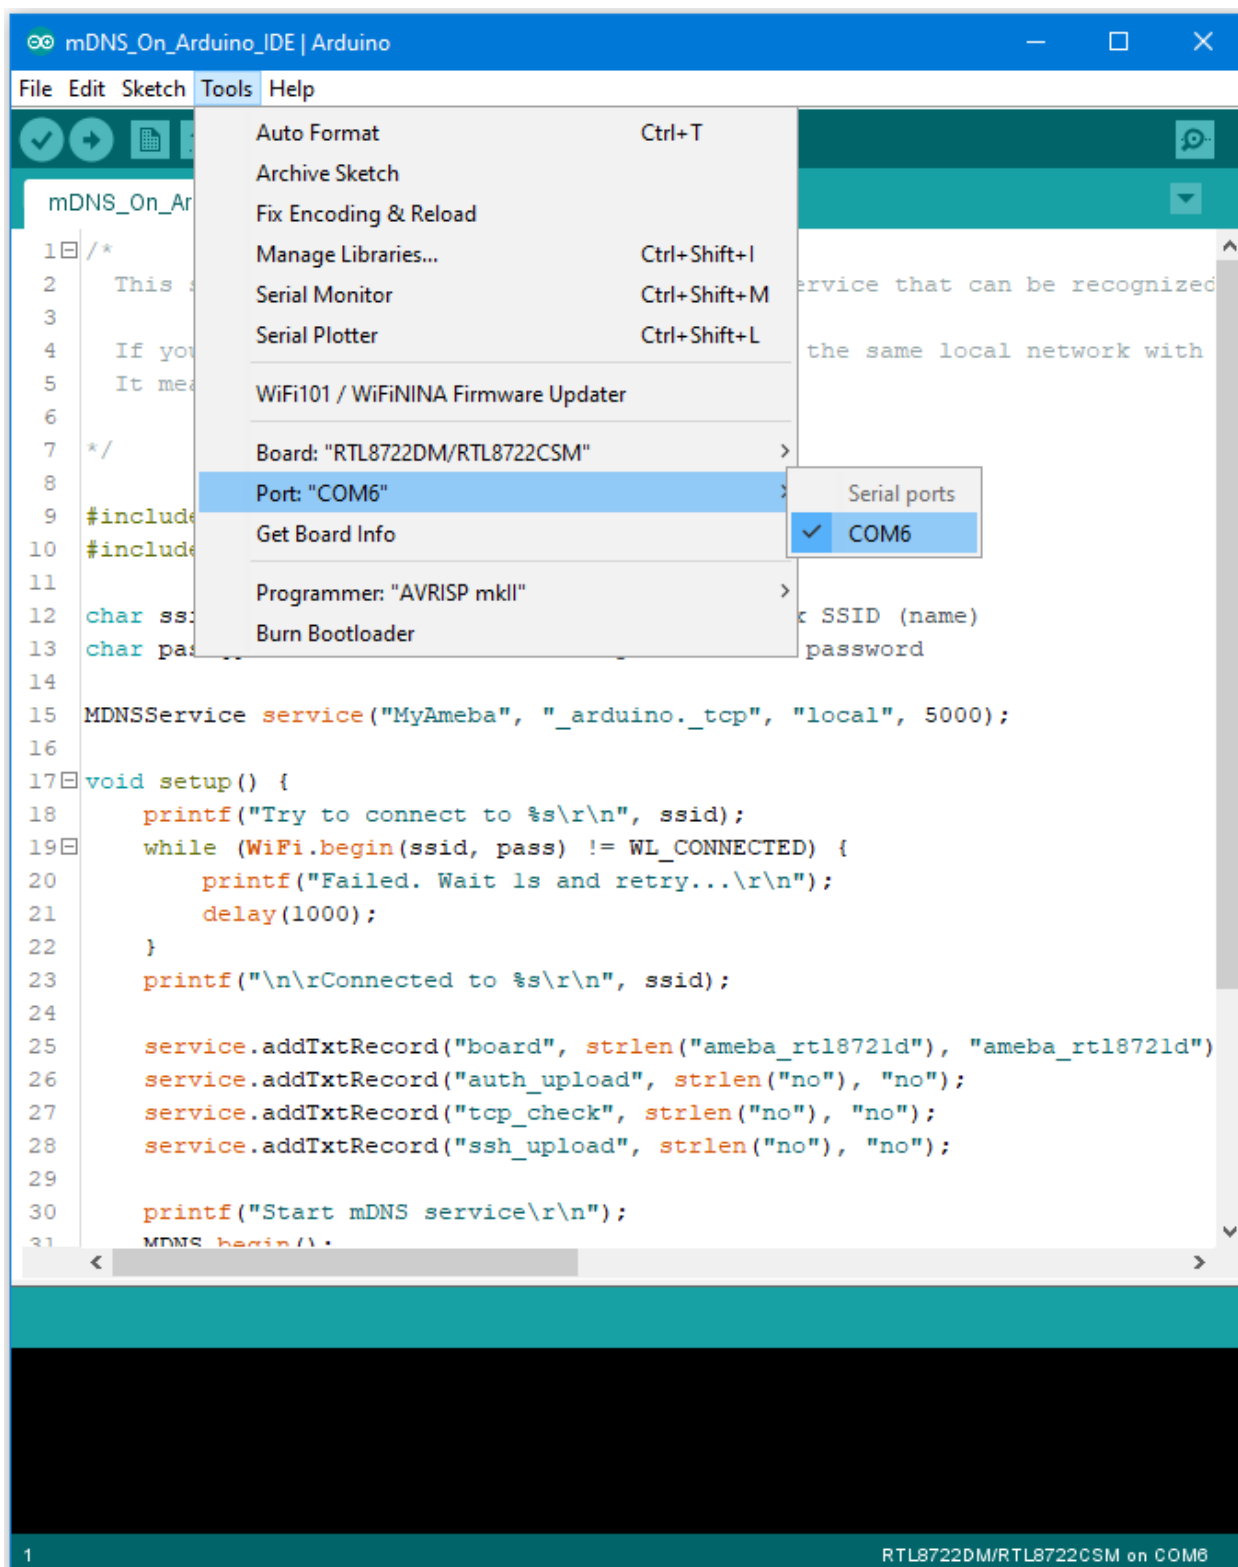

After uploading the code, press the reset button on Ameba and waiting for Ameba to connect with AP and activate the mDNS service after a while. You can see the Log at the bottom of the Serial Monitor.

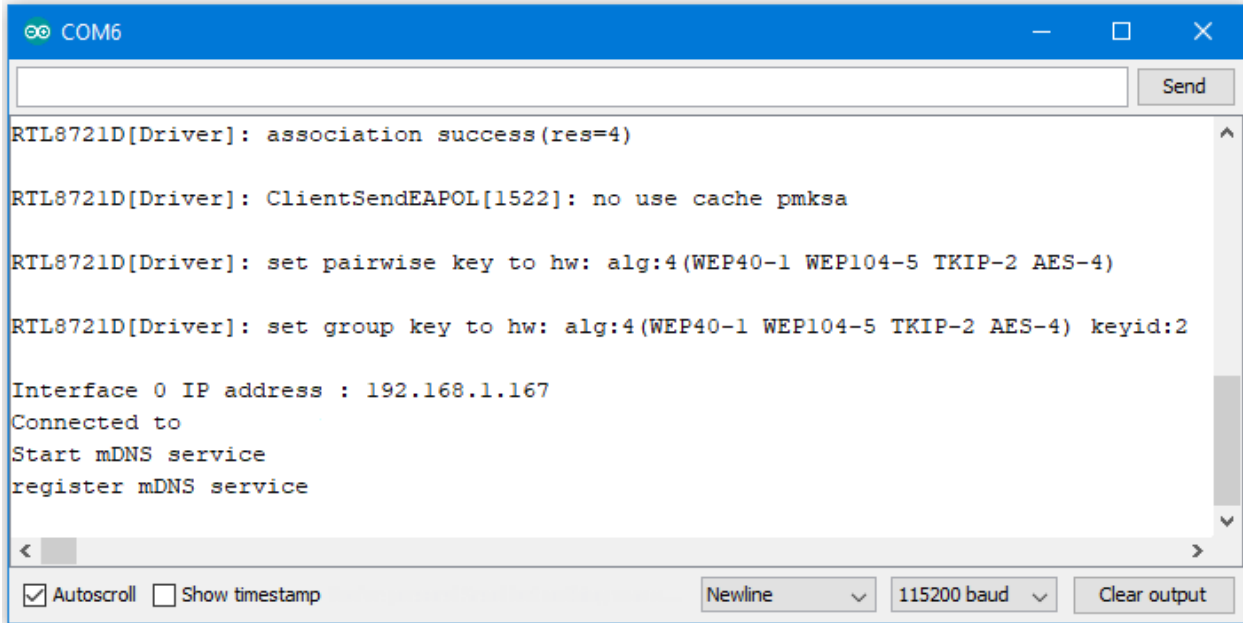

```
RTL8721D[Driver]: association success(res=4)

RTL8721D[Driver]: ClientSendEAPOL[1522]: no use cache pmksa


RTL8721D[Driver]: set pairwise key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4)

RTL8721D[Driver]: set group key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4) keyid:2

Interface 0 IP address : 192.168.1.167
Connected to
Start mDNS service
register mDNS service
```

The screenshot shows a serial monitor window with a blue title bar labeled 'COM6'. It features a text input field at the top with a 'Send' button. The main area displays a series of log messages from the RTL8721D driver, including association success, EAPOL client send, and key setting. It also shows network interface information: 'Interface 0 IP address : 192.168.1.167', 'Connected to', 'Start mDNS service', and 'register mDNS service'. At the bottom, there are controls for 'Autoscroll' (checked), 'Show timestamp' (unchecked), a 'Newline' dropdown, a '115200 baud' dropdown, and a 'Clear output' button.

Then you can find out the added item “Network Ports” “**MyAmeba at 192.168.1.167 (Ameba RTL8722DM/RTL8722CSM)**”, “MyAmeba” is the device name we set up, and “IP” is the IP address that AP assigned to Ameba, the IP address should be the same with the IP shown in the Serial Monitor. Last, “Ameba RTL8722DM/RTL8722CSM” is the type name of the board, and it means that Ameba can let Arduino IDE identify the mDNS service successfully.(We still can not use the Internet to upload the code, and we will explain this part in the OTA exam-

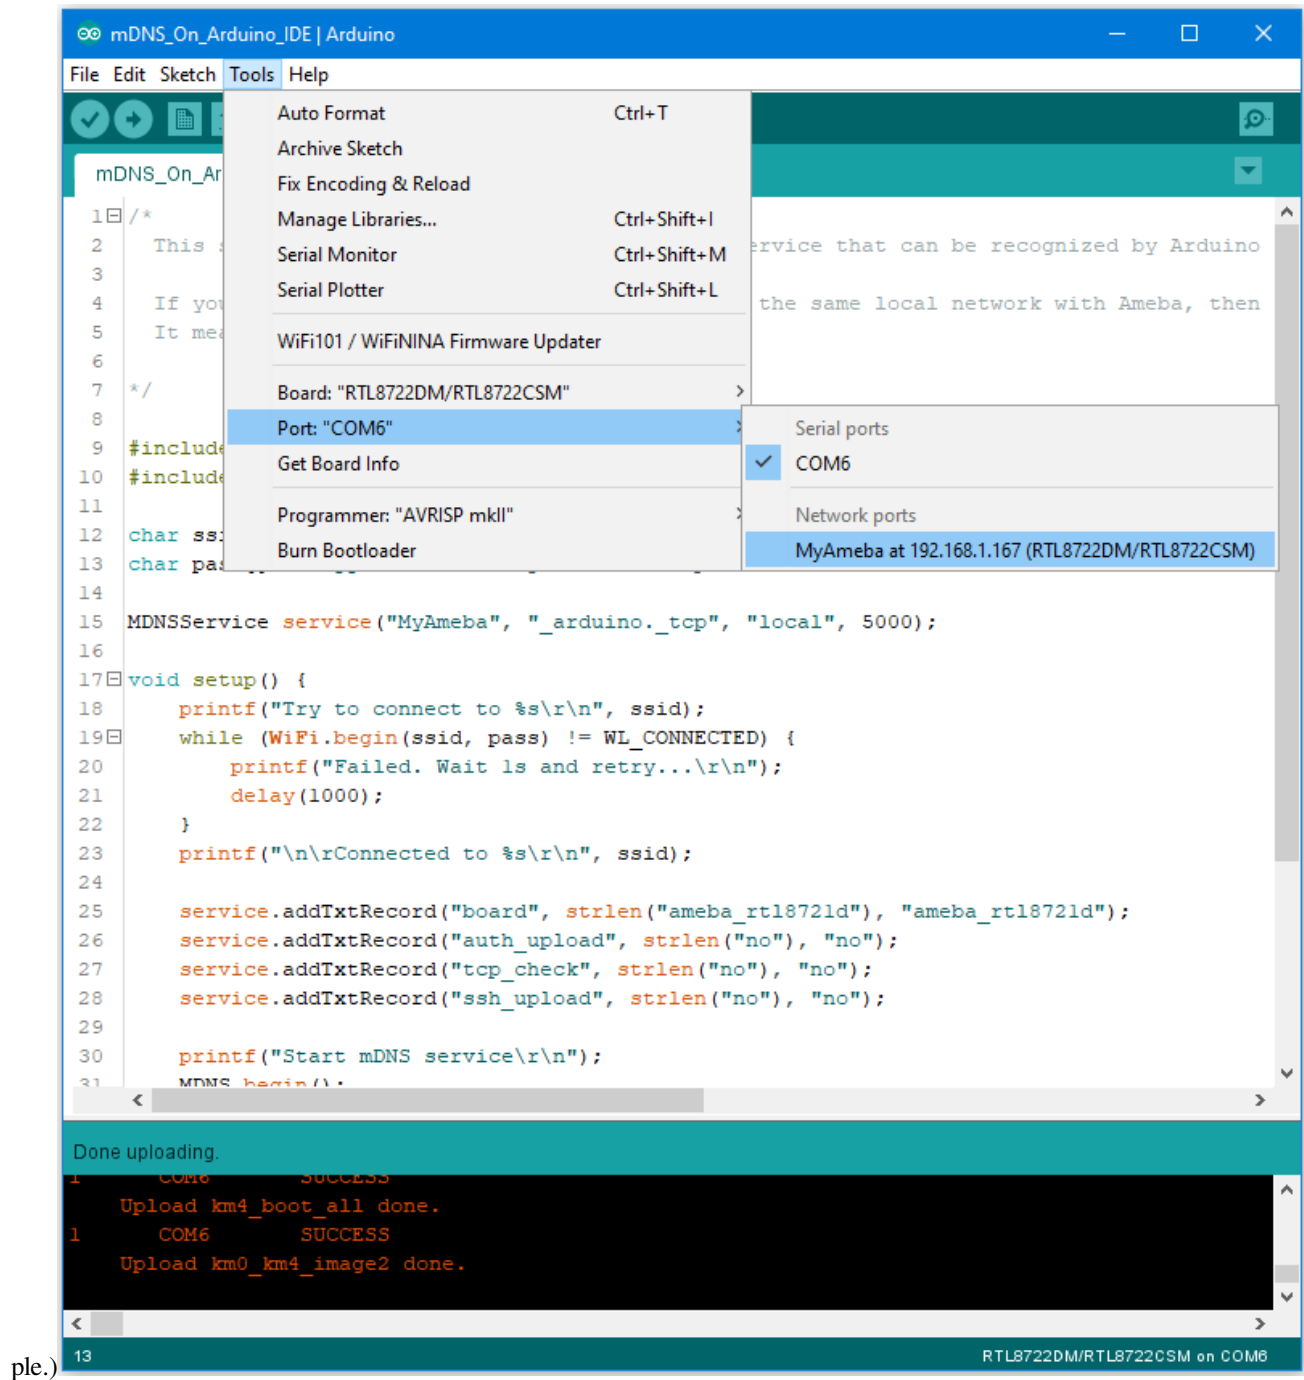

ple.)

If you cannot find the Network ports on your Arduino IDE, please check:

- Does your computer in the same local area network with the Ameba?
- Restart the Arduino IDE, and it will find the mDNS service again
- Check the Log in Serial Monitor if the Ameba connects to the AP and activate mDNS service successfully

Code Reference

The program set up the mDNS service in the beginning, the first parameter is Instance Name, and it is changeable in this example. The second parameter is the protocol that the service used, and it would be “_arduino._tcp” for Arduino IDE. The third parameter is Domain, and it would be “local” in common. The fourth parameter is the port number for the service, it is 5000 here and we doesn’ t use it in the example.

```
MDNSService service("MyAmeba", "_arduino._tcp", "local", 5000);
```

After connected to the network, we set up some text fields for the service. For the following example, “board” is the name of the field, “ameba_rtl8721d” is the value of the field. “board” is used to let Arduino IDE check installed SDK to see if it exists known device or not. We will use the name of the device if there is known device, users can change “ameba_rtl8721d” to “yun” or other names to find out what’ s the difference if interested.

```
service.addTxtRecord("board", strlen("ameba_rtl8721d"), "ameba_rtl8721d");
```

Then we add three text fields “auth_upload” , “tcp_check” , and “ssh_upload” , this example does not activate these services.

```
service.addTxtRecord("auth_upload", strlen("no"), "no");
service.addTxtRecord("tcp_check", strlen("no"), "no");
service.addTxtRecord("ssh_upload", strlen("no"), "no");
```

Next we activate MDNS

```
MDNS.begin();
```

and register to the mDNS service.

```
MDNS.registerService(service);
```

Use Firebase To Push Messaging Services

Preparation


- Ameba x 1
- Android Studio
- Smart phone with Google Play Service x 1

Example

In the era of the popularity of smart phones, people often receive reminders from specific apps. In this example, we will teach how to use Google Firebase to send messages from the Ameba Client to mobile phones.

First, we use Firebase Cloud Messaging (FCM) as a cross-platform messaging solution that lets you deliver messages for free and reliably.

With FCM, you can notify your client application (App) to sync emails or other data. You can send a message to drive user engagement. For instant messaging content, a message can transfer up to 4KB of payload to the client application.

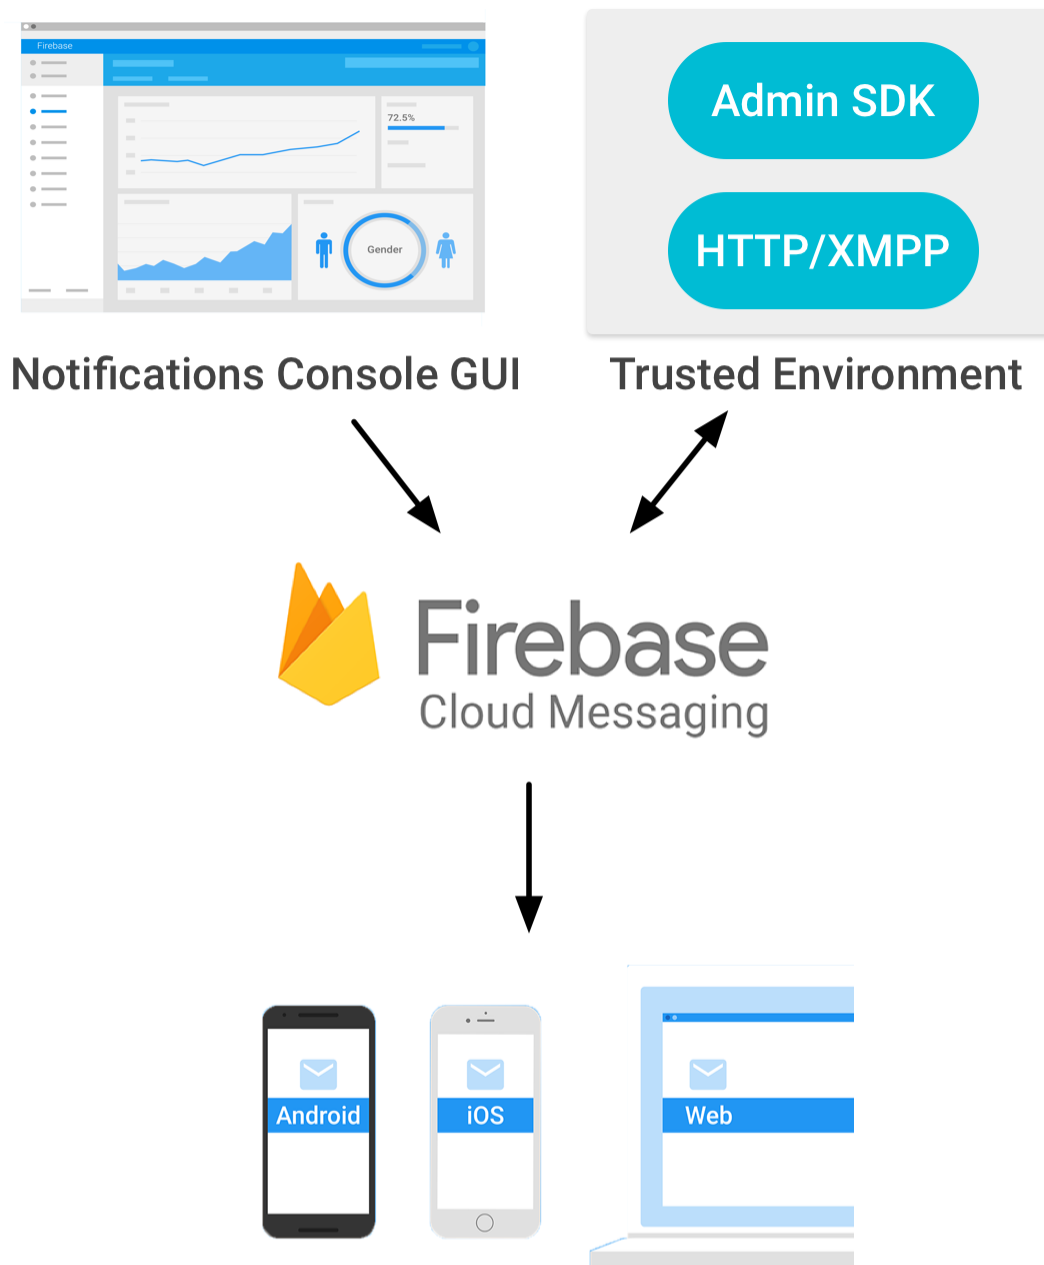

The FCM implementation includes two main parts for sending and receiving:

1. A trusted environment, such as Cloud Functions for Firebase or an application server for building, locating, and sending messages.
2. Receive iOS, Android or Web (JavaScript) client applications for messages.

You can use [Admin SDK](#) or [HTTP&XMPP API](#) to send messages. To test or send marketing or engagement messages with powerful built-in targeting and analytics, you can also use [Notifications composer](#)

We know that Ameba can send messages to specific apps as long as it implements the http client function.

First of all, we must first set up an environment for developing Android apps. Please download Android Studio first on Android official website.

<https://developer.android.com/studio/install>

Then we can use the Android example provided by Firebase to download Firebase Quickstart Samples.


<https://github.com/firebase/quickstart-android>

Open Android Studio and click on Import Project, select the messaging project in Firebase Quickstart Samples. Since we won't use other functions, we can only choose the messaging project.


Android Studio will need to install the SDK and Google repository for the first time to start the messaging project. You can refer to the following page for update.

<https://developer.android.com/studio/intro/update>


Wait until the required components for compiling the app are installed, you can open the messaging project, and Android Studio comes with the Firebase registration function.

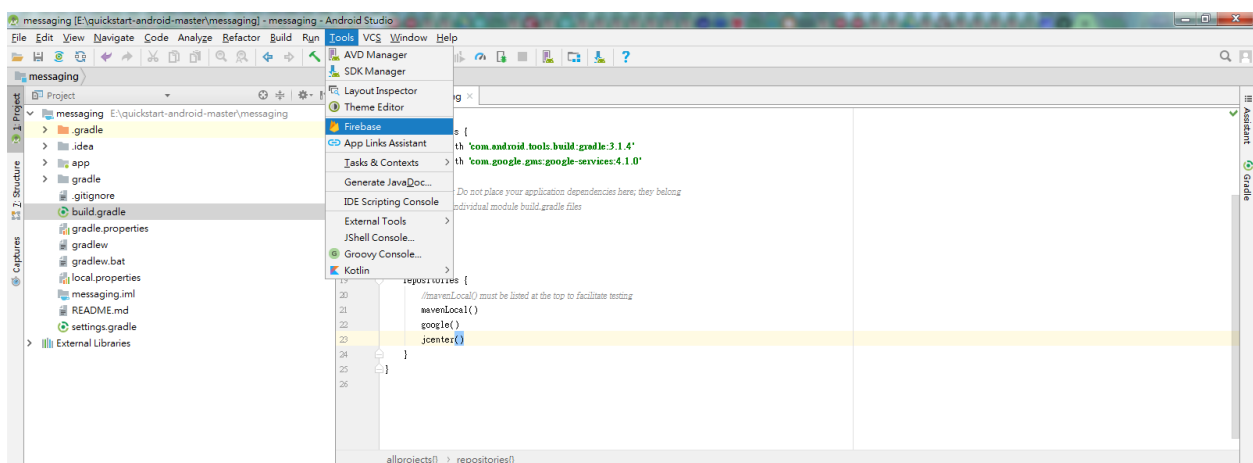


As shown above, open the toolbar and click Tools->Select Firebase.

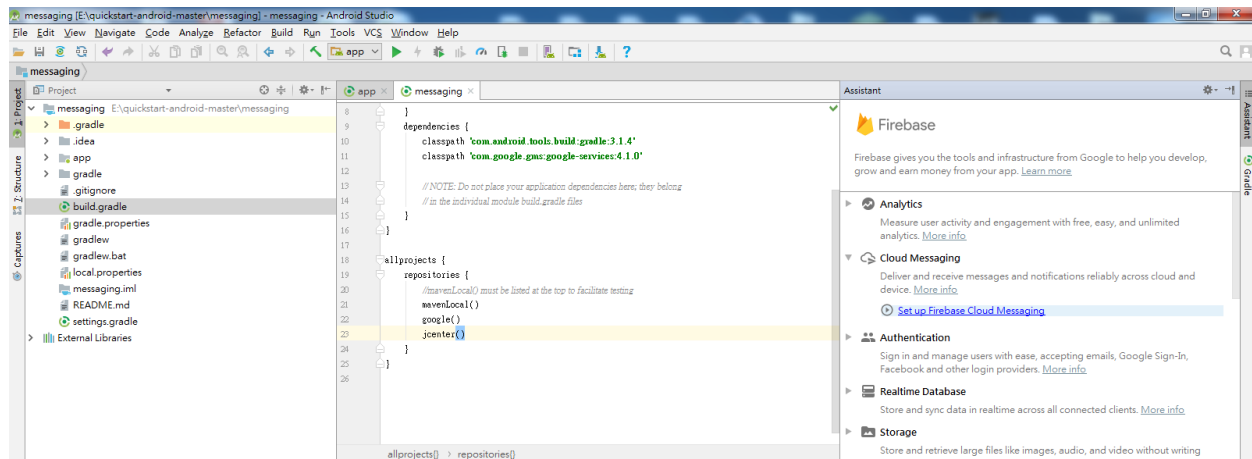


Open Firebase Assistant in the right pane, then see Cloud Messaging, select Set up Firebase Cloud Messaging to start the registration process.

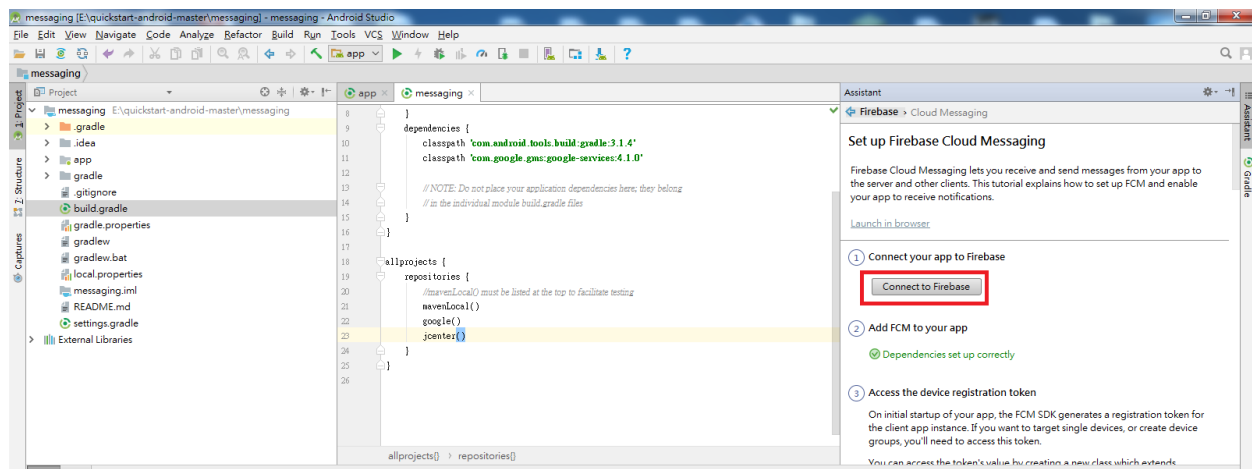


Click Connect to Firebase




Then bring out the page, and click on Firebase on the left and log in to the Gmail account. Once you log in, you will be taken to the Firebase homepage.

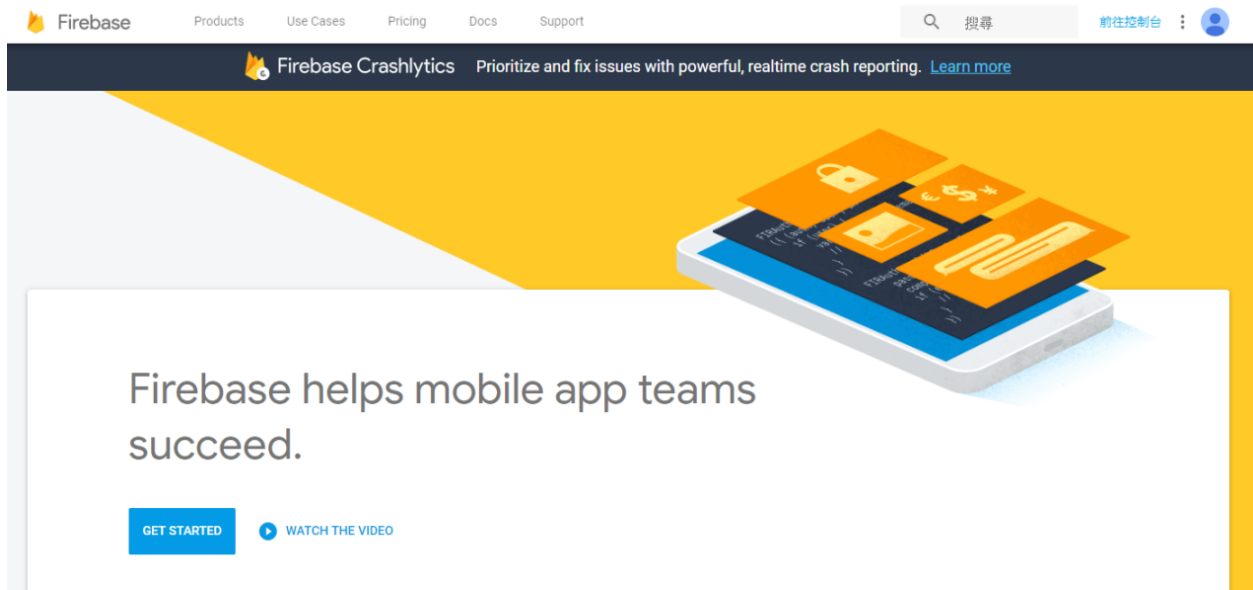

Let's keep the homepage first, we need to go to the Firebase Console and go back to Android Studio.

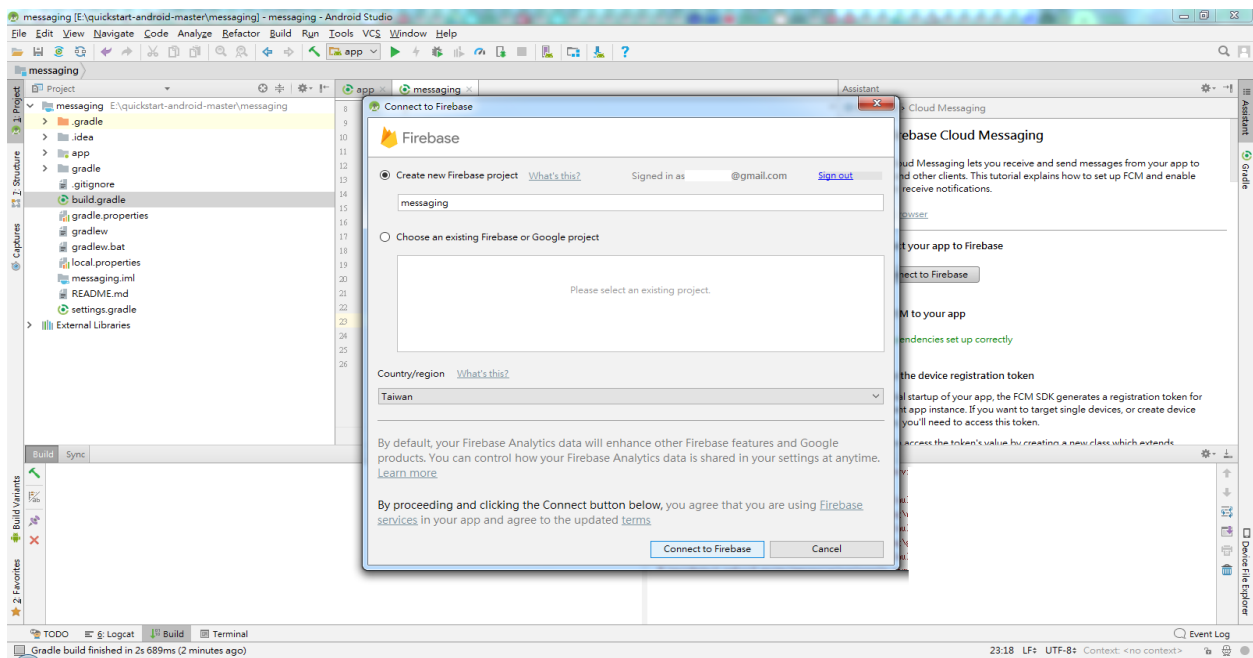


We can see that when the webpage is successfully logged in, Android Studio also brings up the login information dialog box, click connect to Firebase

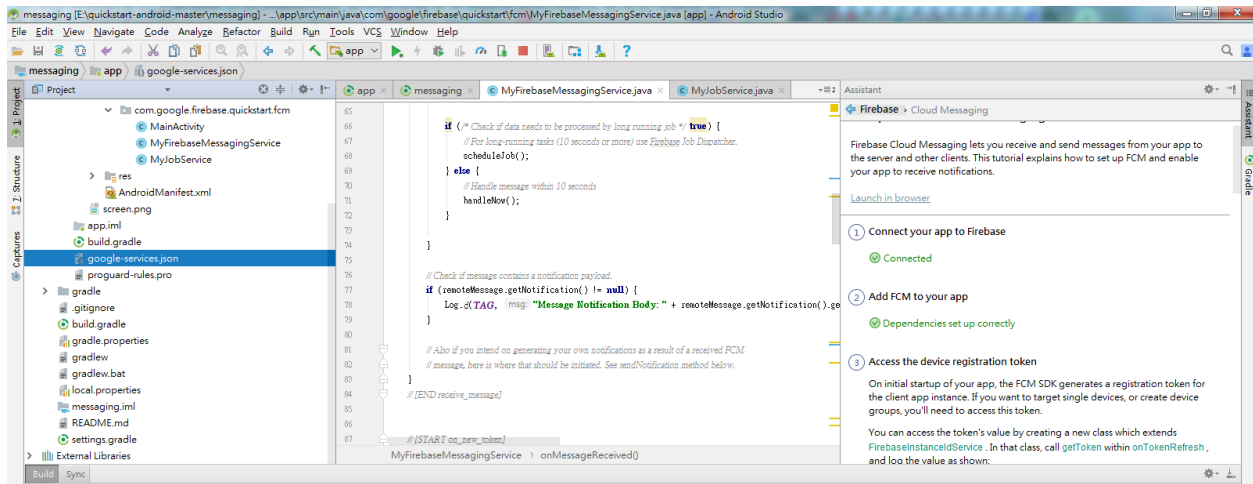


You can see Dependencies set up correctly in the right pane and see a google-service.json file in the left pane, indicating that the app has been registered successfully.

At this point, you can connect your phone to your computer (press Shift+F10) or press the Runs App in the toolbar. Please note here that Firebase requires a mobile phone to provide Google play service (GPS) service. An example of not being able to use Firebase without installing Google Play.

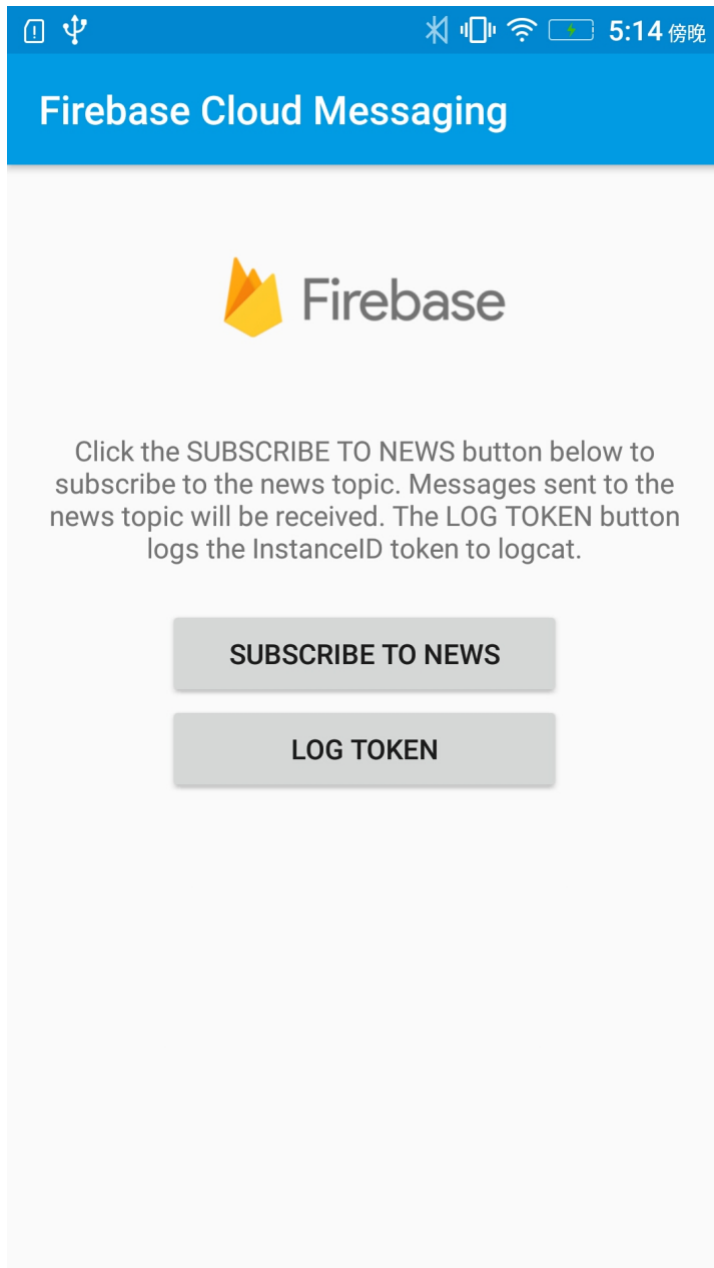


As shown above, the messaging app is installed and executed successfully on the phone. Click LOG TOKEN at this time.

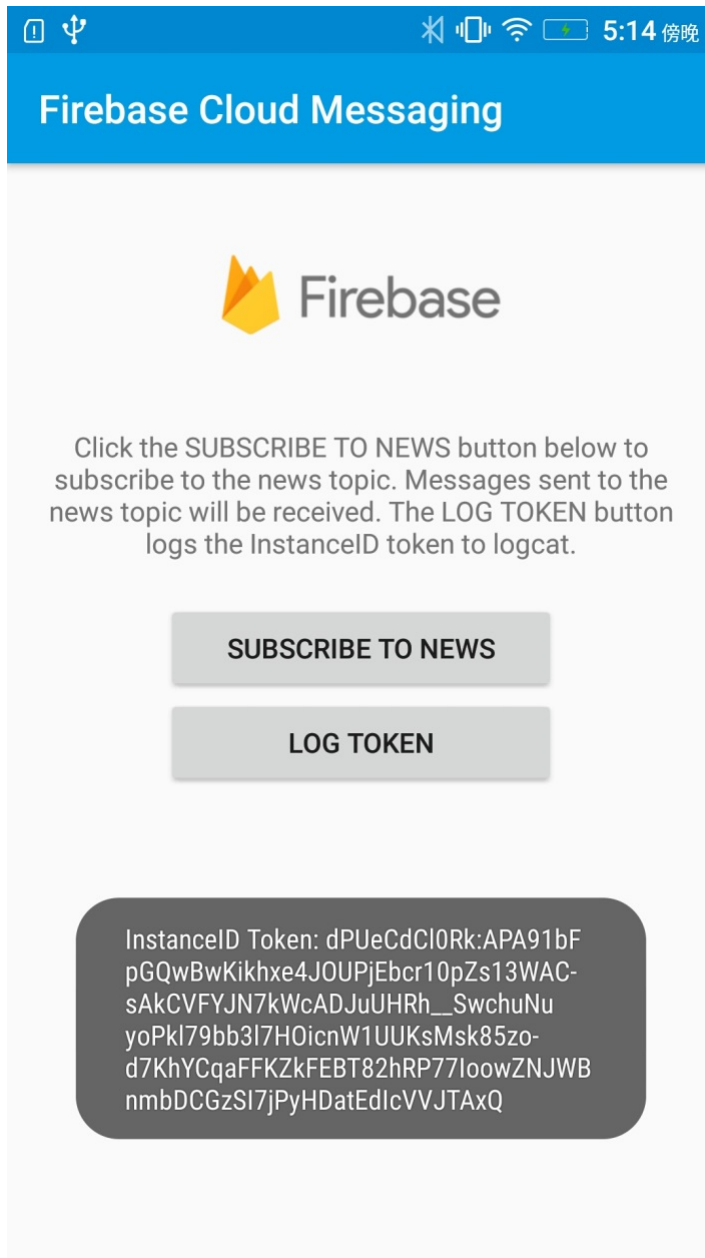


There will be a Token ID, which is the Access Token required to send the message, representing the ID of the FCM service APP installed on a particular phone. This ID is unique and will be reassigned when the app is removed and re-installed. It means that the message can be sent to a specific phone. The FCM service can also push messages to a NEWS (Topic). This section can be found in Firebase topic-messaging:

<https://firebase.google.com/docs/cloud-messaging/android/topic-messaging>


Therefore, we need to save this Access Token, return to Android Studio as shown below, select Debug at the log level of the Logcat. When you press the LOG TOKEN button on the App, Logcat will print out the Access Token ID. We will save the code after the InstanceID Token: in the Log message.

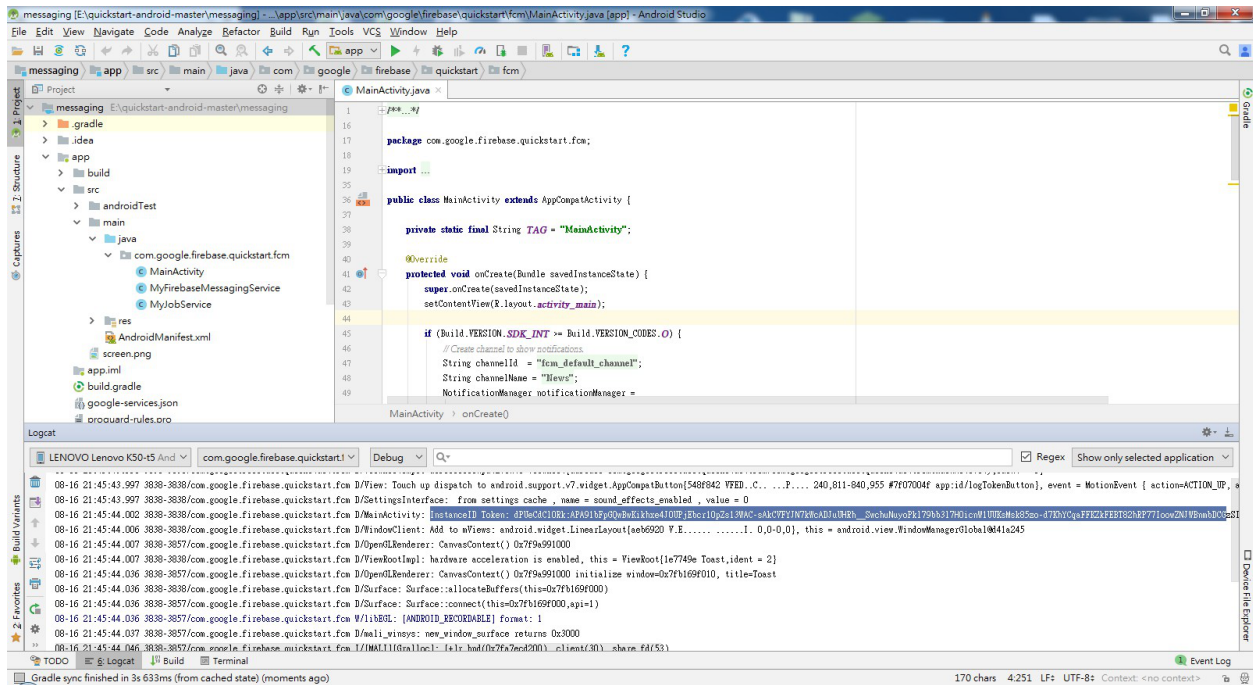


Then we have to go back to the page that was brought when we first logged into Firebase.

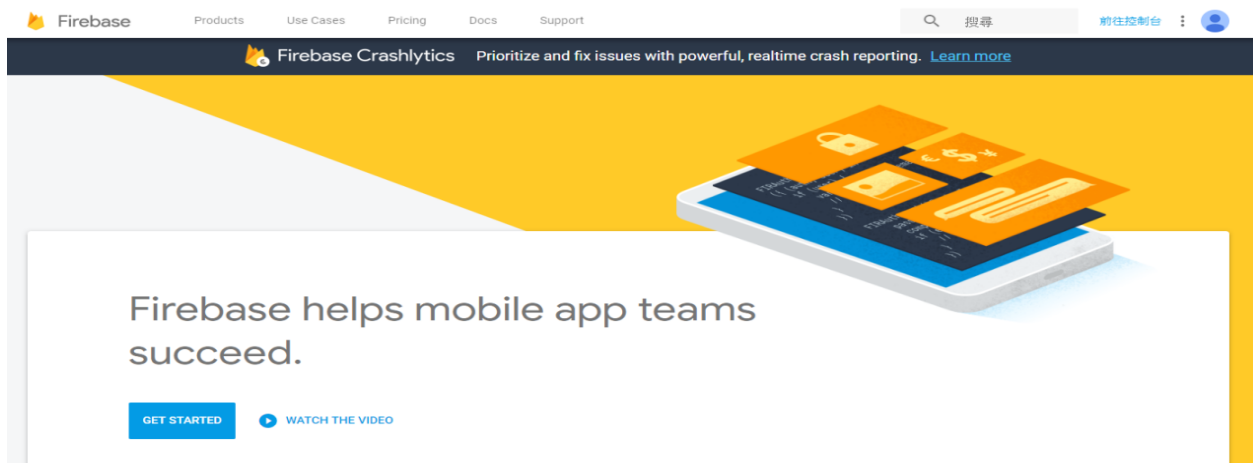


Click in the upper right corner to go to the console

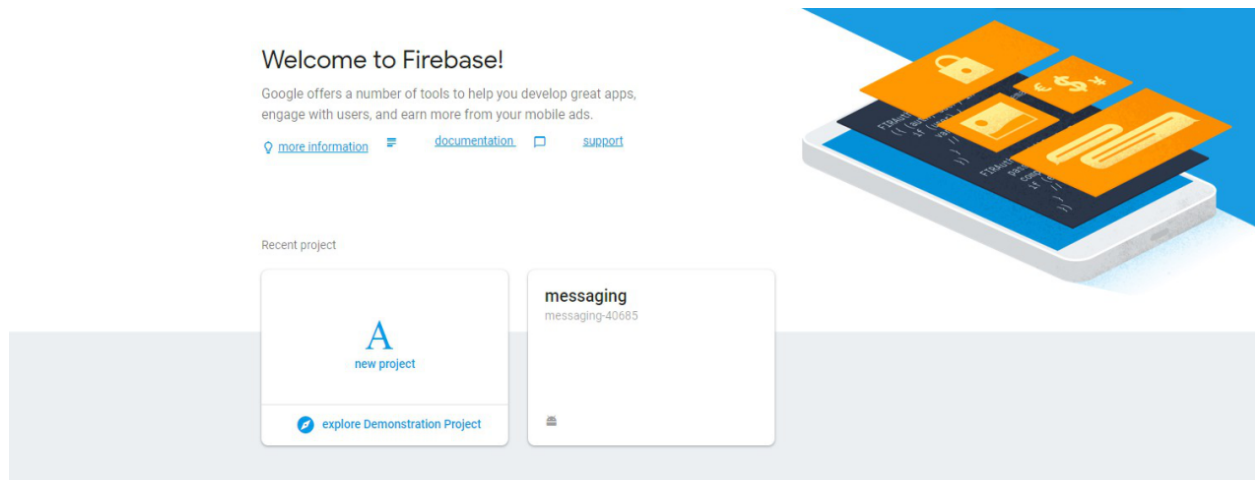


At this point, You can see that Android Studio has just built the messaging project for us in the operation.

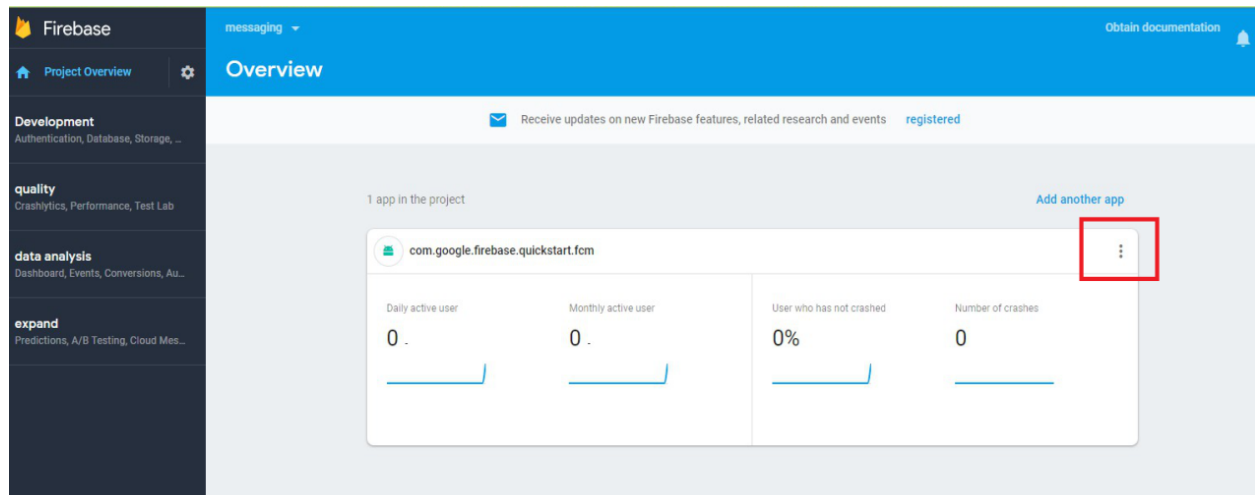

Click to enter the messaging project with settings page, as shown above.

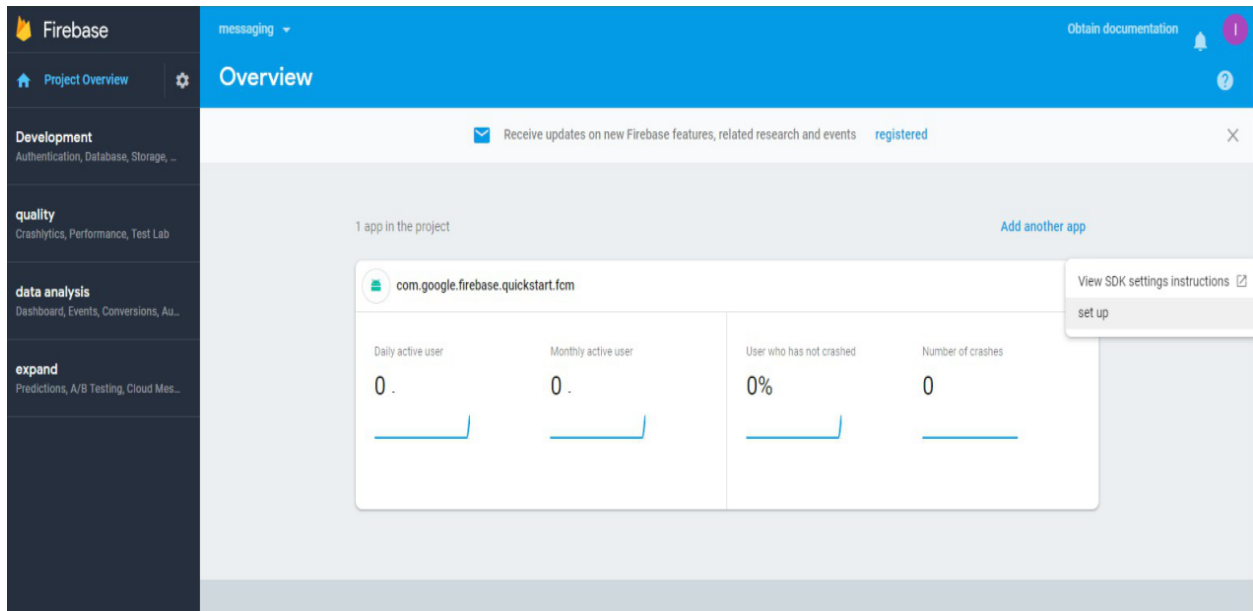


Select Set up

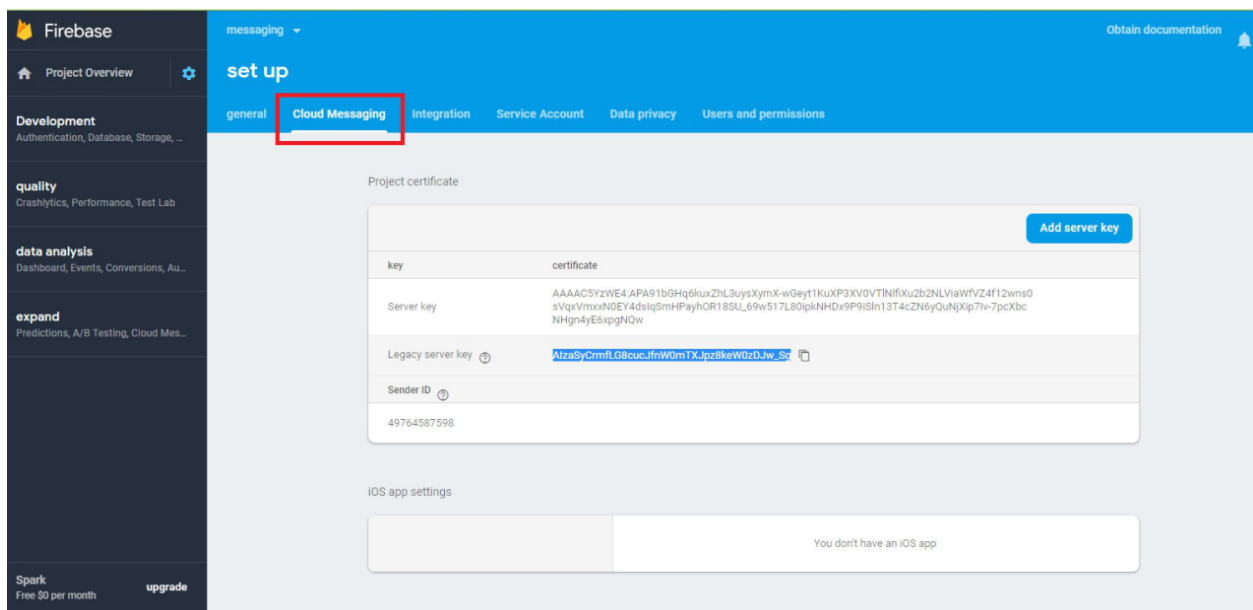

Go to the Settings page and select the Cloud Messaging page. We will see the Legacy server key. This Server key also needs to be used in the program. Let's save it and start editing the code.

Open the example "File" -> "Examples" -> "AmebaWiFi" -> "Firebase.ino"

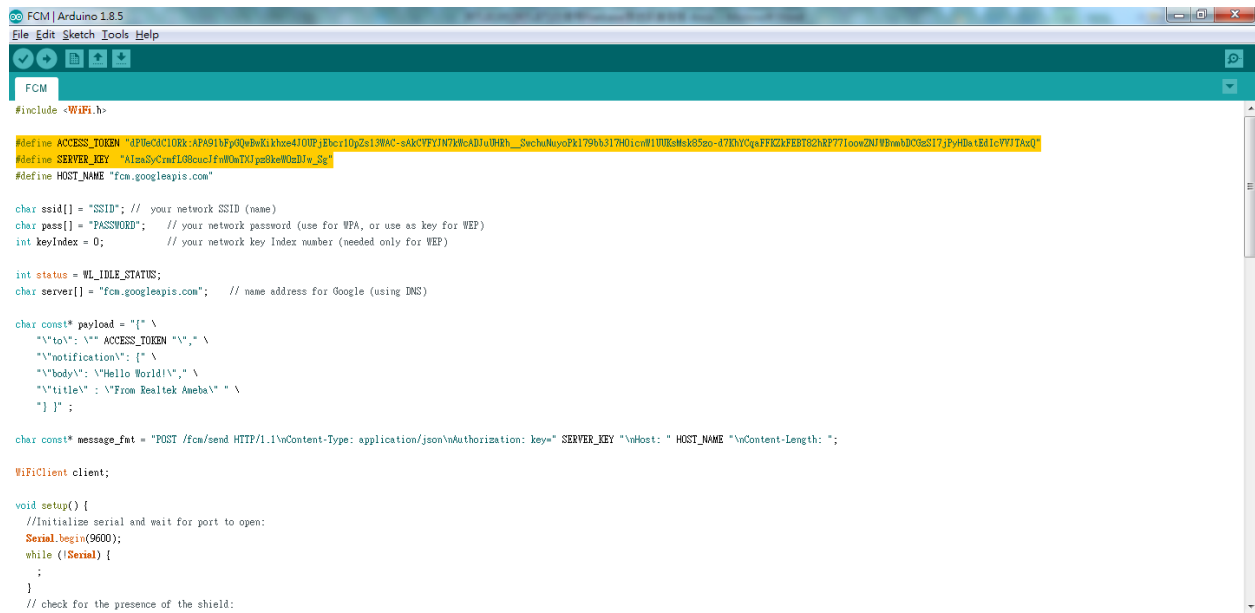

```

FCM | Arduino 1.8.5
File Edit Sketch Tools Help

FCM

#include <WiFi.h>

#define ACCESS_TOKEN "dFileOC10Rk:APA91bfpQwBwKikxw410UFjEhcr10pZs13WAC-sAkCYFYJN7KwADJuIHkH_ScehuNuyoPk179bK317H0icw11UUsMsk85zo-47EDV0qgFFK2KFEBT02hRP77/cooZNIWbm4DC0sS17jP4Hba4E4icV71TAxQ"
#define SERVER_KEY "AImxSjCmfL08oucFmW0mTXjgs8keW0zDw_0g"
#define HOST_NAME "fcm.googleapis.com"

char ssid[] = "SSID"; // your network SSID (name)
char pass[] = "PASSWORD"; // your network password (use for WPA, or use as key for WEP)
int keyIndex = 0; // your network key Index number (needed only for WEP)

int status = WL_IDLE_STATUS;
char server[] = "fcm.googleapis.com"; // name address for Google (using DNS)

char const* payload = "[{" \
  "\"to\": \"\" ACCESS_TOKEN \"\", \"\n" \
  "\"notification\": { \"\n" \
  "\"body\": \"Hello World!\" \"\n" \
  "\"title\": \"From Realtek Ameba\" \"\n" \
  "}] ]";


char const* message_fmt = "POST /fcm/send HTTP/1.1\nContent-Type: application/json\nAuthorization: key= \" SERVER_KEY \"\nHost: \" HOST_NAME \"\nContent-Length: ";

WiFiClient client;

void setup() {
  //Initialize serial and wait for port to open:
  Serial.begin(9600);
  while (!Serial) {
    ;
  }
  // check for the presence of the shield:
}

```

As shown above, ACCESS_TOKEN and SERVER_KEY are defined in the reverse white part, that is, the ACCESS token ID that we just saved from the APP and the Server Key saved in the Firebase console page. We fill in the two sets of IDs, compile and upload them to Ameba. Press the Reset button and open the terminal.

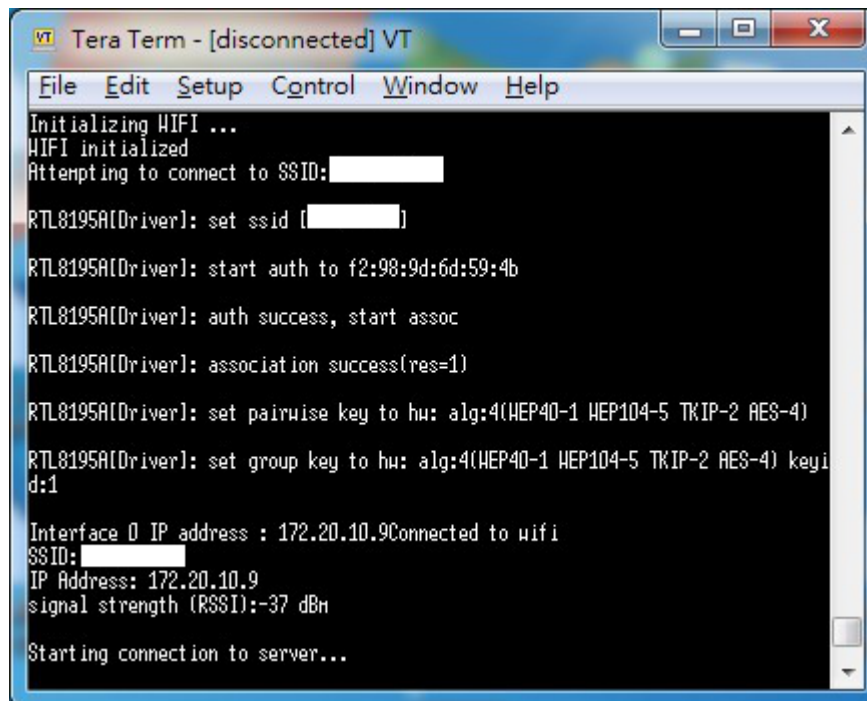

```

VT Tera Term - [disconnected] VT
File Edit Setup Control Window Help

Initializing WIFI ...
WIFI initialized
Attempting to connect to SSID: [redacted]

RTL8195A(Driver): set ssid [redacted]
RTL8195A(Driver): start auth to f2:98:9d:6d:59:4b
RTL8195A(Driver): auth success, start assoc
RTL8195A(Driver): association success(res=1)
RTL8195A(Driver): set pairwise key to hu: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4)
RTL8195A(Driver): set group key to hu: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4) keyi
d:1

Interface 0 IP address : 172.20.10.9Connected to wifi
SSID: [redacted]
IP Address: 172.20.10.9
signal strength (RSSI):-37 dBm

Starting connection to server...

```

Connect to FCM Server after connecting to AP


```
Connect to Server successful!  
connected to server
```

```
Request:  
POST /fcm/send HTTP/1.1  
Content-Type: application/json  
Authorization: key=AiZa8yCrmfLG8cucJfnH0nTXJpz8keH0zDJu_Sg  
Host: fcm.googleapis.com  
Content-Length: 258
```

```
{ "to": "dPUeCdC1ORk:APA91bFpGQuBuKikhxe4JOUPjEbc10pZs13HAC-sAkCVFYJN7kH  
h_SuchuMuyoPk179bb317H0icnH1UUKsHsk85zo-d7KhYCqaFFKZkFEBT82hRP77IoouZHNJ  
zSI7jPyHdatEdIcVWJTAxQ", "notification": { "body": "Hello World!", "title":  
Realtek Ameba" } }
```

```
HTTP/1.1 200 OK  
Content-Type: application/json; charset=UTF-8  
Date: Thu, 16 Aug 2018 10:47:30 GMT  
Expires: Thu, 16 Aug 2018 10:47:30 GMT  
Cache-Control: private, max-age=0  
X-Content-Type-Options: nosniff  
X-Frame-Options: SAMEORIGIN
```

After showing Connect to Server successful, it means that the FCM connection is successful and the message will be sent. During the process, HTTP/1.1 200 OK will be received to indicate that the message is successfully pushed. At this time, the mobile phone screen is opened and the App receives the message from Ameba.

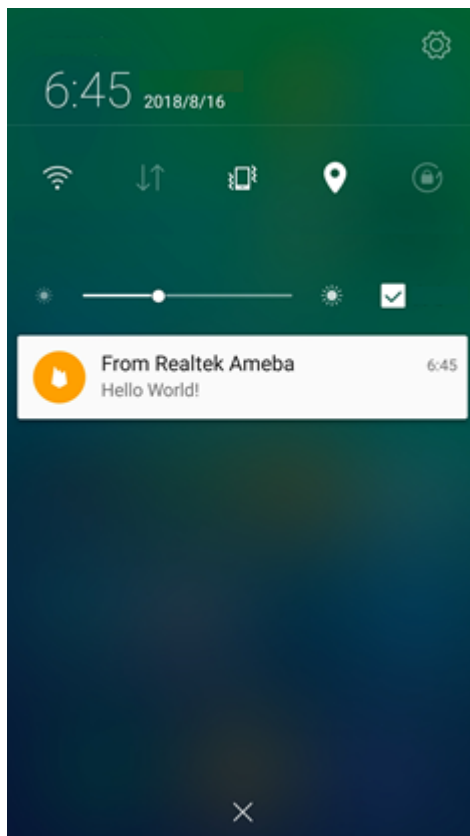

Code Reference

Firebase.ino

This example uses the HTTP protocol to push messages. Users can learn the payload format from the Firebase development website.

<https://firebase.google.com/docs/cloud-messaging/send-message>

The main payload format in the program is as follows. The user can freely change the Title and Body of the message. Body represents the content of the message.

```
char const* payload = "{" \
  "\"to\": \"" ACCESS_TOKEN "\", \"\n\
  "\"notification\": {\n\
  "\"body\": \"Hello World!\", \"\n\
  "\"title\" : \"From Realtek Ameba\" \"\n\
  \"} }" ;
```

```
setup() {
  if (client.connect(server, 80)) {
    Serial.println("connected to server");
    // Make a HTTP request:
    sprintf(message, "%s%s%s%s%s%d%s%s", "POST /fcm/send HTTP/1.1\nContent-Type:~
↪application/json\nAuthorization: key=", SERVER_KEY, "\nHost: ", HOST_NAME, "\nContent-
↪Length: ", strlen(payload), "\n\n", payload, "\n");
    printf("\nRequest:\n%s \n", message);
    client.println(message);
    client.println();
  }
}
```

The sprintf part puts the payload into the HTTP POST content and sends the message out after connecting to the FCM Server.

```
loop() {
  while (client.available()) {
    char c = client.read();
    Serial.write(c);
  }
}
```

Waiting for the response from Server and printing out the response.


Access IFTTT Via Ameba

Introduction to IFTTT

IFTTT, known as If This Then That, is a website and mobile app and free web-based service to create the applets, or the chains of simple conditional statements. The applet is triggered by changes that occur within other web services such as Gmail, Facebook, Telegram, Instagram, Pinterest etc.

Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- An account from <https://ifttt.com/> , in order to access IFTTT service*

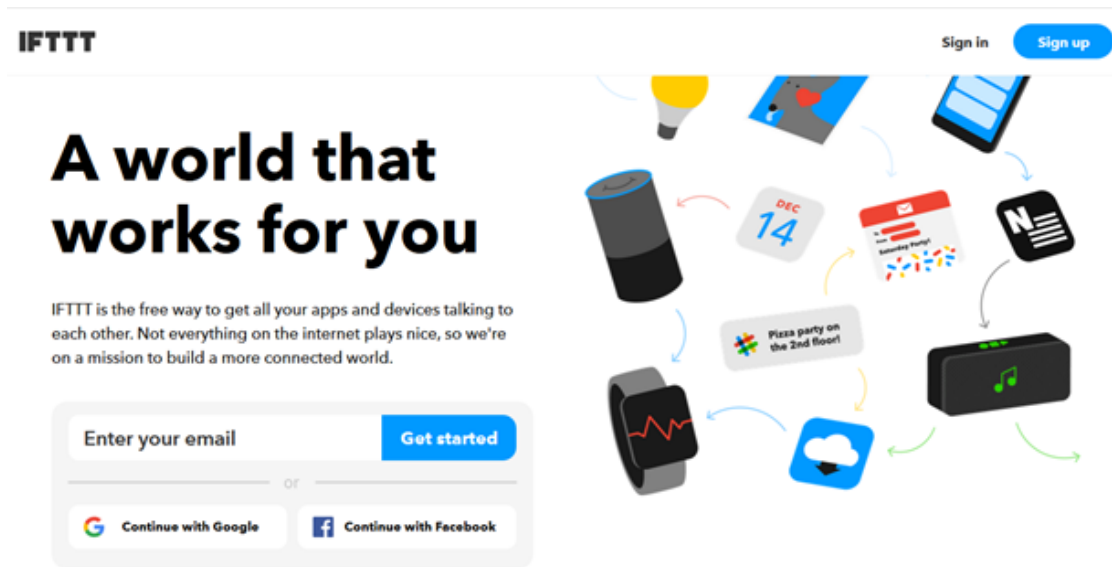

注解: Upon log in, there are several cloud and online services that are integrated with IFTTT platforms.


Example

- Generate Applet from IFTTT


In this example, we obtain an example of IFTTT Applet to send email to specified recipient.

To run the example, HTTP POST feature of the Ameba is used to post a simple webhook service that is received by IFTTT platform and in turn be used to trigger a response (sending an email).


After logging in <https://ifttt.com/>, click **Create** from the top bar.

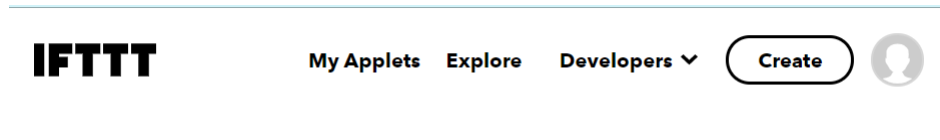


Click “Add” to add the trigger.

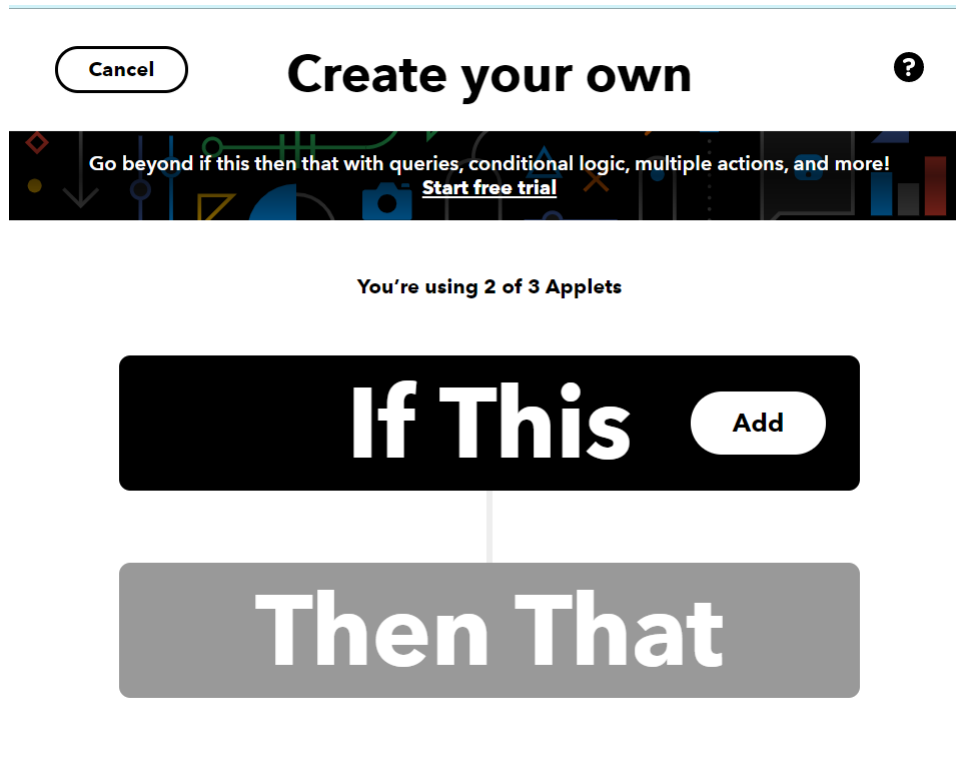

Choose Webhooks service as shown below. Alternatively, search the service by typing into the search bar.

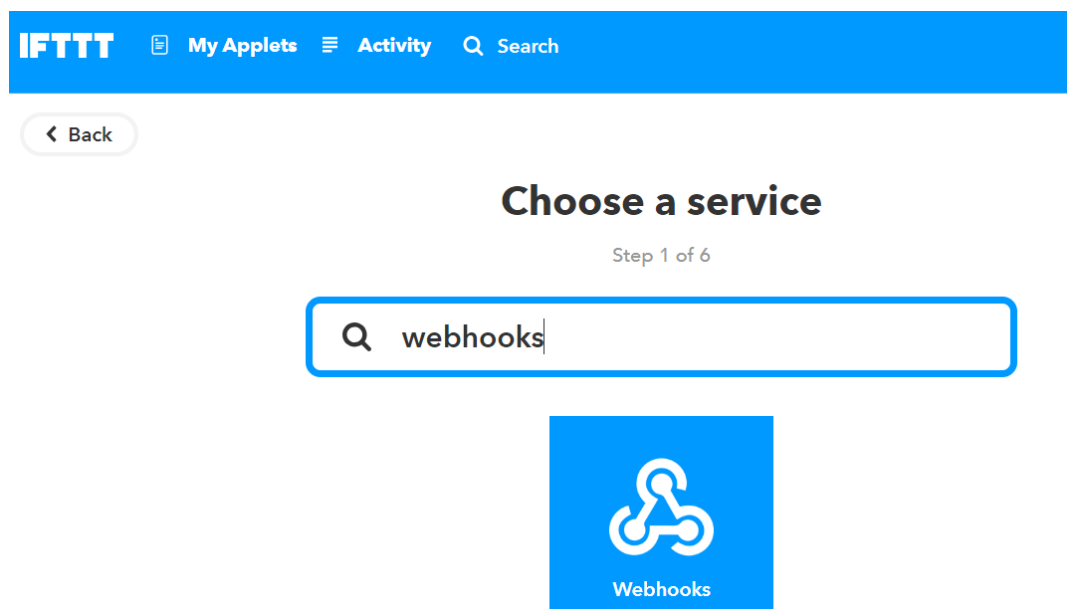

After that, the available triggers will appear. Choose Receive a Web request.

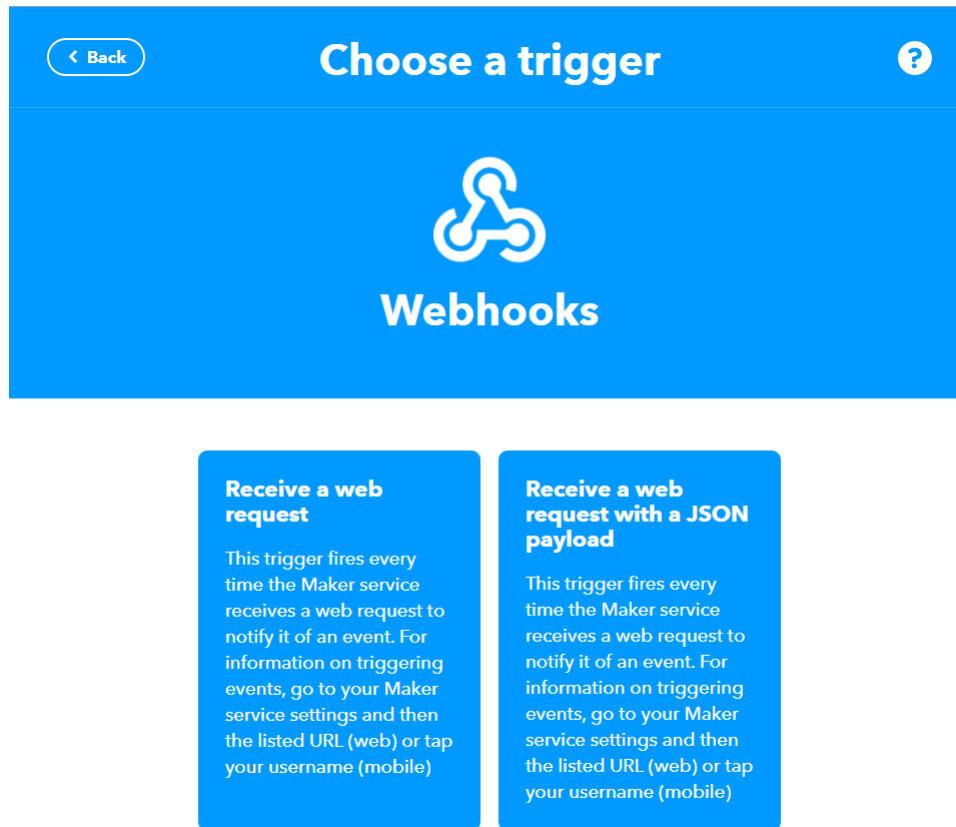


Next, an Event Name is required to identify the trigger successfully. In this example, set the Event name as “test_event” .

< Back

Complete trigger fields

?



Receive a web request

This trigger fires every time the Maker service receives a web request to notify it of an event. For information on triggering events, go to your Maker service settings and then the listed URL (web) or tap your username (mobile)

Event Name

test_event

The name of the event, like "button_pressed" or "front_door_opened"

Create trigger

Next, click **Add** in Then That field to create the action service taken in response to the last trigger.


Cancel

Create your own

?

Go beyond if this then that with queries, conditional logic, multiple actions, and more! [Start free trial](#)


You're using 2 of 3 Applets

If Receive a web request Edit Delete


+

Then That Add

Choose Email as the action service.

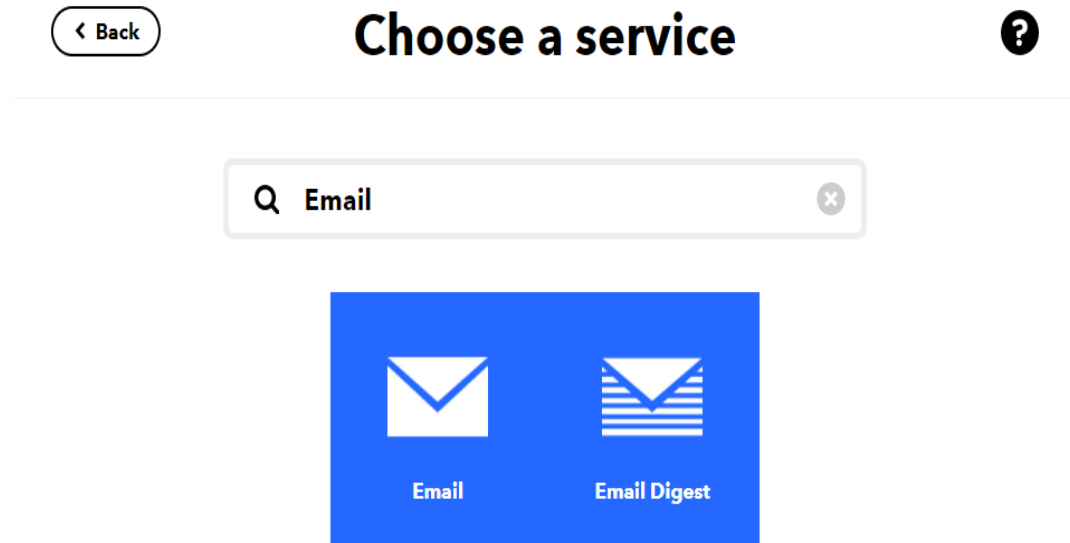

Click on Send me an email.

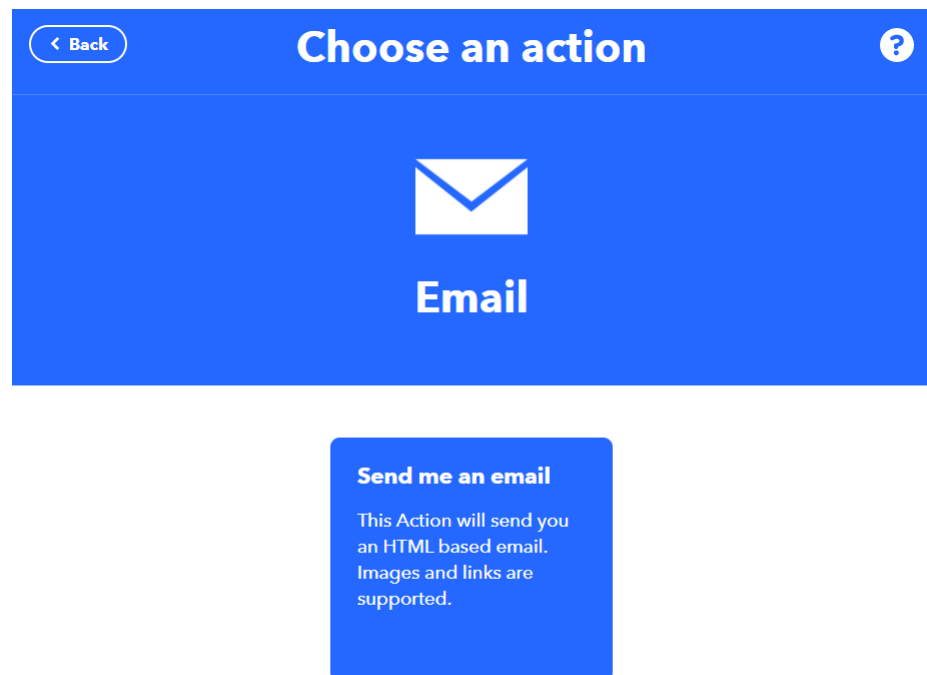

Under the template of **Send me an Email**, the contents of the email, such as subject and body is editable. Click **Create Action** to complete the action. Take note that **Email service** is offered to the

email address registered under IFTTT account.

Complete action fields

Send me an email

This Action will send you an HTML based email. Images and links are supported.

Subject

The event named " **EventName** " occurred on the Maker Webhooks service

Add ingredient

Body

What: **EventName**

 When: **OccurredAt**

 Extra Data: **Value1** , **Value2** , **Value3** ,

Add ingredient

Create action


- Post the Trigger via Ameba

Once the Applet is ready in the IFTTT dashboard, the example program can be flashed onto the Ameba board to post the HTTP request.

Open the example code in "File" -> "Examples" -> "AmebaWiFi" -> "HTTP_IFTTT_Post"

In the example program, edit the following 3 items inside the code to make the program work.

1. The WiFi credentials to connect to the Wi-Fi hotspot or access point of desirable choice.
2. Under the Host name field, enter the host name of the IFTTT service "maker.ifttt.com" .
3. Under the Path name field, enter the Event name and key field "/trigger/Event name/with/key/Key Field"
 - Event name: The event name should be the same as the one specified in the IFTTT applet. In this example, the event name is "test_event" .
 - Key Field: Available under webhook service in individual IFTTT account. See the next step for the steps to obtain the Key Field.

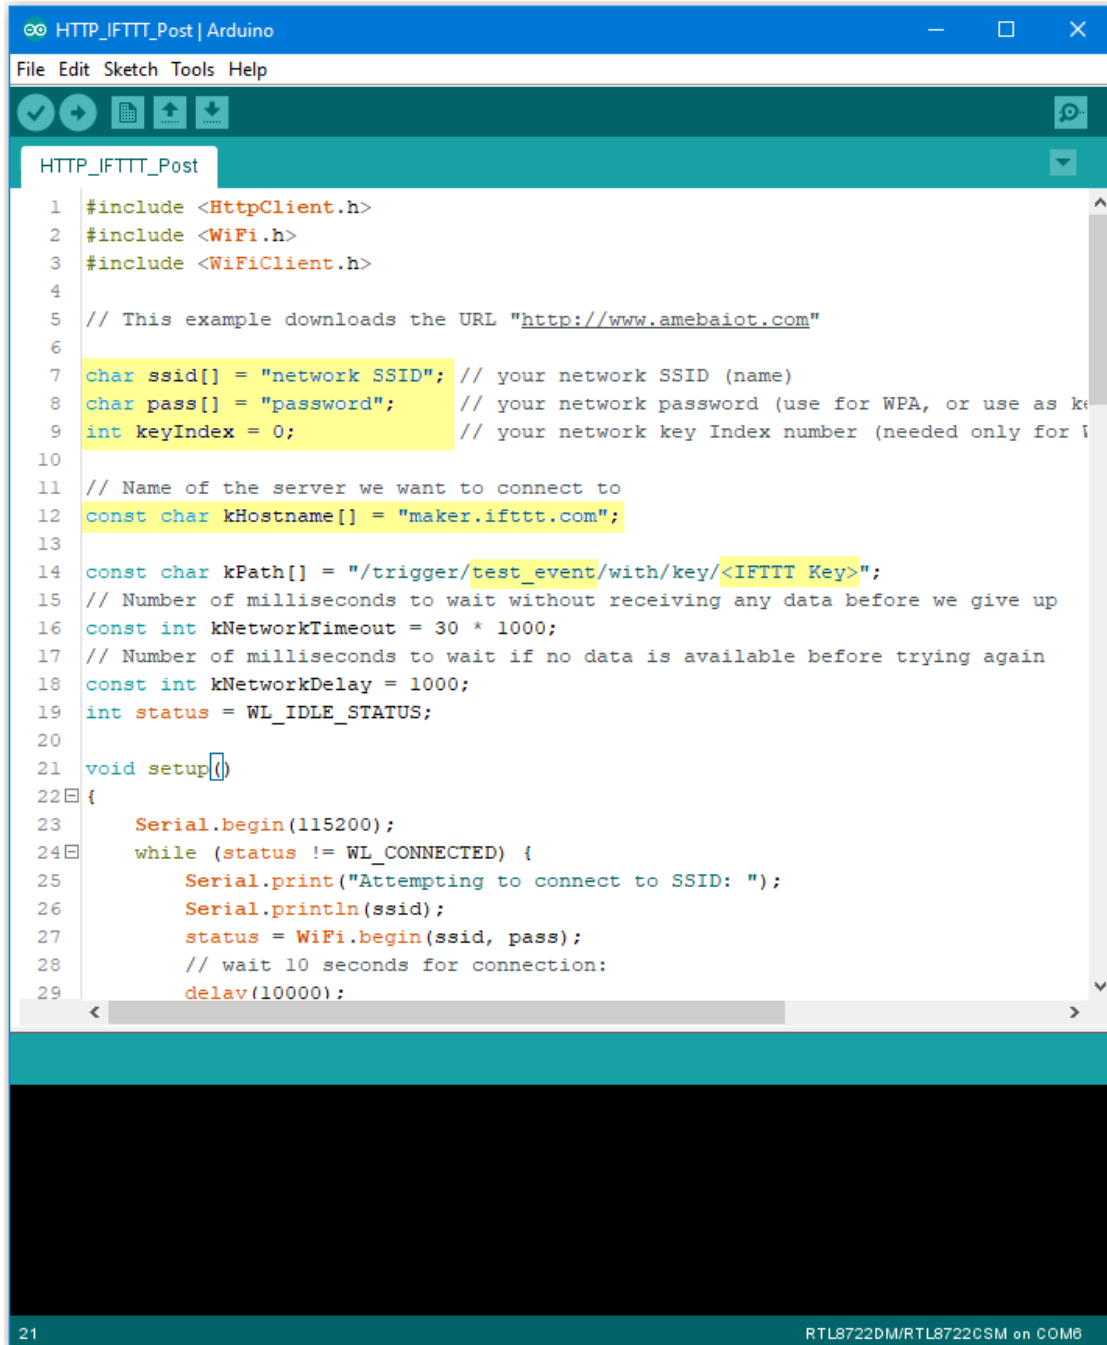


```
1 #include <HttpClient.h>
2 #include <WiFi.h>
3 #include <WiFiClient.h>
4
5 // This example downloads the URL "http://www.amebaiot.com"
6
7 char ssid[] = "network SSID"; // your network SSID (name)
8 char pass[] = "password";     // your network password (use for WPA, or use as key for WEP)
9 int keyIndex = 0;              // your network key Index number (needed only for WEP)
10
11 // Name of the server we want to connect to
12 const char kHostname[] = "maker.ifttt.com";
13
14 const char kPath[] = "/trigger/test_event/with/key/<IFTTT Key>";
15 // Number of milliseconds to wait without receiving any data before we give up
16 const int kNetworkTimeout = 30 * 1000;
17 // Number of milliseconds to wait if no data is available before trying again
18 const int kNetworkDelay = 1000;
19 int status = WL_IDLE_STATUS;
20
21 void setup()
22 {
23     Serial.begin(115200);
24     while (status != WL_CONNECTED) {
25         Serial.print("Attempting to connect to SSID: ");
26         Serial.println(ssid);
27         status = WiFi.begin(ssid, pass);
28         // wait 10 seconds for connection:
29         delay(10000);
30     }
31 }
```


21

RTL8722DM/RTL8722CSM on COM8

To obtain a key from documentation tab of the Webhooks, find the webhook service in the Explore tab.

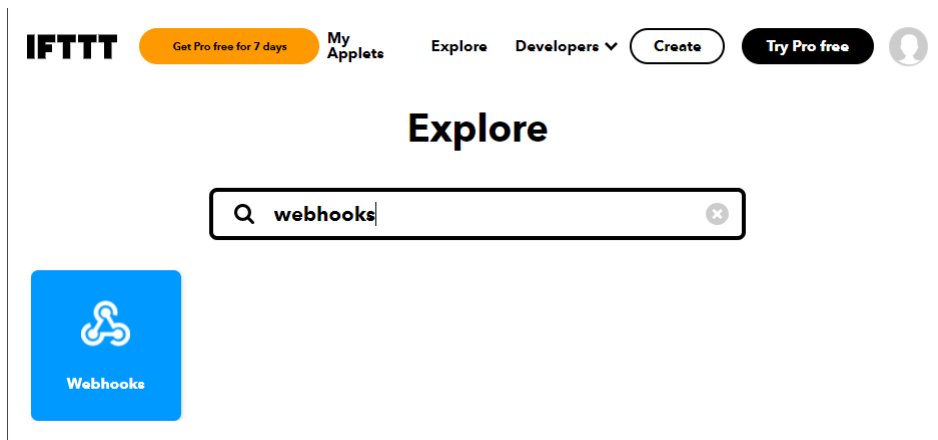

On the Webhooks service page, click on the Documentation tab.

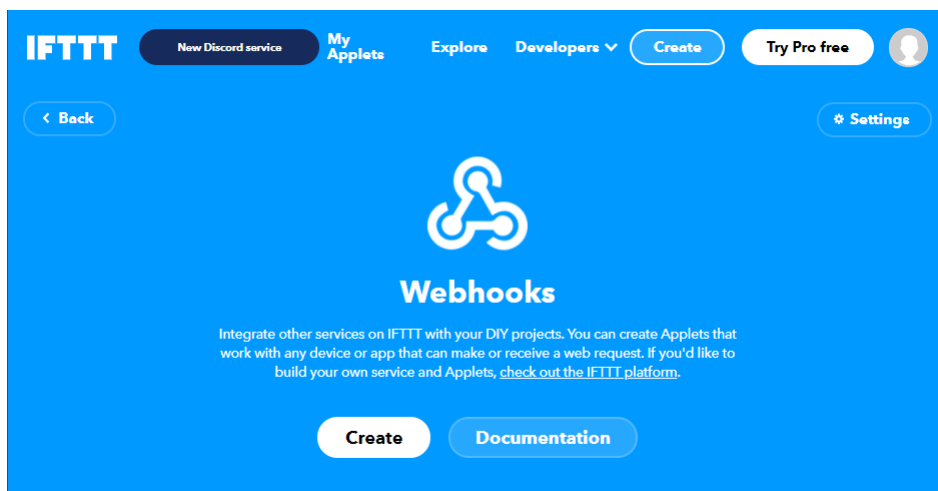


The key can be found in the documentation page. Also, information on how HTTP request can be used.




Once the example is ready, connect to Ameba board via USB Cable.

On the Arduino IDE, compile the code and upload the code onto Ameba and press the reset button. After the event has been successfully fired, “Congratulations! You have fired the test_event event” can be seen on the serial monitor and an email reminder for this event will be delivered.

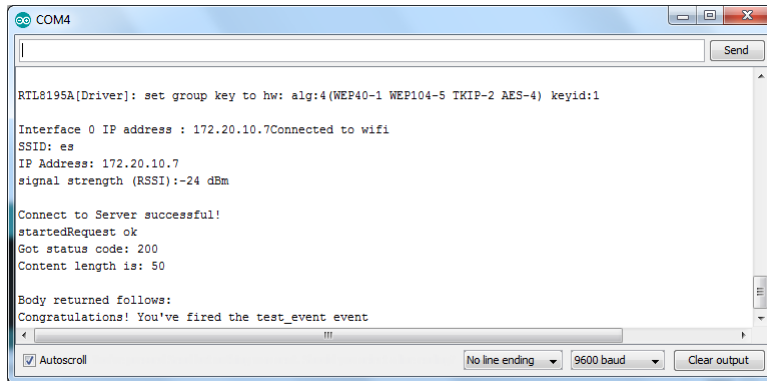

Thereafter an email is sent to recipient email account registered at IFTTT Applet and email notification will be received.

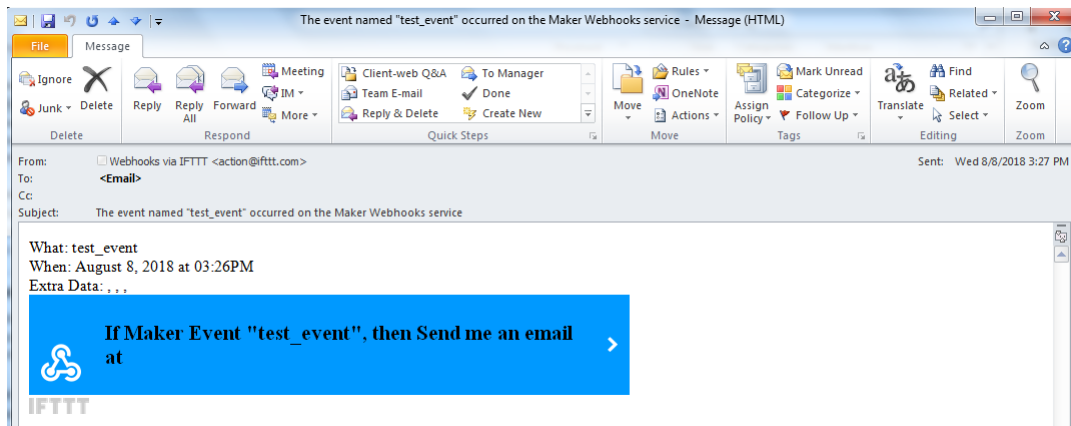

Use Ameba To Securely Retrieve Information From The Internet


Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1


Example

This example uses Ameba to securely retrieve information from the internet using SSL. SSL is an acronym for Secure Sockets Layer. It is a cryptographic protocol designed to provide communications security over a computer network, by encrypting the messages passed between server and client.

Open the “WiFiSSLClient” example in “File” -> “Examples” -> “AmebaWiFi” -> “WiFiSSLClient”

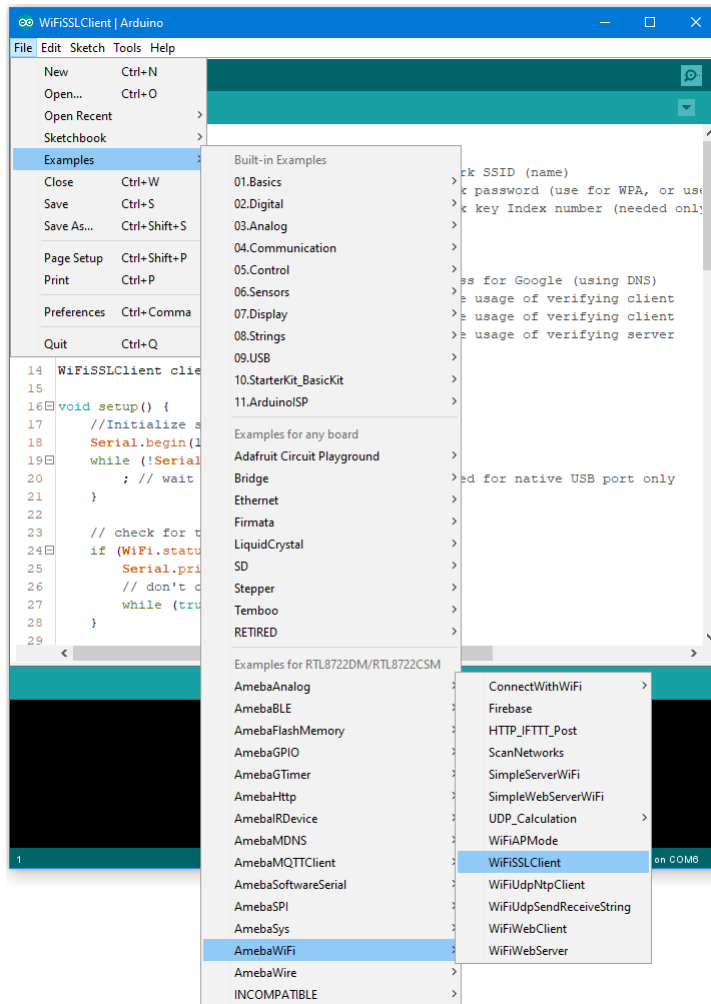

In the sample code, modify the highlighted snippet to reflect your WiFi network settings.

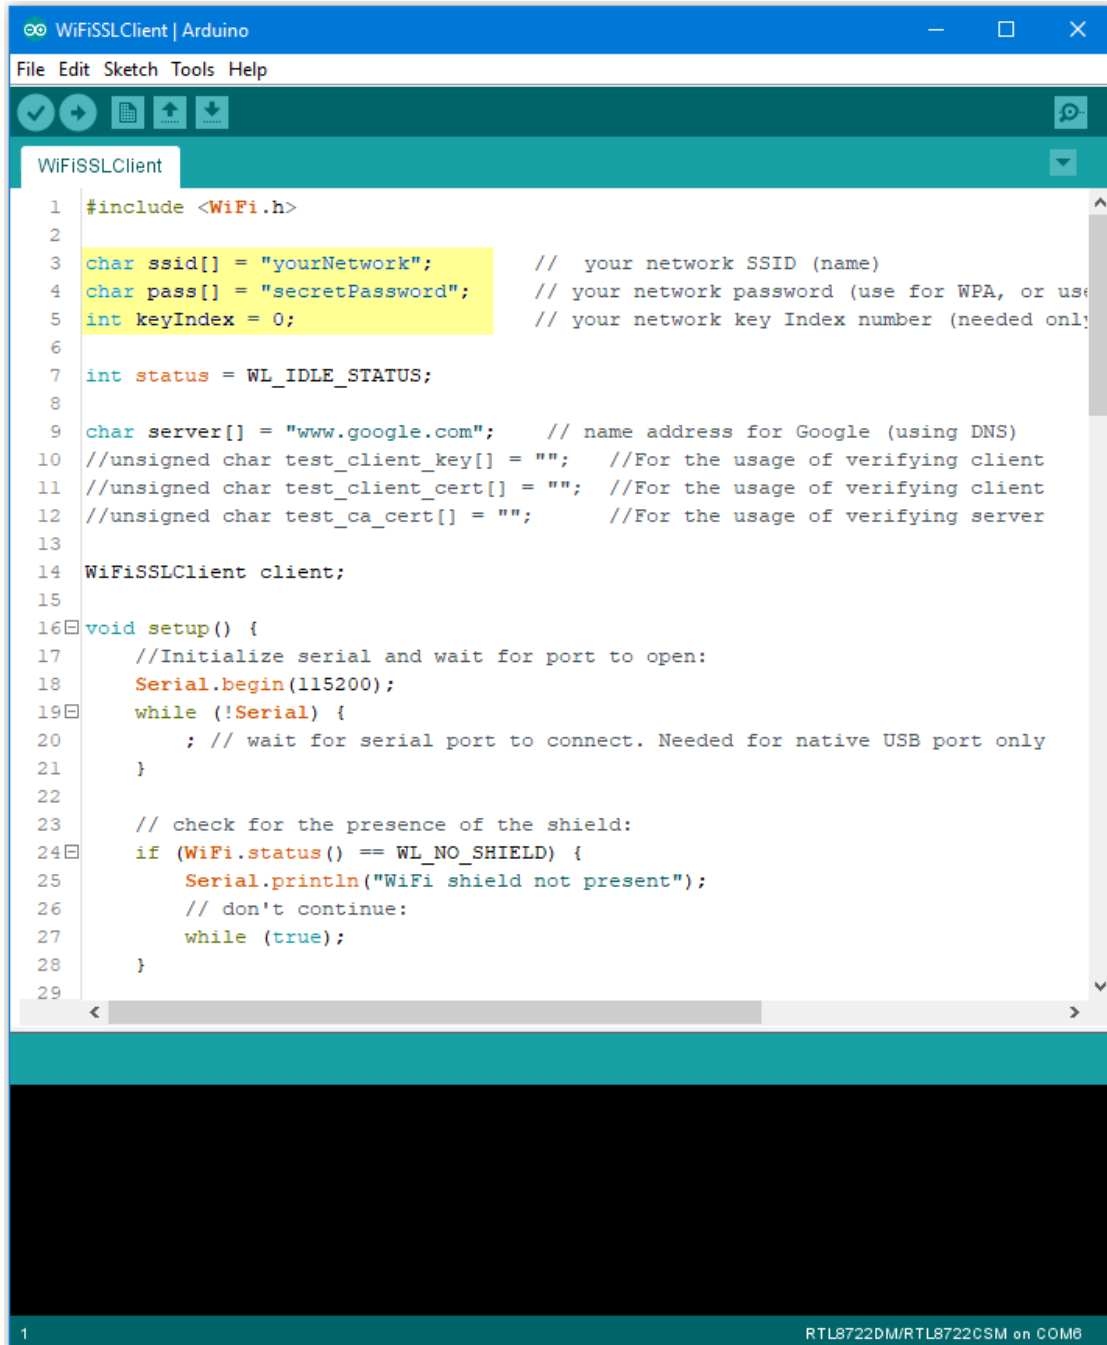

```

1  #include <WiFi.h>
2
3  char ssid[] = "yourNetwork";    // your network SSID (name)
4  char pass[] = "secretPassword"; // your network password (use for WPA, or use
5  int keyIndex = 0;               // your network key Index number (needed only
6
7  int status = WL_IDLE_STATUS;
8
9  char server[] = "www.google.com"; // name address for Google (using DNS)
10 //unsigned char test_client_key[] = ""; //For the usage of verifying client
11 //unsigned char test_client_cert[] = ""; //For the usage of verifying client
12 //unsigned char test_ca_cert[] = ""; //For the usage of verifying server
13
14 WiFiSSLClient client;
15
16 void setup() {
17     //Initialize serial and wait for port to open:
18     Serial.begin(115200);
19     while (!Serial) {
20         ; // wait for serial port to connect. Needed for native USB port only
21     }
22
23     // check for the presence of the shield:
24     if (WiFi.status() == WL_NO_SHIELD) {
25         Serial.println("WiFi shield not present");
26         // don't continue:
27         while (true);
28     }
29


```

1

RTL8722DM/RTL8722CSM on COM8

Upload the code and press the reset button on Ameba once the upload is finished.

Open the serial monitor in the Arduino IDE and observe as Ameba retrieves a text file from os.mbed.com.

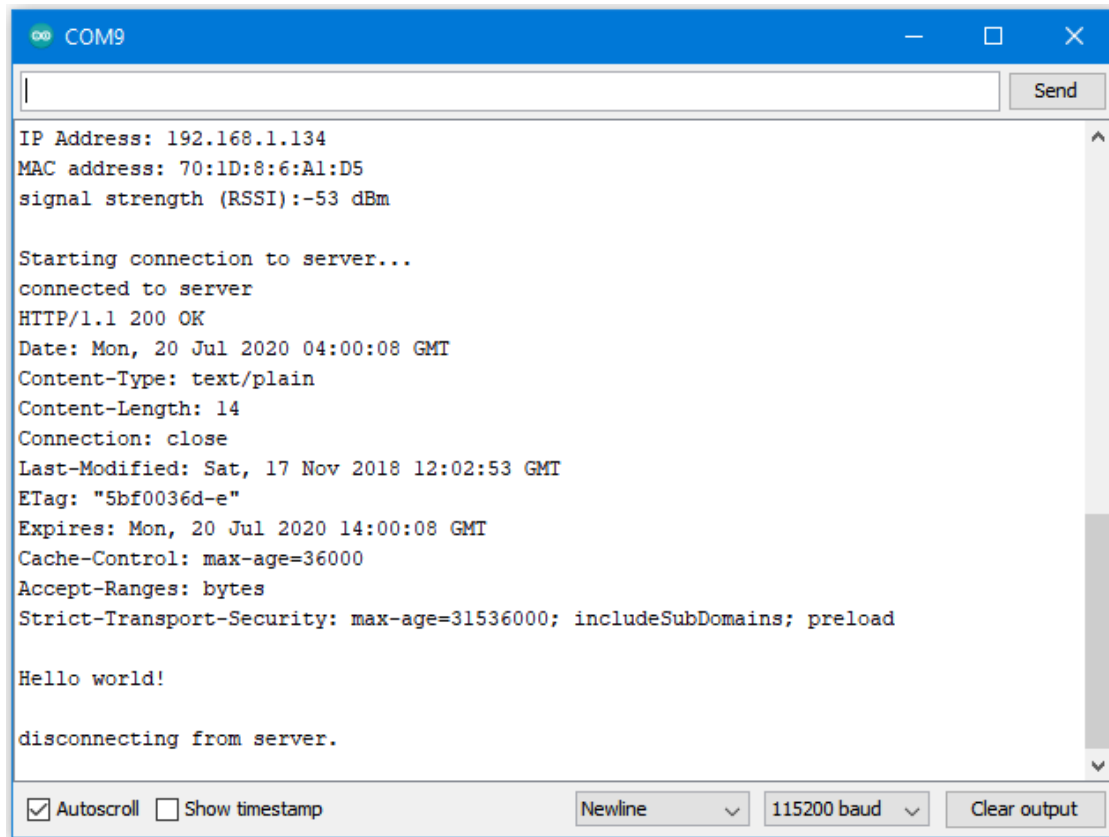

```
COM9

IP Address: 192.168.1.134
MAC address: 70:1D:8:6:A1:D5
signal strength (RSSI):-53 dBm

Starting connection to server...
connected to server
HTTP/1.1 200 OK
Date: Mon, 20 Jul 2020 04:00:08 GMT
Content-Type: text/plain
Content-Length: 14
Connection: close
Last-Modified: Sat, 17 Nov 2018 12:02:53 GMT
ETag: "5bf0036d-e"
Expires: Mon, 20 Jul 2020 14:00:08 GMT
Cache-Control: max-age=36000
Accept-Ranges: bytes
Strict-Transport-Security: max-age=31536000; includeSubDomains; preload

Hello world!

disconnecting from server.
```

☒ Autoscroll ☐ Show timestamp Newline 115200 baud Clear output

Code Reference

Use “WiFiSSLClient client;” to create a client that uses SSL. After creation, the client can be used in the same way as a regular client.

BLE –BLE Battery Service

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Android / iOS mobile phone

Example

Introduction

BLE connections use a server client model. The server contains the data of interest, while the client connects to the server to read the data. Commonly, a Bluetooth peripheral device acts as a server, while a Bluetooth central device acts as a

client. Servers can contain many services, with each service containing a some set of data. Clients can send requests to read or write some data and can also subscribe to notifications so that the server can send data updates to a client.

In this example, a basic battery service is set up on the Ameba Bluetooth stack. A mobile phone is used to connect to the Ameba peripheral device and read the battery data.

Procedure

Ensure that the following Bluetooth apps are installed on your mobile phone. These apps will show you the raw data sent by Ameba and allow you to interact with the data.


The recommended application is nRF connect, and is available at the links below:

- Android: <https://play.google.com/store/apps/details?id=no.nordicsemi.android.mcp>
- iOS : <https://apps.apple.com/us/app/nrf-connect/id1054362403>

LightBlue is an alternative application that can also be used, but has less features:


- Android: <https://play.google.com/store/apps/details?id=com.punchthrough.lightblueexplorer>
- iOS : <https://apps.apple.com/us/app/lightblue/id557428110>

Open the example, “Files” -> “Examples” -> “AmebaBLE” -> “BLEBatteryService”

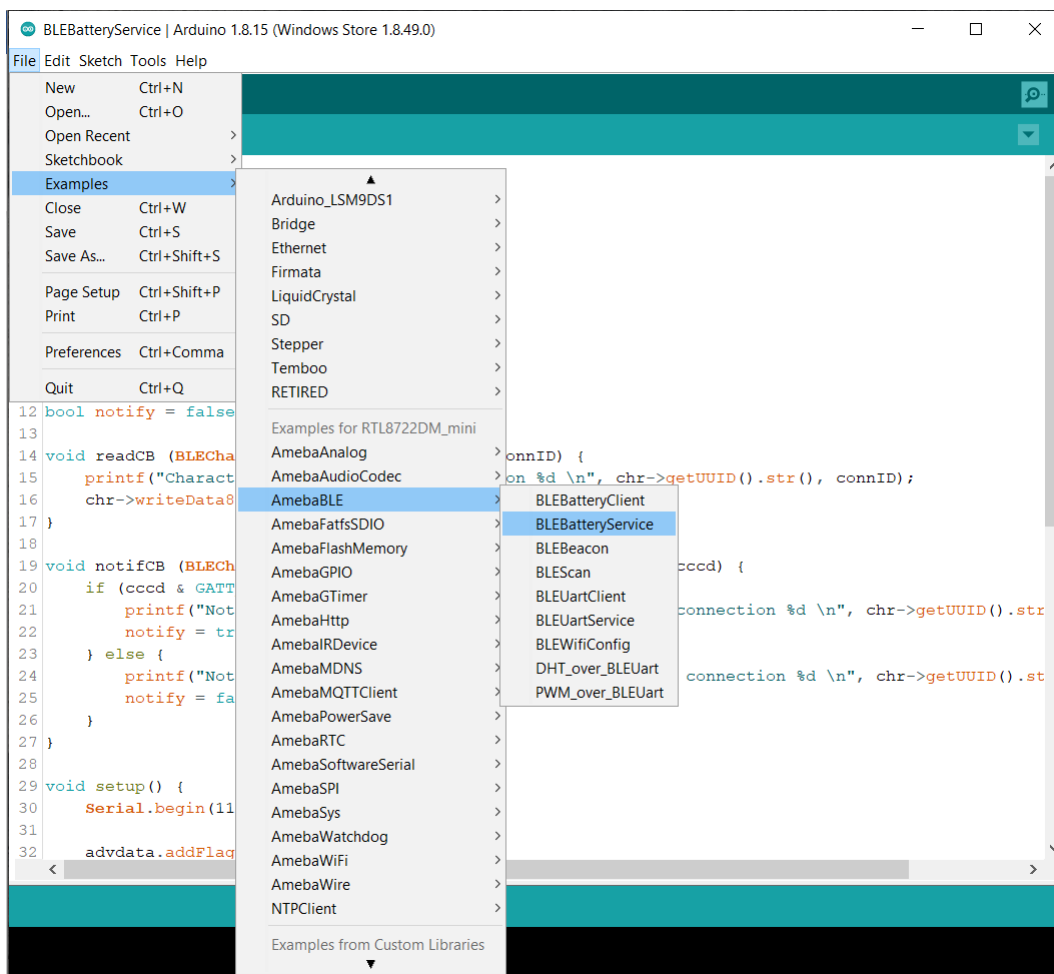


Upload the code and press the reset button on Ameba once the upload is finished.


On your mobile phone, open the Bluetooth app and scan for the Bluetooth signal broadcast by Ameba, it should appear as a device named “AMEBA_BLE_DEV” .

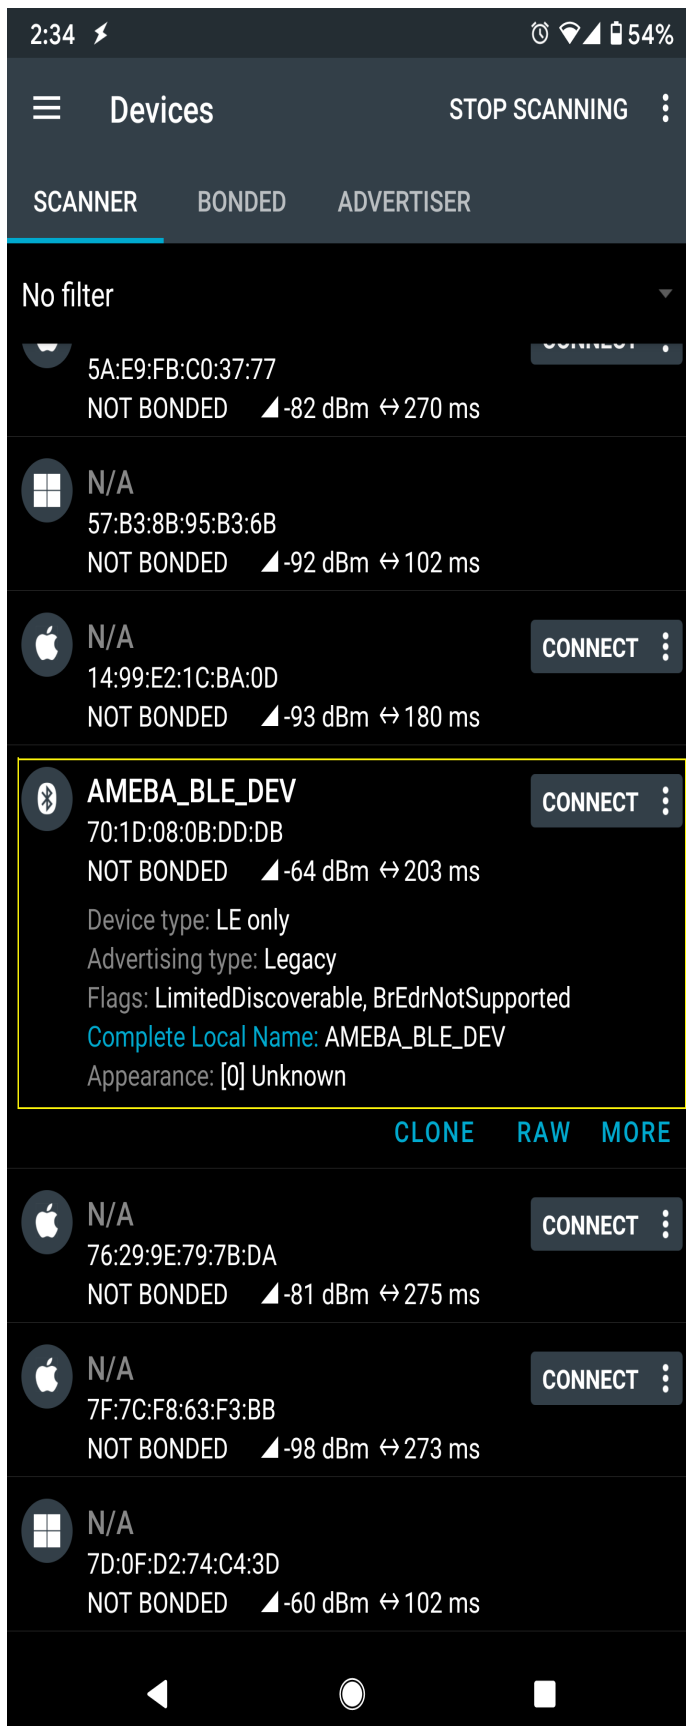


Connect to the Ameba Bluetooth device, and a list of available services should appear. Click on the battery service to expand it, and you can see the battery level data value. The arrows highlighted in the box on the right are used to read data and subscribe to notifications. Click on the single arrow to read the battery level value, and a 90% value will appear.

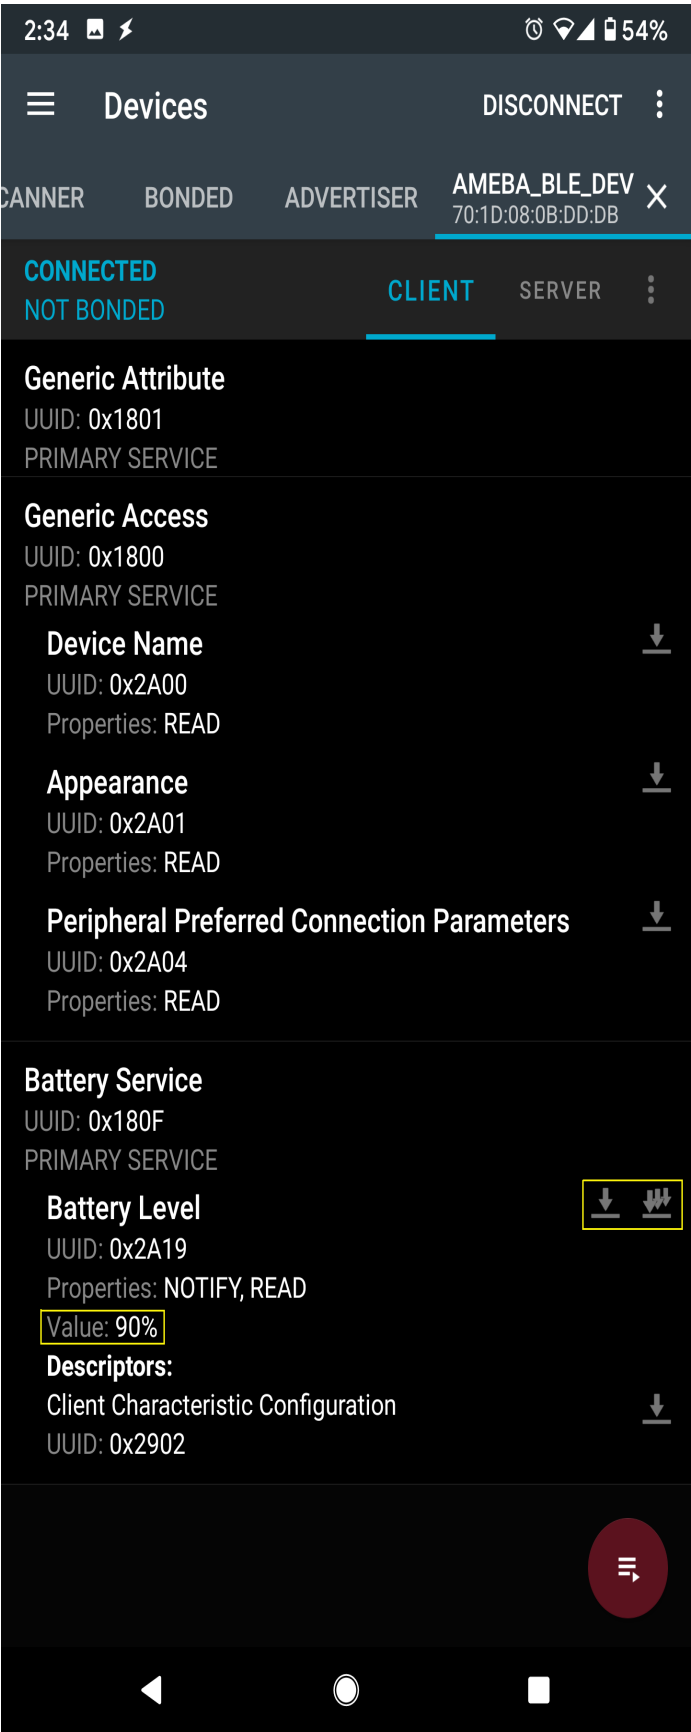

Click on the triple arrow to subscribe to updates on the battery level value, and the battery value will start updating by itself.

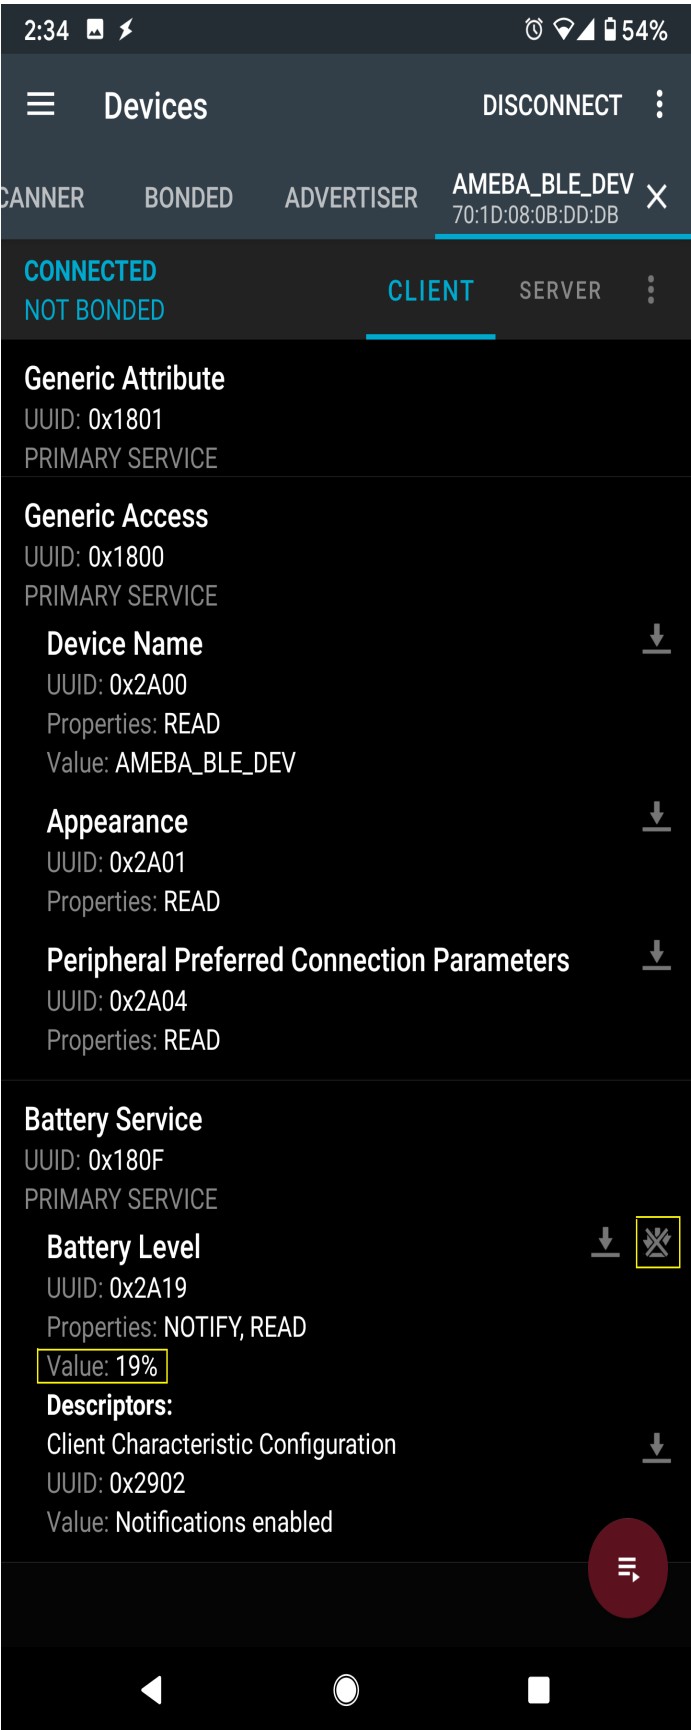

The serial monitor will show the sketch increasing the battery level every second. When you click on either of the arrows, the sketch running on the Ameba will be notified, and will print out the action taken.

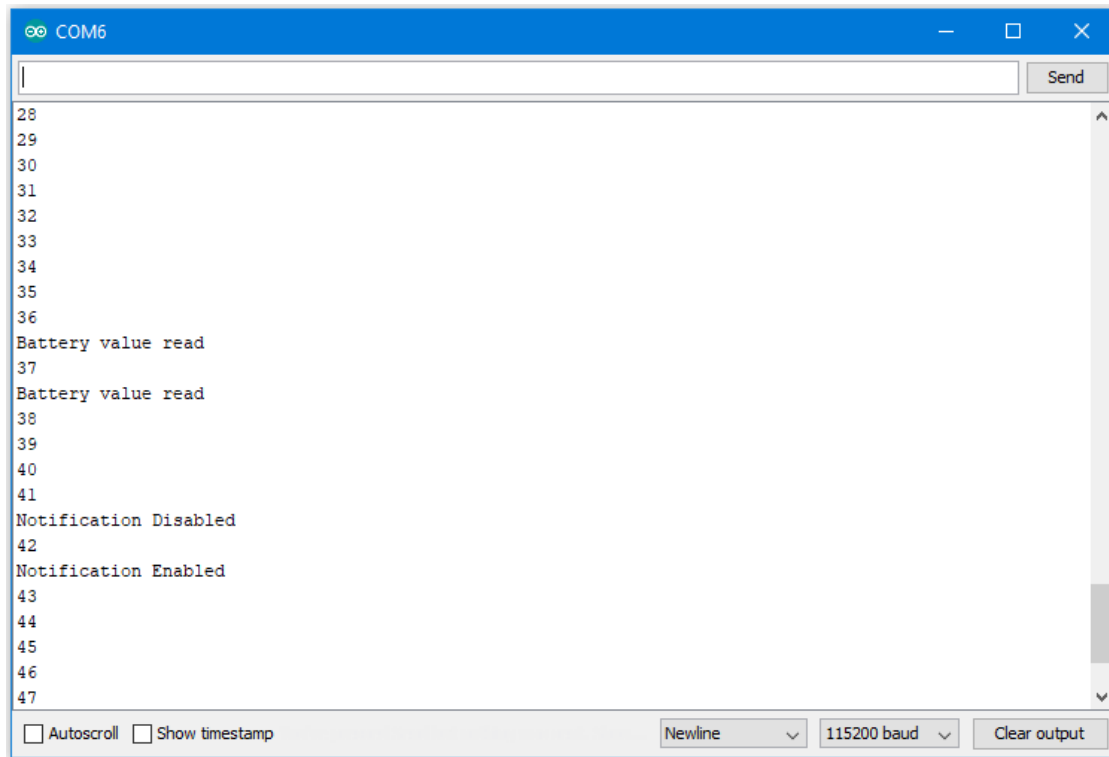

Code Reference

BLEService and BLECharacteristic classes are used to create and define the battery service to run on the Bluetooth device.

`BLE.configAdvert() -> setAdvType(GAP_ADTYPE_ADV_IND)` is used to set the advertisement type to a general undirected advertisement that allows for connections.

`setReadCallback()` and `setCCCDCallback()` is used to register functions that will be called when the battery level data is read, or notification is enabled by the user.

`BLE.configServer(1)` is used to tell the Bluetooth stack that there will be one service running.

`addService()` registers the battery service to the Bluetooth stack.

BLE –BLE Beacon

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Android / iOS mobile phone

Example

Introduction

A BLE beacon broadcasts its identity to nearby Bluetooth devices, to enable the other devices to determine their location relative to the beacon, and to perform actions based on information broadcasted by the beacon.

Example applications of beacons include indoor positioning system, location-based advertising and more.

From the definition of its purpose as a broadcast device, a BLE beacon thus cannot be connected to, and can only send information in its Bluetooth advertisement packets.

There are several BLE beacon protocols. The Ameba BLEBeacon library supports the iBeacon and AltBeacon protocols.

Procedure

First, you need to install some Bluetooth apps on your mobile phone. These apps will show you the raw data sent by Ameba and allow you to interact with the data.


The recommended application is nRF connect, and is available at the links below:

- **Android** : <https://play.google.com/store/apps/details?id=no.nordicsemi.android.mcp>
- **iOS** : <https://apps.apple.com/us/app/nrf-connect/id1054362403>

LightBlue is an alternative application that can also be used, but has less features:


- **Android** : <https://play.google.com/store/apps/details?id=com.punchthrough.lightblueexplorer>
- **iOS** : <https://apps.apple.com/us/app/lightblue/id557428110>

Open the example, “Files” -> “Examples” -> “AmebaBLE” -> “BLEBeacon”

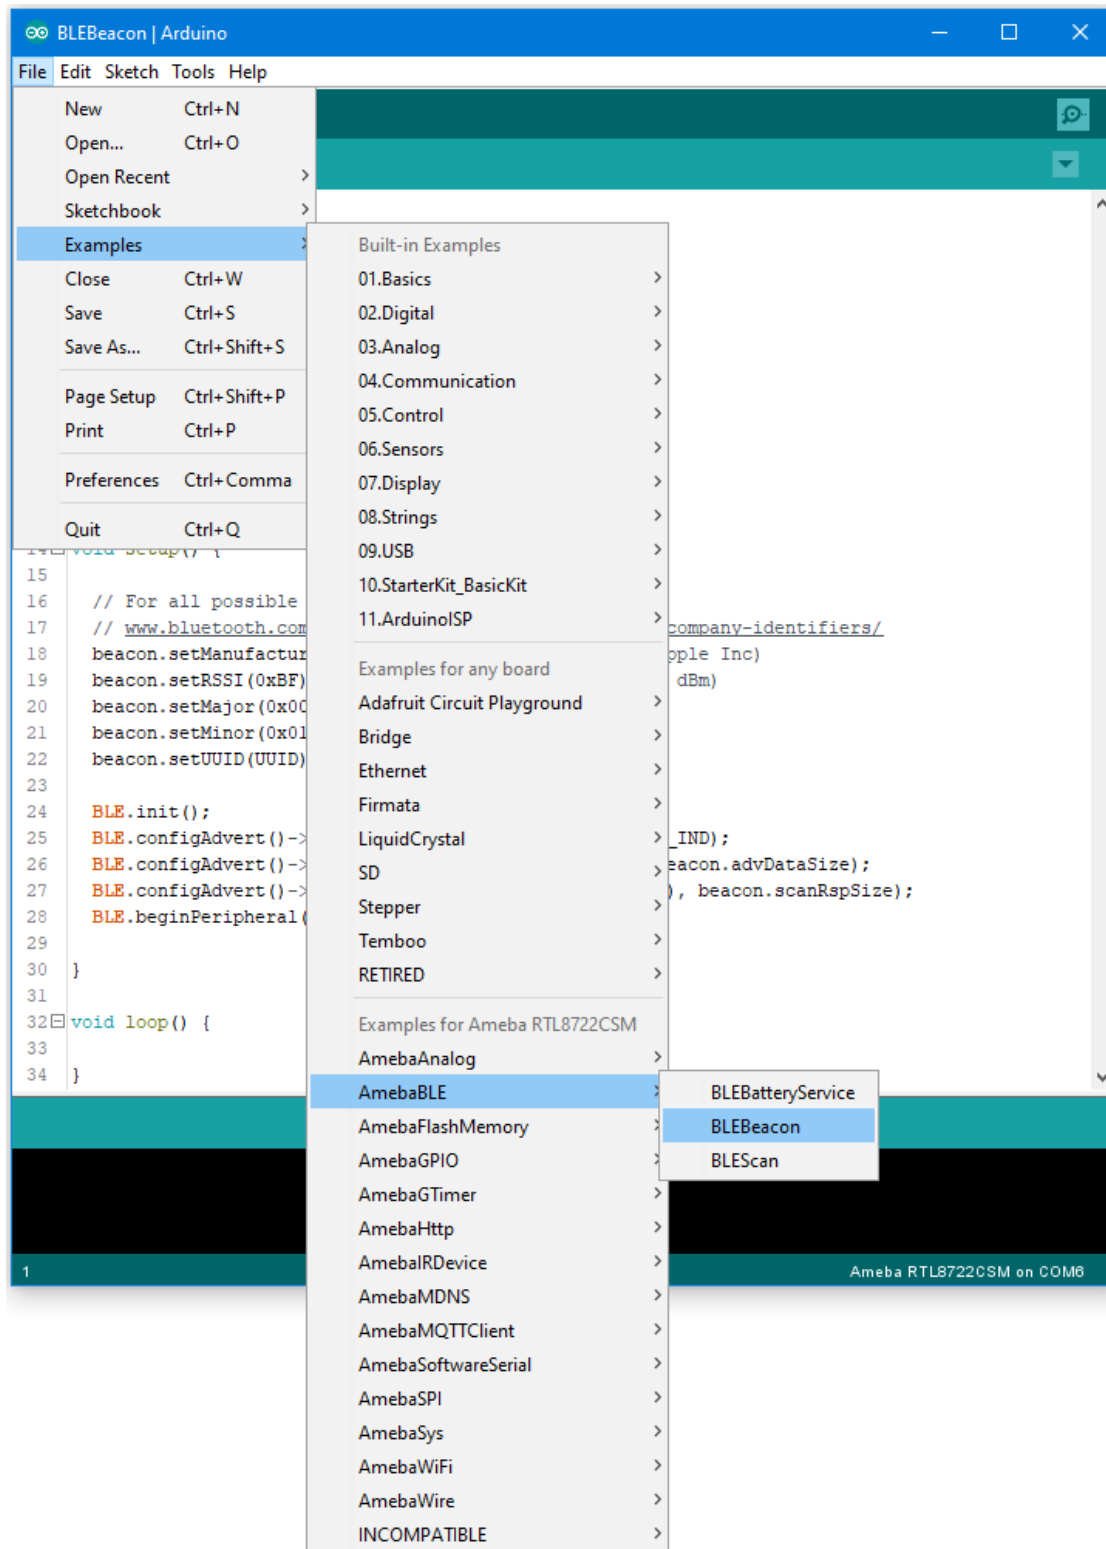

Upload the code and press the reset button on Ameba once the upload is finished.

On your mobile phone, open the Bluetooth app and scan for the beacon signal broadcast by Ameba.

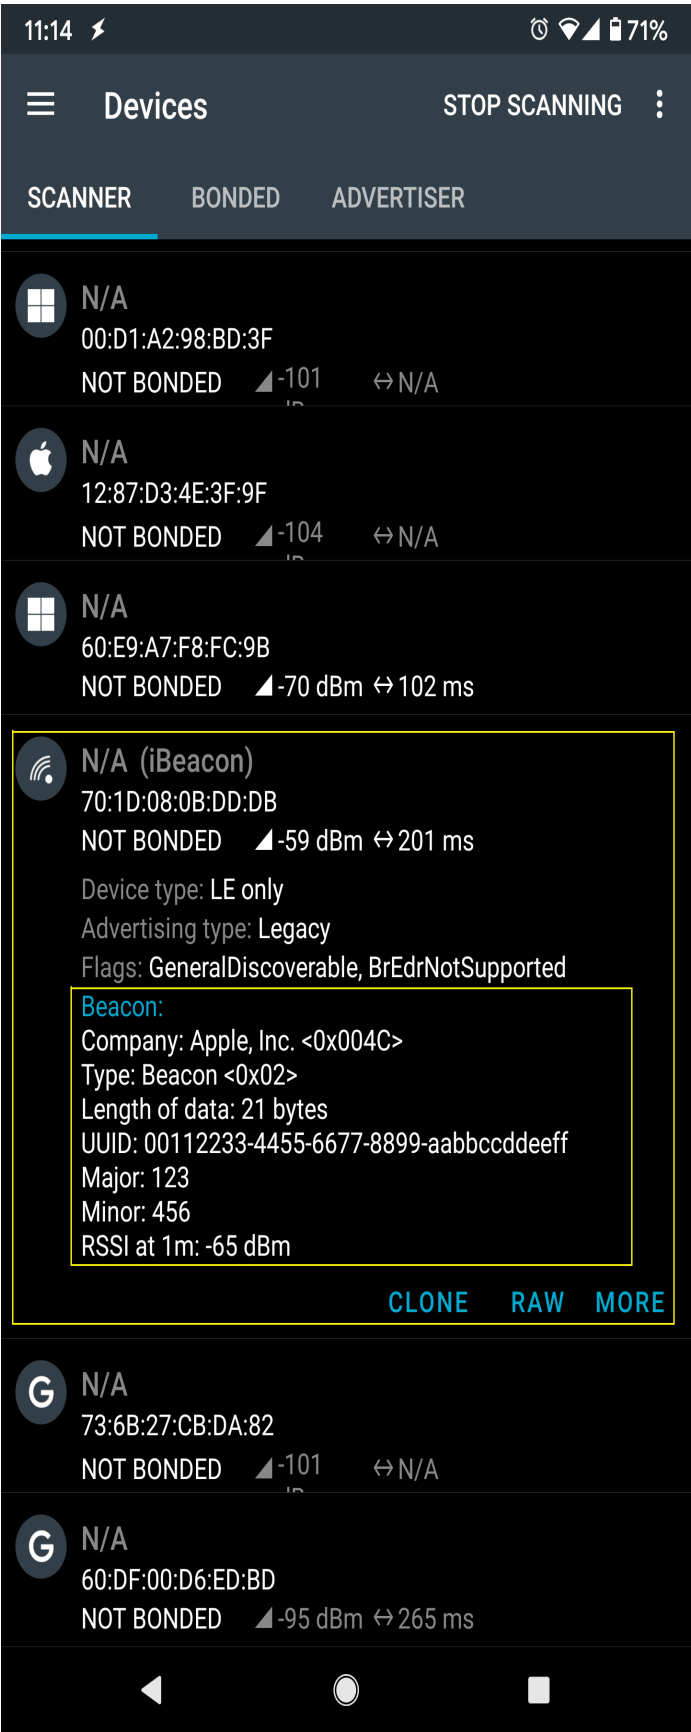

If you happen to be in an environment with multiple BLE beacons, you can tap the entries to expand them, and verify that the beacon data is identical to the data in the sketch.

Code Reference

`setRssi()` is used to set the received signal strength indicator (rssi) data field for a beacon. The specification states that this should be the received signal strength from the beacon at a 1 meter distance. With no method to measure this, it is set to -65dBm as an estimate.

`setMajor()` and `setMinor()` are used to set the two data fields. The purpose of these data are left for the manufacturer of the beacon to define, and can be used in any way.

`setUUID()` is used to give the beacon a universally unique identifier (UUID). This is a 128-bit number usually expressed as a hexadecimal string. It is used to identify each unique beacon, and can be randomly generated for free online.

The BLEBeacon library includes both `iBeacon` and `AltBeacon` classes, replace line 6 `iBeacon` with `altBeacon` to create an `AltBeacon` instead. The data fields are mostly the same, with only minor changes, please look at the header files for more details.

`BLE.init()` is used to allocate memory and prepare Ameba for starting the Bluetooth stack.

`BLE.configAdvert()` is used to configure the Bluetooth advertisement settings, to which we pass the beacon data and set the device as non-connectable.

`BLE.beginPeripheral()` starts Ameba in Bluetooth peripheral mode, after which it will begin to advertise with the beacon data provided.

BLE –BLE Scan

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Android / iOS mobile phone


Example

Introduction

This example configures the Ameba as a Bluetooth central device, uses the scan functionality to scan for other Bluetooth devices, and prints out the results to the serial monitor.

Procedure

Open the example, “Files” -> “Examples” -> “AmebaBLE” -> “BLEScan”

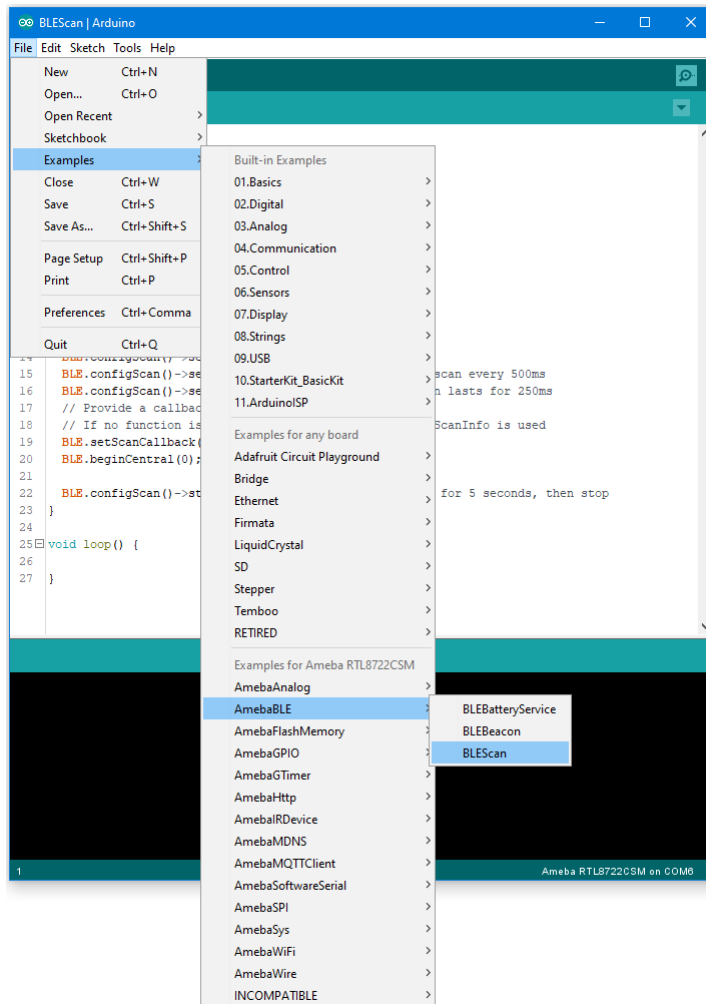

Upload the code and press the reset button on Ameba once the upload is finished.

Open the Arduino serial monitor, and you should see the scan results of nearby Bluetooth devices formatted and printed out.

```

COM6
#calibration_ok:[2:19:11]
interface 0 is initialized
interface 1 is initialized

Initializing WIFI ...
WIFI initialized
local bd addr: 0x70:1d:08:0b:dd:db
GAP scan start

Scan Data 1
ADVType          | AddrType      | BT_Addr        | rssi
NON_CONNECTABLE  | random        | 79:c1:1f:ed:21:75 | -94
GAP_ADTYPE_MANUFACTURER_SPECIFIC: company_id 0x6, len 27

Scan Data 2
ADVType          | AddrType      | BT_Addr        | rssi
NON_CONNECTABLE  | random        | 4c:19:13:18:f4:b5 | -98
GAP_ADTYPE_MANUFACTURER_SPECIFIC: company_id 0x6, len 27

Scan Data 3
ADVType          | AddrType      | BT_Addr        | rssi
NON_CONNECTABLE  | random        | 59:aa:dd:87:da:83 | -62
GAP_ADTYPE_MANUFACTURER_SPECIFIC: company_id 0x6, len 27

Scan Data 4
ADVType          | AddrType      | BT_Addr        | rssi
CON_UNDIRECT     | random        | c7:b9:7f:1e:fb:28 | -96
GAP_ADTYPE_FLAGS: 0x5
GAP_ADTYPE_SERVICE_DATA: UUID 0xfffe, len 4

Scan Data 5
ADVType          | AddrType      | BT_Addr        | rssi
CON_UNDIRECT     | random        | 6b:37:ce:55:75:65 | -92
GAP_ADTYPE_FLAGS: 0x1a
GAP_ADTYPE_POWER_LEVEL: 0xc
GAP_ADTYPE_MANUFACTURER_SPECIFIC: company_id 0x4c, len 7

Scan Data 6
ADVType          | AddrType      | BT_Addr        | rssi
CON_UNDIRECT     | public        | 68:9e:19:cb:ef:a9 | -78
GAP_ADTYPE_FLAGS: 0x6
GAP_ADTYPE_128BIT_XXX: 0x1bc5ffa0020062abe411f254e005dbd4
GAP_ADTYPE_MANUFACTURER_SPECIFIC: company_id 0xc90, len 2

Scan Data 7
ADVType          | AddrType      | BT_Addr        | rssi
SCAN_RSP         | public        | 68:9e:19:cb:ef:a9 | -78

☒ Autoscroll ☐ Show timestamp
Newline 115200 baud Clear output

```

If you have the Bluetooth app nRF Connect installed, you can also use it to send out Bluetooth advertisements for the Ameba to pick up.

Code Reference

`setScanMode(GAP_SCAN_MODE_ACTIVE)` is used to set the scan mode. Active scanning will request for an additional scan response data packet from a device when it is found. Passive scanning will only look at the advertisement data, and not request for additional data.

`setScanInterval()` and `setScanWindow()` are used to set the frequency and duration of scans in milliseconds. A scan will start every interval duration, and each scan will last for the scan window duration. The scan window duration should be lesser or equal to the scan interval. Set a short interval to discover devices rapidly, set a long interval to conserve power.

`setScanCallback(scanFunction)` is used to register a function to be called when scan results are received. This can be used to set a user function for additional processing of scan data, such as looking for a specific device. If no function is registered, the scan results are formatted and printed to the serial monitor by default.

`beginCentral(0)` is used to start the Bluetooth stack in Central mode. The argument 0 is used to indicate that no clients will be operating in central mode.

`startScan(5000)` is used to start the scanning process for a specified duration of 5000 milliseconds. The scan will repeat according to the set scan interval and scan window values. After 5000 milliseconds, the scan process will stop, and will be ready to be started again.

BLE –Battery Client

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1

Example

Introduction


BLE connections use a server client model. The server contains the data of interest, while the client connects to the server to read the data. Commonly, a Bluetooth peripheral device acts as a server, while a Bluetooth central device acts as a client. Servers can contain many services, with each service containing a some set of data. Clients can send requests to read or write some data and can also subscribe to notifications so that the server can send data updates to a client.

In this example, a basic battery client is set up on the Ameba Bluetooth stack. The client connects to another Ameba board running the corresponding BLE battery service to read the battery level data.

Procedure

On the first Ameba board, upload the BLEBatteryService example code and let it run.

For the second Ameba board, open the example “Files” -> “Examples” -> “AmebaBLE” -> “BLEBatteryClient” .

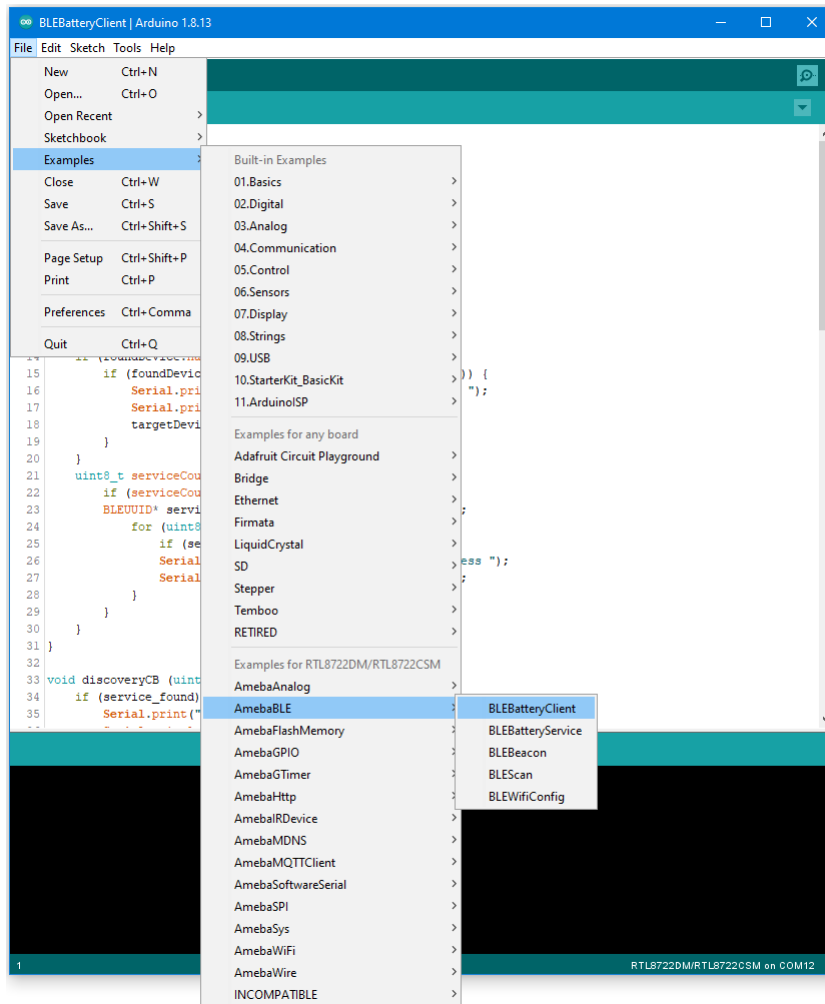

Upload the code and press the reset button on Ameba once the upload is finished.

Open the serial monitor and observe the log messages as the Ameba board with the battery client scans, connects, and reads data from the Ameba board with the battery service.

```

COM9
DD#calibration_OK:[2:19:11]
interface 0 is initialized
interface 1 is initialized

Initializing WIFI ...
WIFI initialized
[BLE Device] Local BT addr: 70:1d:08:0b:fe:d2
[BLE Device] GAP scan start
Found Ameba BLE Device at address 70:1D:08:0B:DD:DB
Found Battery Service at address 70:1D:08:0B:DD:DB
[BLE Device] GAP scan stop
[BLE Device] Connected conn_id 0
BLE connected to device at 0
Battery service found on connection id: 0
Battery level read callback for connection id: 0 Battery level: 90
Notifications Enabled
Notification received for connection id: 0 Battery level: 9
Notification received for connection id: 0 Battery level: 10
Notification received for connection id: 0 Battery level: 11
Notification received for connection id: 0 Battery level: 12
Notification received for connection id: 0 Battery level: 13
Battery level read callback for connection id: 0 Battery level: 90
Notification received for connection id: 0 Battery level: 14
Notification received for connection id: 0 Battery level: 15
Notification received for connection id: 0 Battery level: 16
Notification received for connection id: 0 Battery level: 17
Notification received for connection id: 0 Battery level: 18
Notifications Disabled
Autoscroll Show timestamp Newline 115200 baud Clear output

```

Highlighted in yellow, the Ameba board with the battery client first scans for advertising BLE devices with the advertised device name “AMEBA_BLE_DEV” and the advertised service UUID of 0x180F representing the battery service.

After finding the target device, the Ameba board with the battery client forms a BLE connection and searches for a battery service on the connected device, highlighted in blue.

With the client connected to the service, the battery client begins to read data using both regular data reads and notifications, highlighted in green.

Code Reference

BLEClient is used to create a client object to discover services and characteristics on the connected device.

- `setNotifyCallback()` is used to register a function that will be called when a battery level notification is received.
- `BLE.configClient()` is used to configure the Bluetooth stack for client operation.
- `addClient(connID)` creates a new BLEClient object that corresponds to the connected device.

BLE –WiFi Configuration Service

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Android / iOS mobile phone

Example

Introduction

In this example, a WiFi configuration service is set up on the Ameba Bluetooth stack. A mobile phone with the configuration app connects to the Ameba device using BLE and configures the Ameba to connect to the correct WiFi access point.


Procedure

Ensure that the Realtek WiFi configuration app is installed on your mobile phone, it is available at:

–Google Play Store: <https://play.google.com/store/apps/details?id=com.rtk.btconfig>


–Apple App Store: <https://apps.apple.com/sg/app/easy-wifi-config/id1194919510>

Open the example, “Files” -> “Examples” -> “AmebaBLE” -> “BLEWifiConfigService” .

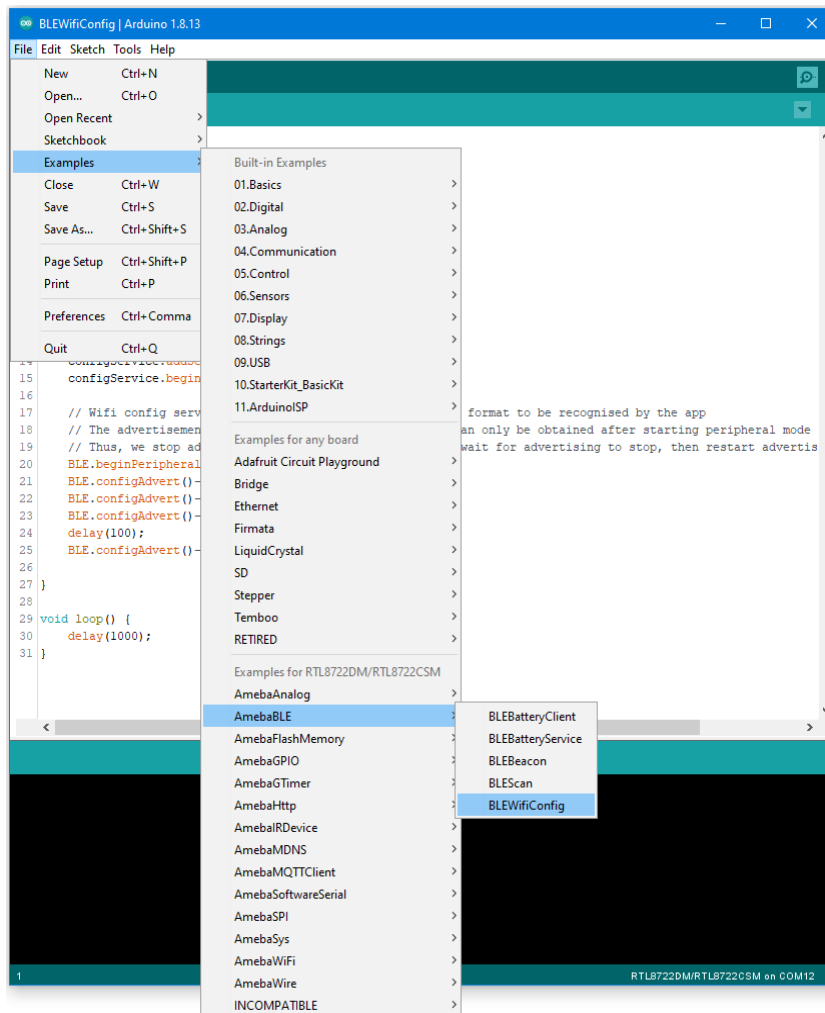


Upload the code and press the reset button on Ameba once the upload is finished.


On your mobile phone, open the Realtek WiFiConfig app and tap the round button to scan for Ameba boards.

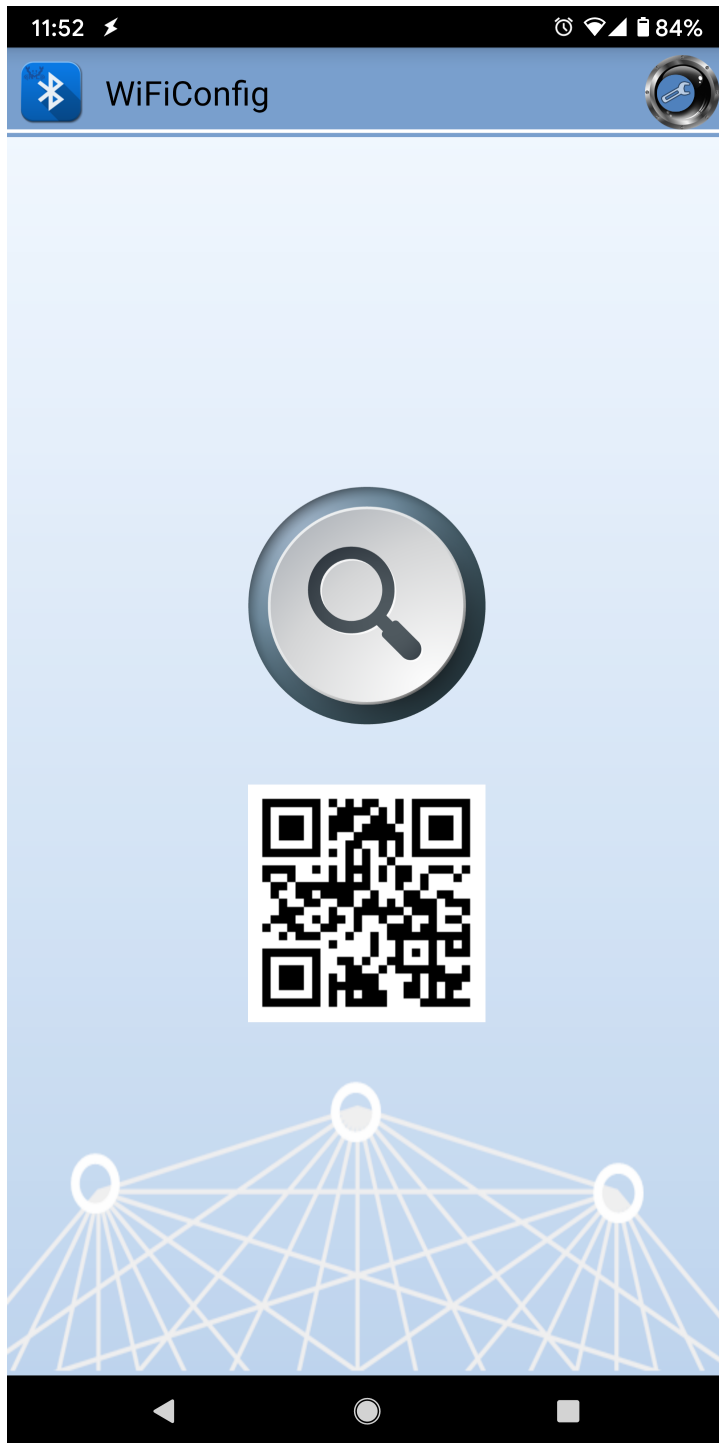


Select the correct Ameba board from the scan results. The app will connect to the Ameba board and ask the board to scan for WiFi networks and send the scan results back to the app using BLE.



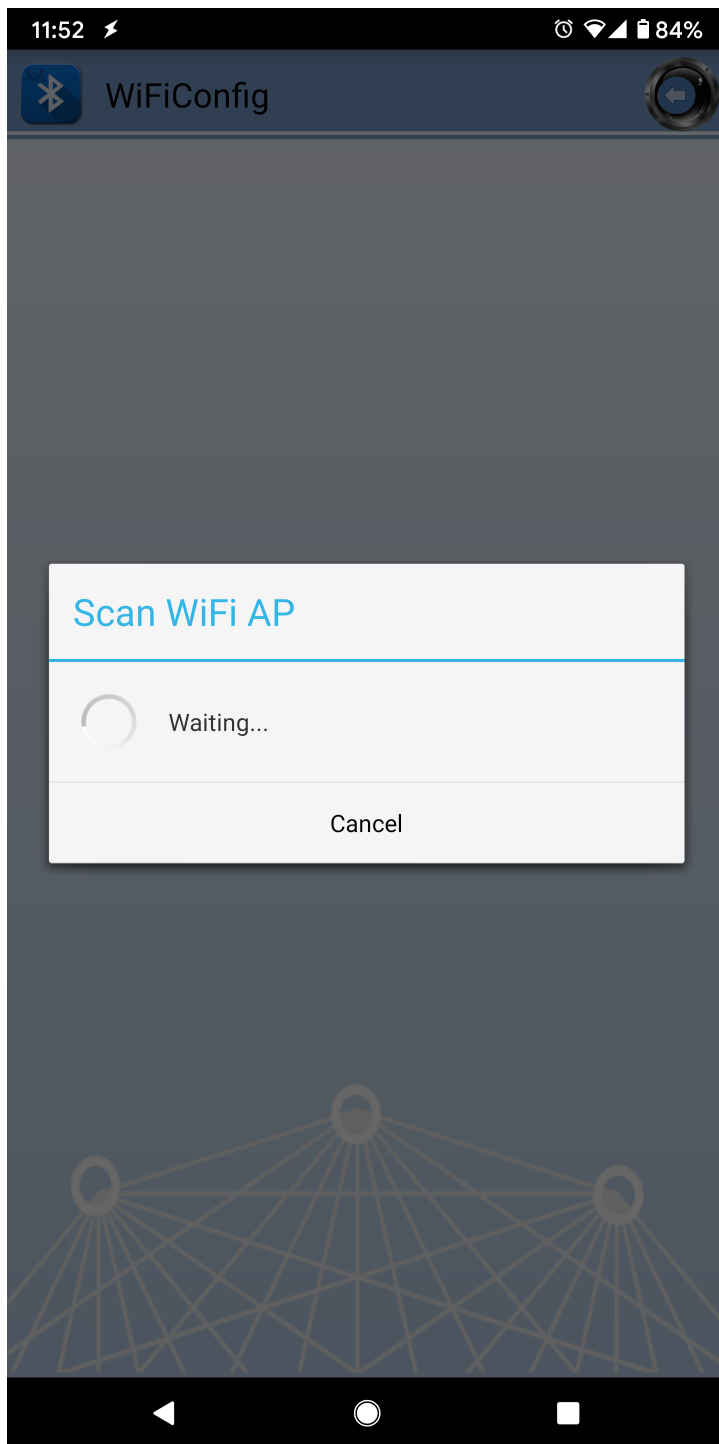


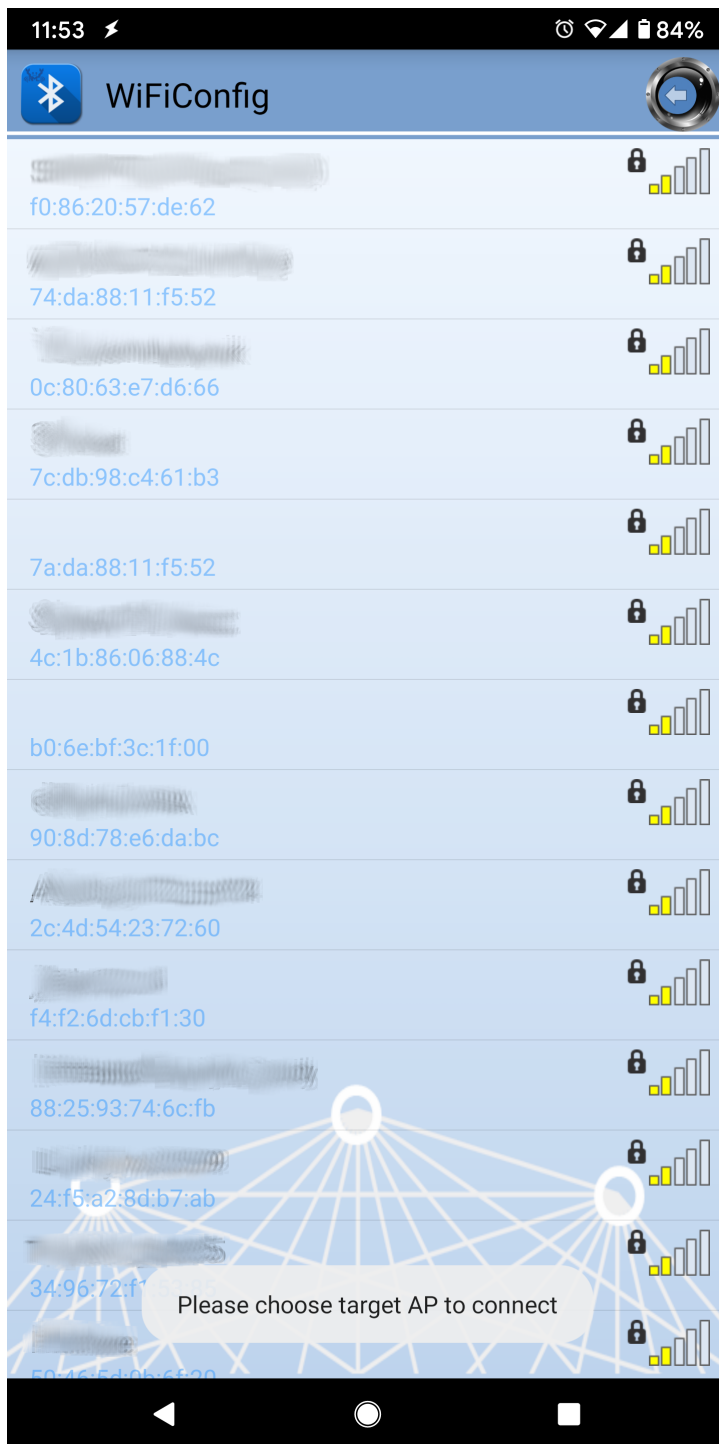

If your phone is currently connected to a WiFi network, the app will ask for the WiFi password to connect the Ameba board to the same WiFi network. Tap “Select AP” to choose another WiFi network, or enter the password and tap continue to connect Ameba to the selected WiFi network.

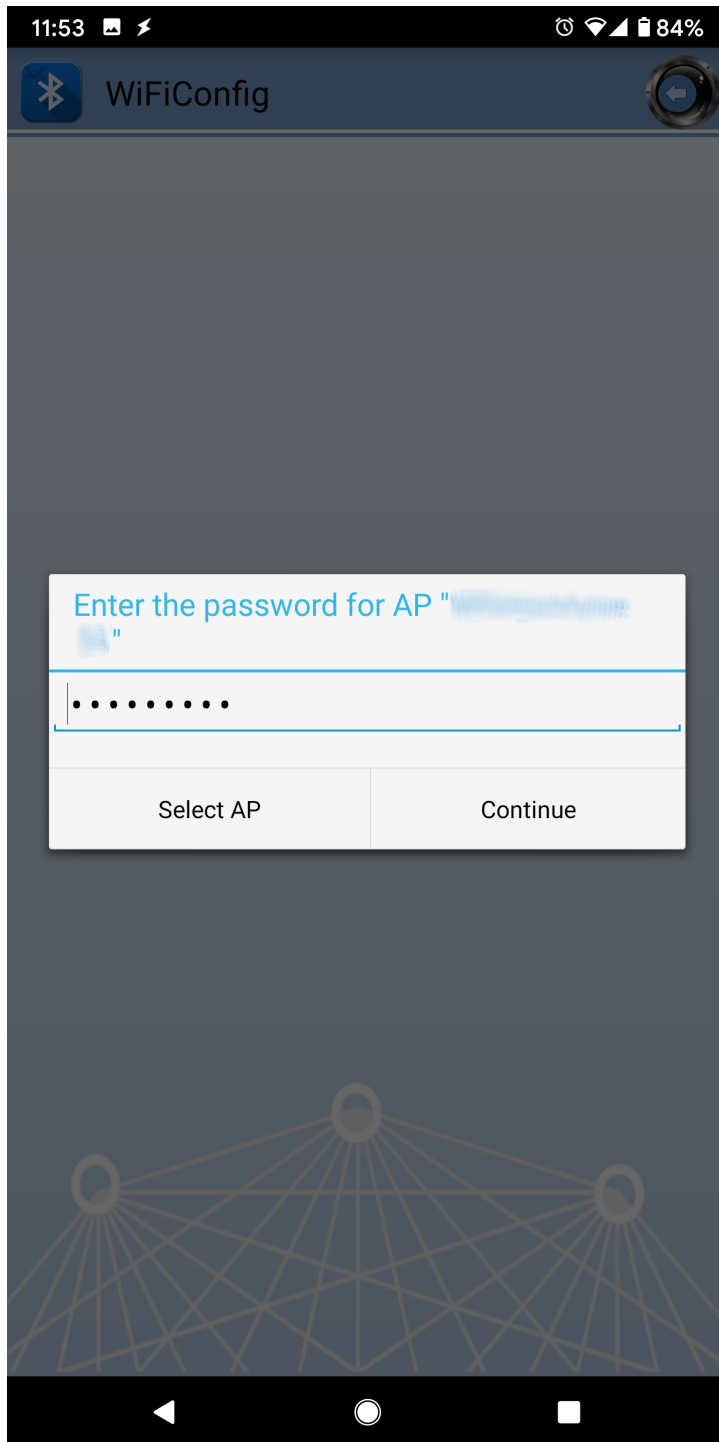

After the Ameba board connects to the WiFi network, the following message will be shown. Tap “Try another AP” to connect to another WiFi network or tap “Confirm” to keep the current WiFi network and disconnect BLE from the Ameba board.

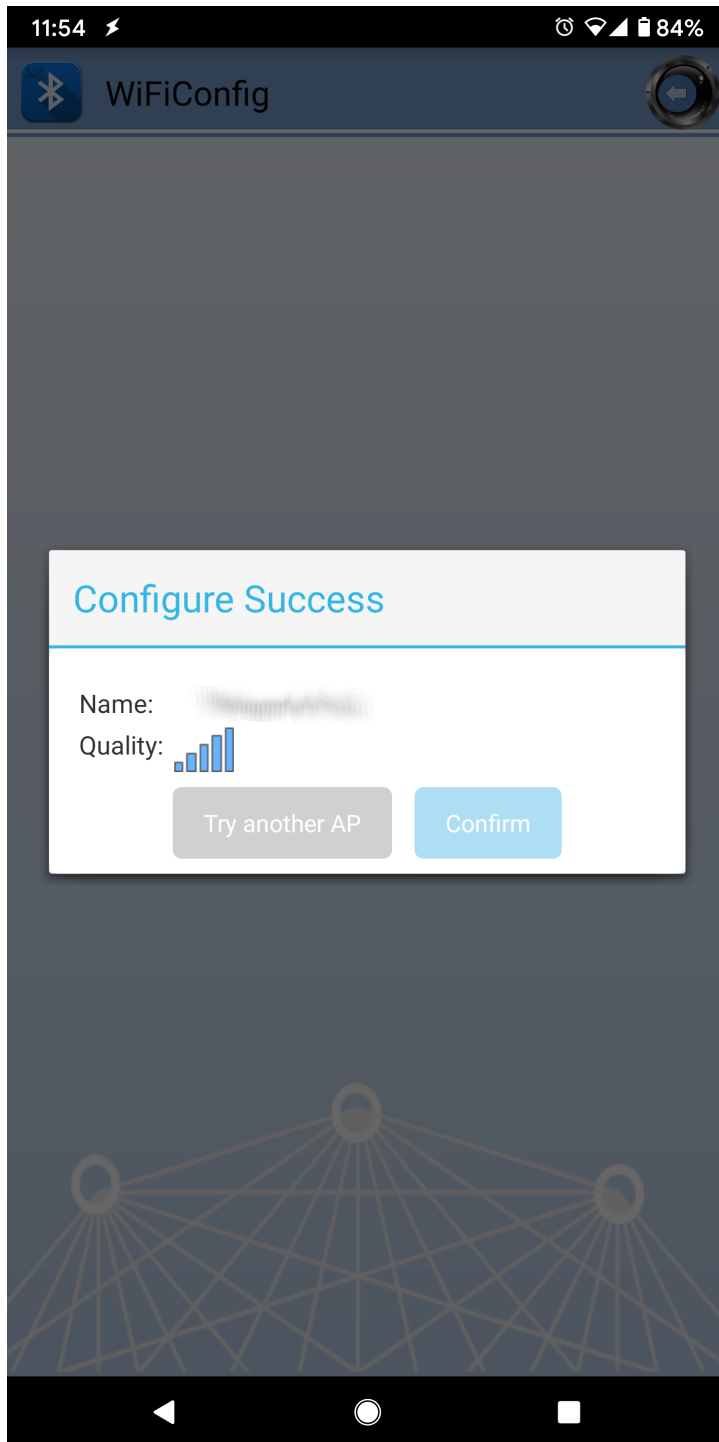

Code Reference

`BLEWifiConfigService` is used to create an instance of the WiFi configuration service to run on the Bluetooth device.

`BLE.configAdvert() -> setAdvType(configService.advData())` is used to set the correct advertisement data necessary for the phone app to find the Ameba Bluetooth device.

BLE –BLE UART Client

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 2

Example

Introduction


In this example, two RTL8722 boards are connected using BLE. One board runs a BLE UART service, while the other connects to the service using a client and both boards are able to communicate with text messages over the UART service.

Procedure

On the first board, upload the BLE UART service example code. Refer to the example guide for detailed instructions.


For the second board, open the example, “Files” -> “Examples” -> “AmebaBLE” -> “BLEUartClient”

.

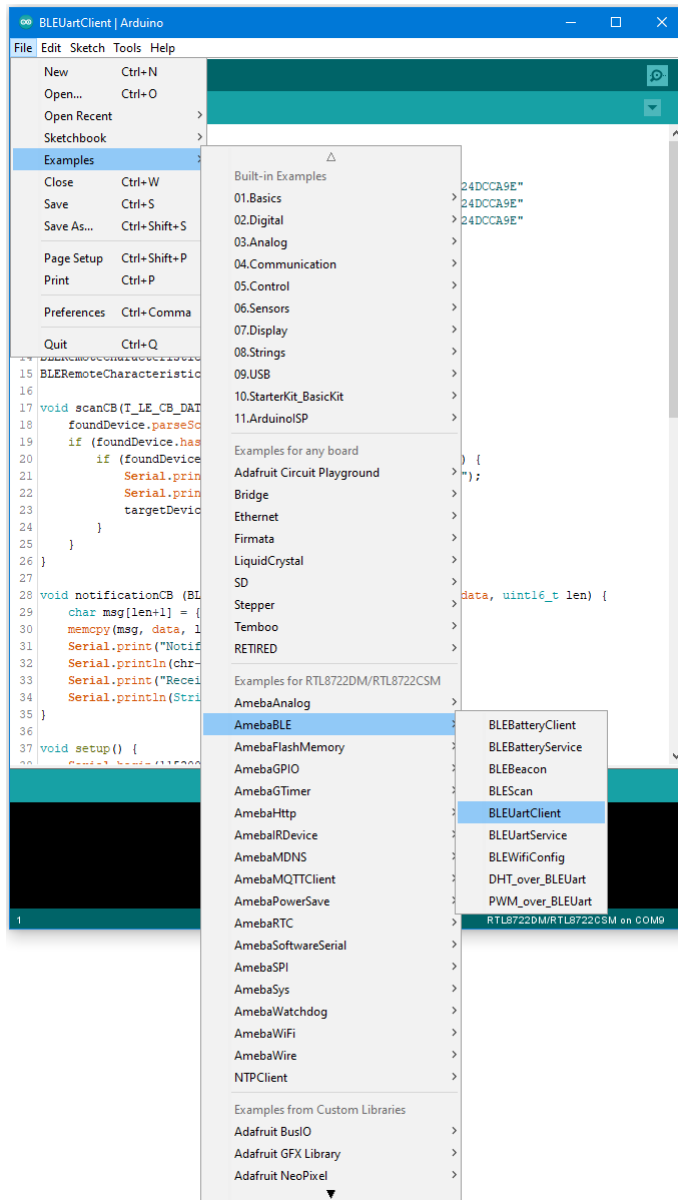

Upload the code and press the reset button on Ameba once the upload is finished.

Reset the UART service board first, wait for the BLE advertisement process to begin, and reset the UART client board. The client board should scan, discover, and connect to the service board. After connecting, the client board will verify that the correct UART service exists on the service board, before enabling notifications on the TX characteristic. Any message typed in the serial terminal will be sent to the other board using the UART service.

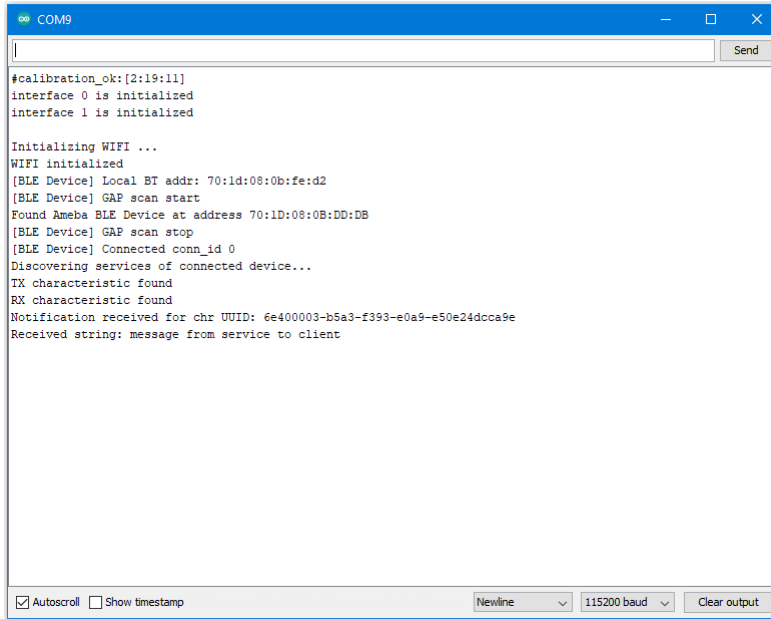

```
#calibration_ok:[2:19:11]
interface 0 is initialized
interface 1 is initialized

Initializing WIFI ...
WIFI initialized
[BLE Device] Local BT addr: 70:1d:08:0b:fe:d2
[BLE Device] GAP scan start
Found Ameba BLE Device at address 70:1D:08:0B:DD:DB
[BLE Device] GAP scan stop
[BLE Device] Connected conn_id 0
Discovering services of connected device...
TX characteristic found
RX characteristic found
Notification received for chr UUID: 6e400003-b5a3-f393-e0a9-e50e24dcca9e
Received string: message from service to client
```

Code Reference

The `BLEClient` class is used to discover the services that exist on a connected BLE device. The discovery process will create `BLERemoteService`, `BLERemoteCharacteristic` and `BLERemoteDescriptor` objects corresponding to the services, characteristics and descriptors that exist on the connected device. These objects can then be used to read and write data to the connected device.

BLE –BLE UART Service

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Android / iOS smartphone

Example

Introduction

With BLE, application data is sent and received using the GATT system. GATT uses services, characteristics, and attributes to organise data and control how the data can be read from and written to. The Bluetooth SIG specification for BLE includes several predefined services for common applications, but users are free to implement custom services and characteristics to best fit their data structure and application needs

In this example, the `BLEService` and `BLECharacteristic` classes are used to implement a custom service for transmitting ASCII characters similar to regular UART. This custom service is the Nordic UART Service, which is supported in several smartphone apps.

Procedure

Ensure that a compatible BLE UART app is installed on your smartphone, it is available at:

–Google Play Store:


<https://play.google.com/store/apps/details?id=com.adafruit.bluefruit.le.connect>

https://play.google.com/store/apps/details?id=de.kai_morich.serial_bluetooth_terminal

–Apple App Store:


<https://apps.apple.com/us/app/bluefruit-connect/id830125974>


Open the example, “Files” -> “Examples” -> “AmebaBLE” -> “BLEUartService” .

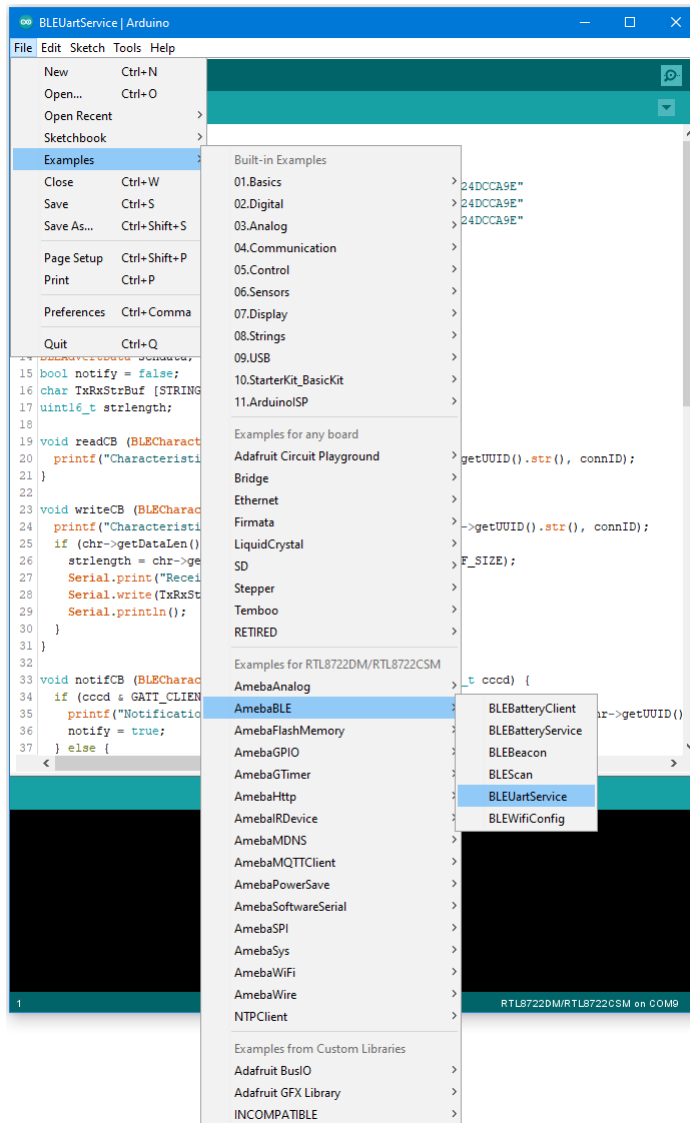

Upload the code and press the reset button on Ameba once the upload is finished.

Open the app on your smartphone, scan and connect to the Ameba board shown as “AMEBA_BLE_DEV” and choose the UART function in the app. Note that the BLE UART service on the Ameba board will only work with the UART and Plotter functions in the Bluefruit Connect app, other functions (Pin I/O, Image Transfer) require other BLE services that are not included in this example.

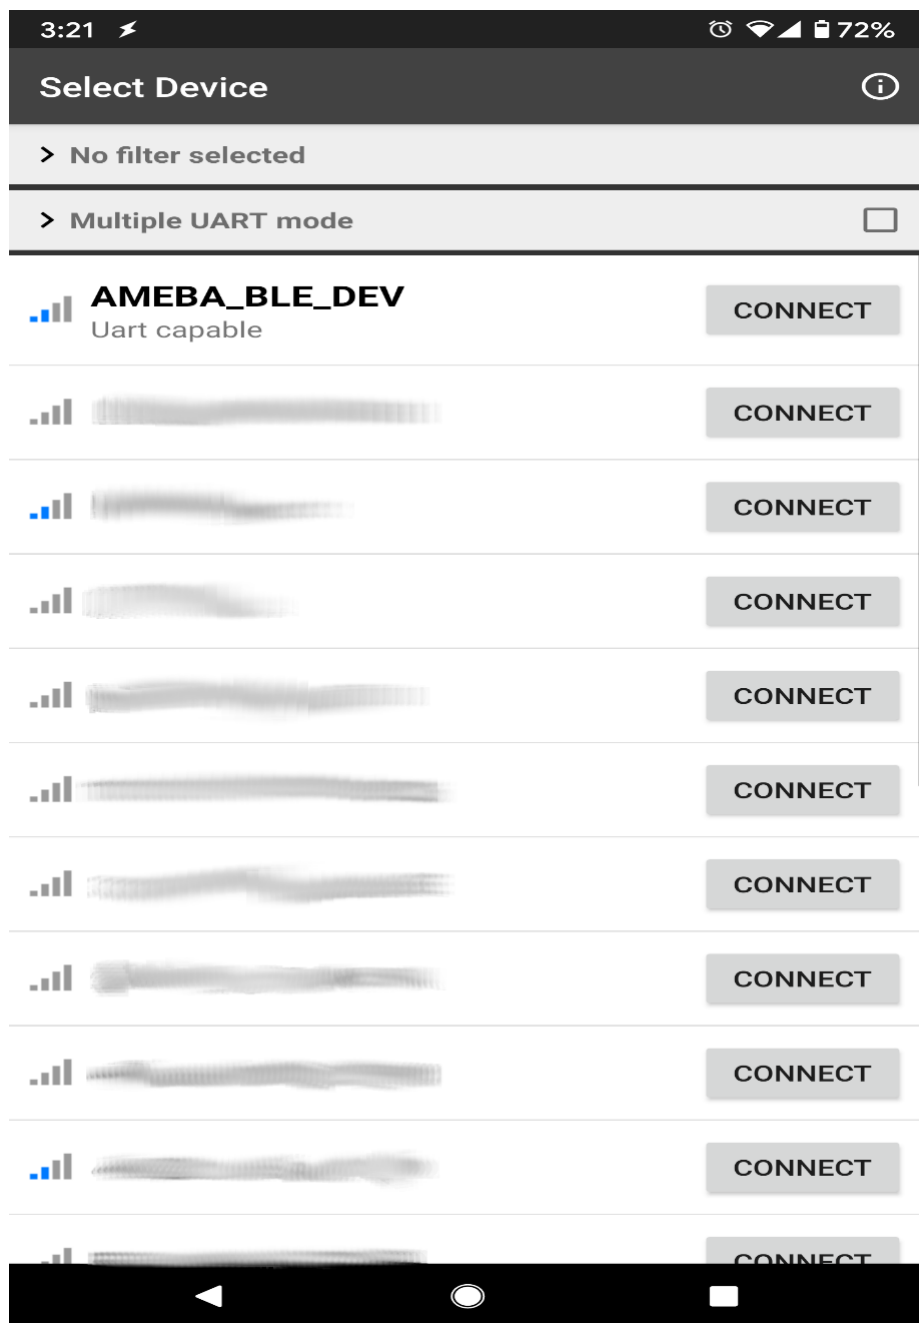

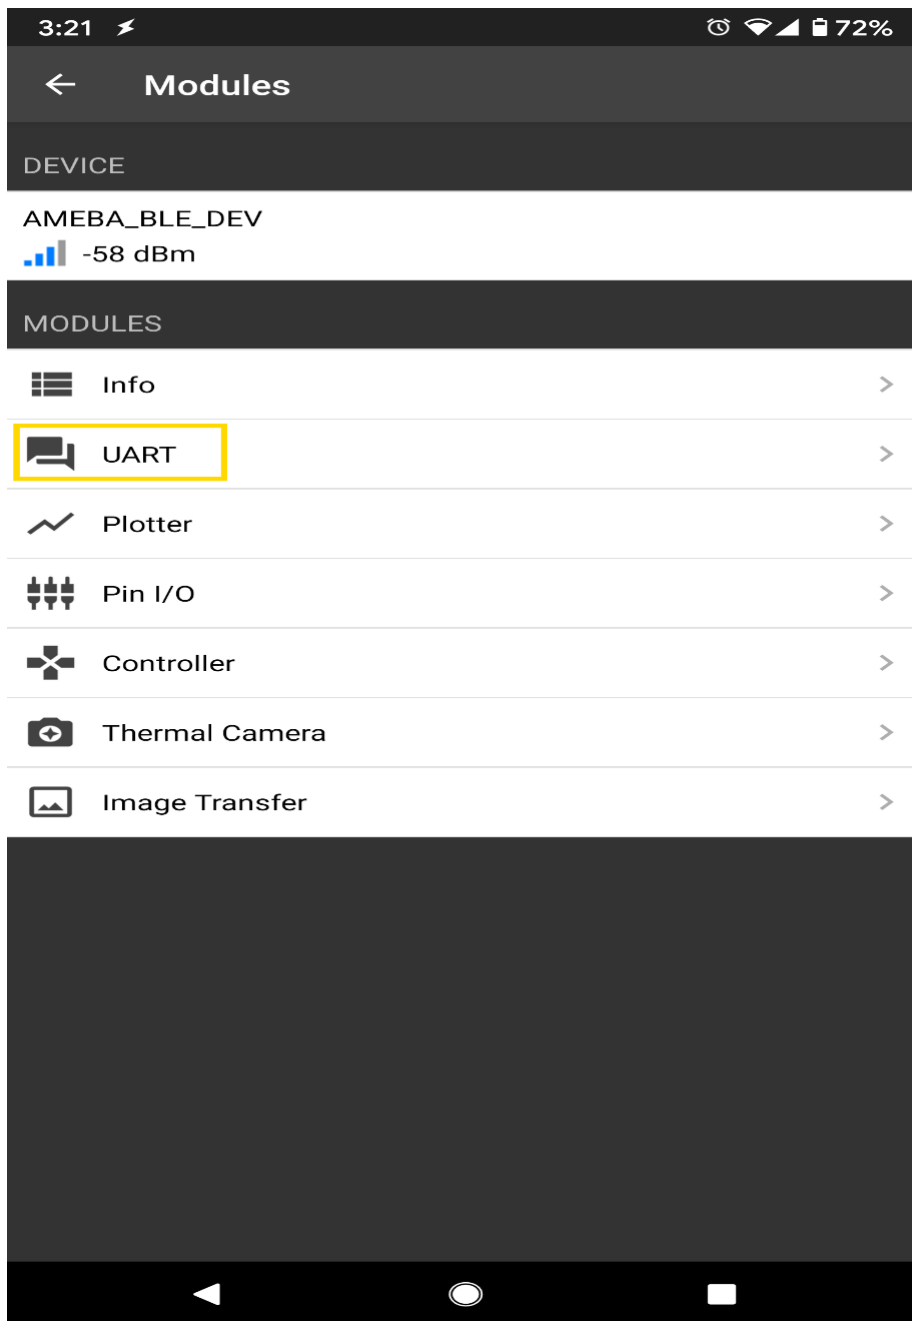


In the UART terminal section of the app, enter a message and click send. You should see the message appear in the Arduino serial monitor.

In the Arduino serial monitor, enter a message and click send. The message will appear in the smartphone app.



message from app to Ameba
message from Ameba to smartphone app

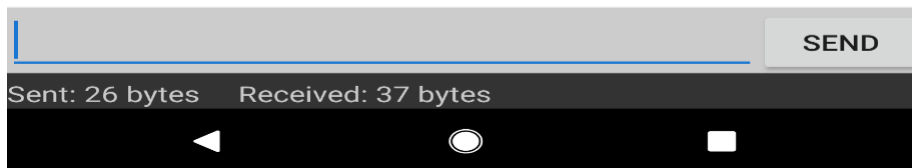

```

COM9
#calibration_ok:[2:19:11]
interface 0 is initialized
interface 1 is initialized

Initializing WIFI ...
WIFI initialized
[BLE Device] Local BT addr: 70:1d:08:0b:ferd2
[BLE Device] GAP adv start
[BLE Device] GAP adv stopped: because connection created
[BLE Device] BT Connected
Notifications enabled on Characteristic 6e400003-b5a3-f393-e0a9-e50e24dcca9e for connection 0
Characteristic 6e400002-b5a3-f393-e0a9-e50e24dcca9e write by connection 0 :
Received string: message from app to Ameba

```

Code Reference

The `BLECharacteristic` class is used to create two characteristics, one for receive (Rx) and one for transmit (Tx), and added to a service created with the `BLEService` class.

The required read/write/notify properties are set for each characteristic using the `set__Property()` methods, and callback functions are registered using the `set__Callback()` methods. The required buffer size is also set for each characteristic so that it has enough memory to store a complete string.

When data is written to the receive characteristic, the registered callback function is called, which prints out the received data as a string to the serial monitor.

When data is received on the serial port, it is copied into the transmit characteristic buffer, and the `notify()` method is used to inform the connected device of the new data.

BLE –DHT over BLE UART

Materials

- AmebaD [RTL8722DM/ RTL8722CSM/ RTL8722DM MINI] x 1
- DHT11 or DHT22 or DHT21
- Android / iOS smartphone

Example


Introduction

In this example, the data obtained from a DHT temperature and humidity sensor are transmitted over a BLE UART service to a smartphone. Refer to the other examples for detailed explanations of using the DHT sensor and the BLE UART service.


Procedure

Connect the DHT sensor to the Ameba board following the diagram.

RTL8722DM / RTL8722CSM:

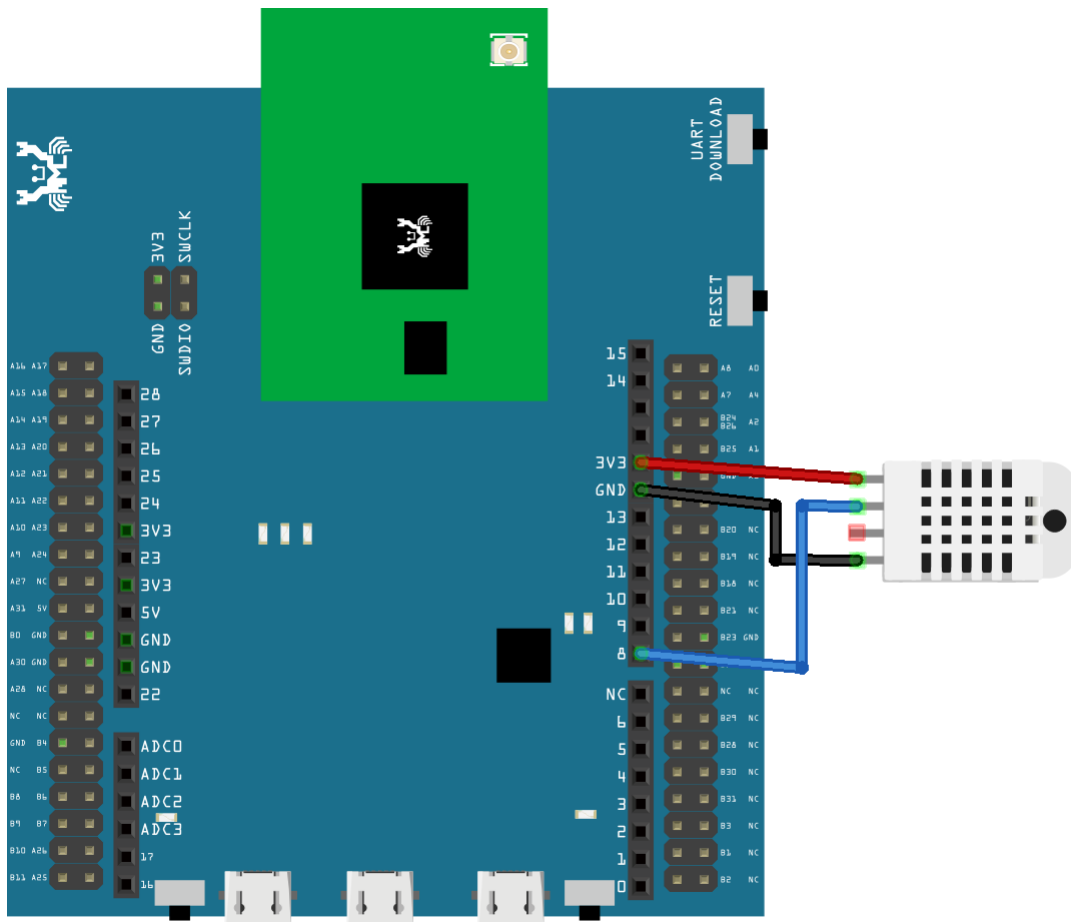

RTL8722DM MINI:

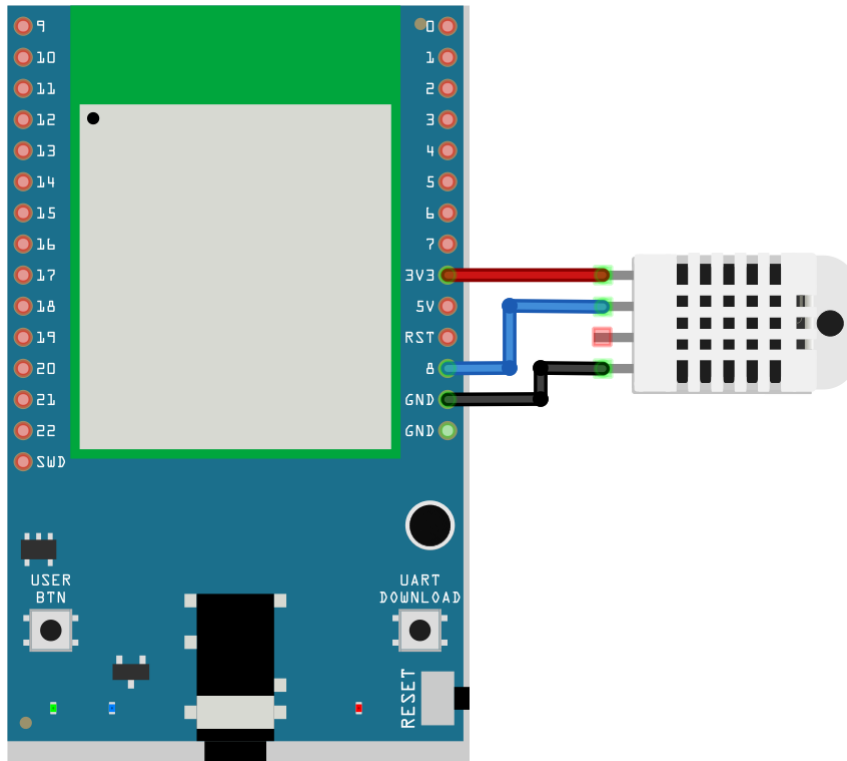

Ensure that a compatible BLE UART app is installed on your smartphone, it is available at:

- Google Play Store:

<https://play.google.com/store/apps/details?id=com.adafruit.bluefruit.le.connecta>>https://play.google.com/store/apps/details?id=de.kai_morich.serial_bluetooth_terminal

- Apple App Store:

<https://apps.apple.com/us/app/bluefruit-connect/id830125974>

Open the example, “Files” -> “Examples” -> “AmebaBLE” -> “DHT_over_BLEUart” .


```


DHT_over_BLEUart
1 |
2 #include "BLEDevice.h"
3 #include "DHT.h"
4
5 #define UART_SERVICE_UUID "6E400001-B5A3-F393-E0A9-E50E24DCCA9E"
6 #define CHARACTERISTIC_UUID_RX "6E400002-B5A3-F393-E0A9-E50E24DCCA9E"
7 #define CHARACTERISTIC_UUID_TX "6E400003-B5A3-F393-E0A9-E50E24DCCA9E"
8
9 #define STRING_BUF_SIZE 100
10
11 // The digital pin we're connected to.
12 #define DHTPIN 8
13
14 // Uncomment whatever type you're using!
15 #define DHTTYPE DHT11 // DHT 11
16 // #define DHTTYPE DHT22 // DHT 22 (AM2302), AM2321
17 // #define DHTTYPE DHT21 // DHT 21 (AM2301)
18
19 DHT dht(DHTPIN, DHTTYPE);
20
21 BLEService UartService(UART_SERVICE_UUID);
22 BLECharacteristic Rx(CHARACTERISTIC_UUID_RX);
23 BLECharacteristic Tx(CHARACTERISTIC_UUID_TX);
24 BLEAdvertData advdata;
25 BLEAdvertData scndata;
26 bool notify = false;
27 char TxRxStrBuf [STRING_BUF_SIZE] = {0};
28 uint16_t strlength;
29
30 void writeCB (BLECharacteristic* chr, uint8_t connID) {
31     printf("Characteristic %s write by connection %d :\n", chr->getUUID().str(), connID);
32     if (chr->getDataLen() > 0) {
33         strlength = chr->getData((uint8_t*)TxRxStrBuf, STRING_BUF_SIZE);
34         Serial.print("Received string: ");
35         Serial.write(TxRxStrBuf, strlength);
36         Serial.println();
37     }
38 }
39
40 void notifyCB (BLECharacteristic* chr, uint8_t connID, uint16_t cccid) {
41     if (cccid & GATT_CLIENT_CHAR_CONFIG_NOTIFY) {
42         printf("Notifications enabled on Characteristic %s for connection %d \n", chr->getUUID().str(), connID);
43     }
44 }

```



Upload the code and press the reset button on Ameba once the upload is finished.

Open the app on your smartphone, scan and connect to the Ameba board shown as “AMEBA_BLE_DEV” and choose the UART function in the app.

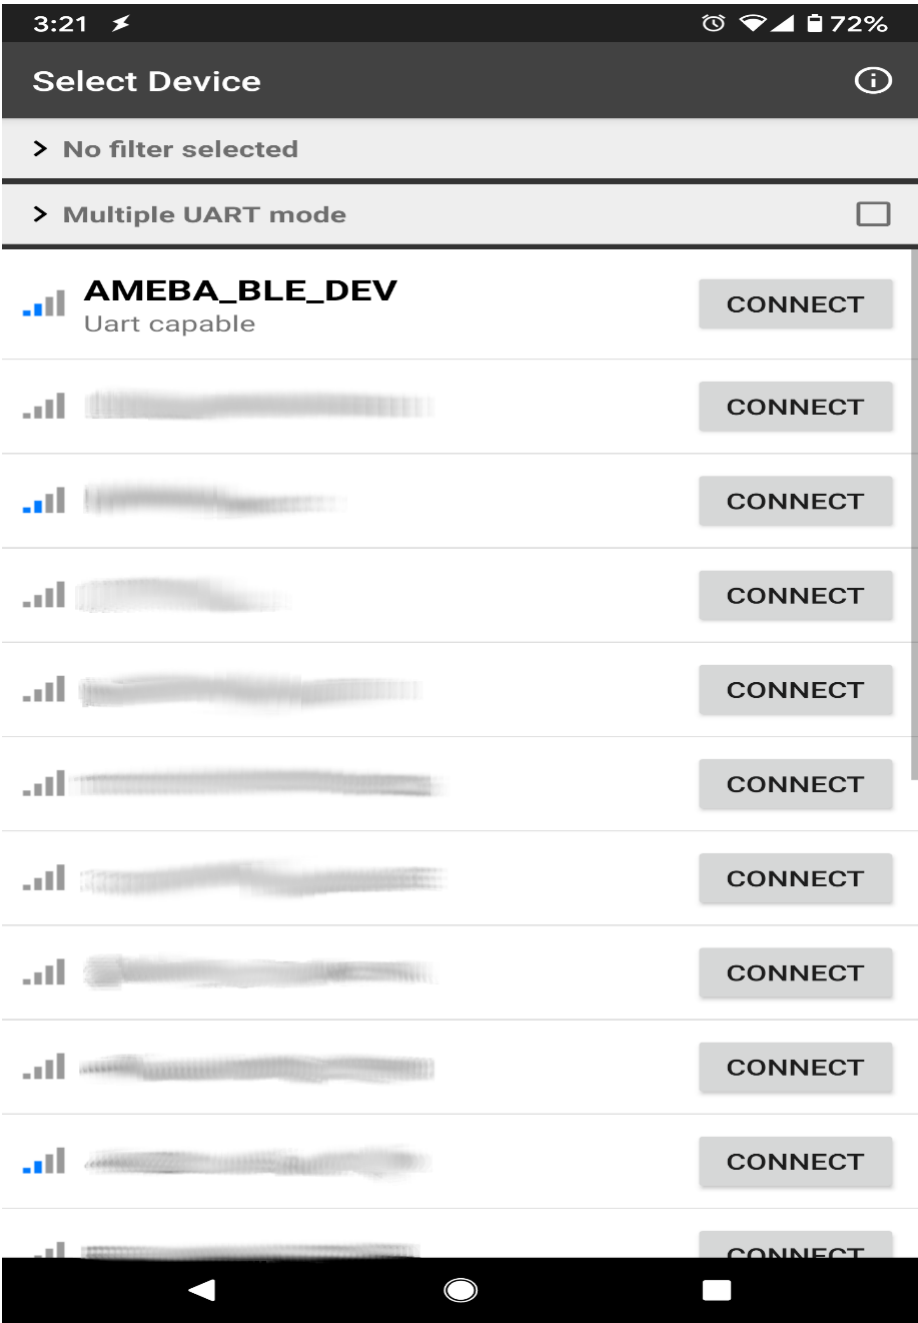

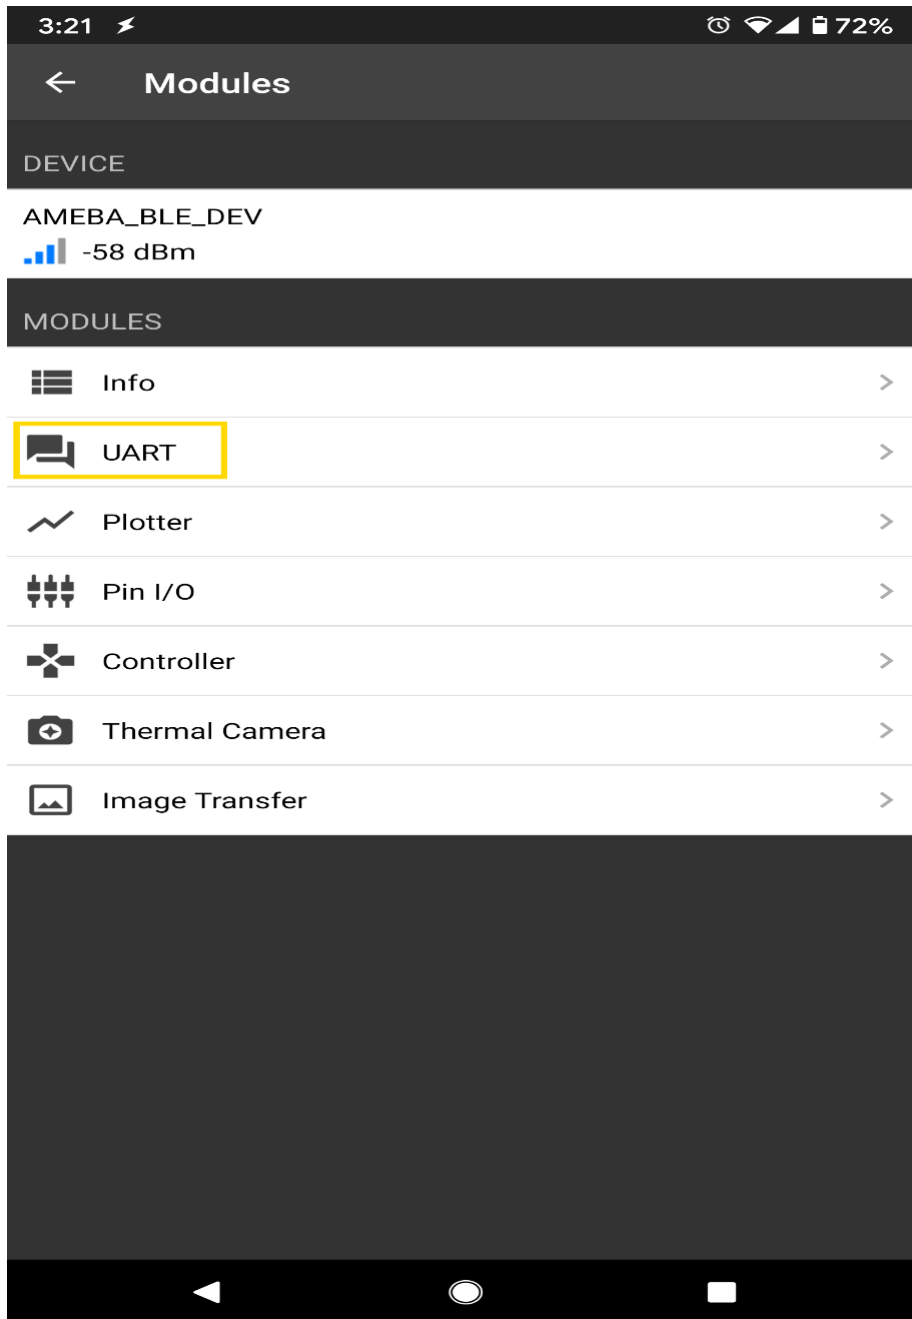

After starting the UART function, notifications should be received every 5 seconds containing the measured temperature and humidity.

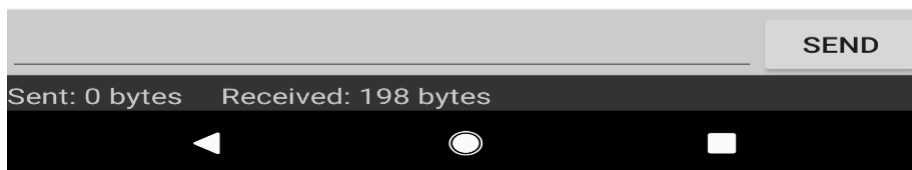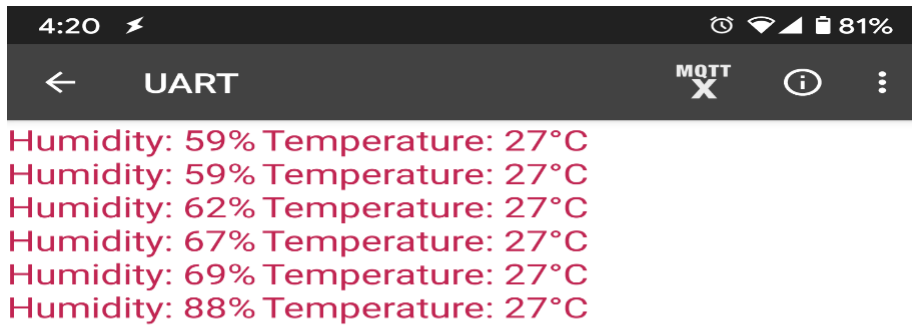

BLE –PWM over BLE UART

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- RGB LED

- Android / iOS smartphone

Example


Introduction

In this example, a smartphone app is used to transmit commands over BLE UART to control the PWM outputs and change the color of a RGB LED. Refer to the other example guides for detailed explanations of the BLE UART service.


Procedure

Connect the RGB LED to the RTL8722 board following the diagram, the common LED pin may need to connect to 3.3V or GND depending on the type of LED (common anode / common cathode).

RTL8722DM / RTL8722CSM:

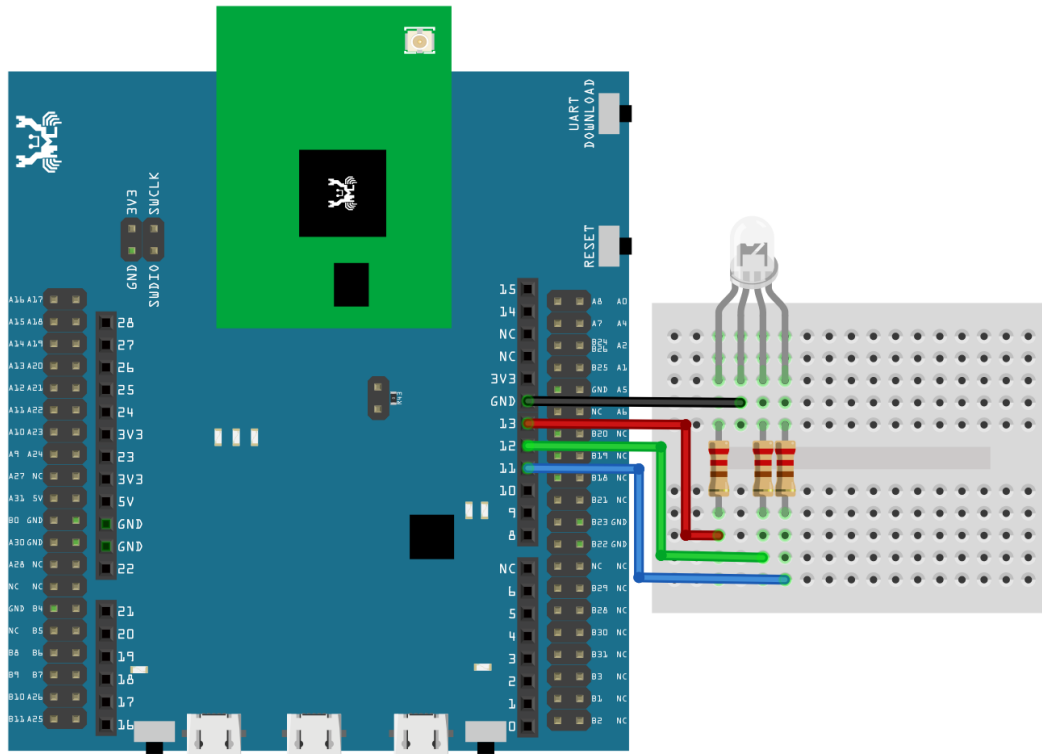

RTL8722DM MINI:

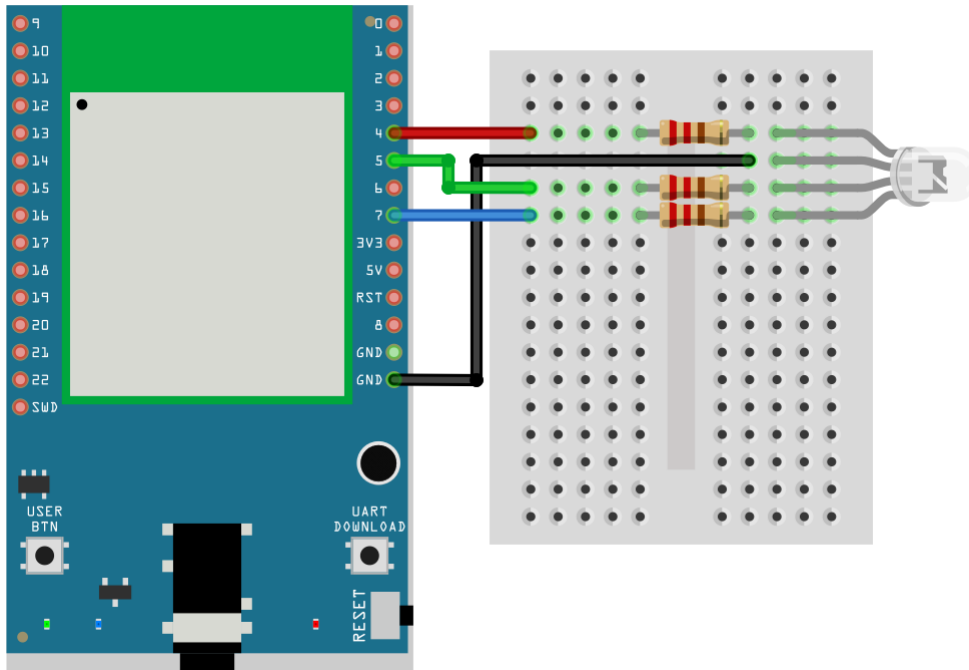

Ensure that the required app is installed on your smartphone, it is available at:

–Google Play Store:


<https://play.google.com/store/apps/details?id=com.adafruit.bluefruit.le.connect>

–Apple App Store:


<https://apps.apple.com/us/app/bluefruit-connect/id830125974>


Open the example, “Files” -> “Examples” -> “AmebaBLE” -> “PWM_over_BLEUart” .


Upload the code and press the reset button on Ameba once the upload is finished.

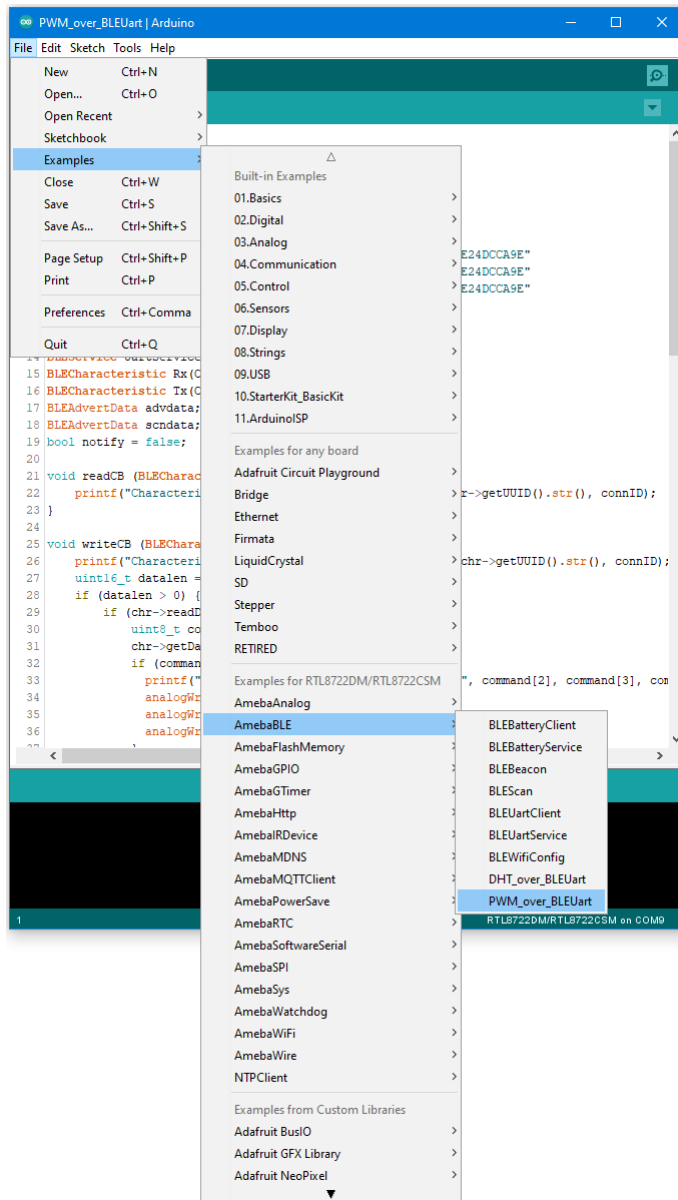


Open the app on your smartphone, scan and connect to the board shown as “AMEBA_BLE_DEV” and choose the controller -> color picker function in the app.

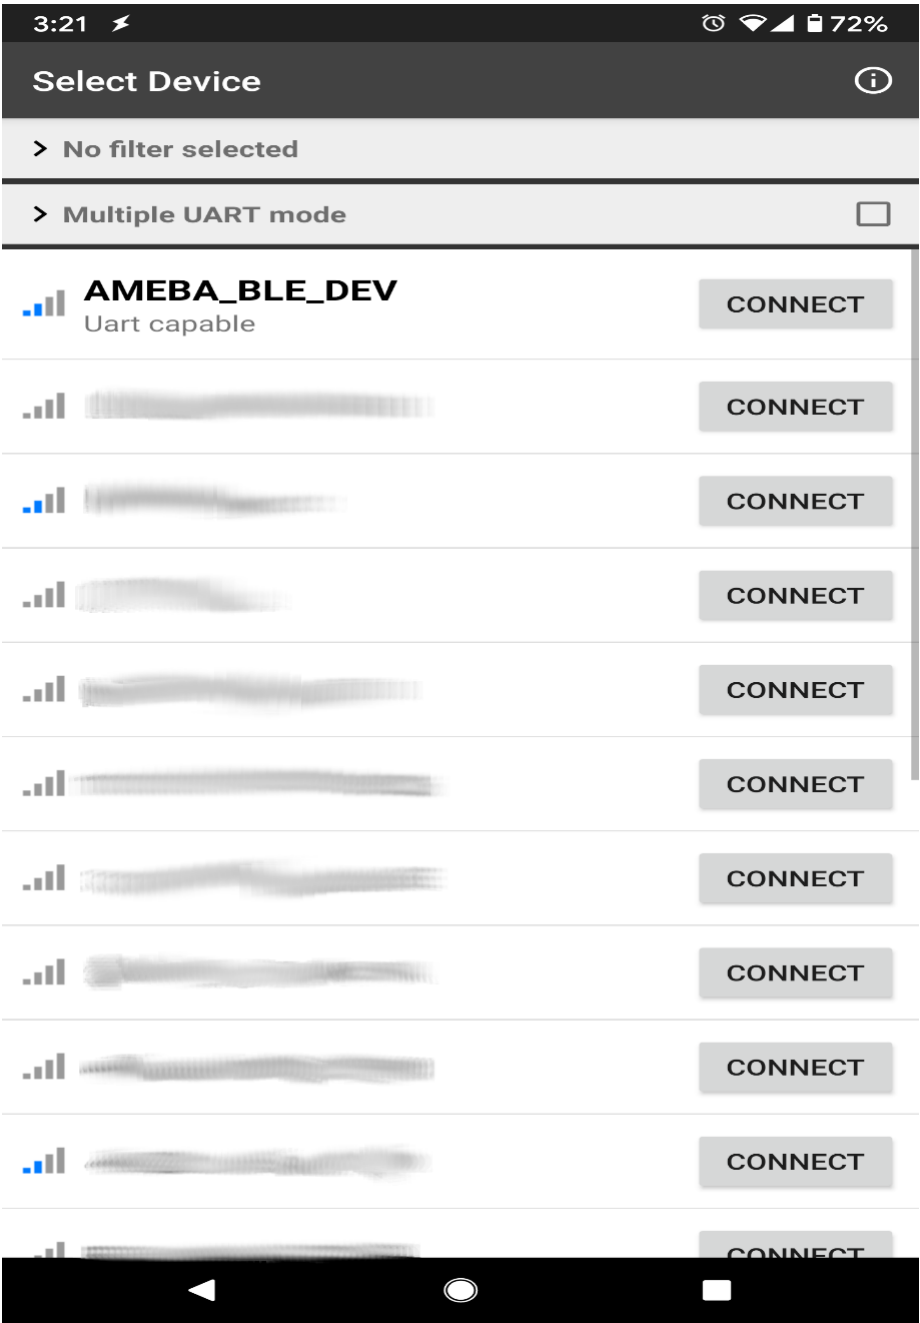

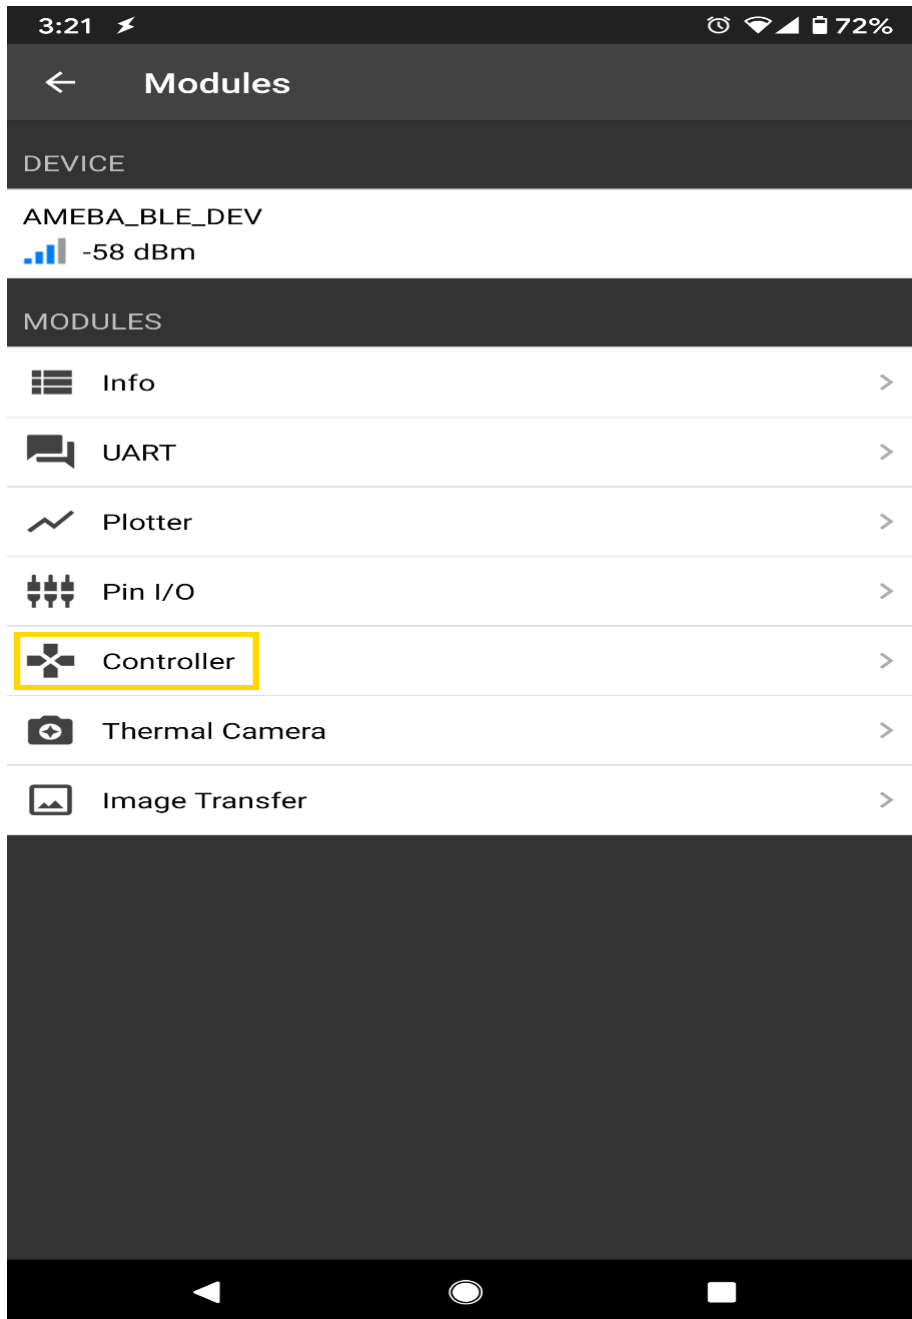

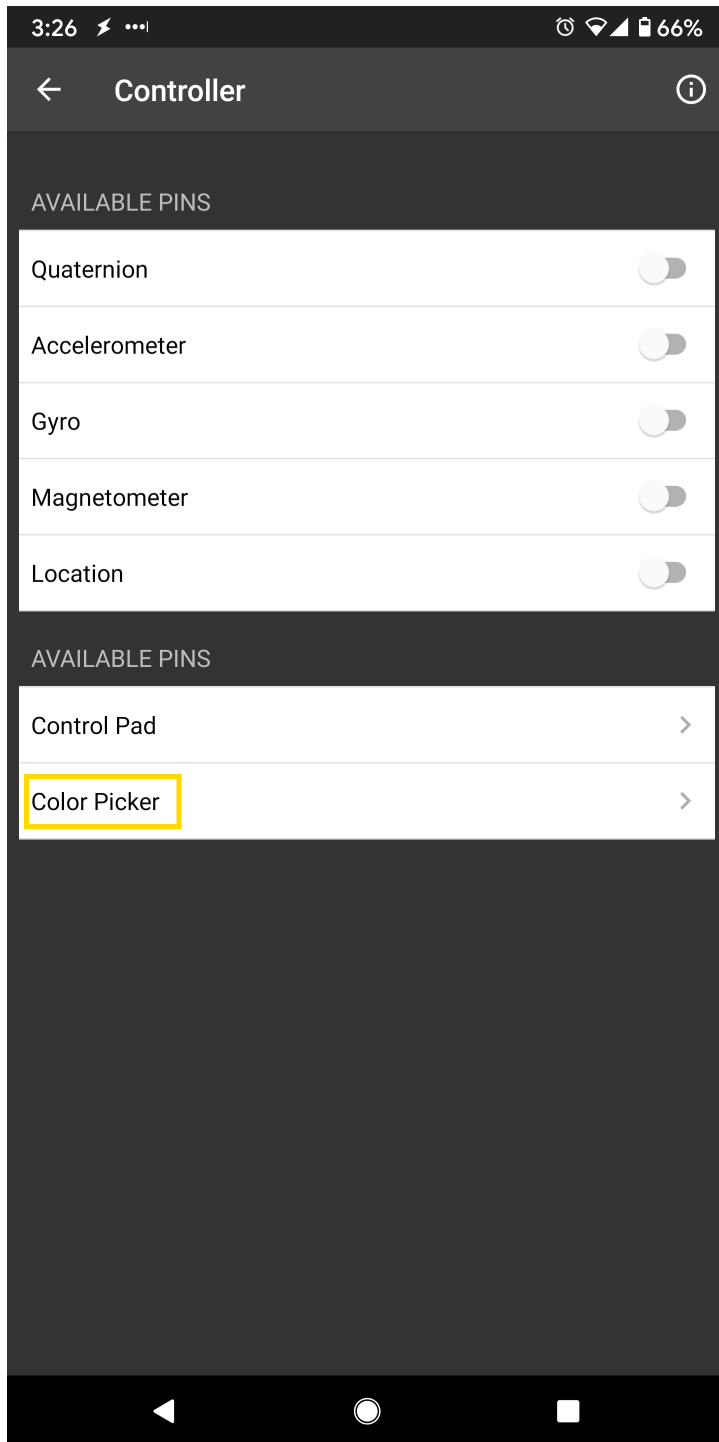

Using the color selection wheel, saturation, and brightness sliders, choose a desired color and click select to send the RGB values to the board. You should see the RGB LED change to the matching color.

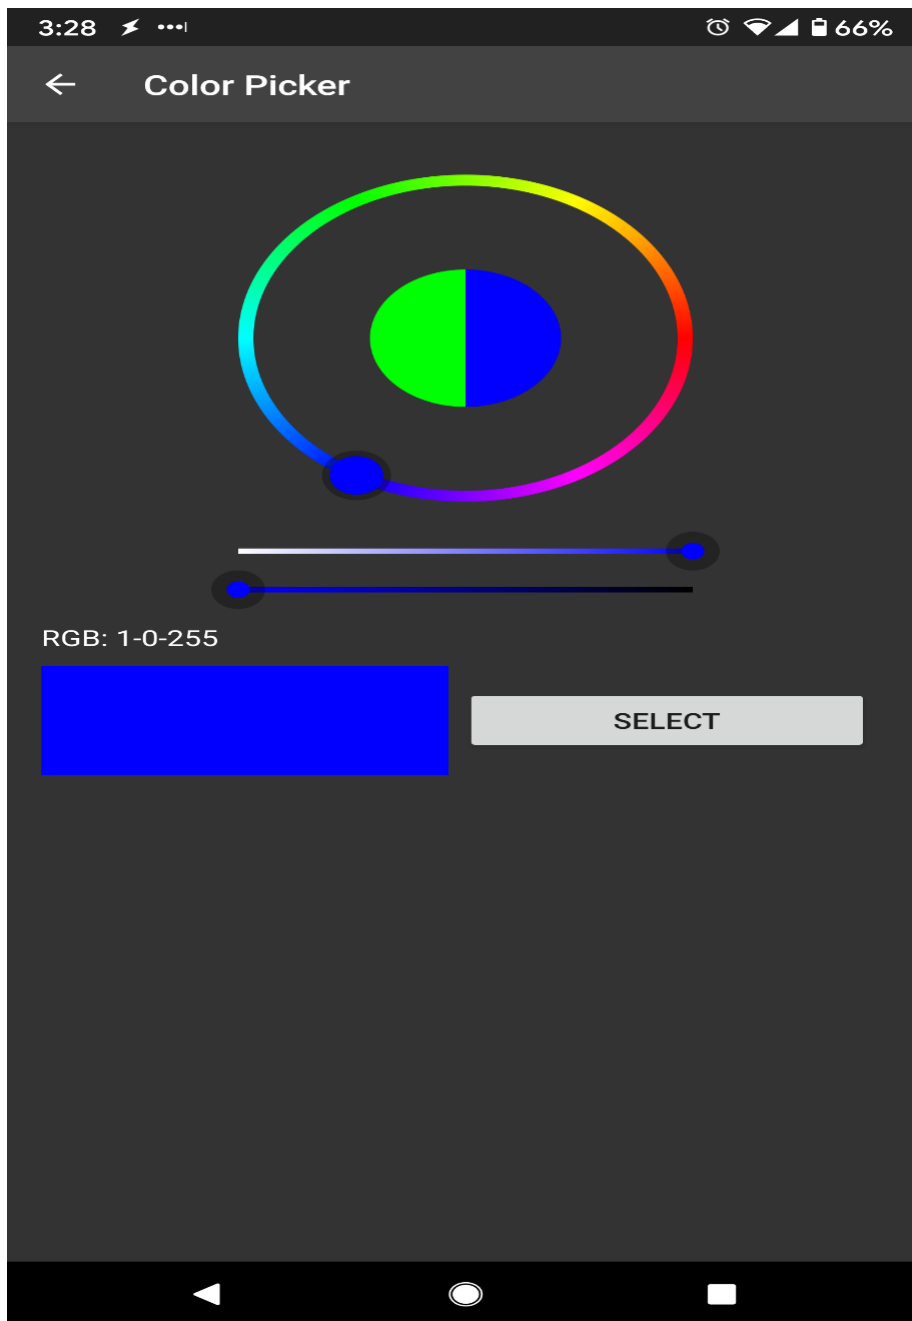

Code Reference

The RGB values are sent as three consecutive bytes prefixed by “!C” characters. The “!” exclamation mark is used to indicate that the following data is a command, and the “C” character is used to indicate that the data is RGB values. The received UART message is checked in the callback function for “!C” first, otherwise it is treated as a regular message and printed to the serial terminal.

BLE - HID Gamepad

Materials

- AmebaD [RTL8722DM/RTL8722CSM/RTL8722DM MINI] x 1
- BLE capable host device [Windows / Linux / MacOS / Android]


Example

Introduction

In this example, the RTL8722 board emulates a HID gamepad connected using BLE.

Procedure

Open the example, “Files” -> “Examples” -> “AmebaBLE” -> BLEHIDGamepad.

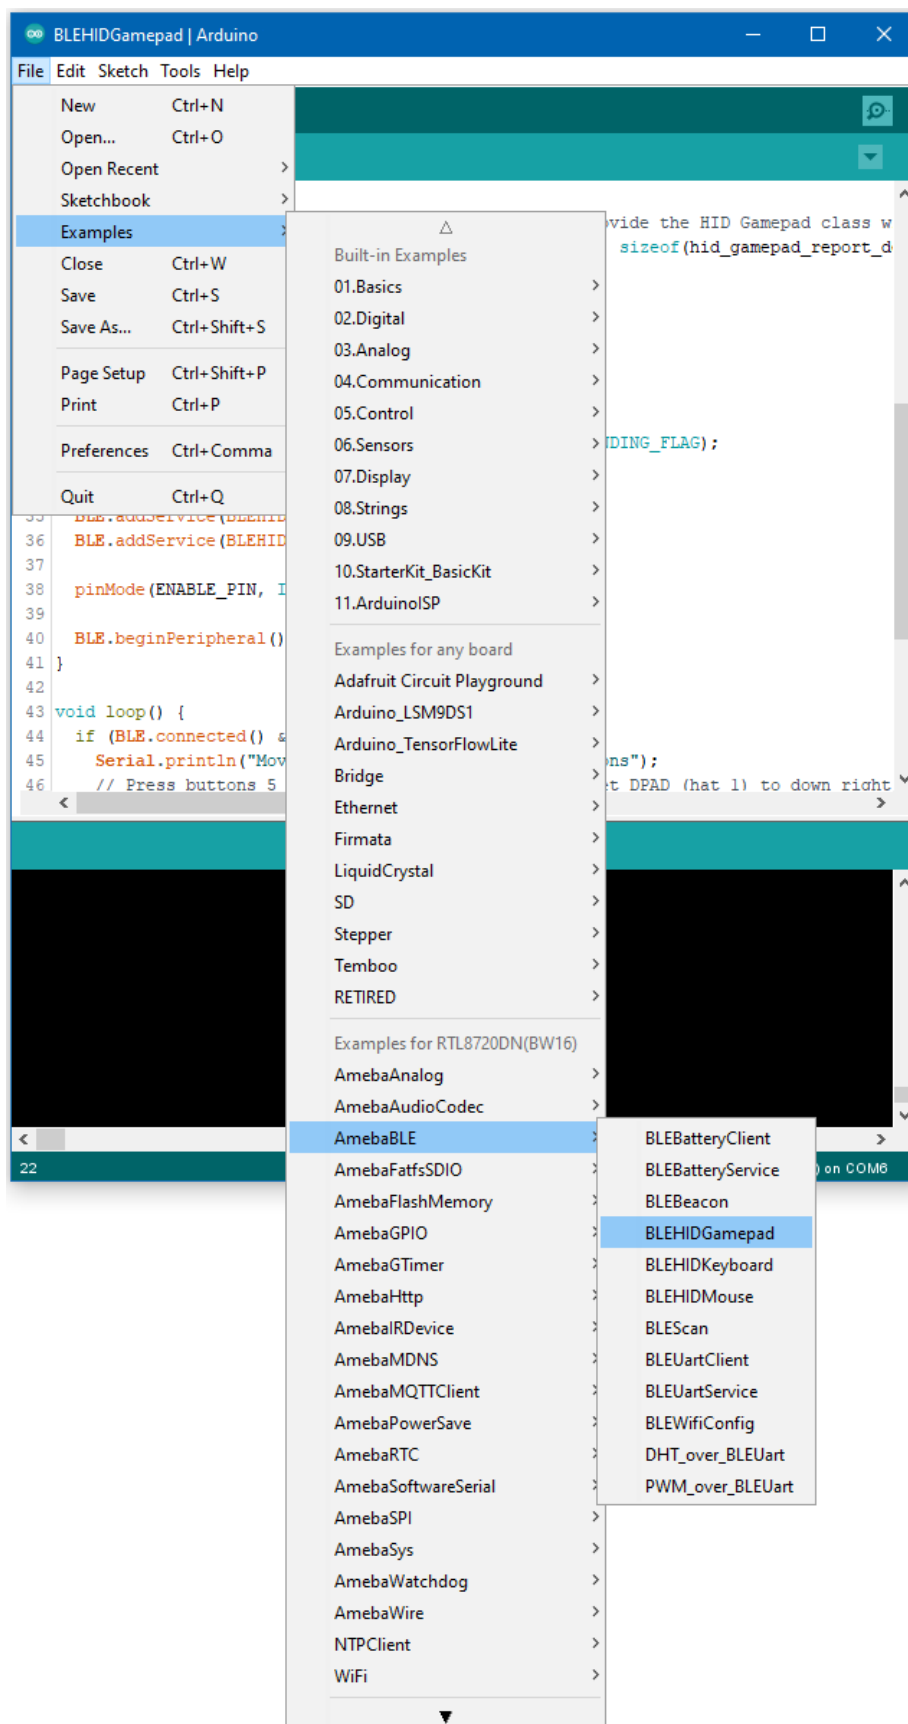


Upload the code and press the reset button once the upload is finished.


Immediately after reset, the board will begin BLE advertising as “AMEBA_BLE_HID” . On your host device, go to the Bluetooth settings menu, scan, and connect to the board.

You should ensure that the connection process is completed before proceeding.

On Windows, ensure that any driver installation is finished, and the board shows up in the Bluetooth menu under the “Mouse, keyboard & pen” category.

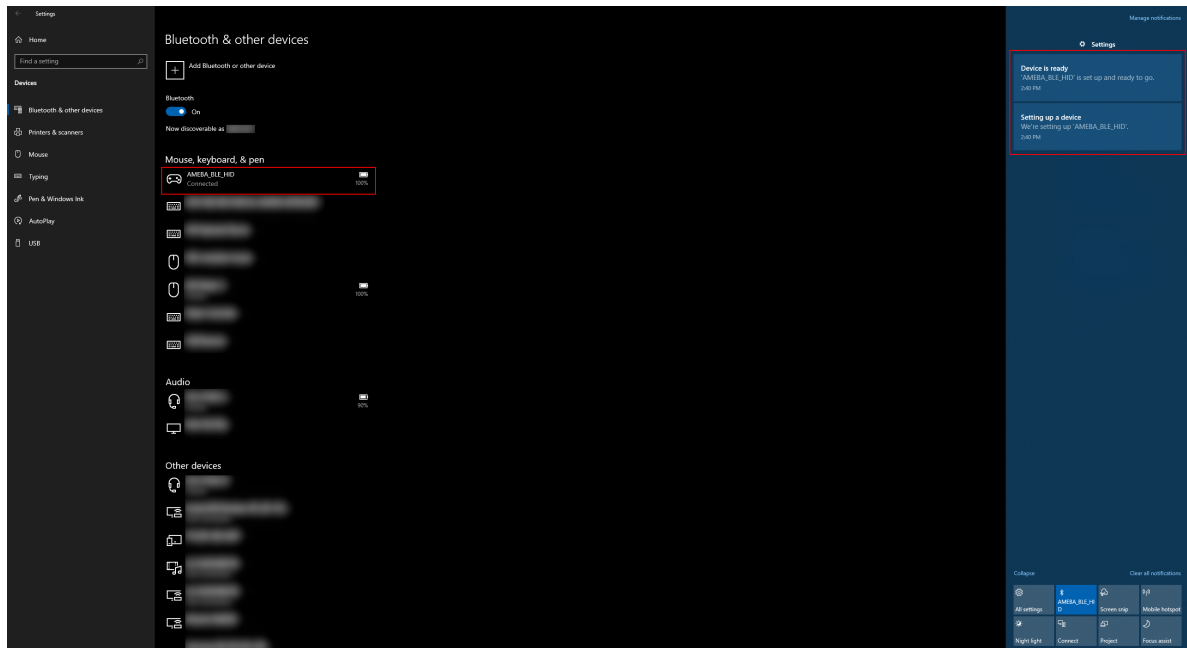


On Android, ensure that “Input device” is enabled for the board.

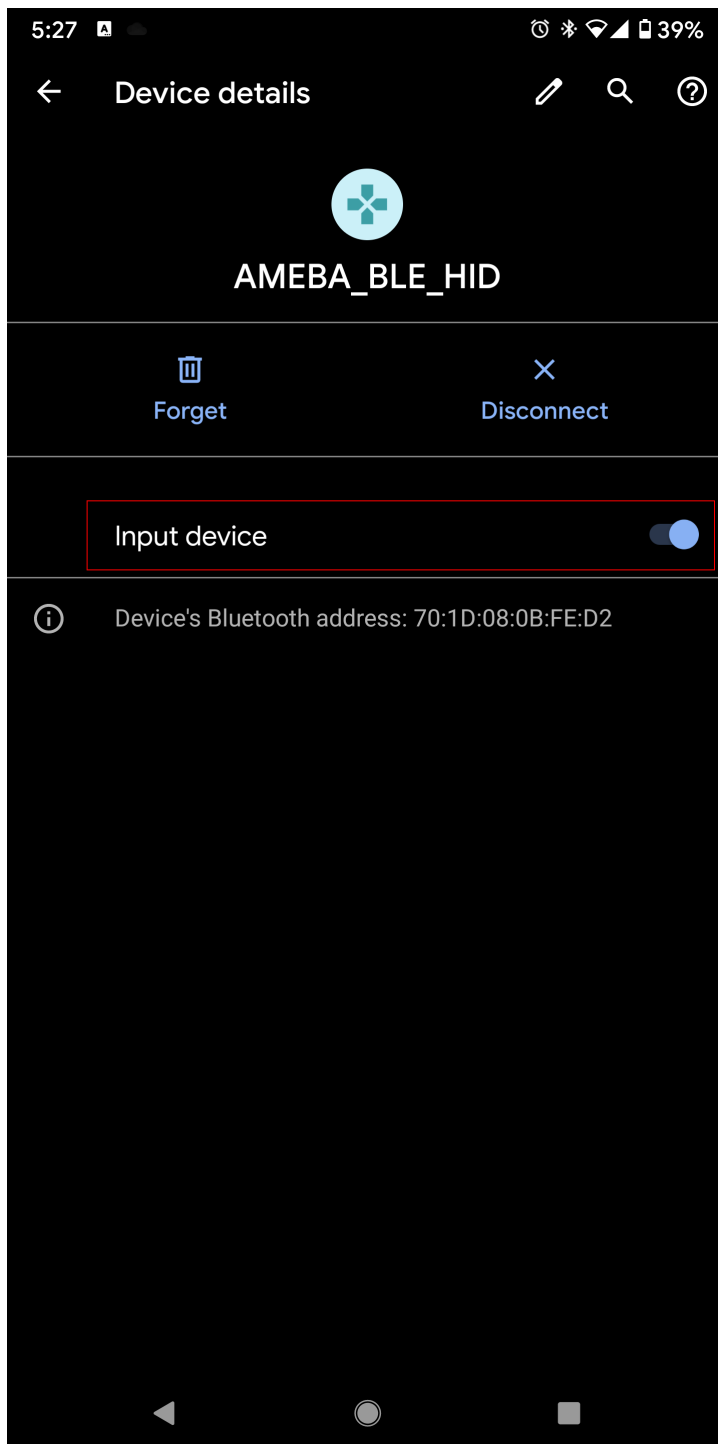



After the Bluetooth connection process is completed, the board is ready to send gamepad input to the host device. Connect digital pin 8 to 3.3V to start sending input, and connect to GND to stop.

To view the input, open a browser window and go to [Gamepad Tester](#). The connected gamepad device should show up here, and some of the buttons and axes should show changing values.

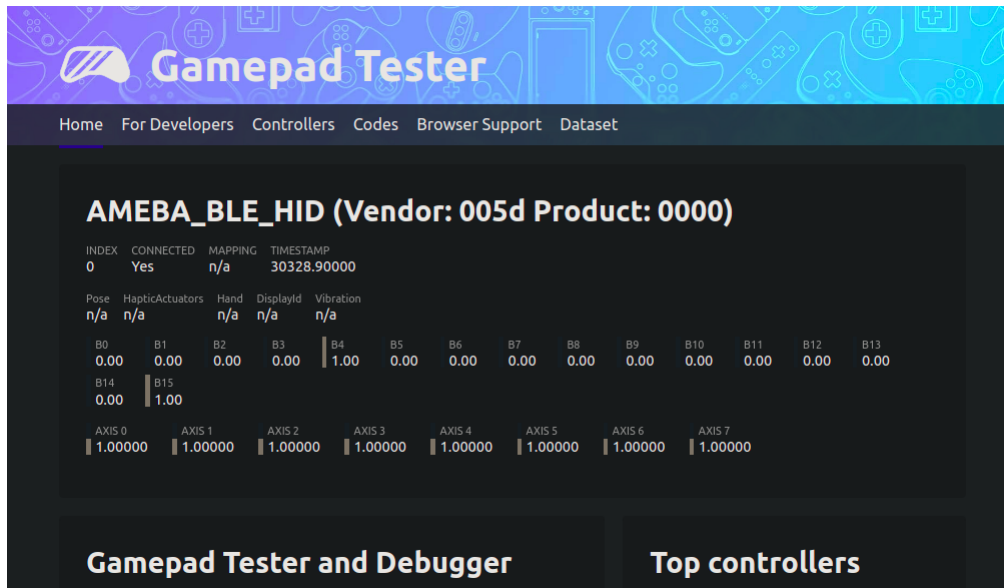


On Windows, gamepad input can also be viewed by going to “Control Panel” -> “Devices and Printers” -> “AMEBA_BLE_HID” -> “Game Controller Settings” -> “Properties”. The buttons and axes should also show changing values here.

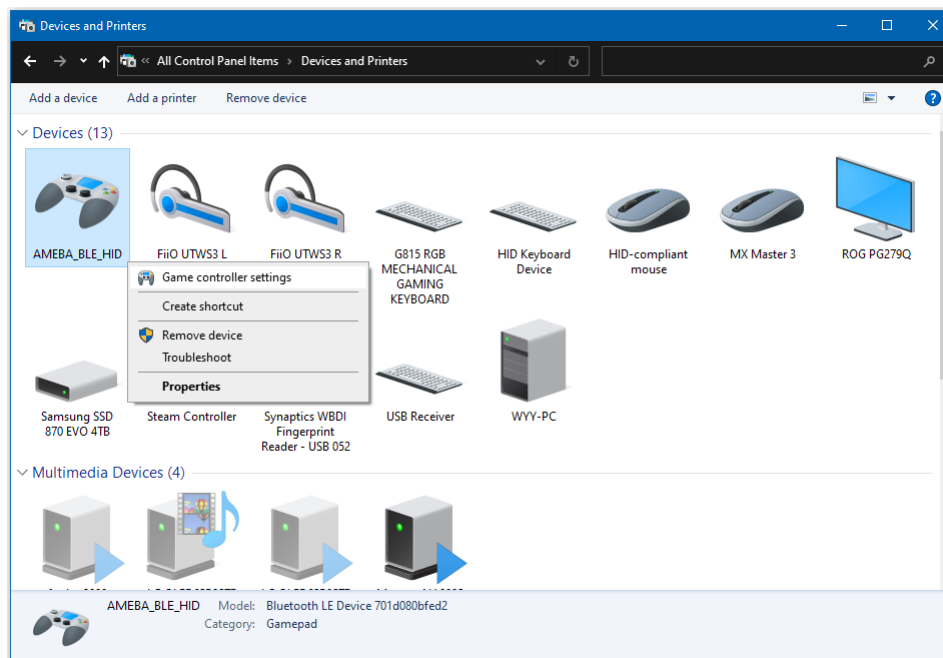

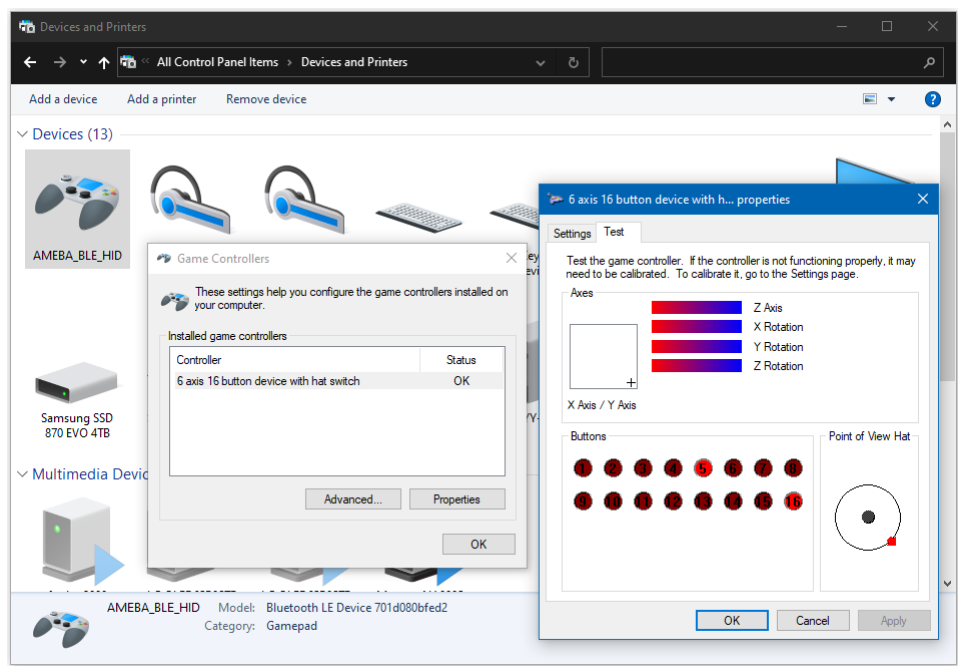

On Android, gamepad testing apps such as [Andriod Gamepad Tester](#) can also be used to view the gamepad input.

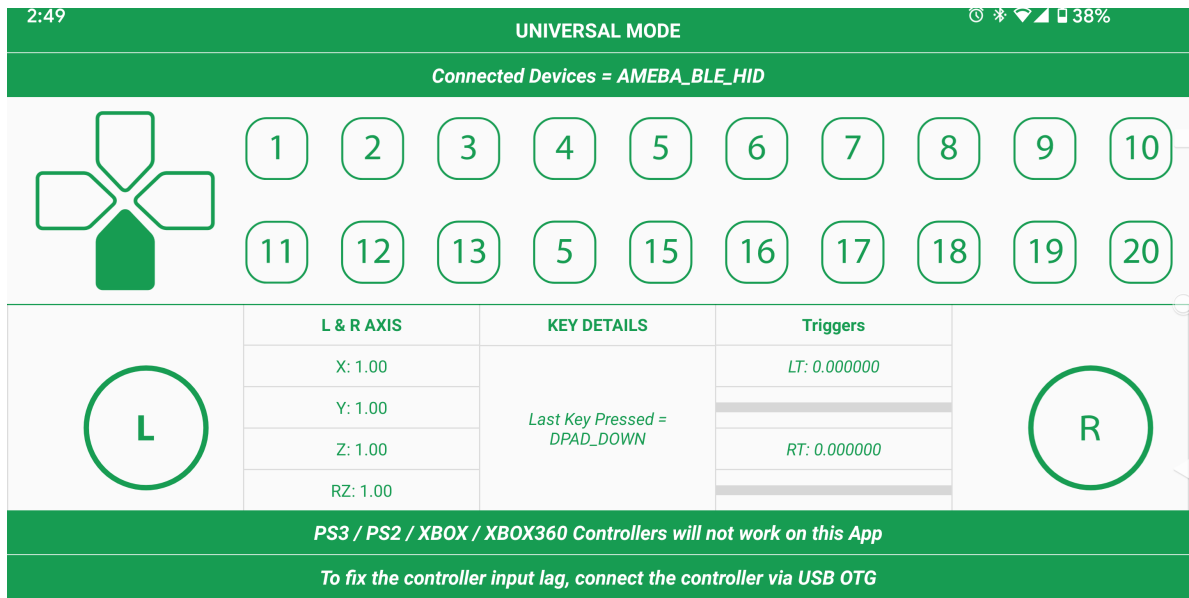

Code Reference

By default, the board emulates a gamepad with an 8-direction hat switch (d-pad), 6 analog axes and 16 buttons. How the inputs are interpreted is dependent on the host device, and the button ordering may differ between devices. Also, some axes or buttons may be disabled or missing on certain host devices.

BLE - HID Keyboard

Materials

- AmebaD [RTL8722DM/RTL8722CSM/RTL8722DM MINI] x 1
- BLE capable host device [Windows / Linux / MacOS / Android]


Example

Introduction

In this example, the RTL8722 board emulates a HID keyboard connected using BLE.

Procedure

Open the example, “Files” -> “Examples” -> “AmebaBLE” -> BLEHIDKeyboard.

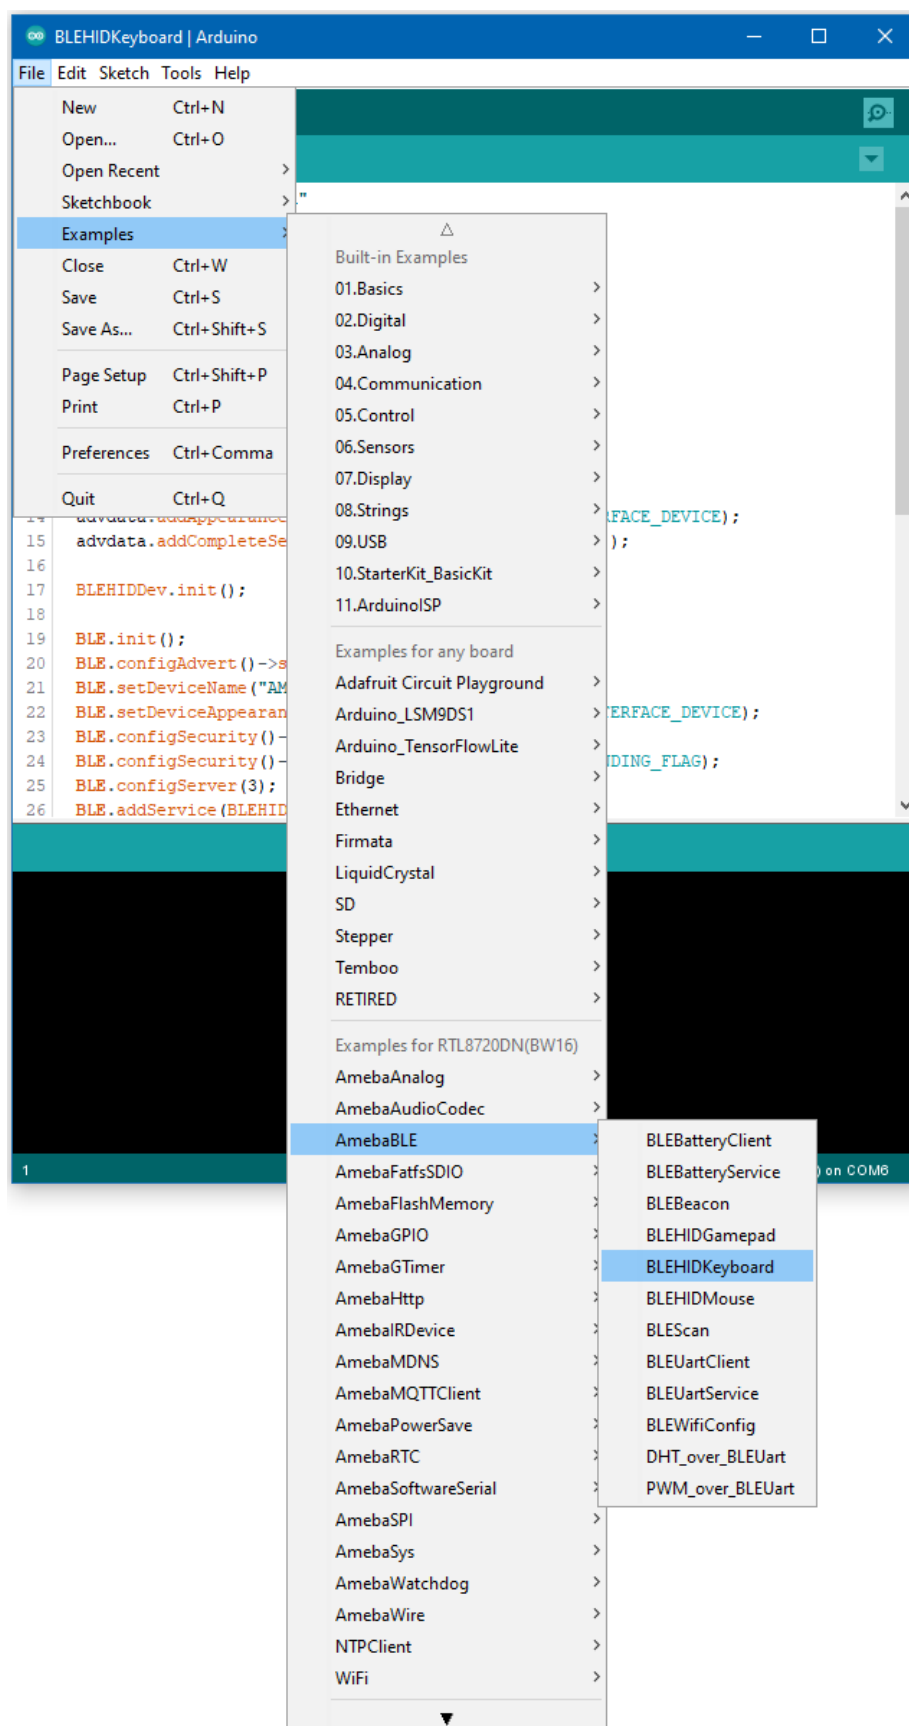


Upload the code and press the reset button once the upload is finished.


Immediately after reset, the board will begin BLE advertising as “AMEBA_BLE_HID” . On your host device, go to the Bluetooth settings menu, scan, and connect to the board.

You should ensure that the connection process is completed before proceeding.

On Windows, ensure that any driver installation is finished, and the board shows up in the Bluetooth menu under the “Mouse, keyboard & pen” category.

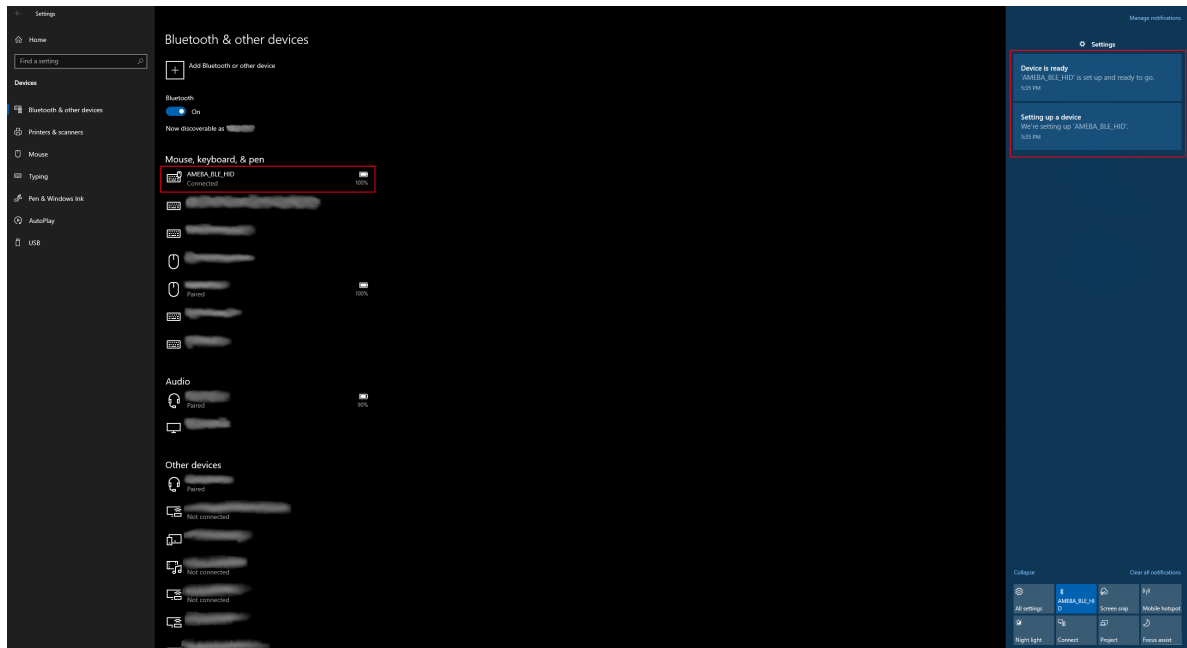


On Android, ensure that “Input device” is enabled for the board.

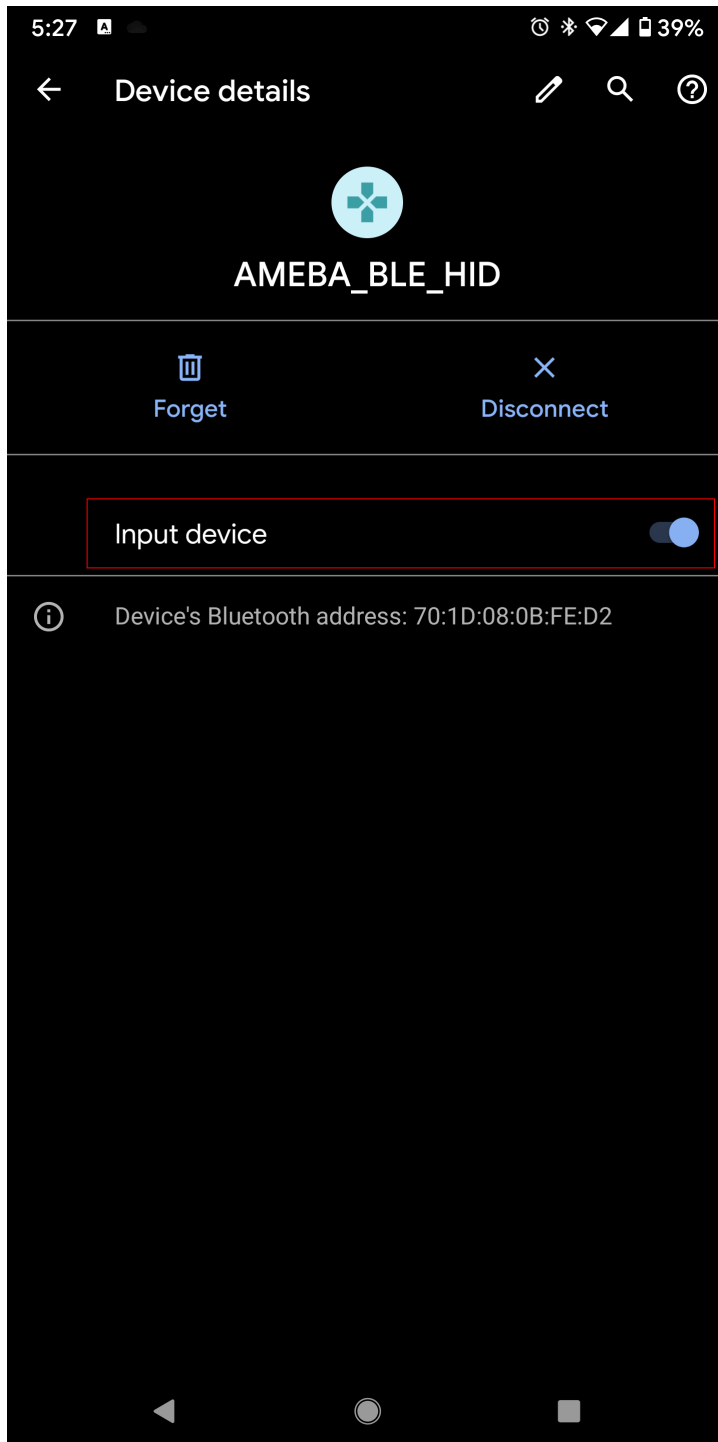

After the Bluetooth connection process is completed, the board is ready to send mouse input to the host device. Connect digital pin 8 to 3.3V to start sending input, and connect to GND to stop.

You should see the text "Hello World !" typed out and deleted repeatedly.

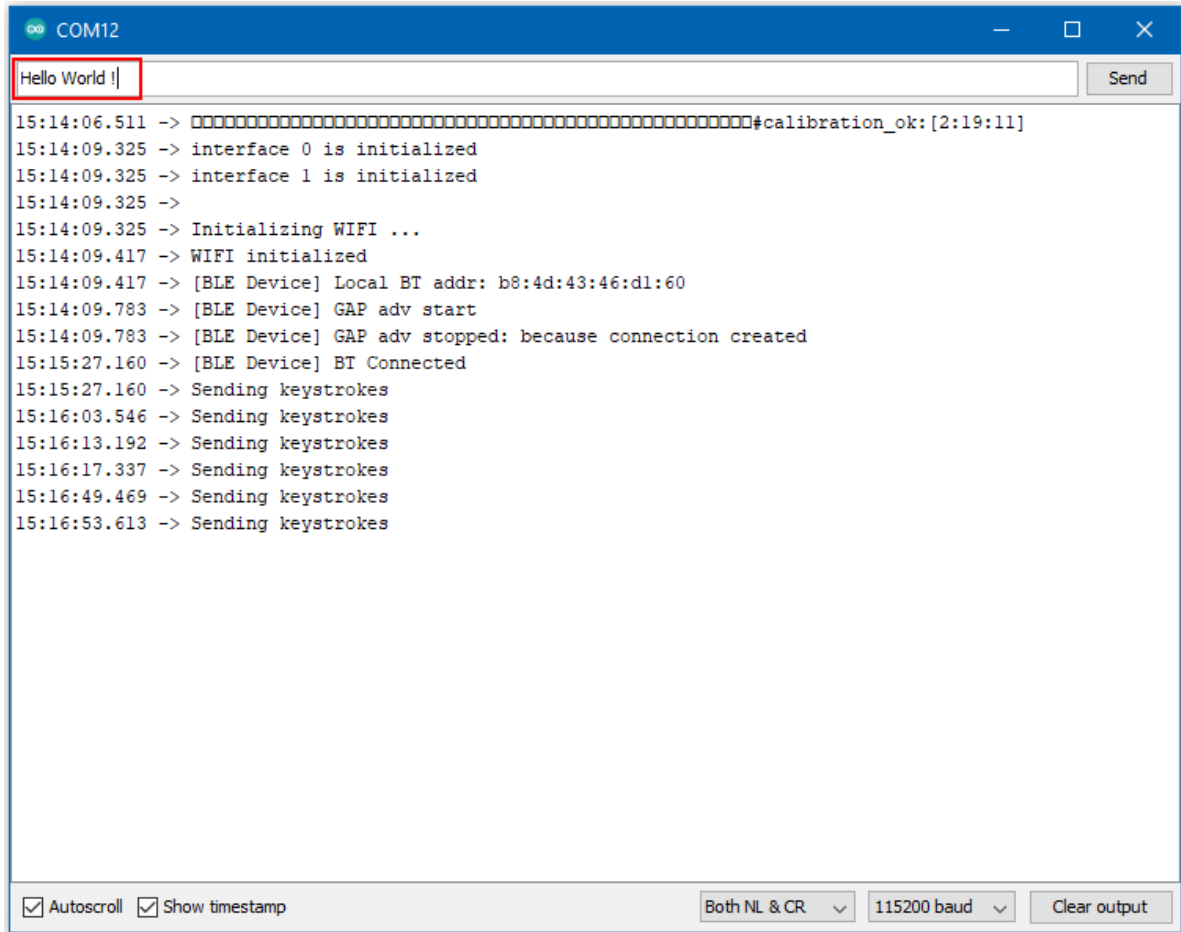

```
COM12
Hello World !
15:14:06.511 -> #####calibration_ok:[2:19:11]
15:14:09.325 -> interface 0 is initialized
15:14:09.325 -> interface 1 is initialized
15:14:09.325 ->
15:14:09.325 -> Initializing WIFI ...
15:14:09.417 -> WIFI initialized
15:14:09.417 -> [BLE Device] Local BT addr: b8:4d:43:46:d1:60
15:14:09.783 -> [BLE Device] GAP adv start
15:14:09.783 -> [BLE Device] GAP adv stopped: because connection created
15:15:27.160 -> [BLE Device] BT Connected
15:15:27.160 -> Sending keystrokes
15:16:03.546 -> Sending keystrokes
15:16:13.192 -> Sending keystrokes
15:16:17.337 -> Sending keystrokes
15:16:49.469 -> Sending keystrokes
15:16:53.613 -> Sending keystrokes

☒ Autoscroll ☒ Show timestamp
Both NL & CR 115200 baud Clear output
```

BLE - HID Mouse

Materials

- AmebaD [RTL8722DM/RTL8722CSM/RTL8722DM MINI] x 1
- BLE capable host device [Windows / Linux / MacOS / Android]


Example

Introduction

In this example, the RTL8722 board emulates a HID mouse connected using BLE.

Procedure

Open the example, “Files” -> “Examples” -> “AmebaBLE” -> “BLEHIDMouse” .

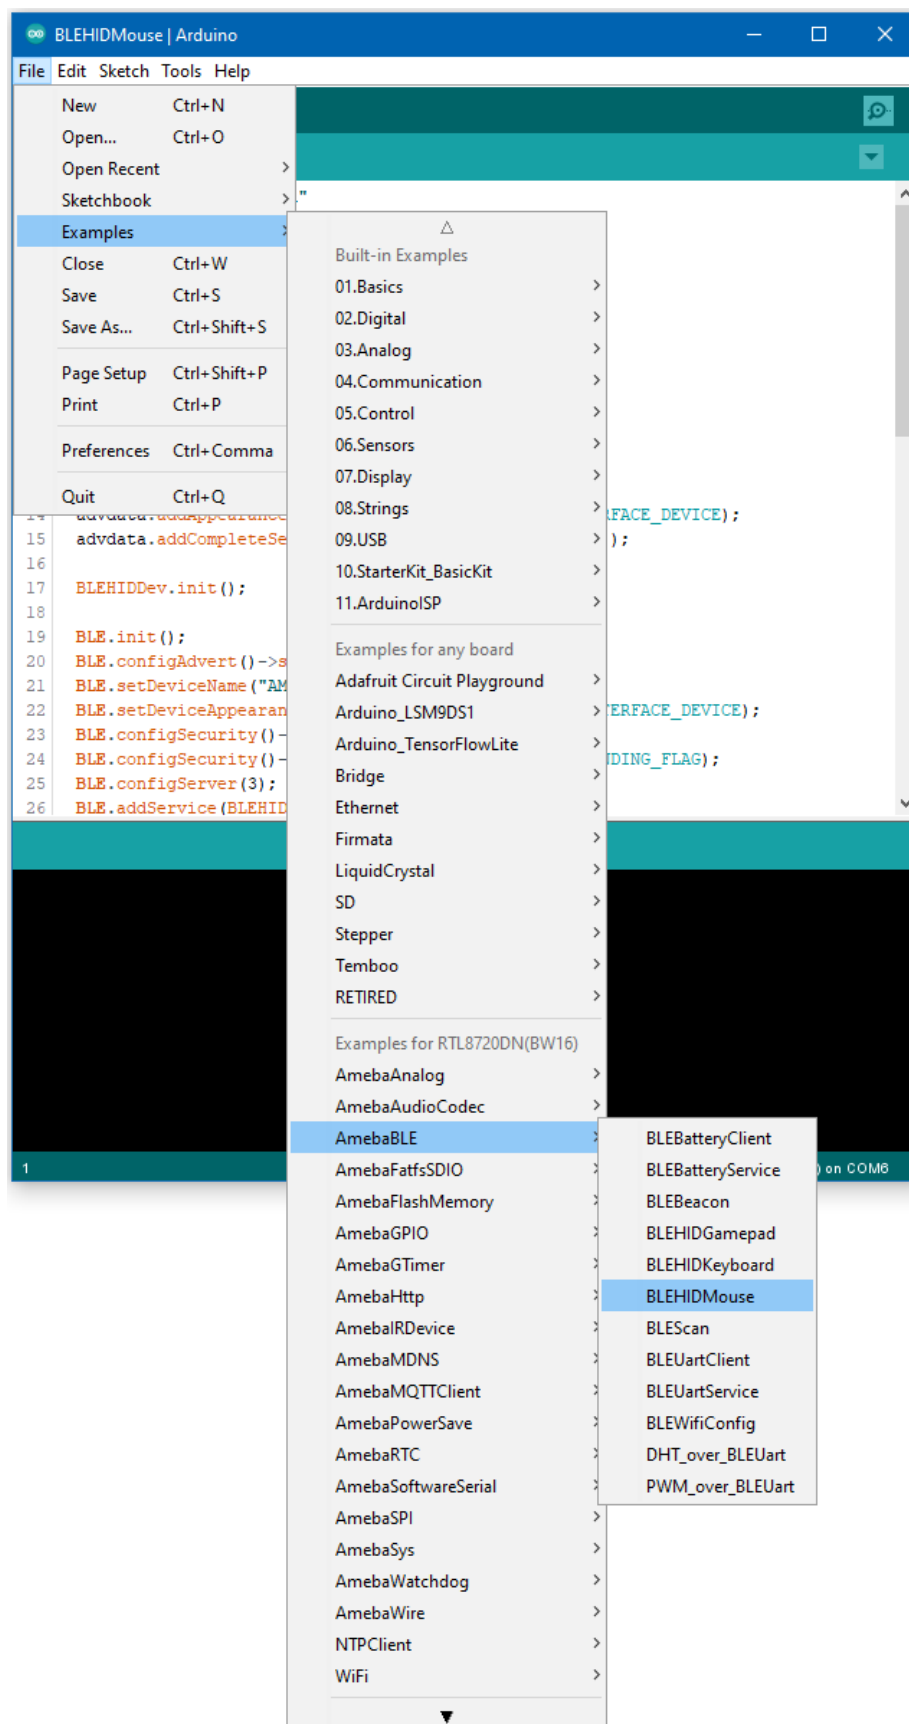


Upload the code and press the reset button once the upload is finished.


Immediately after reset, the board will begin BLE advertising as “AMEBA_BLE_HID” . On your host device, go to the Bluetooth settings menu, scan, and connect to the board.

You should ensure that the connection process is completed before proceeding.

On Windows, ensure that any driver installation is finished, and the board shows up in the Bluetooth menu under the “Mouse, keyboard & pen” category.

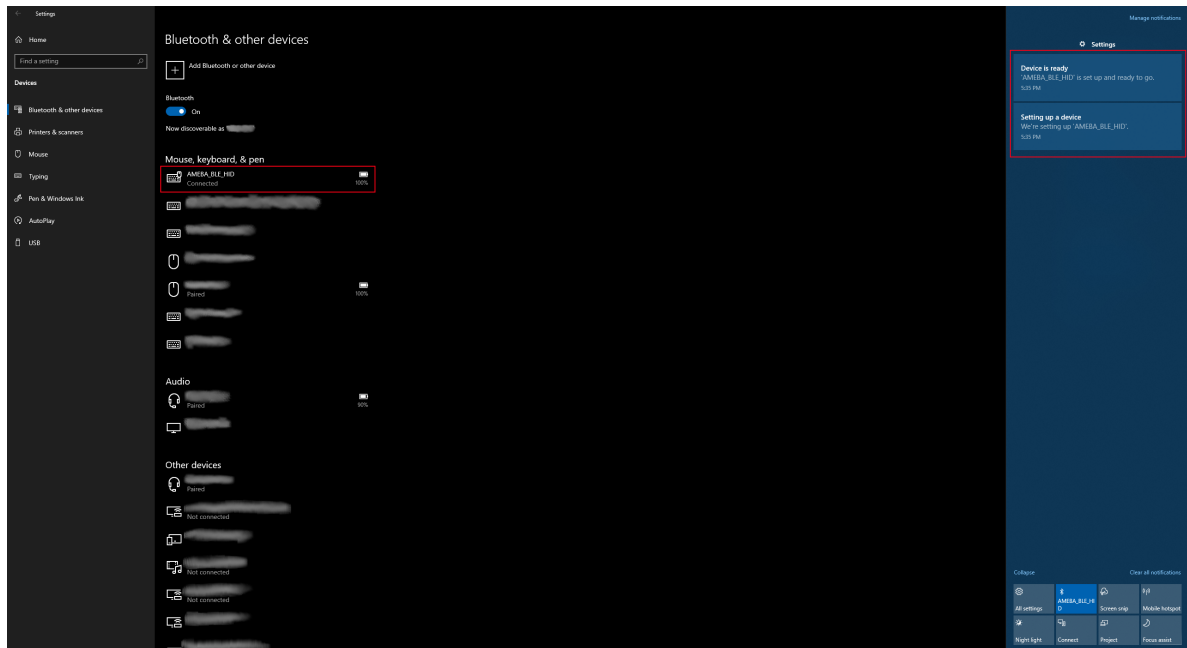

On Android, ensure that “Input device” is enabled for the board.

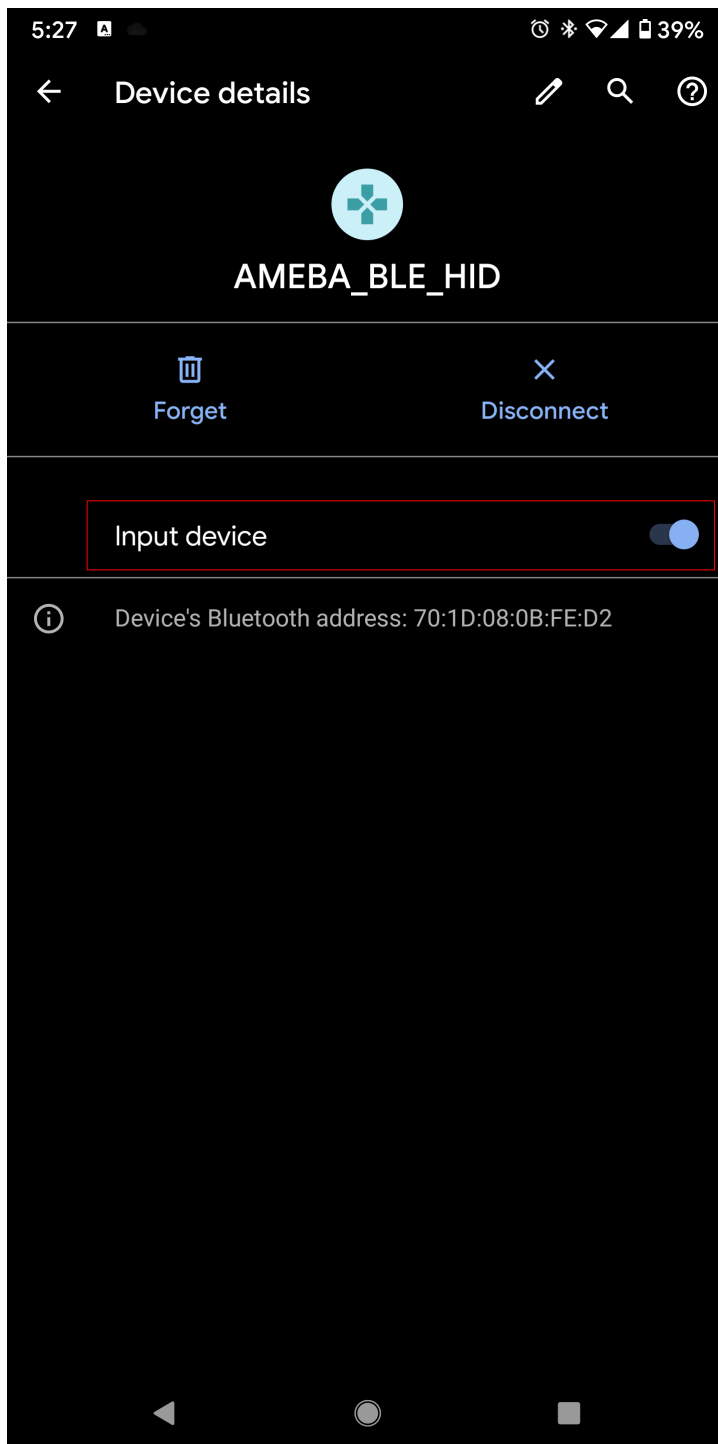

After the Bluetooth connection process is completed, the board is ready to send mouse input to the host device. Connect digital pin 8 to 3.3V to start sending input, and connect to GND to stop.

You should see the mouse cursor move around four points in a square, performing right and left clicks, and scrolling up and down.

Code Reference

How the mouse input is interpreted is dependent on the host system. Some systems, such as mobile operating systems, may not support all mouse button input functions.

Approximate UDP Receive Delay

Materials


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Windows computer connected to same network

Example


This example uses Ameba to receive UDP packets from a computer and calculates the UDP receive delay.

Ameba Preparation

Open the “CalculateUdpReceiveDelay” example in “File” -> “Examples” -> “AmebaWiFi” -> “UDP_Calculation” -> “CalculateUdpReceiveDelay” .

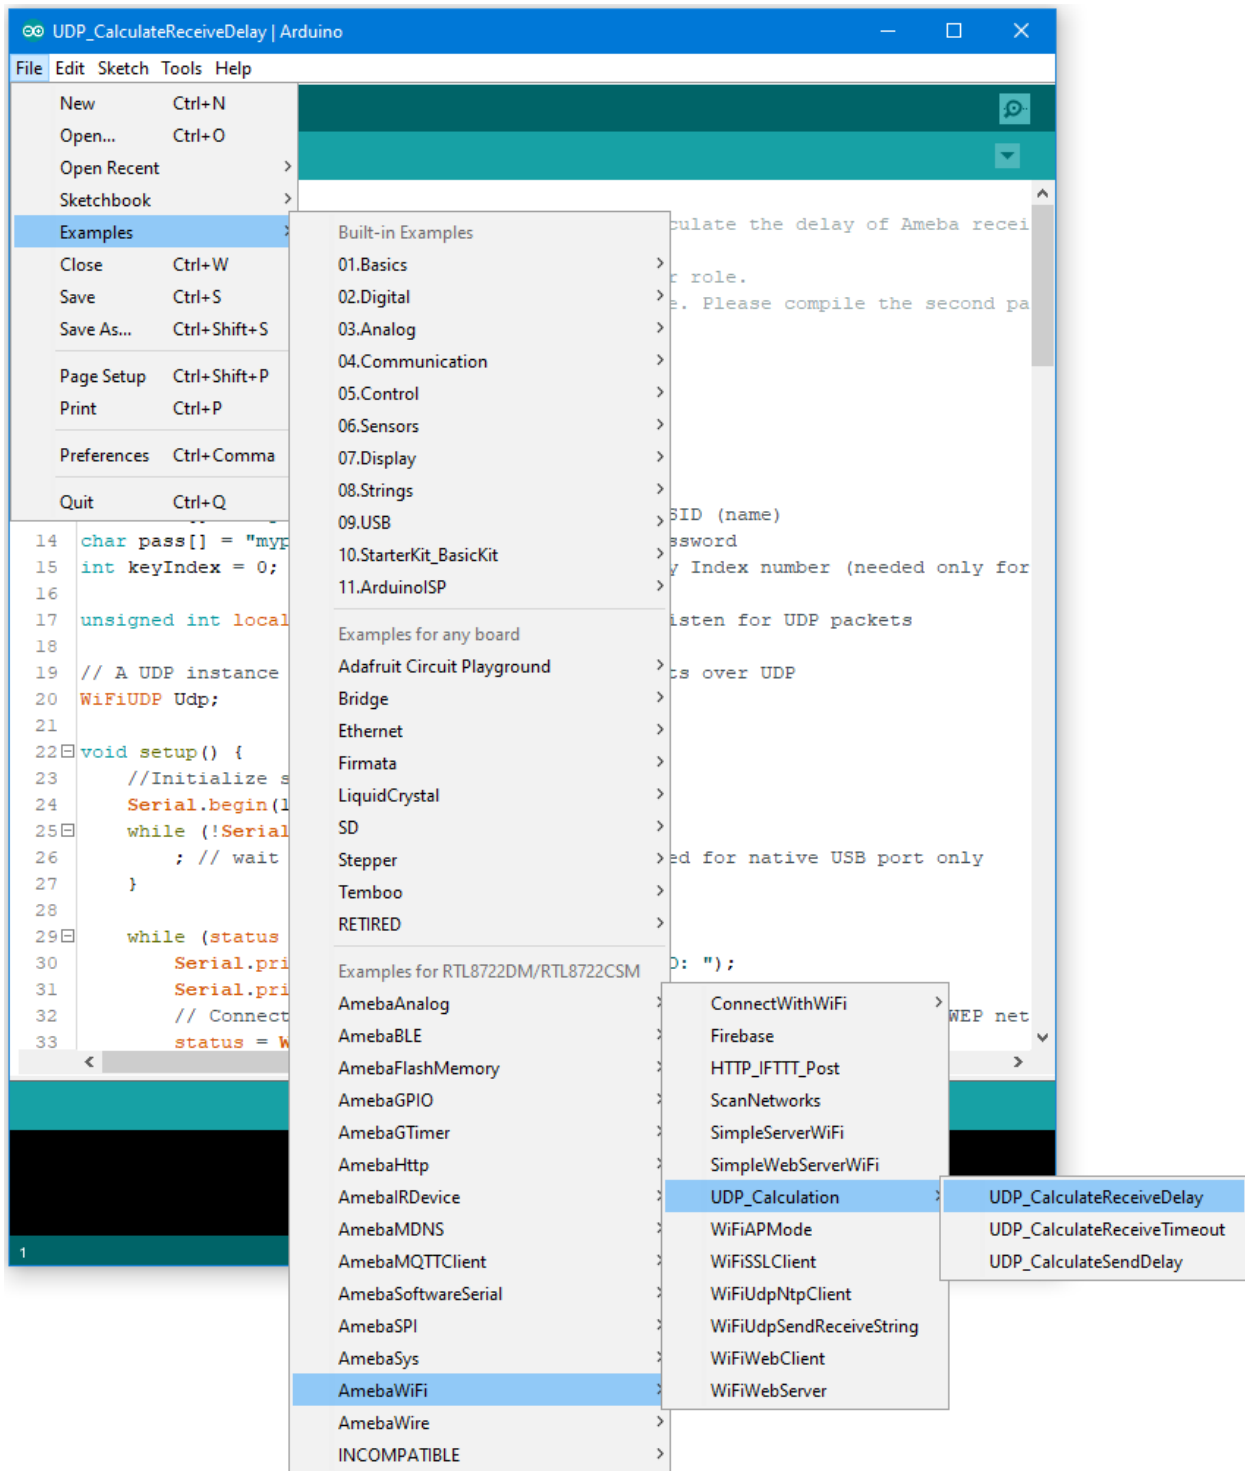

In the sample code, modify the highlighted section to enter the information required (ssid, password, key index) to connect to your WiFi network.

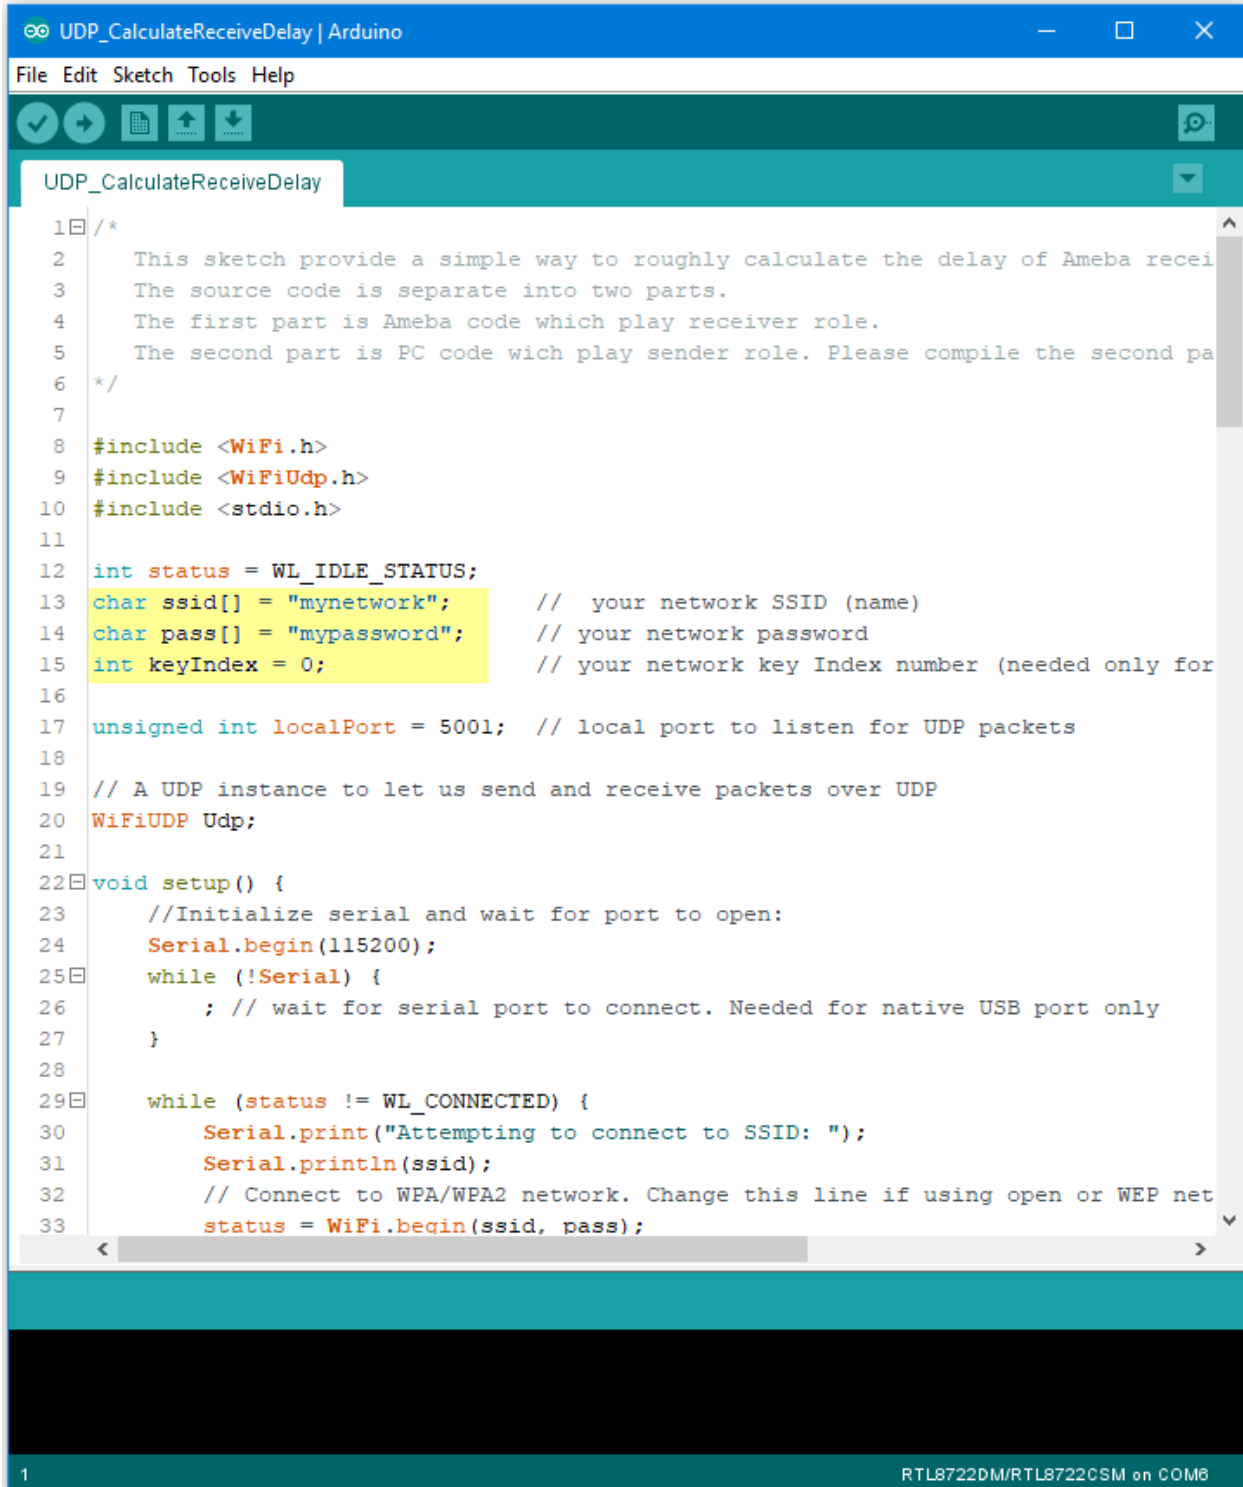

```


1  /*
2   This sketch provide a simple way to roughly calculate the delay of Ameba recei
3   The source code is separate into two parts.
4   The first part is Ameba code which play receiver role.
5   The second part is PC code wich play sender role. Please compile the second pa
6  */
7
8  #include <WiFi.h>
9  #include <WiFiUdp.h>
10 #include <stdio.h>
11
12 int status = WL_IDLE_STATUS;
13 char ssid[] = "mynetwork"; // your network SSID (name)
14 char pass[] = "mypassword"; // your network password
15 int keyIndex = 0; // your network key Index number (needed only for
16
17 unsigned int localPort = 5001; // local port to listen for UDP packets
18
19 // A UDP instance to let us send and receive packets over UDP
20 WiFiUDP Udp;
21
22 void setup() {
23     //Initialize serial and wait for port to open:
24     Serial.begin(115200);
25     while (!Serial) {
26         ; // wait for serial port to connect. Needed for native USB port only
27     }
28
29     while (status != WL_CONNECTED) {
30         Serial.print("Attempting to connect to SSID: ");
31         Serial.println(ssid);
32         // Connect to WPA/WPA2 network. Change this line if using open or WEP net
33         status = WiFi.begin(ssid, pass);

```

1

RTL8722DM/RTL8722CSM on COM8

Upload the code and press the reset button on Ameba once the upload is finished. Open the serial monitor in Arduino IDE and take note of the IP address assigned to Ameba.

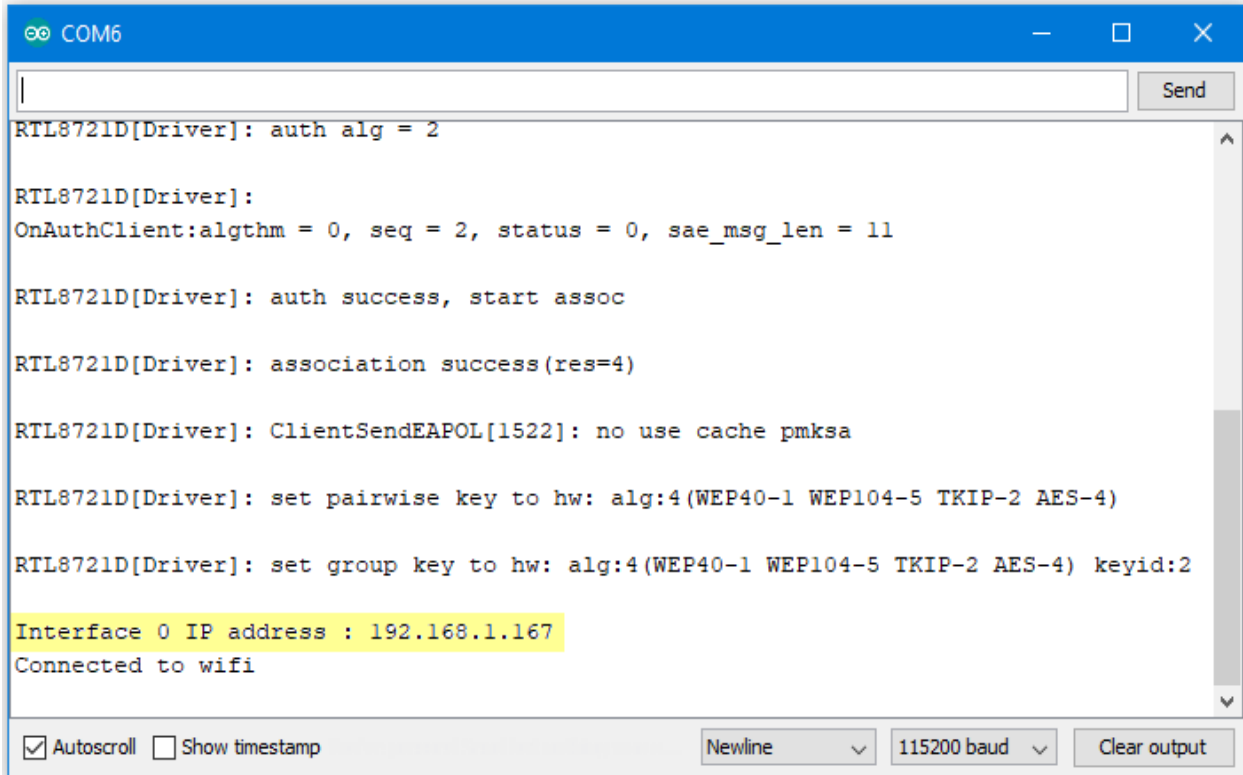

```
COM6
|
Send
RTL8721D[Driver]: auth alg = 2
RTL8721D[Driver]:
OnAuthClient:alghm = 0, seq = 2, status = 0, sae_msg_len = 11
RTL8721D[Driver]: auth success, start assoc
RTL8721D[Driver]: association success(res=4)
RTL8721D[Driver]: ClientSendEAPOL[1522]: no use cache pmksa
RTL8721D[Driver]: set pairwise key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4)
RTL8721D[Driver]: set group key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4) keyid:2
Interface 0 IP address : 192.168.1.167
Connected to wifi
☒ Autoscroll ☐ Show timestamp Newline 115200 baud Clear output
```

Computer Preparation

On the computer, Cygwin will be required to compile the code to send the UDP packets. Cygwin can be downloaded from <https://www.cygwin.com/>

Follow the instructions there to install it. Next, from the “CalculateUdpReceiveDelay” Arduino example, copy the code from the bottom between “#if 0” and “#endif” , into a new text file, change the hostname to the IP address assigned to Ameba, and rename the file to “UdpReceiveDelay.cpp” .

```

1  #include <stdio.h>
2  #include <stdlib.h>
3  #include <string.h>
4  #include <sys/socket.h>
5  #include <netinet/in.h>
6  #include <arpa/inet.h>
7  #include <sys/time.h>
8  #include <unistd.h>
9
10 #define BUFSIZE 1024
11
12 char *hostname = "172.25.24.243";
13 int portno = 5001;
14
15 long base_current_time = 0;
16 long get_current_time_with_ms (void)
17 {
18     struct timeval tv;
19
20     gettimeofday(&tv, NULL);
21
22     long millisecondsSinceEpoch =
23         (long) (tv.tv_sec) * 1000 +
24         (long) (tv.tv_usec) / 1000;
25
26     if (base_current_time == 0) {
27         base_current_time = millisecondsSinceEpoch;
28         return 0;
29     } else {
30         return millisecondsSinceEpoch - base_current_time;
31     }
32 }


```

length: 1,666 lines: 67 Ln: 12 Col: 1 Sel: 0|0 Windows (CR LF) UTF-8 INS

Next, open a Cygwin terminal, change the working directory to the location of “UdpReceiveDelay.cpp”, and use the command “g++ UdpReceiveDelay.cpp -o UdpDelay” to compile the code. A file named “UdpDelay.exe” will be created in the same directory.

Running the Example

Reset the Ameba, wait for the WiFi to connect, and check that the IP address remains the same. On the computer, run the UdpDelay.exe file, and the computer will begin to send packets to Ameba. Once 10000 packets have been received, Ameba will calculate the average delay and print out the result to the serial monitor. It may take up to a few minutes for 10000 packets to be sent.

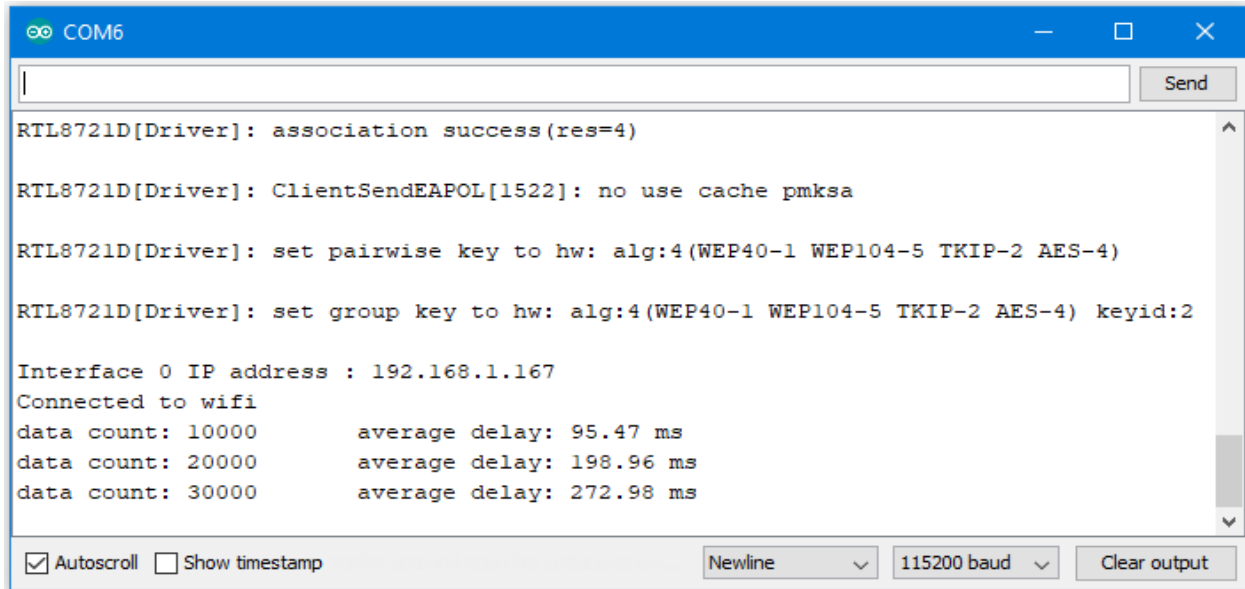

```
COM6

RTL8721D[Driver]: association success(res=4)

RTL8721D[Driver]: ClientSendEAPOL[1522]: no use cache pmksa

RTL8721D[Driver]: set pairwise key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4)

RTL8721D[Driver]: set group key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4) keyid:2

Interface 0 IP address : 192.168.1.167
Connected to wifi
data count: 10000      average delay: 95.47 ms
data count: 20000      average delay: 198.96 ms
data count: 30000      average delay: 272.98 ms

☒ Autoscroll ☐ Show timestamp Newline 115200 baud Clear output
```

Approximate UDP Receive Timeout

Materials


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Windows computer connected to same network

Example


This example uses Ameba to receive UDP packets from a computer and calculates the allowed UDP receive timeout setting.

Ameba Preparation

Open the “CalculateUdpReceiveTimeout” example in “File” -> “Examples” -> “AmebaWiFi” -> “UDP_Calculation ” -> “CalculateUdpReceiveTimeout” .

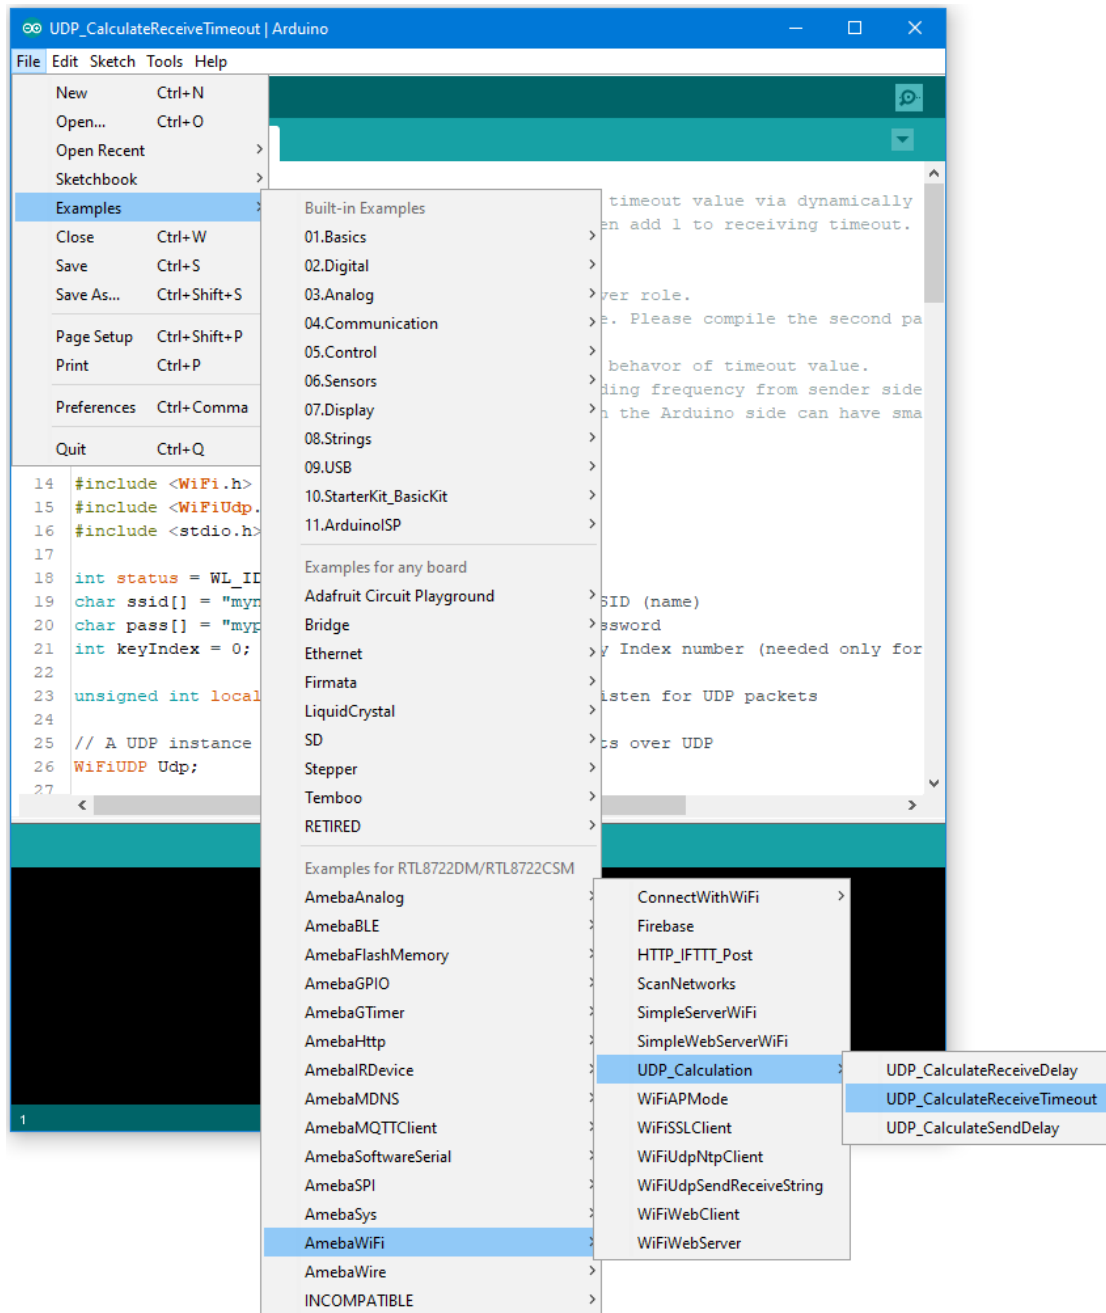

In the sample code, modify the highlighted section to enter the information required (ssid, password, key index) to connect to your WiFi network.

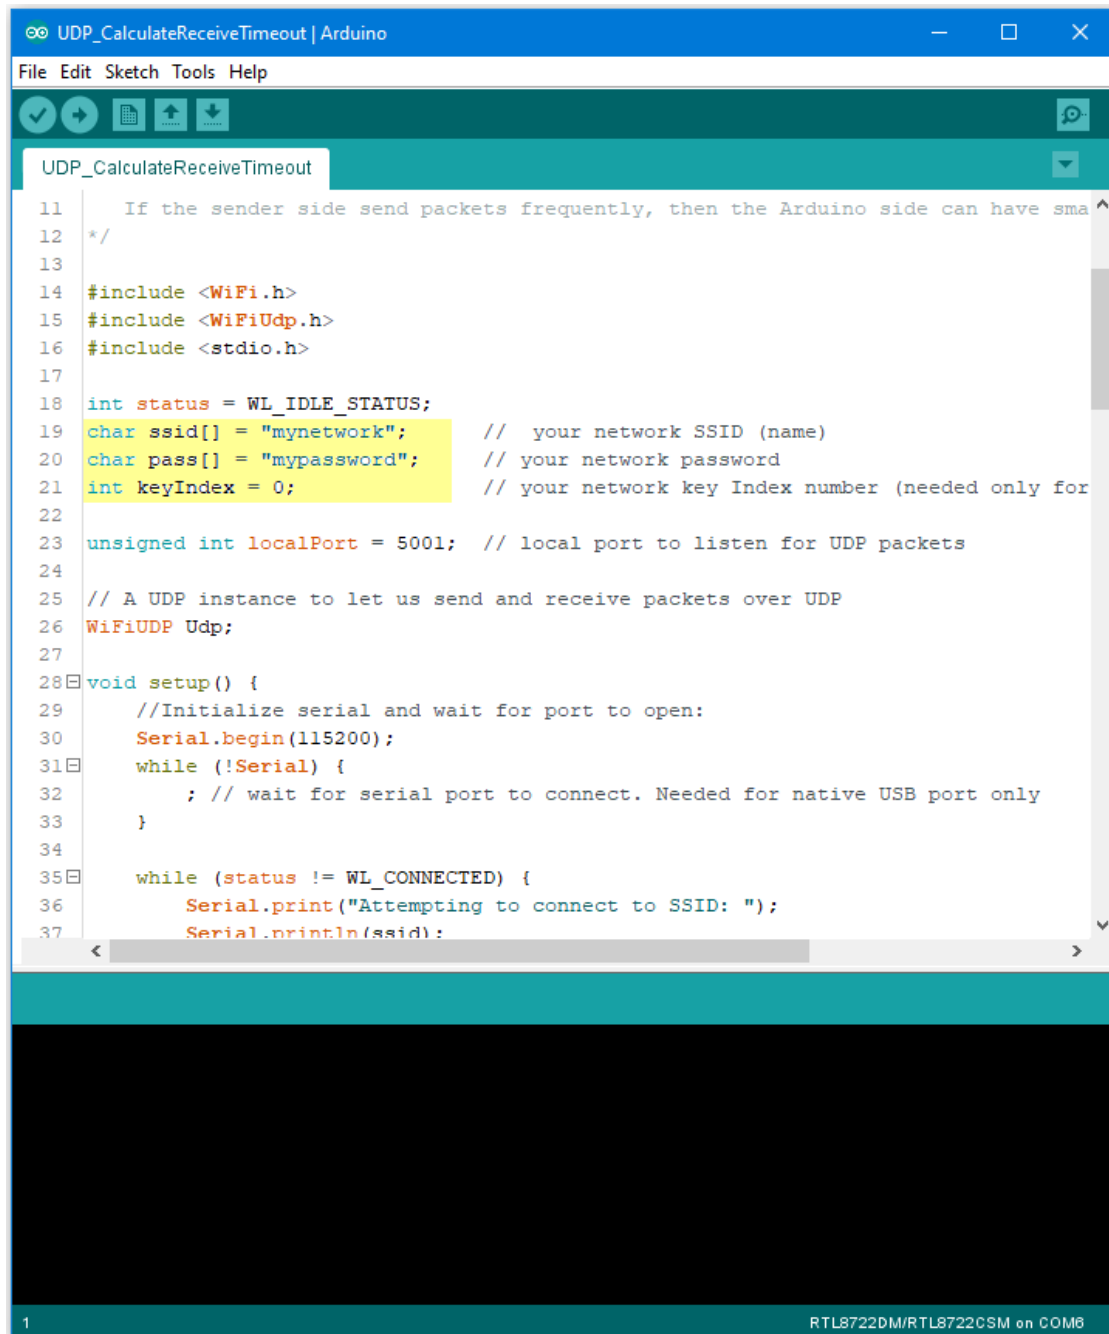


```
UDP_CalculateReceiveTimeout | Arduino
File Edit Sketch Tools Help

UDP_CalculateReceiveTimeout

11   If the sender side send packets frequently, then the Arduino side can have sma
12   */
13
14   #include <WiFi.h>
15   #include <WiFiUdp.h>
16   #include <stdio.h>
17
18   int status = WL_IDLE_STATUS;
19   char ssid[] = "mynetwork"; // your network SSID (name)
20   char pass[] = "mypassword"; // your network password
21   int keyIndex = 0; // your network key Index number (needed only for
22
23   unsigned int localPort = 5001; // local port to listen for UDP packets
24
25   // A UDP instance to let us send and receive packets over UDP
26   WiFiUDP Udp;
27
28   void setup() {
29       //Initialize serial and wait for port to open:
30       Serial.begin(115200);
31       while (!Serial) {
32           ; // wait for serial port to connect. Needed for native USB port only
33       }
34
35       while (status != WL_CONNECTED) {
36           Serial.print("Attempting to connect to SSID: ");
37           Serial.println(ssid);
```

Upload the code and press the reset button on Ameba once the upload is finished.

Open the serial monitor in Arduino IDE and take note of the IP address assigned to Ameba.

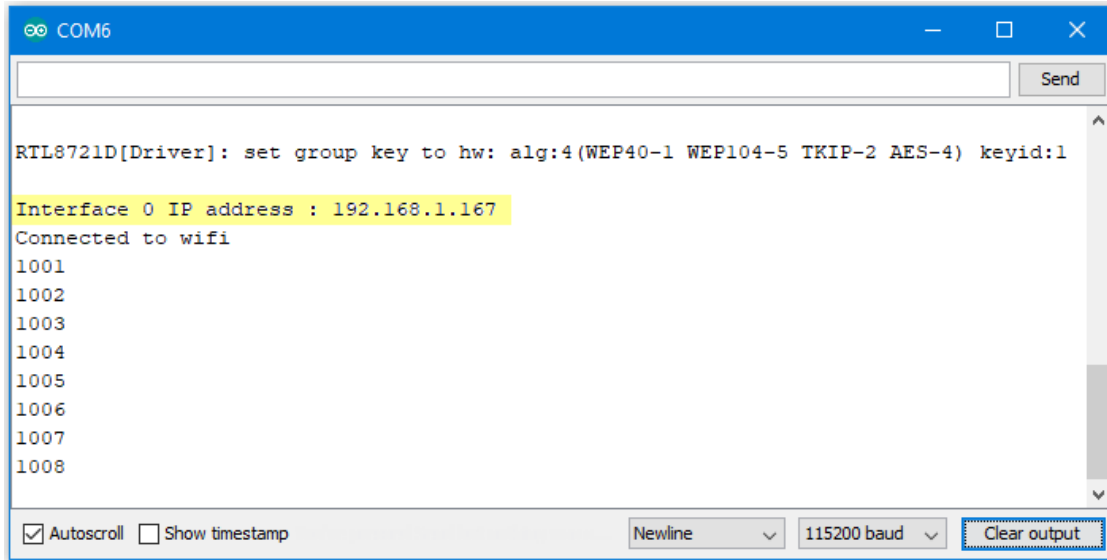

```
COM6

RTL8721D[Driver]: set group key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4) keyid:1
Interface 0 IP address : 192.168.1.167
Connected to wifi
1001
1002
1003
1004
1005
1006
1007
1008

Autoscroll Show timestamp Newline 115200 baud Clear output
```

Computer Preparation

On the computer, Cygwin will be required to compile the code to send the UDP packets. Cygwin can be downloaded from <https://www.cygwin.com/>

Follow the instructions there to install it. Next, from the “CalculateUdpReceiveTimeout” Arduino example, copy the code from the bottom between “#if 0” and “#endif” , into a new text file, change the hostname to the IP address assigned to Ameba, and rename the file to “UdpReceiveTimeout.cpp” .

```

1  #include <stdio.h>
2  #include <stdlib.h>
3  #include <string.h>
4  #include <sys/socket.h>
5  #include <netinet/in.h>
6  #include <arpa/inet.h>
7  #include <unistd.h>
8
9  #define BUFSIZE 16
10
11 char *hostname = "192.168.1.213";
12 int portno = 5001;
13
14 int main(int argc, char **argv) {
15     int sockfd, n;
16     struct sockaddr_in serveraddr;
17     int serverlen = sizeof(serveraddr);
18     char buf[BUFSIZE];
19     int counter = 0;
20
21     /* socket: create the socket */
22     sockfd = socket(AF_INET, SOCK_DGRAM, 0);
23     if (sockfd < 0) {
24         printf("ERROR opening socket\r\n");
25         return -1;
26     }
27
28     /* build the server's Internet address */
29     memset(&serveraddr, 0, sizeof(serveraddr));
30     serveraddr.sin_family = AF_INET;
31     serveraddr.sin_addr.s_addr = inet_addr(hostname);
32     serveraddr.sin_port = htons(portno);

```

length: 1,246 lines: 49 Ln: 11 Col: 5 Sel: 0|0 Windows (CR LF) UTF-8 INS

Next, open a Cygwin terminal, change the working directory to the location of “UdpReceiveTimeout.cpp”, and use the command “g++ UdpReceiveTimeout.cpp -o UdpTimeout” to compile the code. A file named “UdpTimeout.exe” will be created in the same directory.

Running the Example

Reset the Ameba, wait for the WiFi to connect, and check that the IP address remains the same. On the computer, run the UdpTimeout.exe file, and the computer will begin to send packets continuously to Ameba.

The timeout value is set to 1000ms initially. For each packet received successfully, Ameba decreases the timeout value. The next packet must be received within the timeout period, otherwise Ameba registers a failed packet and increases the timeout value. Open the serial monitor and observe the timeout value converge to a minimum value.

Approximate UDP Sending Delay

Materials


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Windows computer connected to same network

Example

This example uses Ameba to send UDP packets to a computer and calculates the UDP sending delay.


Ameba Preparation

Open the “CalculateUdpSendDelay” example in “File” -> “Examples” -> “AmebaWiFi” -> “UDP_Calculation ” -> “CalculateUdpSendDelay” .

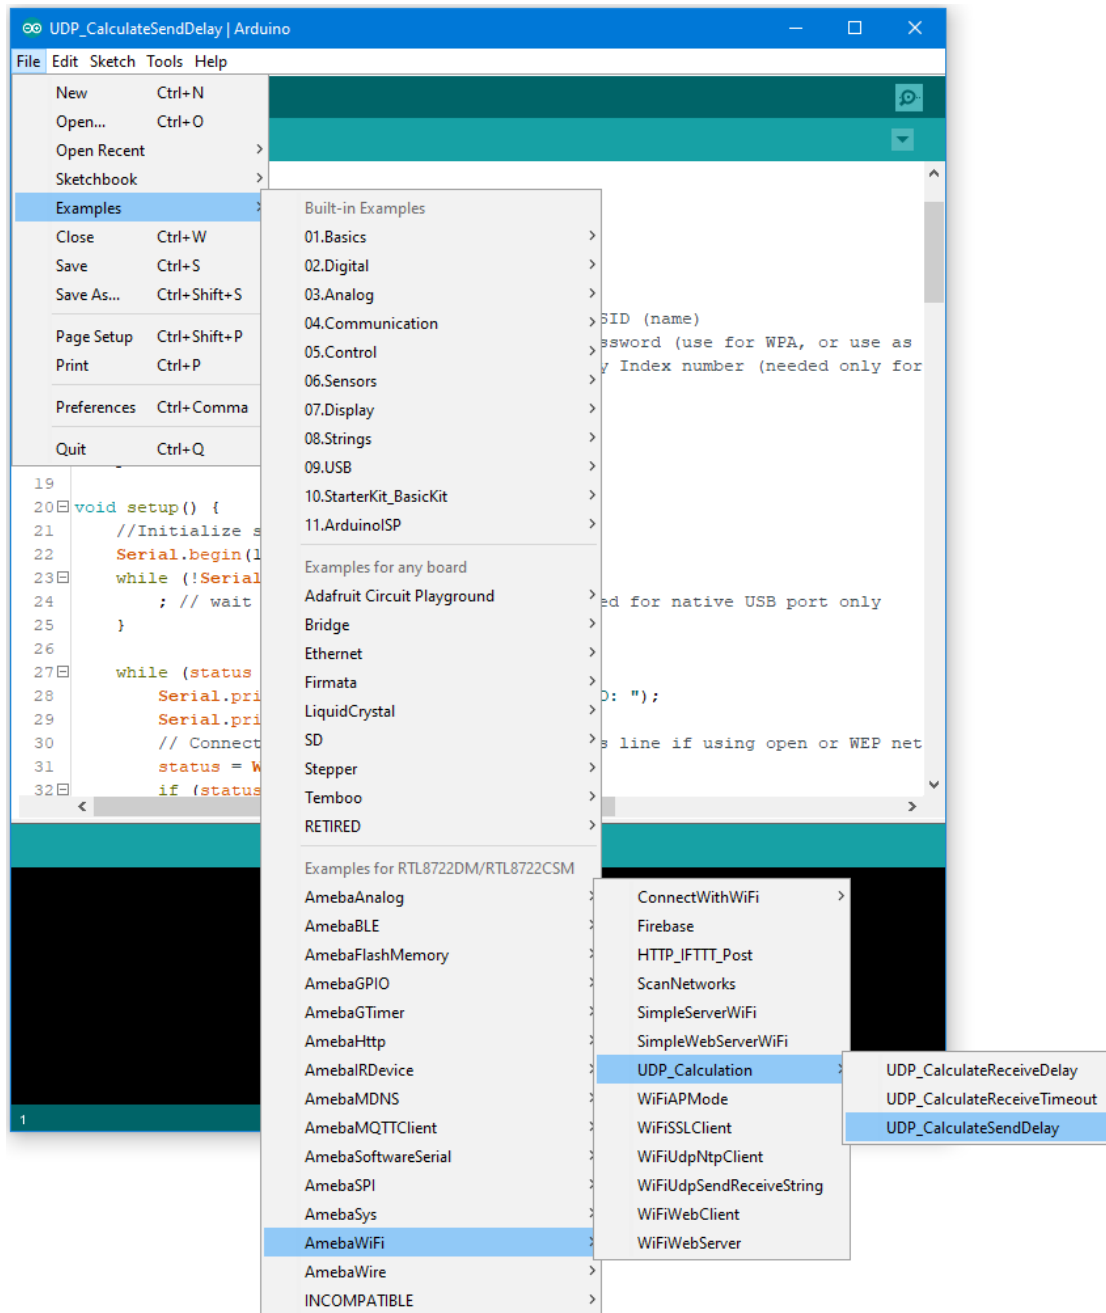

In the sample code, modify the highlighted section to enter the information required (ssid, password, key index) to connect to your WiFi network.

The server variable also needs to be changed to match the IP address of your computer. You can find the IP address using the “ipconfig” command in a terminal window.

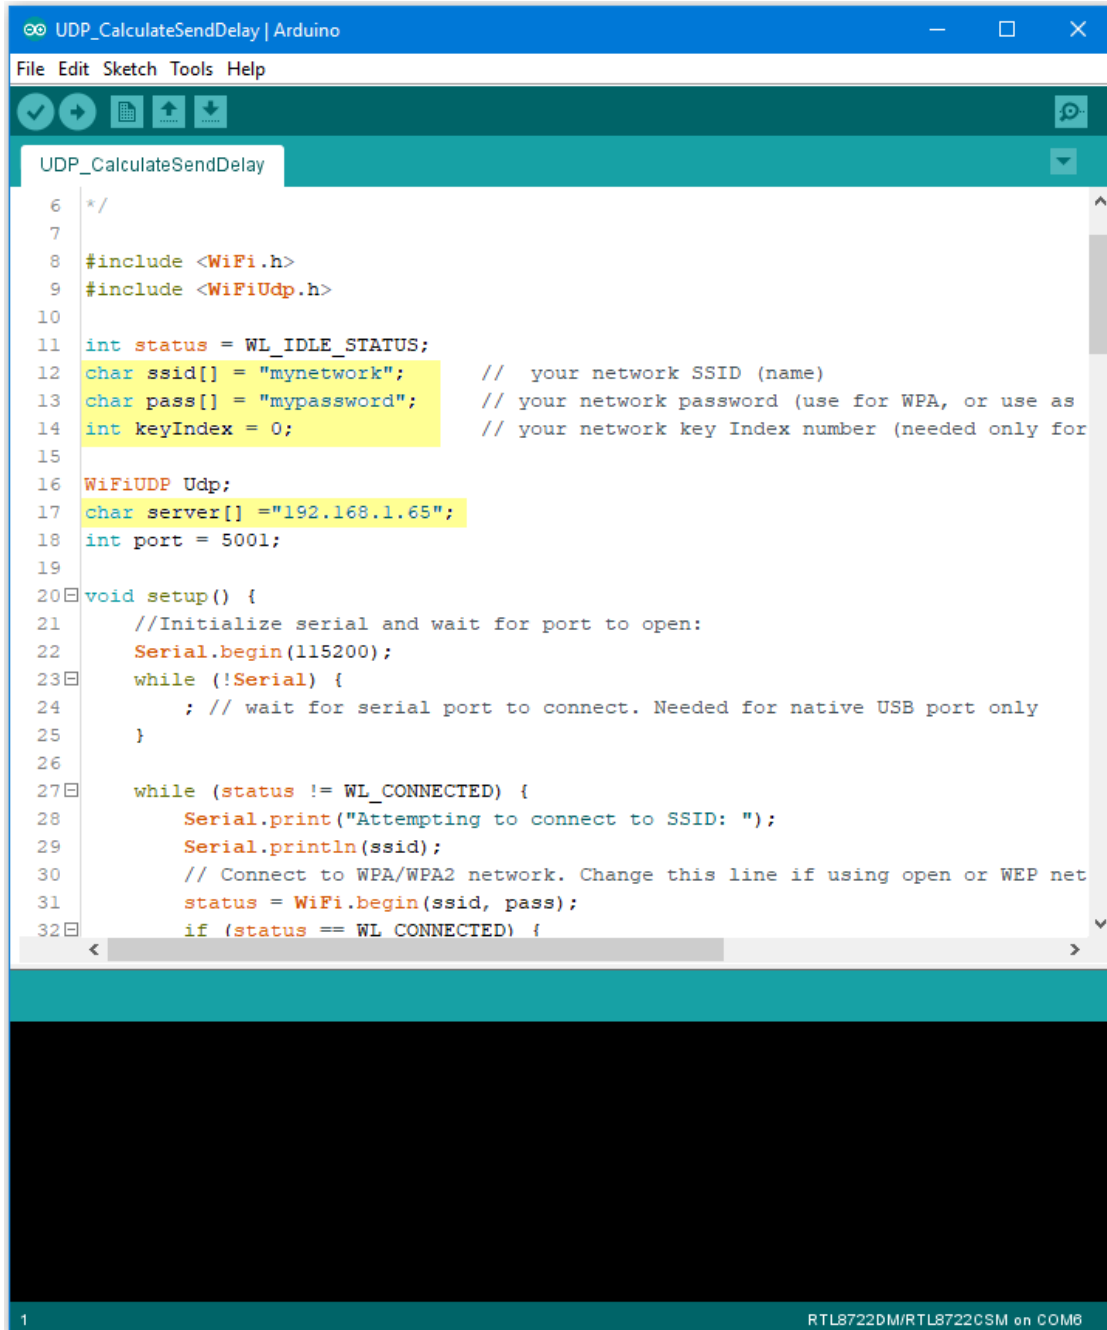

```

6  */
7
8  #include <WiFi.h>
9  #include <WiFiUdp.h>
10
11 int status = WL_IDLE_STATUS;
12 char ssid[] = "mynetwork";    // your network SSID (name)
13 char pass[] = "mypassword";  // your network password (use for WPA, or use as
14 int keyIndex = 0;            // your network key Index number (needed only for
15
16 WiFiUDP Udp;
17 char server[] = "192.168.1.65";
18 int port = 5001;
19
20 void setup() {
21     //Initialize serial and wait for port to open:
22     Serial.begin(115200);
23     while (!Serial) {
24         ; // wait for serial port to connect. Needed for native USB port only
25     }
26
27     while (status != WL_CONNECTED) {
28         Serial.print("Attempting to connect to SSID: ");
29         Serial.println(ssid);
30         // Connect to WPA/WPA2 network. Change this line if using open or WEP net
31         status = WiFi.begin(ssid, pass);
32         if (status == WL_CONNECTED) {

```

Computer Preparation

On the computer, Cygwin will be required to compile the code to send the UDP packets. Cygwin can be downloaded from <https://www.cygwin.com/>

Follow the instructions there to install it. Next, from the “CalculateUdpSendDelay” Arduino example, copy the code from the bottom between “#if 0” and “#endif”, into a new text file and rename the file to “UdpSendDelay.cpp”.

```

1  #include <stdio.h>
2  #include <stdlib.h>
3  #include <string.h>
4  #include <sys/socket.h>
5  #include <arpa/inet.h>
6  #include <sys/time.h>
7
8  #define BUFSIZE 1024
9  #define PORT 5001
10
11 long get_current_time_with_ms (void)
12 {
13     struct timeval tv;
14
15     gettimeofday(&tv, NULL);
16
17     long millisecondsSinceEpoch =
18         (long) (tv.tv_sec) * 1000 +
19         (long) (tv.tv_usec) / 1000;
20
21     return millisecondsSinceEpoch;
22 }
23
24 long early_diff = 0;
25
26 long ameba_epoch = 0;
27 long sys_epoch = 0;
28
29 long datacount = 0;
30 long total_shift = 0;
31
32 void process_data(char *buf) {

```

length: 2,706 lines: 110 Ln: 110 Col: 2 Sel: 0|0 Windows (CR LF) UTF-8 INS

Next, open a Cygwin terminal, change the working directory to the location of “UdpSendDelay.cpp”, and use the command “g++ UdpSendDelay.cpp -o UdpDelay” to compile the code. A file named “UdpDelay.exe” will be created in the same directory.


Running the Example

First, on the computer, run the UdpDelay.exe file, and the computer will begin to listen for packets from Ameba.

Next, compile and upload the code from the Arduino IDE to Ameba and press the reset button when the upload is complete.

The Ameba will begin to send UDP packets to the computer. Once 10000 packets have been received, the computer will calculate the average delay and print out the result.

It will take some time for 10000 packets to be sent.

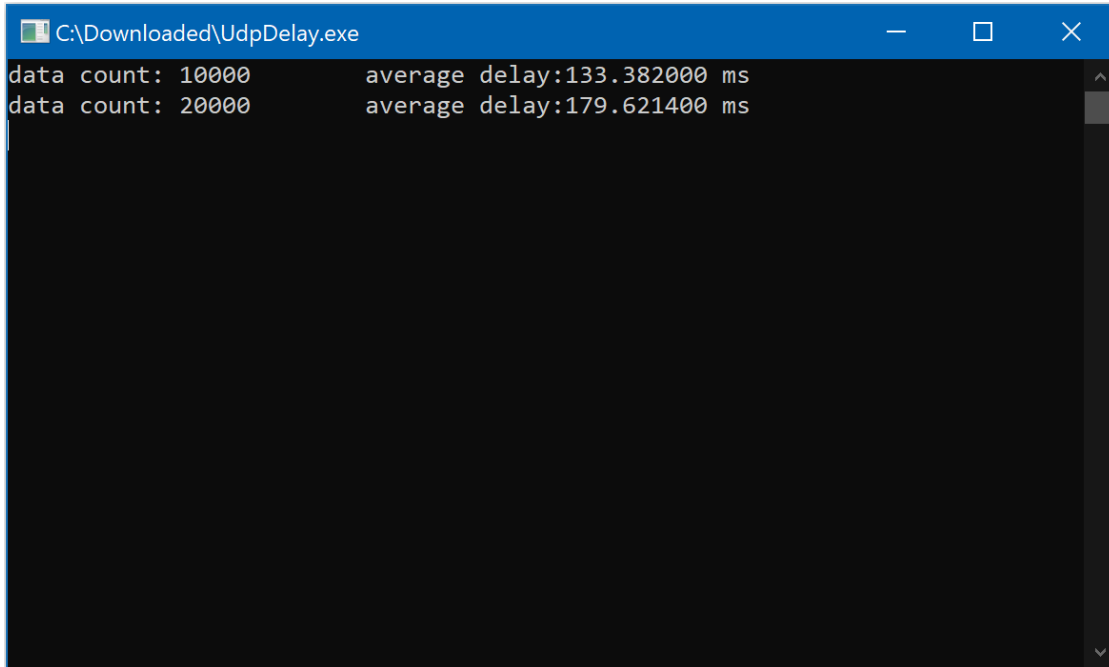

```
C:\Downloaded\UdpDelay.exe
data count: 10000 average delay:133.382000 ms
data count: 20000 average delay:179.621400 ms
```


Google Cloud IoT

Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1

Google Cloud IoT Configuration


1. Select or create a Cloud Platform project In the Google Cloud Console, select an existing project or create a new project. You will need a **Project ID** to use with

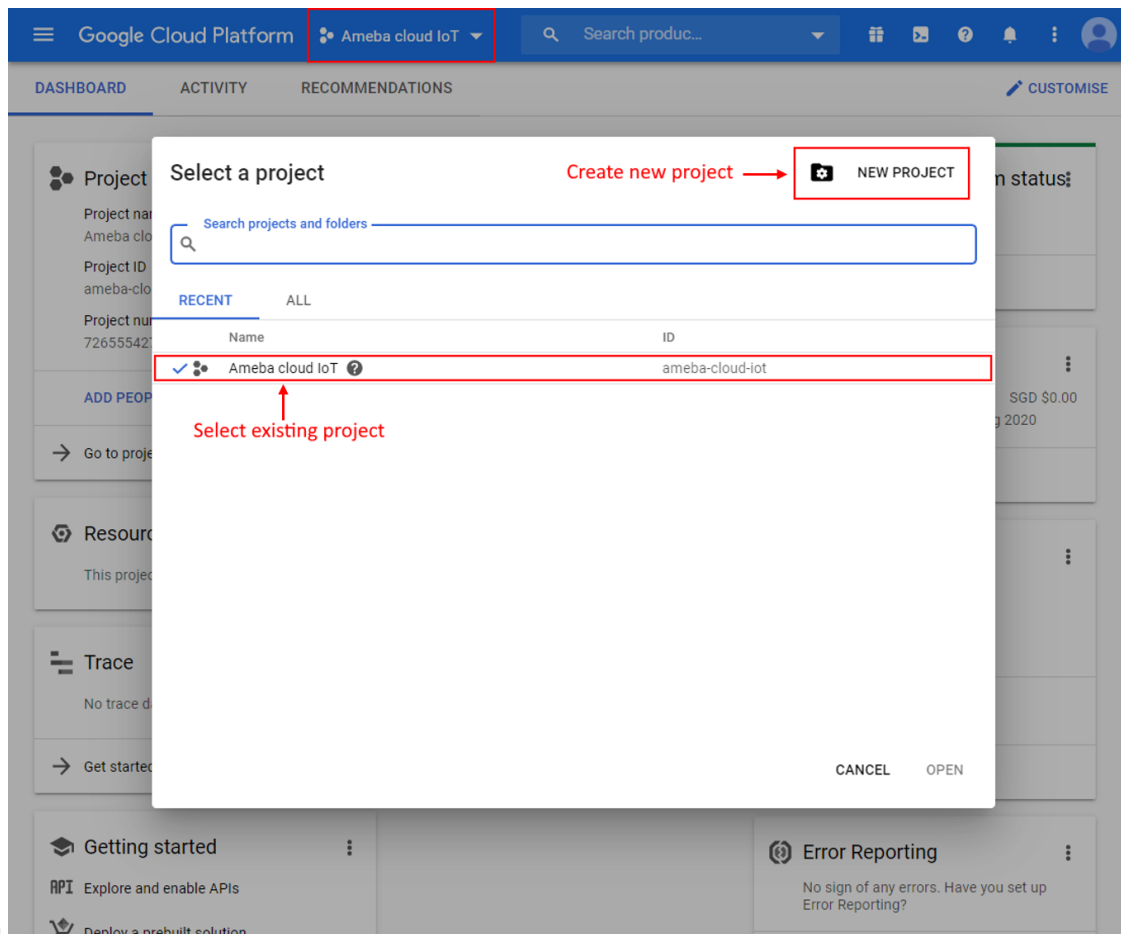

Ameba.


If


creating a new project, enter a project name, and take note of the **Project ID** generated.

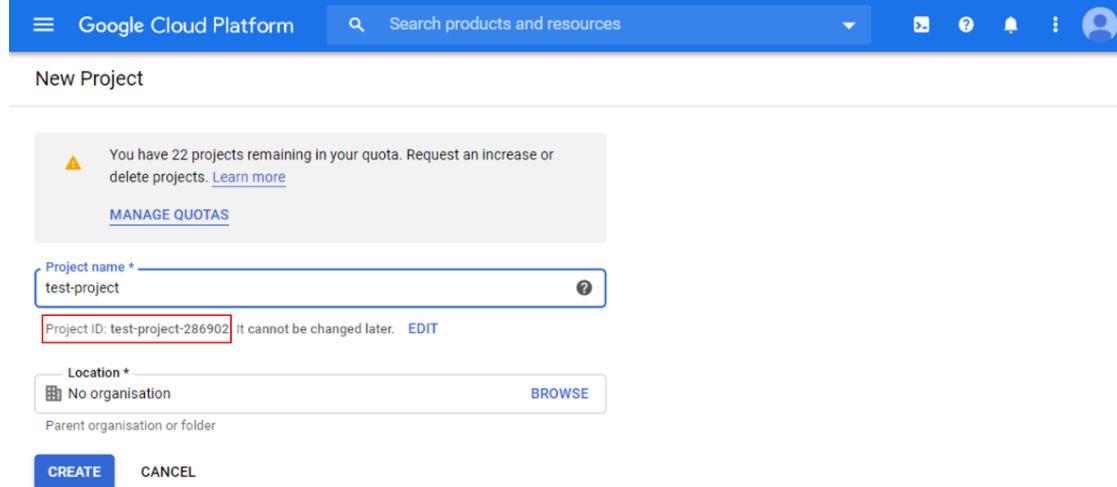

2.

Enable billing for your project Billing needs to be enabled for your project to use Google Cloud Platform features. Follow the guide in Google cloud documentation to enable billing. <https://cloud.google.com/billing/docs/how-to/modify-project> 3. Enable the Cloud IoT Core API In Google Cloud console, click on the top left menu button and search for IoT

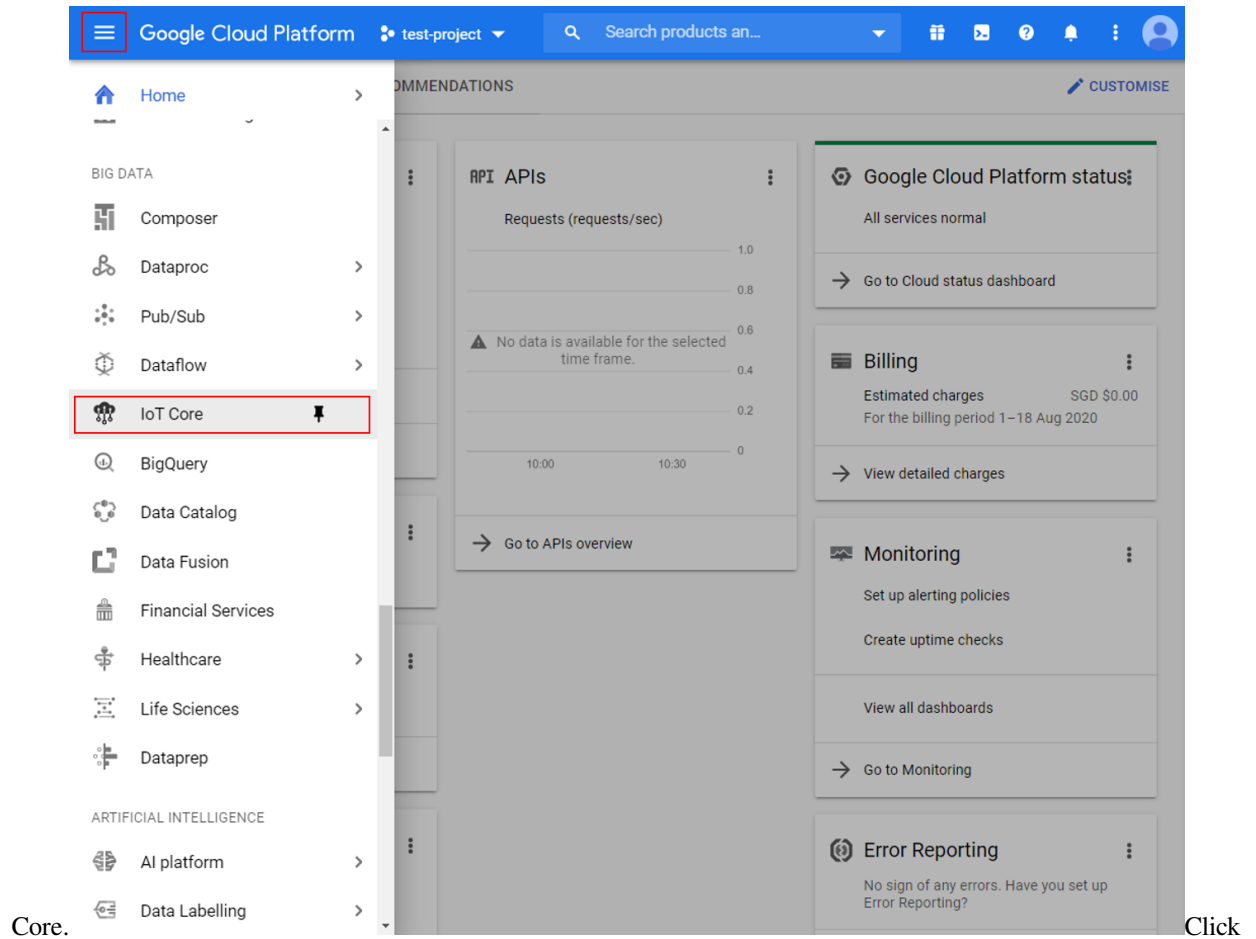

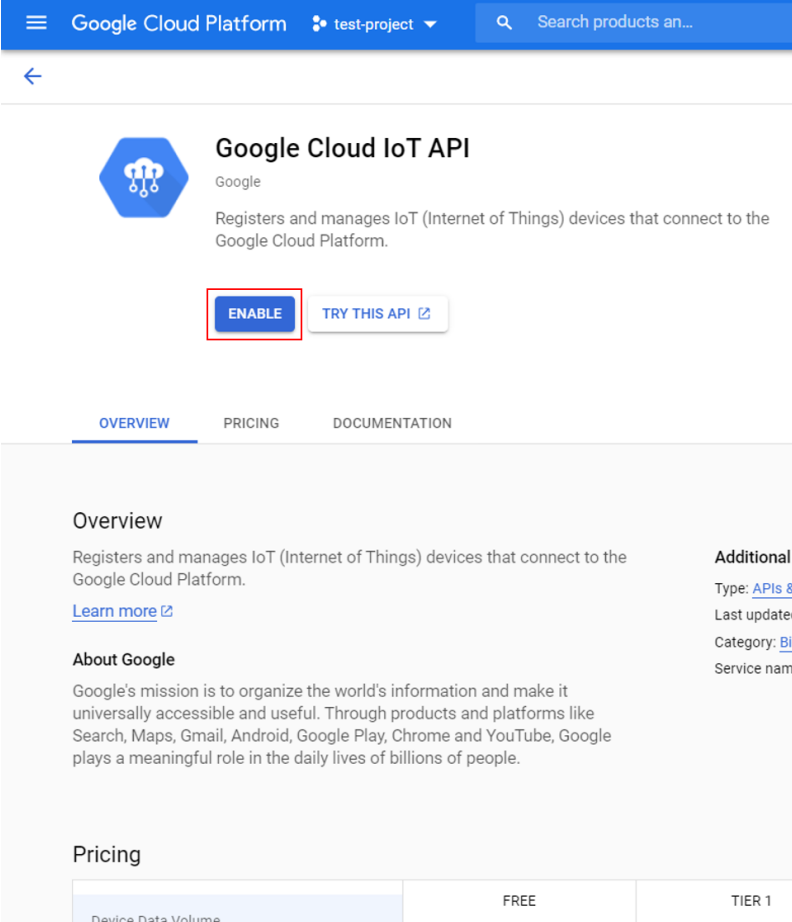



The screenshot shows the Google Cloud IoT API page. At the top, there's a blue header with the Google Cloud Platform logo, a dropdown menu for 'test-project', and a search bar. Below the header, the page title 'Google Cloud IoT API' is displayed, followed by the Google logo and a description: 'Registers and manages IoT (Internet of Things) devices that connect to the Google Cloud Platform.' A red box highlights the 'ENABLE' button, with a 'TRY THIS API' button next to it. Below the buttons, there are tabs for 'OVERVIEW', 'PRICING', and 'DOCUMENTATION'. The 'OVERVIEW' tab is selected, showing an 'Overview' section with a description and a 'Learn more' link. Below that is an 'About Google' section. The 'PRICING' tab is also visible, showing a table with columns for 'Device Data Volume', 'FREE', and 'TIER 1'.

Device Data Volume	FREE	TIER 1


enable to activate Google Cloud IoT API for your project.

Create a Cloud Pub/Sub topic In Google Cloud console, click on the top left menu button and search for

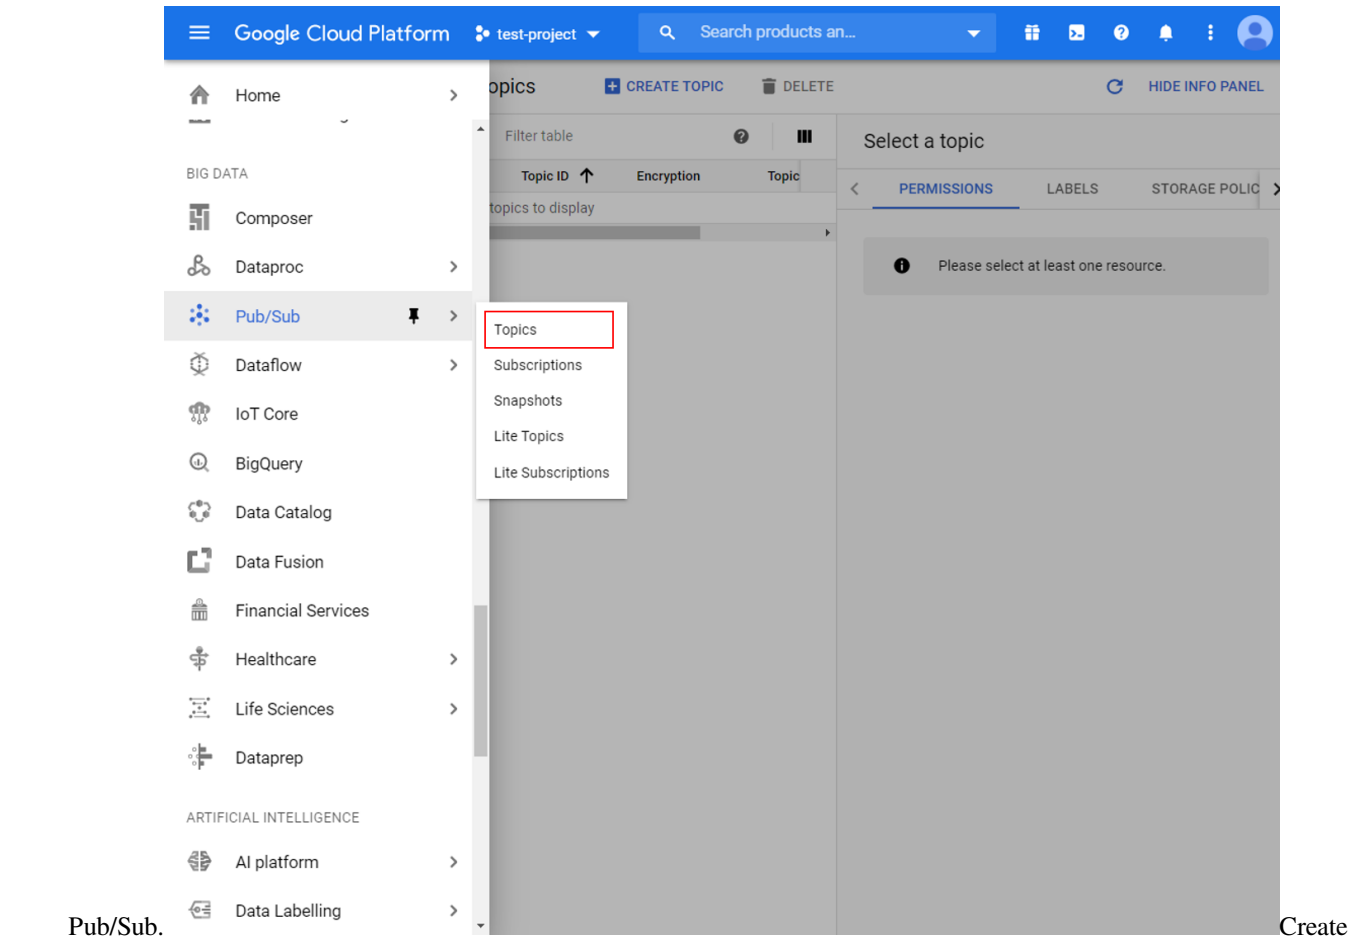


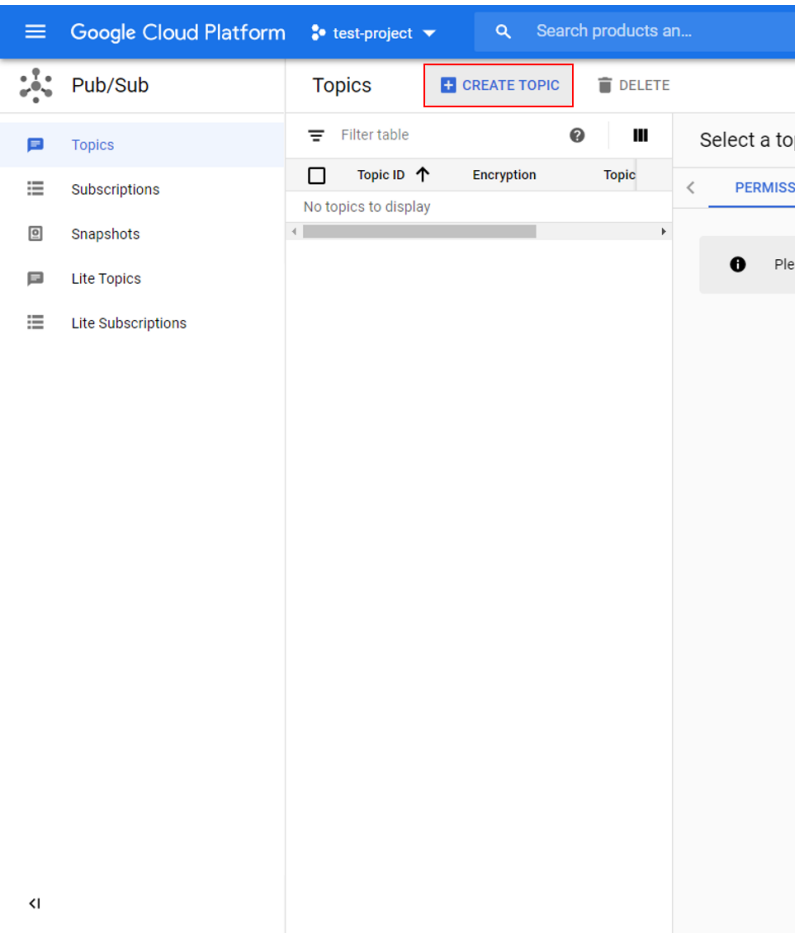

a new topic for your project and give it a suitable topic ID.
the topic is created, go to the permissions tab of the info panel, and add “cloud-iot@system.gserviceaccount.com” with the role of “Pub/Sub Publisher” .

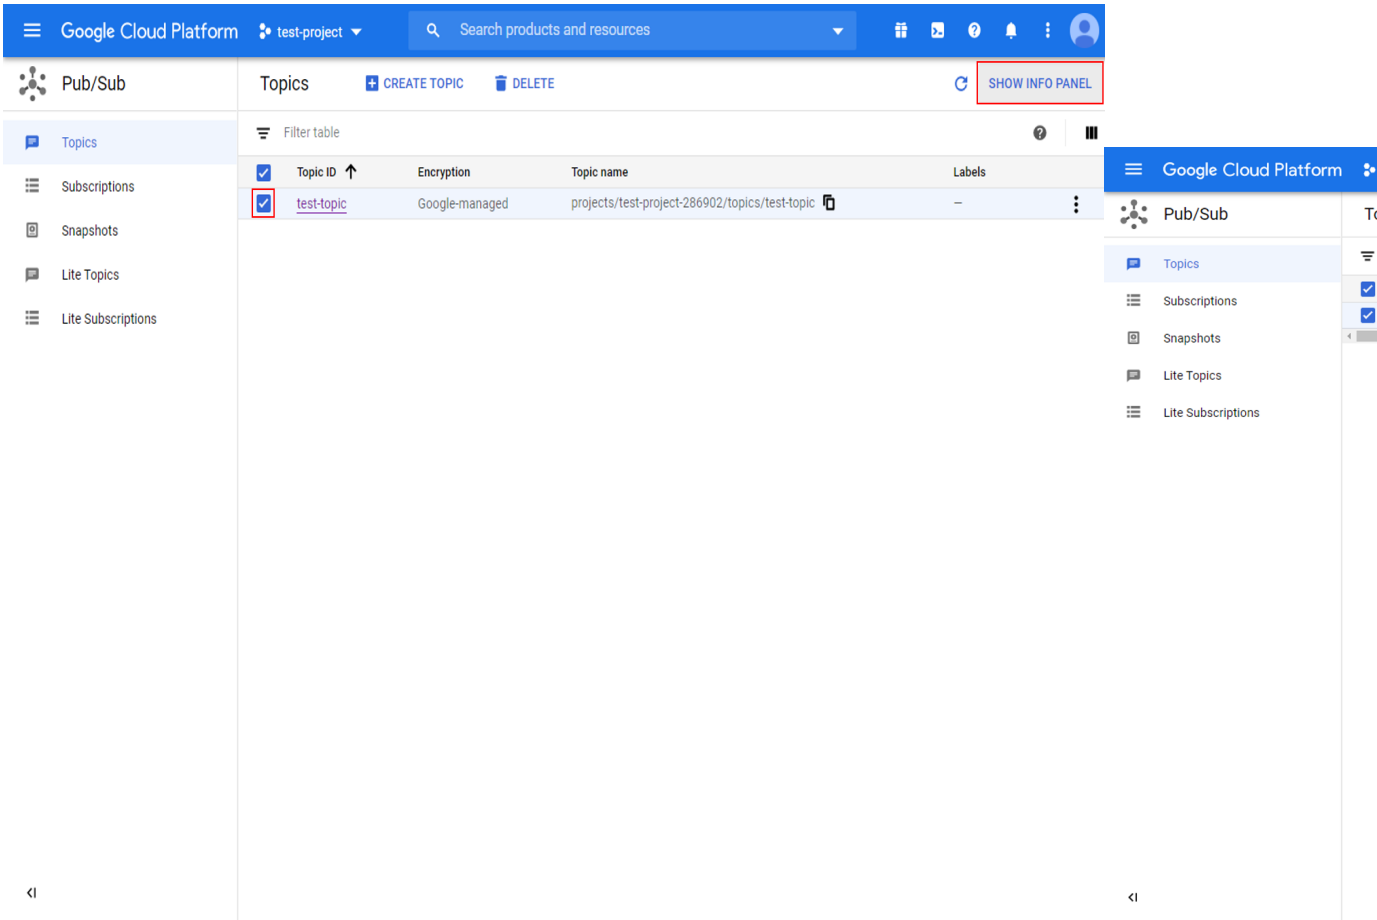


a device registry Go back to the IoT Core settings page and create a new reg-

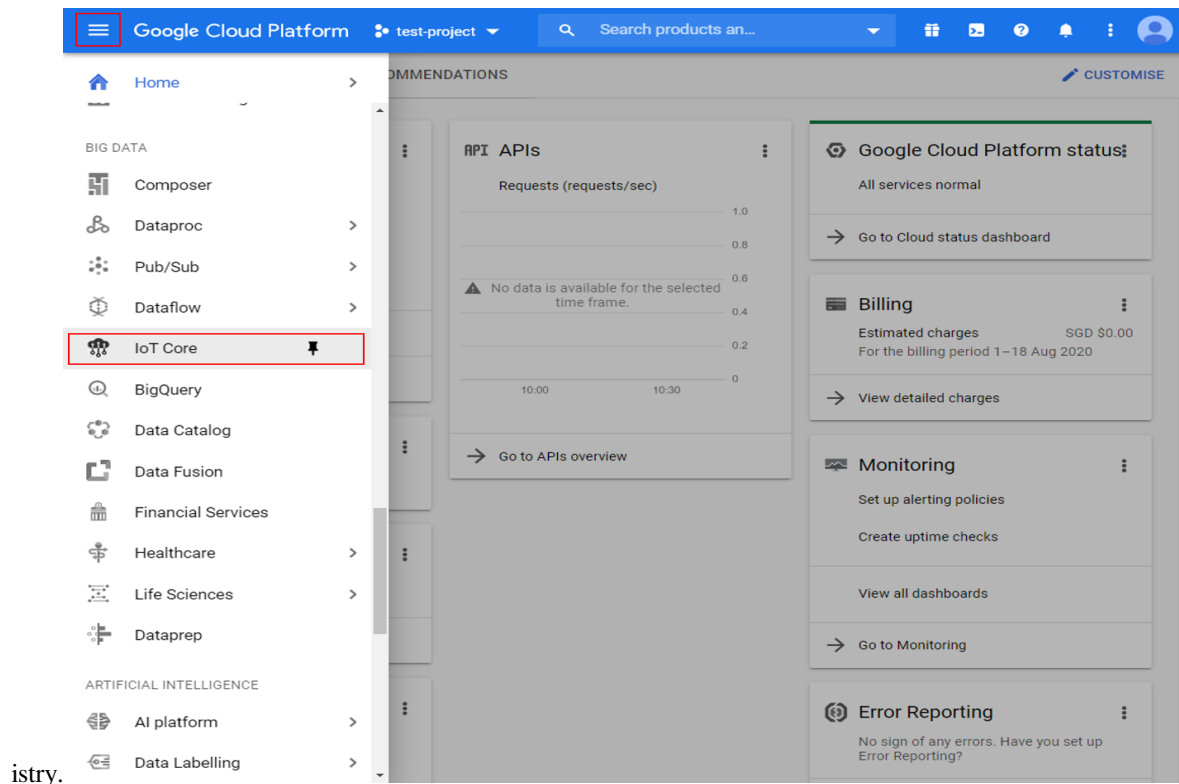

istry.

a suitable **Registry ID** and in which to store data. Remember the ****Registry ID** and **Region** for use with Ameba later. For the Pub/Sub topic, select the topic created in the previous

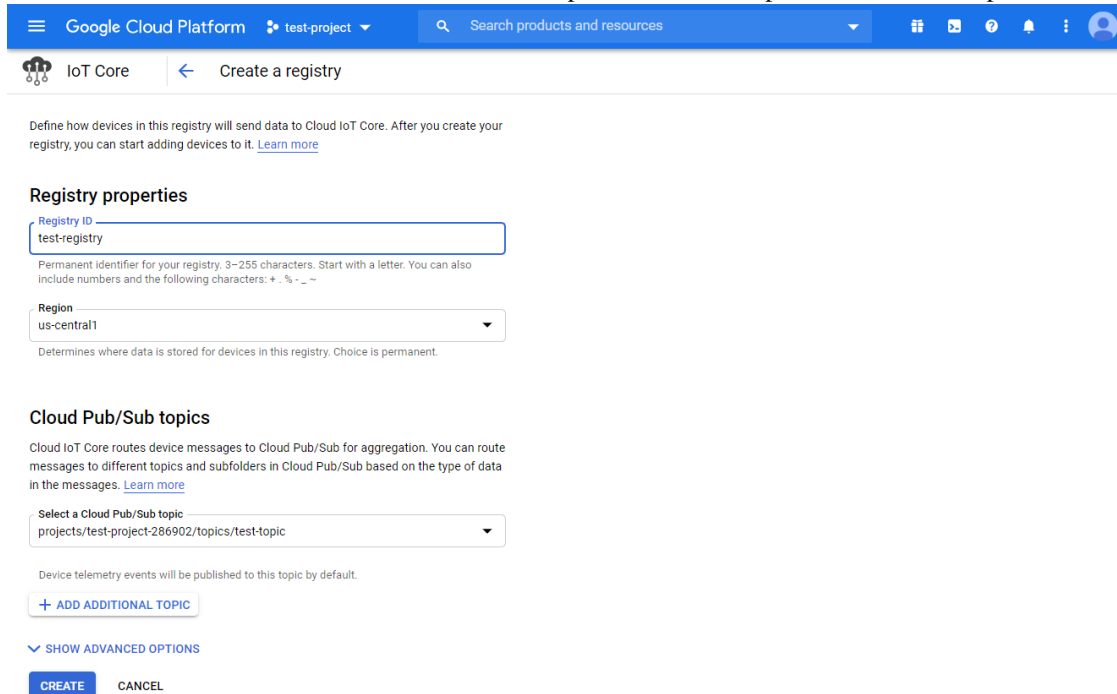


step. 6.

Create a public/private key pair Using Openssl in a terminal in Windows/Linux/MacOs, run the following commands to generate a private and public key pair. Two files will be created by these commands,

“ec_private.pem” containing the private key, and “ec_public.pem” containing the public key.

```
$ openssl ecparam -genkey -name prime256v1 -noout -out ec_private.pem
$ openssl ec -in ec_private.pem -pubout -out ec_public.pem
```

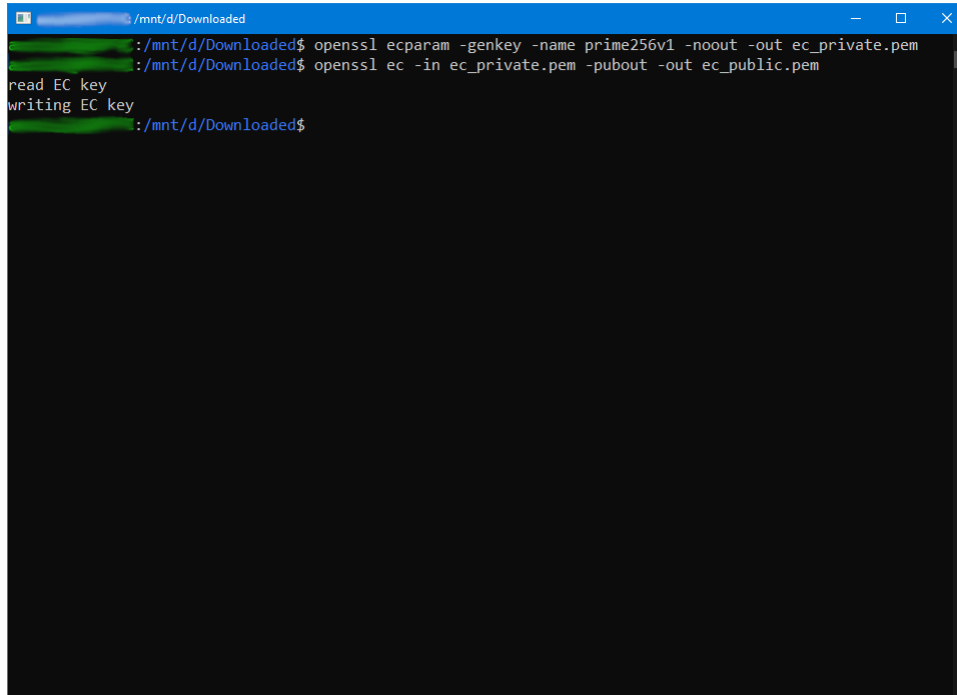A screenshot of a terminal window with a blue title bar. The terminal shows the execution of two OpenSSL commands. The first command generates a private key, and the second command generates a public key from the private key. The output of the second command shows the public key being written to a file. The terminal prompt is "/mnt/d/Downloaded\$".

```
/mnt/d/Downloaded$ openssl ecparam -genkey -name prime256v1 -noout -out ec_private.pem
/mnt/d/Downloaded$ openssl ec -in ec_private.pem -pubout -out ec_public.pem
read EC key
writing EC key
/mnt/d/Downloaded$
```

Run the next command to extract out the private key, and remember the highlighted string of hexadecimal numbers for use with Ameba later.


```
$ openssl ec -in ec_private.pem -noout -text
```

```


/mnt/d/Downloaded$ openssl ec -in ec_private.pem -noout -text
read EC key
Private-Key: (256 bit)
priv:
    f9:93:86:98:66:b0:f0:34:79:c5:fe:c9:82:50:0d:
    76:f2:ad:c6:2e:23:b9:af:02:c0:1c:d4:11:65:81:
    0a:fb
pub:
    04:29:8f:09:db:9c:d6:e2:b2:05:b8:11:c0:b5:f7:
    90:2a:7c:42:42:3e:db:ec:2d:05:88:b3:8b:14:09:
    9e:de:2d:ec:1b:da:7f:ae:6a:8d:31:55:e1:22:0c:
    d8:94:63:a2:4a:79:09:6f:57:68:76:61:72:9e:e3:
    22:23:93:fd:a6
ASN1 OID: prime256v1
NIST CURVE: P-256
/mnt/d/Downloaded$

```

7. Create a device Go back to the IoT Core settings page and create a new device.

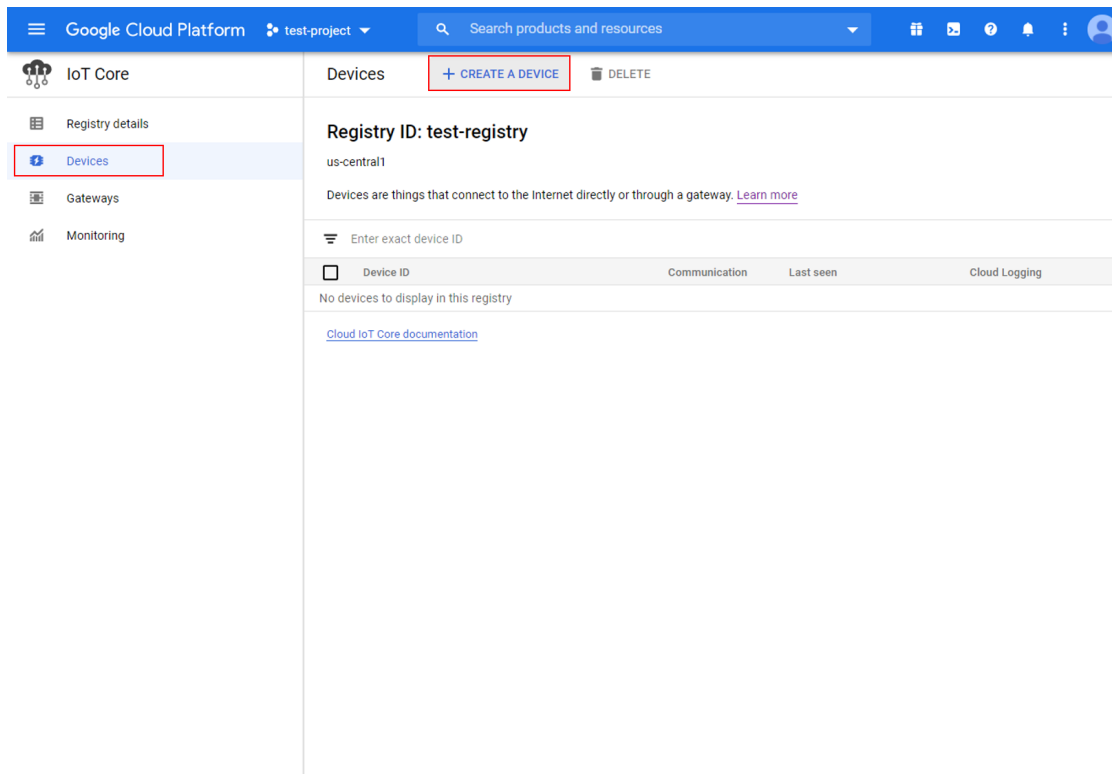

Give the device a suitable **Device ID** and remember it for use with Ameba

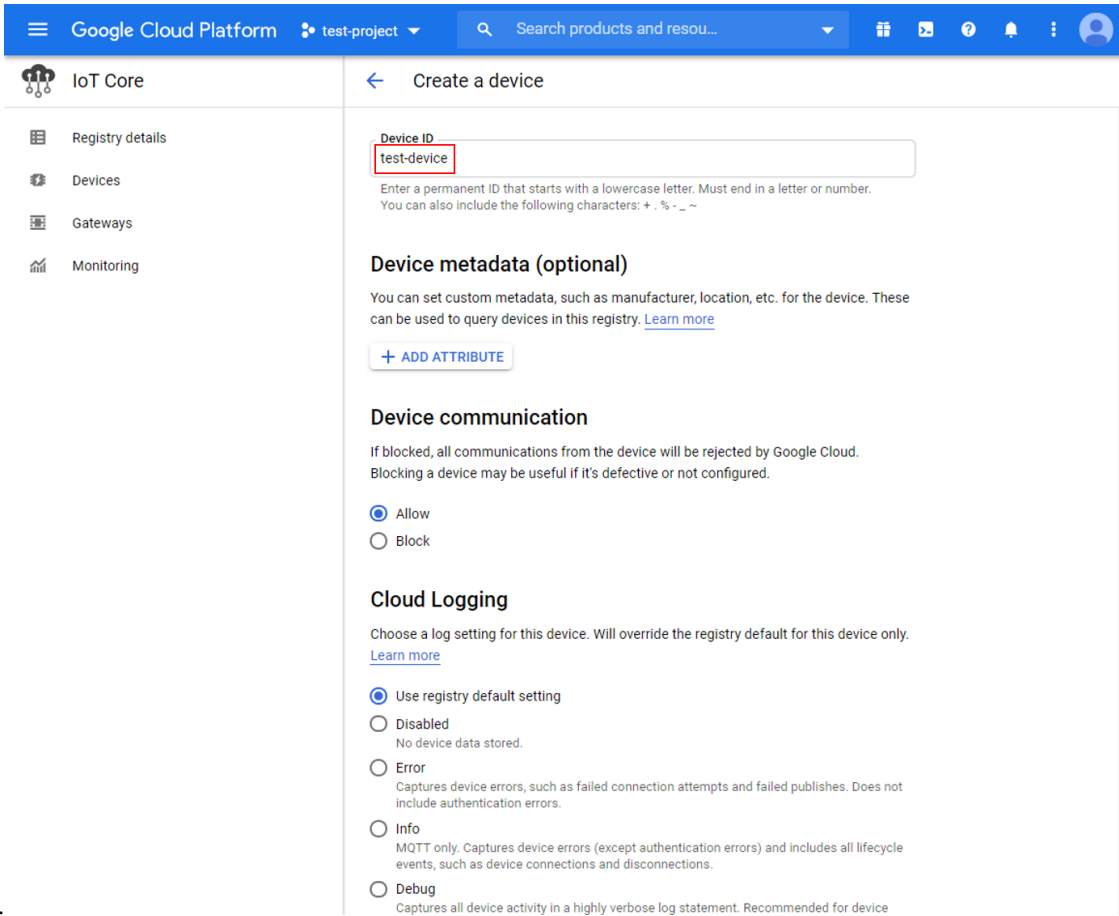

later. In the authentication section of the additional options, upload the previously generated “ec_public.pem” public

Google Cloud Platform test-project Search products and resou...

IoT Core

- Registry details
- Devices
- Gateways
- Monitoring

Create a device

No device data stored.

☐ Error
Captures device errors, such as failed connection attempts and failed publishes. Does not include authentication errors.

☐ Info
MQTT only. Captures device errors (except authentication errors) and includes all lifecycle events, such as device connections and disconnections.

☐ Debug
Captures all device activity in a highly verbose log statement. Recommended for device troubleshooting.

Authentication (optional)

Specify the public key that will be used to authenticate this device. You can leave the key empty, but devices will not be able to connect to Google Cloud without a key. [Learn more](#)

Input method

☐ Enter manually

☒ Upload

Public key format
ES256

Public key value
ec_public.pem [BROWSE](#)

File content must be in PEM format

Public key expiry date (optional)

☐ Expires on:

Date HKT

^ COMMUNICATION, CLOUD LOGGING, AUTHENTICATION

[CREATE](#) [CANCEL](#)

key.

8.

Create a Cloud Pub/Sub subscription To observe messages sent by Ameba, create a subscription in

Google Cloud Platform

test-project

Search products and resou...

Pub/Sub

Topics

Subscriptions

Snapshots

Lite Topics

Lite Subscriptions

Subscriptions

CREATE SUBSCRIPTION

DELETE

SHOW INFO PANEL

Filter table

Subscription ID

Delivery type

Topic name

Subscription name

Acknowledge deac

No subscriptions to display


Pub/Sub.


Choose

a suitable subscription ID and select the previously created topic.


Example

Open the example in “File” -> “Examples” -> “AmebaMQTTClient” -> “Google_Cloud_IoT” .

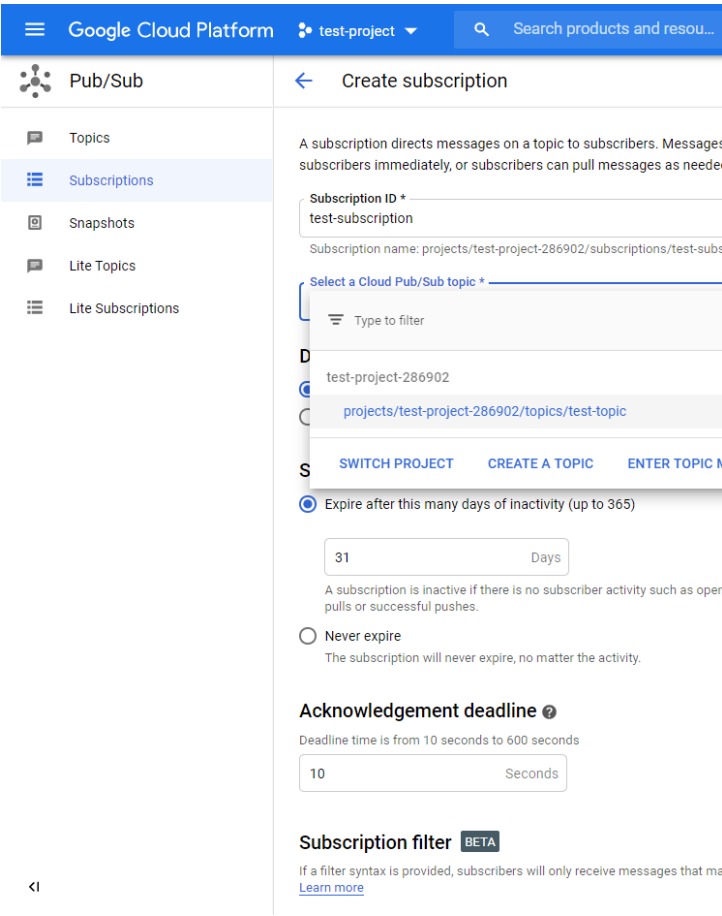

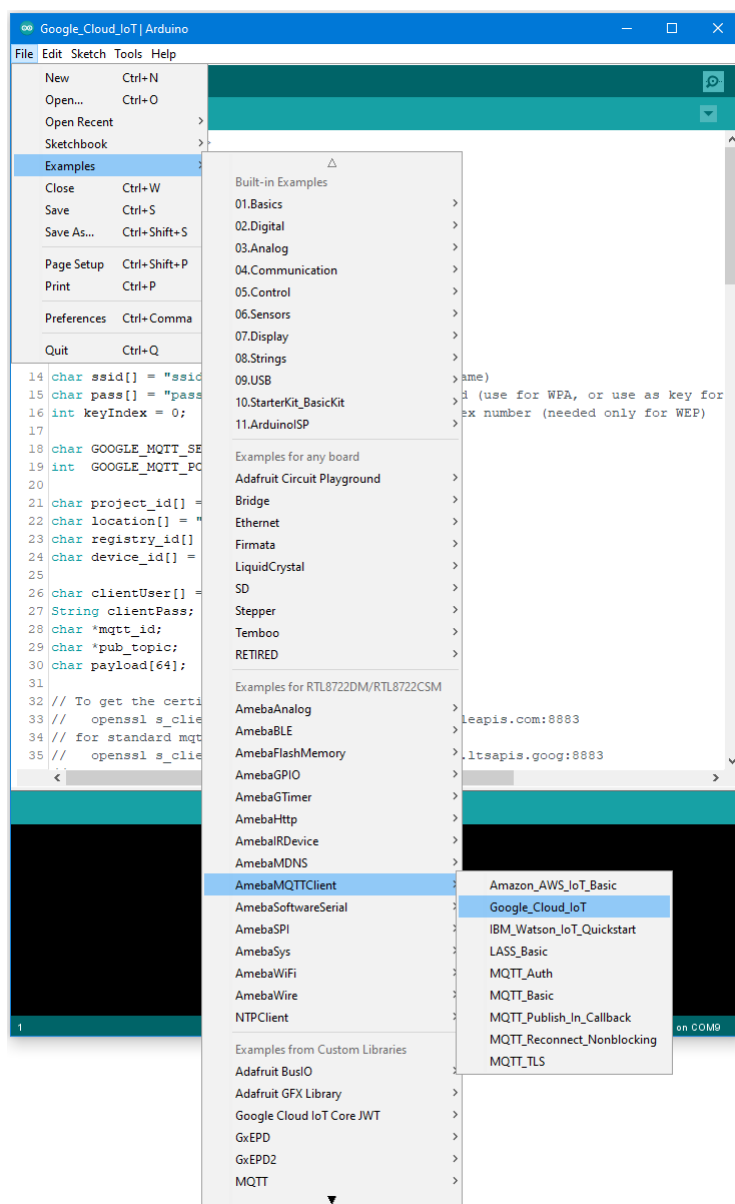

Enter the required information in the highlighted sections below.

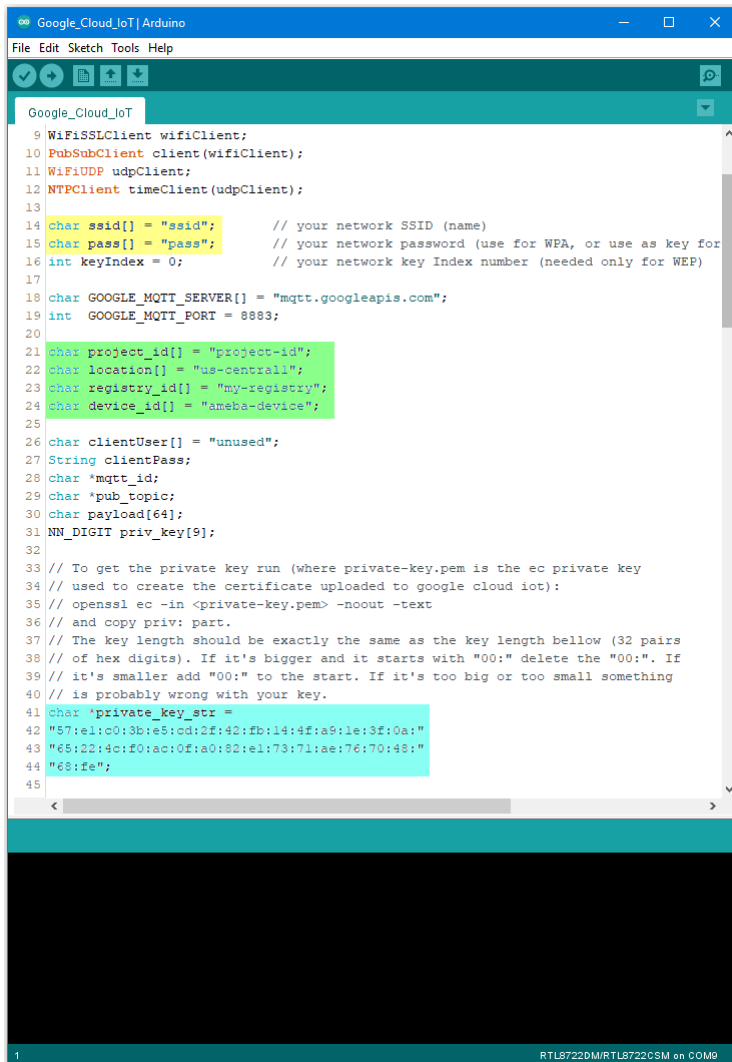


```

9  WiFiSSLClient wifiClient;
10 PubSubClient client(wifiClient);
11 WiFiUDP udpClient;
12 NTPClient timeClient(udpClient);
13
14 char ssid[] = "ssid";           // your network SSID (name)
15 char pass[] = "pass";          // your network password (use for WPA, or use as key for
16 int keyIndex = 0;              // your network key Index number (needed only for WEP)
17
18 char GOOGLE_MQTT_SERVER[] = "mqtt.googleapis.com";
19 int  GOOGLE_MQTT_PORT = 8883;
20
21 char project_id[] = "project-id";
22 char location[] = "us-central1";
23 char registry_id[] = "my-registry";
24 char device_id[] = "ameba-device";
25
26 char clientUser[] = "unused";
27 String clientPass;
28 char *mqtt_id;
29 char *pub_topic;
30 char payload[64];
31 NN_DIGIT priv_key[9];
32
33 // To get the private key run (where private-key.pem is the ec private key
34 // used to create the certificate uploaded to google cloud iot):
35 // openssl ec -in <private-key.pem> -noout -text
36 // and copy priv: part.
37 // The key length should be exactly the same as the key length below (32 pairs
38 // of hex digits). If it's bigger and it starts with "00:" delete the "00:". If
39 // it's smaller add "00:" to the start. If it's too big or too small something
40 // is probably wrong with your key.
41 char *private_key_str =
42 "57:e1:c0:3b:e5:cd:2f:42:fb:14:4f:a9:1e:3f:0a:"
43 "65:22:4c:f0:ac:0f:a0:82:e1:73:71:ae:76:70:48:"
44 "68:fe";
45

```

In the yellow section, enter the SSID and password required to connect to your WiFi network. In the green section, enter the Project ID, server Region, Registry ID and Device ID previously configured in Google Cloud console. In the blue section, enter the hexadecimal string previously extracted from the private key. Upload the code and press the reset button on Ameba once the upload is finished. Open the serial monitor and observe as Ameba connects and sends messages to Google Cloud IoT.

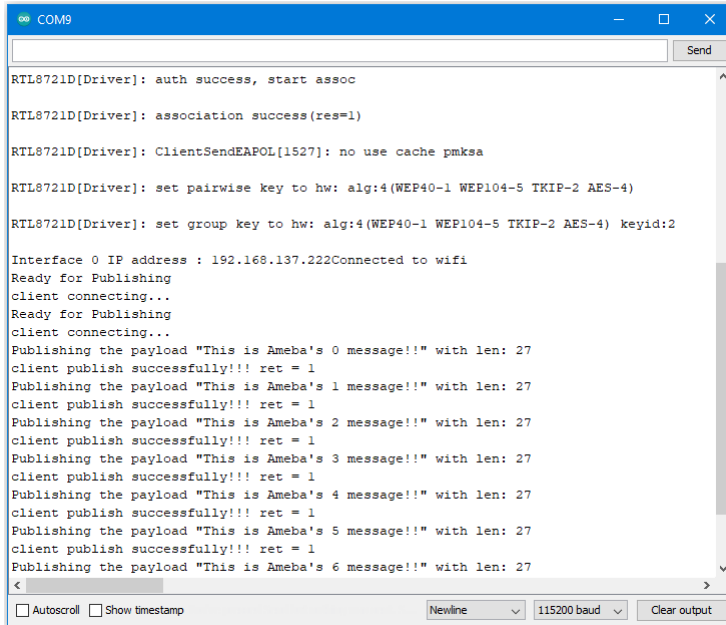

```


COM9
Send

RTL8721D[Driver]: auth success, start assoc
RTL8721D[Driver]: association success(res=1)
RTL8721D[Driver]: ClientSendEAPOL[1527]: no use cache pmksa
RTL8721D[Driver]: set pairwise key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4)
RTL8721D[Driver]: set group key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4) keyid:2
Interface 0 IP address : 192.168.137.222Connected to wifi
Ready for Publishing
client connecting...
Ready for Publishing
client connecting...
Publishing the payload "This is Ameba's 0 message!!" with len: 27
client publish successfully!!! ret = 1
Publishing the payload "This is Ameba's 1 message!!" with len: 27
client publish successfully!!! ret = 1
Publishing the payload "This is Ameba's 2 message!!" with len: 27
client publish successfully!!! ret = 1
Publishing the payload "This is Ameba's 3 message!!" with len: 27
client publish successfully!!! ret = 1
Publishing the payload "This is Ameba's 4 message!!" with len: 27
client publish successfully!!! ret = 1
Publishing the payload "This is Ameba's 5 message!!" with len: 27
client publish successfully!!! ret = 1
Publishing the payload "This is Ameba's 6 message!!" with len: 27
Autoscroll Show timestamp Newline 115200 baud Clear output

```

In Google Cloud console, go to Pub/Sub

subscriptions, select the previously created subscription, and click view messages. Here you can view the messages sent by

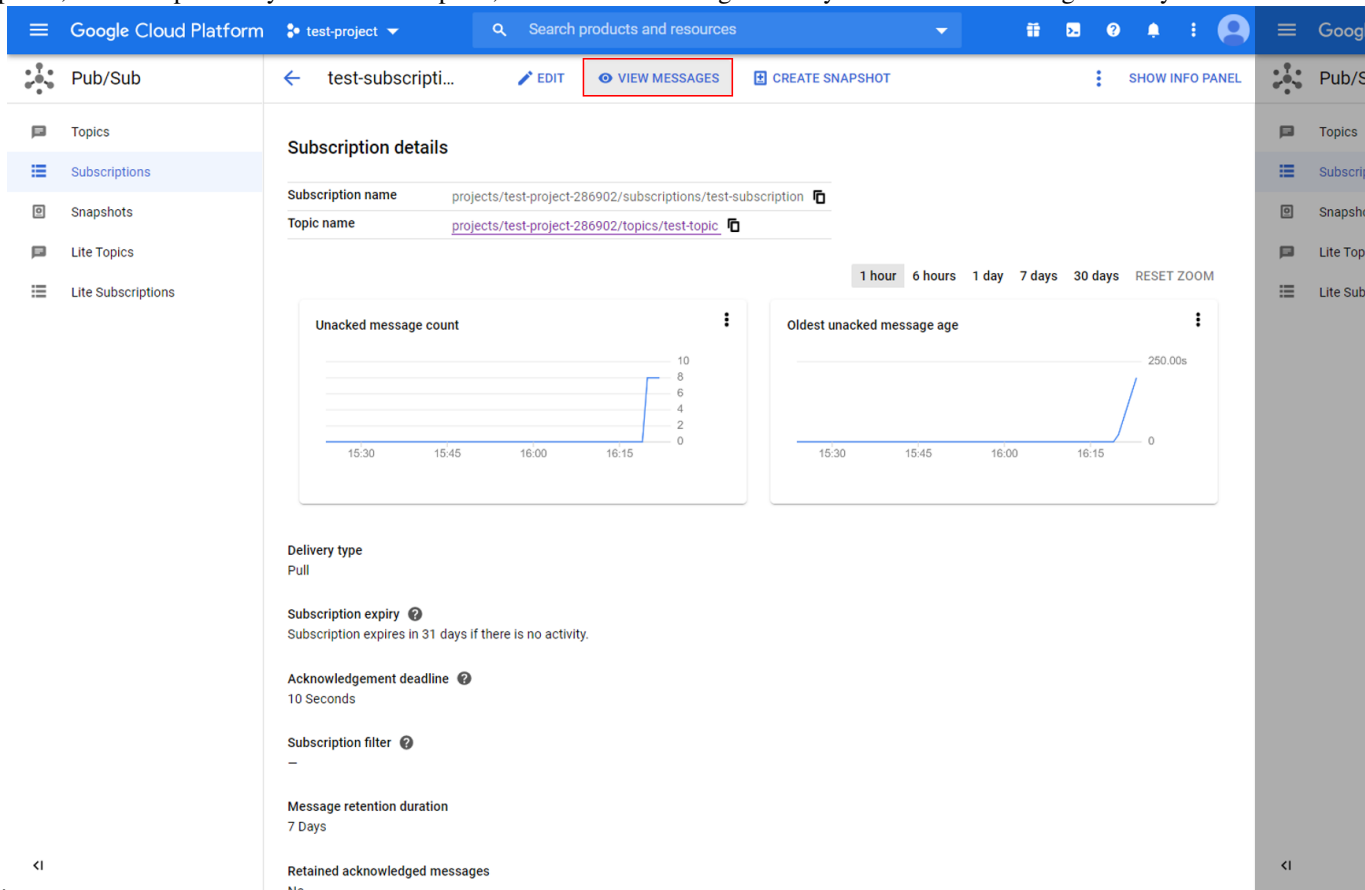

Google Cloud Platform test-project Search products and resources

Pub/Sub test-subscri... EDIT VIEW MESSAGES CREATE SNAPSHOT SHOW INFO PANEL

Topics Subscriptions Snapshots Lite Topics Lite Subscriptions

Subscription details

Subscription name projects/test-project-286902/subscriptions/test-subscription

Topic name projects/test-project-286902/topics/test-topic

Unacked message count

Oldest unacked message age

Delivery type Pull

Subscription expiry ? Subscription expires in 31 days if there is no activity.

Acknowledgement deadline ? 10 Seconds

Subscription filter ? -

Message retention duration 7 Days

Retained acknowledged messages

Ameba.

Code Reference

In `setup()`, we set up RootCA which is required to form a TLS connection with Google's servers.

```
wifiClient.setRootCA((unsigned char*)rootCABuff);
```

In `loop()`, each loop checks the Internet status and re-connect to it when the environment has a problem.

```
if (WiFi.status() != WL_CONNECTED) {  
    while (WiFi.begin(ssid, pass) != WL_CONNECTED)  
    {  
        delay(1000);  
    }  
    Serial.println("Connected to wifi");  
}
```

To publish messages, `mqtt_id`, `clientPass` and `pub_topic` are required. `mqtt_id` is generated by printing the project ID, server location, registry ID and device ID in the required format:

```
mqtt_id = (char *)malloc(strlen("projects/") + strlen(project_id) + strlen("/  
↪locations/us-central1/registries/") + strlen(registry_id) + strlen("/devices/") +  
↪strlen(device_id) + 1);  
sprintf(mqtt_id, "projects/%s/locations/us-central1/registries/%s/devices/%s",  
↪project_id, registry_id, device_id);
```

`clientPass` is generated using a JSON web token (JWT) generator function, which requires the project ID and current time, and signs it with the private key:

```
clientPass = CreateJwt(project_id, timeClient.getEpochTime(), priv_key);
```

`pub_topic` is generated by printing the project ID and topic in the required format:

```
pub_topic = (char *)malloc(strlen("/devices/") + strlen(device_id) + strlen("/events  
↪") + 1);  
sprintf(pub_topic, "/devices/%s/events", device_id);
```

MQTT Server setting:

```
client.setServer(GOOGLE_MQTT_SERVER, GOOGLE_MQTT_PORT);  
client.setPublishQos(MQTTQOS1);  
client.waitForAck(true);
```

Connect to google cloud and publish messages:

```
if (client.connect(mqtt_id, clientUser, clientPass.c_str())){  
    // ...
```

(下页继续)

(续上页)

```
    for(int i = 0; i < count; i++){
        // ...
        sprintf(payload, "This is Ameba's %d message!!", i);
        ret = client.publish(pub_topic, payload);
        // ...
    }
    // ...
    client.disconnect();
}
free(mqtt_id);
free(pub_topic);
```

IPv6 –Ameba as IPv6 Server/Client over TCP

Materials

- AmebaD [RTL8722DM/RTL8722CSM/RTL8722DM MINI] / [RTL8720DN(BW16)] x 2


Example

Introduction


This example shows how Ameba can communicate on the local network using Internet Protocol version 6 over TCP. Note that this example only works after you have set up the server and then configure the client accordingly.

Procedure

Step 1. IPv6TCPServer Open the example, “Files” -> “Examples” -> “AmebaWiFi” -> “IPv6TCPServer” .

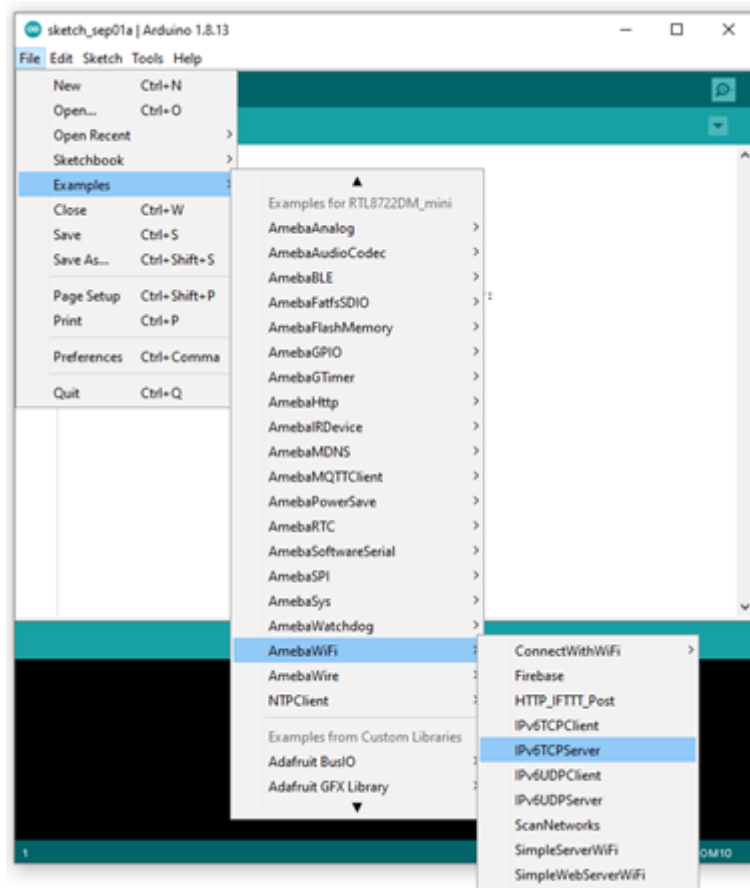

In the sample code, modify the highlighted section to enter the information required (ssid, password) to connect to your WiFi network.

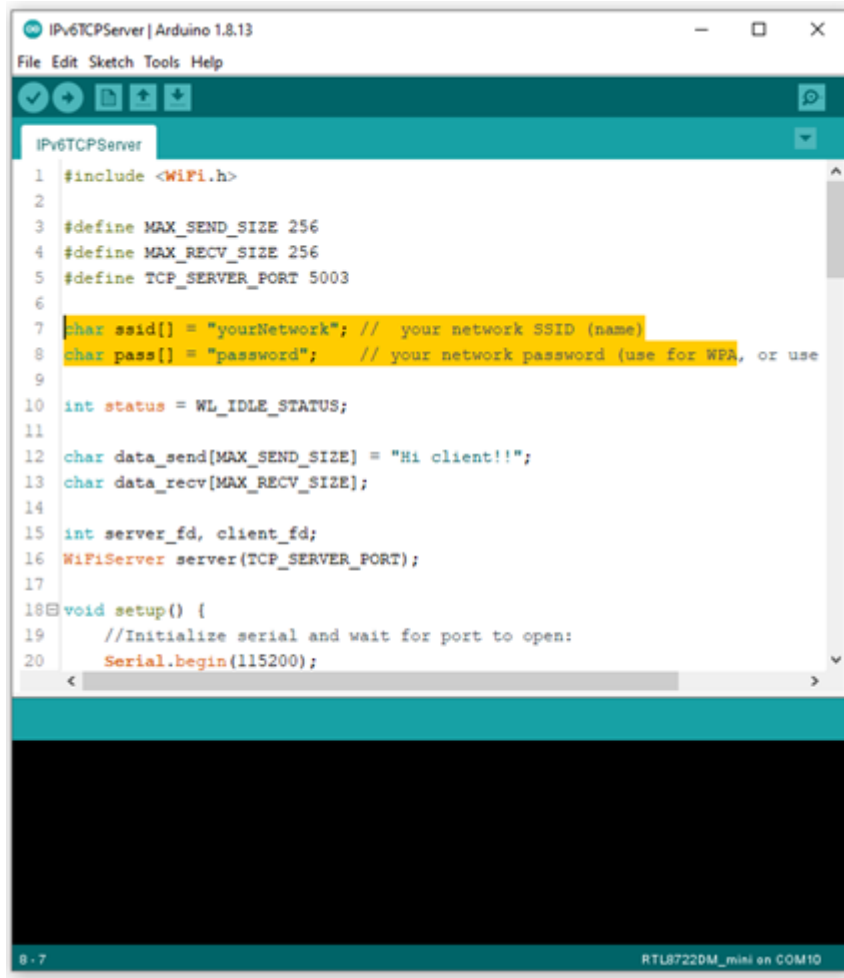


```

1  #include <WiFi.h>
2
3  #define MAX_SEND_SIZE 256
4  #define MAX_RECV_SIZE 256
5  #define TCP_SERVER_PORT 5003
6
7  char ssid[] = "yourNetwork"; // your network SSID (name)
8  char pass[] = "password";    // your network password (use for WPA, or use
9
10 int status = WL_IDLE_STATUS;
11
12 char data_send[MAX_SEND_SIZE] = "Hi client!!";
13 char data_recv[MAX_RECV_SIZE];
14
15 int server_fd, client_fd;
16 WiFiServer server(TCP_SERVER_PORT);
17
18 void setup() {
19     //Initialize serial and wait for port to open:
20     Serial.begin(115200);

```

Next, upload the code and press the reset button on Ameba once the upload is finished. Open Serial Monitor and copy the IPv6 address of the Server (the highlighted area) for later use,

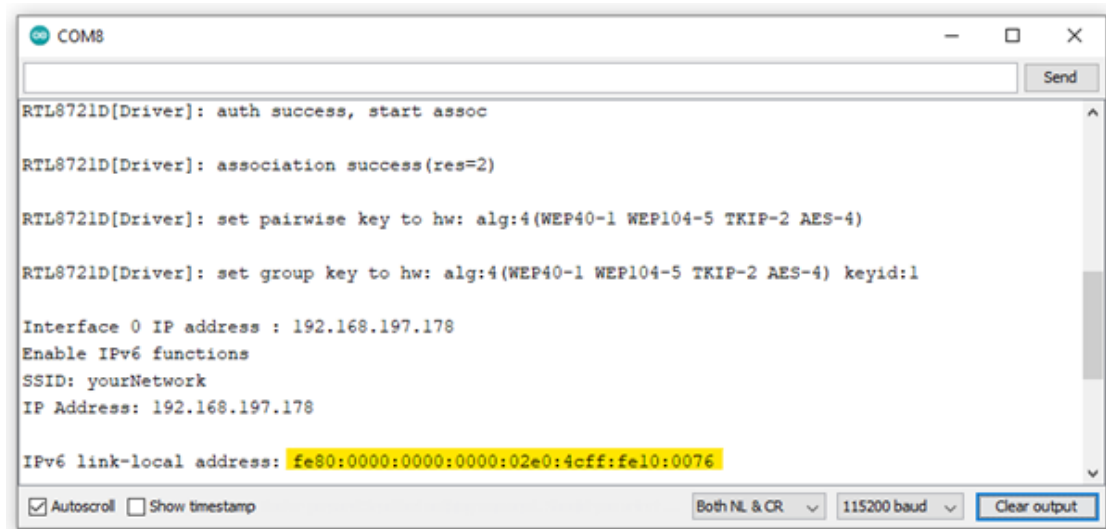

```

COM8

RTL8721D[Driver]: auth success, start assoc

RTL8721D[Driver]: association success(res=2)

RTL8721D[Driver]: set pairwise key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4)

RTL8721D[Driver]: set group key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4) keyid:1


Interface 0 IP address : 192.168.197.178
Enable IPv6 functions
SSID: yourNetwork
IP Address: 192.168.197.178

IPv6 link-local address: fe80:0000:0000:0000:02e0:4cff:fe10:0076


```

Step 2. IPv6TCPClient Now take the second Ameba D and open another example, “Files” -> “Examples” ->

“AmebaWiFi” -> “IPv6TCPClient”.

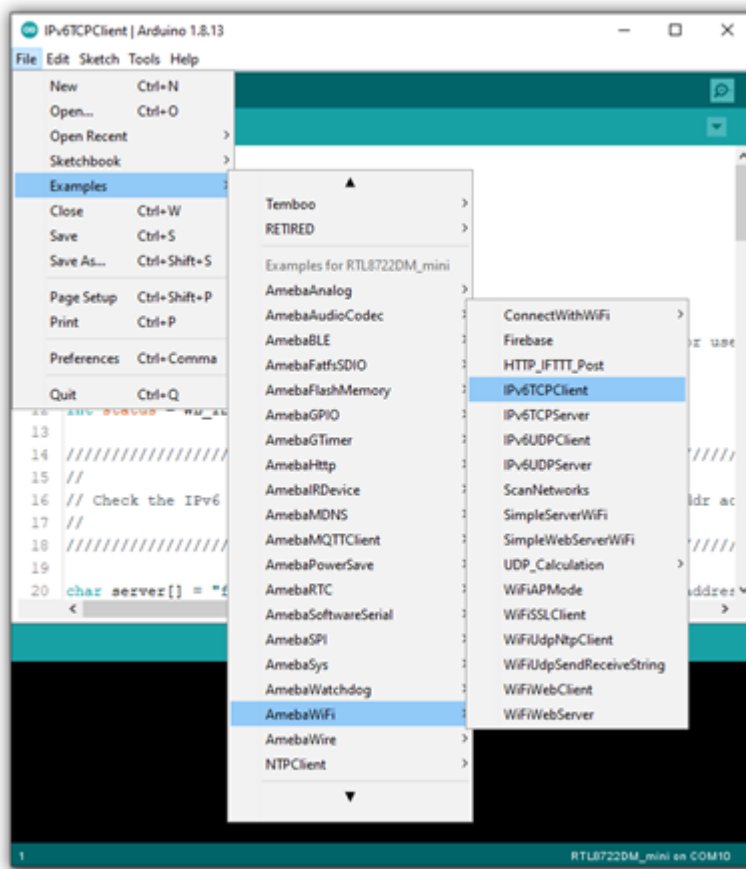


In the sample code, modify the highlighted section to enter the information required (ssid, password) to connect to your WiFi network.

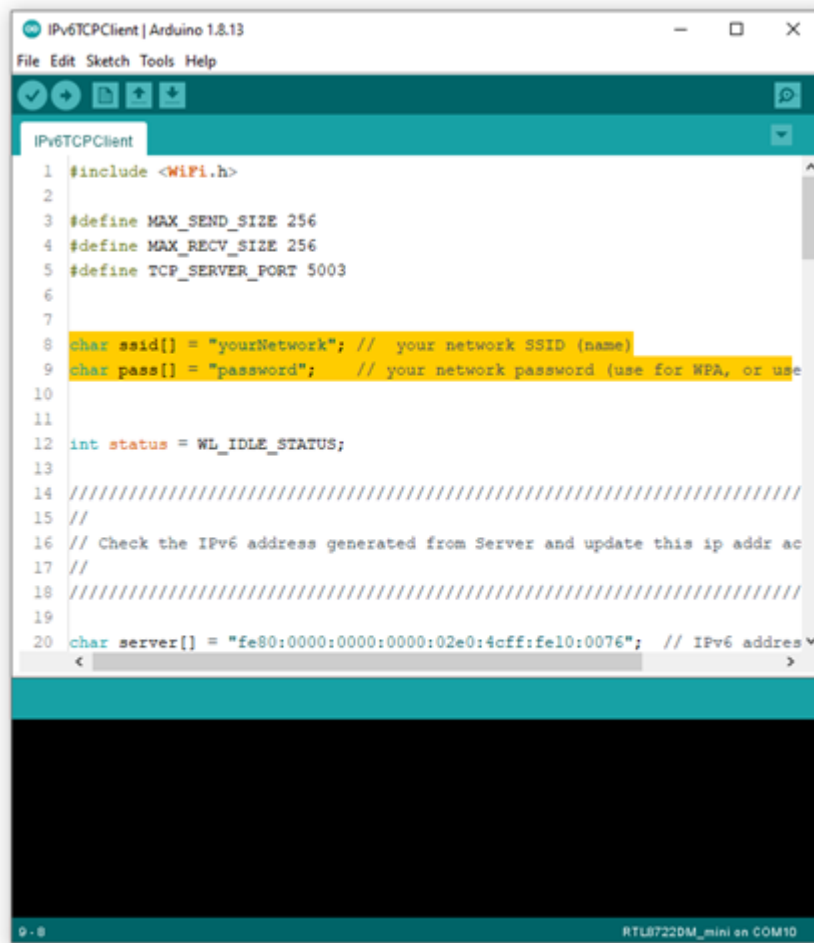

```
1 #include <WiFi.h>
2
3 #define MAX_SEND_SIZE 256
4 #define MAX_RECV_SIZE 256
5 #define TCP_SERVER_PORT 5003
6
7
8 char ssid[] = "yourNetwork"; // your network SSID (name)
9 char pass[] = "password"; // your network password (use for WPA, or use
10
11
12 int status = WL_IDLE_STATUS;
13
14 ///////////////////////////////////////////////////////////////////
15 //
16 // Check the IPv6 address generated from Server and update this ip addr ac
17 //
18 ///////////////////////////////////////////////////////////////////
19
20 char server[] = "fe80:0000:0000:0000:02e0:4cff:fe10:0076"; // IPv6 address
```

From the previous step, we have obtained the Server' s IPv6 address, now we copy the server' s IPv6 address to "IPv6TCPCClient" example in the highlighted area below,

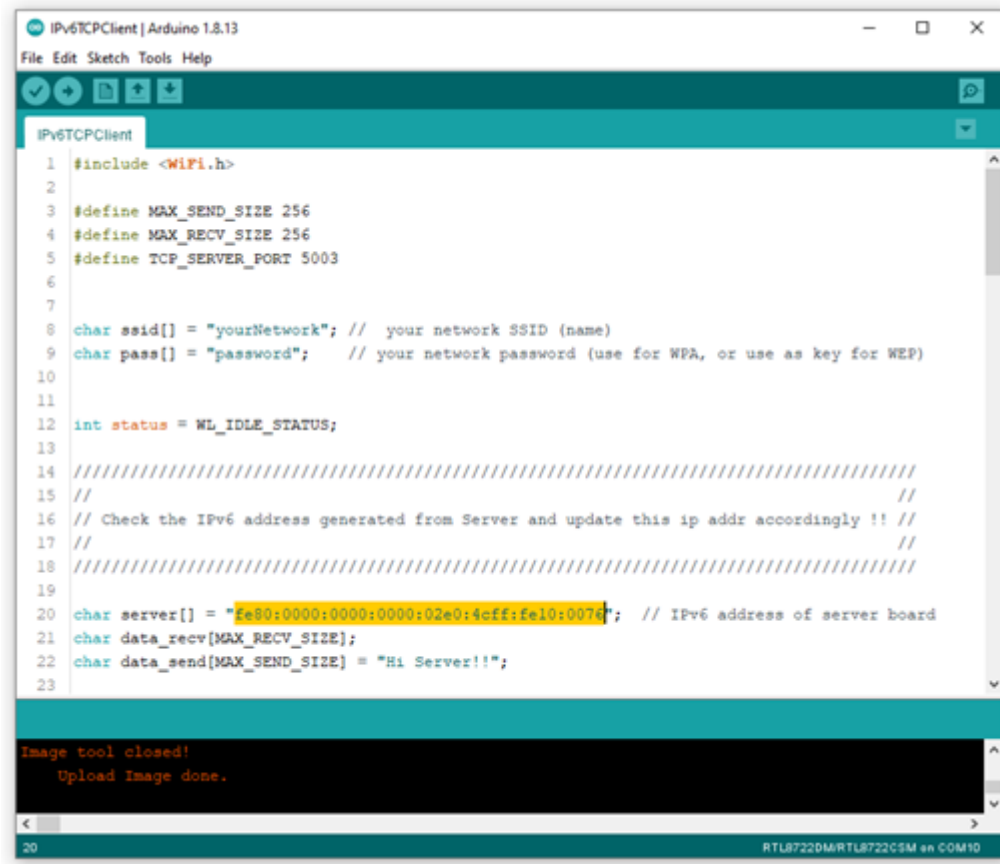


```
1 #include <WiFi.h>
2
3 #define MAX_SEND_SIZE 256
4 #define MAX_RECV_SIZE 256
5 #define TCP_SERVER_PORT 5003
6
7
8 char ssid[] = "yourNetwork"; // your network SSID (name)
9 char pass[] = "password";    // your network password (use for WPA, or use as key for WEP)
10
11
12 int status = WL_IDLE_STATUS;
13
14 ////////////////////////////////////////////////////////////////////////////////////////////////////////////////////
15 //
16 // Check the IPv6 address generated from Server and update this ip addr accordingly !! //
17 //
18 ////////////////////////////////////////////////////////////////////////////////////////////////////////////////////
19
20 char server[] = "fe80:0000:0000:0000:02e0:4c00:fe10:0074"; // IPv6 address of server board
21 char data_recv[MAX_RECV_SIZE];
22 char data_send[MAX_SEND_SIZE] = "Hi Server!!";
23
```

Image tool closed!
Upload Image done.

20 RTL8722DM/RTL8722C5M en COM10


Next, upload the code and press the reset button on Ameba once the upload is finished.

Open Serial Monitor on the port to the second Ameba D, you should see server and client are sending text message to each other at the same time.

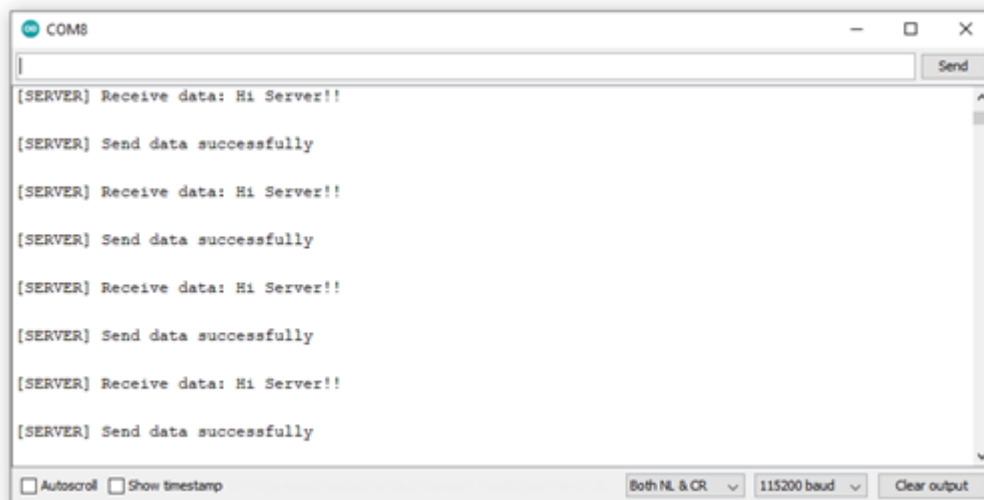

```
[SERVER] Receive data: Hi Server!!
[SERVER] Send data successfully
[SERVER] Receive data: Hi Server!!
[SERVER] Send data successfully
[SERVER] Receive data: Hi Server!!
[SERVER] Send data successfully
[SERVER] Receive data: Hi Server!!
[SERVER] Send data successfully
```

☐ Autoscroll ☐ Show timestamp Both NL & CR 115200 baud Clear output

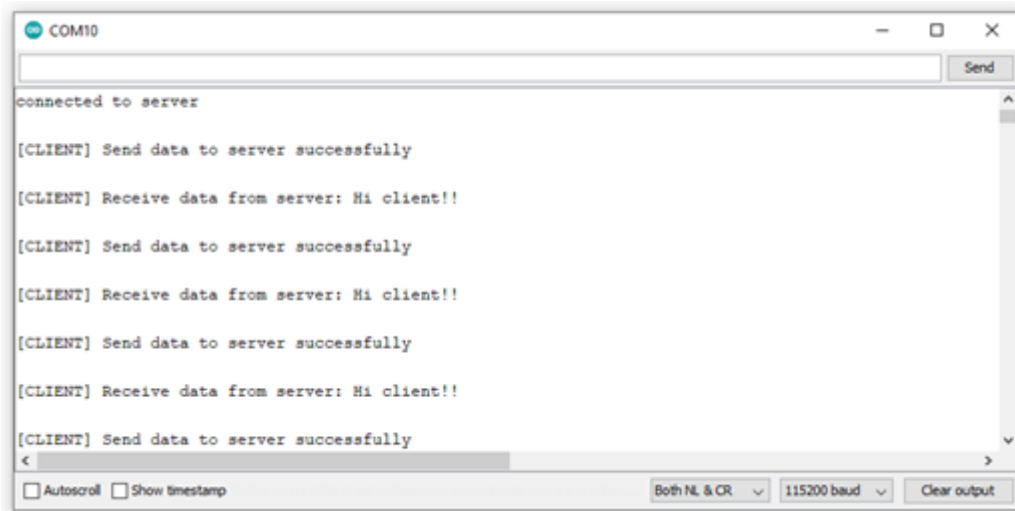

IPv6 –Ameba as IPv6 Server/Client over UDP


Materials

- AmebaD [RTL8722DM/RTL8722CSM/RTL8722DM MINI] / [RTL8720DN(BW16)] x 2


Example

Introduction

This example shows how Ameba can communicate on the local network using Internet Protocol version 6 over UDP. Note that this example only works after you have set up the server and then configure the client accordingly.

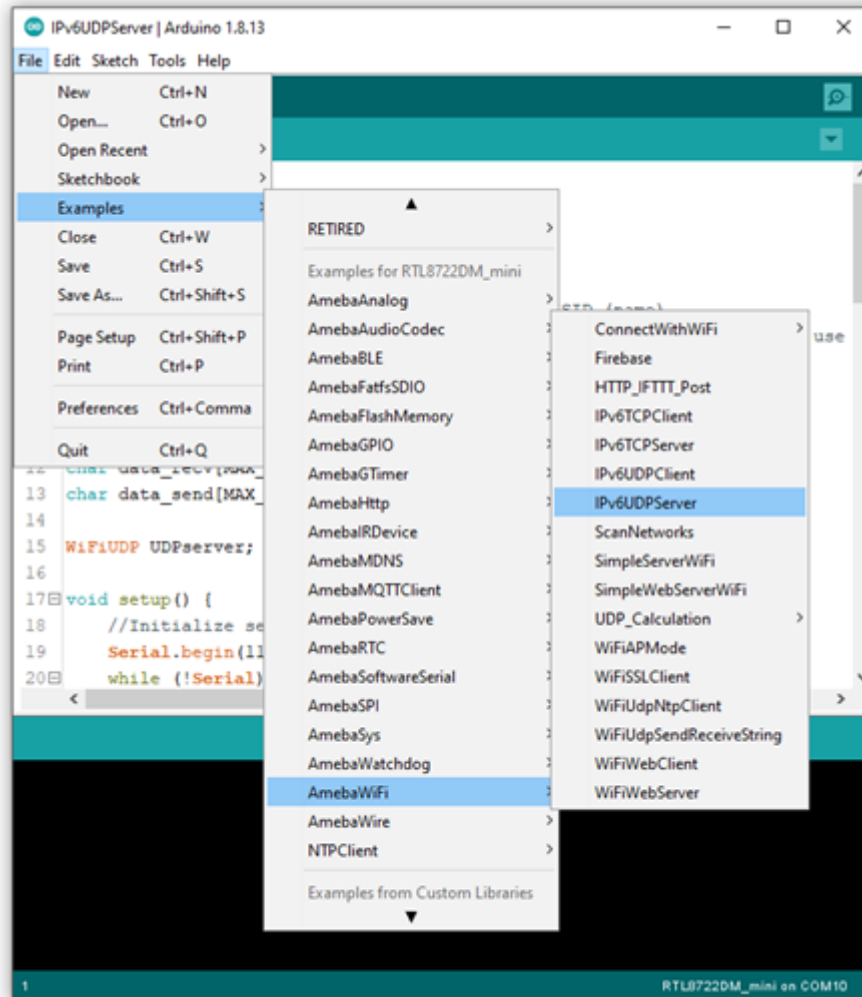

In the sample code, modify the highlighted section to enter the information required (ssid, password) to connect to your WiFi network.

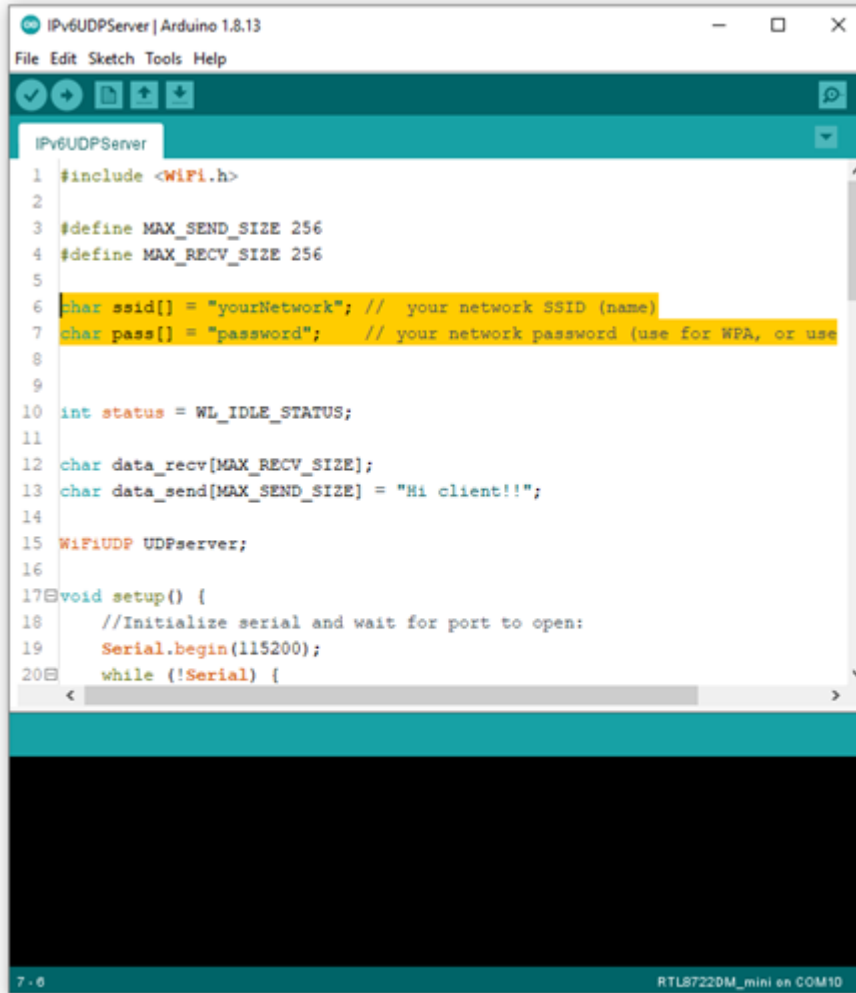


```

1 #include <WiFi.h>
2
3 #define MAX_SEND_SIZE 256
4 #define MAX_RECV_SIZE 256
5
6 char ssid[] = "yourNetwork"; // your network SSID (name)
7 char pass[] = "password"; // your network password (use for WPA, or use
8
9
10 int status = WL_IDLE_STATUS;
11
12 char data_recv[MAX_RECV_SIZE];
13 char data_send[MAX_SEND_SIZE] = "Hi client!!";
14
15 WiFiUDP UDPServer;
16
17 void setup() {
18   //Initialize serial and wait for port to open:
19   Serial.begin(115200);
20   while (!Serial) {

```

Next, upload the code and press the reset button on Ameba once the upload is finished. Open Serial Monitor and copy the IPv6 address of the Server (the highlighted area) for later use,

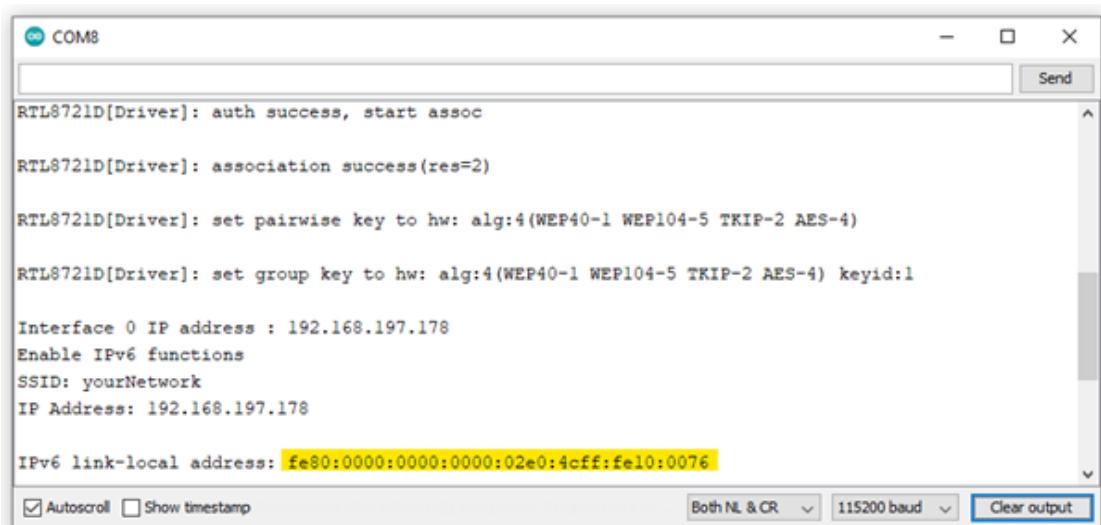

```

COM8

RTL8721D[Driver]: auth success, start assoc

RTL8721D[Driver]: association success(res=2)

RTL8721D[Driver]: set pairwise key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4)


RTL8721D[Driver]: set group key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4) keyid:1

Interface 0 IP address : 192.168.197.178
Enable IPv6 functions
SSID: yourNetwork
IP Address: 192.168.197.178


IPv6 link-local address: fe80:0000:0000:0000:02e0:4c0f:fe10:0076

```

Step 2. IPv6UDPCliEnt Now take the second Ameba D and open another example, “Files” -> “Examples” -> “AmebaWiFi” -> “IPv6UDPCliEnt” .

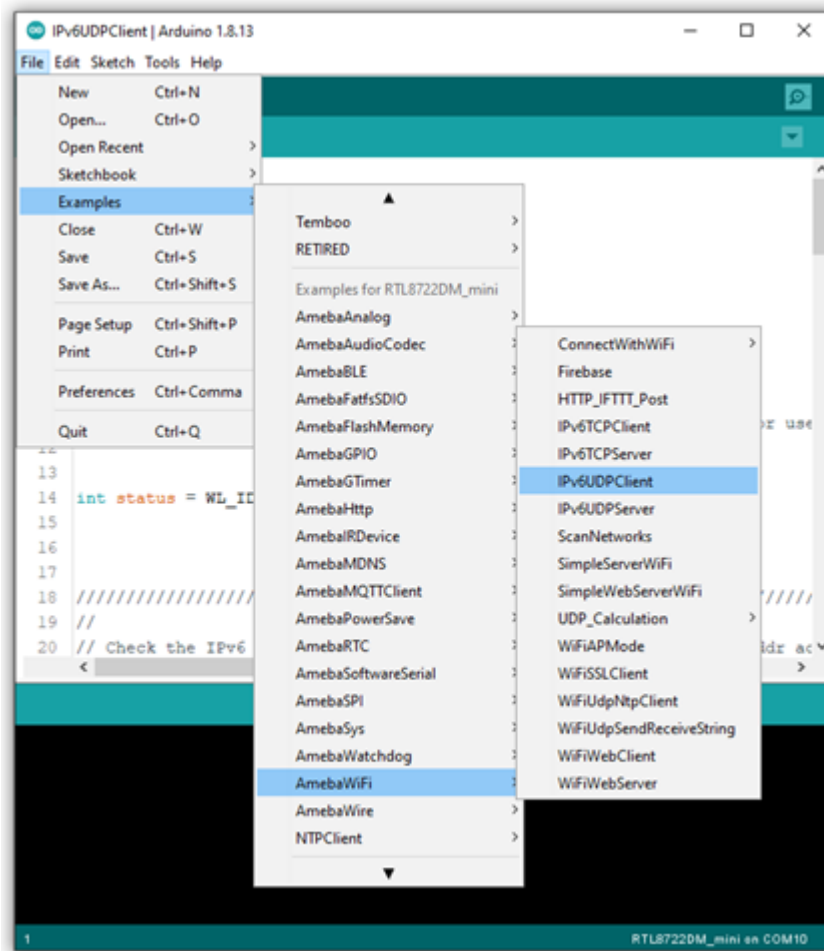


In the sample code, modify the highlighted section to enter the information required (ssid, password) to connect to your WiFi network.

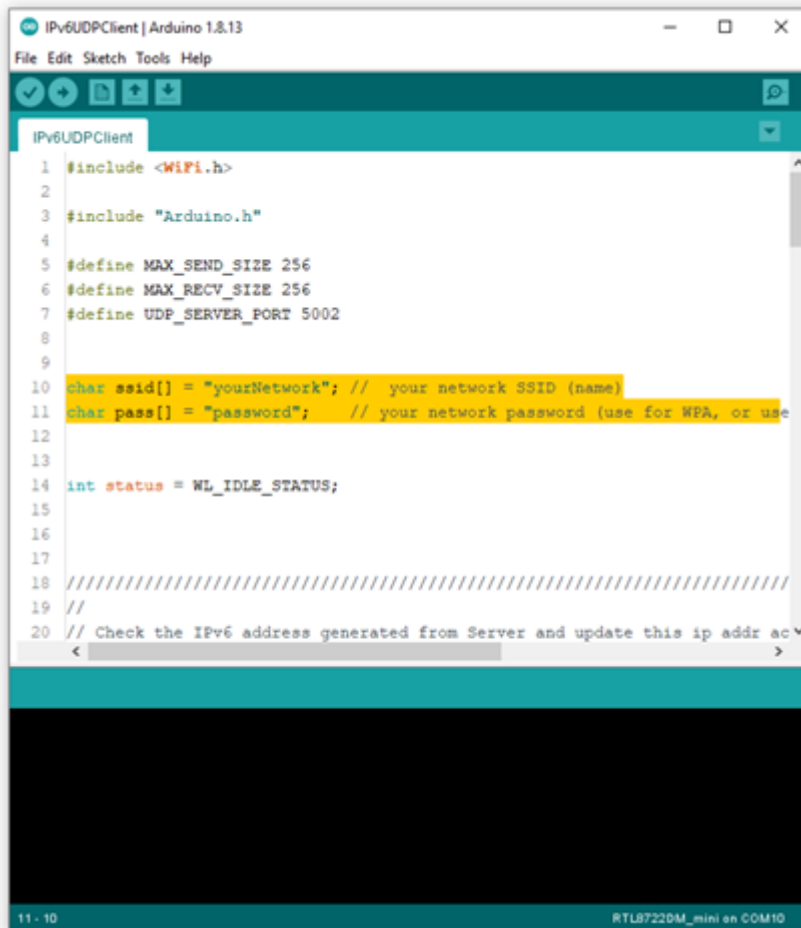

```
1 #include <WiFi.h>
2
3 #include "Arduino.h"
4
5 #define MAX_SEND_SIZE 256
6 #define MAX_RECV_SIZE 256
7 #define UDP_SERVER_PORT 5002
8
9
10 char ssid[] = "yourNetwork"; // your network SSID (name)
11 char pass[] = "password"; // your network password (use for WPA, or use
12
13
14 int status = WL_IDLE_STATUS;
15
16
17
18 ///////////////////////////////////////////////////
19 //
20 // Check the IPv6 address generated from Server and update this ip addr ac
21 < >
```

From the previous step, we have obtained the Server' s IPv6 address, now we copy the server' s IPv6 address to "IPv6UDPClient" example in the highlighted area below,

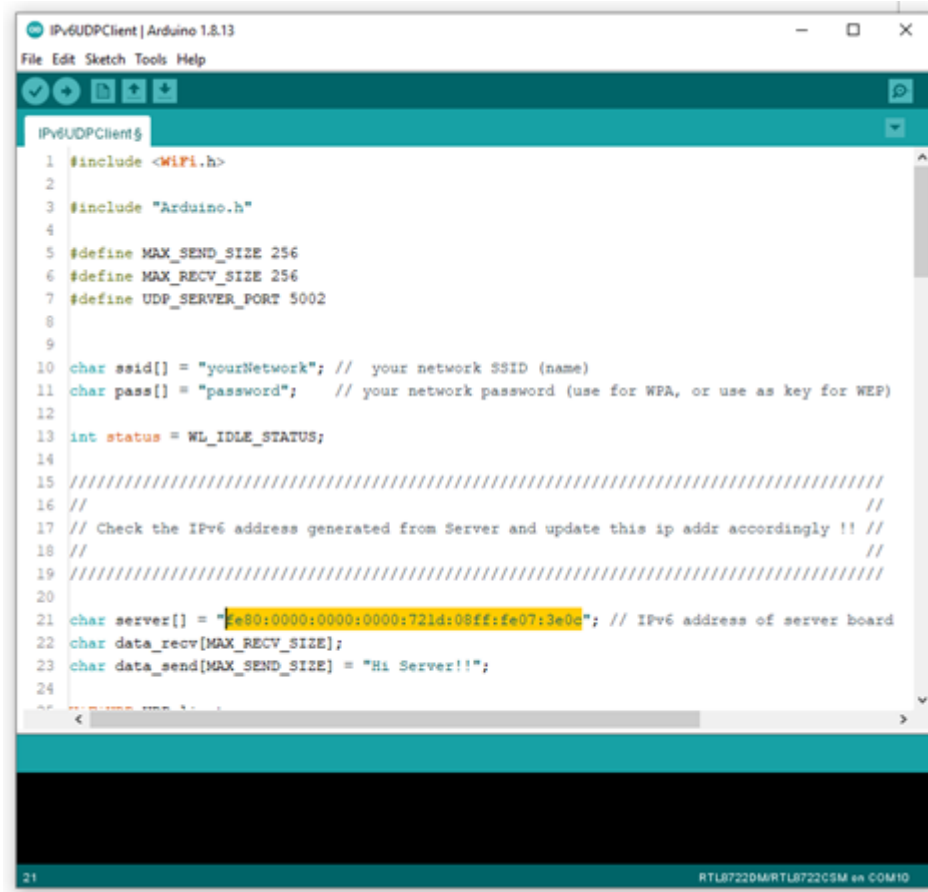


The screenshot shows the Arduino IDE interface with a sketch named 'IPv6UDPClient'. The code is as follows:

```
1 #include <WiFi.h>
2
3 #include "Arduino.h"
4
5 #define MAX_SEND_SIZE 256
6 #define MAX_RECV_SIZE 256
7 #define UDP_SERVER_PORT 5002
8
9
10 char ssid[] = "yourNetwork"; // your network SSID (name)
11 char pass[] = "password"; // your network password (use for WPA, or use as key for WEP)
12
13 int status = WL_IDLE_STATUS;
14
15 ////////////////////////////////////////////////////////////////////////////////////////////////////////////////////
16 //
17 // Check the IPv6 address generated from Server and update this ip addr accordingly !! //
18 //
19 ////////////////////////////////////////////////////////////////////////////////////////////////////////////////////
20
21 char server[] = "fe80:0000:0000:0000:721d:08ff:fe07:3e0d"; // IPv6 address of server board
22 char data_recv[MAX_RECV_SIZE];
23 char data_send[MAX_SEND_SIZE] = "Hi Server!!";
24
25
```

The status bar at the bottom indicates the board is 'RTL8722DM/RTL8722CSM on COM10'.

Next, upload the code and press the reset button on Ameba once the upload is finished.


Open Serial Monitor on the port to the second Ameba D, you should see server and client are sending text message to each other at the same time.

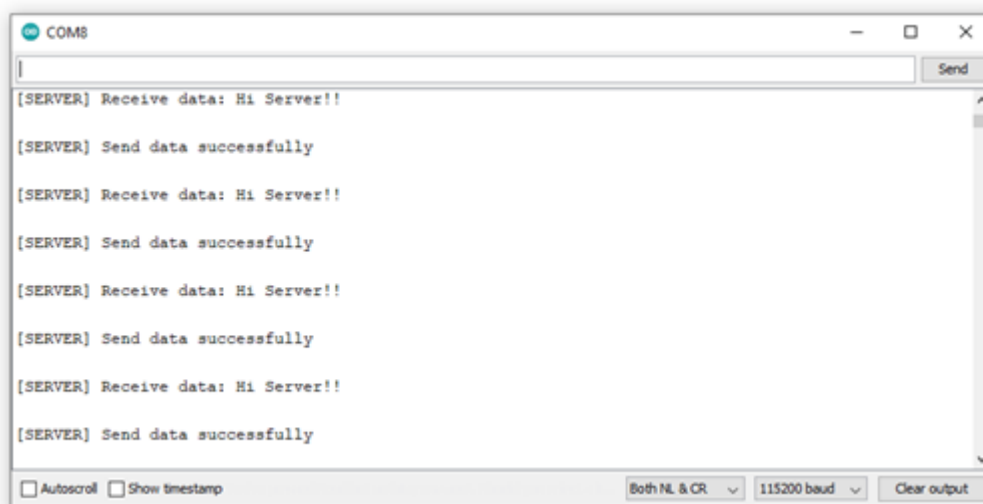

The screenshot shows the Serial Monitor window with the following output:



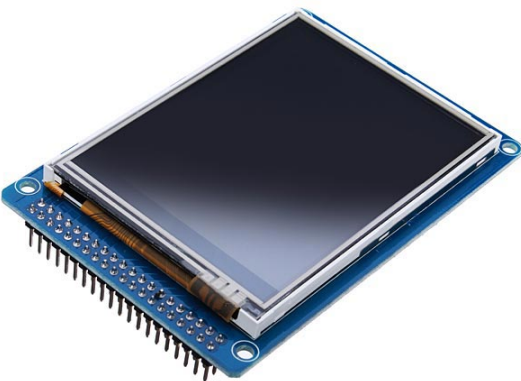



```
[SERVER] Receive data: Hi Server!!
[SERVER] Send data successfully
[SERVER] Receive data: Hi Server!!
[SERVER] Send data successfully
[SERVER] Receive data: Hi Server!!
[SERVER] Send data successfully
[SERVER] Receive data: Hi Server!!
[SERVER] Send data successfully
```

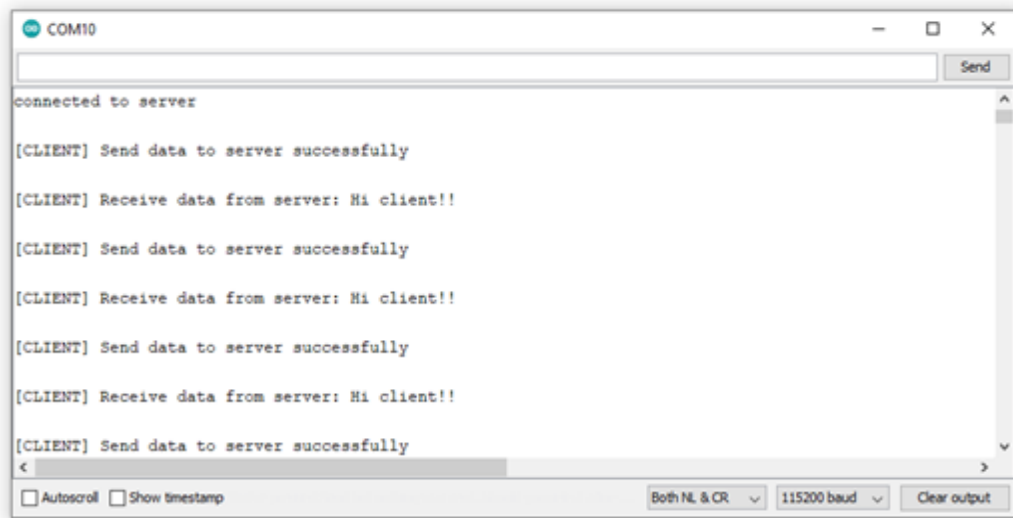The bottom of the window shows settings: 'Both NL & CR', '115200 baud', and 'Clear output'.



Components Used

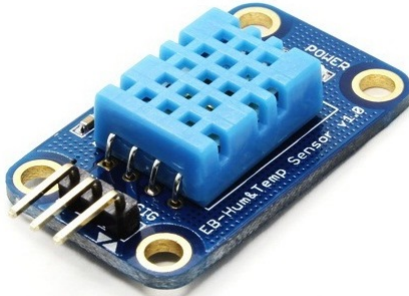表 2: Components used in Examples

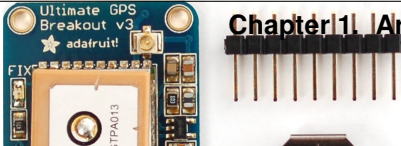	
DHT11_DHT22 Humidity & temperature sensor	HC_SR04 Distance measurement function
	
ILI9341 TFT LCD TFT LCD display with SPI interface	PMS3003/5003 Air quality sensor that detects concentration of micro particulate matters
	

Peripheral Examples

GPIO - Measure The Distance By Ultrasound Module


Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- HC-SR04 Ultrasonic x 1
- Dropping resistor or Level converter

Example

HC-SR04 is a module that uses ultrasound to measure the distance. It looks like a pair of eyes in its appearance, therefore it's often installed onto robot-vehicle or mechanical bugs to be their eyes.

The way it works is that first we “toggle high” the TRIG pin (that is to pull high then pull low). The HC-SR04 would send eight 40kHz sound wave signal and pull high the ECHO pin. When the sound wave returns back, it pull low the ECHO pin.

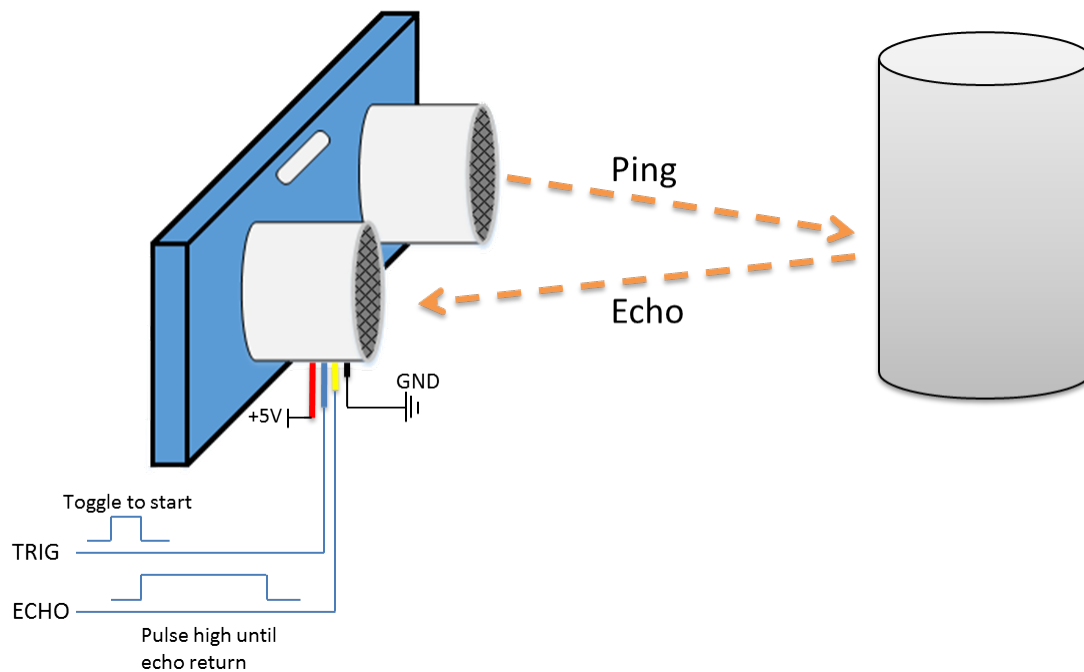


Assume the velocity of sound is 340 m/s, the time it takes for the sound to advance 1 cm in the air is $340 \times 100 \times 10^{-6} =$

29 us.


The sound wave actually travels twice the distance between HC-SR04 and the object, therefore the distance can be calculated by $(\text{time}/29) / 2 = \text{time} / 58$.

The working voltage of HC-SR04 is 5V. When we pull high the ECHO pin to 5V, the voltage might cause damage to the GPIO pin of Ameba. To avoid this situation, we need to drop the voltage as follows:

RTL8722DM / RTL8722CSM Wiring Diagram:

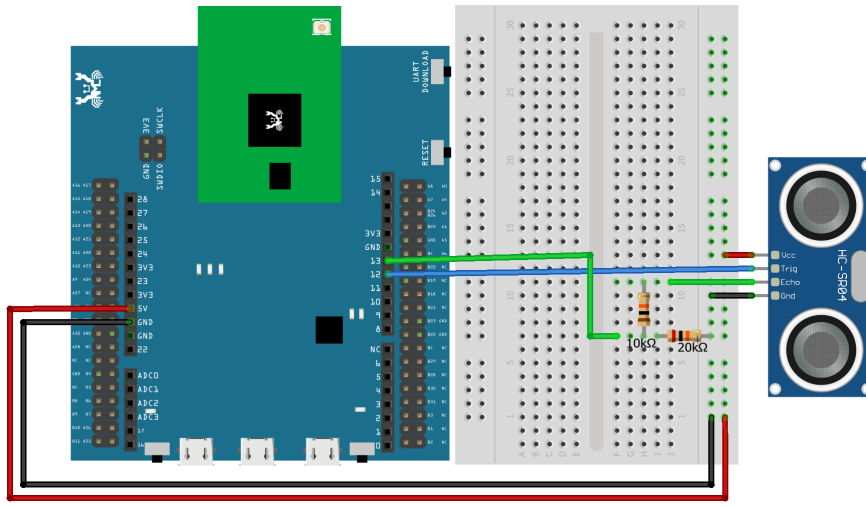

RTL8722DM MINI Wiring Diagram:

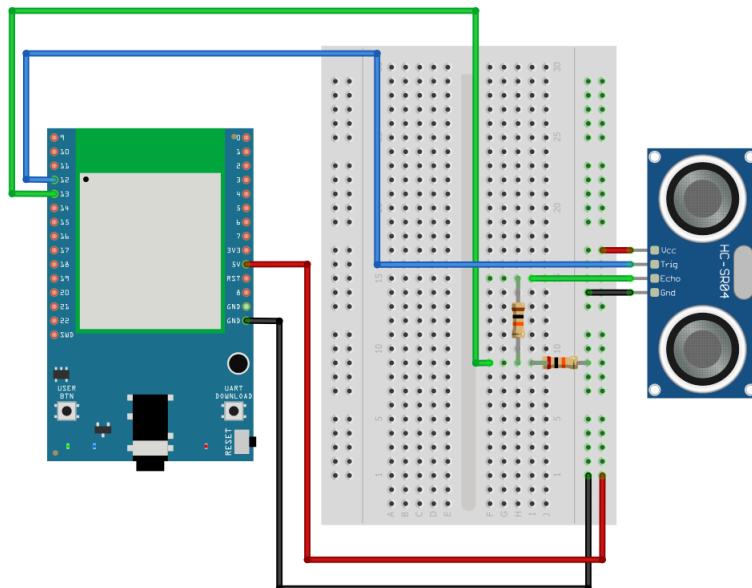


We pick the resistors with resistance 1:2, in the example we use 10kΩ and 20kΩ.


If you do not have resistors in hand, you can use level converter instead. The TXB0108 8 channel level converter is a

suitable example:


RTL8722DM / RTL8722CSM Wiring Diagram:

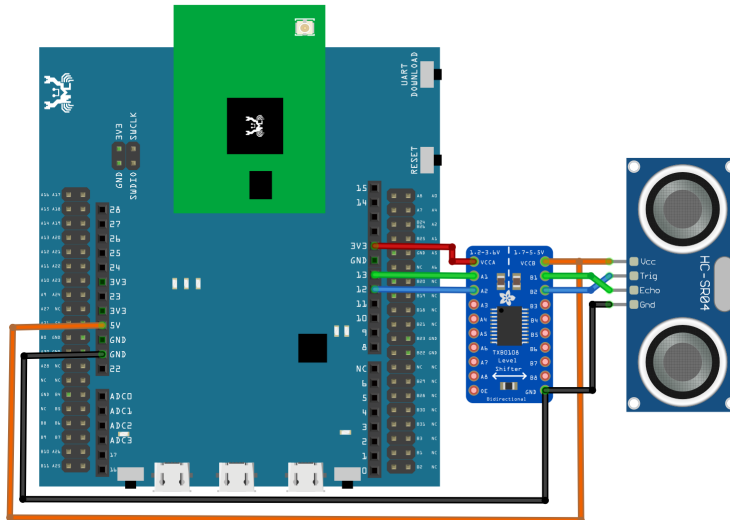


RTL8722DM MINI Wiring Diagram:

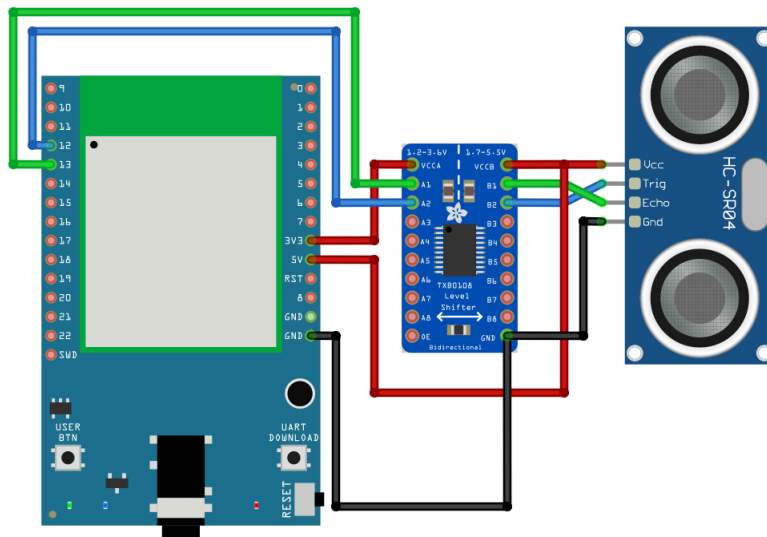

Next, open the sample code in “File” -> “Examples” -> “AmebaGPIO” -> “HCSR04_Ultrasonic”

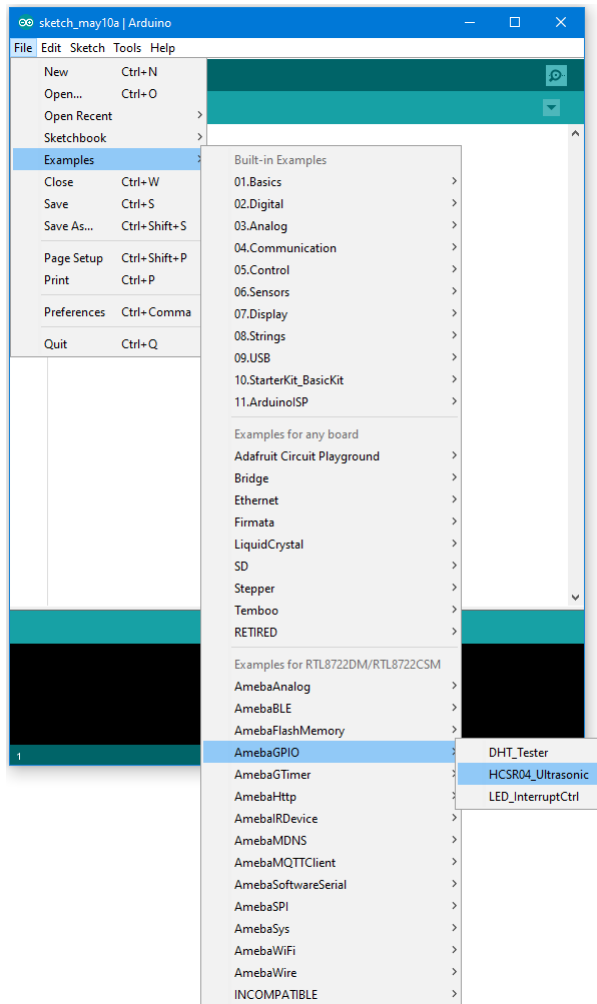

Compile and upload to Ameba, then press the reset button. Open the Serial Monitor, the calculated result is output to serial monitor every 2 seconds.

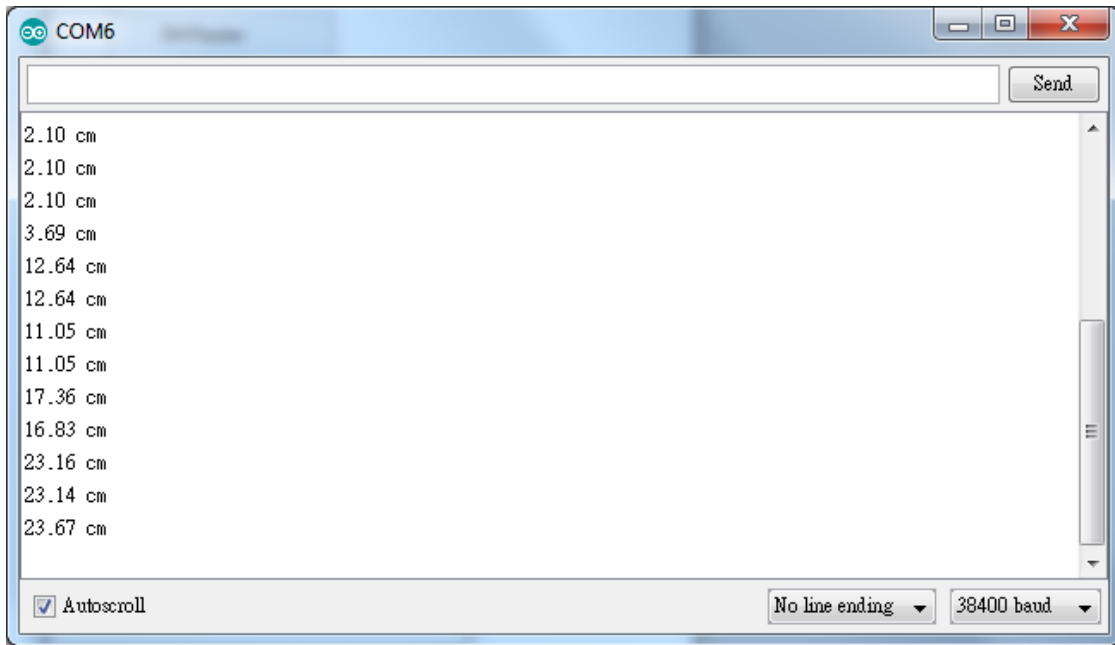

Note that the HCSR04 module uses the reflection of sound wave to calculate the distance, thus the result can be affected by the surface material of the object (e.g., harsh surface tends to cause scattering of sound wave, and soft surface may cause the sound wave to be absorbed).

Code Reference

Before the measurement starts, we need to pull high the TRIG pin for 10us and then pull low. By doing this, we are telling the HC-SR04 that we are about to start the measurement:

```
digitalWrite(trigger_pin, HIGH);  
delayMicroseconds(10);  
digitalWrite(trigger_pin, LOW);
```

Next, use pulseIn to measure the time when the ECHO pin is pulled high.

```
duration = pulseIn (echo_pin, HIGH);
```

Finally, use the formula to calculate the distance.

```
distance = duration / 58;
```

GPIO - Measuring The Temperature And Humidity

Preparation


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- DHT11 or DHT22 or DHT21

Example


DHT11 is a temperature and humidity sensor which operates at voltage 3.3V~5V. At room temperature, the measurable range of the humidity is 20% ~ 90%RH with $\pm 5\%$ RH precision, the measurable range of the temperature is 0 ~ 50°C with $\pm 2^\circ\text{C}$ precision.

Another choice of temperature and humidity sensor is DHT22 sensor, which has better precision. Its measurable range of the humidity is 0%~100%RH with $\pm 5\%$ RH precision, the measurable range of the temperature is -40~125 °C with $\pm 0.2^\circ\text{C}$ precision.

There are 4 pins on the sensor:

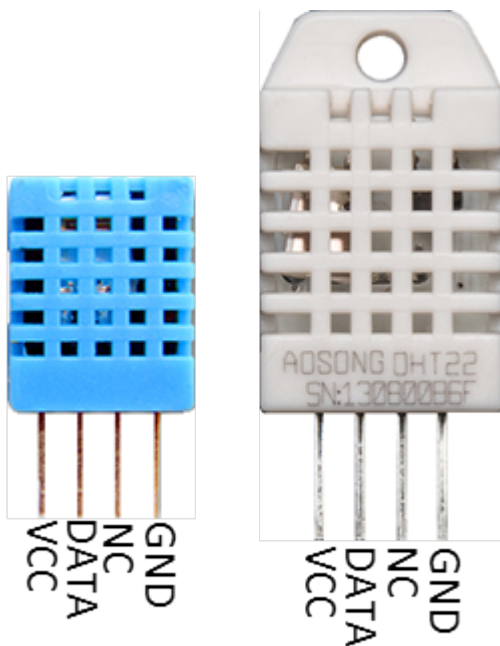


Since one of the 4 pins has no function, there are temperature/humidity sensors with only 3 pins on the market:

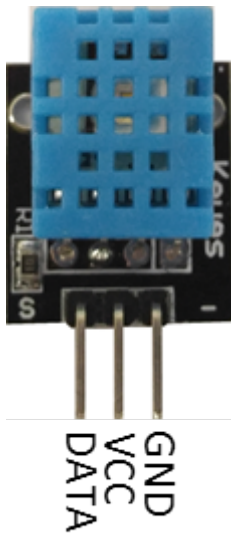


DHT is normally in the sleeping mode. To get the temperature/humidity data, please follow the steps:


1. Awake DHT: Ameba toggles low its DATA pin of GPIO. Now the DATA pin of GPIO serves as digital out to Ameba.
2. DHT response: DHT also toggle low its DATA pin of GPIO. Now the DATA pin of GPIO serves as digital in for Ameba.
3. DHT sends data: DHT sends out the temperature/humidity data (which has size 5 bytes) in a bit by bit manner. To represent each bit, DHT first pull low the DATA GPIO pin for a while and then pull high. If the duration of high is smaller than low, it stands for bit 0. Otherwise it stands for bit 1.

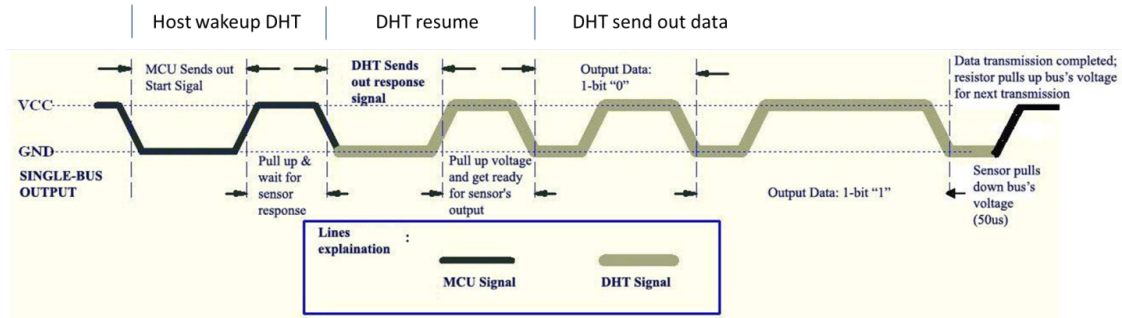


RTL8722DM / RTL8722CSM Wiring Diagram:

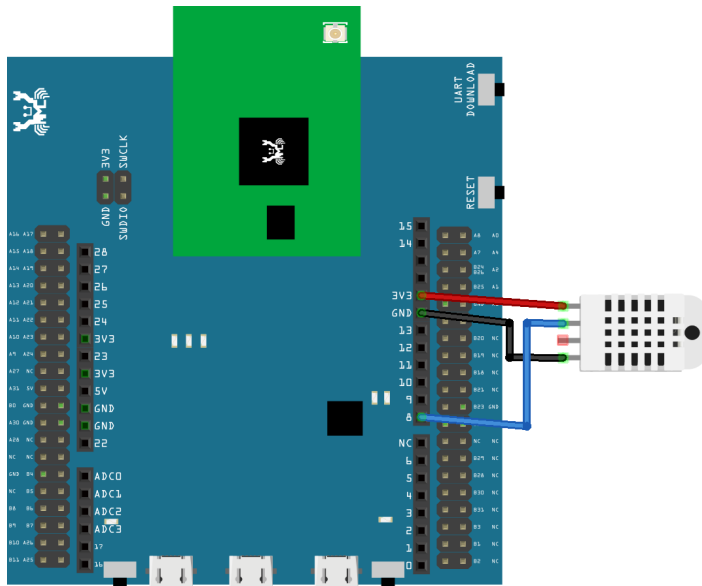

RTL872DM MINI Wiring Diagram:

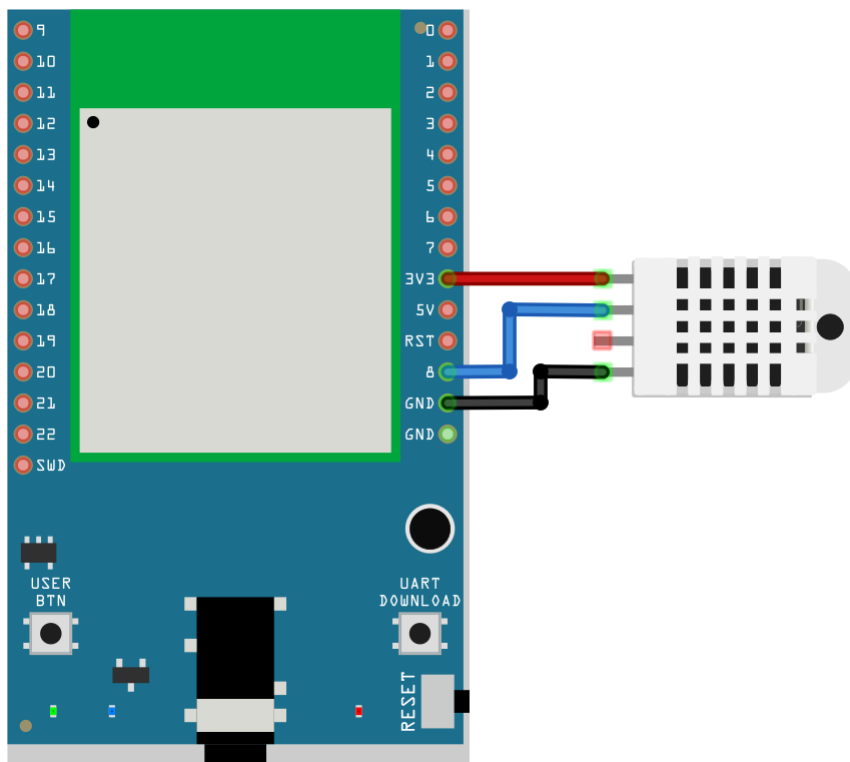

Open the sample code in “Files” -> “Examples” -> “AmebaGPIO” -> “DHT_Tester” . Compile and upload to Ameba, then press the reset button. The result would be shown on the Serial Monitor.

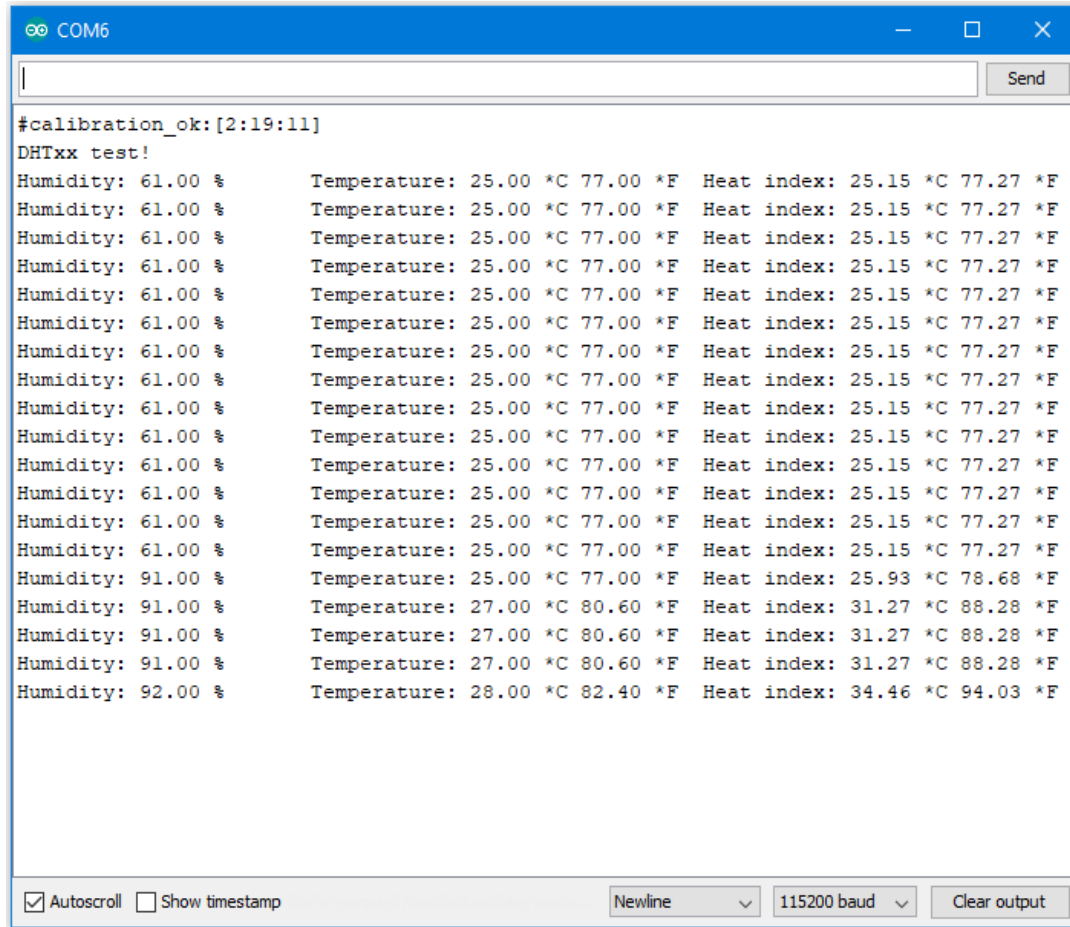

```
#calibration_ok:[2:19:11]
DHTxx test!
Humidity: 61.00 %      Temperature: 25.00 *C 77.00 *F Heat index: 25.15 *C 77.27 *F
Humidity: 61.00 %      Temperature: 25.00 *C 77.00 *F Heat index: 25.15 *C 77.27 *F
Humidity: 61.00 %      Temperature: 25.00 *C 77.00 *F Heat index: 25.15 *C 77.27 *F
Humidity: 61.00 %      Temperature: 25.00 *C 77.00 *F Heat index: 25.15 *C 77.27 *F
Humidity: 61.00 %      Temperature: 25.00 *C 77.00 *F Heat index: 25.15 *C 77.27 *F
Humidity: 61.00 %      Temperature: 25.00 *C 77.00 *F Heat index: 25.15 *C 77.27 *F
Humidity: 61.00 %      Temperature: 25.00 *C 77.00 *F Heat index: 25.15 *C 77.27 *F
Humidity: 61.00 %      Temperature: 25.00 *C 77.00 *F Heat index: 25.15 *C 77.27 *F
Humidity: 61.00 %      Temperature: 25.00 *C 77.00 *F Heat index: 25.15 *C 77.27 *F
Humidity: 61.00 %      Temperature: 25.00 *C 77.00 *F Heat index: 25.15 *C 77.27 *F
Humidity: 61.00 %      Temperature: 25.00 *C 77.00 *F Heat index: 25.15 *C 77.27 *F
Humidity: 61.00 %      Temperature: 25.00 *C 77.00 *F Heat index: 25.15 *C 77.27 *F
Humidity: 61.00 %      Temperature: 25.00 *C 77.00 *F Heat index: 25.15 *C 77.27 *F
Humidity: 61.00 %      Temperature: 25.00 *C 77.00 *F Heat index: 25.15 *C 77.27 *F
Humidity: 61.00 %      Temperature: 25.00 *C 77.00 *F Heat index: 25.15 *C 77.27 *F
Humidity: 91.00 %      Temperature: 27.00 *C 80.60 *F Heat index: 31.27 *C 88.28 *F
Humidity: 91.00 %      Temperature: 27.00 *C 80.60 *F Heat index: 31.27 *C 88.28 *F
Humidity: 91.00 %      Temperature: 27.00 *C 80.60 *F Heat index: 31.27 *C 88.28 *F
Humidity: 92.00 %      Temperature: 28.00 *C 82.40 *F Heat index: 34.46 *C 94.03 *F
```

Code Reference

Use `dht.readHumidity()` read the humidity value, and use `dht.readTemperature()` to read the temperature value.

Every time we read the temperature/humidity data, Ameba uses the buffered temperature/humidity data unless it found the data has expired (i.e., has not been updated for over 2 seconds). If the data is expired, Ameba issues a request to DHT to read the latest data.

GPIO - Use GPIO Interrupt To Control LED

Preparation


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- LED x 1
- Button x 1

Example


In this example, we use a button to trigger interrupt and control the LED. When we press and release the button, the LED dims, press and release the button again, and the LED lights. Note that in the Arduino example “Button and LED”, LED only lights when the button is pressed and hold, when we release the button, the LED dims.

Open the example, “Files” -> “Examples” -> “AmebaGPIO” -> “LED_InterruptCtrl”

RTL8722DM / RTL8722CSM Wiring Diagram:

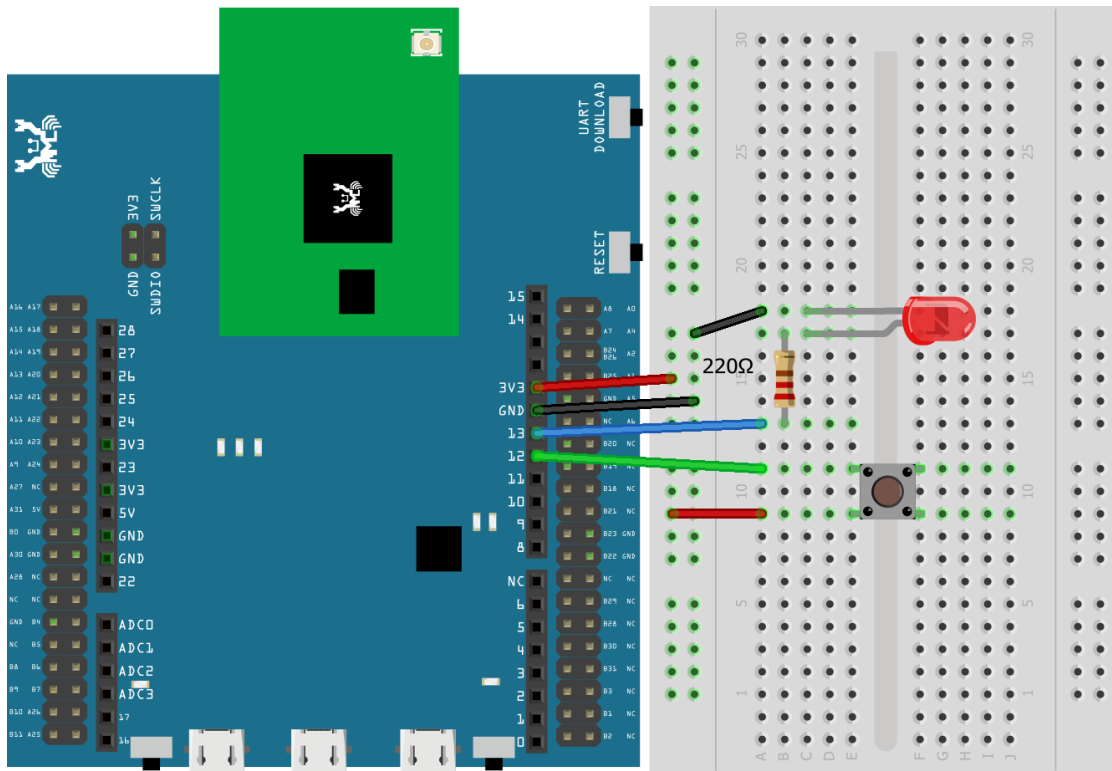

RTL8722DM MINI Wiring Diagram:

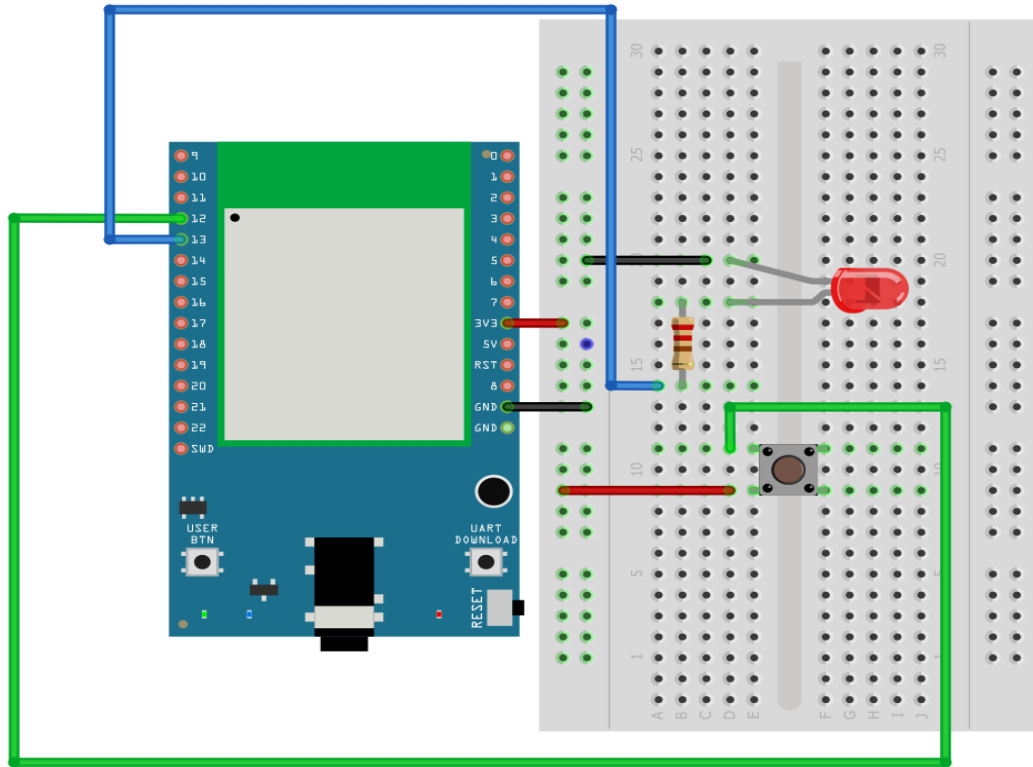

Compile and upload the program, press reset.

The LED lights at first. Press and release the button, then the LED should dim. Press again, then the LED should light.

Code Reference

In

```
setup()
```

we set Pin 12 to

```
INPUT_IRQ_RISE
```

, this means that an interrupt occurs when the voltage of this pin changes from GND to 3V3. Therefore, we connect the other side of the button to 3V3, so as to trigger interrupt event when the button is pressed.

```
pinMode(button, INPUT_IRQ_RISE);
```

On the other hand, we can set pin 12 to

```
INPUT_IRQ_FALL
```

, this means that an interrupt occurs when the voltage of this pin changes from 3V3 to GND. In this case, the other side of the button is connected to GND. Next, we need to specify the function to be executed to handle the interrupt:

```
digitalSetIrqHandler(button, button_handler);
```

The second parameter is a function pointer, with prototype:

```
void button_handler(uint32_t id, uint32_t event)
```

In this handler, every time we press and release the button, we trigger an interrupt, and change the status of the LED.

PWM –Play Music


Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Buzzer x 1

Example

A sound is composed of volume, tone and timbre. Volume is determined by the amplitude of the sound wave. Tone is determined by the frequency of the sound wave. Timbre is determined by the waveform of the sound wave.

In this example, we use PWM to control the buzzer to emit sound with desired tone. As PWM outputs square wave, if we wish to emit tone C4 (frequency=262Hz), we have to make PWM to output square wave with wavelength $1/262 = 3.8\text{ms}$:

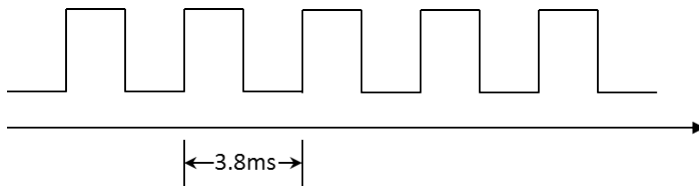

We use PWM to output sound wave with different frequency, so as to play music by the buzzer.

Connect the buzzer to the PWM output pin shown in the following diagrams.

RTL8722DM / RTL8722CSM Wiring Diagram:



Open the example code in “Examples” -> “AmebaAnalog” -> “TonePlayMelody”
Compile and upload to Ameba, press the reset button. Then you can hear the buzzer playing music.

Code Reference

Ameba implement the tone() and noTone() API of Arduino:

<https://www.arduino.cc/en/Reference/Tone>

<https://www.arduino.cc/en/Reference/NoTone>

In the sample code, we initiate a melody array, which stores the tones to make. Another array, noteDurations, contains the length of each tone, 4 represents quarter note (equals to $3000\text{ms}/4 = 750\text{ms}$, and plus an extra 30% time pause), 8 represents eighth note.

PWM –Using A Servo

Preparation


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Servo x 1 (Ex. Tower Pro SG90)

Example


A typical servo has 3 wires, the red wire is for power, black or brown one should be connected to GND, and the other one is for signal data. We use PWM signal to control the rotation angle of the axis of the servo. The frequency of the signal is 50Hz, that is length 20ms. Each servo defines its pulse bandwidth, which is usually 1ms~2ms.

To control the rotation angle, for example if 1ms-length pulse rotates the axis to degree 0, then 1.5 ms pulse rotates the axis to 90 degrees, and 2 ms pulse rotates the axis to 180 degrees. Furthermore, a servo defines the “dead bandwidth”, which stands for the required minimum difference of the length of two consecutive pulse for the servo to work.

RTL8722DM / RTL8722CSM Wiring Diagram:

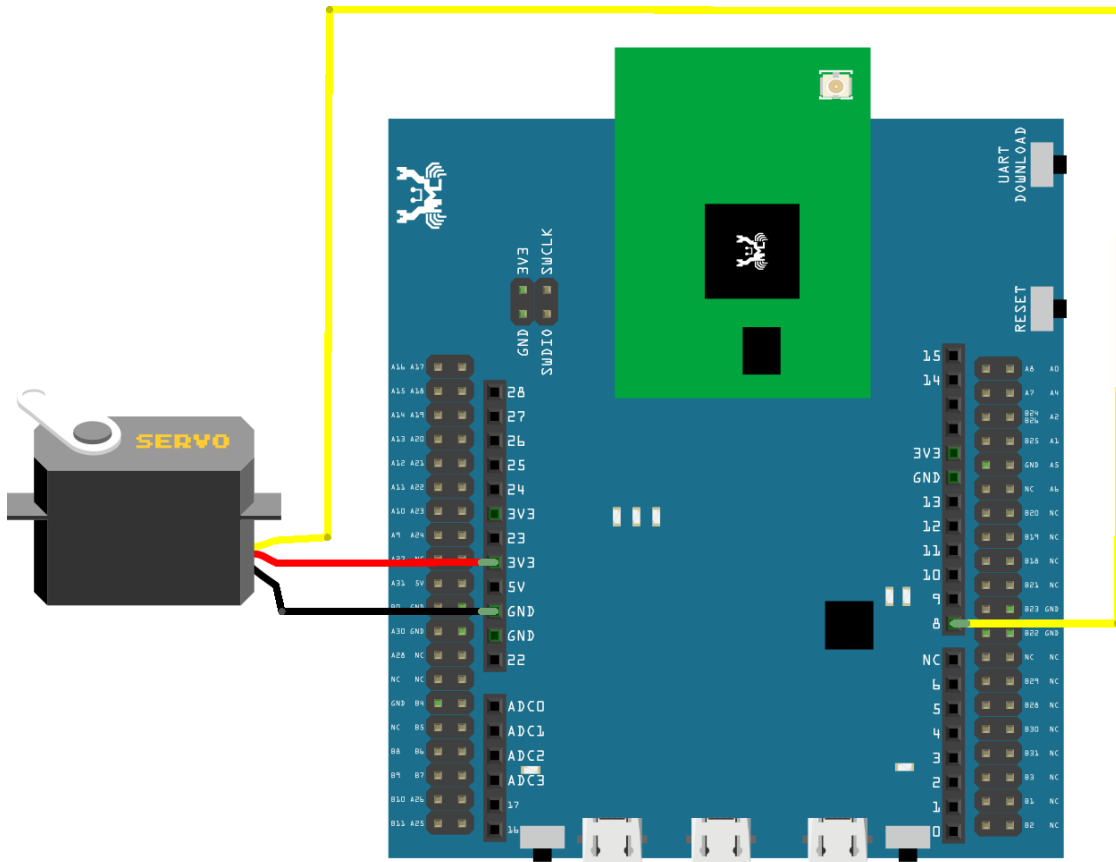

RTL8722DM MINI Wiring Diagram:

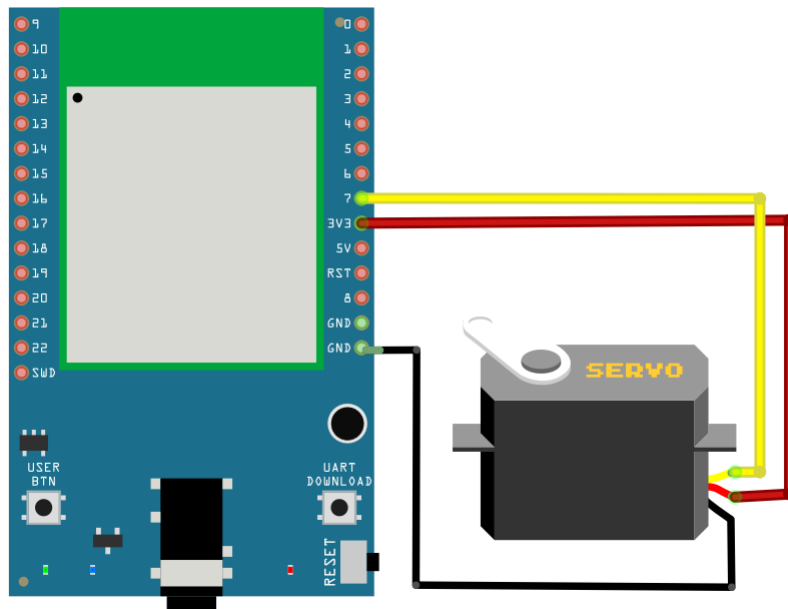

Open the example, “File” -> “Examples” -> “AmebaAnalog” -> “ServoSweep”

This example makes the servo to rotate from degree 0 to 180, and then rotate back to degree 0.

Code Reference

The Servo API of Ameba is similar to the API of Arduino. To distinguish from the original API of Arduino, we name the header file “AmebaServo.h” and the Class “AmebaServo” , the usage is identical to the Arduino API.

The default pulse bandwidth of Arduino Servo is 0.5ms~2.4ms, which is the same as Tower Pro SG90. Therefore, we set the attached pin directly:

```
myservo.attach(9);
```

Next, rotate the axis to desired position:

```
myservo.write(pos);
```

I2C - Communicate with Arduino UNO via I2C

Introduction of I2C

There are two roles in the operation of I2C, one is “master” , the other is “slave” . Only one master is allowed and can be connected to many slaves. Each slave has its unique address, which is used in the communication between master and the slave. I2C uses two pins, one is for data transmission (SDA), the other is for the clock (SCL). Master uses the SCL to inform slave of the upcoming data transmission, and the data is transmitted through SDA. The I2C example was named “Wire” in the Arduino example.

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Arduino UNO x 1

Example


In this example, we use Ameba as the I2C master writer, and use Arduino as the I2C slave receiver.

When the I2C slave receives string sent from I2C master, it prints the received string.

- Setting up Arduino Uno to be I2C Slave

First, select Arduino in the Arduino IDE in “Tools” -> “Board” -> “Arduino Uno”

Open the “Slave Receiver” example in “Examples” -> “Wire” -> “slave_receiver” :

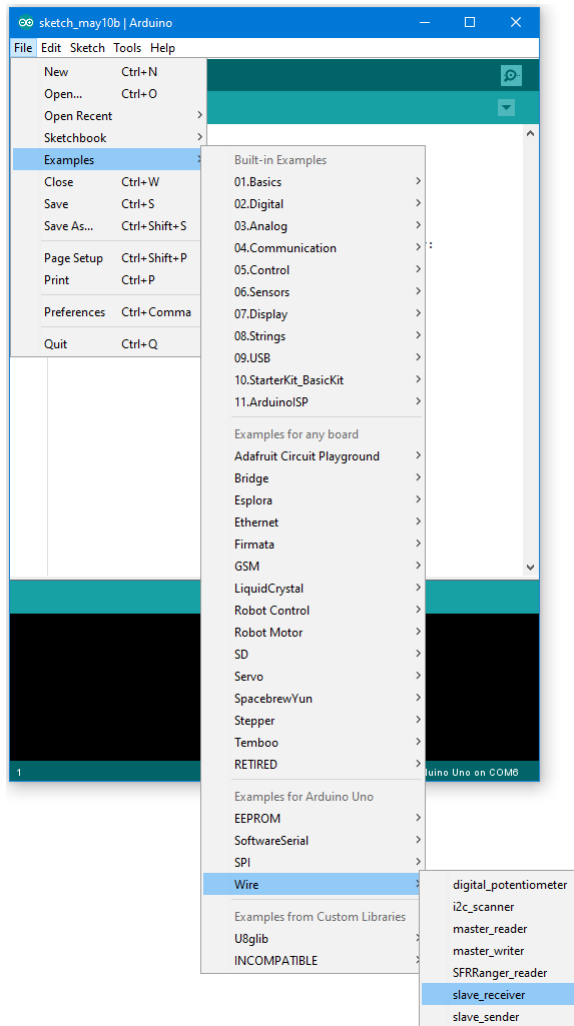


Then click “Sketch” -> “Upload” to compile and upload the example to Arduino Uno.

- Setting up Ameba to be I2C Master

Next, open another window of Arduino IDE, make sure to choose your Ameba development board in the IDE:

“Tools” -> “Board”

Then open the “Master Writer” example in “File” -> “Examples” -> “AmebaWire” -> “MasterWriter”

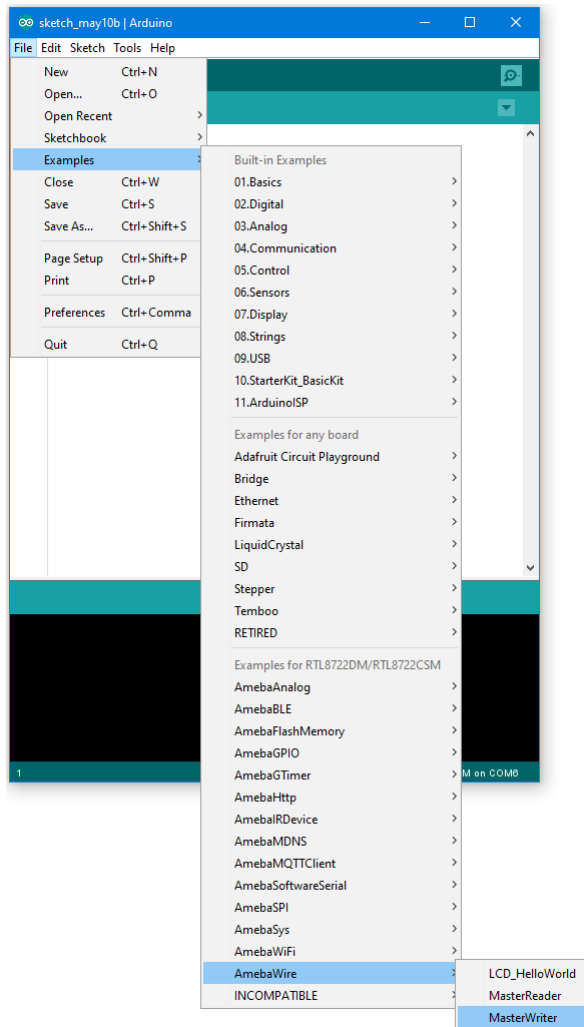


- Wiring


The Arduino example uses A4 as the I2C SDA and A5 as the I2C SCL.

Another important thing is that the GND pins of Arduino and Ameba should be connected to each other.

RTL8722DM / RTL8722CSM Wiring Diagram:

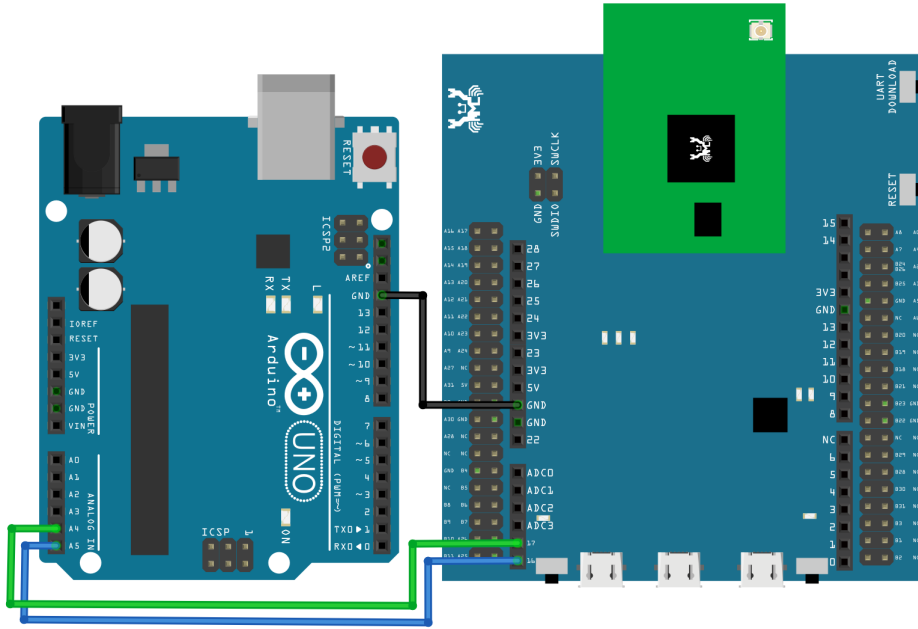

RTL8722DM MINI Wiring Diagram:

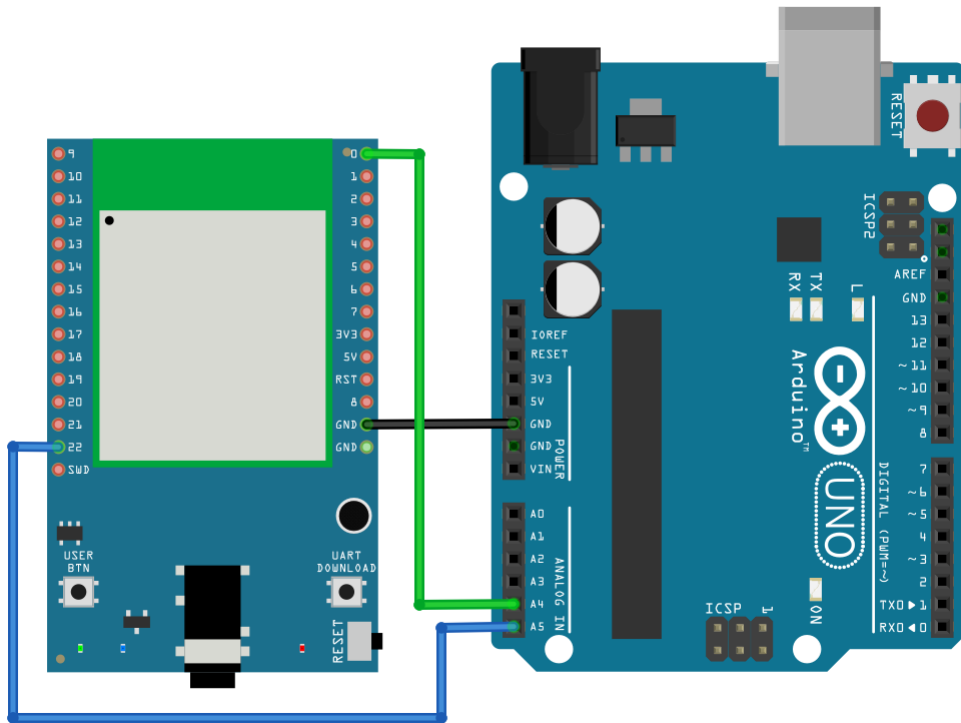


Open the Arduino IDE of the Arduino Uno and open the serial monitor (“Tools” -> “Serial Monitor”).

In the Serial Monitor, you can see the messages printed from Arduino Uno.

Next, press the reset button on Arduino Uno. Now the Arduino Uno is waiting for the connection from I2C Master.

We press the reset button on Ameba to start to send messages. Then observe the serial monitor, you can see the

messages show up every half second.

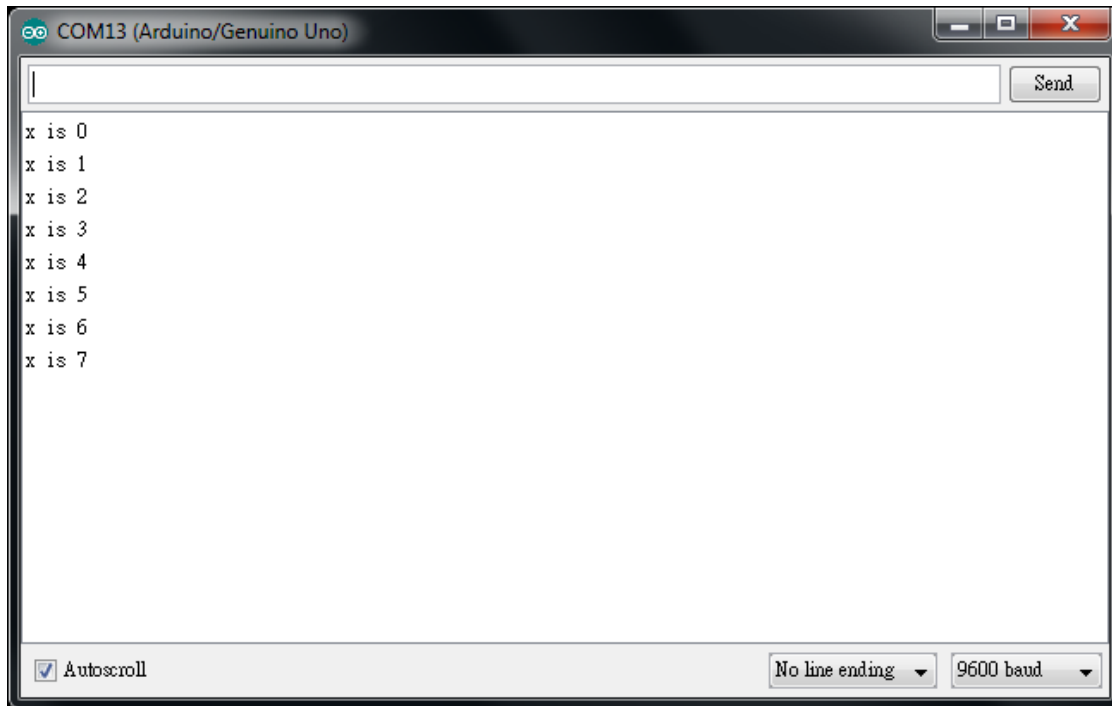

Code Reference

You can find detailed information of this example in the documentation of Arduino:

<https://www.arduino.cc/en/Tutorial/MasterWriter>

First use `Wire.begin()/Wire.begin(address)` to join the I2C bus as a master or slave, in the Master case the address is not required.

<https://www.arduino.cc/en/Reference/WireBegin>

Next, the Master uses `Wire.beginTransmission(address)` to begin a transmission to the I2C slave with the given address:

<https://www.arduino.cc/en/Reference/WireBeginTransmission>

Uses `Wire.write()` to send data, and finally use `Wire.endTransmission()` to end a transmission to a Slave and transmits the bytes that were queued:

<https://www.arduino.cc/en/Reference/WireEndTransmission>


I2C - Display Data On LCD Screen

Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- I2C 2×16 LCD


Example

Normally there are many pins on an LCD display, as shown in below figure.

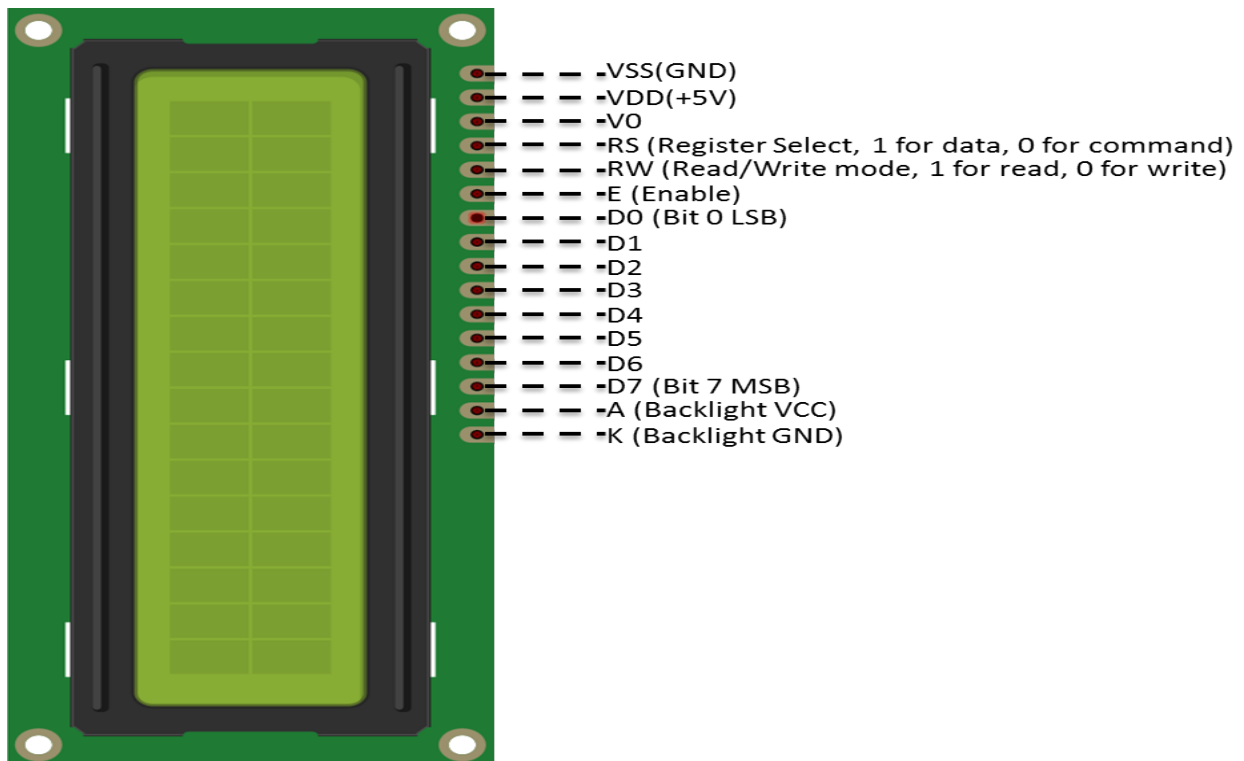


An LCD display can be equipped with an additional processing chip to process the data. The processing chip can connect to a microcontroller using the I2C interface.

RTL8722DM / RTL8722CSM Wiring Diagram:

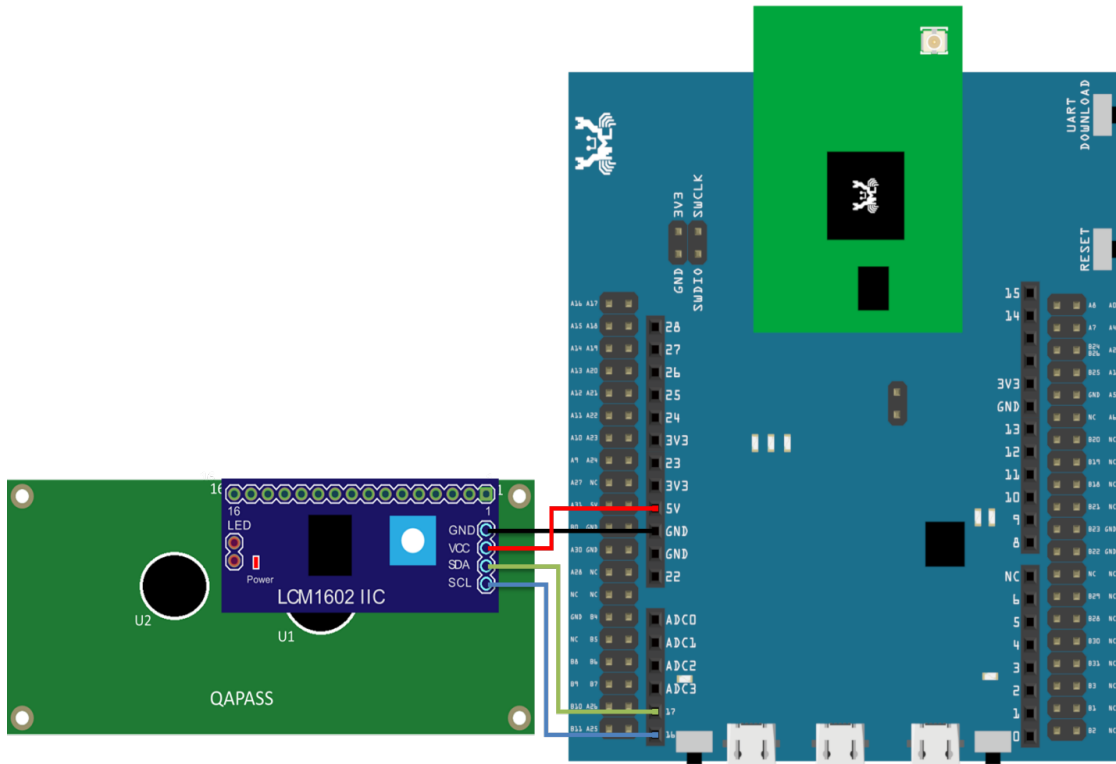

RTL8722DM MINI Wiring Diagram:

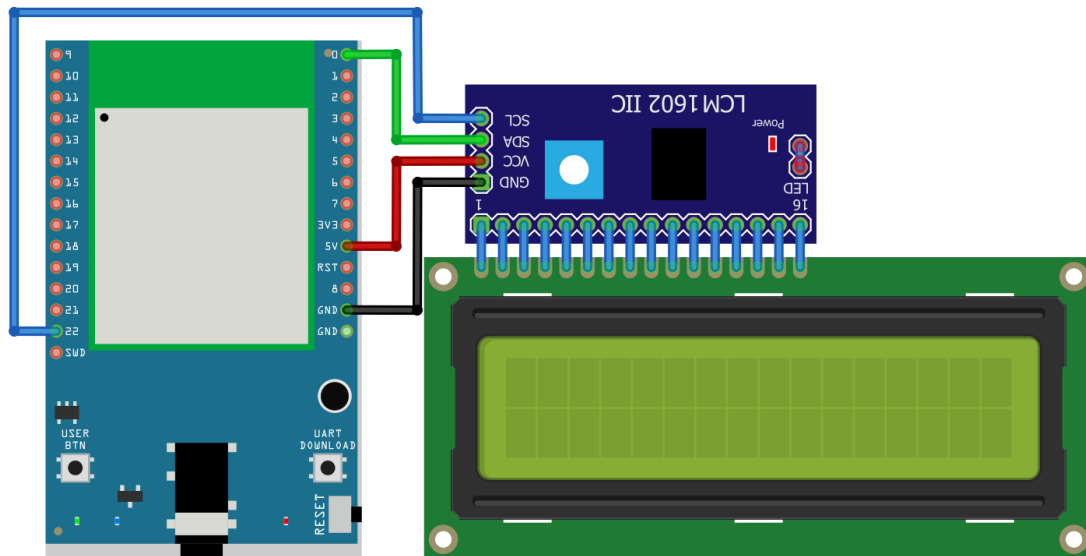


Open the example in “File” -> “Examples” -> “AmebaWire” -> “LCD_HelloWorld” .
Compile and upload to Ameba, then press the reset button.

Then you can see “Hello World” in the first line, and “Ameba” in the second line displayed on the LCD screen.



After 8 seconds, you can input to the Serial Monitor the string you would like to display on the LCD.

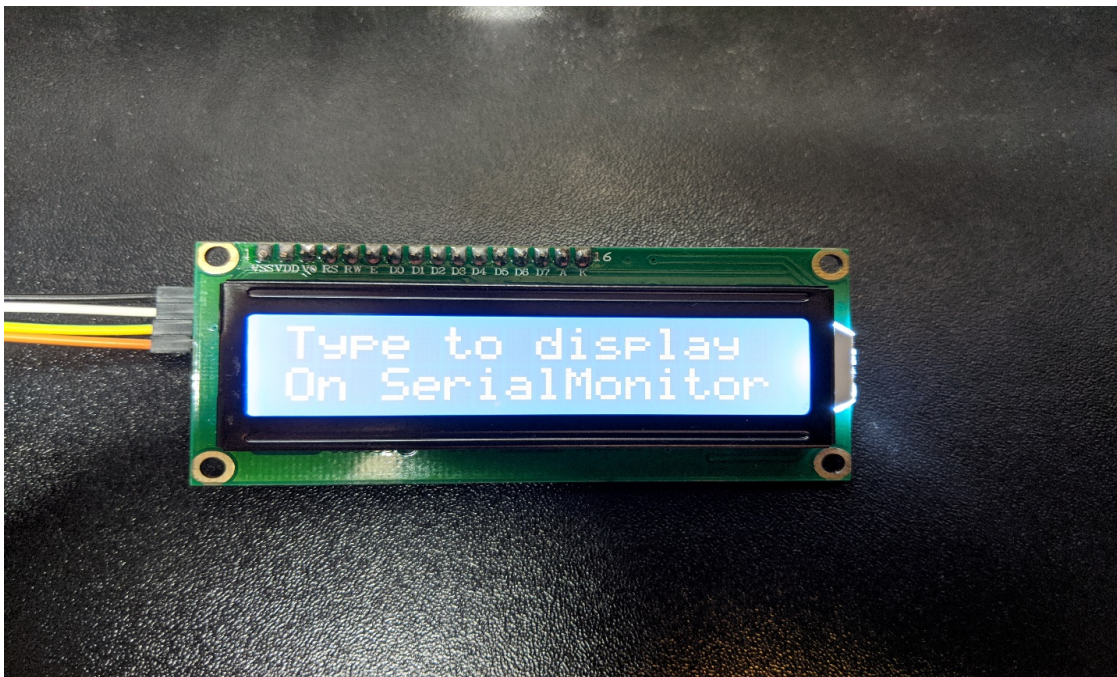

For example, we enter “123456789” and press “Send” :



Code Reference

The required settings of each model of LCD might be different, the constructor we use in this example is:

```
LiquidCrystal_I2C(uint8_t lcd_Addr, uint8_t En, uint8_t Rw, uint8_t Rs,
                  uint8_t d4, uint8_t d5, uint8_t d6, uint8_t d7,
                  uint8_t backlighPin, t_backlighPol pol);
```

And the setting parameters are as follows:

```
LiquidCrystal_I2C lcd(0x27, 2, 1, 0, 4, 5, 6, 7, 3, POSITIVE); // Set the LCD I2C_
↪address
```

The first parameter 0x27 is the address of I2C. Each of the following 8 parameters represents the meaning of each bit in a byte, i.e., En is bit 2, Rw is bit 1, Rs is bit 0, d4 is bit 4, and so forth.

Call `backlight()` to light the screen,

Call `setCursor(0, 0)` to set the position of the cursor.

LCD inherits the Print class, so we can use `lcd.print()` to output string on the screen.

I2C - Use I2C to receive data from Arduino UNO

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Arduino UNO x 1

Example


In the previous example “[I2C –Communicate with Arduino UNO via I2C](#)” , Ameba, the I2C master, transmits data to the Arduino UNO, the I2C slave.

As to this example, Ameba is the I2C master, and receives data from the Arduino UNO, which is the I2C slave.

- **Setting up Arduino Uno to be I2C Slave**

First, select Arduino in the Arduino IDE in “Tools” -> “Board” -> “Arduino Uno” :

Open “Examples” -> “Wire” -> “slave_sender”

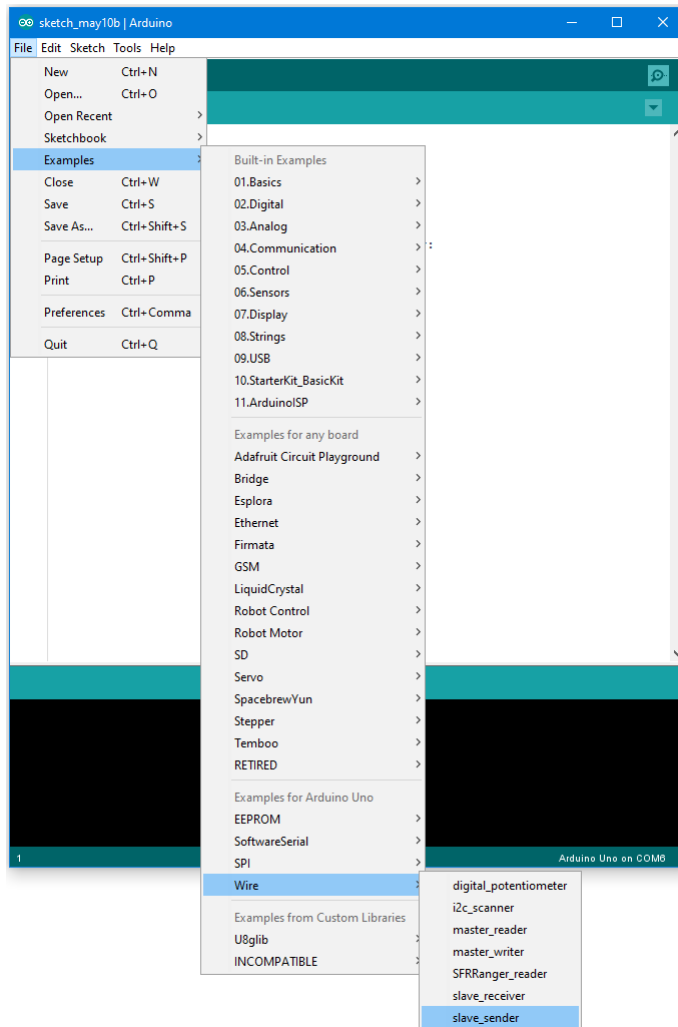


Then click “Sketch” -> “Upload” to compile and upload the example to Arduino Uno.

- **Setting up Ameba to be I2C Master**

Next, open another window of Arduino IDE, make sure to choose your Ameba development board in the IDE: “Tools” -> “Board”

Open “File” -> “Examples” -> “AmebaWire” -> “MasterReader”

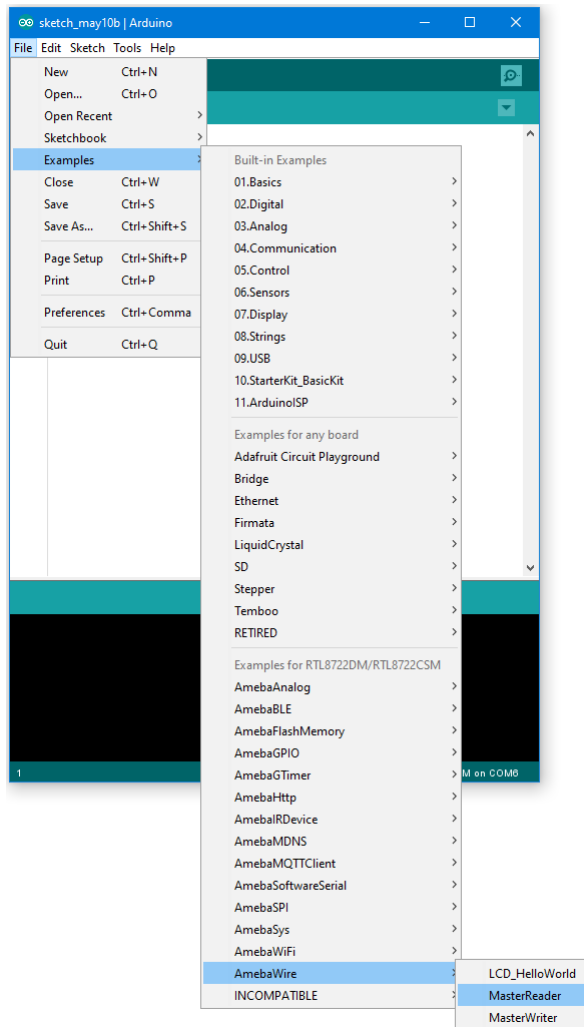


Click “Sketch” -> “Upload” to compile and upload the example to Ameba.

- **Wiring**


The Arduino example uses A4 as the I2C SDA and A5 as the I2C SCL.

Another important thing is that the GND pins of Arduino and Ameba should be connected to each other.

RTL8722DM / RTL8722CSM Wiring Diagram:

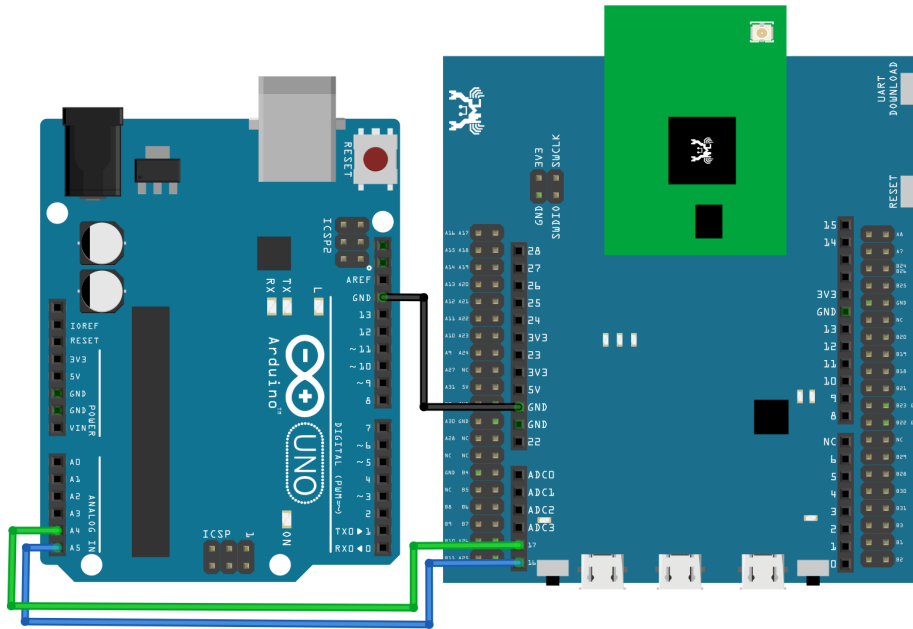


RTL8722DM MINI Wiring Diagram:

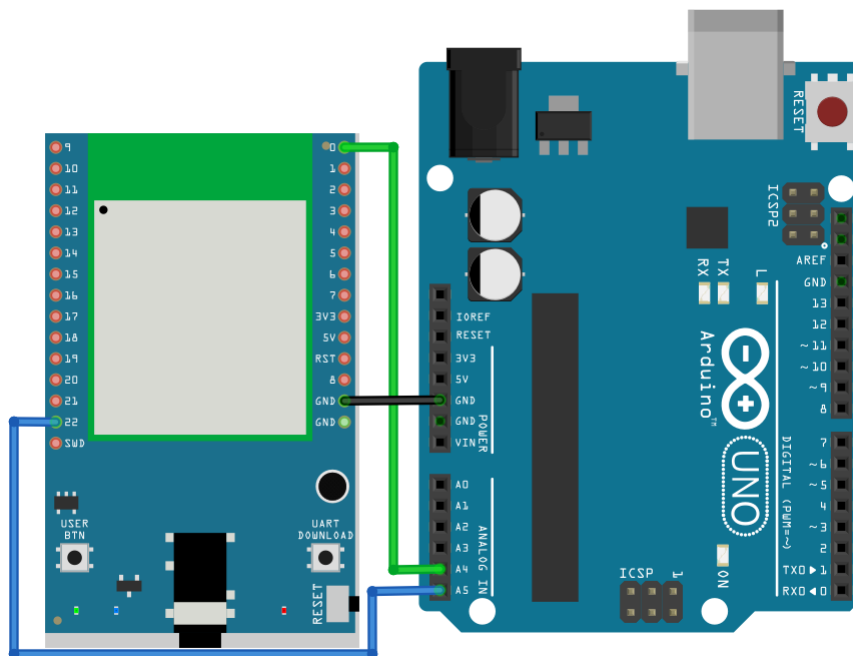

Next, we will observe the data receive by Ameba in the Serial Monitor.

(Note: If you do not know which port the Ameba development board is connected to, please find it in the Device Manager of Windows first. Ameba is connected as “mbed Serial Port”. For example, if you find mbed Serial Port (COM15) means Ameba is connected to port COM15.)

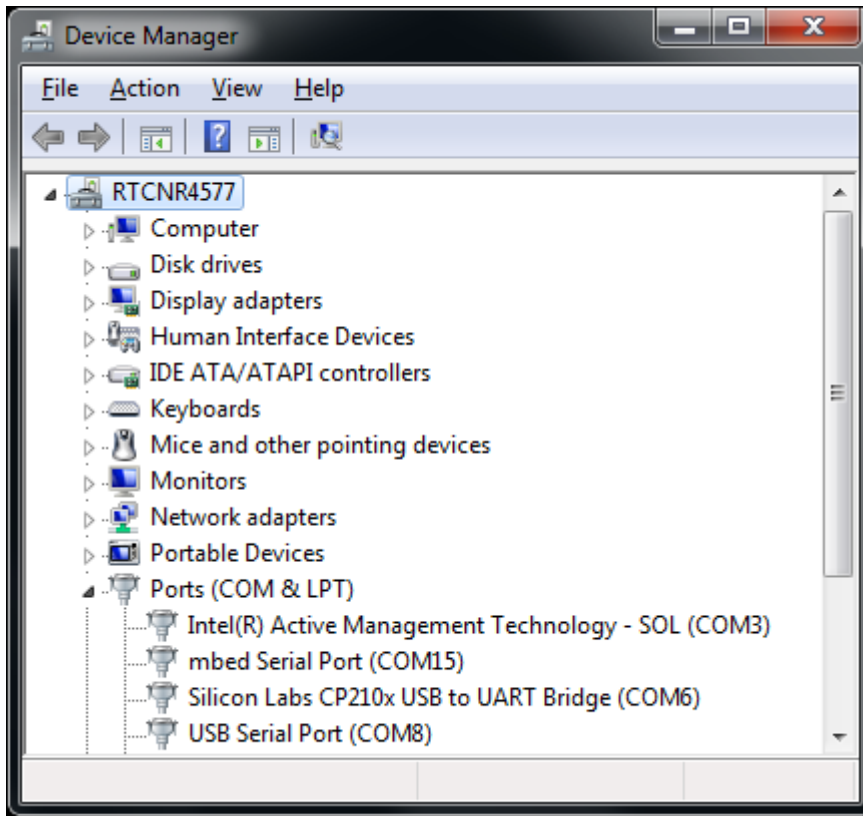


We select the port in “Tools” -> “Port” -> “COM15” (the port connected to Ameba)

Open the Arduino IDE window of the Ameba, go to “Tools” -> “Serial Monitor” to display the messages printed by Ameba.

Press the reset button on Arduino Uno, Arduino Uno now waits for connection from I2C master.

Then press the reset button on Ameba, Ameba will start to receive messages from Arduino Uno. And you can see the “hello ” message printed every half second in serial monitor.

(NOTE: If the message does not show in the Serial Monitor of Ameba, please close and open the serial monitor again.)

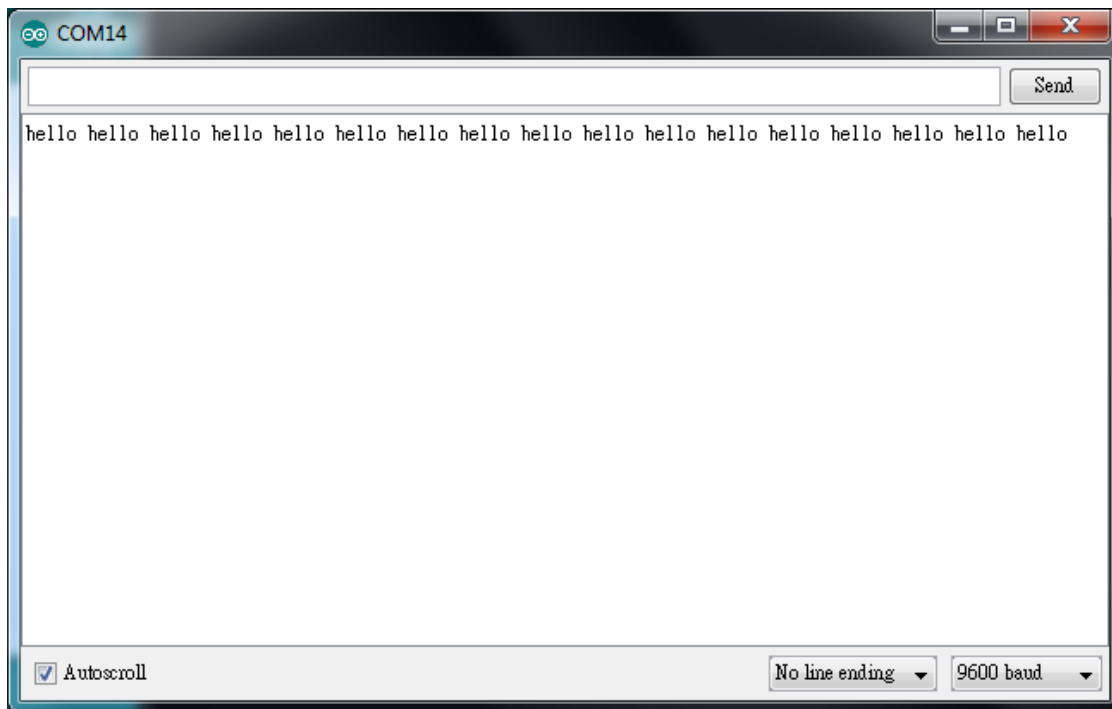

Code Reference

You can find detailed information of this example in the documentation of Arduino:

<https://www.arduino.cc/en/Tutorial/MasterReader>

First use `Wire.begin()` / `Wire.begin(address)` to join the I2C bus as a master or slave, in the Master case the address is not required.

<https://www.arduino.cc/en/Reference/WireBegin>

Next, the Master uses `Wire.requestFrom()` to specify from which Slave to request data.

<https://www.arduino.cc/en/Reference/WireRequestFrom>

UART - Communicate with the computer via UART

Introduction of UART

UART uses two wire, one for transmitting and the other one for receiving, so the data transmission is bidirectional. The communication uses a predefined frequency (baud rate) to transmit data. In Arduino, UART is called “Serial” . There is only one hardware UART on Arduino Uno and it is primarily used to read the log and messages printed by Arduino (so it is also called “Log UART”). If we use the hardware UART for other purposes, the Log UART does not have resources to function. To provide more UART connections, it is possible to use a GPIO pin to simulate the behavior of UART with a software approach, this is called Software Serial. Ameba is equipped with several hardware UART ports, but it is also compatible with the Software Serial library.

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- USB to TTL Adapter x 1

Example


In this example, we use UART to connect USB to TTL adapter to Ameba.

USB to TTL adapter sends data to Ameba, the data would be returned by Ameba, and showed on the screen.

- **Install USB to TTL Adapter**


USB to TTL adapter converts USB to serial interface. Normally, there are at least 4 pins on the adapter, that is 3V3 (or 5V), GND, TX and RX. Generally, installing the driver for the USB to TTL adapter would be required before using it. If the adapter uses the chip of FTDI, Windows will search and install the driver automatically, otherwise, you may need to install corresponding driver yourself.

Afterwards, open device manager. You can find corresponding serial port number of the USB to TTL adapter:

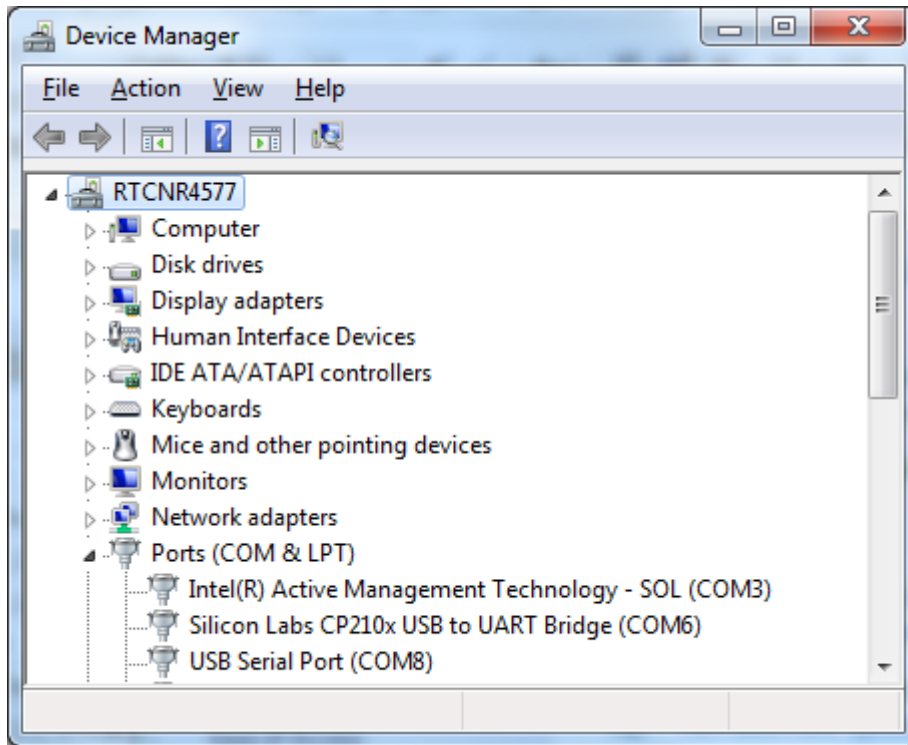


- Executing the Example

Open the “SoftwareSerialExample” example in “File” -> “Examples” -> “AmebaSoftwareSerial”
-> “SoftwareSerial_Basic” :

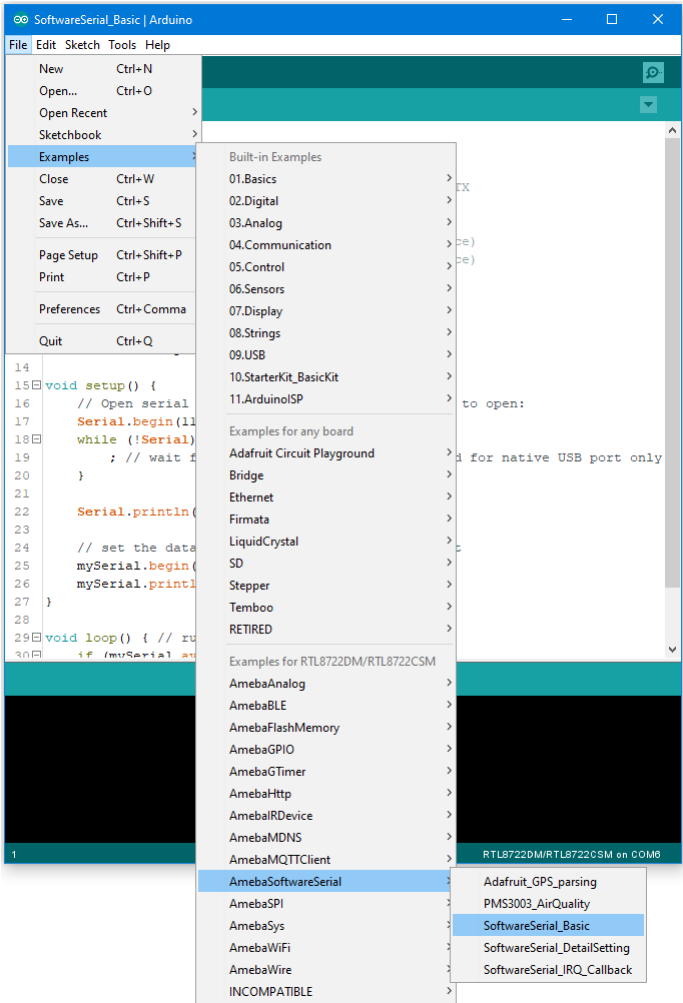


Connect the wire as the following diagrams show. The TX pin of USB to TTL adapter is connected to the RX of Ameba, and the RX pin of USB to TTL adapter is connected to the TX of Ameba.


RTL8722DM / RTL8722CSM Wiring Diagram:

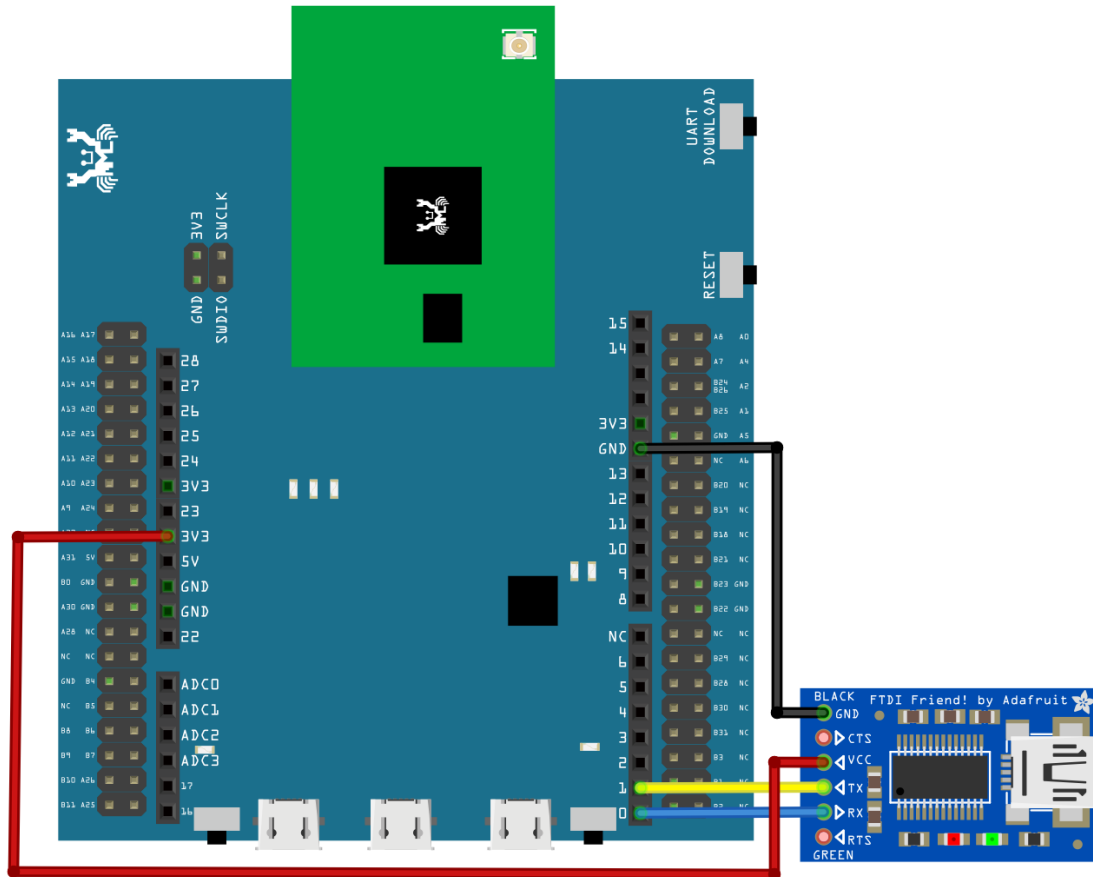


RTL8722DM MINI Wiring Diagram:

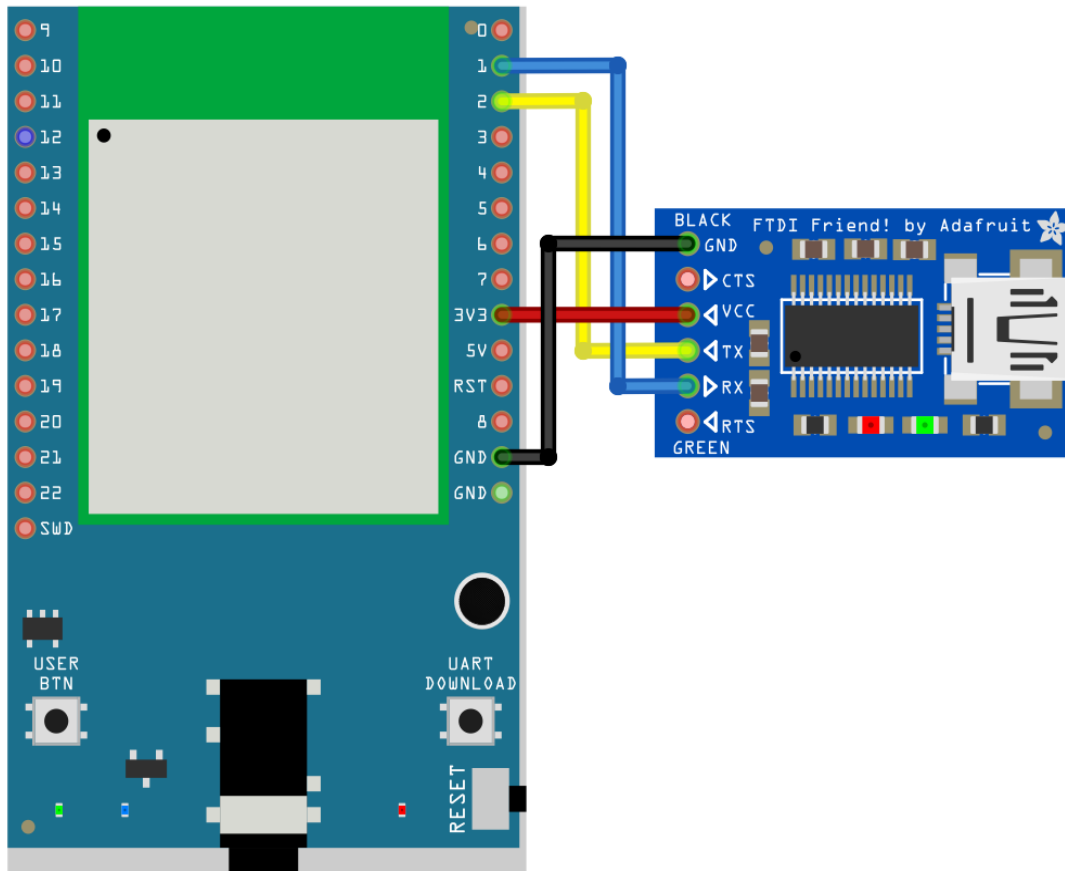


Next, open a serial port terminal, such as Putty or Tera Term. (Putty is used in this example). Open the Putty window, choose “Serial” in connection type, and specify the port number of the USB to TTL adapter (e.g. COM8). In the speed field, fill in the baud rate of this connection. Note that both sides of the connection should use the same baud rate. In this example we set baud rate 4800.

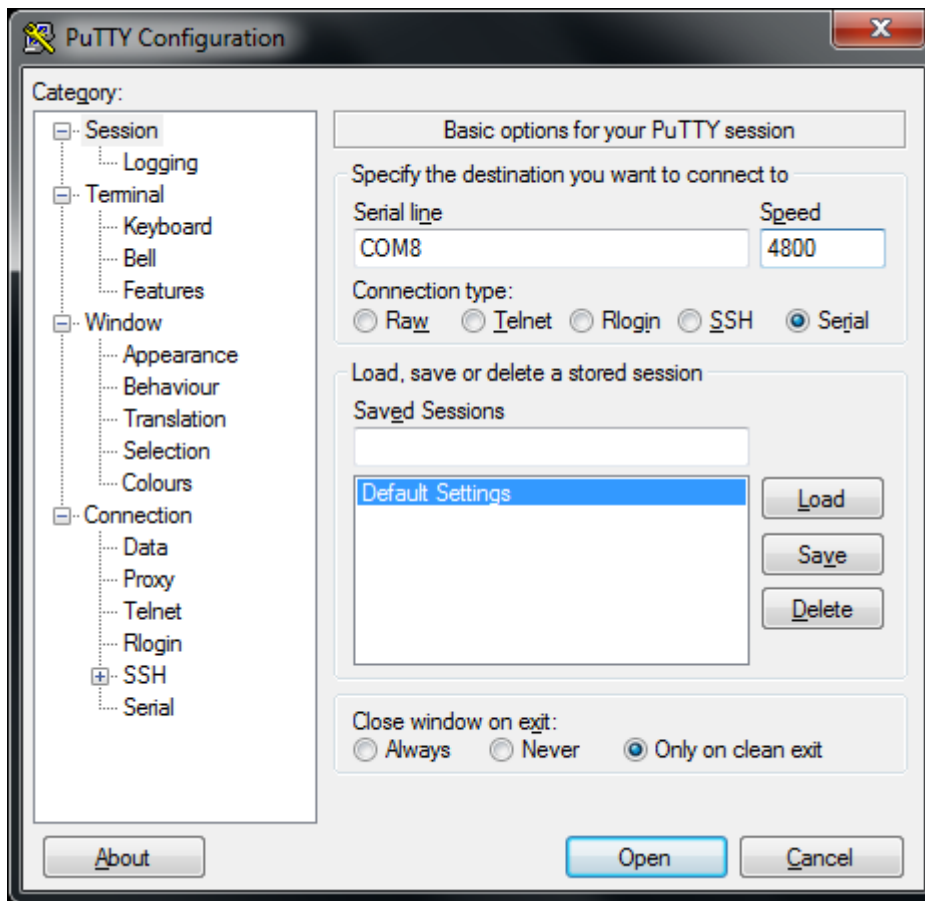

Next, select “Serial” on the left side. Set data bits to 8, stop bits to 1, parity to none, and flow control to none.

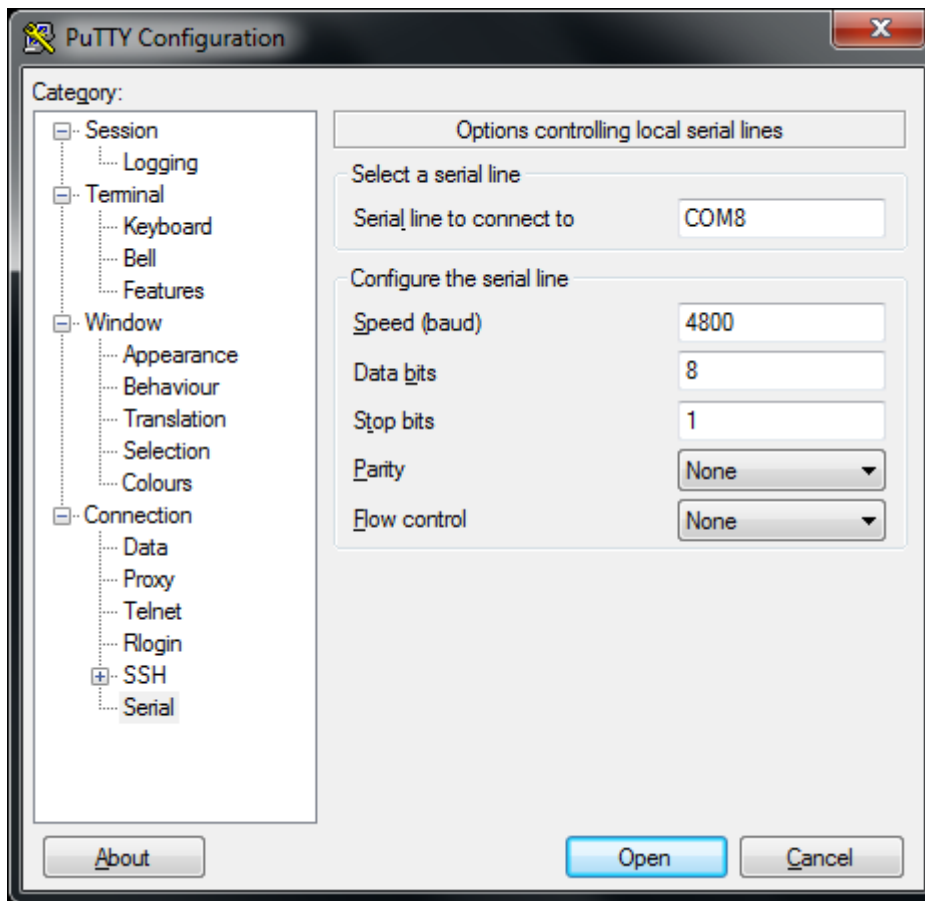

Then click Open and press the reset button on Ameba. You can see the “Hello, world?” message appears in Putty. If characters are typed into Putty, the input characters would be sent to Serial RX of Ameba by TX of USB to TTL Adapter, and returned by Serial TX of Ameba. Finally, RX of USB to TTL Adapter receives the returned characters and prints them in Putty. Therefore, if you insert “I am fine”, you will get something like this:

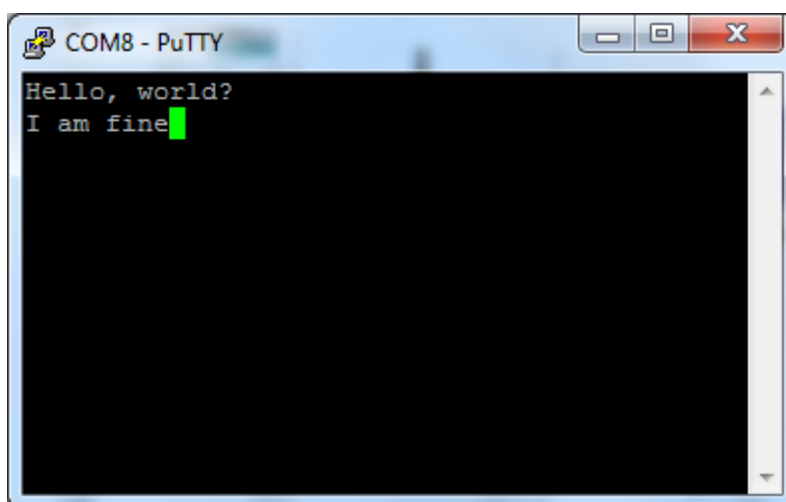

Code Reference

First, use `SoftwareSerial::begin(speed)` to set the baud rate for the serial communication:

<https://www.arduino.cc/en/Reference/SoftwareSerialBegin>

Use `write()` to send data, and use `SoftwareSerial::available()` to get the number of bytes available for reading from a software serial port:

<https://www.arduino.cc/en/Reference/SoftwareSerialAvailable>

If there are data available to read, use `read()` to read from serial port.

UART - Retrieve GPS Position


Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Adafruit Ultimate GPS Breakout x 1 (Refer to official document)


Example

In this example, we use Adafruit Ultimate GPS Breakout. Its data format is pure text, so we can connect it to USB to TTL Adapter and observe the out-

put.

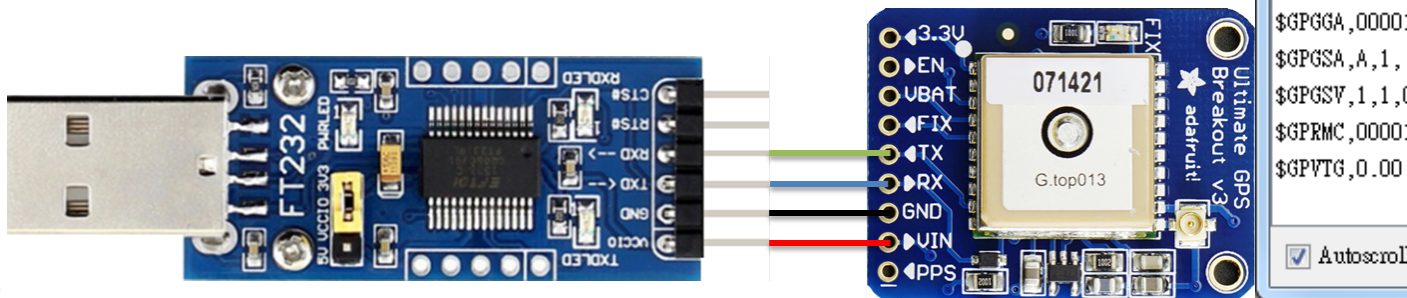

It follows the NMEA sentence format (refer to <http://aprs.gids.nl/nmea/>) The GPS signal is weak in indoor environment. The status that the GPS signal is not received is called “not fix”. Bring the GPS module outdoors, when the GPS signal is “fix”, you would get message similar to the figure below.

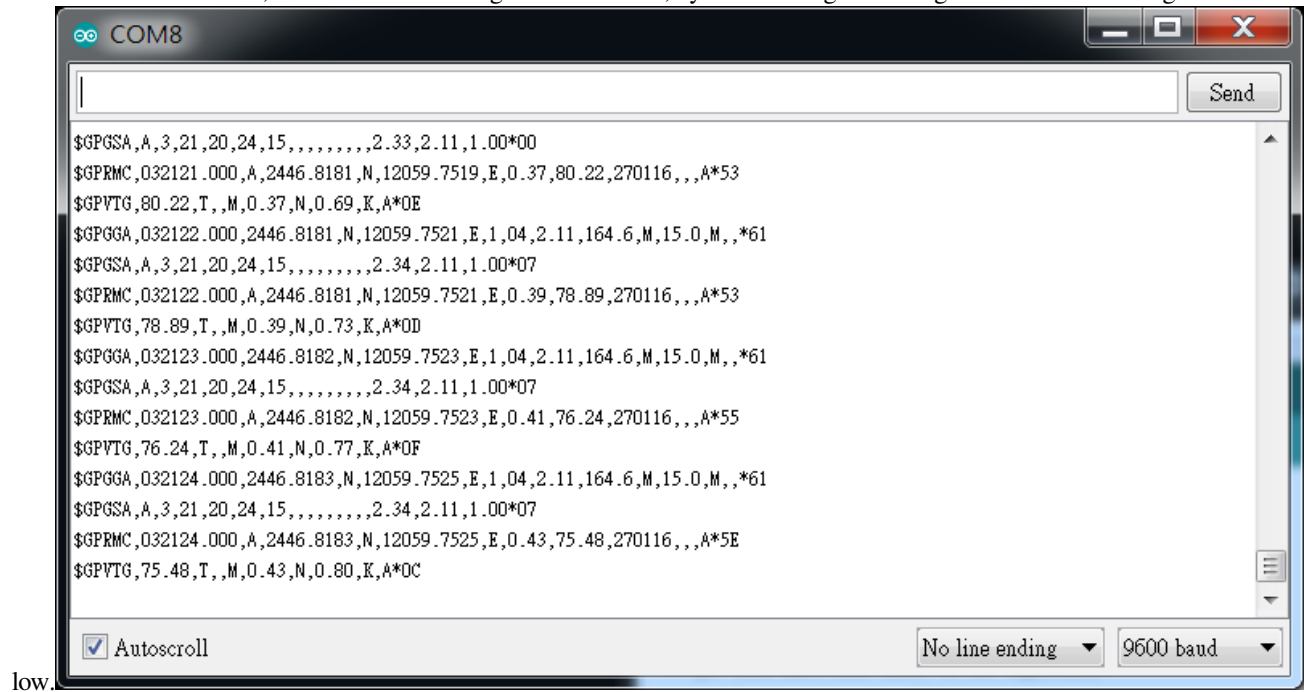

In this example we are only interested in the “\$GPRMC (Global Positioning Recommended Minimum Coordinates)” :
\$GPRMC,032122.000,A,2446.8181,N,12059.7251,E,0.39,78.89,270116,,A*53

Each field is separated by a comma.

- First field is the GMT time (Greenwich Mean Time), that is 032122.000 in this example. The time format is HH:MM:SS.SSS, i.e., 03:21:22.000. Note that the time zone and the daylight-saving time adjustment should be handled on your own.
- Second field represents the status code
 - V: Void (Invalid)
 - A: Active, meaning the GPS signal is fix.
- The third to sixth fields represent the geolocation


In this example, 2446.8181,N represents 24 degrees 46.8181 minutes north latitude, and 12059.7251,E represents 120 degrees 59.7251 minutes east longitude.


We can search **+24 46.8181'** , **+120 59.7251'** in Google map to check whether the position is cor-



rect.

- The seventh field is relative speed(knot). 1 knot = 1.852km/hr, in this example the relative speed is 0.39 knot.
- The eighth field is the moving angle, which is calculated by its moving orbit.
- The ninth field is the date with format ddMMyy. In this example, “270116” stands for day 27, January, year 2016.
- The last field is checksum. In the example we have *53 as checksum.

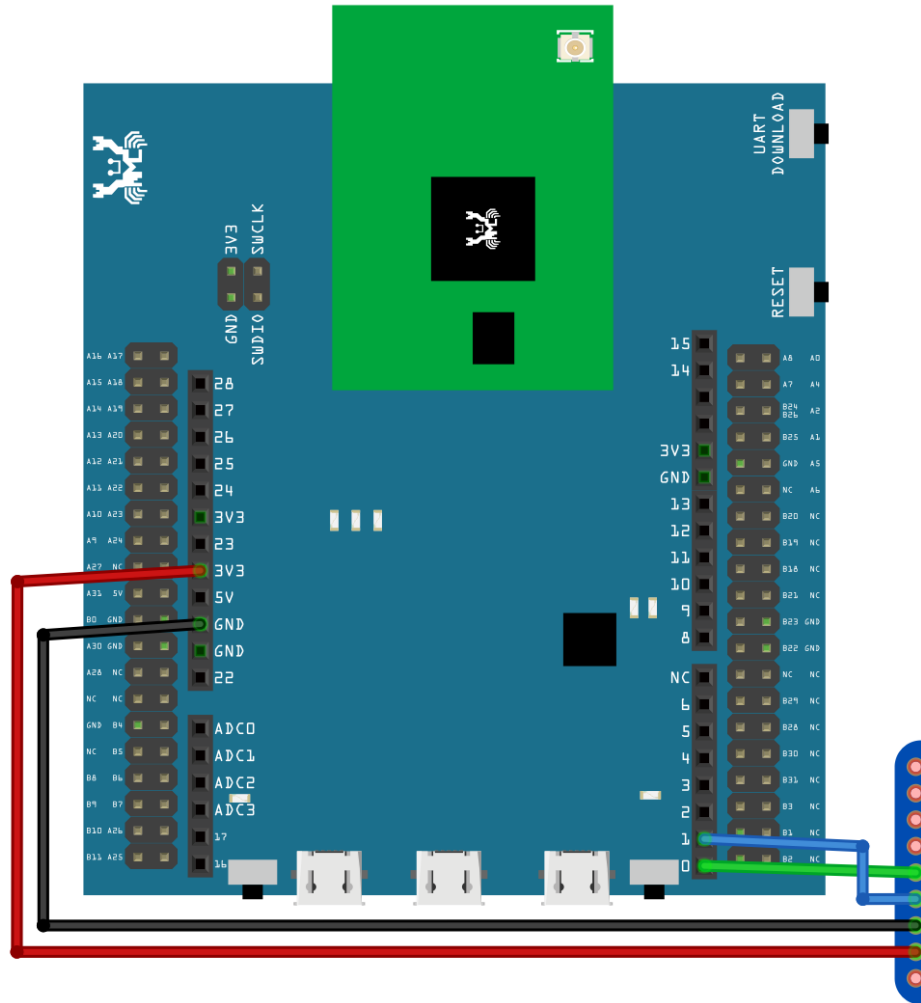

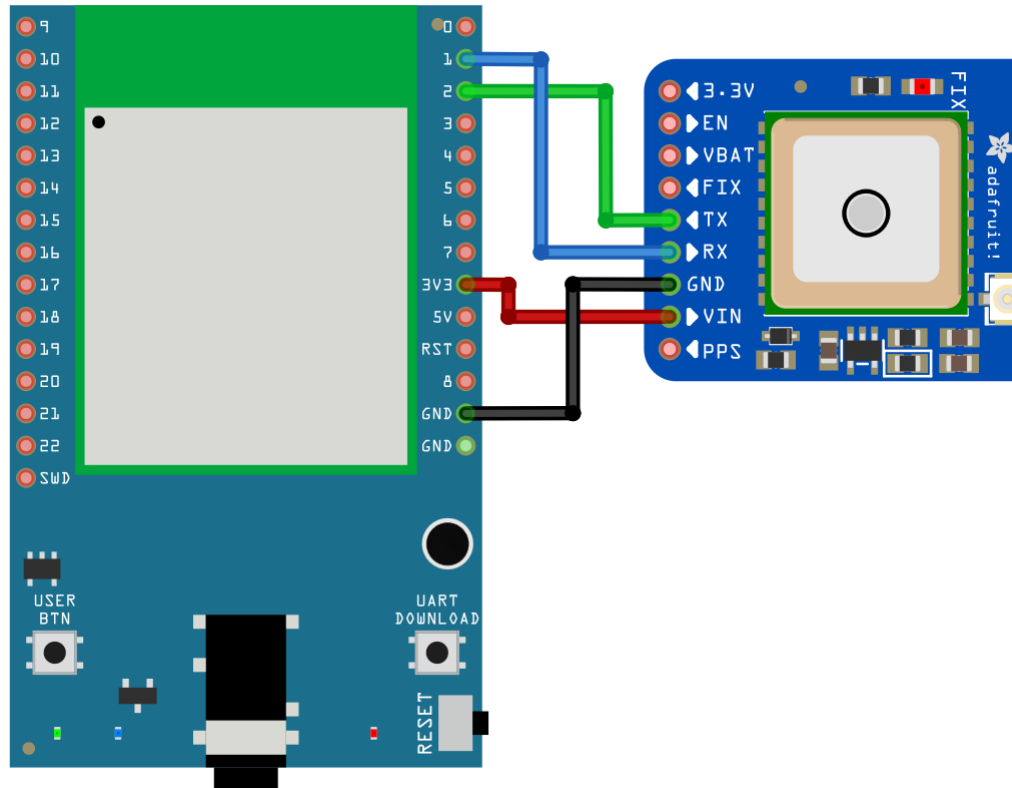


RTL8722DM MINI Wiring Diagram:

Open the example in “Files” -> “Examples” -> “AmebaSoftwareSerial” -> “Adafruit_GPS_parsing” .

Compile and upload to Ameba, then press the reset button.

The result will be output to Serial Monitor:

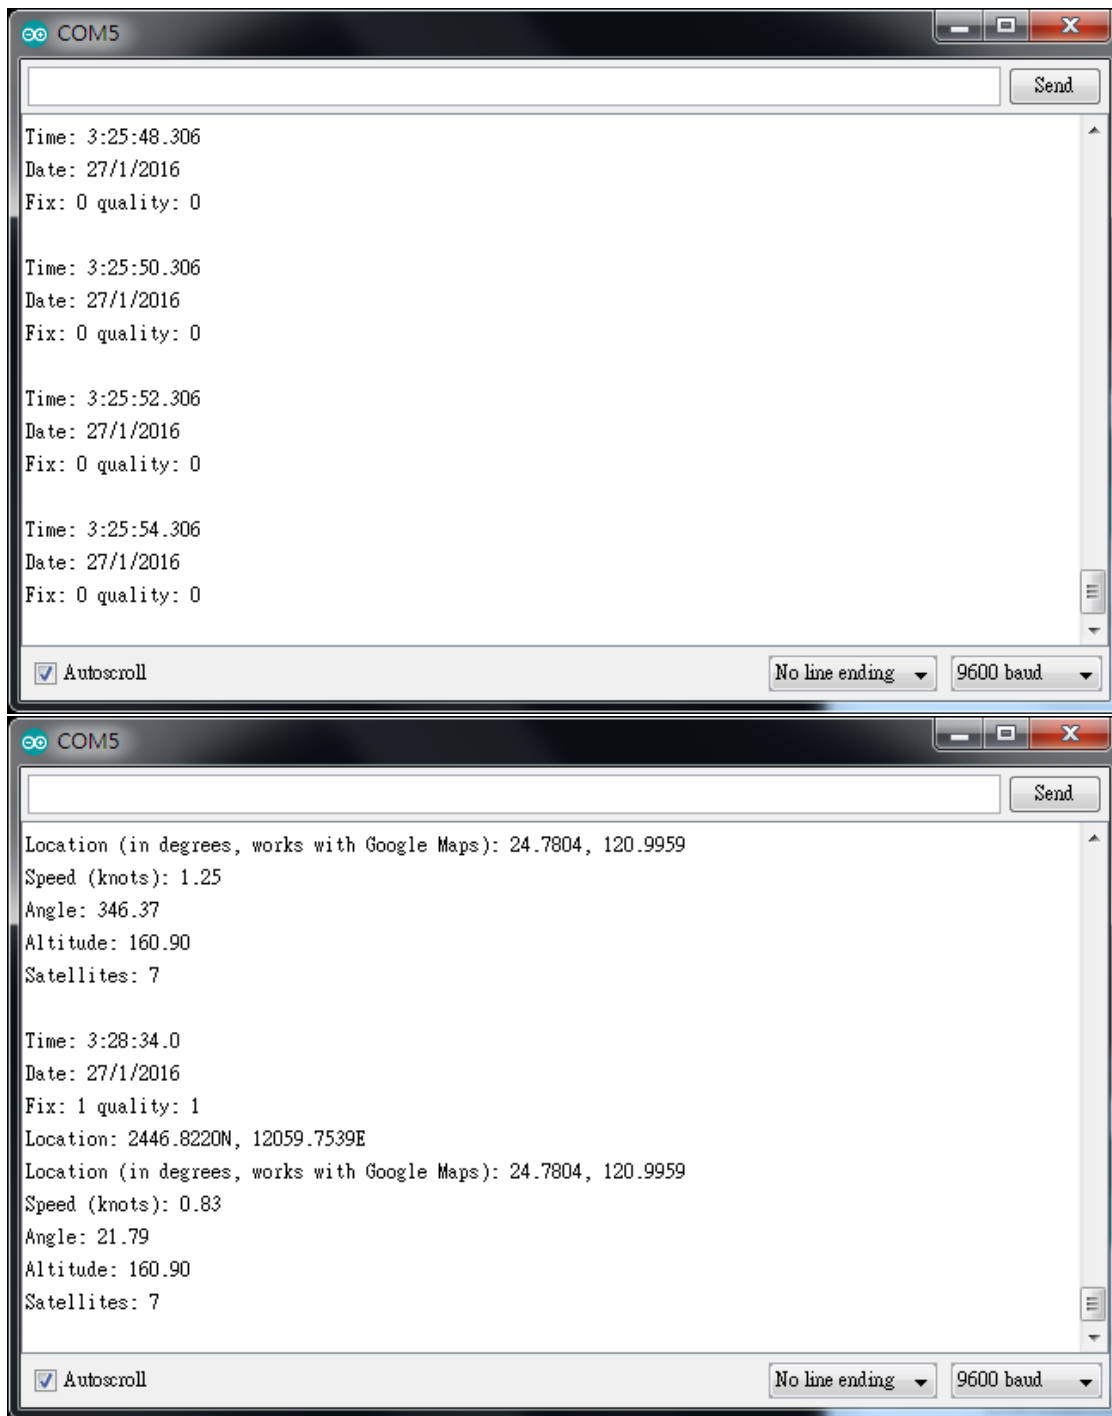

UART –Set Callback Function For UART Communications

Materials


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- USB to TTL Adapter x 1

Example


This example shows how to set a callback function for UART communication to process the UART data.

A USB to TTL adapter is required for this example. Ensure that you have the driver installed and connect it to the Ameba board as shown.


RTL8722DM / RTL8722CSM Wiring Diagram:

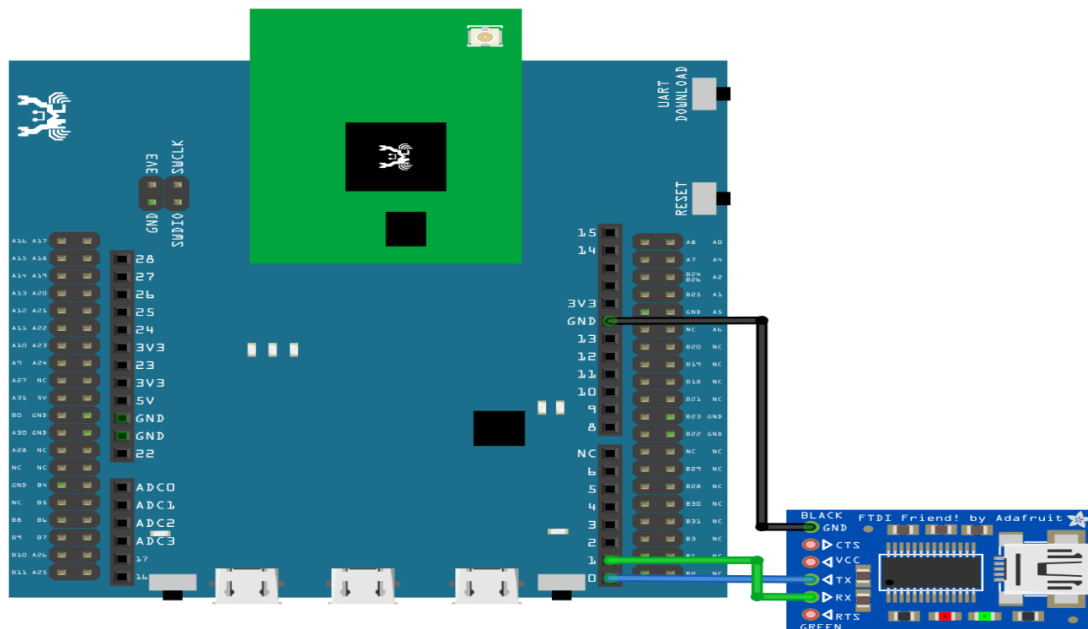

RTL8722DM MINI Wiring Diagram:

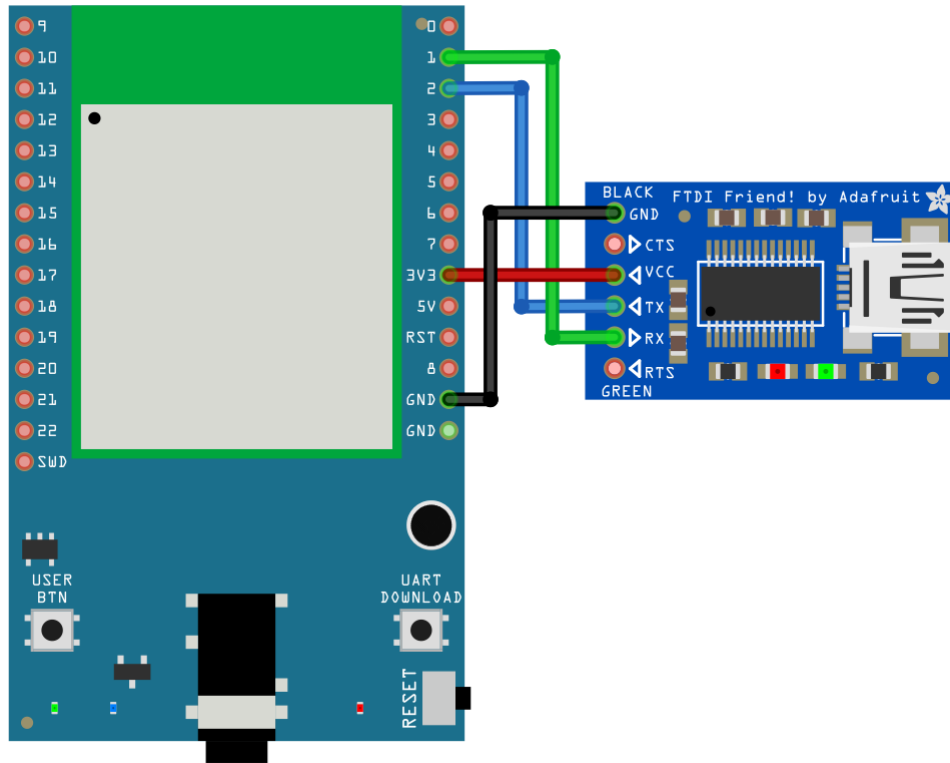


Open the example in “File” -> “Examples” -> “AmebaSoftwareSerial” -> “SoftwareSerial_Irq_Callback”

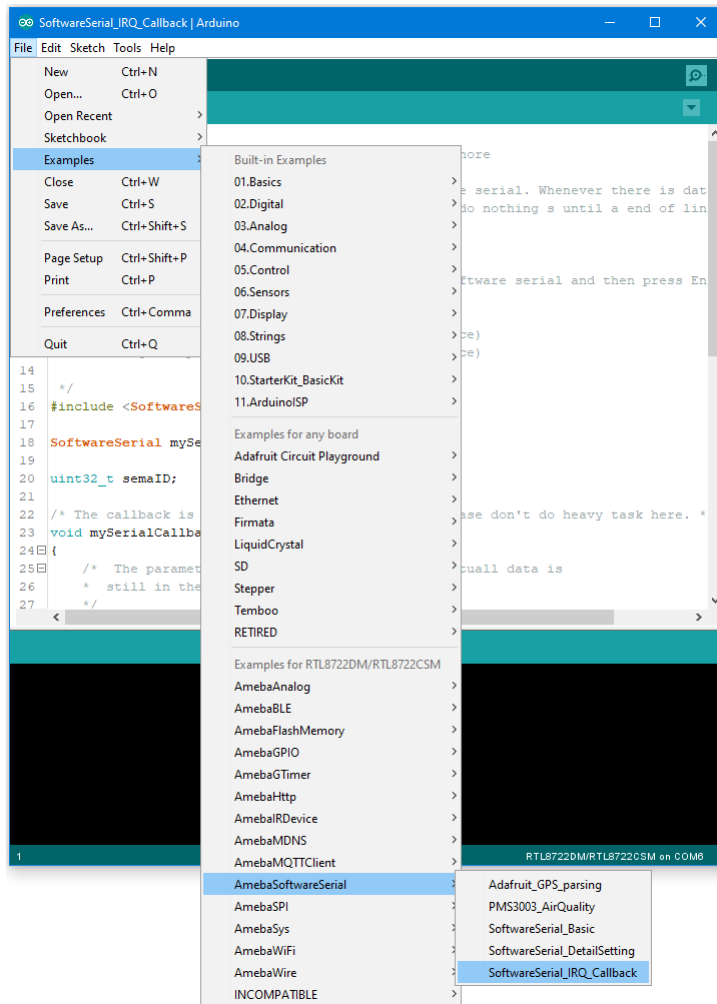


Upload the code and press the reset button on Ameba once the upload is finished.

Next, using a terminal program, such as TeraTerm or PuTTY, open a serial port and configure it according to the settings. Make sure the serial port number corresponds to the USB to TTL adapter.

- Speed: 38400
- Data: 8 bit
- Parity: none
- Stop bits: 1 bit
- Flow control: none

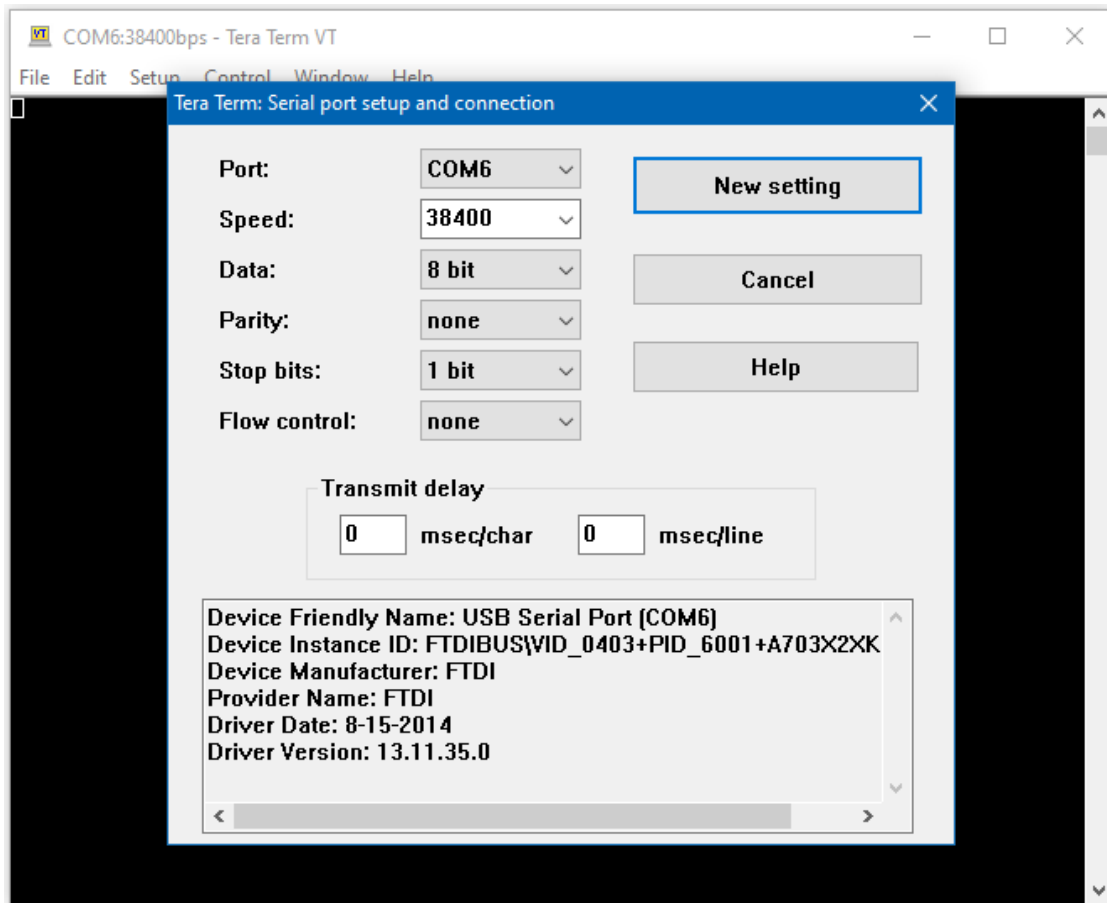

Once the serial port is open, type in the terminal and press the enter key, and you will see the corresponding output.

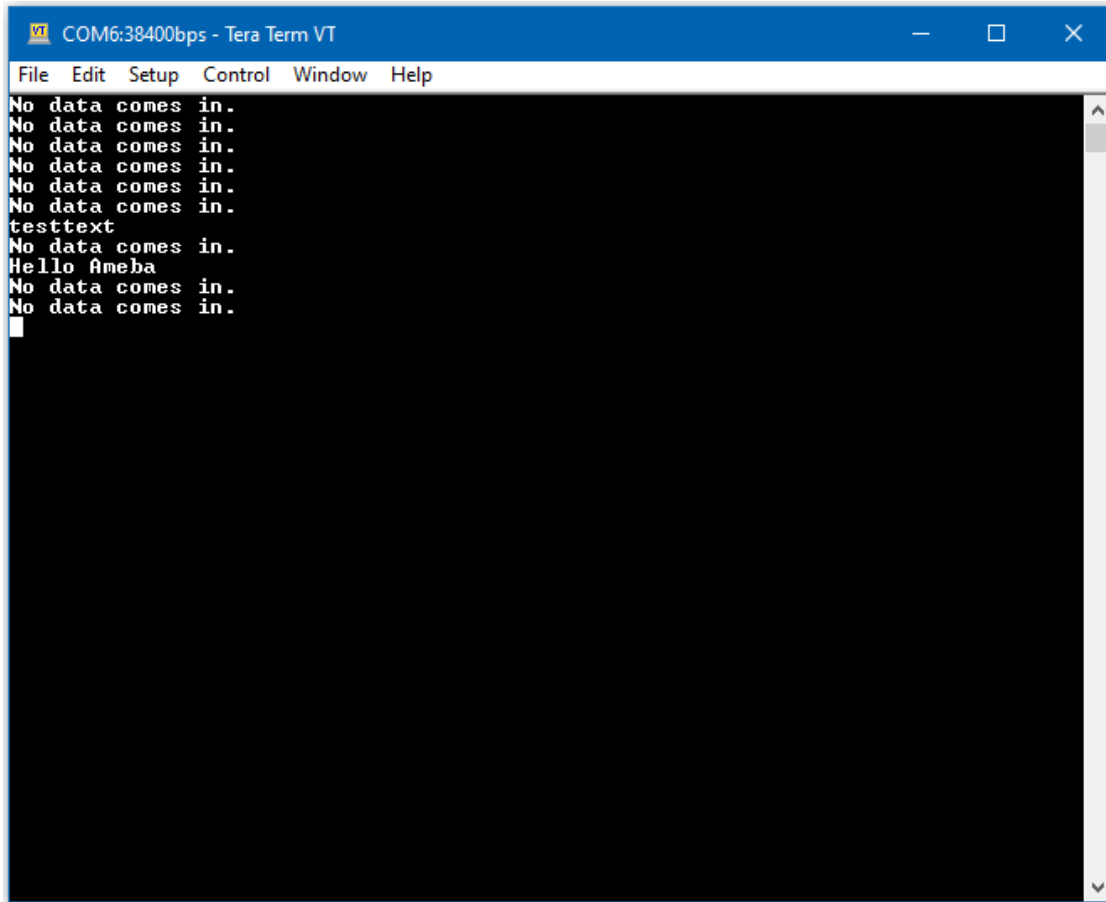

Code Reference

`mySerial.setAvailableCallback(mySerialCallback)` ; is used to set the function `mySerialCallback` as a callback function for software serial. When a new character is received, the callback function checks if the character corresponds to the enter key, and releases the semaphore if it is true, which in turn allows the main loop to print out all the previously received characters.

PM2.5 Concentration in The Air

Preparation


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- PlanTower PMS3003 or PMS5003 x 1

Example


PMS3003 (or PMS5003) is a sensor of air quality, it can detect the concentration of those 0.3 to 10 micrometer particulate matters in the air. The sensor output its data via UART.

The PMS3003 (or PMS5003) sensor detects the concentration value of PM 1.0, PM 2.5, PM 10. Take PM 2.5 for example, it stands for the fine particles with a diameter of 2.5 micrometers or less.

Open the example in “File”-> “Examples”-> “AmebaSoftwareSerial”-> “PMS3003_AirQuality”

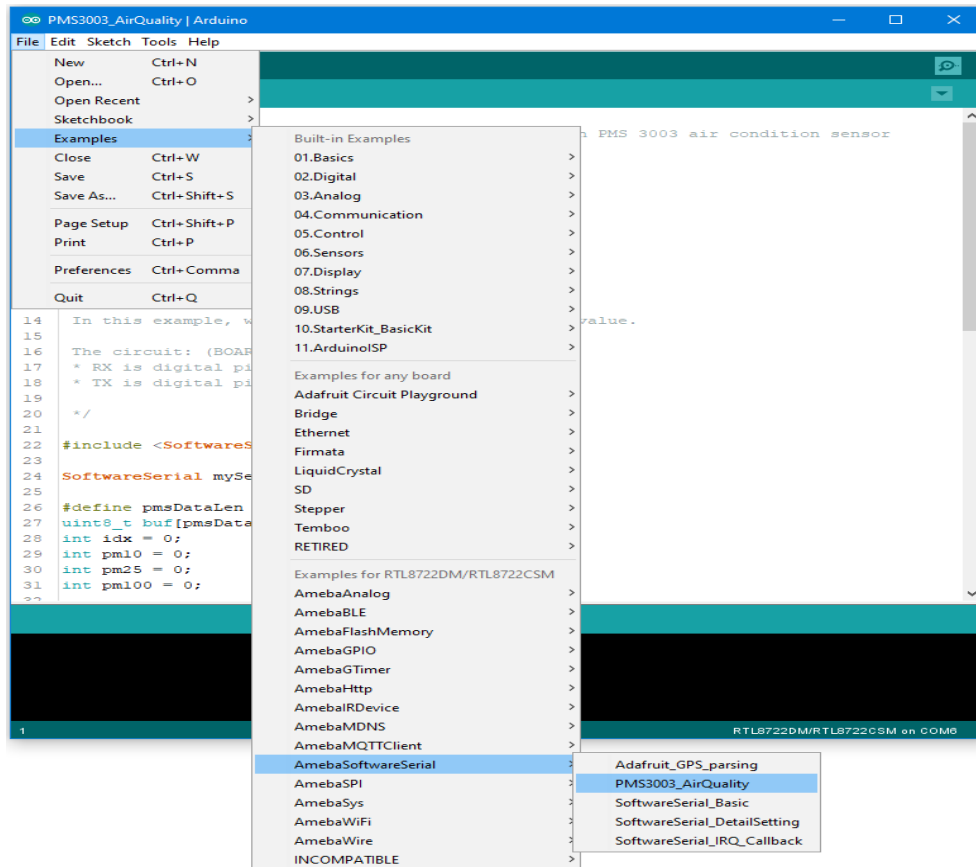

There are 8 pins in PMS3003:

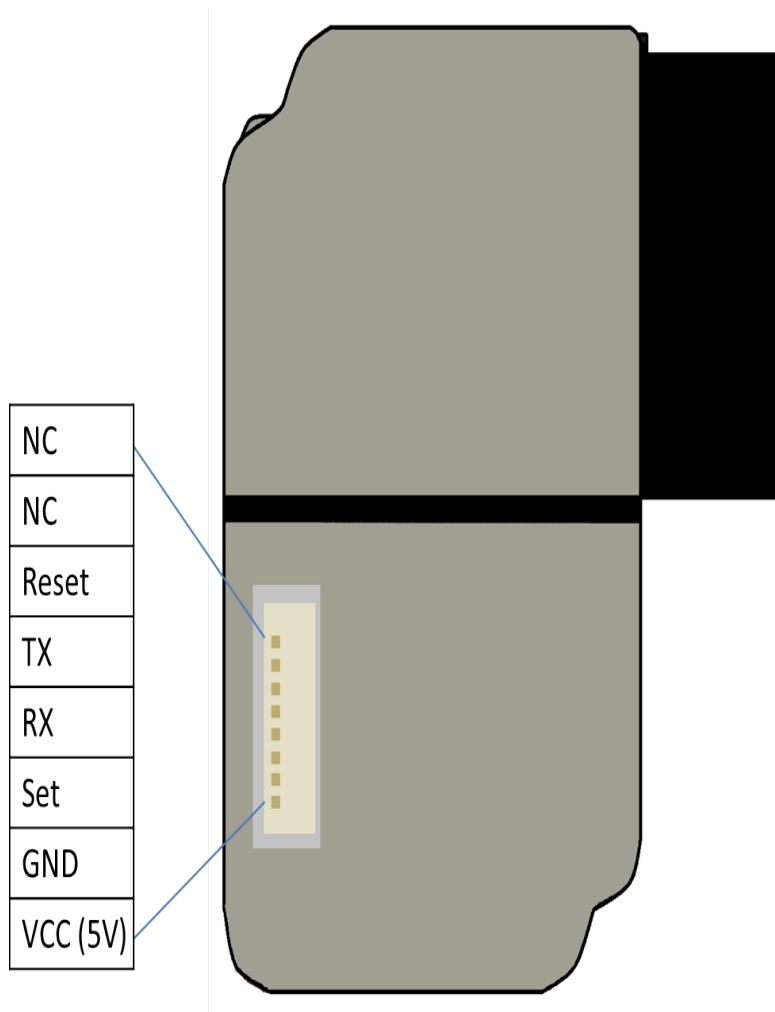


PMS3003 requires 5V power, but the working voltage of its IC is 3.3V. Therefore, the working voltage of Reset, TX, RX, Set are 3.3V as well. If the “Set” pin is pulled to high, the PMS3003 is put to operating mode. If the “Set” pin is pulled low, the PMS3003 is put to standby mode.


TX/RX pins are for UART connection. Under operating mode, PMS3003 outputs the data it reads continuously. Each data is of 32 bytes, please refer to the following article for detailed data format information:

https://www.dfrobot.com/wiki/index.php?title=PM2.5_laser_dust_sensor_SKU:SEN0177 RTL8722

RTL8722DM / RTL8722CSM Wiring Diagram:

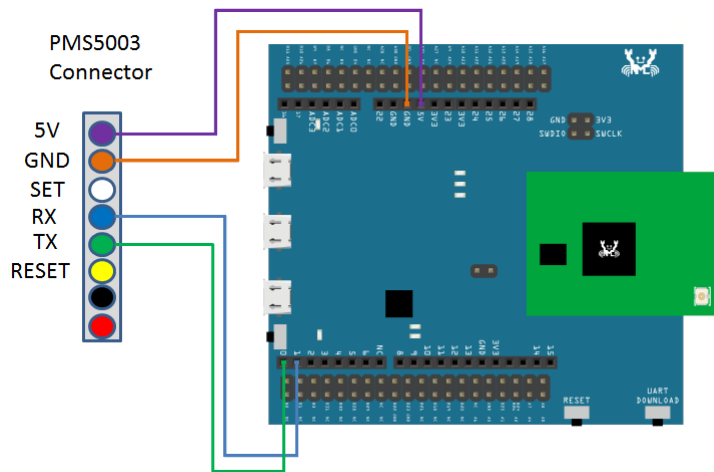


RTL8722DM MINI Wiring Diagram:

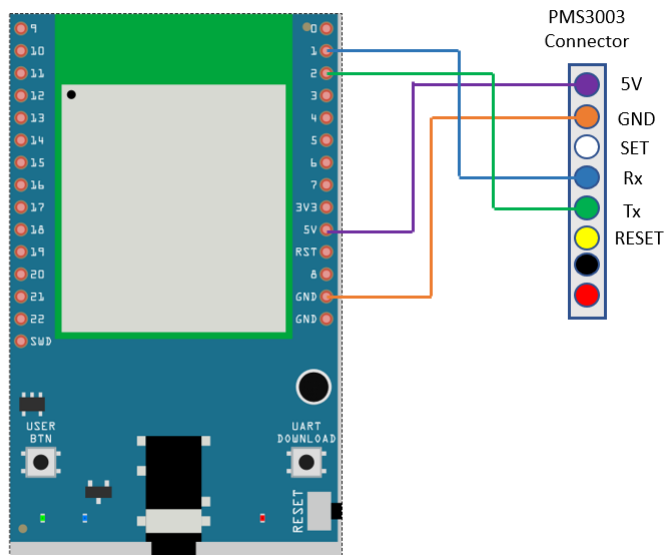

In this example, we do not use the “Set” and “Reset” pins.

Compile the code and upload it to Ameba. After pressing the Reset button, Ameba starts to output the PM 2.5 data to serial monitor.

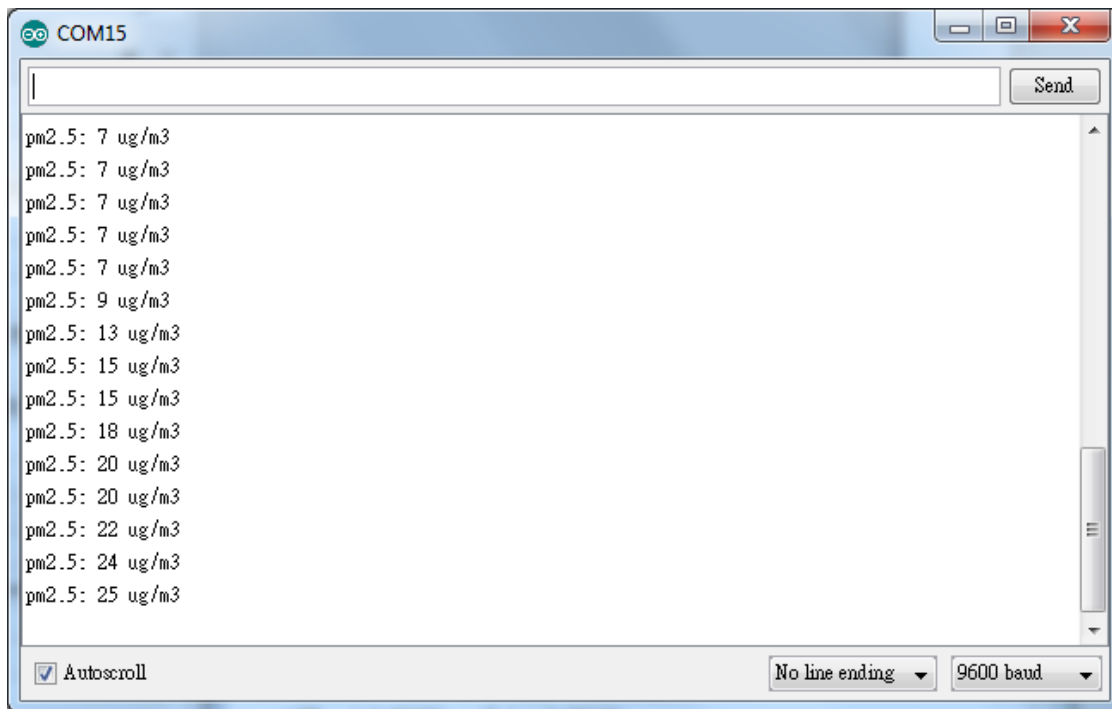

Flash Memory - Store data in FlashEEProm

Preparation


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1

Example

Ameba provides Flash Memory component for data storage and the data can be preserved when the power is off if necessary, e.g., compiled program. To avoid the memory space overlapped with the program on Ameba, the Flash API uses the tail part of the address space, with sector size 4K.


In this example, we store the value of boot times in flash memory. Every time Ameba reboots, it reads the boot times from flash, increases the value by 1, and writes it back to flash memory.

First open the example, “File” -> “Example” -> “AmebaFlashMemory” -> “FlashMemoryBasic”

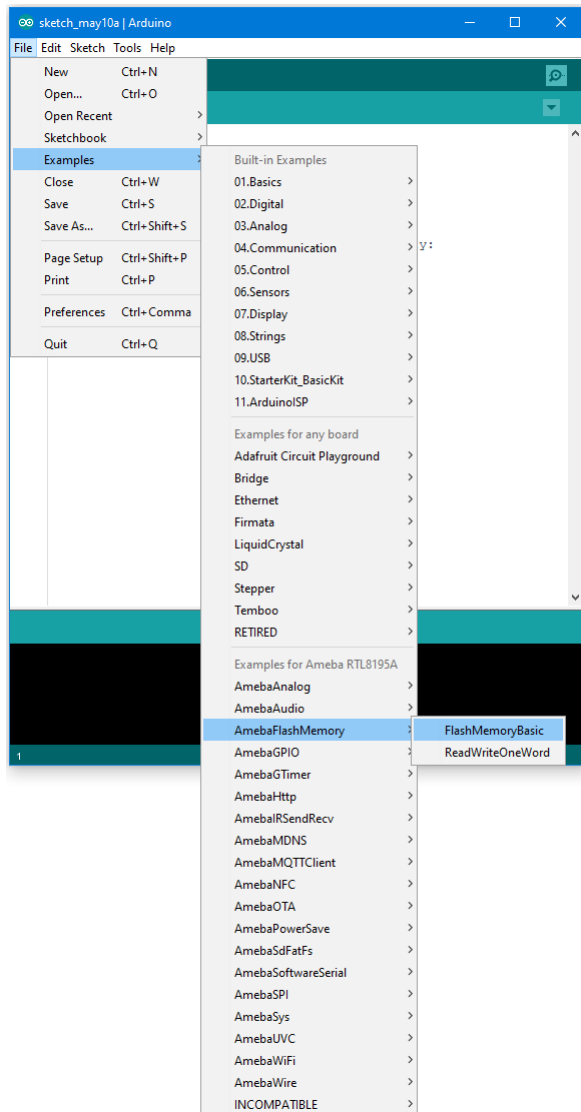

Compile and upload to Ameba, then press the reset button.

Open the Serial Monitor, press the reset button for a few times. Then you can see the boot times value increases.

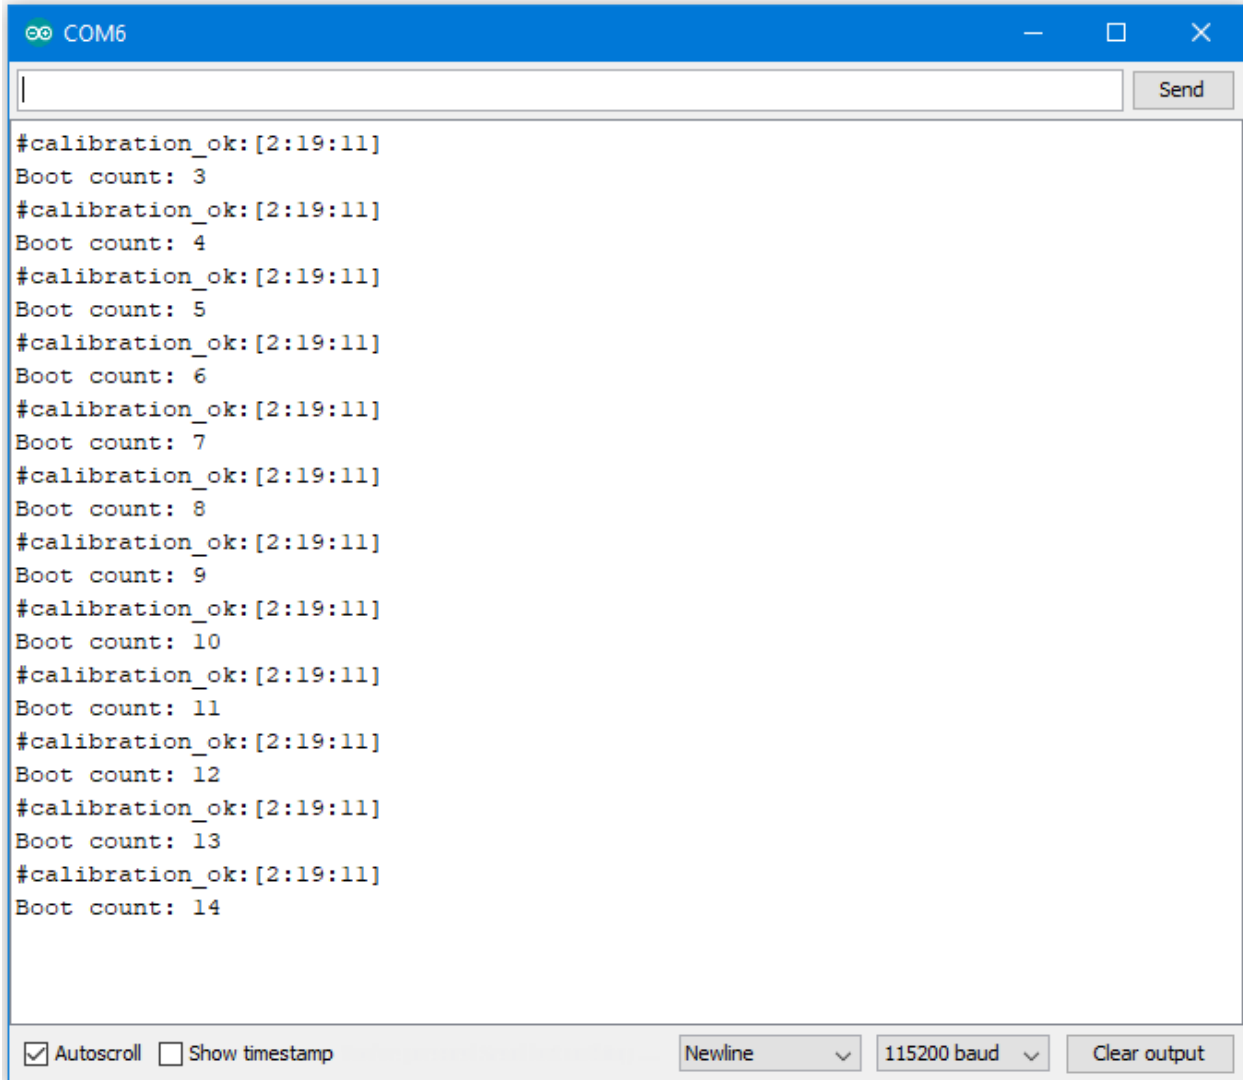

```
#calibration_ok:[2:19:11]
Boot count: 3
#calibration_ok:[2:19:11]
Boot count: 4
#calibration_ok:[2:19:11]
Boot count: 5
#calibration_ok:[2:19:11]
Boot count: 6
#calibration_ok:[2:19:11]
Boot count: 7
#calibration_ok:[2:19:11]
Boot count: 8
#calibration_ok:[2:19:11]
Boot count: 9
#calibration_ok:[2:19:11]
Boot count: 10
#calibration_ok:[2:19:11]
Boot count: 11
#calibration_ok:[2:19:11]
Boot count: 12
#calibration_ok:[2:19:11]
Boot count: 13
#calibration_ok:[2:19:11]
Boot count: 14
```

Code Reference

By default, the Flash Memory API uses address 0xFF000~0xFFFFF to store data.

There is limitation when writing to flash memory. That is, you can not directly write data to the same address you used in last write. To do that correctly, you need erase the sector first. The Flash API of Ameba uses a 4K SRAM to record the user modification and do the erase/write task together.

Use `FlashMemory.read()` to read from Flash memory.

Use `FlashMemory.buf[0] = 0x00;` to manipulate the 4K buf.

Use `FlashMemory.update()`; to update the data in buf to Flash Memory.

Flash Memory - Use Flash Memory Larger Than 4K

Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1


Example

Flash Memory API uses memory of 4K bytes, which is normally sufficient for most application. However, larger memory can be provided by specifying a specific memory address and required size.

First, open the sample code in “File” -> “Examples” -> “AmebaFlashMemory” -> “ReadWriteOneWord”

In this example, we specify the starting address of flash memory is 0xFC000 and size is 0x4000 (The default starting address is 0xFF000 and size is 0x1000).

Then calculate correct address according to the specified offset and perform read/write operation. In the sample code we use offset 0x3F00, that is, $0xFC000 + 0x3F00 = 0xFFFF00$ in flash. We set the value to 0 at first, then increase by 1 every time Ameba reboots.

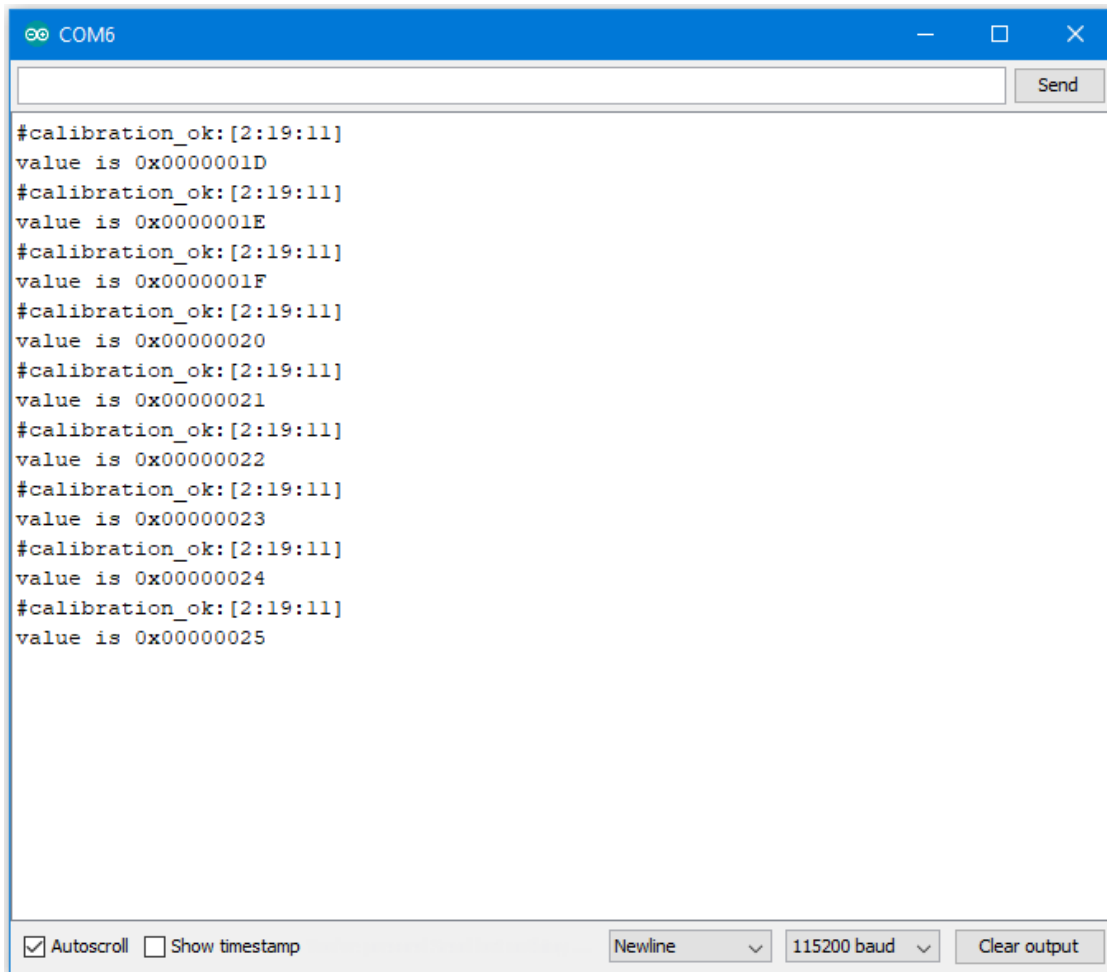

Code Reference

We can use the flash api we used in previous flash memory example, but we need to use `begin()` function to specify the desired starting address and memory size.

```
FlashMemory.begin(0xFC000, 0x4000);
```

Use `readWord()` to read the value stored in a memory address. In the example, we read the value stored in memory offset `0x3F00`, that is `0xFC000 + 0x3F00 = 0xFFFF00`. `readWord()` function reads a 32-bit value and returns it.

```
value = FlashMemory.readWord(0x3F00);
```

Use `writeWord()` to write to a memory address. The first argument is the memory offset, the second argument is the value to write to memory.

```
FlashMemory.writeWord(0x3F00, value);
```

SPI –Print Image And Text On LCD Screen

If you are not familiar with SPI, please read [Introduction to SPI](#) first.

Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- ILI9341 TFT LCD with SPI interface x 1

Example


We have tested the following two models of ILI9341 TFT LCD with SPI interface:

- Adafruit 2.8" TFT LCD (with touch screen)
 - <https://www.adafruit.com/products/1651>
 - <https://learn.adafruit.com/adafruit-2-8-tft-touch-shield-v2?view=all>
- QVGA 2.2" TFT LCD
 - http://www.lcdwiki.com/2.2inch_SPI_Module_ILI9341_SKU:MSP2202


Common pins in ILI9341 TFT LCD with SPI interface:

- MOSI: Standard SPI Pin
- MISO: Standard SPI Pin
- SLK: Standard SPI Pin
- CS: Standard SPI Pin
- RESET: Used to reboot LCD.
- D/C: Data/Command. When it is at Low, the signal transmitted are commands, otherwise the data transmitted are data.
- LED (or BL): Adapt the screen backlight. Can be controlled by PWM or connected to VCC for 100% backlight.
- VCC: Connected to 3V or 5V, depends on its spec.
- GND: Connected to GND.

RTL8722DM / RTL8722CSM and QVGA TFT LCD Wiring Diagram:

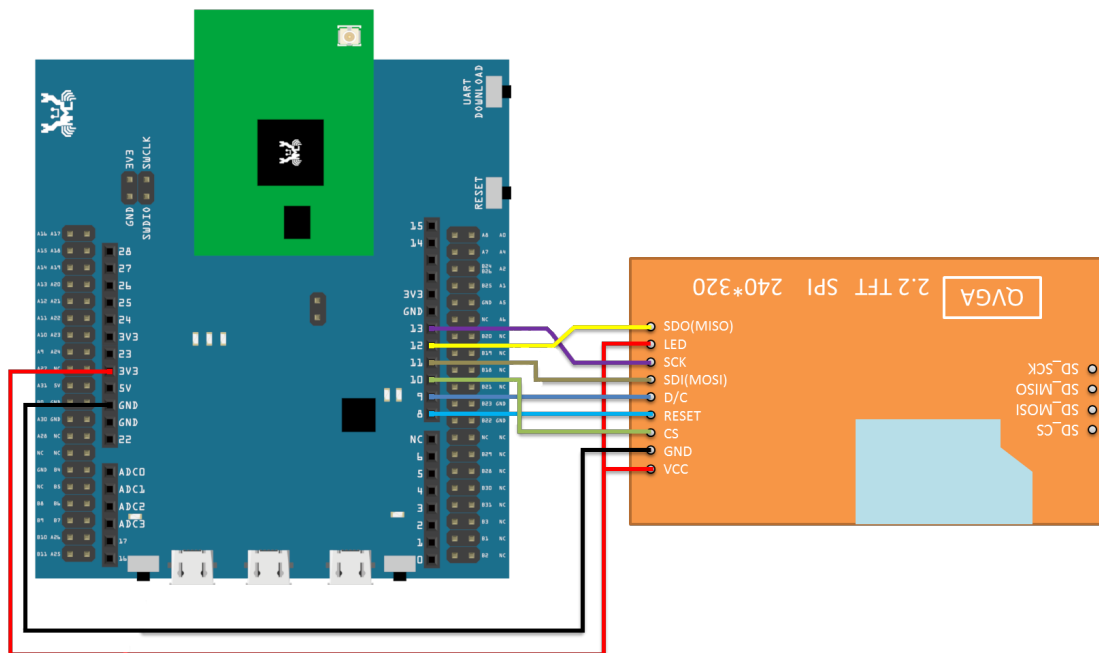

RTL8722DM MINI and QVGA TFT LCD Wiring Diagram:

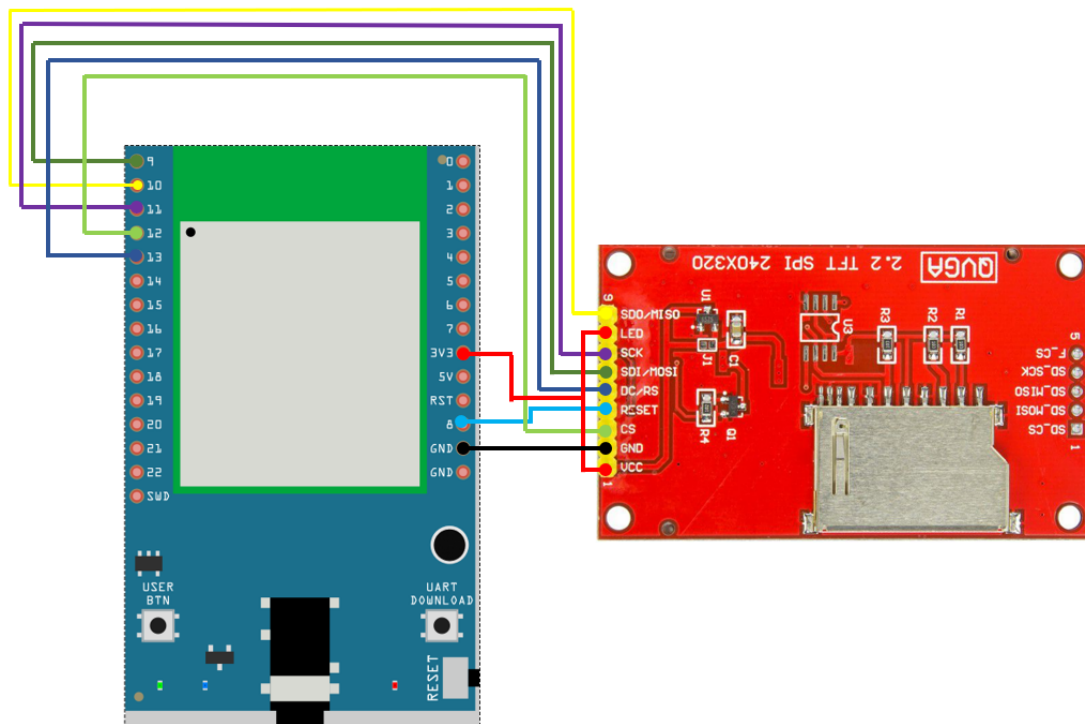


Wiring example of Adafruit 2.8" TFT LCD touch shield:

Please note that this shield model enables the backlight by default and pin 8 is not for backlight, and the VCC should be connected to 5V.


RTL8722DM / RTL8722CSM and Adafruit 2.8'' TFT LCD touch shield Wiring Diagram:

Please note that this shield model enables the backlight by default and pin 8 is not for backlight, and the VCC should be connected to 5V.

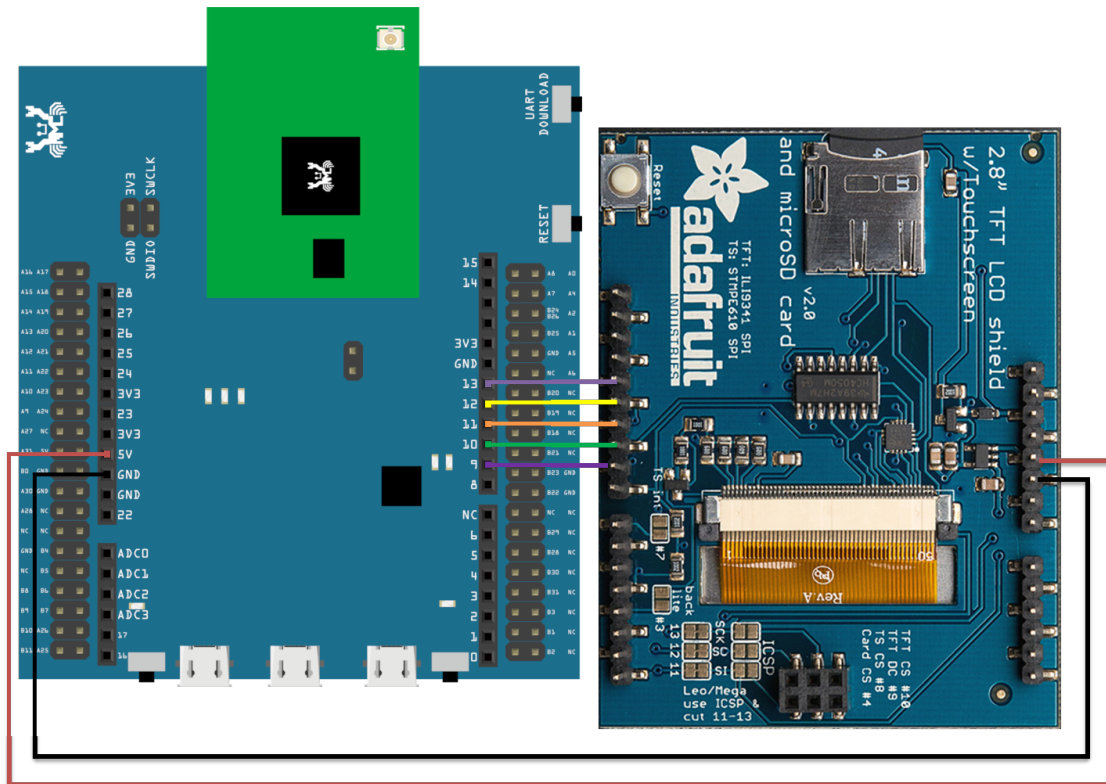


RTL8722DM MINI and Adafruit 2.8'' TFT LCD touch shield Wiring Diagram:



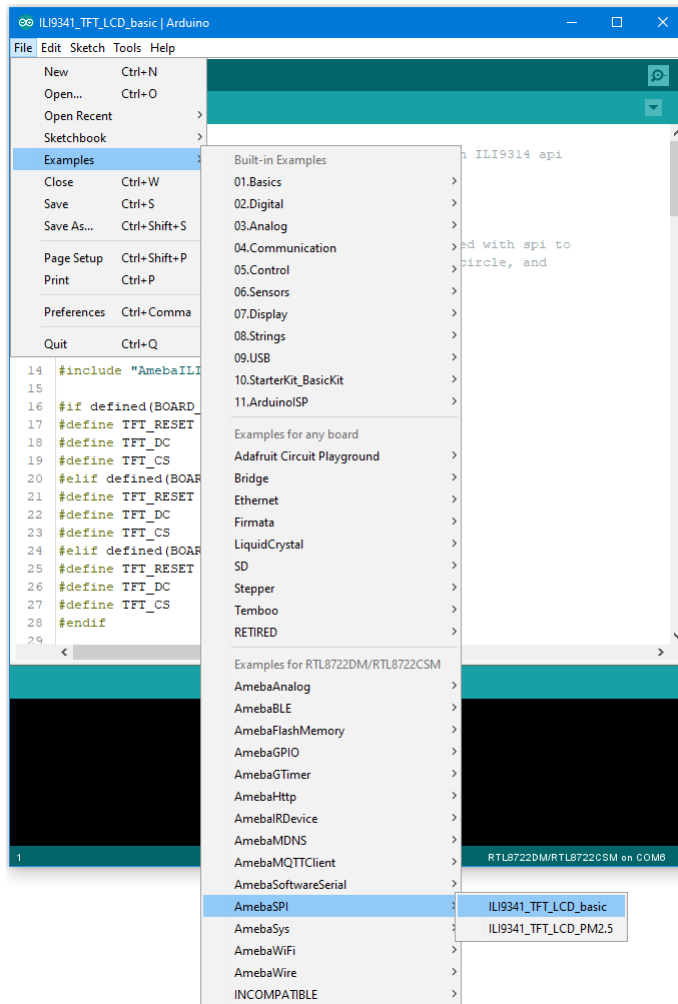

Compile and upload to Ameba, then press the reset button.

Then you can see some display tests appear on the LCD screen, such as displaying different colors, drawing vertical and horizontal lines, drawing circles, etc. ...

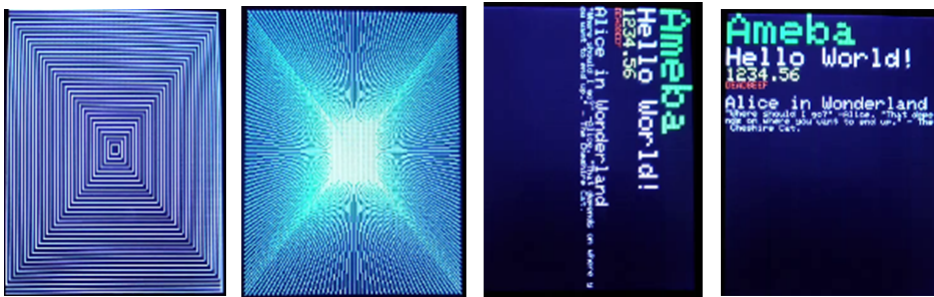

Code Reference

- **RGB 16-bit**

ILI9341 uses RGB 16-bit to display colors. Different from RGB 24-bit, it uses 5 bits for red, 6 bits for green, 5 bits for blue. For example, the RGB 24-bit representation of sky blue is 0x87CEFF, that is in binary:

- Red: 0x87 = B10000111
- Green: 0xCE = B11001110
- Blue: 0xFF = B11111111

and converted to RGB 16-bit:

- Red: B10000
- Green: B110011
- Blue: B11111


Then concatenate them, which forms B1000011001111111 = 0x867F

- **Drawing of ILI9341**

- First you must specify the range of the rectangle to draw, then pass the 2-byte RGB 16-bit color to ILI9341 corresponding to each pixel one by one, in this way ILI9341 fills each color to each pixel.
- You still must specify the drawing range even though the range covers only one pixel.
- From the rules we mentioned above, we can conclude that drawing vertical or horizontal lines are faster than diagonal lines.

- **Printing text on ILI9341**

- In our API, each character is 5×7 but each character is printed to size 6×8 (its right side and below are left blank), so as to separate from next character. For example, the character “A”

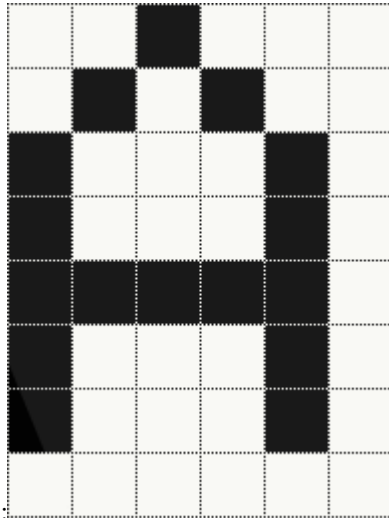

- The font size represents the dot size. For example, if the font size is 2, each dot in the character is a 2×2 rectangle

- **Screen rotation**

- ILI9341 provides 0, 90, 180, 270 degrees screen rotation.
- If the original width is 240 and original height is 320, when the screen rotates 90 degrees, the width becomes 320 and the height becomes 240.

SPI –Show PM2.5 Concentration On ILI9341 TFT LCD

If you are not familiar with SPI, please read [Introduction to SPI](#) first.

Preparation


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- ILI9341 TFT LCD with SPI interface x 1
- Plantower PMS3003 or PMS5003 x 1

Example


This example extends previous PM2.5 example to show the PM2.5 concentration on the LCD.

RTL8722DM / RTL8722CSM and QVGA TFT LCD Wiring Diagram:


(Note: PMS3003/PMS5003 sensor requires 5V voltage)

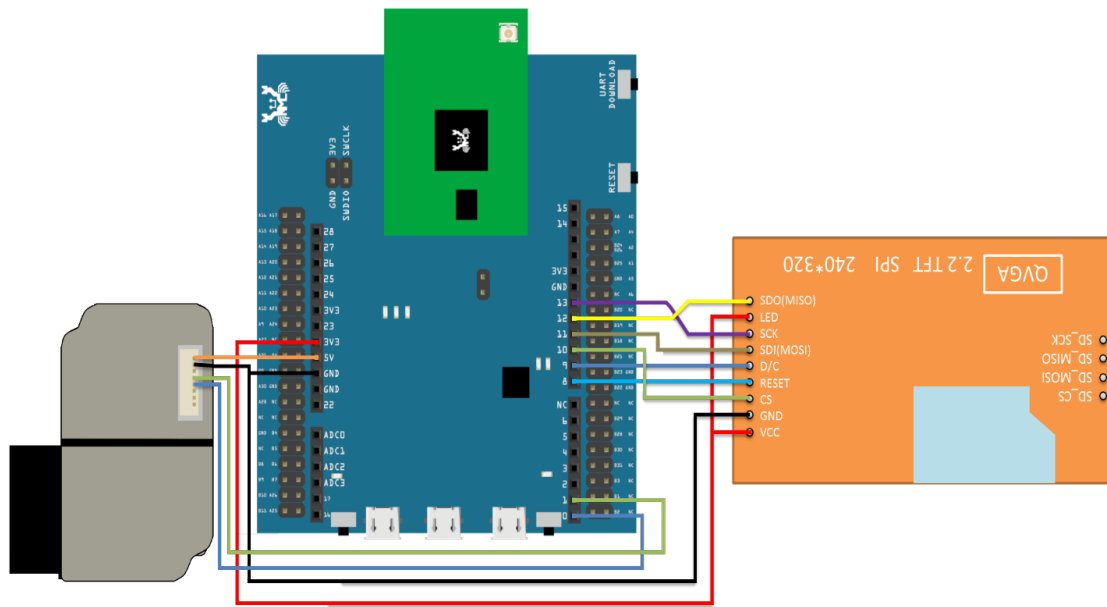


RTL8722DM MINI and QVGA TFT LCD Wiring Diagram:

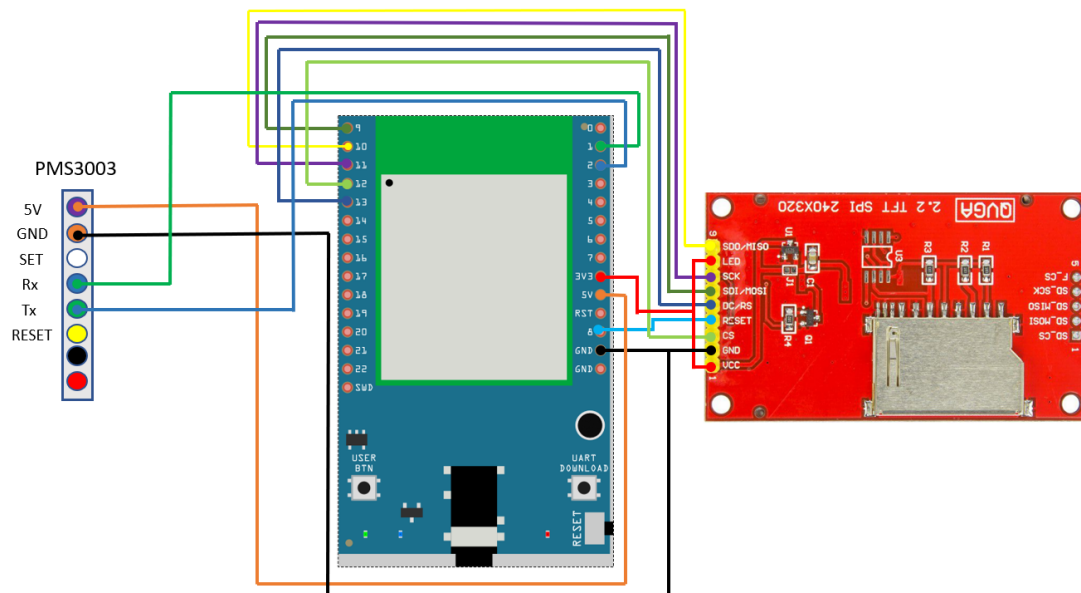


RTL8722DM / RTL8722CSM and Adafruit 2.8" TFT LCD Wiring Diagram:

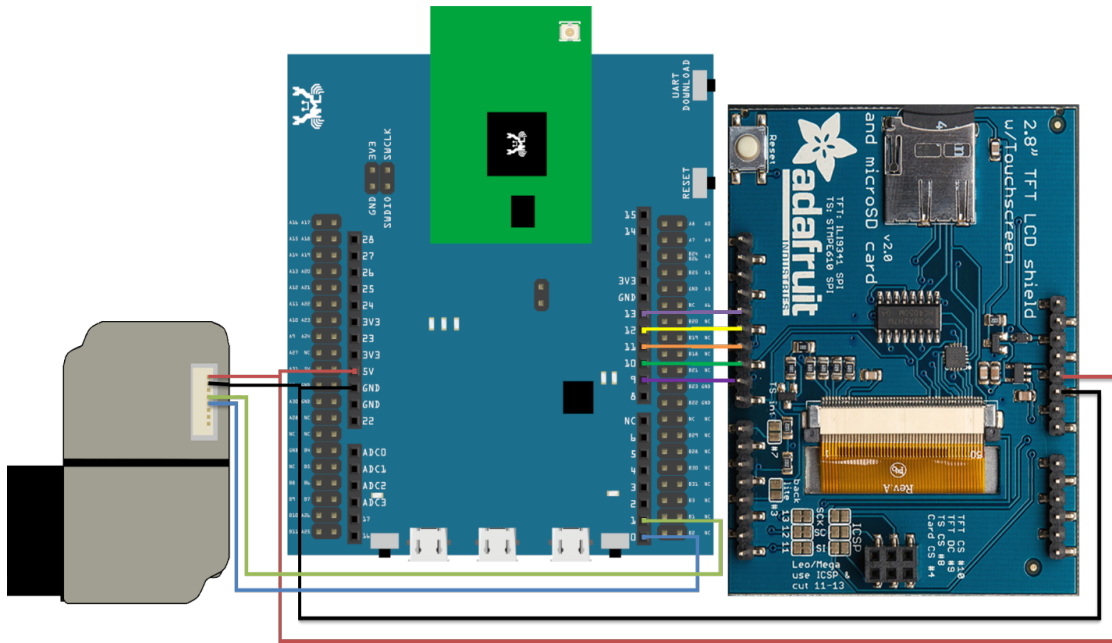

RTL8722DM MINI and Adafruit 2.8" TFT LCD Wiring Diagram:

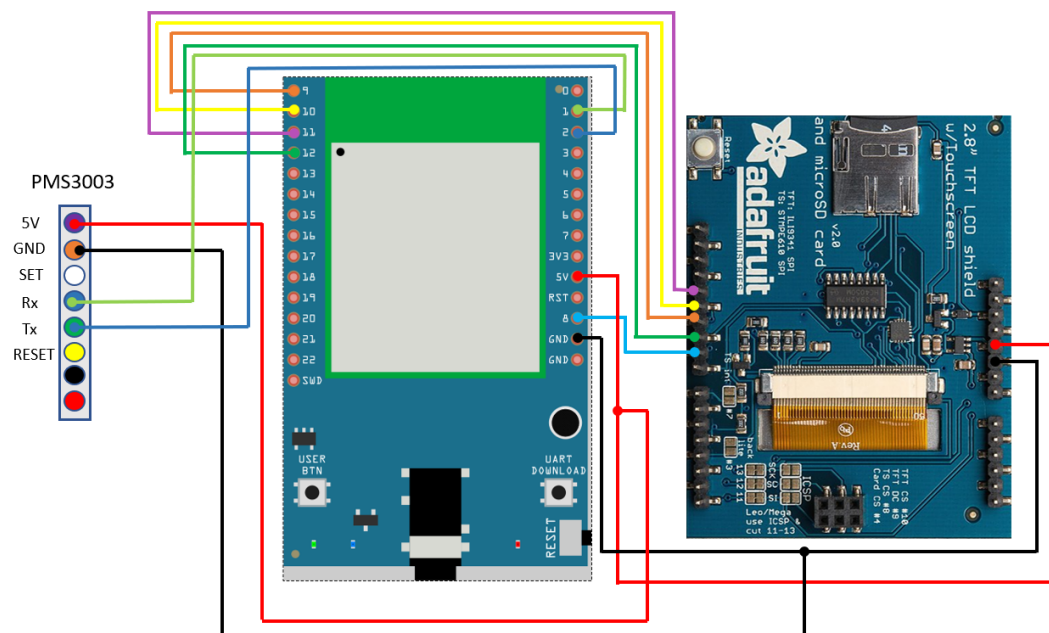


Open the example, "Files" -> "Examples" -> "AmebaSPI" -> "PM25_on_ILI9341_TFT_LCD"

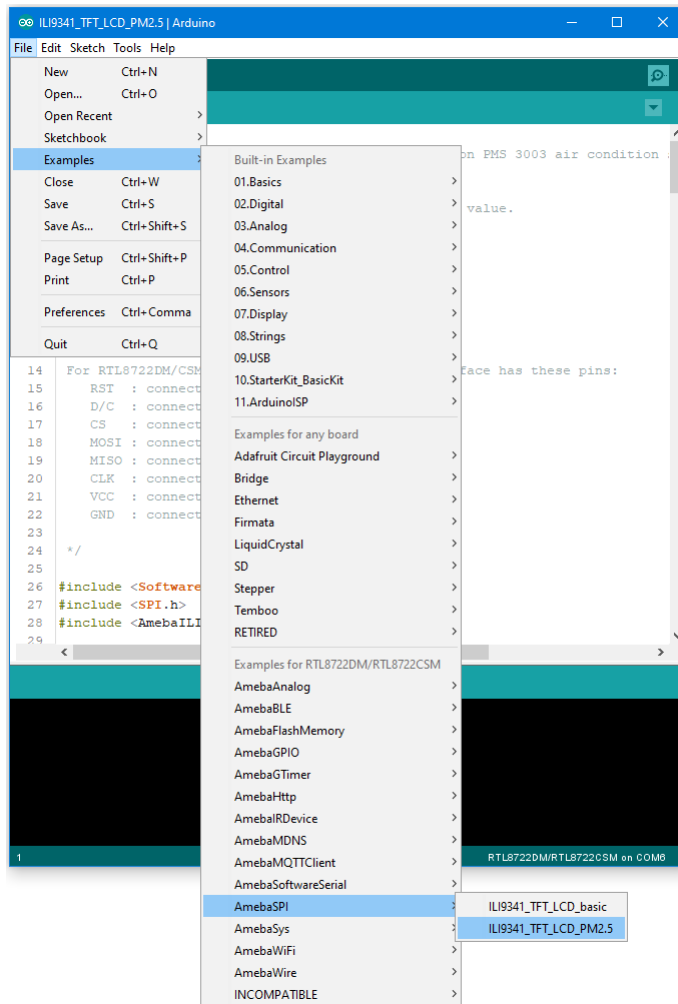

Compile and upload to Ameba, then press the reset button.

Then you can see the concentration value of PM1.0, PM2.5 and PM10 on the LCD.

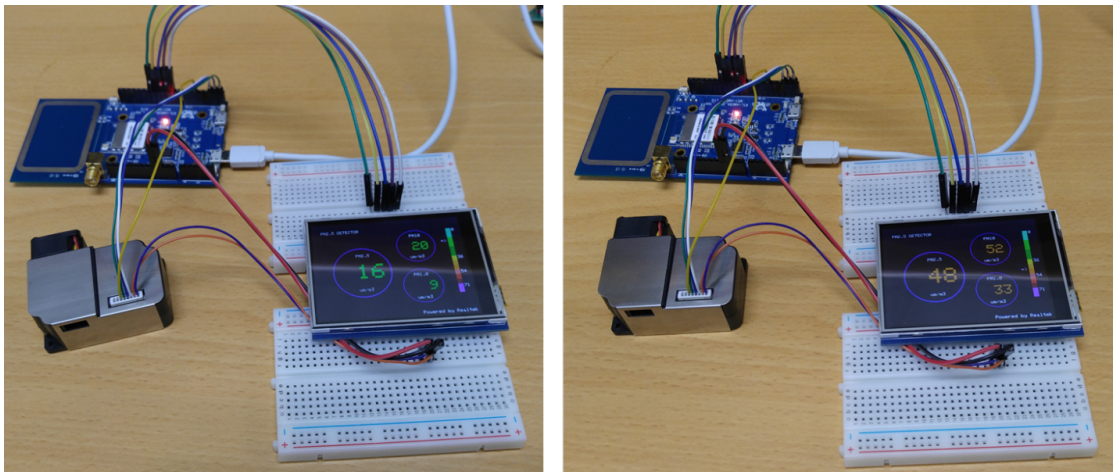

Code Reference

In this example, first rotate the screen by 90 degrees, and draw the static components such as the circles, the measuring scale, and the title text. After the concentration value is detected, it is printed inside the circle.

Timer - Using The Periodic GTimer

Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] / [RTL8720DN(BW16)] x 1

Example

Ameba provides 4 hardware GTimer for users to use. The timers' resolutions are at microseconds scale.

The timer can be set to be periodic or for single use. The periodic timers reset periodically, and the single-use timers do not.

Open the example, "File" -> "Examples" -> "AmebaGTimer" -> "TimerPeriodical".
Compile and upload to Ameba, and press reset.

In the Serial Monitor, you can see the counter value is increased periodically.

Code Reference

The first argument of begin() is the timer id (0~3).

The second argument is the value of the timer (in microseconds). In the example, we fill in 1000000us = 1s.

The third argument specifies the function to call when the time is up. In the example, we call the "myhandler" function to increase the counter value by 1 and print the counter value to serial monitor.

```
GTimer.begin(0, 1 * 1000 * 1000, myhandler);
```

The GTimer is periodic by default, therefore "myhandler" function is called every second. When we want to stop the GTimer, use stop():

```
GTimer.stop(0);
```

Timer - Using The Single-Use GTimer

Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] / [RTL8720DN(BW16)] x 1

Example

In this example, we will use 4 One-Time GTimer, and pass user data to each timer.

Open the example “File” -> “Examples” -> “AmebaGTimer” -> “TimerOneshot” . Compile and upload to Ameba, and press reset. Then you can see the 4 timer log printed to the serial monitor in series.

Code Reference

The first argument of begin() is the Timer ID (0~3). The second argument is the value of the timer (in microseconds). In the example, we fill in 1000000us = 1s. The third argument specifies the function to call when the time is up. The fourth argument is to set whether this timer is a periodic timer, we use “false” here to begin a single-use timer. The fifth argument is the user data, we give 0 here to represent that this is timer 0.

```
GTimer.begin(0, 1 * 1000 * 1000, myhandler, false, 0);
```

Next, we set up the second timer, which has timer value 2 seconds, and user data 1. And other timers are set similarly.

```
GTimer.begin(1, 2 * 1000 * 1000, myhandler, false, 1);
```

In myhandler function, we print the user data to serial monitor. Since the 4 timers are separately set to count for 1, 2, 3, 4 seconds, from 1 second to 4 second, the user data of each timer are printed on the serial monitor in order. After 4 second, no log will be printed.

Power Save Deep Sleep Mode

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1


Example

Introduction

Ameba-D supports two low power modes which are deepsleep mode and sleep mode. Deepsleep mode turns off more power domain than sleep mode. The power consumptions of DeepSleep Mode is around 7uA to 8uA compare to normal state around 22mA. This example describes how to enter deepsleep mode and configure wakeup source.

Procedure

Open “File” -> “Examples” -> “AmebaPowerSave” -> “DeepSleepMode”

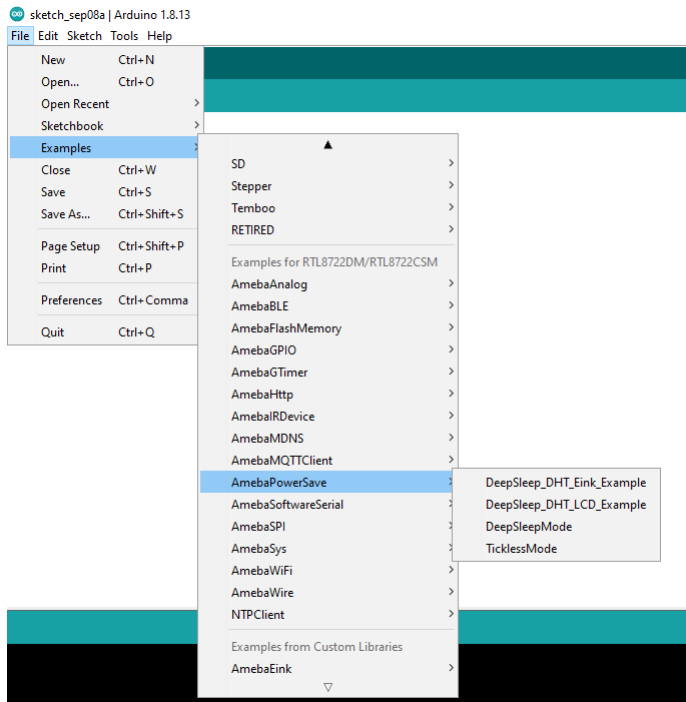

Set condition values as picture below.

DS_WAKEUP_SOURCE is used to set the wake-up source, user can chose 3 wake up sources now,


```
AON timer (SET_DS_AON_TIMER_WAKEUP);
AON pins (SET_DS_AON_WAKEPIN_WAKEUP);
RTC timer (SET_DS_RTC_WAKEUP);
```

AON timer can be set from 0 to 32760000 range (unit ms) by AON_TIMER_SLEEP_DURATION

There are 4 pins can be set as AON pins and active high for wake-up, D16, D17, D26 and D27. The AON pin can be set by SET_DS_AON_WAKEPIN_WAKEUPPIN

RTC timer wake-up system by set alarm. The alarm has 4 values, day, hour, min and sec. All 4 values can be set by

DS_RTC_ALARM_DAY, DS_RTC_ALARM_HOUR, DS_RTC_ALARM_MIN, and DS_RTC_ALARM_SEC

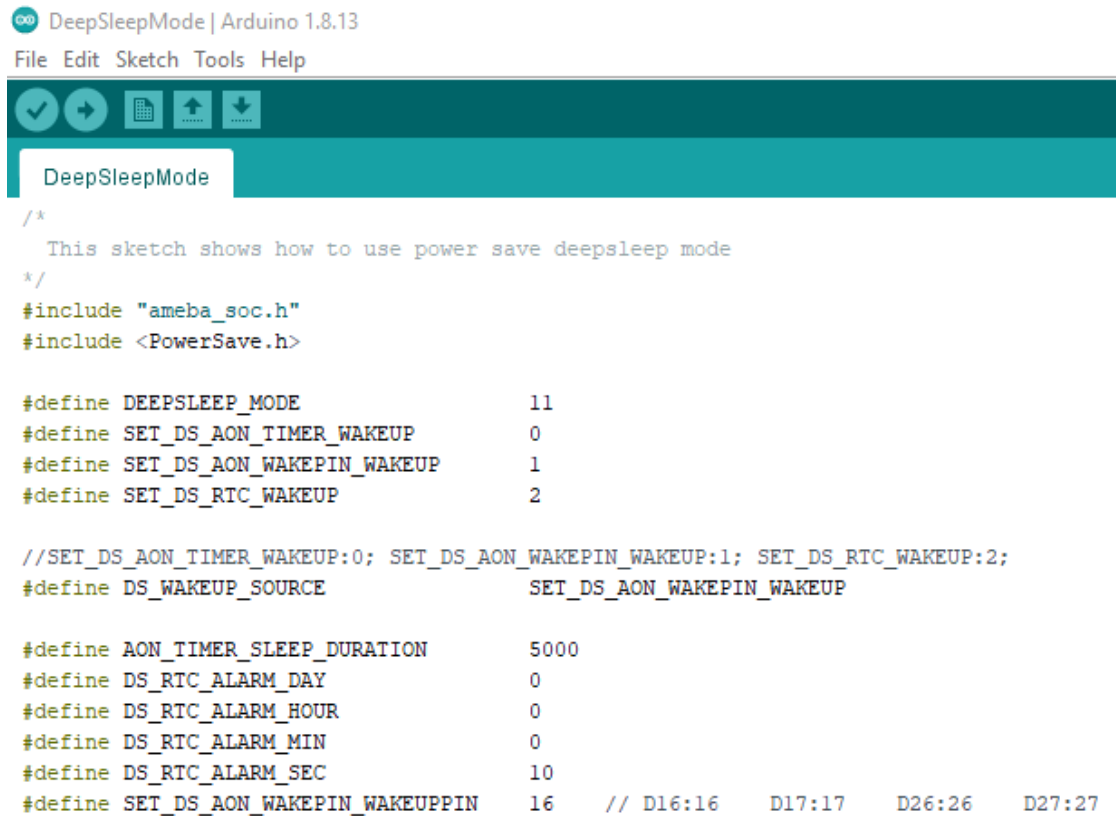

```

/*
   DeepSleepMode | Arduino 1.8.13
   File Edit Sketch Tools Help


   This sketch shows how to use power save deepsleep mode
*/
#include "ameba_soc.h"
#include <PowerSave.h>

#define DEEPSLEEP_MODE          11
#define SET_DS_AON_TIMER_WAKEUP 0
#define SET_DS_AON_WAKEPIN_WAKEUP 1
#define SET_DS_RTC_WAKEUP      2

//SET_DS_AON_TIMER_WAKEUP:0; SET_DS_AON_WAKEPIN_WAKEUP:1; SET_DS_RTC_WAKEUP:2;
#define DS_WAKEUP_SOURCE        SET_DS_AON_WAKEPIN_WAKEUP


#define AON_TIMER_SLEEP_DURATION 5000
#define DS_RTC_ALARM_DAY        0
#define DS_RTC_ALARM_HOUR       0
#define DS_RTC_ALARM_MIN        0
#define DS_RTC_ALARM_SEC        10
#define SET_DS_AON_WAKEPIN_WAKEUPPIN 16 // D16:16 D17:17 D26:26 D27:27
  
```

When finished the condition values setting, system will run and switch between normal and deepsleep mode controlled by wakeup source. Serial Monitor displays the switching log.

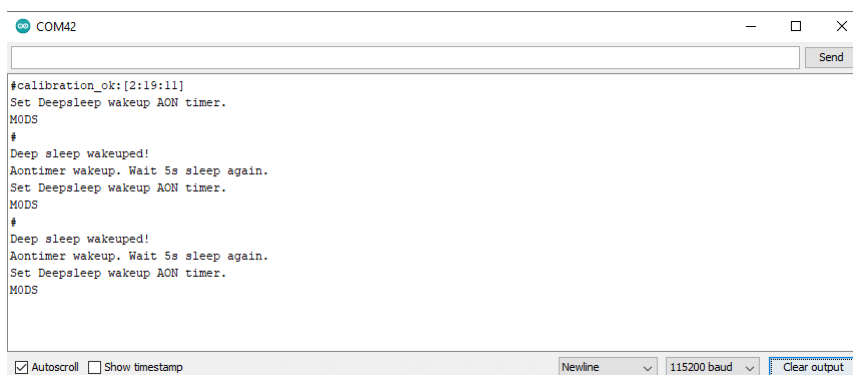

```

COM42
#calibration_ok:[2:19:11]
Set Deepsleep wakeup AON timer.
MODS
#
Deep sleep wakeupe!
Aontimer wakeup. Wait 5s sleep again.
Set Deepsleep wakeup AON timer.
MODS
#
Deep sleep wakeupe!
Aontimer wakeup. Wait 5s sleep again.
Set Deepsleep wakeup AON timer.
MODS
  
```

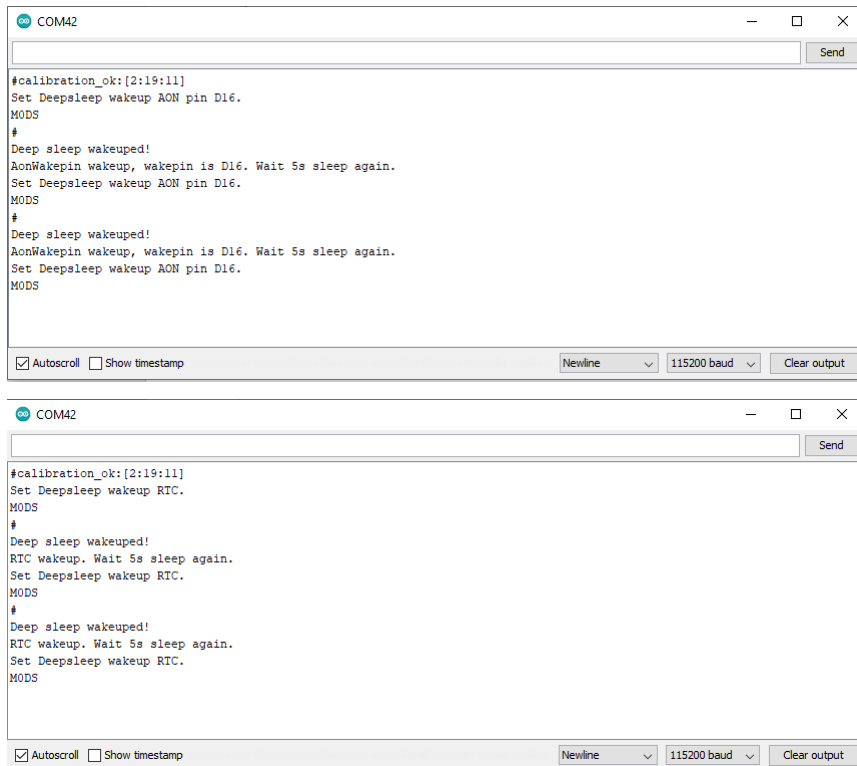

Code Reference

Please refer to the [API Documents](#) PowerSave section for detail description of all API.

Power Save Deep Sleep DHT Eink

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- DHT11 or DHT22 or DHT21 x 1
- LCD I2C screen x 1

Example

Introduction

Ameba-D supports low power modes which are deepsleep mode. Deepsleep mode turns off most of the system power domain. The power consumptions of core module in DeepSleep Mode is around 7uA to 8uA compare to normal state around 22mA. This example gives demo of system switch between “working” and “sleep” (power save).Using DHT


sensor to read data and display on Eink screen when system is awake. After 5 seconds system auto enter DeepSleep Mode for power save. System will wake up by wakeup source.(Aon timer, Aon Pins or RTC timer).

Procedure

Download the Eink zip library, AmebaEink.zip, at

https://github.com/ambiot/ambd_arduino/tree/master/Arduino_zip_libraries. Then install the AmebaEink.zip.

Open “File” -> “Examples” -> “AmebaPowerSave” -> “DeepSleep_DHT_Eink_Example”

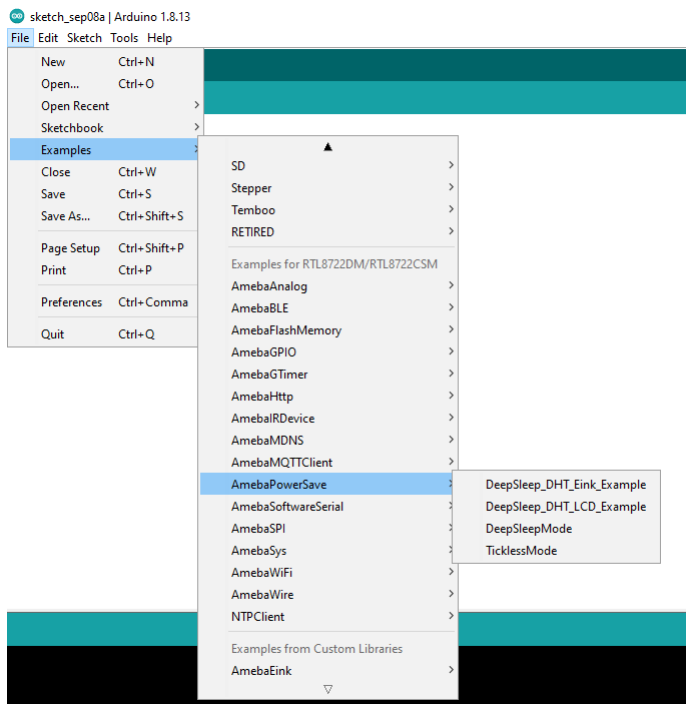

Set condition values as picture below.

DS_WAKEUP_SOURCE is used to set the wake-up source, user can chose 3 wake up sources now,

```
AON timer (SET_DS_AON_TIMER_WAKEUP);
AON pins (SET_DS_AON_WAKEPIN_WAKEUP);
RTC timer (SET_DS_RTC_WAKEUP);
```


AON timer can be set from 0 to 32760000 range (unit ms) by AON_TIMER_SLEEP_DURATION

There are 4 pins can be set as AON pins and active high for wake-up, D16, D17, D26 and D27. The AON pin can be set by SET_DS_AON_WAKEPIN_WAKEUPPIN

RTC timer wake-up system by set alarm. The alarm has 4 values, day, hour, min and sec. All 4 values can be set by DS_RTC_ALARM_DAY, DS_RTC_ALARM_HOUR, DS_RTC_ALARM_MIN, and DS_RTC_ALARM_SEC

DHTPIN is used to set DHT sensor data pin. User can choose any GPIO pins.

DHTTYPE is used to set DHT sensor type. (DHT11, DHT22 and DHT33)

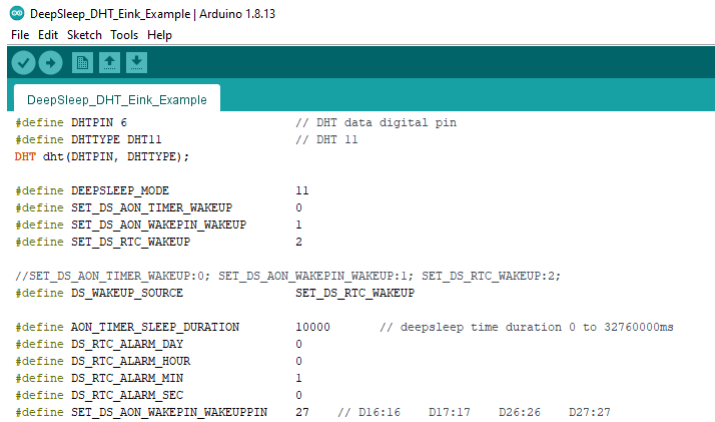

```

DeepSleep_DHT_Eink_Example | Arduino 1.8.13
File Edit Sketch Tools Help

DeepSleep_DHT_Eink_Example

#define DHTPIN 6           // DHT data digital pin
#define DHTTYPE DHT11      // DHT 11
DHT dht(DHTPIN, DHTTYPE);

#define DEEPSLEEP_MODE     11
#define SET_DS_AON_TIMER_WAKEUP 0
#define SET_DS_AON_WAKEPIN_WAKEUP 1
#define SET_DS_RTC_WAKEUP 2

//SET_DS_AON_TIMER_WAKEUP:0; SET_DS_AON_WAKEPIN_WAKEUP:1; SET_DS_RTC_WAKEUP:2;
#define DS_WAKEUP_SOURCE   SET_DS_RTC_WAKEUP

#define AON_TIMER_SLEEP_DURATION 10000 // deepsleep time duration 0 to 32760000ms
#define DS_RTC_ALARM_DAY 0
#define DS_RTC_ALARM_HOUR 0
#define DS_RTC_ALARM_MIN 1
#define DS_RTC_ALARM_SEC 0
#define SET_DS_AON_WAKEPIN_WAKEUPPIN 27 // D16:16 D17:17 D26:26 D27:27

```

When finished the condition values setting, system will run and switch between normal working mode and deepsleep mode controlled by wakeup source. Eink screen will display the temperature and humidity data measured from DHT sensor when system is awake.

Code Reference

Please refer to the [API Documents](#) PowerSave section for detail description of all API.

Power Save Deep Sleep DHT LCD

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- DHT11 or DHT22 or DHT21 x 1
- LCD I2C screen x 1


Example

Introduction

Ameba-D supports low power modes which are deepsleep mode. Deepsleep mode turns off most of the system power domain. The power consumptions of core module in DeepSleep Mode is around 7uA to 8uA compare to normal state around 22mA. This example gives demo of system switch between “working” and “sleep” (power save). Using DHT sensor to read data and display on LCD screen when system is awake. After 5 seconds system auto enter DeepSleep Mode for power save. System will wake up by wakeup source.(Aon timer, Aon Pins or RTC timer).

Procedure

Open “File” -> “Examples” -> “AmebaPowerSave” -> “DeepSleep_DHT_LCD_Example”

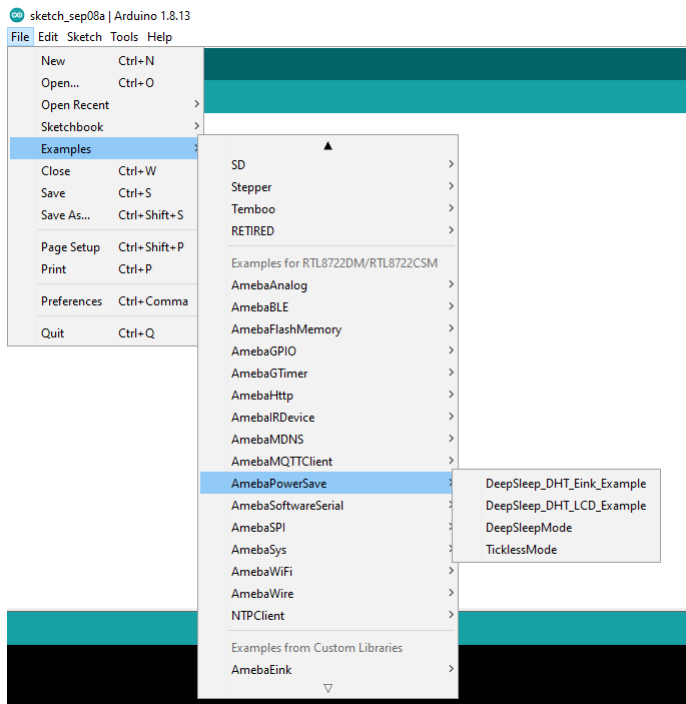

Set condition values as picture below.

DS_WAKEUP_SOURCE is used to set the wake-up source, user can chose 3 wake up sources now,

```
AON timer (SET_DS_AON_TIMER_WAKEUP);
AON pins (SET_DS_AON_WAKEPIN_WAKEUP);
RTC timer (SET_DS_RTC_WAKEUP);
```


AON timer can be set from 0 to 32760000 range (unit ms) by AON_TIMER_SLEEP_DURATION

There are 4 pins can be set as AON pins and active high for wake-up, D16, D17, D26 and D27. The AON pin can be set by SET_DS_AON_WAKEPIN_WAKEUPPIN

RTC timer wake-up system by set alarm. The alarm has 4 values, day, hour, min and sec. All 4 values can be set by DS_RTC_ALARM_DAY, DS_RTC_ALARM_HOUR, DS_RTC_ALARM_MIN, and DS_RTC_ALARM_SEC

DHTPIN is used to set DHT sensor data pin. User can choose any GPIO pins.

DHTTYPE is used to set DHT sensor type. (DHT11, DHT22 and DHT33)

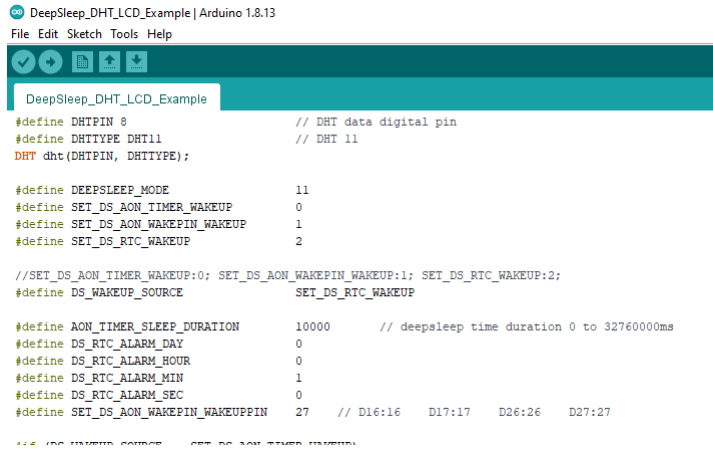

```

DeepSleep_DHT_LCD_Example | Arduino 1.8.13
File Edit Sketch Tools Help

DeepSleep_DHT_LCD_Example

#define DHTPIN 8           // DHT data digital pin
#define DHTTYPE DHT11      // DHT 11
DHT dht(DHTPIN, DHTTYPE);

#define DEEPSLEEP_MODE     11
#define SET_DS_AON_TIMER_WAKEUP 0
#define SET_DS_AON_WAKEPIN_WAKEUP 1
#define SET_DS_RTC_WAKEUP 2

//SET_DS_AON_TIMER_WAKEUP:0; SET_DS_AON_WAKEPIN_WAKEUP:1; SET_DS_RTC_WAKEUP:2;
#define DS_WAKEUP_SOURCE   SET_DS_RTC_WAKEUP

#define AON_TIMER_SLEEP_DURATION 10000 // deepsleep time duration 0 to 32760000ms
#define DS_RTC_ALARM_DAY 0
#define DS_RTC_ALARM_HOUR 0
#define DS_RTC_ALARM_MIN 1
#define DS_RTC_ALARM_SEC 0
#define SET_DS_AON_WAKEPIN_WAKEUPPIN 27 // D16:16 D17:17 D26:26 D27:27

```

When finished the condition values setting, system will run and switch between normal working mode and deepsleep mode controlled by wakeup source. LCD screen will display the temperature and humidity data measured from DHT sensor when system is awake.

Code Reference

Please refer to the [API Documents](#) PowerSave section for detail description of all API.

Power Save Tickless Mode

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1


Example

Introduction

Ameba-D supports two low power modes which are deepsleep mode and sleep mode. The power consumptions of Tickless Sleep Mode is around 28uA to 30uA compare to normal state around 15mA. This example describes how to use freertos tickless with uart interruptable interface.

Procedure

Open “File” -> “Examples” -> “AmebaPowerSave” -> “TicklessMode”

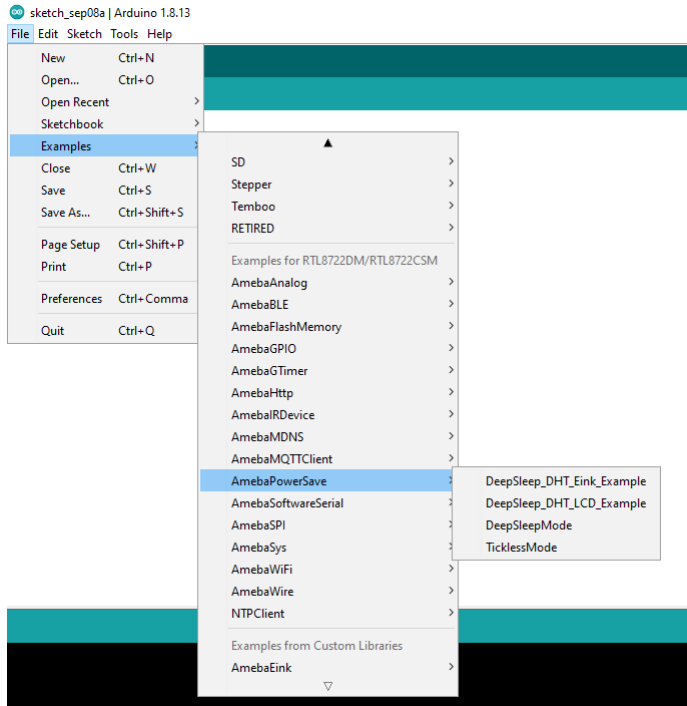

Set condition values as picture below.

DS_WAKEUP_SOURCE is used to set the wake-up source, user can chose 3 wake up sources now,

```
AON timer (SET_DS_AON_TIMER_WAKEUP);
AON pins (SET_DS_AON_WAKEPIN_WAKEUP);
RTC timer (SET_DS_RTC_WAKEUP);
```

AON timer can be set from 0 to 32760000 range (unit ms) by AON_TIMER_SLEEP_DURATION

There are 4 pins can be set as AON pins and active high for wake-up, D16, D17, D26 and D27. The AON pin can be set by SET_DS_AON_WAKEPIN_WAKEUPPIN

RTC timer wake-up system by set alarm. The alarm has 4 values, day, hour, min and sec. All 4 values can be set by DS_RTC_ALARM_DAY, DS_RTC_ALARM_HOUR, DS_RTC_ALARM_MIN, and DS_RTC_ALARM_SEC

There are 4 pins can be set as AON pins and active high for wake-up, D16, D17, D26 and D27. The AON pin can be set by SET_TL_AON_WAKEPIN_WAKEUP

TL_SYSACTIVE_TIME is for setting time duration of the system to keep alive. (unit ms)

TicklessMode | Arduino 1.8.13

File Edit Sketch Tools Help

```

TicklessMode

/*
 * This sketch shows how to use power save tickless mode
 */
#include "ameba_soc.h"
#include <PowerSave.h>

#define TICKLESS_MODE          22
#define SET_TL_UART_WAKEUP     0
#define SET_TL_RTC_WAKEUP      1
#define SET_TL_AON_WAKEPIN_WAKEUP 16 // D16:16    D17:17    D26:26    D27:27

//SET_TL_UART_WAKEUP:0; SET_TL_RTC_WAKEUP:1; SET_TL_AON_WAKEPIN_WAKEUP:16 or 17 or 26 or 27;
#define TL_WAKEUP_SOURCE        SET_TL_UART_WAKEUP

#define TL_SYSACTIVE_TIME       5000
#define TL_RTC_ALARM_DAY        0
#define TL_RTC_ALARM_HOUR       0
#define TL_RTC_ALARM_MIN        0
#define TL_RTC_ALARM_SEC        10

```

```

COM42
#calibration_ok:[2:19:11]
Set Tickless wakeup LOGUART.

System suspend. Tickless mode enabled.

Tickless mode resume. Wait 5s enter tickless again.
Set Tickless wakeup LOGUART.

System suspend. Tickless mode enabled.

Tickless mode resume. Wait 5s enter tickless again.
Set Tickless wakeup LOGUART.

System suspend. Tickless mode enabled.

Autoscroll ☐ Show timestamp Newline 115200 baud Clear output

```

```

COM42
#calibration_ok:[2:19:11]
Set Tickless wakeup RTC.

System suspend. Tickless mode enabled.

Tickless mode resume. Wait 5s enter tickless again.
Set Tickless wakeup RTC.


System suspend. Tickless mode enabled.

Tickless mode resume. Wait 5s enter tickless again.
Set Tickless wakeup RTC.

System suspend. Tickless mode enabled.

Autoscroll ☐ Show timestamp Newline 115200 baud Clear output

```

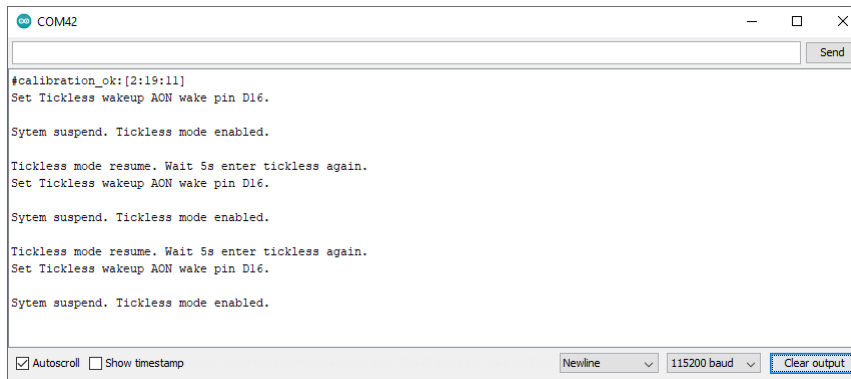

```
#calibration_ok:[2:19:11]
Set Tickless wakeup AON wake pin D16.

System suspend. Tickless mode enabled.

Tickless mode resume. Wait 5s enter tickless again.
Set Tickless wakeup AON wake pin D16.

System suspend. Tickless mode enabled.

Tickless mode resume. Wait 5s enter tickless again.
Set Tickless wakeup AON wake pin D16.

System suspend. Tickless mode enabled.
```

Code Reference

Please refer to the [API Documents](#) PowerSave section for detail description of all API.


Use NTPClient Library To Obtain Local Time

Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1

Example

In this example, we use an NTP client to sync with NTP servers using UDP and keep track of time locally. Open the example. “File” -> “Examples” -> “NTPClient” -> “Advanced”

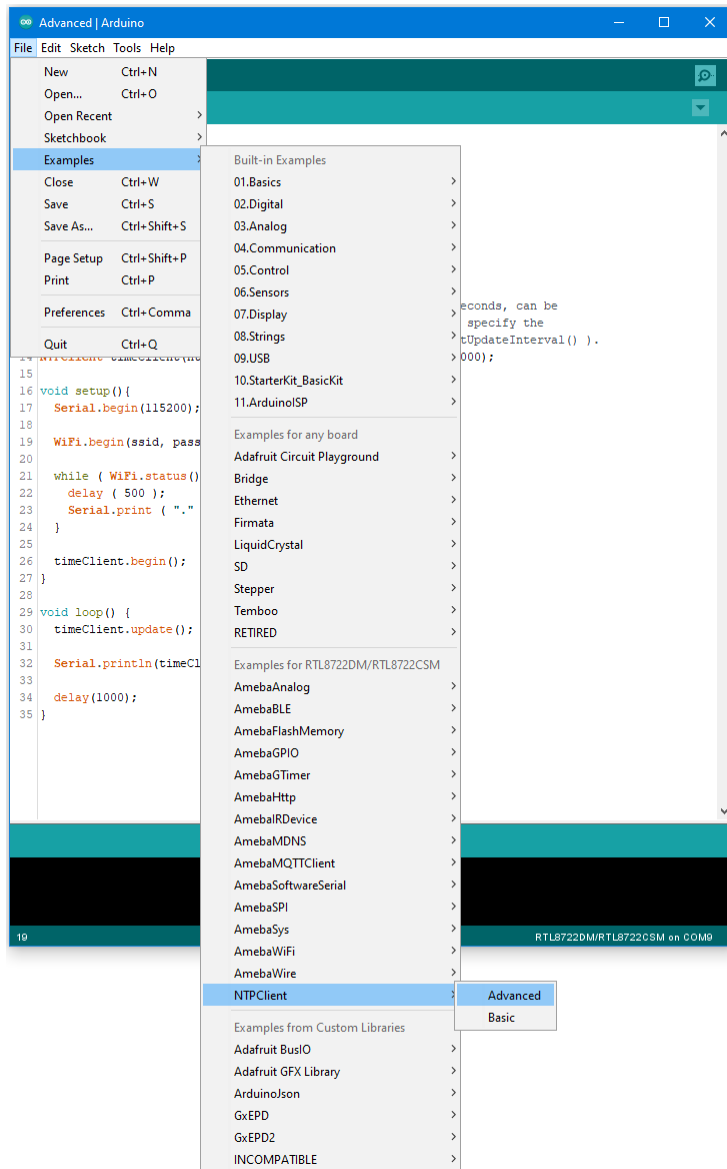


Modify the highlighted code section (ssid, password) to connect to your WiFi network.



```
1 #include <NTPClient.h>
2 #include <WiFi.h>
3 #include <WiFiUDP.h>
4
5 char ssid[] = "<SSID>";
6 char pass[] = "<PASS>";
7
8
9 WiFiUDP ntpUDP;
10
11 // You can specify the time server pool and the offset (in seconds, can be
12 // changed later with setTimeOffset() ). Additionally you can specify the
13 // update interval (in milliseconds, can be changed using setUpdateInterval() ).
14 NTPClient timeClient(ntpUDP, "europe.pool.ntp.org", 3600, 60000);
15
16 void setup() {
17   Serial.begin(115200);
18
19   WiFi.begin(ssid, pass);
20
21   while ( WiFi.status() != WL_CONNECTED ) {
22     delay ( 500 );
23     Serial.print ( "." );
24   }
25
26   timeClient.begin();
27 }
28
29 void loop() {
30   timeClient.update();
31
32   Serial.println(timeClient.getFormattedTime());
33
34   delay(1000);
35 }
```

Compile the code and upload it to Ameba. After pressing the Reset button, Ameba connects to WiFi, gets the UTC time from the NTP server, and prints out the current time with time zone offset to the serial monitor.

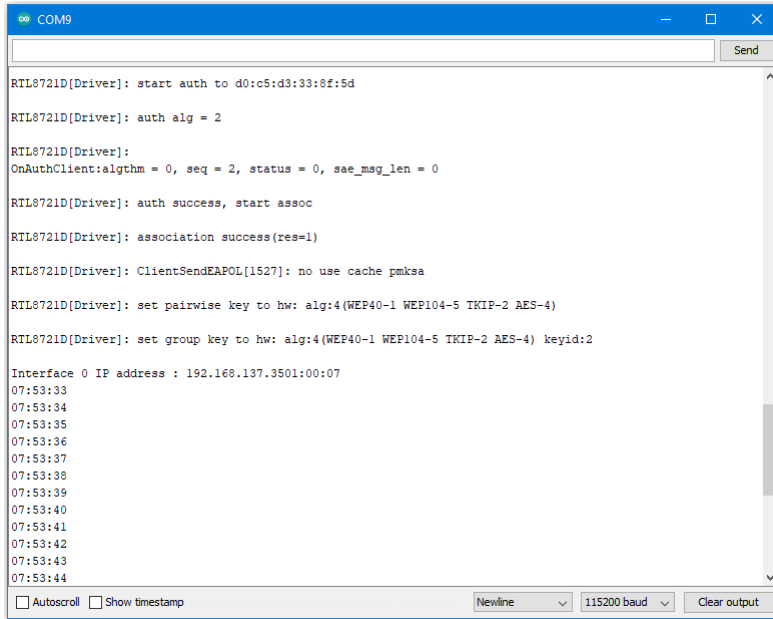

Code Reference

Configure NTP client:

The NTPClient needs to use a UDP client for communications. A WiFiUDP client is declared and passed to the NTPClient constructor, along with an NTP server address, time zone offset in seconds, and update interval in milliseconds. If detailed configuration is not needed, just passing in the UDP client is also sufficient, refer to the “NTPClient” -> “Basic” example.

```

WiFiUDP ntpUDP;
NTPClient timeClient(ntpUDP, "europe.pool.ntp.org", 3600, 60000);

```

Start NTP client:

After connecting to WiFi, the NTPClient is started using the begin() function, which causes the client to sync with the NTP server and get the UTC time.

```

WiFiUDP ntpUDP;
timeClient.begin();

```

Get local time:

`getFormattedTime()` is used to format the received UTC time into the local time zone. `update()` is called every loop so that the NTPClient will sync with the NTP server once every update interval.

```
timeClient.update();  
timeClient.getFormattedTime();
```

Transmit IR NEC Raw Data And Decode

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 2
- Grove –Infrared Emitter x1 (Figure 1)
- Grove –Infrared Receiver x1 (Figure 2)

Example

In this example, we use two Ameba RTL8722 modules that connecting with an infrared (IR) Emitter and an IR Receiver separately to transmit and receive IR NEC Raw data.



Figure 1: Grove –Infrared Receiver

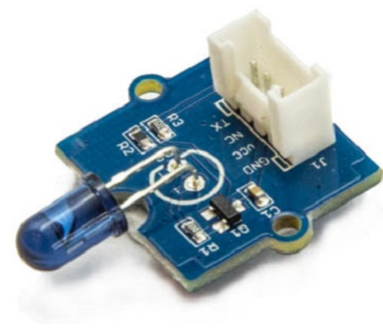


Figure 2: Grove –Infrared Emitter

On the transmission side, the transmitter will send IR NEC raw data. The raw data can be seen as consecutive durations of “marks” and “spaces” (Figure 3) in microseconds (us).

- Mark: a specific period of sending pulses
- Space: a specific period of sending nothing

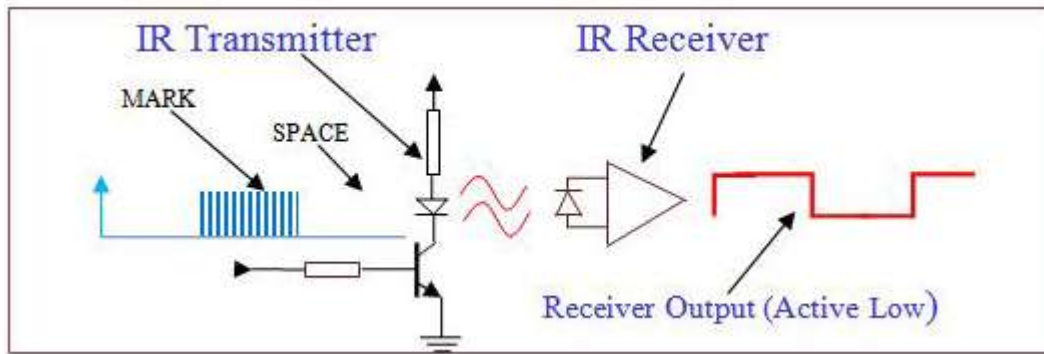


Figure 3: A typical IR transmission and reception setup implementation

For more details, please refer to SB-Projects' topic of [IR Remote Control Theory](#) to learn the theory of IR remote controls operation and a collection of IR protocol descriptions. In this example, we are going to use NEC (Now Renesas, also known as Japanese Format) as the transmission protocol.

NEC Features

- 8-bit address and 8-bit command length.
- Extended mode available, doubling the address size.
- Address and command are transmitted twice for reliability.
- Pulse distance modulation.
- The carrier frequency of 38kHz.
- Bit time of 1.125ms or 2.25ms.

Modulation

NEC protocol uses Pulse Distance Encoding of the bits for data communication (Figure 4). A logical “1” is represented by total duration of 2250us, with 560us of “marks” and (2250-560) us of “spaces” . While logical ” 0” is represented by total duration of 1120us, with 560us “marks” and (1120-560) us of “spaces” .

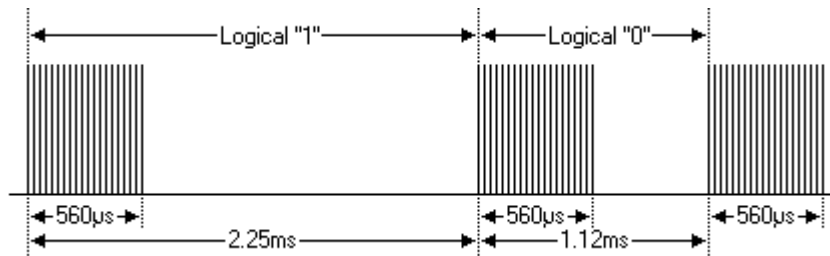


Figure 4: Modulation of NEC

Since a total number of 32-bit data together with the header and the end-bit will be transferred (Figure 5). If we separate the data in the time-frame (in us), there will be $(2 + 32) \times 2 + 1 = 69$ “marks” / “spaces” to be transmitted (Figure 6), which forms the raw NEC data we would like to transmit in our Arduino “.ino” file. This part of the code can be modified by users. Details of how to obtain raw data code for your remote devices, you may refer to [Ken Shirriff's blog](#), where it provides multiple libraries provided online.

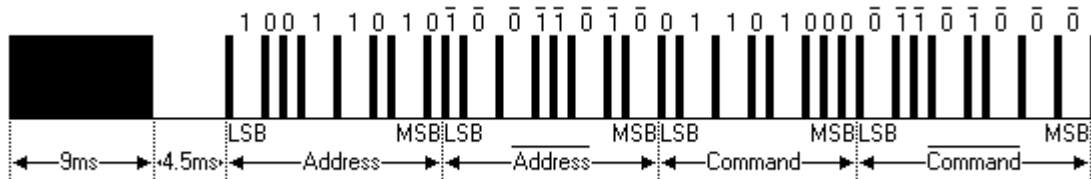


Figure 5: Sample of a Full NEC Data (in logic1 or 0)

```

9000, 4500, // starting bit
560, 560, 560, 560, 560, 1690, 560, 560, 560, 560, 560, 560, 560, 560, 560, // address
560, 1690, 560, 1690, 560, 560, 560, 1690, 560, 1690, 560, 1690, 560, 1690, 560, 1690, // ~address
560, 560, 560, 560, 560, 560, 560, 1690, 560, 560, 560, 560, 560, 560, 560, 560, // data
560, 1690, 560, 1690, 560, 1690, 560, 560, 560, 1690, 560, 1690, 560, 1690, 560, 1690, //~data
560 // stoping bit

```

Figure 6: Sample of a Full NEC RAW Data (in us)

Figure 7 and 8 shows the pin configuration of IR Emitter and Receiver with Ameba RTL8722 board.

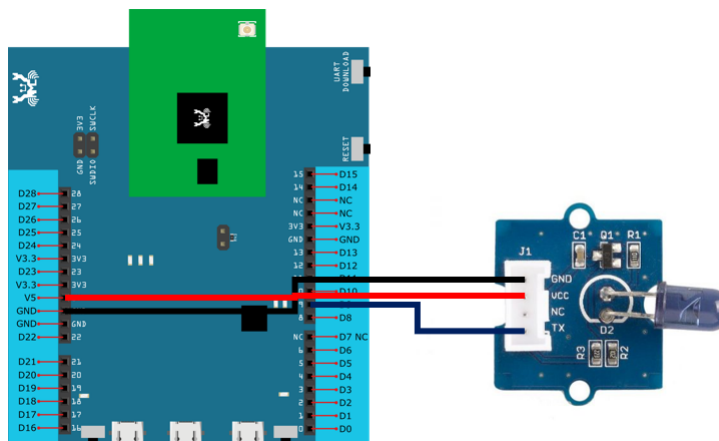


Figure 7: Pin configuration of IR Emitter and Ameba RTL8722

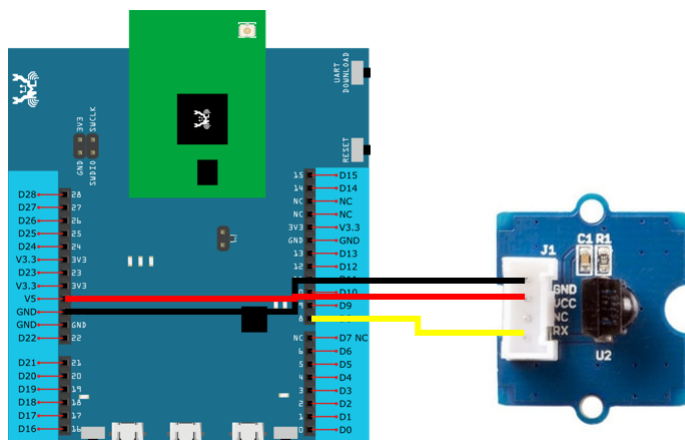


Figure 8: Pin configuration of the IR Receiver and Ameba RTL8722

Figure 9 and Figure 10 shows the pin configuration of IR Emitter and Receiver with Ameba RTL8722DM MINI.

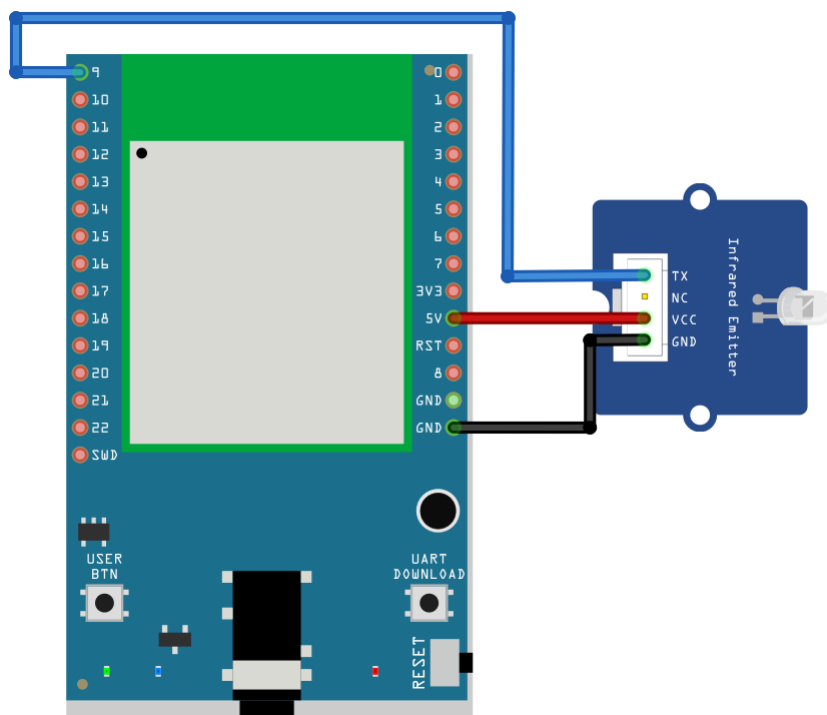


Figure 9: Pin configuration of IR Emitter and Ameba RTL8722DM MINI

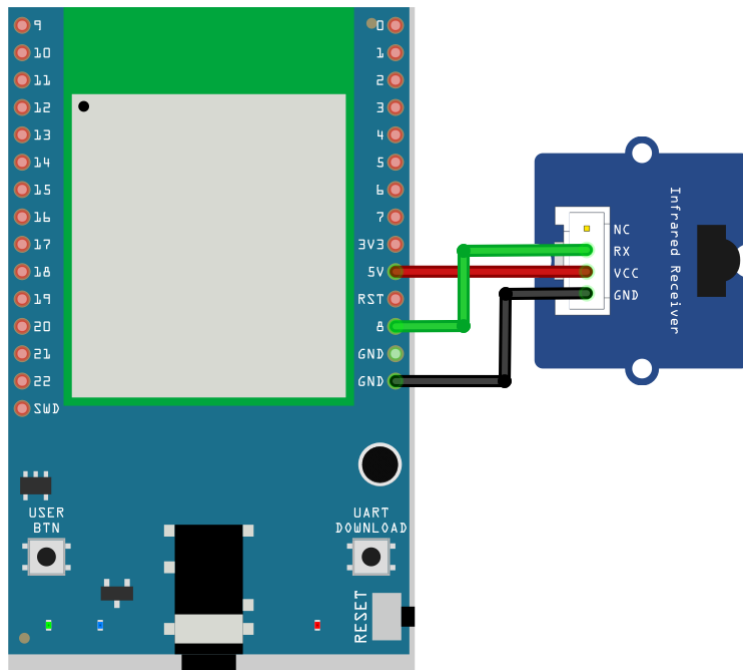


Figure 10: Pin configuration of the IR receiver and Ameba RTL8722DM MINI

After the connection is being set up correctly, we will move to the coding part for this example. First, make sure the correct Ameba development board is selected in Arduino IDE: “Tools” -> “Board” .

Open the “IRSendRAW” example in “File” -> “Examples” -> “AmebaIRDevice” -> “IRSendRAW” (Figure 11) and upload to 1st board connected with IR Emitter:

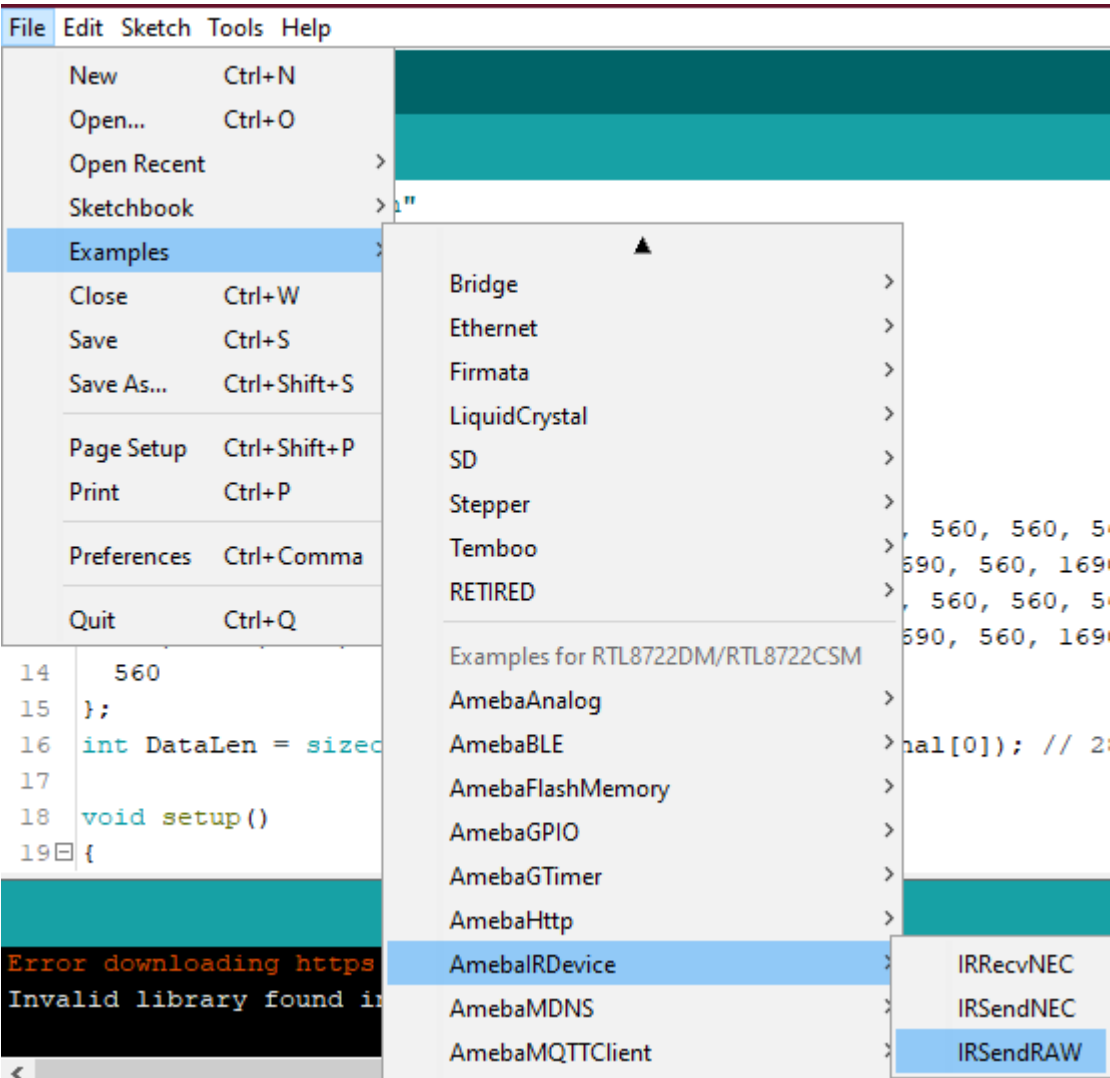


Figure 11: Example Location of IRSendRaw and IRRecvNEC

After successfully upload the sample code for IRSendRaw, you might need to upload the IRRecvNEC example for the 2nd board connected with IR Receiver from “File” -> “Examples” -> “AmebaIRDevice” -> “IRRecvNEC” .

After opening the serial monitor on the IR Receiver side and press the reset buttons on two boards, the data “48” will be received every 3 seconds (due to the delays () function, not compulsory to wait). After decoding the signal from the receiving Pin D8 and transmitting Pin D9 with Logic Analyser and Pulse View (Figure 10), the result is also shown as “48” after decoding the receiving data with IR NEC Protocol.

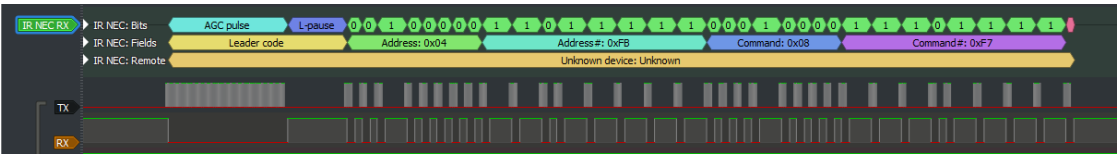


Figure 10: Pulse View results from sending and receiving pin

Code Reference

[1] Seeed Official website for Grove –Infrared Receiver

https://wiki.seeedstudio.com/Grove-Infrared_Receiver/

[2] Seed Official website for Grove –Infrared Emitter

https://wiki.seeedstudio.com/Grove-Infrared_Emitter/

[3] Ken SHirriff’ s blog on A Multi-Protocol Infrared Remote Library for the Arduino

<http://www.righ.to.com/2009/08/multi-protocol-infrared-remote-library.html>

[4] SB-Projects: IR Remote Control Project

<https://www.sbprojects.net/knowledge/ir/index.php>

E-Paper - Display Images

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Waveshare 2.9inch e-Paper HAT (D) x 1


Example

In this example, we use the Ameba RTL8722 module connects to a Waveshare 2.9inch e-Paper module to display a few QR codes. The display uses the flexible substrate as a base plate, with an interface and a reference system design.


The 2.9” active area contains 296×128 pixels and has 1-bit white/black full display capabilities. An integrated circuit contains gate buffer, source buffer, interface, timing control logic, oscillator, etc...are supplied with each panel.

You may refer to the official [2.9inch e-Paper HAT \(D\) datasheet](#) to know more information about this module.


Front view of the e-Paper Module:

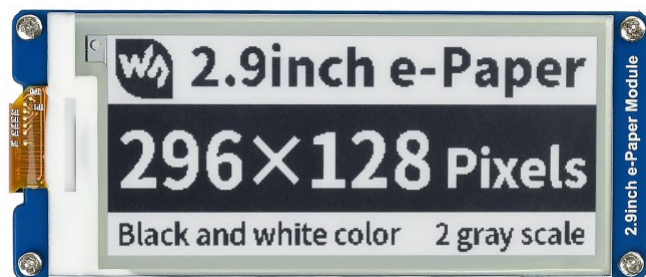

RTL8722DM / RTL8722CSM Wiring Diagram:

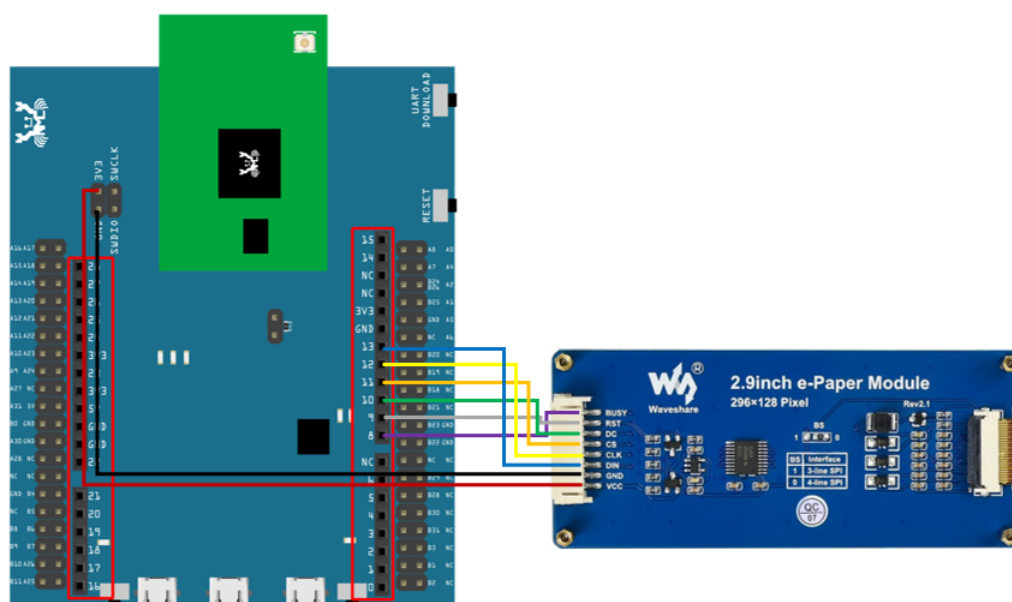


RTL8722DM MINI Wiring Diagram:

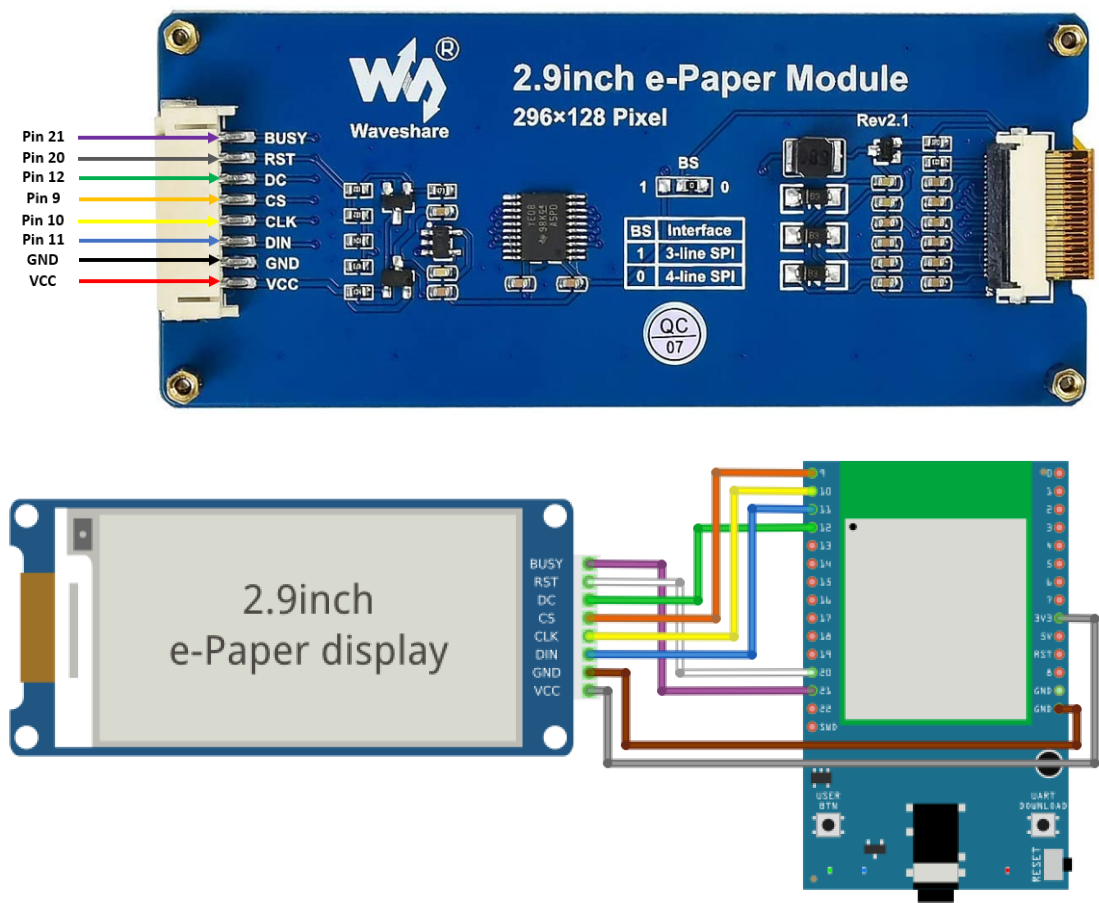

RTL8720DN(BW16) Wiring Diagram:



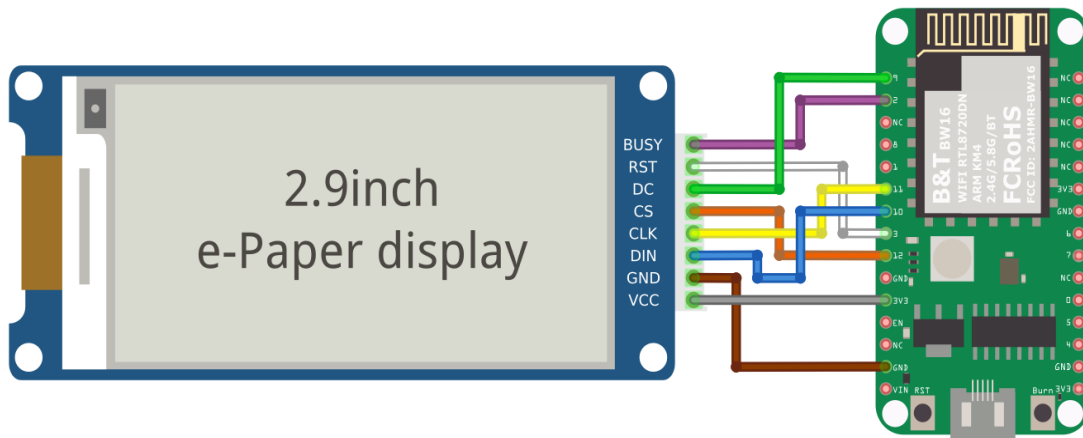

Firstly, you need to prepare a picture/photo in the format of 296×128 pixels. We can easily find a photo resizing tool online, for example, the [Online Image Resizer](#).


Following the instructions on the website, then download the generated image in JPG format.

Secondly, we use the [Image2LCD](#) tool to transfer the downloaded 296×128 image into hexadecimal codes. You can visit this [YouTube](#) link to get detailed instructions.

Download the E Ink zip library, AmebaEink.zip, at

https://github.com/ambiot/ambd_arduino/tree/master/Arduino_zip_libraries

Then install the AmebaEink.zip. Open the “DisplayQR” example in “File” → “Examples” → “AmebaEink” → “EinkDisplayImage” :

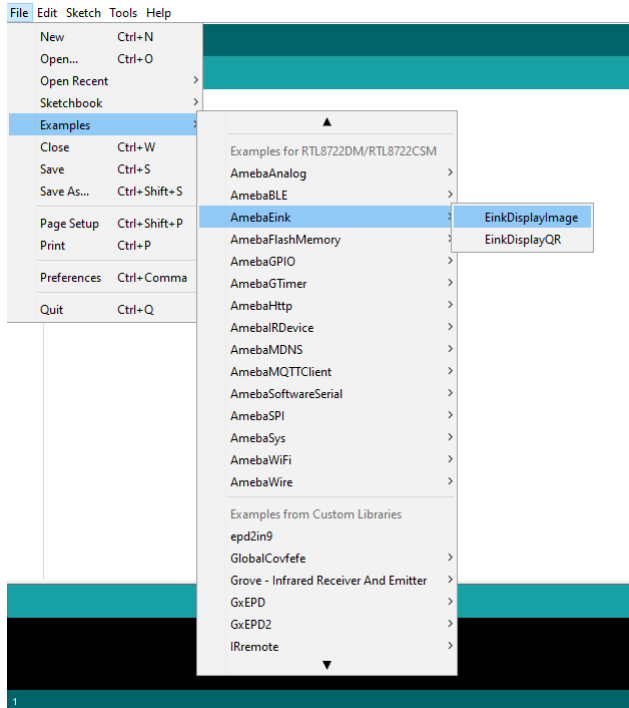

Press the reset button after uploading the sample code, you will need to wait for around 1-2 seconds for the e-Paper module to fresh its screen. Then the screen will start to display an image for 5 seconds first, then 3 different QR codes will be displayed every 5 seconds (showing in the screenshot below, you may scan the QR codes and find out more information if you wish to). Lastly, a gif which comes in form of 3 frames will be displayed for a few seconds.



Code Reference

[1] We use Good Display GDEH029A1 2.9 Inch / 296×128 Resolution / Partial Refresh Arduino Sample Code to get the e-Paper successfully Display: <http://www.good-display.com/product/201.html>

[2] Provide the link to how to generate a QR code on the E-paper module: <https://eugeniopace.org/qr-code/arduino/eink/2019/07/01/qr-code-on-arduino.html>

E-Paper - Display Text

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Waveshare 2.9inch e-Paper HAT (D) x 1


Example

In this example, we use the Ameba RTL8722 module connects to a Waveshare 2.9inch e-Paper module to display a few QR codes. The display uses the flexible substrate as a base plate, with an interface and a reference system design.

The 2.9" active area contains 296×128 pixels and has 1-bit white/black full display capabilities. An integrated circuit contains gate buffer, source buffer, interface, timing control logic, oscillator, etc... are supplied with each panel.


You may refer to the official [2.9inch e-Paper HAT \(D\) datasheet](#) to know more information about this module.

Front view of the e-Paper Module:

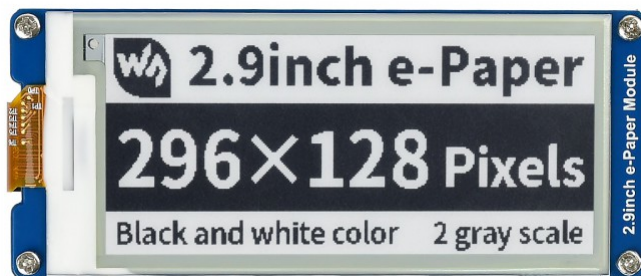


RTL8722DM / RTL8722CSM Wiring Diagram:




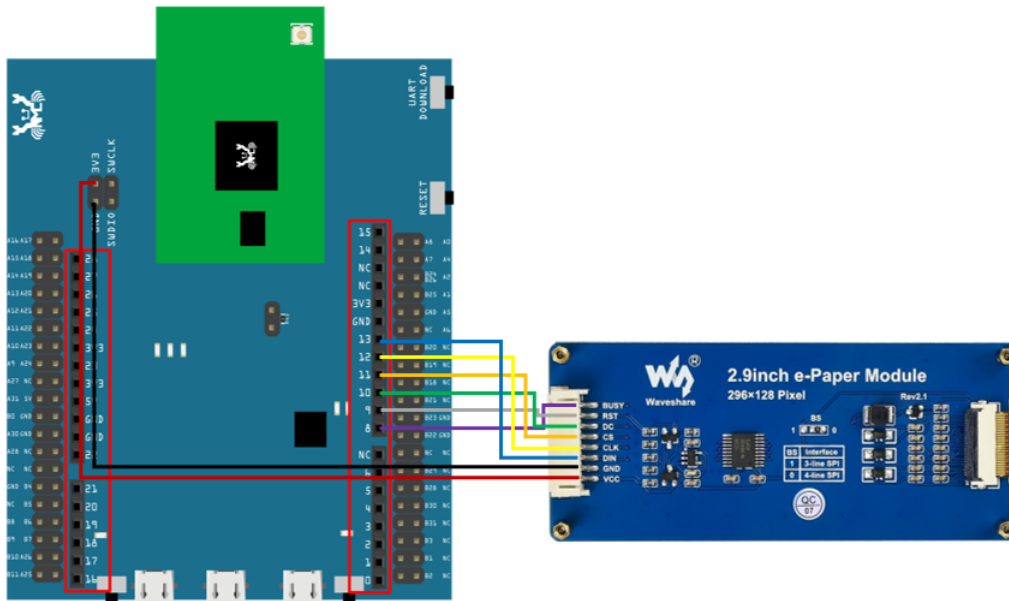

RTL8722DM MINI Wiring Diagram:

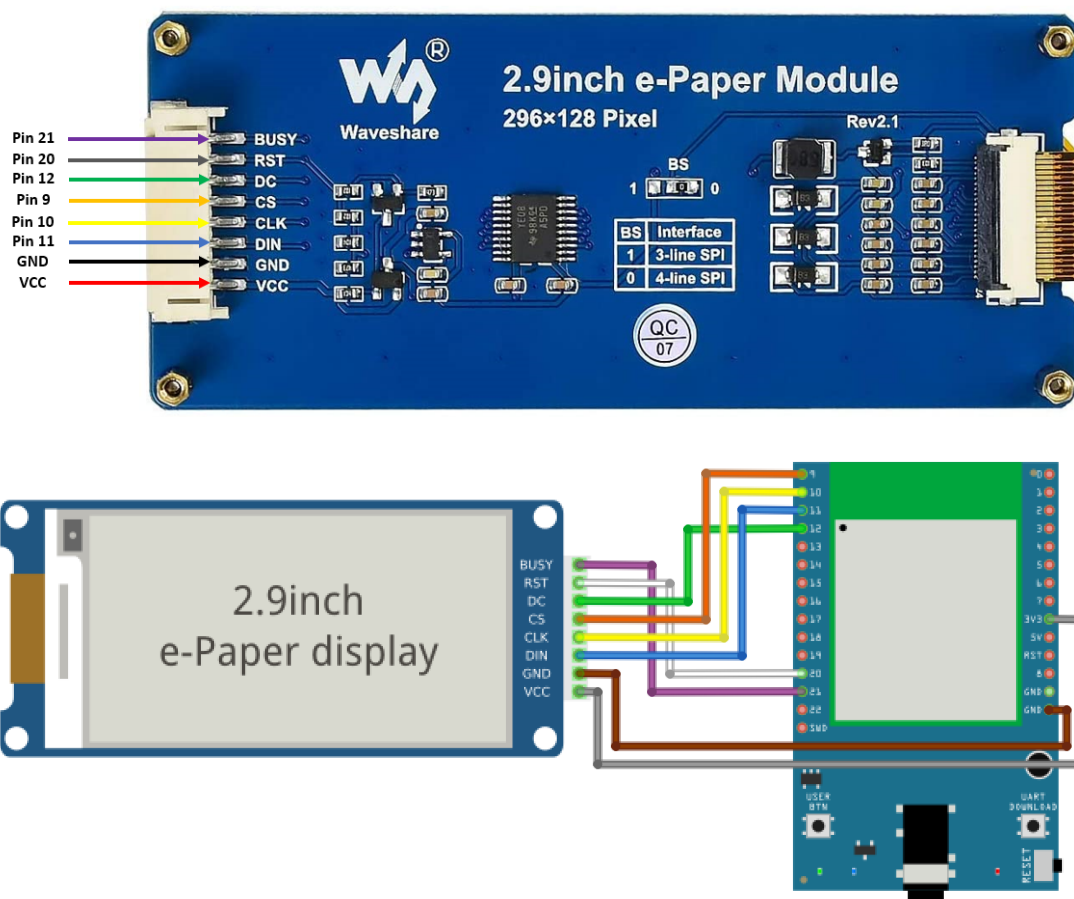


RTL8720DN(BW16) Wiring Diagram:

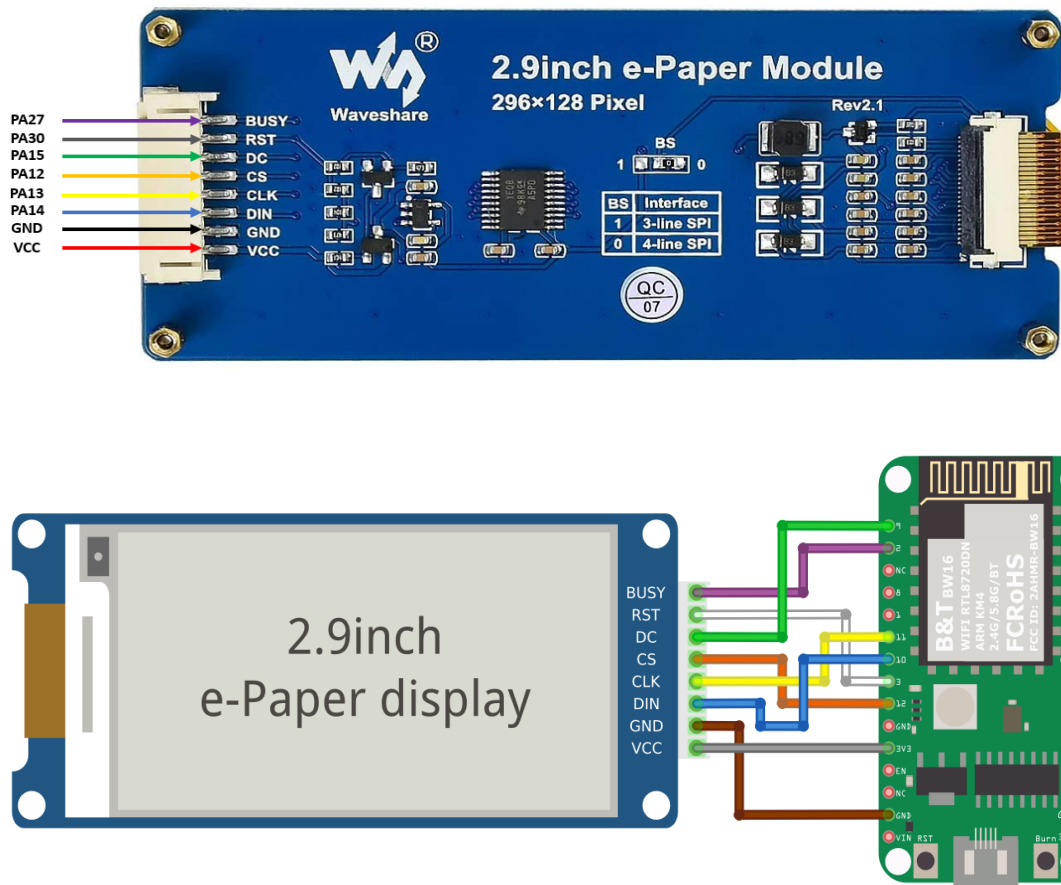


Download the E Ink zip library, AmebaEink.zip, at

https://github.com/ambiot/ambd_arduino/tree/master/Arduino_zip_libraries

Then install the AmebaEink.zip. Open the “DisplayQR” example in “File” -> “Examples” -> “AmebaEink” -> “EinkDisplayText” :

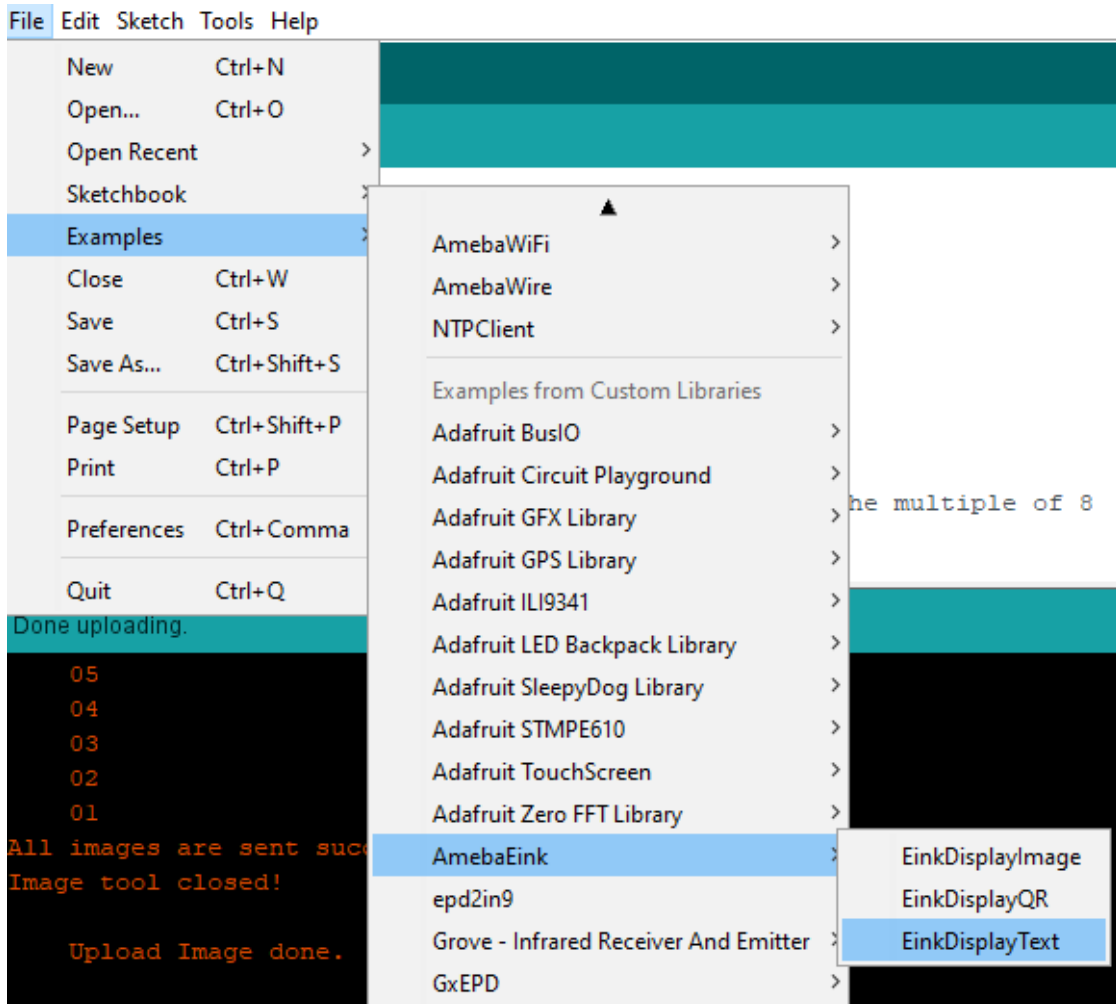

Upload the code to the board and press the Reset button after the uploading is done. You will find these texts displayed on the board:

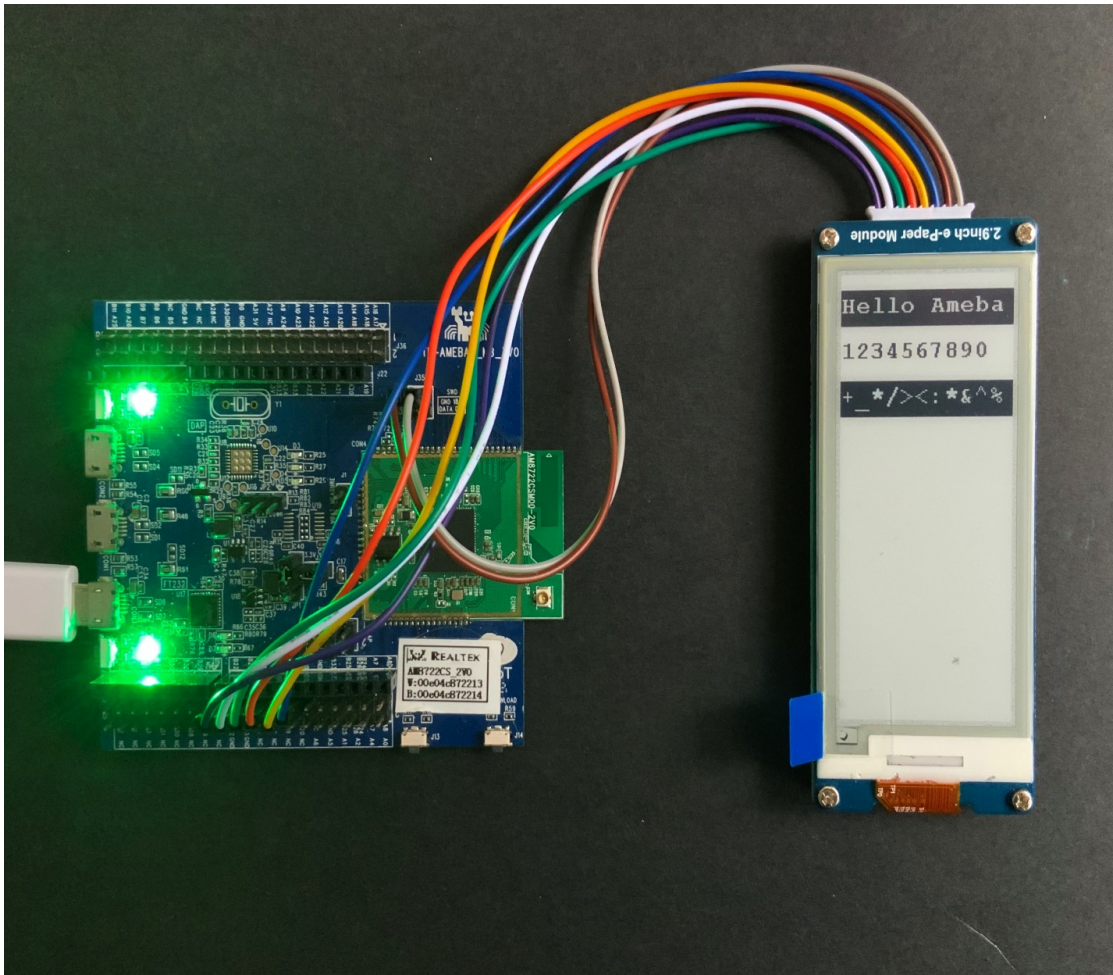

Code Reference

[1] We use Good Display GDEH029A1 2.9 Inch / 296×128 Resolution / Partial Refresh Arduino Sample Code to get the e-Paper successfully Display: <http://www.good-display.com/product/201.html>

E-Paper - Display User-generated QR Code

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Waveshare 2.9inch e-Paper HAT (D) x 1


Example

In this example, we use the Ameba RTL8722 module connects to a Waveshare 2.9inch e-Paper module to display a few QR codes. The display uses the flexible substrate as a base plate, with an interface and a reference system design.

The 2.9" active area contains 296×128 pixels and has 1-bit white/black full display capabilities. An integrated circuit contains gate buffer, source buffer, interface, timing control logic, oscillator, etc...are supplied with each panel.


You may refer to the official [2.9inch e-Paper HAT \(D\)](#) datasheet to know more information about this module.

Front view of the e-Paper Module:

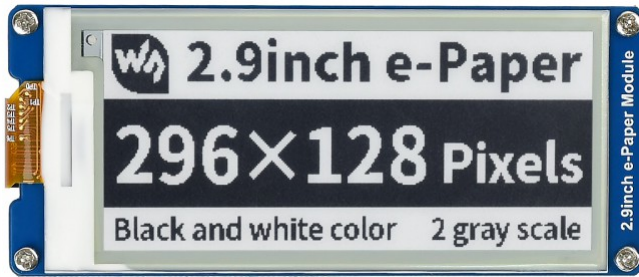


RTL8722DM / RTL8722CSM Wiring Diagram:




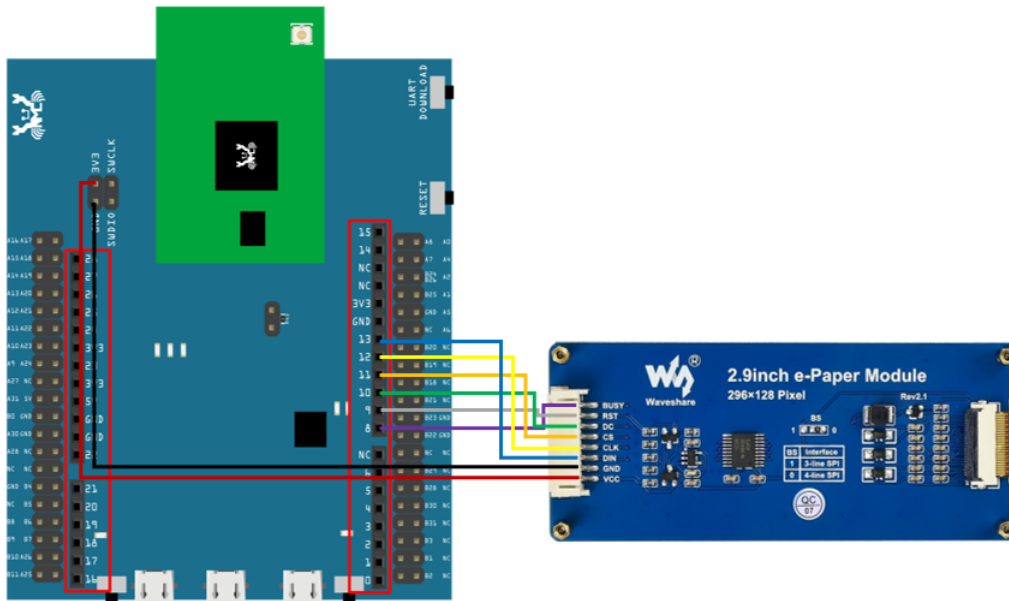

RTL8722DM MINI Wiring Diagram:

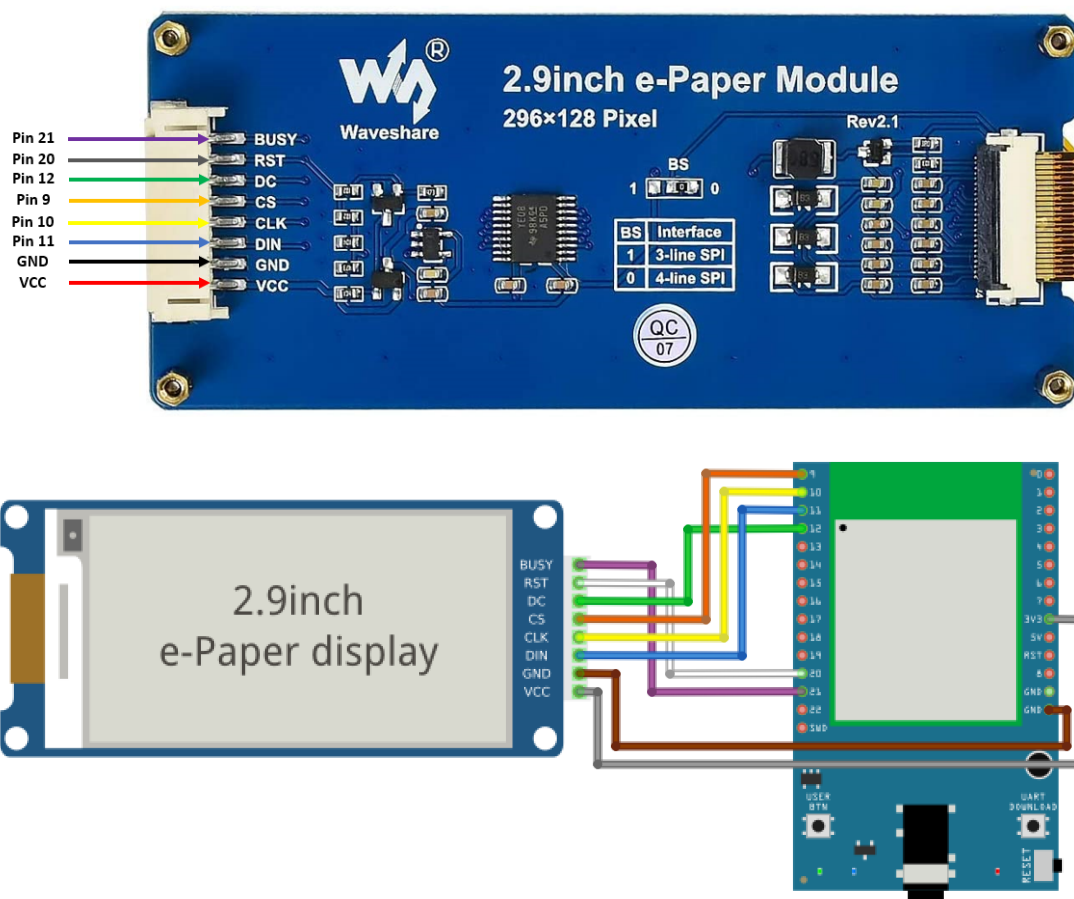


RTL8720DN(BW16) Wiring Diagram:

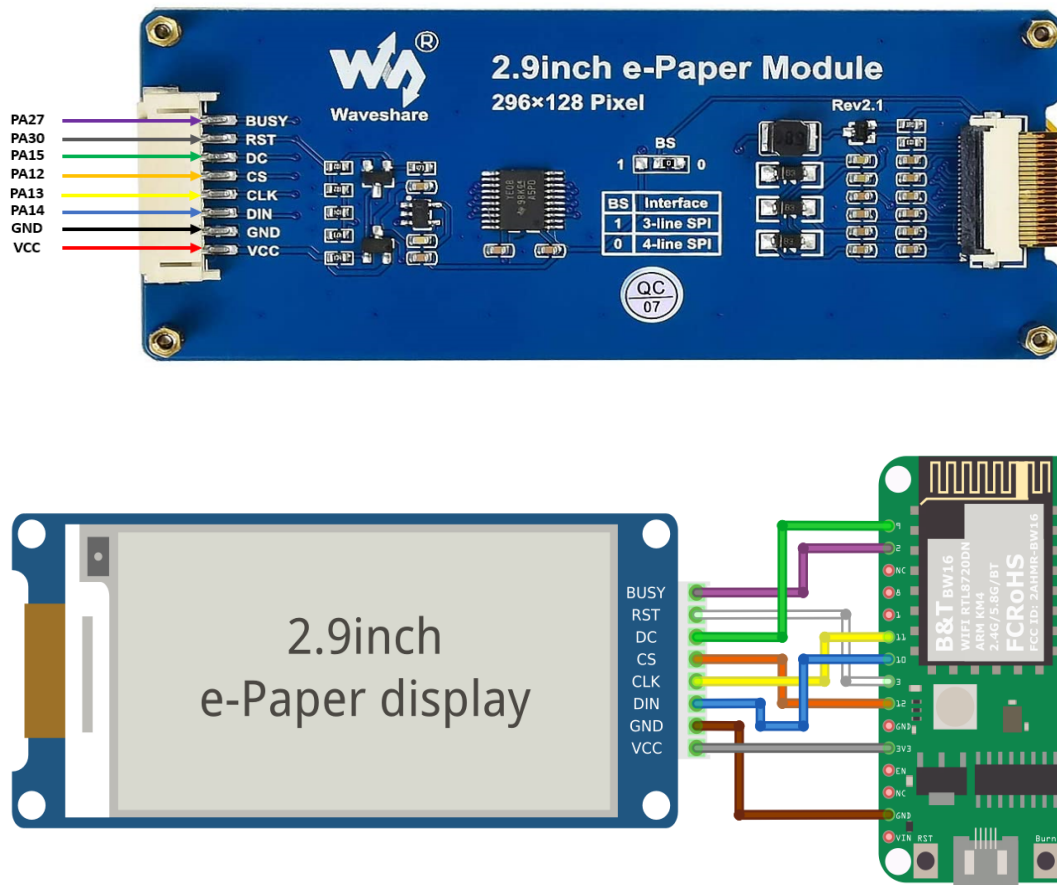

Download the E Ink zip library, AmebaEink.zip, at


https://github.com/ambiot/ambd_arduino/tree/master/Arduino_zip_libraries

Then install the AmebaEink.zip. Open the “DisplayQR” example in “File” → “Examples” →

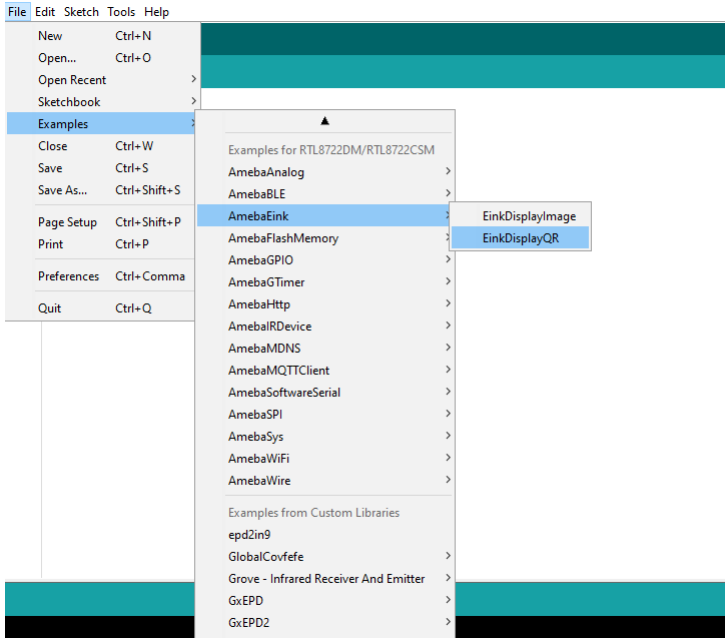

“AmebaEink” → “DisplayQR” :

Modify the URL in the loop() section as your wish, after that, verify and upload the code to the Ameba board. Upon successfully upload the sample code and press the reset button, a QR code generated based on the URL of your input will be shown on the E-Paper module. The QR code showing below leads to our Ameba IoT official website: [Ameba ARDUINO](#)

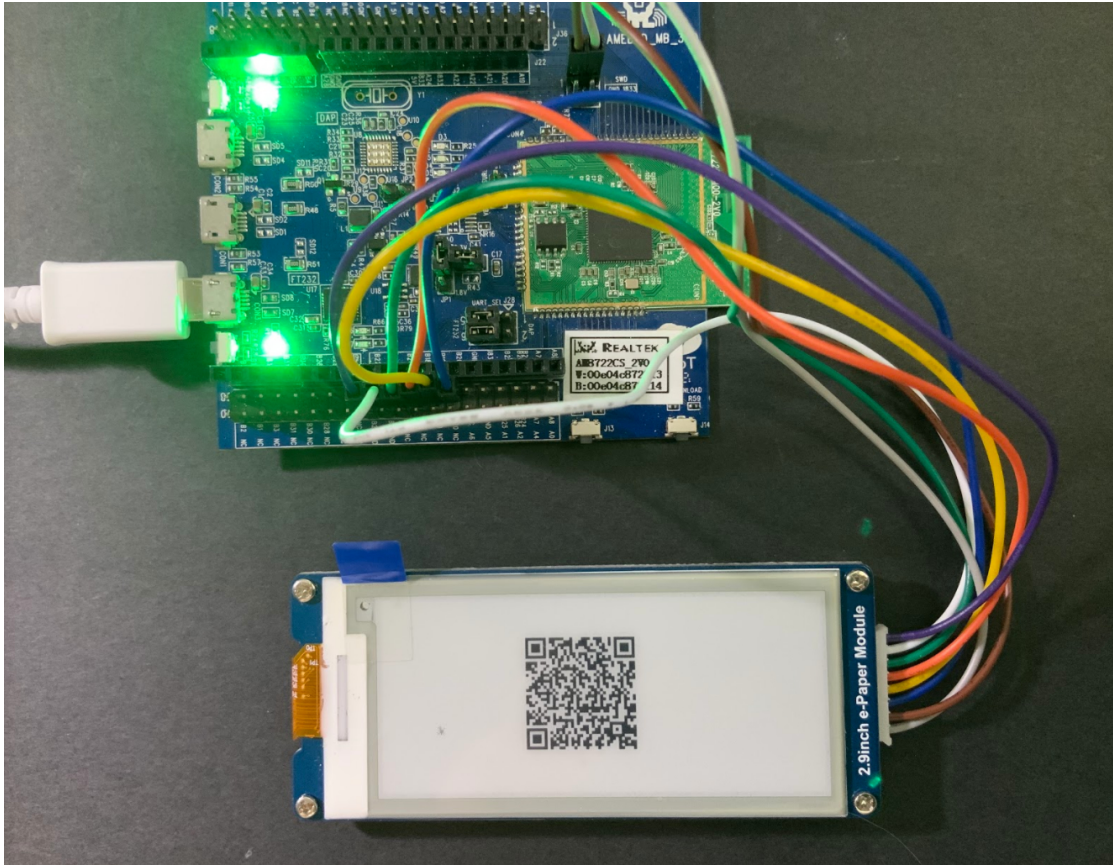

Code Reference

[1] We use Good Display GDEH029A1 2.9 Inch / 296×128 Resolution / Partial Refresh Arduino Sample Code to get the e-Paper successfully Display: <http://www.good-display.com/product/201.html>

[2] Provide the link to how to generate a QR code on the E-paper module: <https://eugeniopace.org/qrcode/arduino/eink/2019/07/01/qrcode-on-arduino.html>

[3] A simple library for generating QR codes in C, optimized for processing and memory-constrained systems: <https://github.com/ricmoo/QRCode#data-capacities>

A Simple RTC Example

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1


Example

This example demonstrates how to use the RTC library methods. This function describes how to use the RTC API. The RTC function is implemented by an independent BCD timer/counter.

Select the correct Ameba development board from the Arduino IDE: "Tools" -> "Board" .

Then open the "RTC" example from:

"File" -> "Examples" -> "AmebaRTC" -> "RTC":

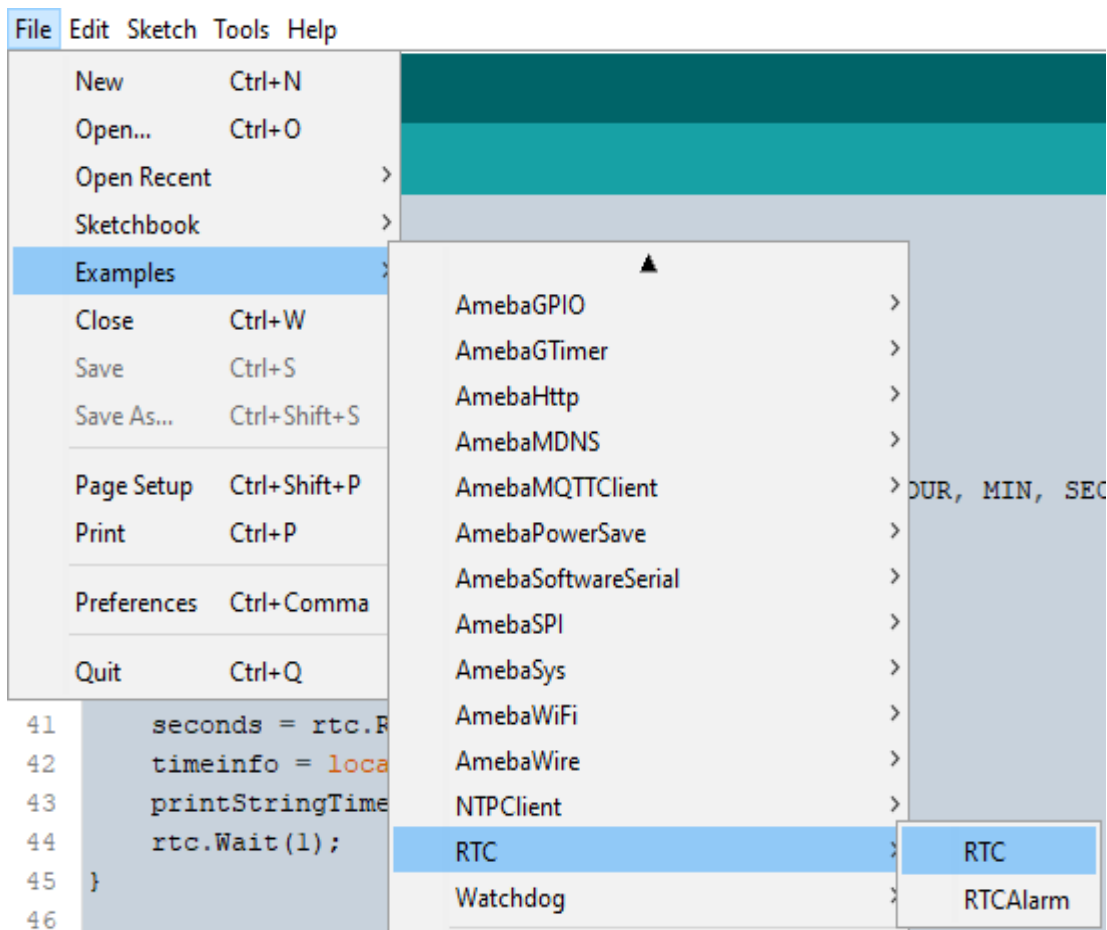

Upon successfully upload the sample code and press the reset button, this example will print out time information since the user initialized time every second in the Serial Monitor.

```

Epoch Time(in s) since January, 1, 1970:1577884473s
Time as a basic string:           Wed Jan  1 13:14:33 2020
Time as a custom formatted string: 2020-1-1 13:14:33
-----
Epoch Time(in s) since January, 1, 1970:1577884474s
Time as a basic string:           Wed Jan  1 13:14:34 2020
Time as a custom formatted string: 2020-1-1 13:14:34
-----
Epoch Time(in s) since January, 1, 1970:1577884475s
Time as a basic string:           Wed Jan  1 13:14:35 2020
Time as a custom formatted string: 2020-1-1 13:14:35
-----
Epoch Time(in s) since January, 1, 1970:1577884476s
Time as a basic string:           Wed Jan  1 13:14:36 2020
Time as a custom formatted string: 2020-1-1 13:14:36
-----

```

☐ Autoscroll ☐ Show timestamp Newline 115200 baud Clear output

Code Reference

[1] Simple RTC example from Arduino Tutorials:

<https://www.arduino.cc/en/Tutorial/SimpleRTC>

A Simple RTC Alarm

Materials


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1

Example


This example demonstrates how to use the RTC library methods to create a RTC Alarm, so that to do some tasks when an alarm is matched. In particular, the RTC time is set at 16:00:00 and an alarm at 16:00:10. When the time matches, “Alarm Match” information will be printed on the serial monitor.

First, select the correct Ameba development board from the Arduino IDE: “Tools” -> “Board” .

Then open the “RTCArm” example from: “File” -> “Examples” -> “RTC” -> “RTCArm” :

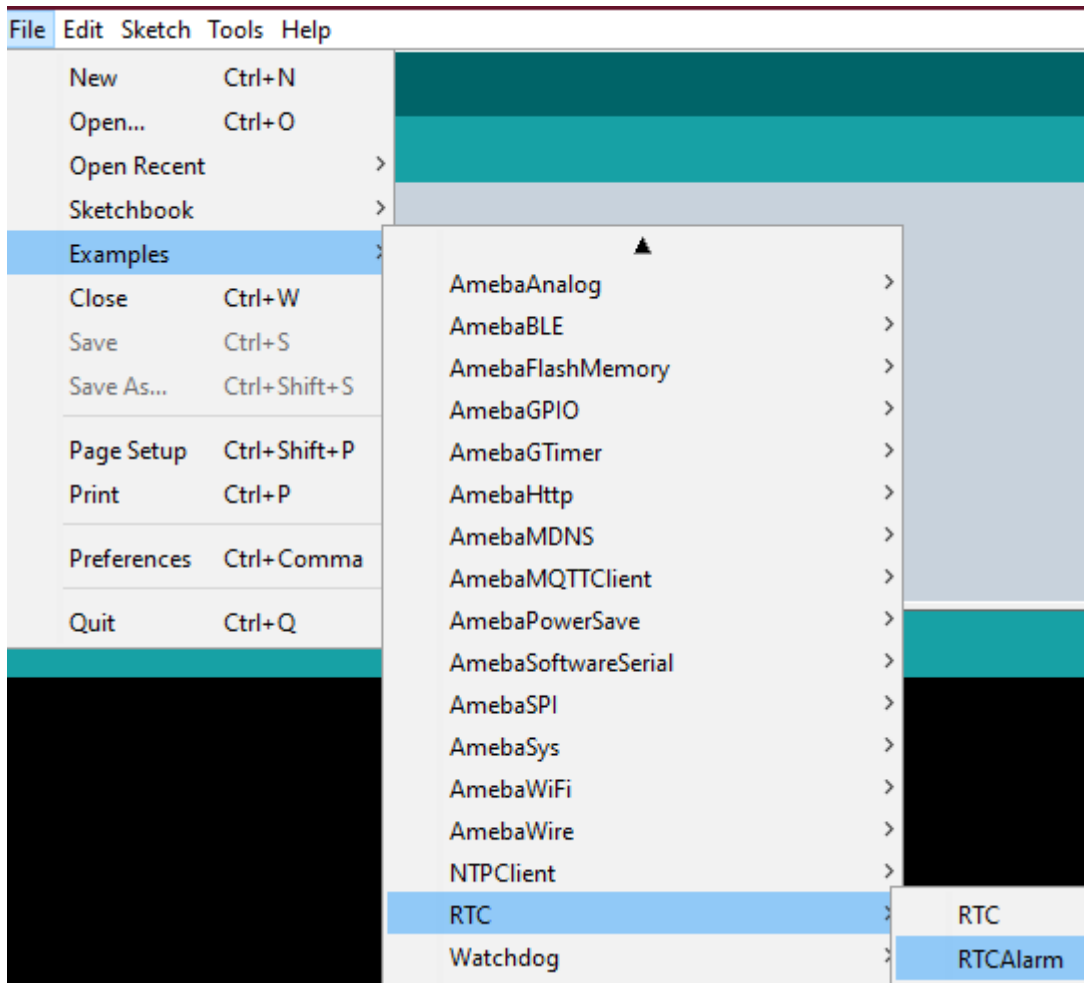

In the example, the RTC time is set at 16:00:00 and an alarm is set at 16:00:10. Upon successfully upload the sample code and press the reset button. When the alarm time (10 seconds) is reached the attached interrupt function will print the following information: “Alarm Matched!” showing in this figure below.

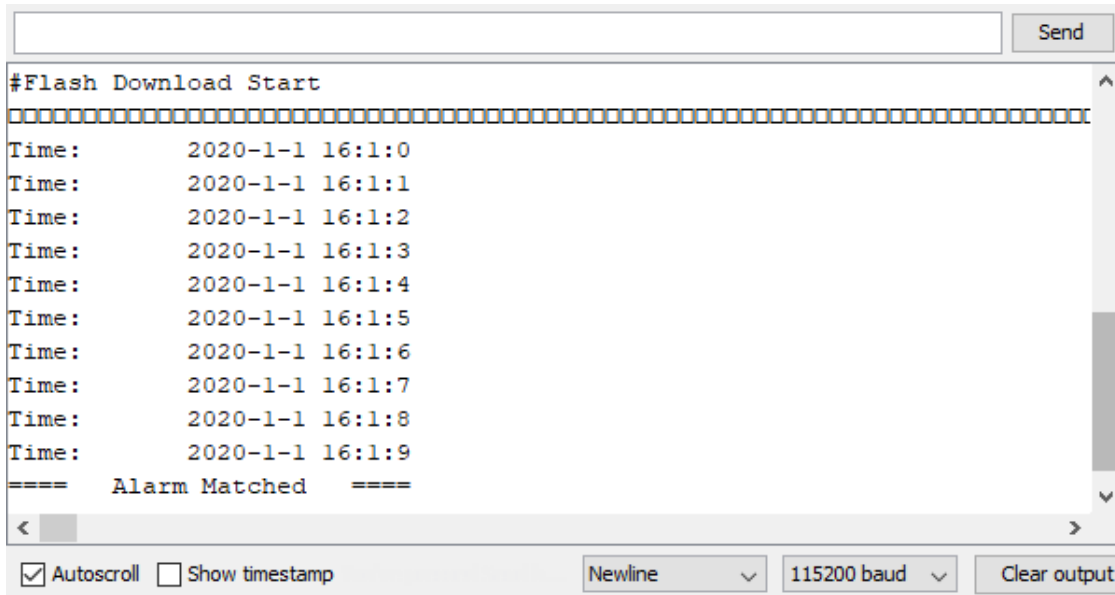

Watchdog Timer Simple Example

Preparation

- AmebaD RTL8722CSM/RTL8722DM/RTL8722DM MINI Board x 1


Example

In this example, we will use this simple watchdog timer example runs on the Ameba RTL8722 module to illustrate how to use the watchdog API. Before we get into the details of the example, let's briefly go through the definition of Watchdog as well as its working principles.

Watchdog

Watchdog Timer (WDT) is a hardware timer that is used to detect the occurrence of a software fault, then automatically generates a system reset or a watchdog interrupt on the expiry of a programmed period.

In layman terms, imagine in the situation while your micro-controller is confused in an infinity loop, or any case like the micro-controller hang while performing some tasks. The normal troubleshooting method would be to press the reset button and jump out of the infinity loop. However, is it practically impossible to do press on the button all time, therefore, the watchdog timer that embedded inside the micro-controller would help with this situation.

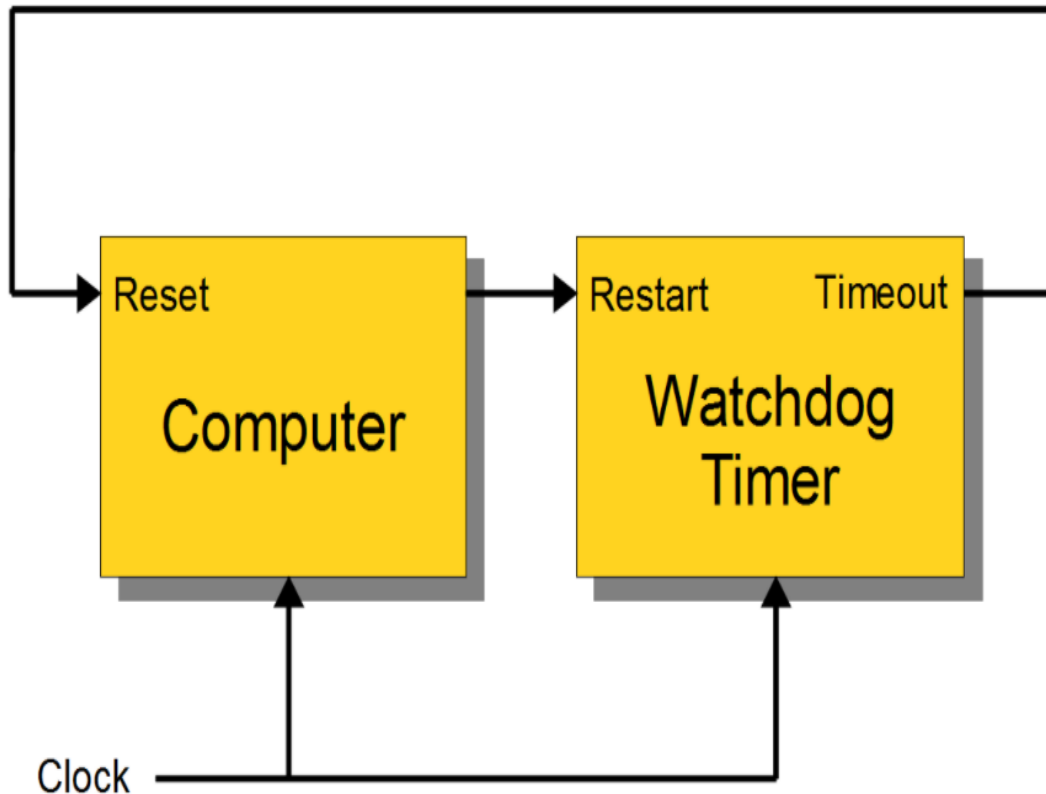

Feed the Dog

If you have a dog in your home. You need to feed that dog at a regular interval. if you can't feed one day, it will bite you! And likewise, this is the working logic behind the watchdog timer.


In our example, we created 2 tasks that contain some loop that runs repeatedly, one is called "Small_Task" and the other is called "Big_Task". We are enabling the watchdog timer is loaded with an initial value (5 seconds) greater than the total delay in the "Small_Task", but shorter than the "Big_Task".

For the successful case, the watchdog is being refreshed/feed within 5 seconds, however, for the failed case, the loop is under processing and the watchdog is not being fresh after 5 seconds, which triggers the watchdog (dog barks), an interrupt is generated to reset the processor. Likewise, the watchdog timer protects the micro-controller from the hanging case.


Then we move to the coding part for this example, for this example, you will only need the RTL8722CSM/RTL8722DM/RTL8722DM MINI Board itself.

Firstly, make sure the correct Ameba development board is selected in Arduino IDE: "Tools" -> "Board" ->

“RTL8722CSM/RTL8722DM” (or “RTL8722DM MINI”). Then open the “Watchdog Timer” example in “File” -> “Examples” -> “AmebaWatchdog” -> “Watchdog Timer” :

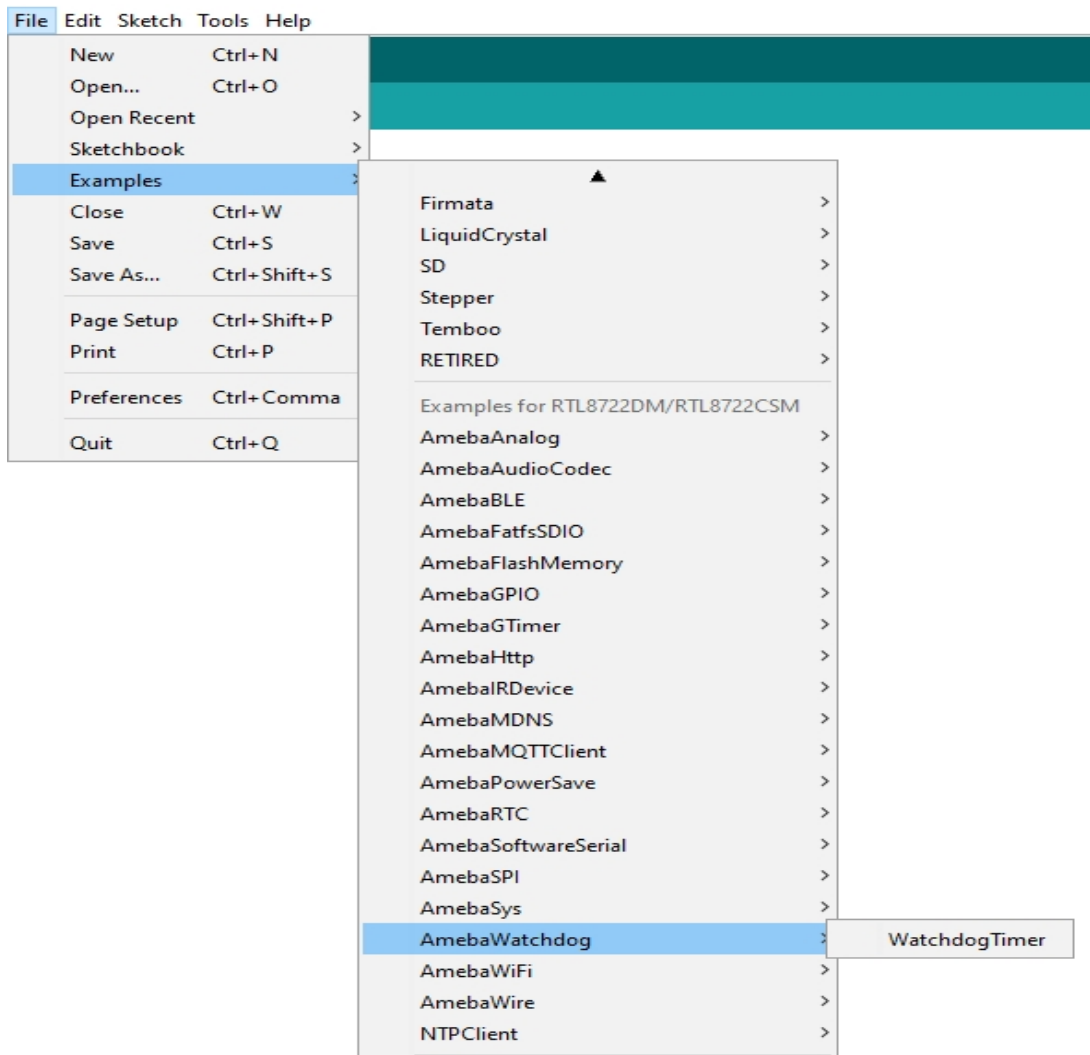

Upon successfully upload the sample code, open the serial monitor, and press the reset button. You will find that the “Small_Task” can refresh the watchdog within the 5 seconds (initialized in the watchdog timer). However, the “Big_Task” will not be able to refresh the watchdog within 5 seconds, which the watchdog “barks” then the microcontroller reset.

 COM10

```
#calibration_ok:[2:19:11]
.....doing small task.....
Small_Task finished refresh watchdog.
.....doing big task, up to 10.....
doing dummy task #1
doing dummy task #2
doing dummy task #3
doing dummy task #4
doing dummy task #5
#calibration_ok:[2:19:11]
.....doing small task.....
Small_Task finished refresh watchdog.
.....doing big task, up to 10.....
doing dummy task #1
doing dummy task #2
doing dummy task #3
doing dummy task #4
doing dummy task #5
#calibration_ok:[2:19:11]
.....doing small task.....
Small_Task finished refresh watchdog.
.....doing big task, up to 10.....
doing dummy task #1
doing dummy task #2
doing dummy task #3
doing dummy task #4
doing dummy task #5
#calibration_ok:[2:19:11]
.....doing small task.....
Small_Task finished refresh watchdog.
.....doing big task, up to 10.....
doing dummy task #1
```

COM10

```
#calibration_ok:[2:19:11]
.....doing small task.....
Small_Task finished refresh watchdog.
.....doing big task, up to 10.....
doing dummy task #1
doing dummy task #2
doing dummy task #3
doing dummy task #4
doing dummy task #5
watchdog barks!!!
doing dummy task #6
doing dummy task #7
doing dummy task #8
doing dummy task #9
doing dummy task #10
Big_Task finished refresh watchdog.
```

Audio Codec –Basic Input Output

Materials


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Potentiometer x 1
- Analog microphone x 1 (e.g., Adafruit 1063 / 1064)
- 3.5mm TRS/TRRS breakout x 1 (e.g., Adafruit 2791 / Sparkfun 11570)

Example


Procedure

Connect the potentiometer, microphone and 3.5mm connector to the RTL8722 board following the diagram.


RTL8722DM / RTL8722CSM Wiring Diagram:

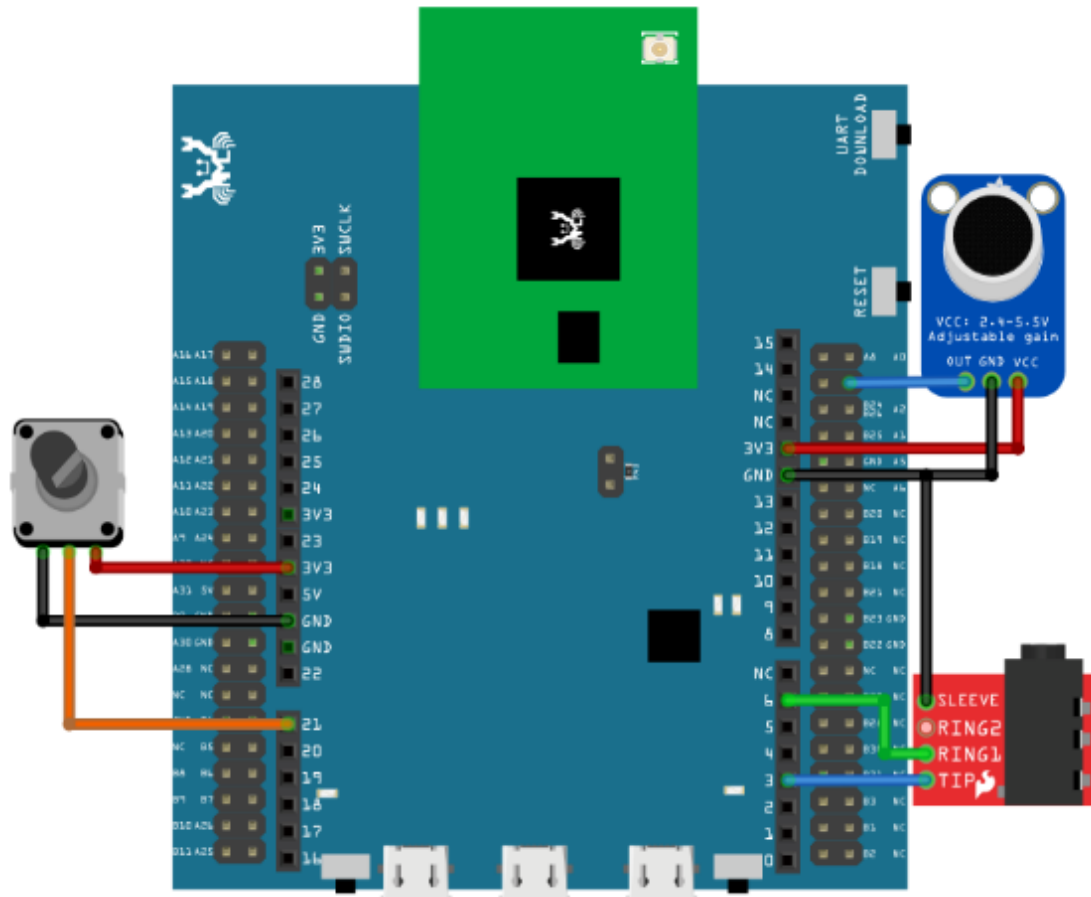

RTL8722DM MINI Wiring Diagram:

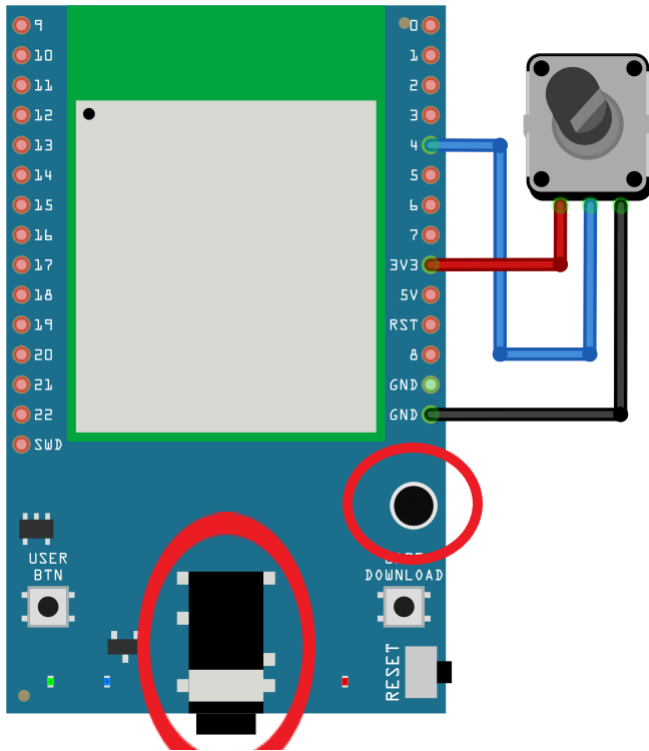

Open the example, "Files" -> "Examples" -> "AmebaAudioCodec" -> "BasicInputOutput".

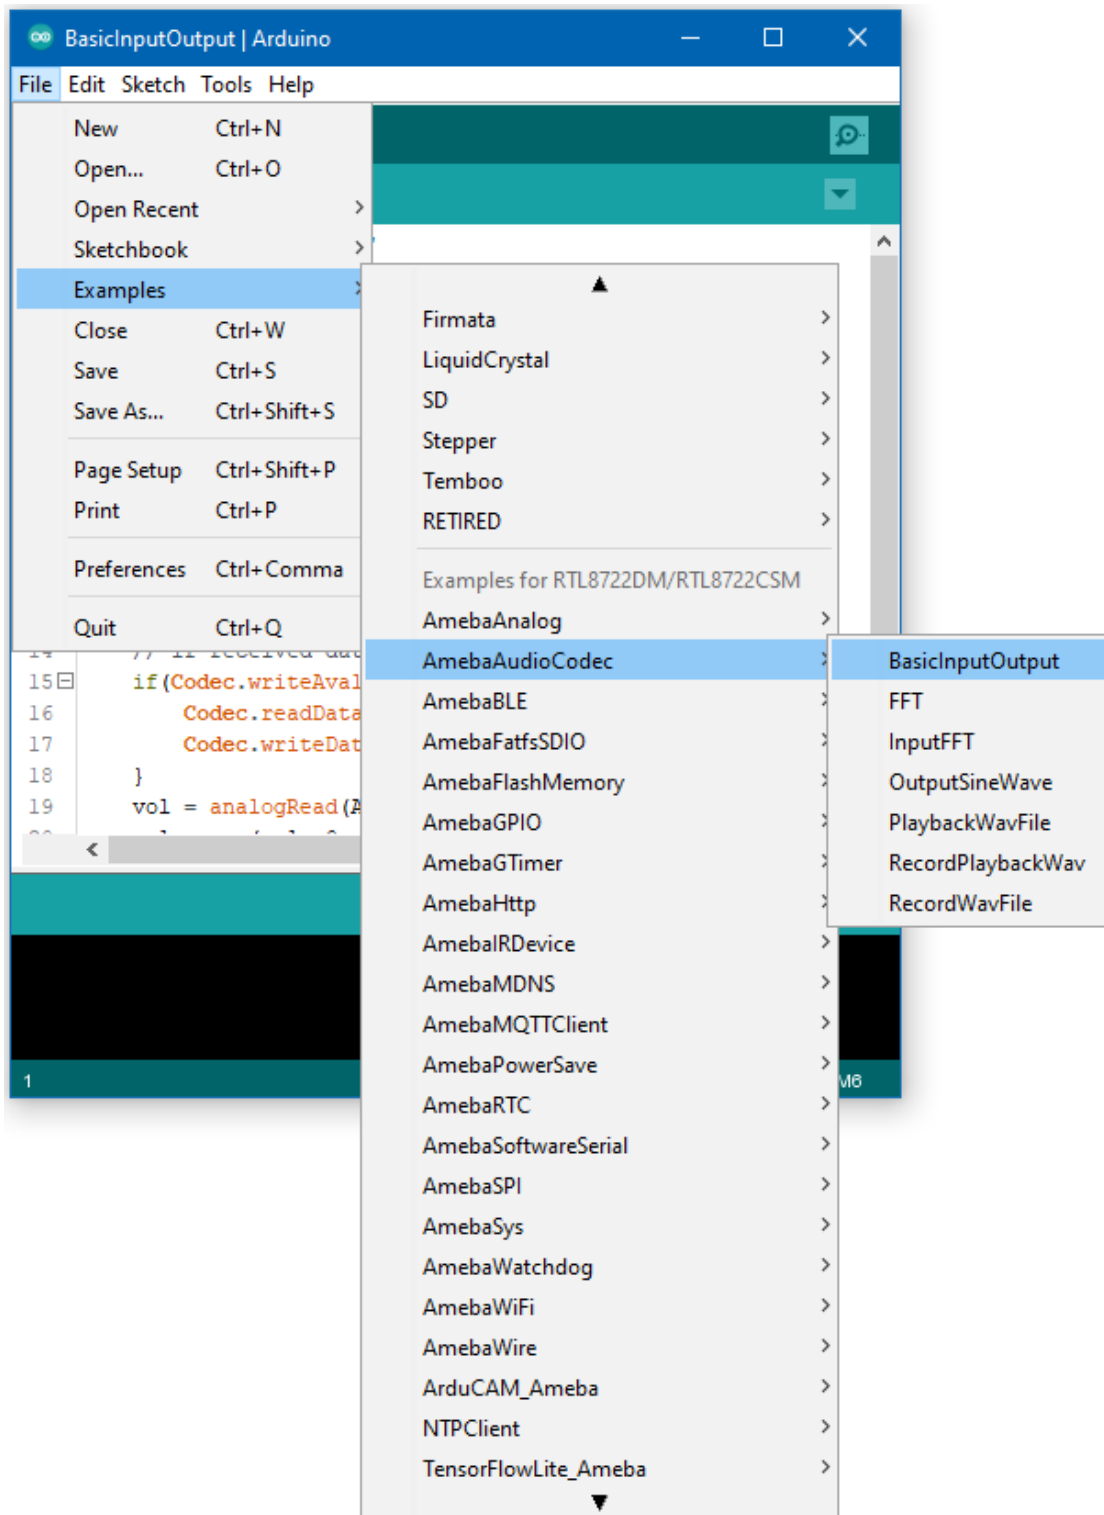

Upload the code and press the reset button on Ameba once the upload is finished.

Connect a pair of wired headphones to the 3.5mm audio jack, blow at the microphone, and you should hear the sounds picked-up by the microphone replayed in the headphones. Adjust the potentiometer and the output volume will change as well. Note: if you are using a microphone with an amplifier included, such as Adafruit 1063, the amplifier can lead to

the microphone picking up more noise.

Audio Codec - FFT

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1


Example

Introduction

This example shows how to use the AudioCodec_FFT class to calculate the fast Fourier transform of a signal to extract the frequencies present in the signal.


Procedure

Open the example, "Files" -> "Examples" -> "AmebaAudioCodec" -> "FFT" .

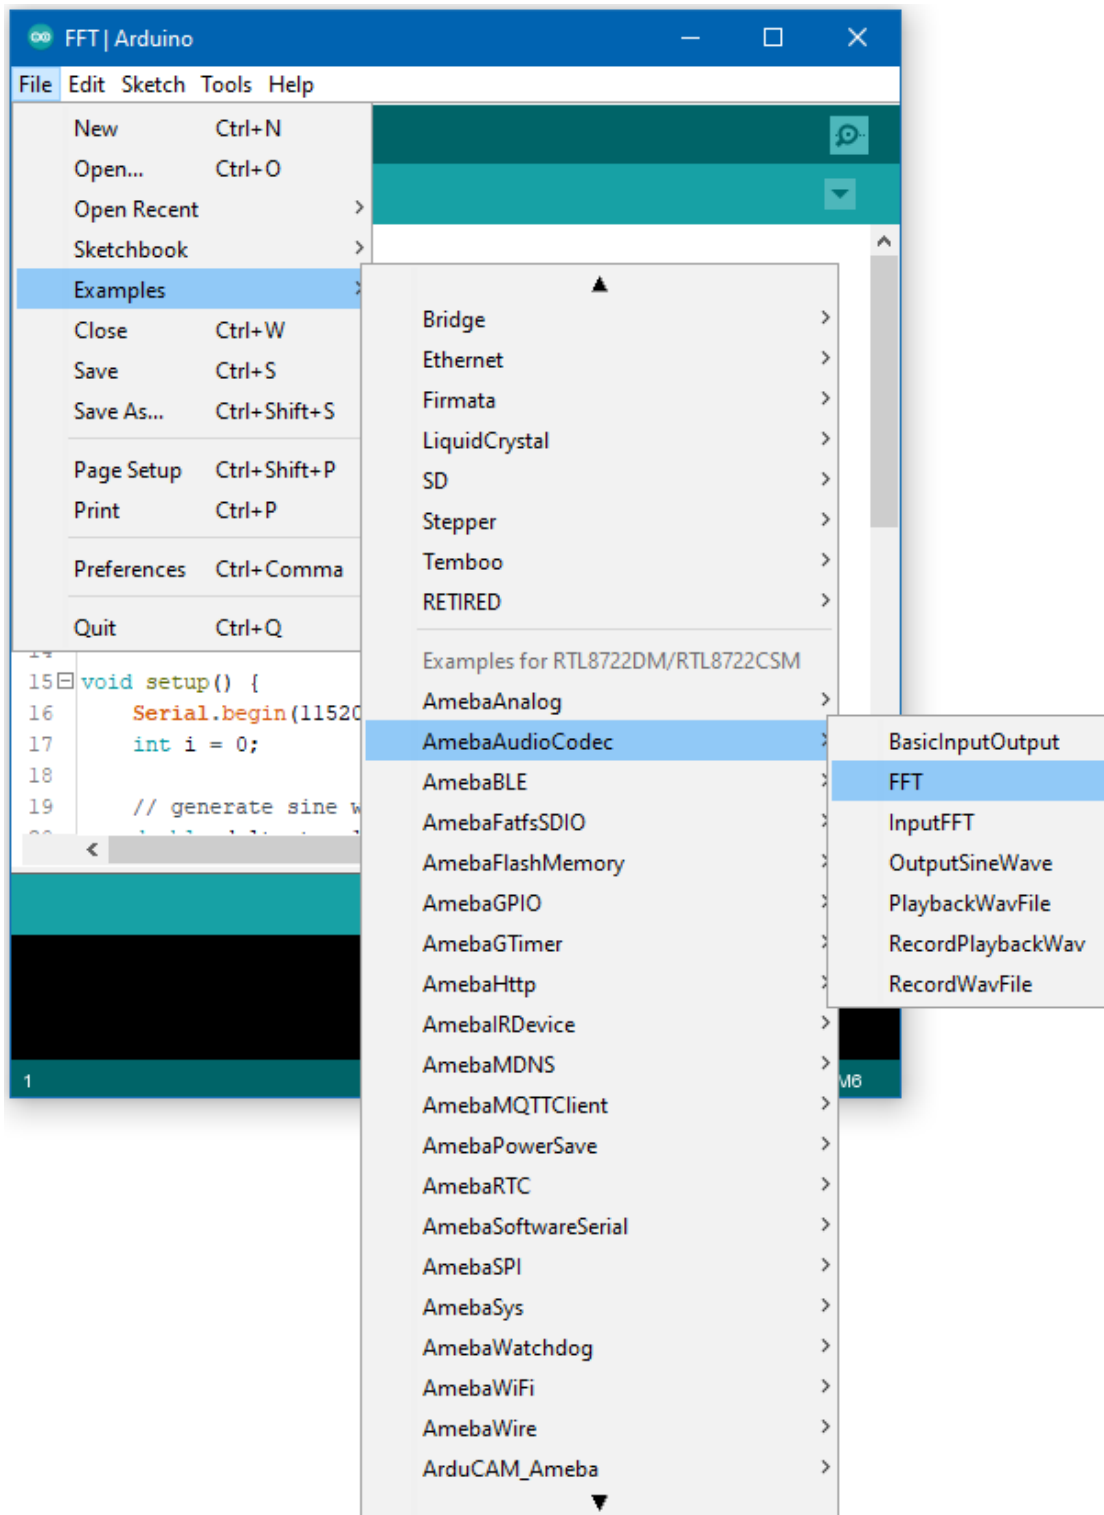

Upload the code and press the reset button on Ameba once the upload is finished.

Open the serial monitor, and the output results of the AudioCodec_FFT calculation will be displayed.

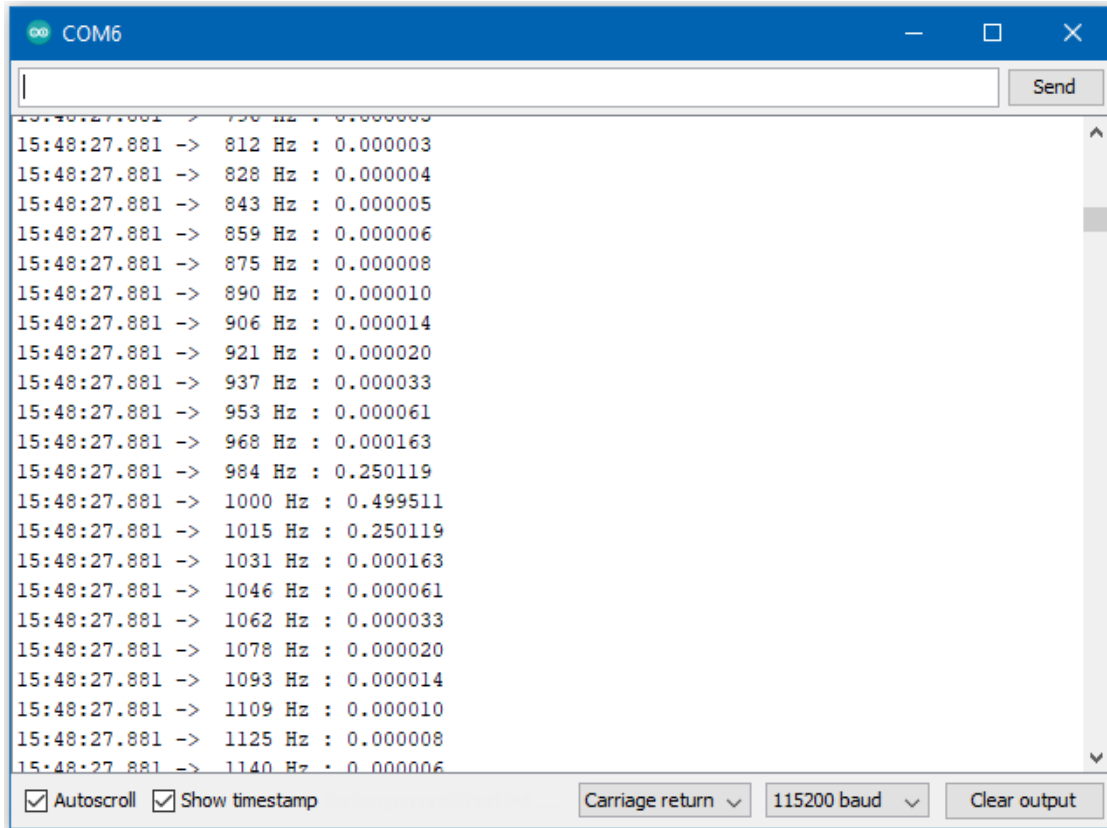

Audio Codec - Input FFT

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Analog microphone x 1 (e.g., Adafruit 1063 / 1064)

Example


Introduction

This example shows how to use the FFT class to calculate the fast Fourier transform of the audio signal recorded by the microphone.

Procedure

Connect the microphone to the RTL8722 board following the diagram.


RTL8722DM / RTL8722CSM Wiring Diagram:

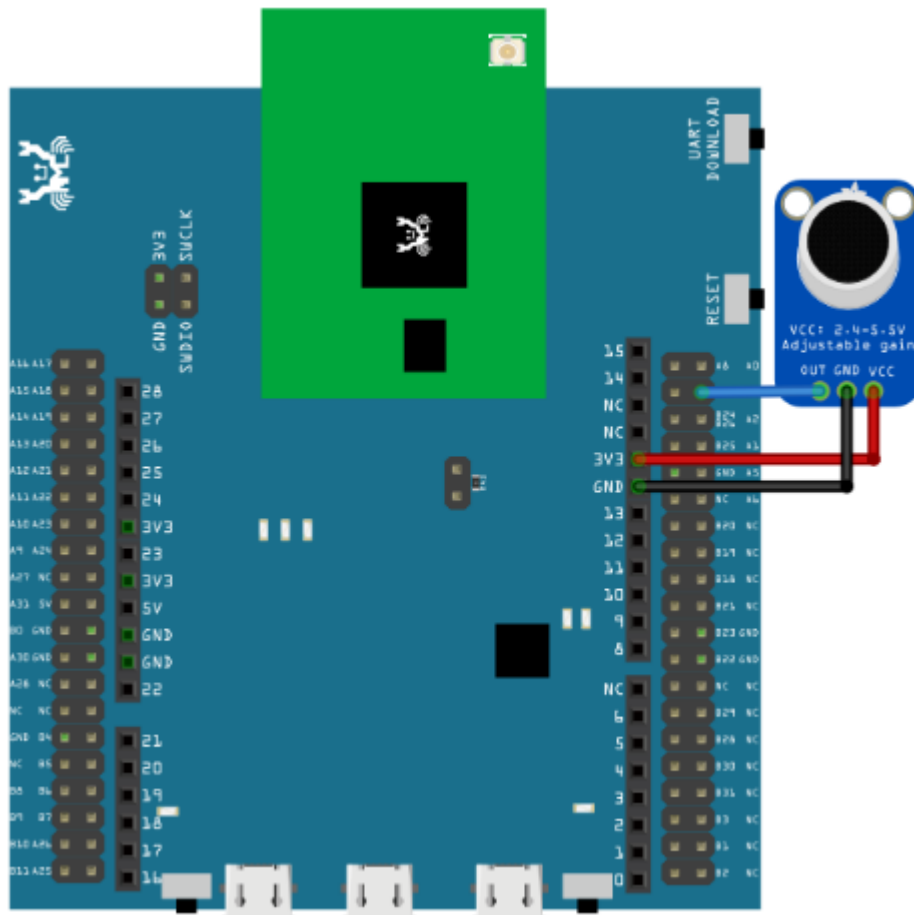

RTL8722DM MINI Wiring Diagram:

As RTL8722DM_MINI have a built in microphone on the board, there is no need for any external microphone.


Next, open the example, "Files" -> "Examples" -> "AmebaAudioCodec" -> "InputFFT".

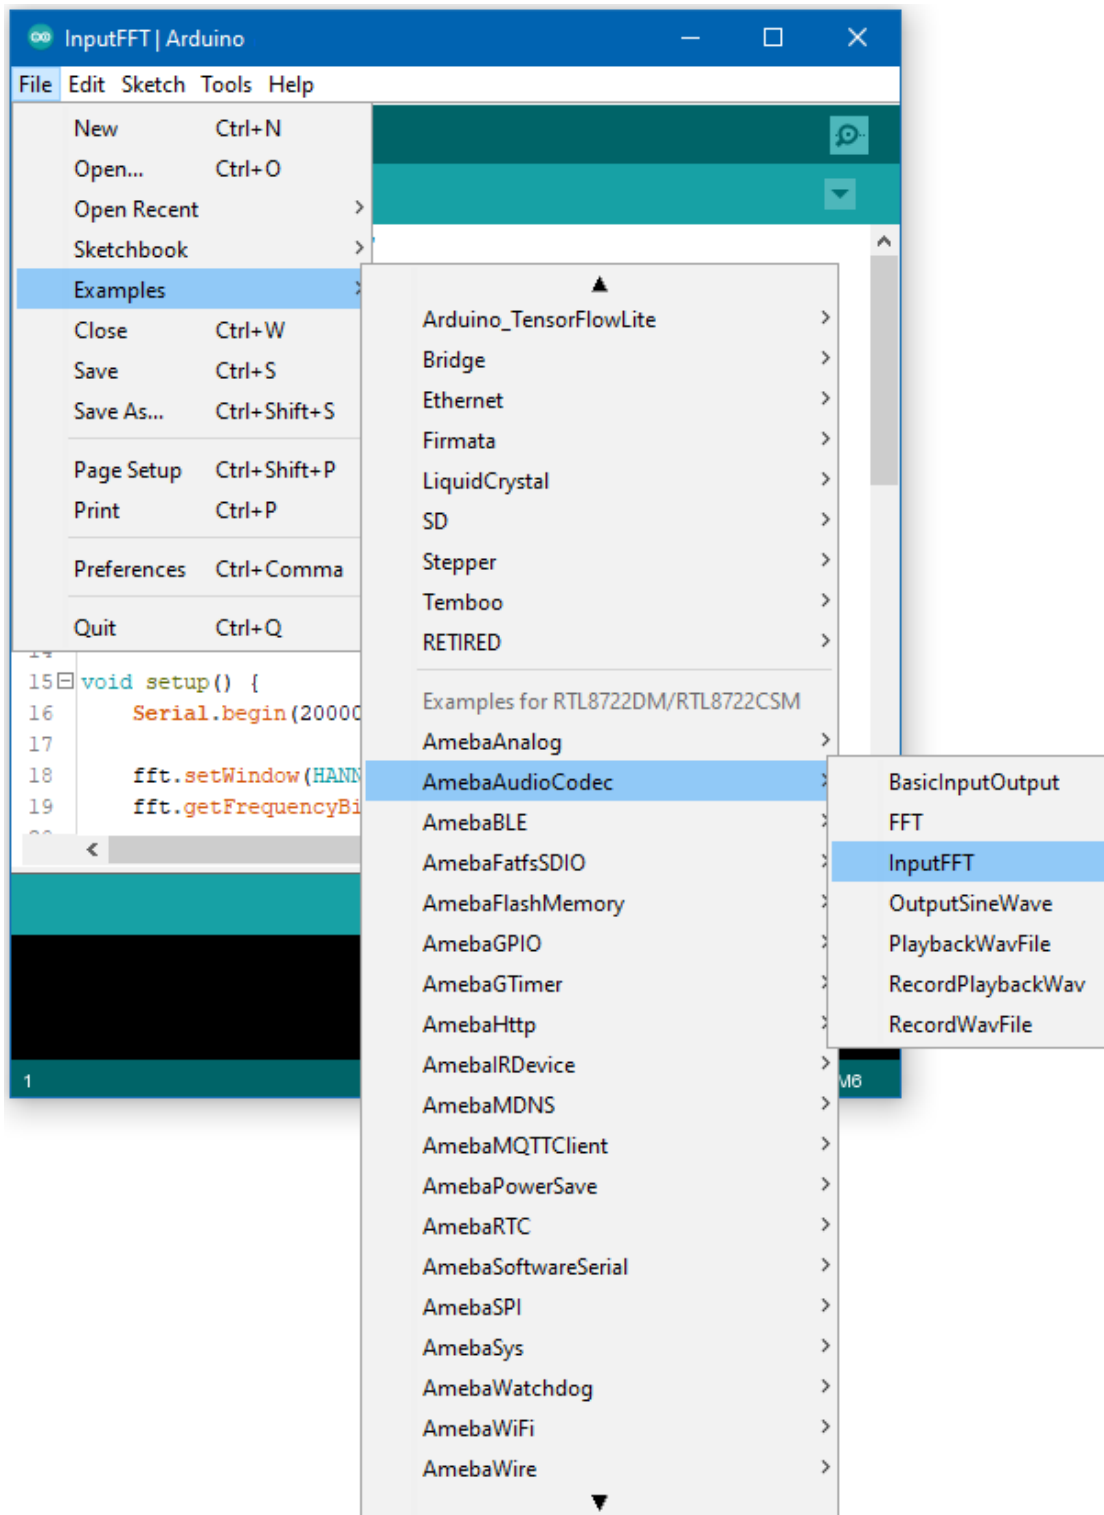

Upload the code and press the reset button on Ameba once the upload is finished.

Open the serial monitor and change the baud rate to 2000000. A stream of FFT results of audio samples will be displayed. Try playing music or use a smartphone app to generate a sine wave into the microphone, and you should be

able to see the FFT output change.

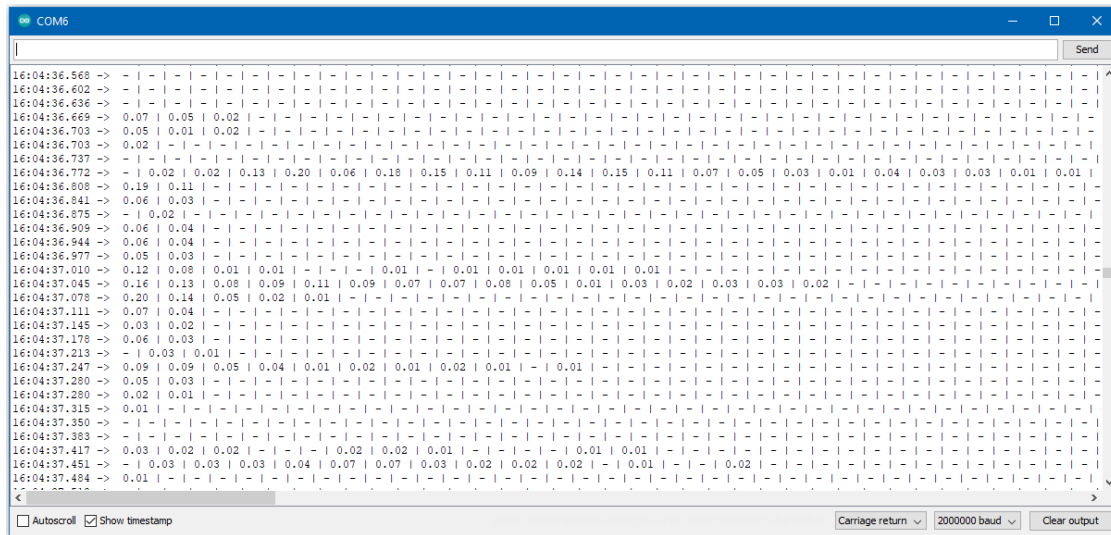

Audio Codec –Output Sine Wave

Materials


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- 3.5mm TRS/TRRS breakout x 1 (e.g., Adafruit 2791 / Sparkfun 11570)

Example

Procedure

RTL8722DM / RTL8722CSM Wiring Diagram:


Connect the 3.5mm connector to the RTL8722 board following the diagram.

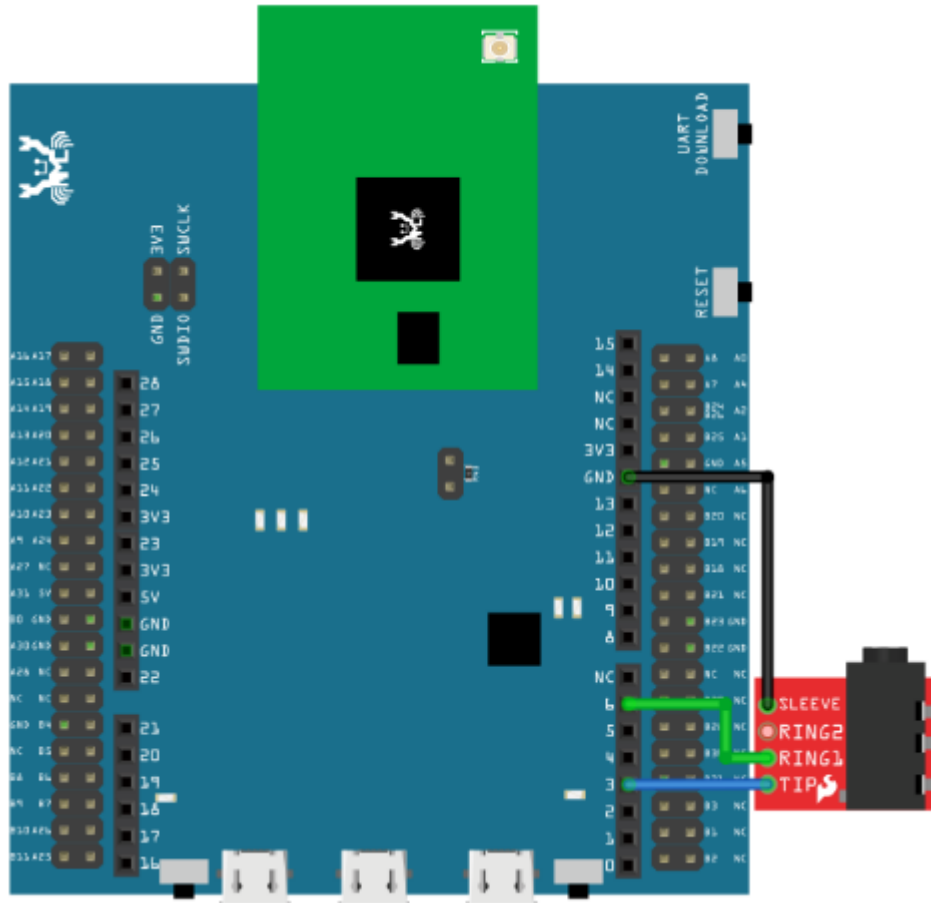

RTL8722DM MINI Wiring Diagram:

As RTL8722DM_MINI have a built in microphone on the board, there is no need for any external microphone.

Open the example, "Files" -> "Examples" -> "AmebaAudioCodec" -> "OutputSineWave" .

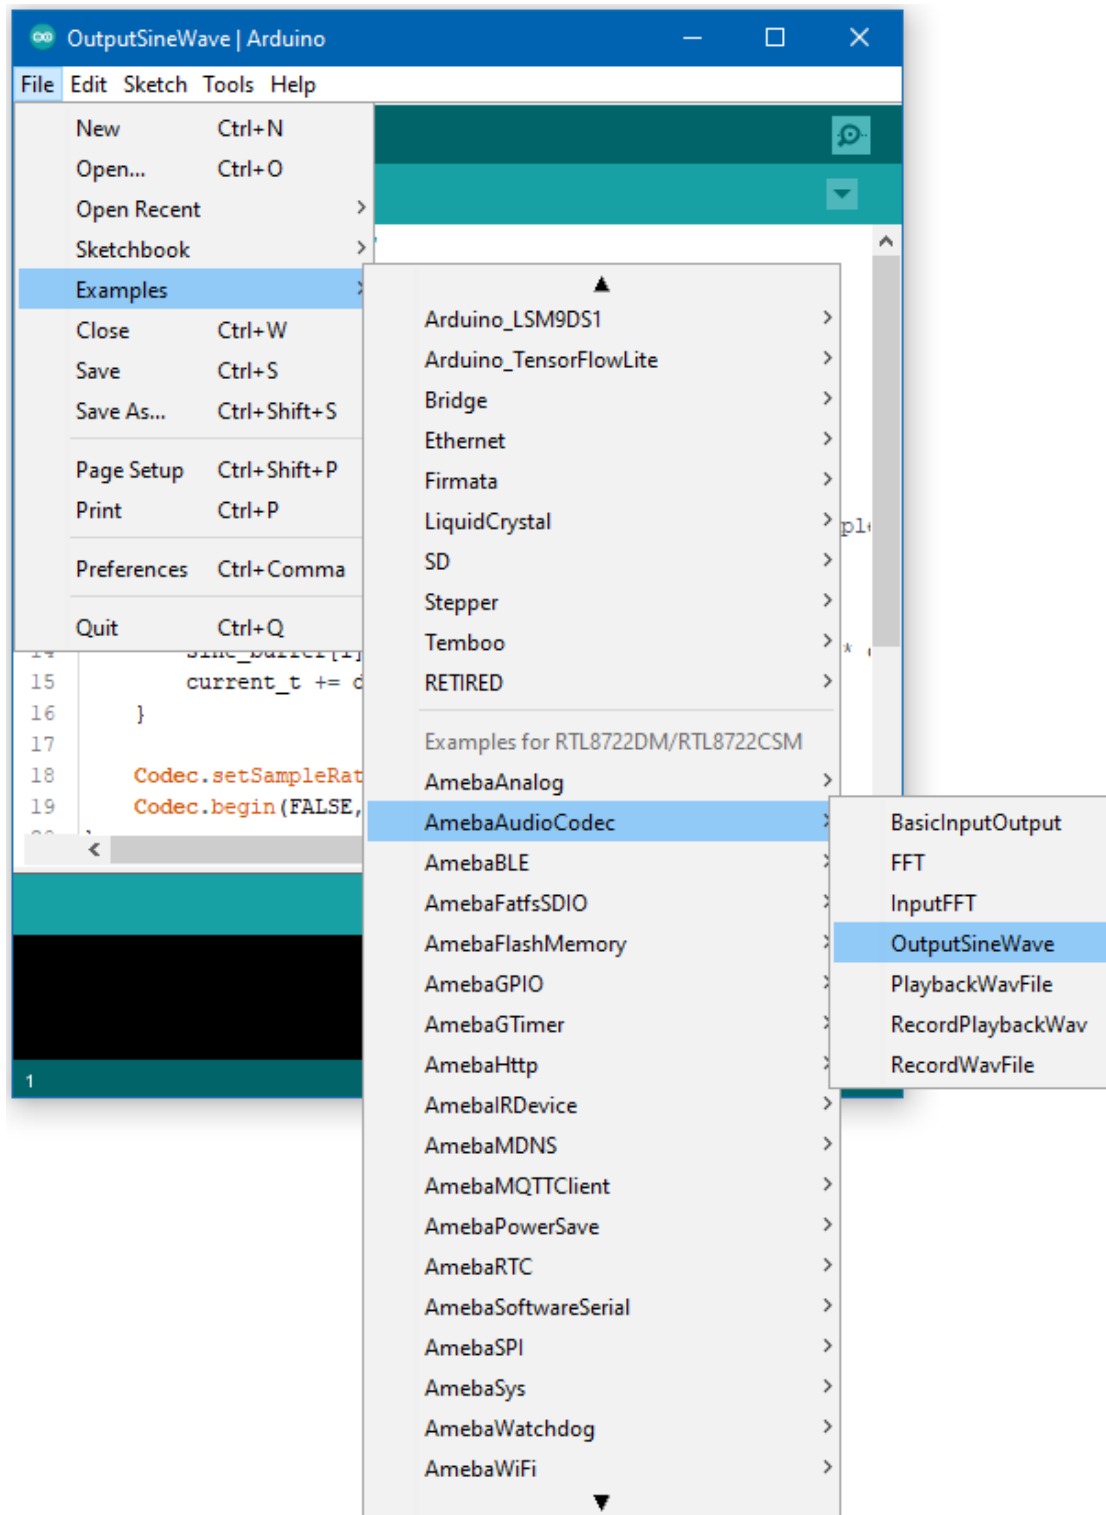

Upload the code and press the reset button on Ameba once the upload is finished.

Connect a pair of wired headphones to the 3.5mm audio jack and you should hear the generate single sinusoidal tone.

TensorFlow Lite - Hello World

Materials


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- LED x 1

Example

Procedure

Download the Ameba customized version of TensorFlow Lite for Microcontrollers library at https://github.com/ambiot/ambd_arduino/tree/master/Arduino_zip_libraries. Follow the instructions at <https://www.arduino.cc/en/guide/libraries> to install it. Ensure that the patch files found at https://github.com/ambiot/ambd_arduino/tree/master/Ameba_misc/ are also installed.


Open the example, "Files" -> "Examples" -> "TensorFlowLite_Ameba" -> "hello_world".

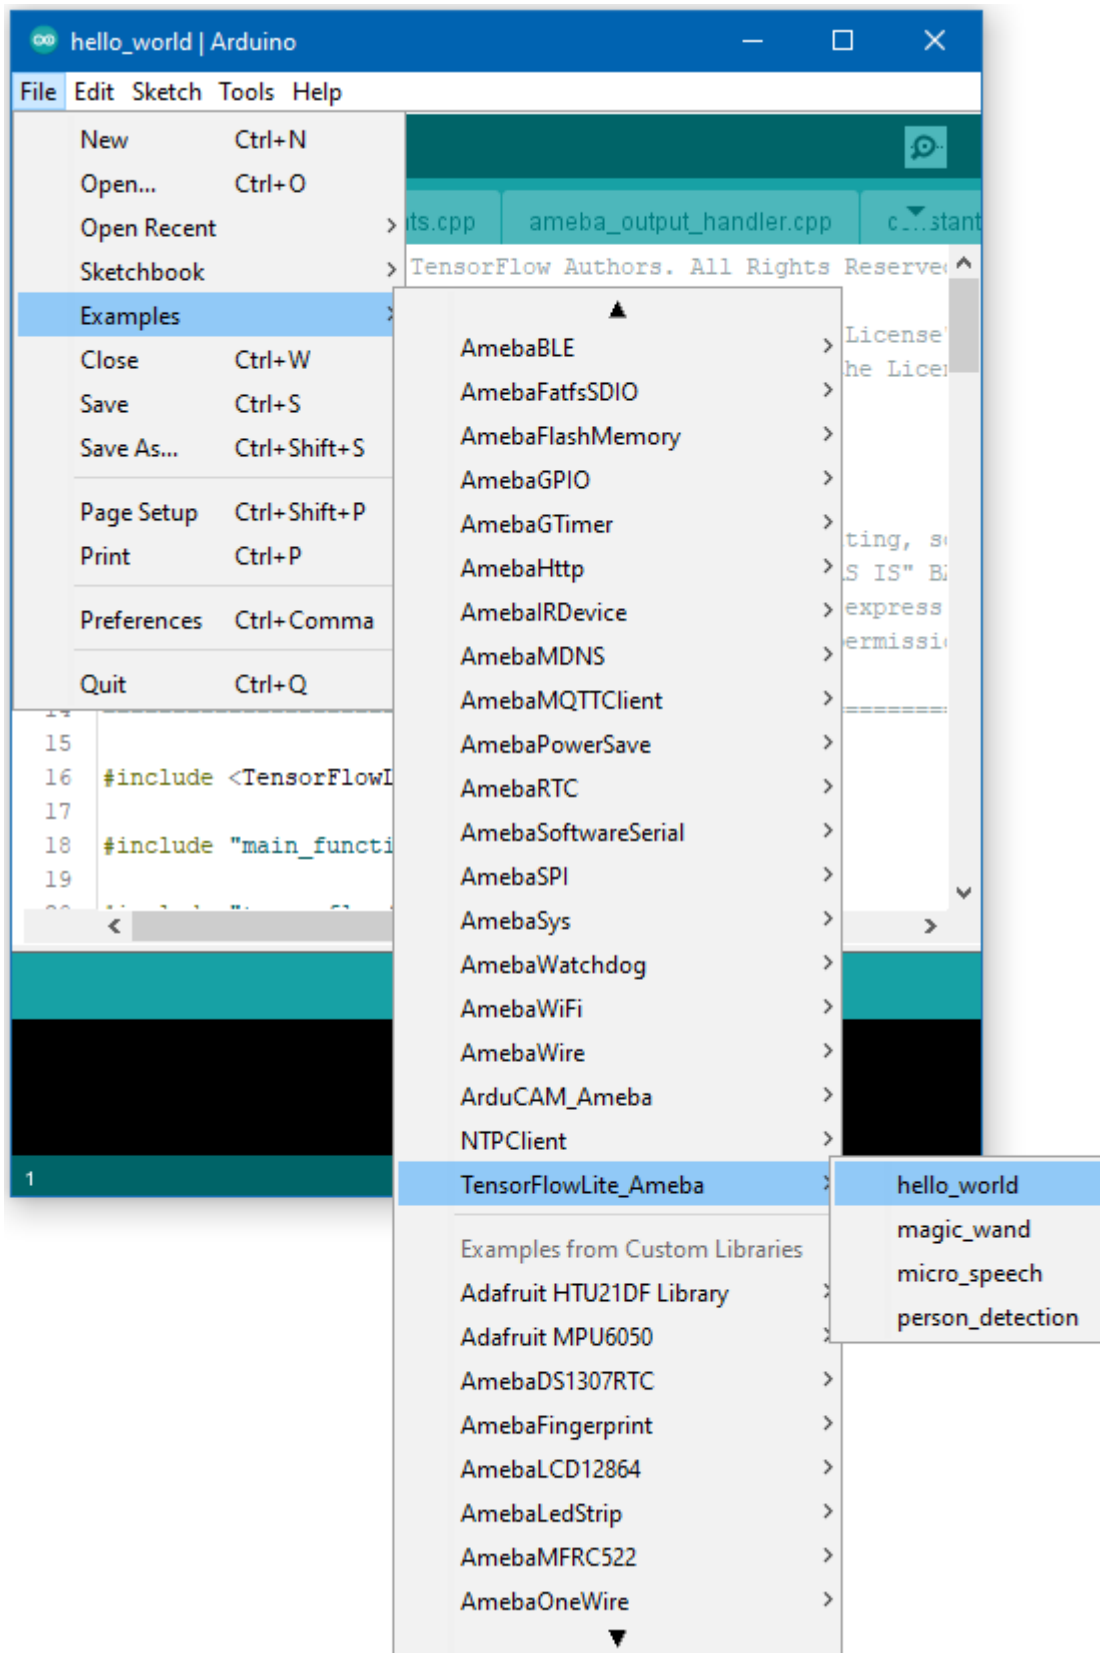

Upload the code and press the reset button on Ameba once the upload is finished.

Connect the LED to digital pin 10 and ground, ensuring that the polarity is correct. You should see the LED fade in and out rapidly.

In the Arduino serial plotter, you can see the output value of the Tensorflow model plotted as a graph, it should resemble a sine wave.

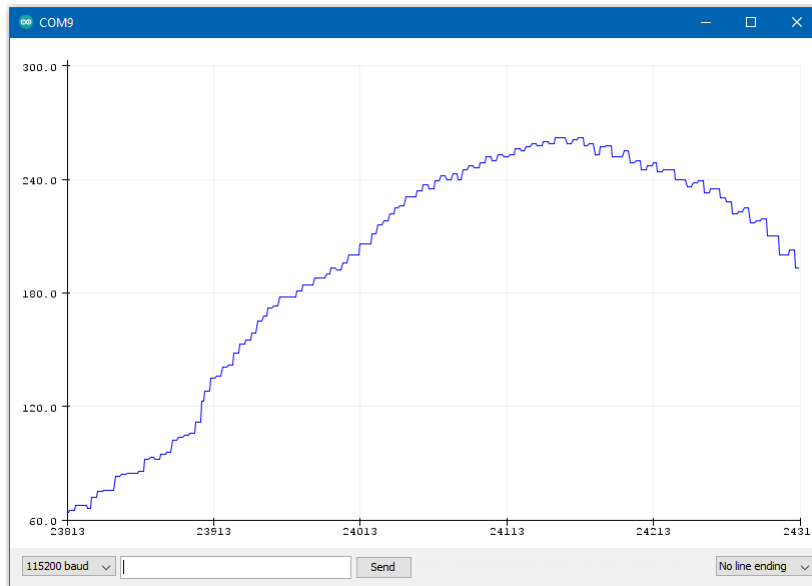

Code Reference

More information on TensorFlow Lite for Microcontrollers can be found at: <https://www.tensorflow.org/lite/microcontrollers>

TensorFlow Lite - Magic Wand

Materials


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Adafruit LSM9DS1 accelerometer
- LED x 2

Example

Procedure


RTL8722DM / RTL8722CSM Wiring Diagram:

Connect the accelerometer and LEDs to the RTL8722 board following the diagram.

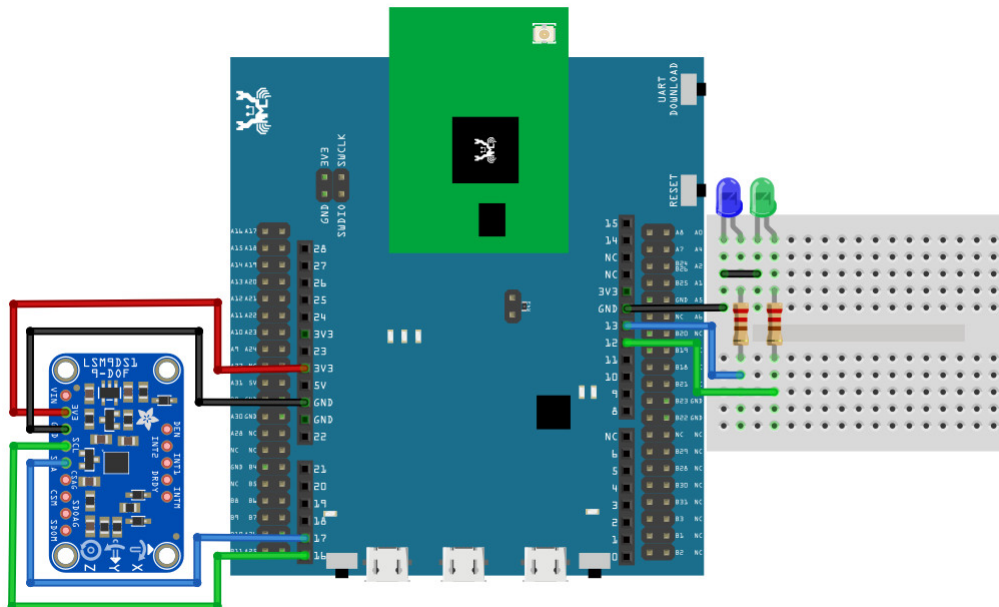

RTL8722DM MINI Wiring Diagram:

For RTL8722DM MINI, we will use the onboard LEDs on the board itself.

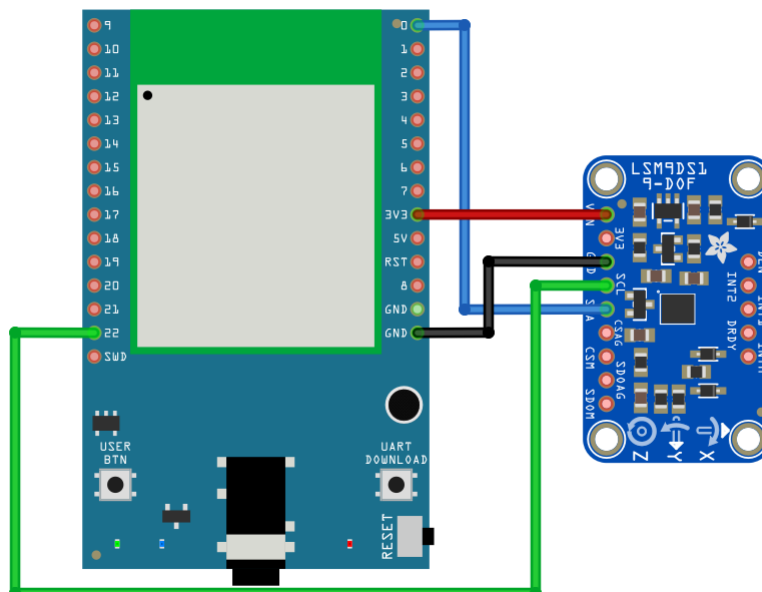


Download the Ameba customized version of TensorFlow Lite for Microcontrollers library at https://github.com/ambiot/ambd_arduino/tree/master/Arduino_zip_libraries.

Follow the instructions at <https://www.arduino.cc/en/guide/libraries> to install it.

Ensure that the patch files found at https://github.com/ambiot/ambd_arduino/tree/master/Ameba_misc/ are also installed.


In the Arduino IDE library manager, install the Arduino_LSM9DS1 library. This example has been tested with version 1.1.0 of the LSM9DS1 library.

Open the example, "Files" -> "Examples" -> "TensorFlowLite_Ameba" -> "magic_wand" .

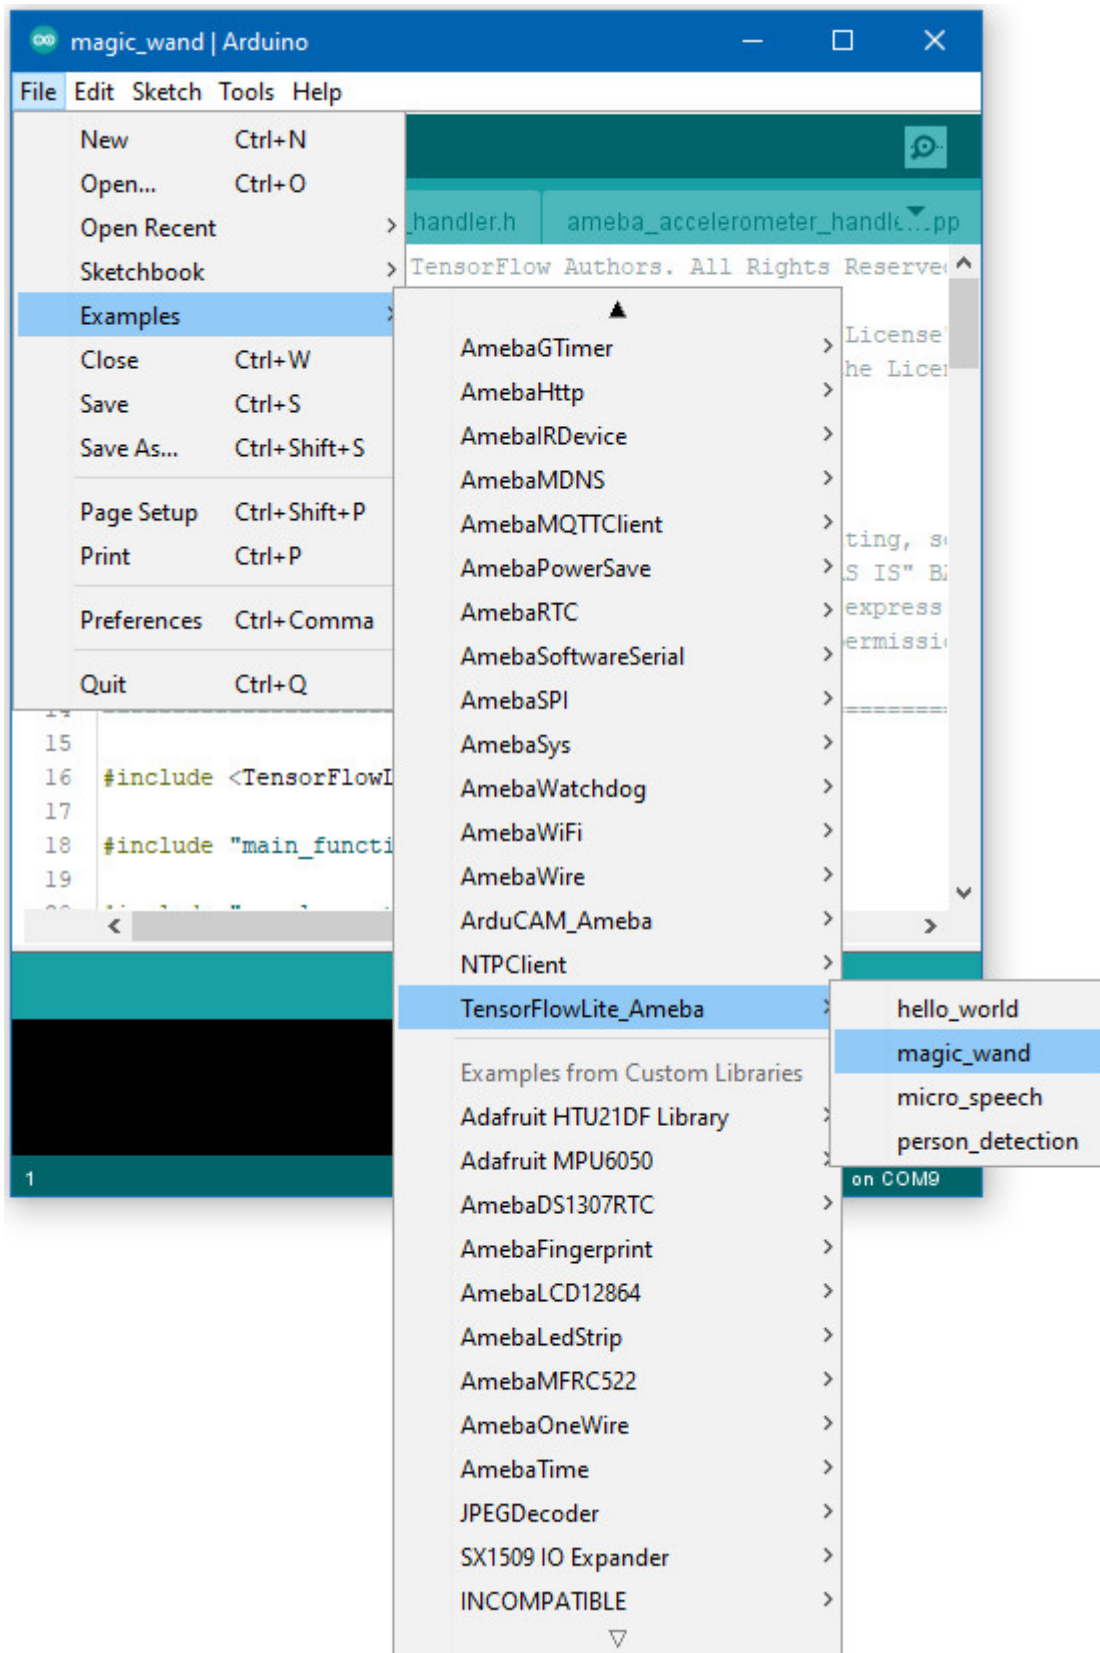

Upload the code and press the reset button on Ameba once the upload is finished.

Holding the accelerometer steady, with the positive x-axis pointing to the right and the positive z-axis pointing upwards, move it following the shapes as shown, moving it in a smooth motion over 1 to 2 seconds, avoiding any sharp movements.

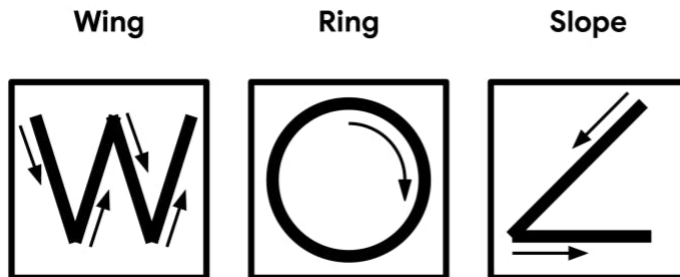

If the movement is recognised by the Tensorflow Lite model, you should see the same shape output to the Arduino serial monitor. Different LEDs will light up corresponding to different recognized gestures.

Note that the wing shape is easy to achieve, while the slope and ring shapes tend to be harder to get right.

The screenshot shows a serial monitor window titled 'COM9'. It displays a series of timestamps and gestures recognized by the model. The gestures are 'SLOPE' and 'WING'. The 'SLOPE' gesture is recognized multiple times, followed by a 'WING' gesture. The output is as follows:

```

12:12:38.969 ->
12:12:50.459 -> SLOPE:
12:12:50.459 -> *
12:12:50.459 -> *
12:12:50.459 -> *
12:12:50.459 -> *
12:12:50.459 -> *
12:12:50.459 -> *
12:12:50.459 -> *
12:12:50.459 -> *
12:12:50.459 -> *
12:12:50.459 -> * * * * *
12:12:50.459 ->
12:13:21.201 -> WING:
12:13:21.201 -> * * * * *
12:13:21.201 -> * * * * *
12:13:21.201 -> * * * * *
12:13:21.201 -> * * * * *
12:13:21.201 -> * * * * *
12:13:21.201 -> * * * * *
12:13:21.201 ->

```

The window also has a 'Send' button and a scroll bar. At the bottom, there are checkboxes for 'Autoscroll' and 'Show timestamp', and dropdown menus for 'Carriage return' and '115200 baud'. A 'Clear output' button is also present.

Code Reference

More information on TensorFlow Lite for Microcontrollers can be found at: <https://www.tensorflow.org/lite/microcontrollers>

TensorFlow Lite - Micro Speech

Preparation


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Adafruit PDM MEMS microphone
- LED x 4

Example

Procedure


RTL8722DM / RTL8722CSM Wiring Diagram:

Connect the microphone and LEDs to the RTL8722 board following the diagram.

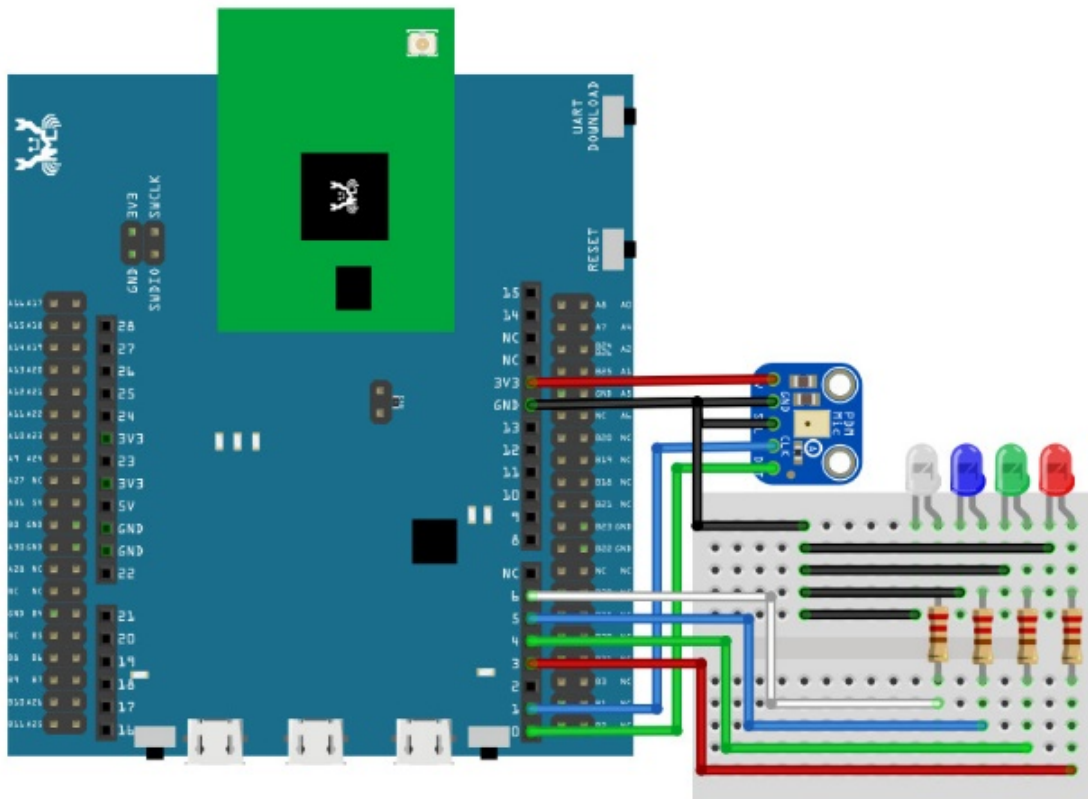

RTL8722DM MINI Wiring Diagram:

As RTL8722DM MINI have a built in microphone on the board, there is no need for any external microphone. For the LEDs, we will only connect two LEDs and then use the two onboard LEDs (Blue and Green).

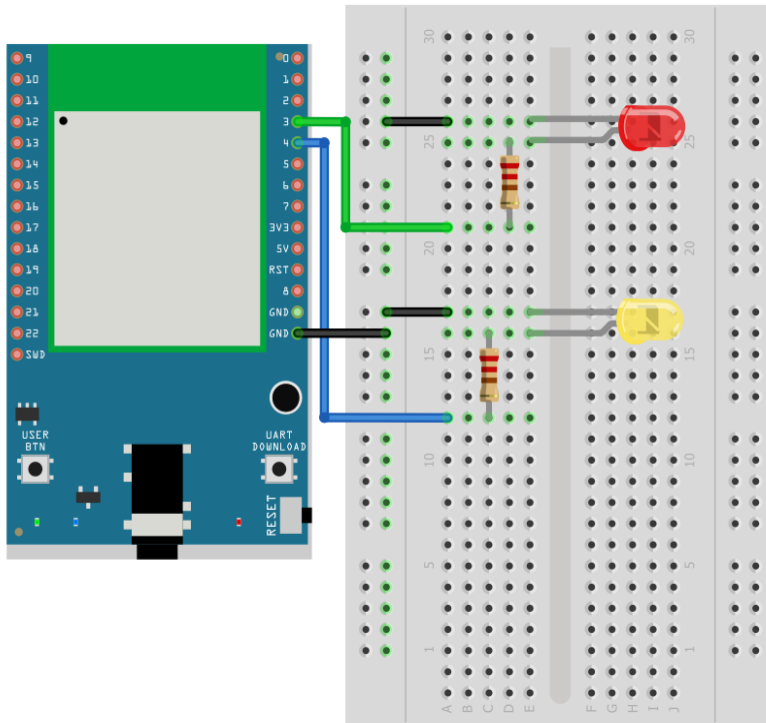

Download the Ameba customized version of TensorFlow Lite for Microcontrollers library at


https://github.com/ambiot/ambd_arduino/tree/master/Arduino_zip_libraries.

Follow the instructions at <https://www.arduino.cc/en/guide/libraries> to install it.

Ensure that the patch files found at https://github.com/ambiot/ambd_arduino/tree/master/Ameba_misc/ are also installed.

Open the example, "Files" -> "Examples" -> "TensorFlowLite_Ameba" -> "micro_speech"


.

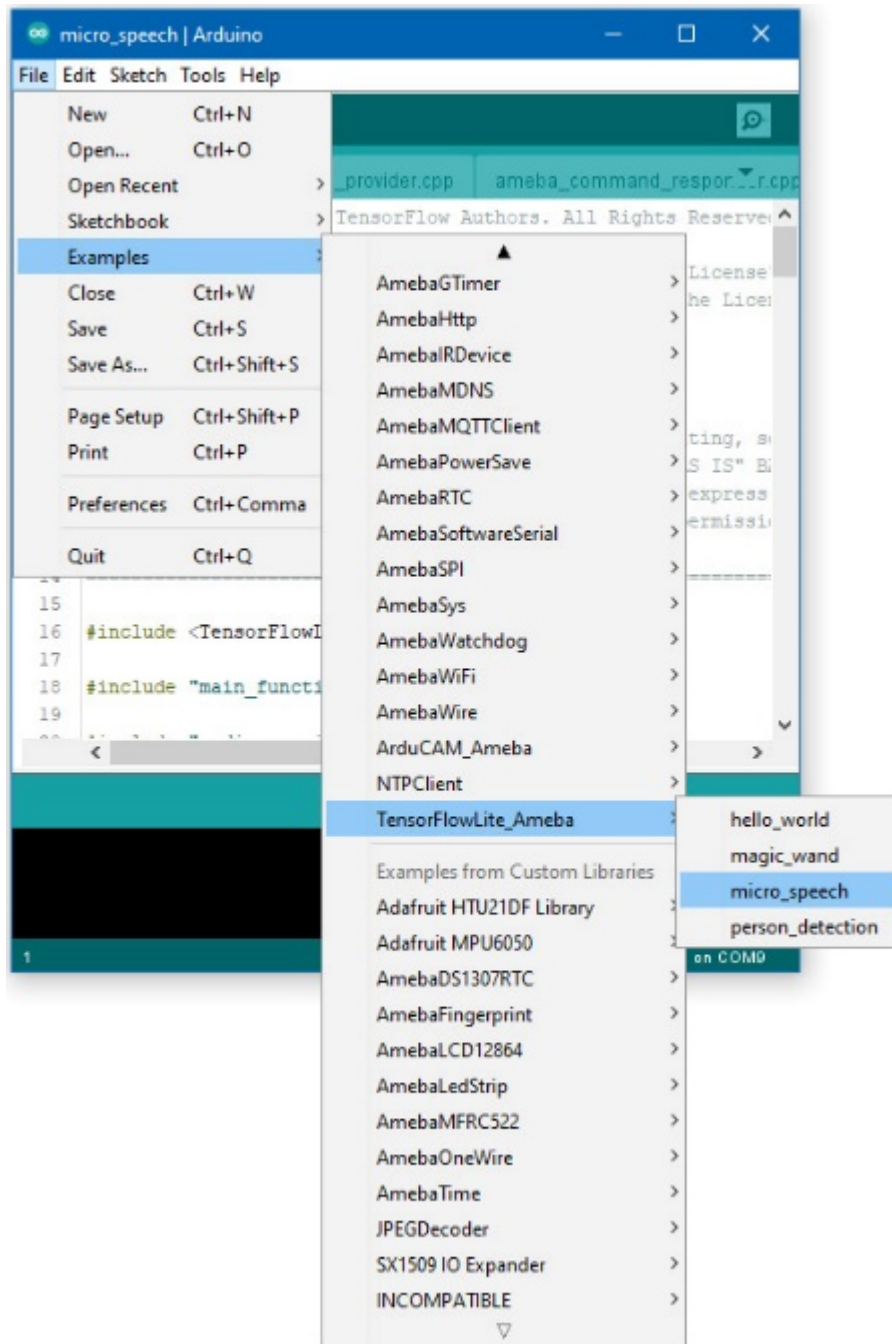

Upload the code and press the reset button on Ameba once the upload is finished.

Once it is running, you should see one of the LEDs flashing, indicating that it is processing audio. Saying the word “yes” will cause the green LED to light up. Saying the word “no” will cause the red LED to light up. If the word is not recognized, the blue LED will light up.

The inference results are also output to the Arduino serial monitor, which appear as follows:

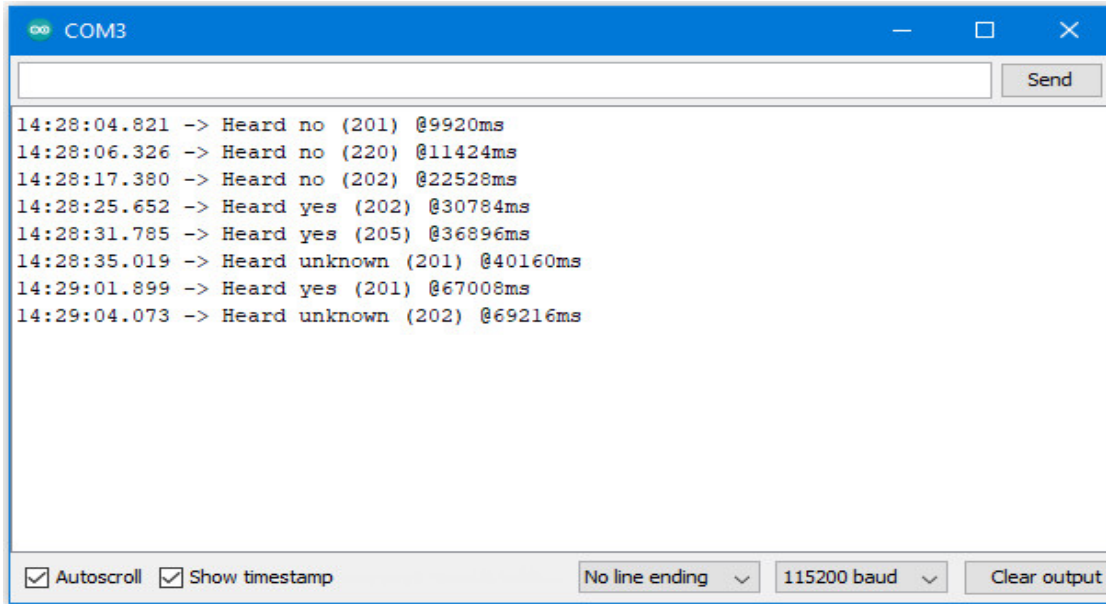

If you are having trouble in getting the words recognized, here are some tips:

- Ensure that your surroundings are quiet with minimal noise.
- Experiment with varying the distance of the microphone, starting with it at an arm's length.
- Experiment with different tones and volume when saying the words.
- Depending on how you pronounce the words, the characteristics of the microphone used, getting one keyword recognized may be easier than the other.

Code Reference

More information on TensorFlow Lite for Microcontrollers can be found at: <https://www.tensorflow.org/lite/microcontrollers>

TensorFlow Lite - Person Detection

Materials


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Arducam Mini 2MP Plus OV2640 SPI Camera Module x 1
- LED x 3

Example


Procedure

RTL8722DM / RTL8722CSM Wiring Diagram:

Connect the camera and LEDs to the RTL8722 board following the diagram.

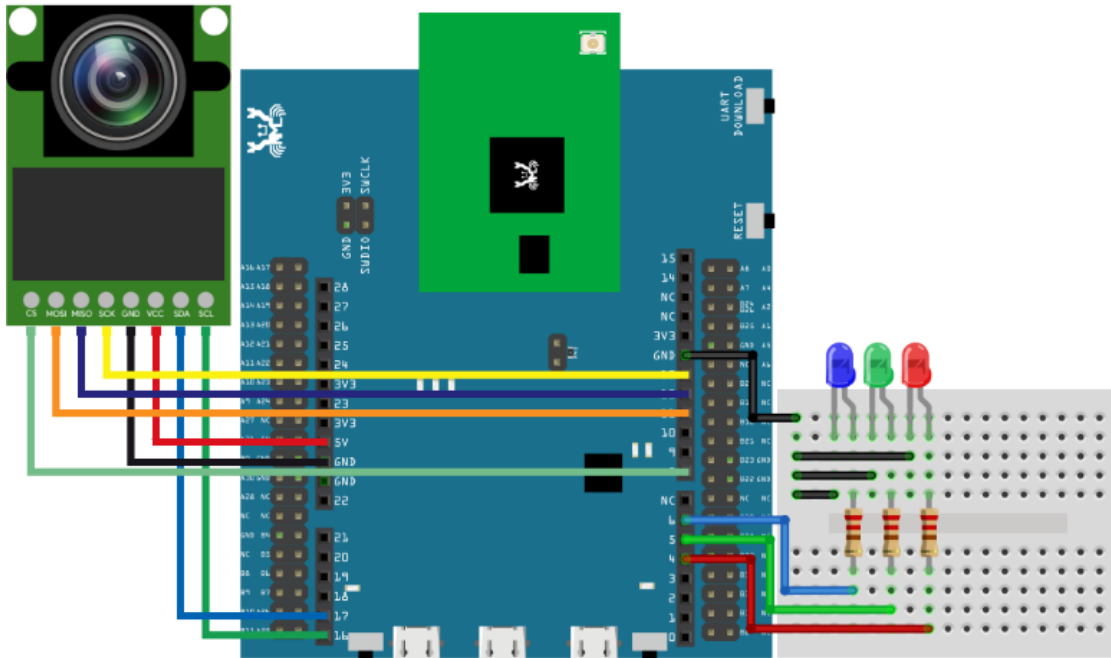

RTL8722DM MINI Wiring Diagram:

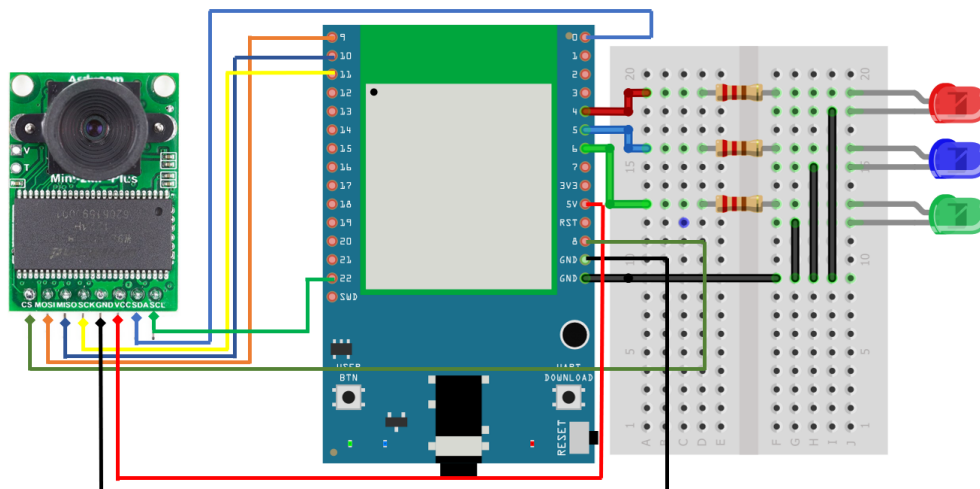

Download the Ameba customized version of TensorFlow Lite for Microcontrollers library at

https://github.com/ambiot/ambd_arduino/tree/master/Arduino_zip_libraries.

Follow the instructions at <https://www.arduino.cc/en/guide/libraries> to install it. Ensure that the patch files found at https://github.com/ambiot/ambd_arduino/tree/master/Ameba_misc/ are also installed.

You will also need to install the Ameba_ArduCAM library, found together with the TensorFlow Lite library.

In the Arduino IDE library manager, install the JPEGDecoder library. This example has been tested with version 1.8.0 of the JPEGDecoder library.


Once the library has installed, you will need to configure it to disable some optional components that are not compatible with the RTL8722DM. Open the following file:

```
Arduino/libraries/JPEGDecoder/src/User_Config.h
```

Make sure that both `#define LOAD_SD_LIBRARY` and `#define LOAD_SDFAT_LIBRARY` are commented out, as shown in this excerpt from the file:

```
//#define LOAD_SD_LIBRARY // Default SD Card library
//#define LOAD_SDFAT_LIBRARY // Use SdFat library instead, so SD Card SPI can be bit-
↳bashed
```


Open the example, "Files" -> "Examples" -> "TensorFlowLite_Ameba" -> "person_detection".

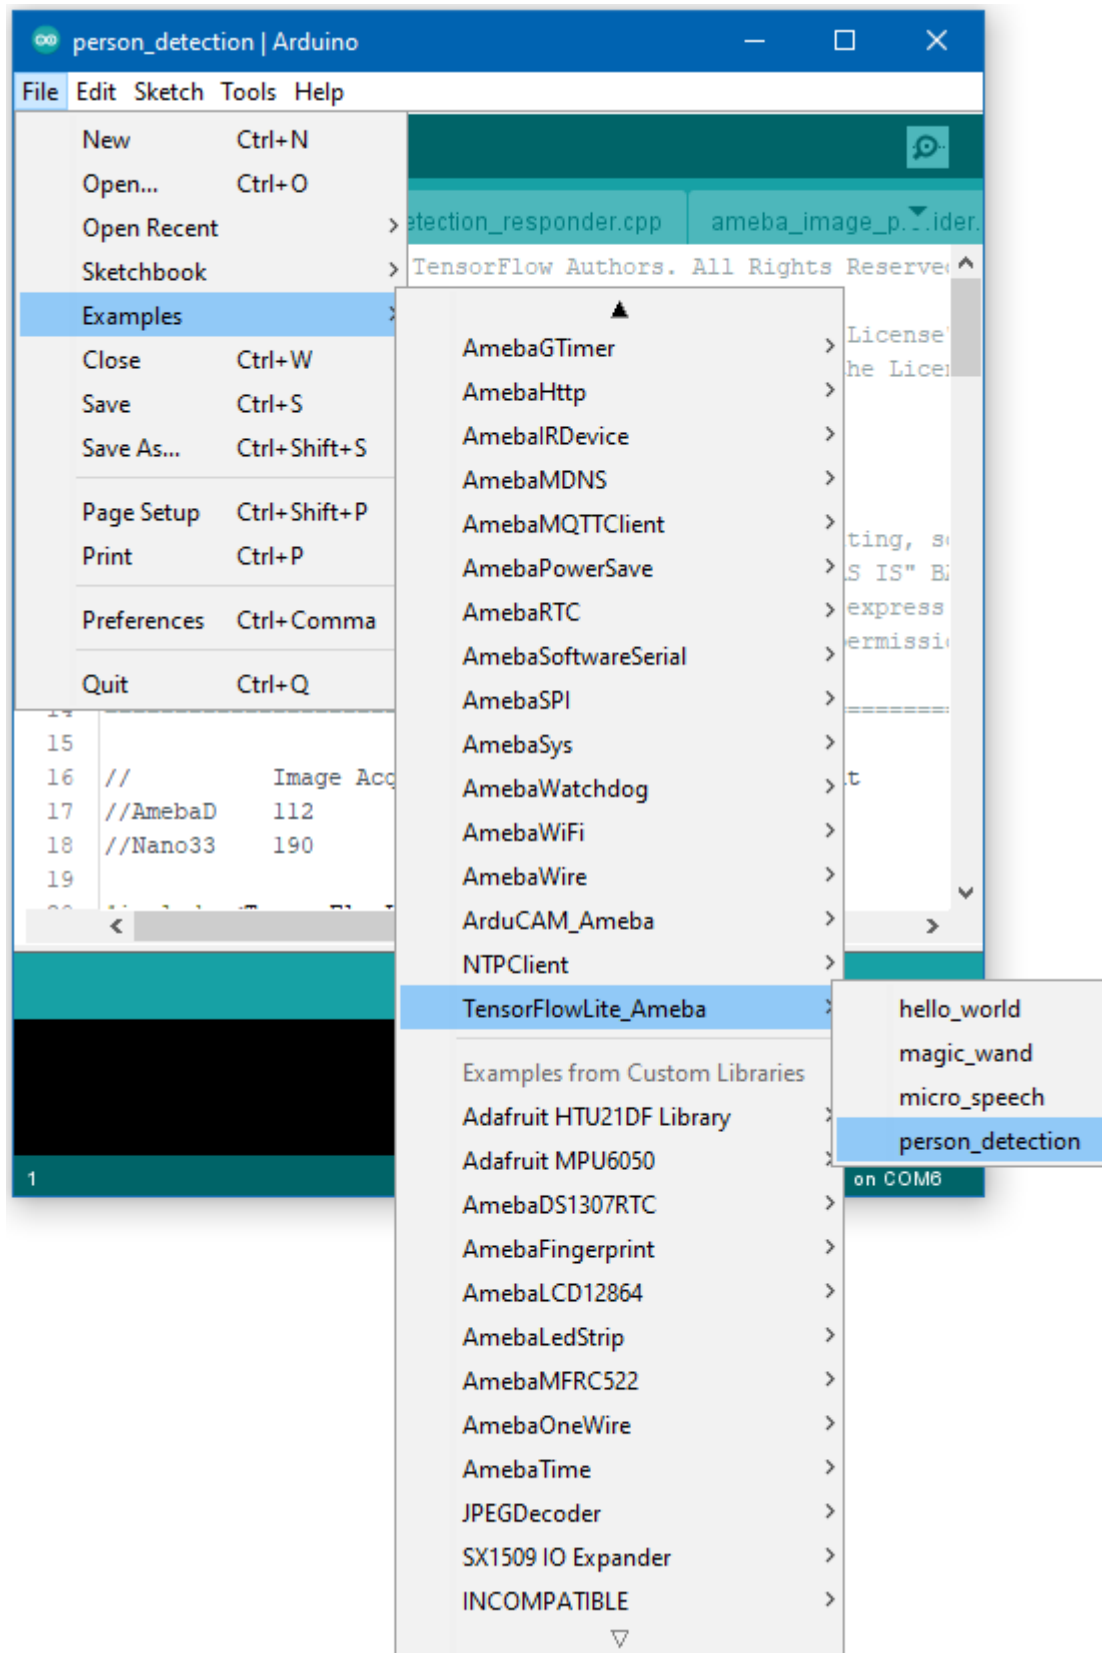

Upload the code and press the reset button on Ameba once the upload is finished.

Once it is running, you should see the blue LED flashing once every few seconds, indicating that it has finished processing an image. The red LED will light up if it determines that there is no person in the previous image captured, and the green LED will light up if it determines that there is a person.

The inference results are also output to the Arduino serial monitor, which appear as follows:

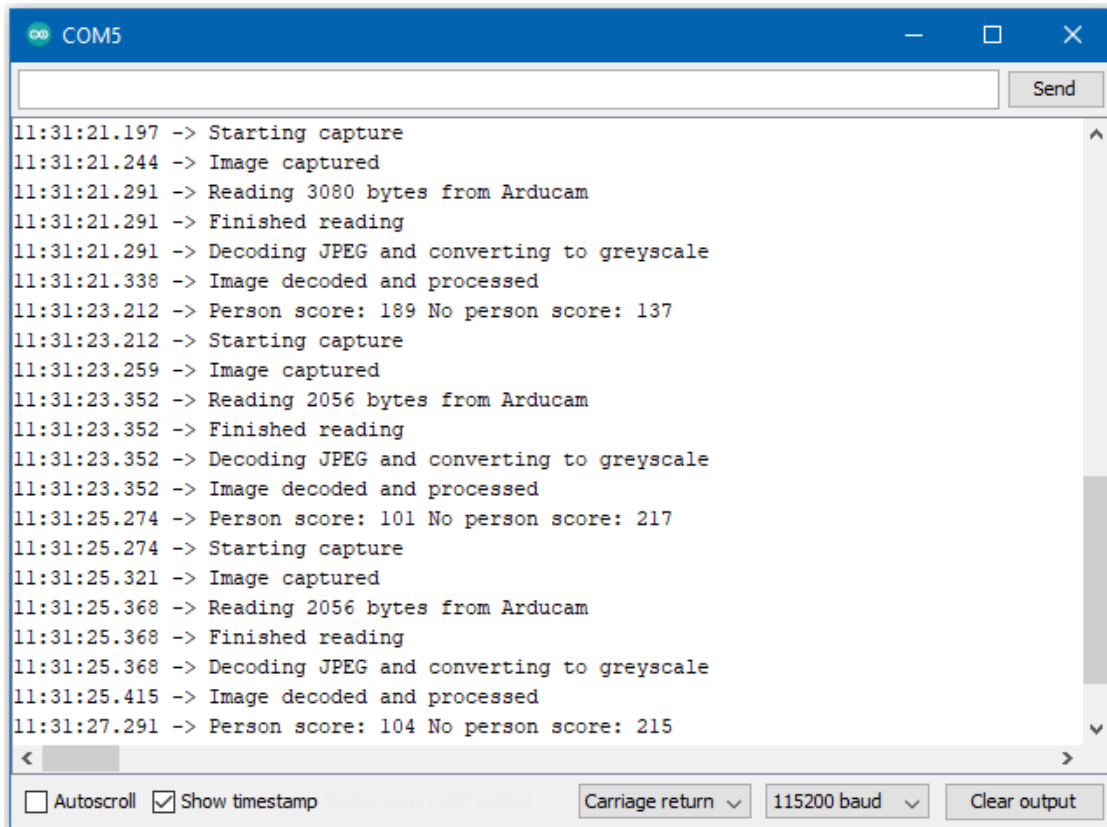

```
11:31:21.197 -> Starting capture
11:31:21.244 -> Image captured
11:31:21.291 -> Reading 3080 bytes from Arducam
11:31:21.291 -> Finished reading
11:31:21.291 -> Decoding JPEG and converting to greyscale
11:31:21.338 -> Image decoded and processed
11:31:23.212 -> Person score: 189 No person score: 137
11:31:23.212 -> Starting capture
11:31:23.259 -> Image captured
11:31:23.352 -> Reading 2056 bytes from Arducam
11:31:23.352 -> Finished reading
11:31:23.352 -> Decoding JPEG and converting to greyscale
11:31:23.352 -> Image decoded and processed
11:31:25.274 -> Person score: 101 No person score: 217
11:31:25.274 -> Starting capture
11:31:25.321 -> Image captured
11:31:25.368 -> Reading 2056 bytes from Arducam
11:31:25.368 -> Finished reading
11:31:25.368 -> Decoding JPEG and converting to greyscale
11:31:25.415 -> Image decoded and processed
11:31:27.291 -> Person score: 104 No person score: 215
```

Code Reference

More information on TensorFlow Lite for Microcontrollers can be found at: <https://www.tensorflow.org/lite/microcontrollers>

AmebaMotors - Use Ameba as Server to Control Motors

Introduction to AmebaMotors

AmebaMotors is a library which provides API related to controlling motors. Please download the library: [AmebaMotors](#) And add the library to Ameba: <https://www.arduino.cc/en/Guide/Libraries#toc4>

Materials

- Ameba D [RTL8722DM / RTL8722CSM] x 1
- L298N H-Bridge x 1
- 4-wheel motorcar or 2-wheel motorcar+Universal wheel

Example

Procedure

In this example, we connect Ameba to WiFi and use Ameba as server, the user can control a 4-wheel/2-wheel motorcar through a webpage.

First, connect Ameba to the L298N H-Bridge and the motorcar.


To know more about motor movement and the technical details of the L298N H-Bridge, please check out this [link](https://www.amebaiot.com/en/ameba-arduino-amebamotors-basic/) <<https://www.amebaiot.com/en/ameba-arduino-amebamotors-basic/>>.

Open the example, “Files” -> “Examples” -> “AmebaWiFi” -> “WiFiControlCar” .

You will see we use the following pins in the example:

ENA	IN1	IN2	IN3	IN4	ENB
8	9	10	11	12	13

Wiring:

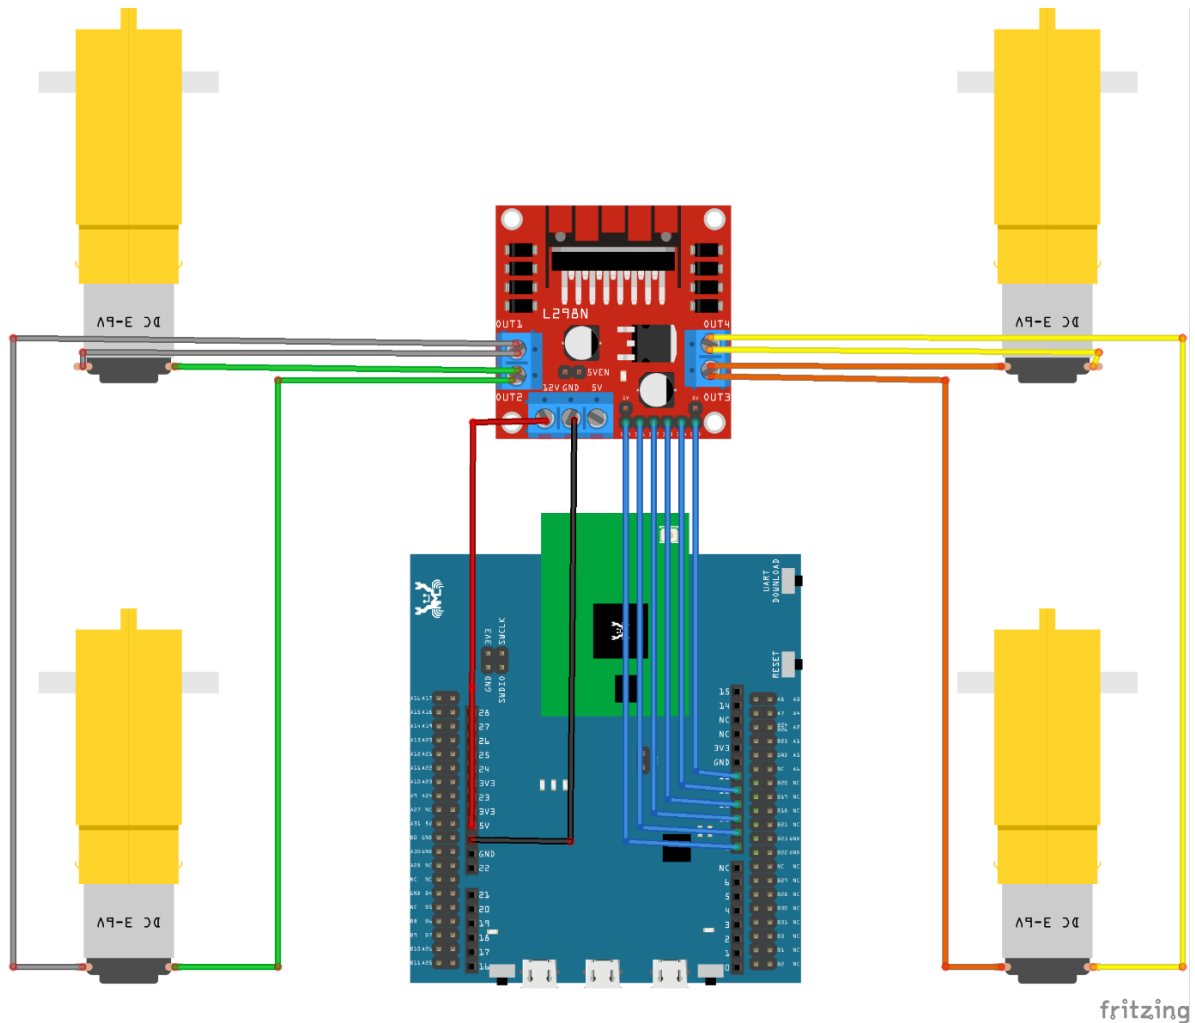


注解:

- We connect Ameba 5V to L298N +5V to supply power. However, not every L298N accepts 5V power supply, if this does not work, please connect L298N +12V to other power supply (e.g., +12V) and use L298N +5V to supply power to Ameba.
- The correct wiring of the motor depends on each model (may be opposite). Please run the test program first, make sure it runs correctly before assembling the motorcar.
- For convenience purposes, it's recommended to use Dupont line to organize the wiring of motors and L298N.

Every time you modify your program, please remember to unplug the power of L298N to avoid the motor running unexpectedly. Connect Ameba to power, upload the program, and then connect L298N to power when you are going to test the program.


Then, upload the code to Ameba

In the sample code, modify the highlighted snippet to corresponding information.

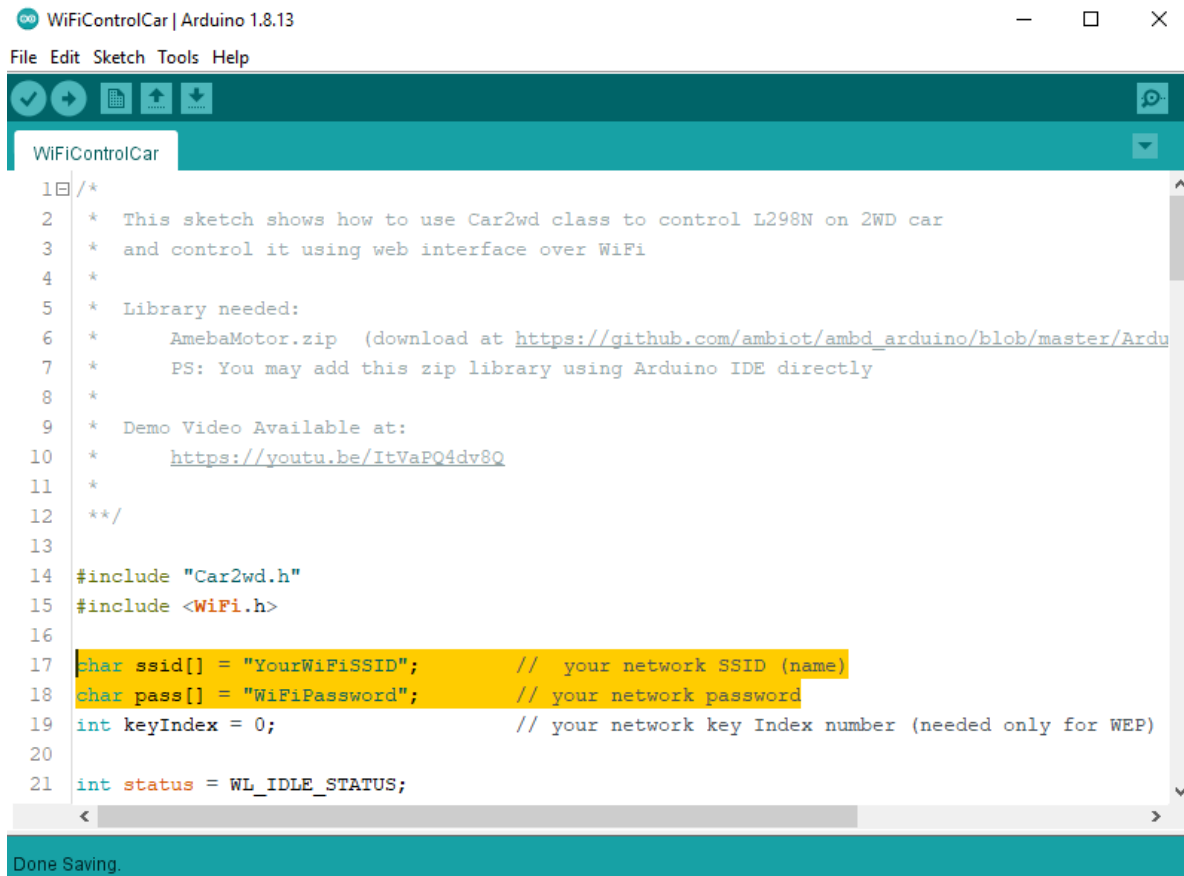

```
WiFiControlCar | Arduino 1.8.13
File Edit Sketch Tools Help
WiFiControlCar
1 // *
2 * This sketch shows how to use Car2wd class to control L298N on 2WD car
3 * and control it using web interface over WiFi
4 *
5 * Library needed:
6 *   AmebaMotor.zip (download at https://github.com/ambiot/ambd\_arduino/blob/master/Ardu
7 *   PS: You may add this zip library using Arduino IDE directly
8 *
9 * Demo Video Available at:
10 *   https://youtu.be/ItVaPQ4dv8Q
11 *
12 **/
13
14 #include "Car2wd.h"
15 #include <WiFi.h>
16
17 char ssid[] = "YourWiFiSSID"; // your network SSID (name)
18 char pass[] = "WiFiPassword"; // your network password
19 int keyIndex = 0; // your network key Index number (needed only for WEP)
20
21 int status = WL_IDLE_STATUS;
Done Saving.
```

Upload the code and press the reset button on Ameba. When the connection is established, you will see the message “To see this page in action, open a browser to <http://xxx.xxx.xxx.xxx>” in the Arduino IDE, as shown in the figure:

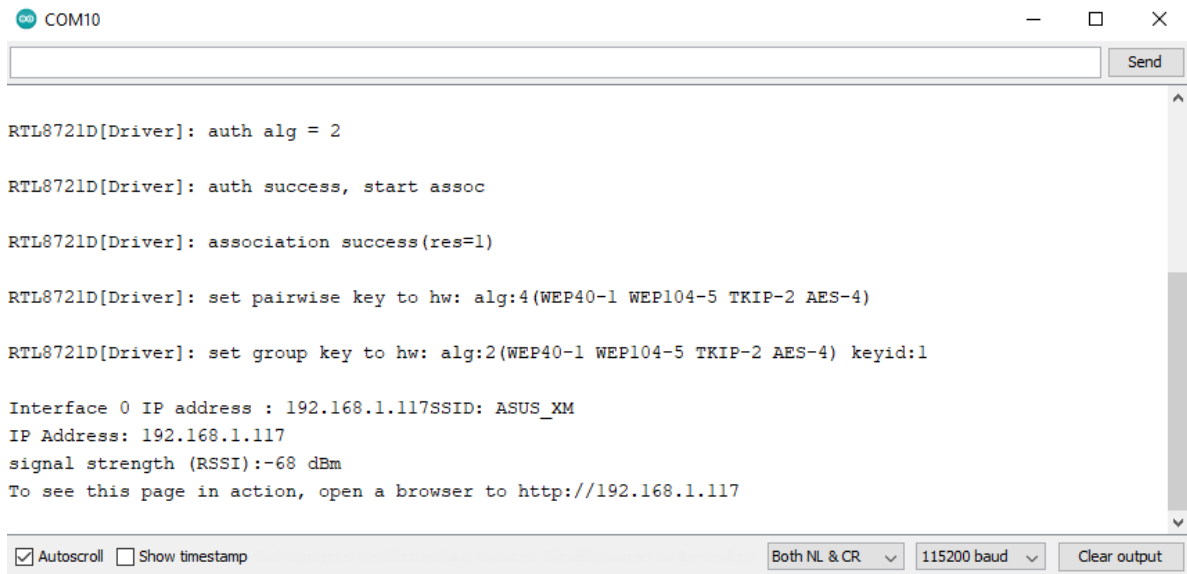

```
COM10

RTL8721D[Driver]: auth alg = 2

RTL8721D[Driver]: auth success, start assoc

RTL8721D[Driver]: association success(res=1)


RTL8721D[Driver]: set pairwise key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4)

RTL8721D[Driver]: set group key to hw: alg:2(WEP40-1 WEP104-5 TKIP-2 AES-4) keyid:1

Interface 0 IP address : 192.168.1.117SSID: ASUS_XM
IP Address: 192.168.1.117
signal strength (RSSI):-68 dBm
To see this page in action, open a browser to http://192.168.1.117

☒ Autoscroll ☐ Show timestamp Both NL & CR 115200 baud Clear output
```

Next, open the browser of a computer or a cell phone under the same WiFi domain, enter the address in the message.

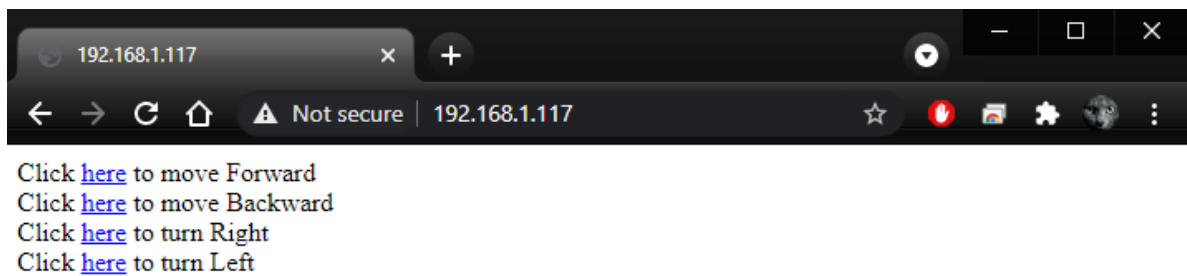

In the webpage, you can press the corresponding button to control the motor car in any of the 4 directions.

Demo Video

Code Reference

Use `WiFi.begin()` to establish WiFi connection. <https://www.arduino.cc/en/Reference/WiFiBegin>

To get the information of a WiFi connection:

Use `WiFi.SSID()` to get SSID of the current connected network. <https://www.arduino.cc/en/Reference/WiFiSSID>

Use `WiFi.RSSI()` to get the signal strength of the connection. <https://www.arduino.cc/en/Reference/WiFiRSSI>

Use `WiFi.localIP()` to get the IP address of Ameba. <https://www.arduino.cc/en/Reference/WiFiLocalIP>

Use `WiFiServer server()` to create a server that listens on the specified port. <https://www.arduino.cc/en/Reference/WiFiServer>

Use `server.begin()` to tell the server to begin listening for incoming connections. <https://www.arduino.cc/en/Reference/WiFiServerBegin>

Use `server.available()` to get a client that is connected to the server and has data available for reading. <https://www.arduino.cc/en/Reference/WiFiServerAvailable>

Use `client.connected()` to get whether or not the client is connected. <https://www.arduino.cc/en/Reference/WiFiClientConnected>

Use `client.println()` to print data followed by a carriage return and newline. <https://www.arduino.cc/en/Reference/WiFiClientPrintln>

Use `client.print()` to print data to the server that a client is connected to. <https://www.arduino.cc/en/Reference/WiFiClientPrint>

Use `client.available()` to return the number of bytes available for reading. <https://www.arduino.cc/en/Reference/WiFiClientAvailable>

Use `client.read()` to read the next byte received from the server the client is connected to. <https://www.arduino.cc/en/Reference/WiFiClientRead>

Use `client.stop()` to disconnect from the server the client is connected to. <https://www.arduino.cc/en/Reference/WiFiClientStop>

1.1.4 Board HDK

EVB

- **HDK-AMEBAD_MB_4V2**
 - Layout
 - Schematic
-

- **HDK-AMEBAD_MB_4V0**
 - Layout
 - Schematic
-

RTL8722DM Module

- **HDK-AM8722DM01_6V2_WI LPF**
 - Layout
 - Schematic
-

- **HDK-AM8722DM01_6V1_WI LPF**
 - Layout
 - Schematic
-

- **HDK-AM8722DM01_4V1**
 - Layout
 - Schematic
-

1.1.5 API Documents

RTL8722DM ARDUINO Online API Documents

Analog

Class AmebaServo

AmebaServo Class

Description

Defines a class of manipulating servo motors connected to Arduino pins.

Syntax

```
class AmebaServo
```

Members

Public Constructors	
AmebaServo::AmebaServo	Constructs an AmebaServo object.
Public Methods	
AmebaServo::attach	Attach the given pin to the next free channel.
AmebaServo::detach	Detach the servo.
AmebaServo::write	Write value, if the value is < 200 it's treated as an angle, otherwise as pulse-width in microseconds.
AmebaServo::writeMicroseconds	Write pulse width in microseconds.
AmebaServo::read	Output current pulse width as an angle between 0 and 180 degrees.
AmebaServo::readMicroseconds	Output current pulse width in microseconds for this servo.
AmebaServo::attached	Check if the servo is attached.

AmebaServo::attach

Description

Attach the given pin to the next free channel, sets pinMode (including minimum and maximum values for writes), returns channel number, or 0 if failure.

Syntax

```
uint8_t attach(int pin);  
  
uint8_t attach(int pin, int min, int max);
```

Parameters

pin: The Arduino pin number to be attached.

min: Minimum values for writes.

max: Maximum values for writes.

Returns

The function returns channel number or 0

Example Code

Example: ServoSweep

The code demos servo motor sweeping from 0 degrees to 180 degrees then sweep back to 0 degrees in the step of 1 degree.

列表 1: ServoSweep.ino

```

1  /* Sweep
2  by BARRAGAN < http://barraganstudio.com >
3  This example code is in the public domain.
4  modified 8 Nov 2013
5  by Scott Fitzgerald
6  http://www.arduino.cc/en/Tutorial/Sweep
7  refined 2016/03/18 by Realtek
8  */
9
10 #include "AmebaServo.h"
11
12 // create servo object to control a servo
13 // 4 servo objects can be created correspond to PWM pins
14
15 AmebaServo myservo;
16
17 // variable to store the servo position
18 int pos = 0;
19
20 void setup() {
21   #if defined(BOARD_RTL8195A)
22     // attaches the servo on pin 9 to the servo object
23     myservo.attach(9);
24   #elif defined(BOARD_RTL8710)
25     // attaches the servo on pin 13 to the servo object
26     myservo.attach(13);
27   #elif defined(BOARD_RTL8721D)
28     // attaches the servo on pin 8 to the servo object
29     myservo.attach(8);
30   #else
31     // attaches the servo on pin 9 to the servo object

```

(下页继续)

(续上页)

```
32     myservo.attach(9);
33 #endif
34 }
35
36 void loop() {
37     // goes from 0 degrees to 180 degrees in steps of 1 degree
38     for (pos = 0; pos <= 180; pos += 1) {
39         // tell servo to go to position in variable 'pos'
40         myservo.write(pos);
41         // waits 15ms for the servo to reach the position
42         delay(15);
43     }
44     // goes from 180 degrees to 0 degrees
45     for (pos = 180; pos >= 0; pos -= 1) {
46         // tell servo to go to position in variable 'pos'
47         myservo.write(pos);
48         // waits 15ms for the servo to reach the position
49         delay(15);
50     }
51 }
```

Notes and Warnings

Every time must include the header file “AmebaServo.h” in front of the project to use the class function.

AmebaServo::detach

Description

Detach the servo.

Syntax

```
void AmebaServo::detach(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Every time must include the header file “AmebaServo.h” in front of the project to use the class function.

AmebaServo::write

Description

Write an integer value to the function, if the value is < 200, it's being treated as an angle, otherwise as pulse-width in microseconds.

Syntax

```
void AmebaServo::write(int value);
```

Parameters

value: The value < 200 its treated as an angle; otherwise as pulse width in microseconds.

Returns

The function returns nothing.

Example Code

Example: ServoSweep

The code demos servo motor sweeping from 0 degrees to 180 degrees then sweep back to 0 degrees in the step of 1 degree. Please refer to code in “AmebaServo:: attach” section.

Notes and Warnings

Every time must include the header file “AmebaServo.h” in front of the project to use the class function.

AmebaServo::writeMicroseconds

Description

Write pulse width to the servo in microseconds.

Syntax

```
void AmebaServo::writeMicroseconds(int value);
```

Parameters

value: Write value the pulse width in microseconds.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Every time must include the header file “AmebaServo.h” in front of the project to use the class function.

AmebaServo::read

Description

The function reads current pulse width and returns as an angle between 0 and 180 degrees.

Syntax

```
int AmebaServo::read(void);
```

Parameters

The function requires no input parameter.

Returns

The pulse width as an angle between 0 ~ 180 degrees.

Example Code

NA

Notes and Warnings

Every time must include the header file “AmebaServo.h” in front of the project to use the class function.

AmebaServo::readMicroseconds

Description

The function returns a Boolean value “true” if this servo is attached, otherwise returns “false” .

Syntax

```
int AmebaServo::readMicroseconds(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns current servo pulse width in microseconds.

Example Code

NA

Notes and Warnings

Every time must include the header file “AmebaServo.h” in front of the project to use the class function.

AmebaServo::attached

Description

It returns true if this servo is attached, otherwise false.

Syntax

```
bool AmebaServo::attached(void);
```


Parameters

The function requires no input parameter.

Returns

The function returns a Boolean value as true or false.

Example Code

Example: ServoSweep

The code demos servo motor sweeping from 0 degrees to 180 degrees then sweep back to 0 degrees in the step of 1 degree. Please refer to code in “AmebaServo:: attach” section.

Notes and Warnings

Every time must include the header file “AmebaServo.h” in front of the project to use the class function.

AudioCodec**Class AudioCodec****Description**

A class used for general control and management of the hardware audio codec functions.

Syntax

```
class AudioCodec
```

Members**Public Constructors**

The public constructor should not be used as this class is intended to be a singleton class. Access member functions using the object instance named Codec.

Public Methods

AudioCodec::begin	Configure and start the audio codec for transmit and receive operation
AudioCodec::end	Stop all audio codec operation
Au- dioCodec::getBufferSize	Get the byte size of a single page of the audio codec buffer
AudioCodec::setSampleRate	Configure the audio codec transmit and receive sampling rate
AudioCodec::setBitDepth	Configure the audio codec transmit and receive bit depth (bits per sample)
Au- dioCodec::setChannelCount	Configure the audio codec transmit and receive channel count
Au- dioCodec::setInputMicType	Configure for analog or digital input microphone type
Au- dioCodec::setInputLRMux	Configure input left right channel multiplexing
AudioCodec::setDMicBoost	Configure boost gain for digital microphone input
AudioCodec::setAMicBoost	Configure boost gain for analog microphone input
AudioCodec::setADCGain	Configure gain of ADC used to acquire analog input
AudioCodec::muteInput	Mute input audio data stream
Au- dioCodec::setOutputVolume	Configure output audio volume
AudioCodec::muteOutput	Mute output audio
AudioCodec::writeAvailable	Check for free buffer page available for data write
AudioCodec::writeDataPage	Write audio data to an available buffer page
AudioCodec::readAvailable	Check for buffer page with new data available for read
AudioCodec::readDataPage	Read audio data from a ready buffer page
Au- dioCodec::setWriteCallback	Set a callback function to be notified when a free buffer page is available for write
Au- dioCodec::setReadCallback	Set a callback function to be notified when a buffer page with new data is available for read

AudioCodec::begin**Description**

Configure and start the audio codec for transmit and receive operation.

Syntax

```
void begin(bool input, bool output);
```

Parameters

input: enable audio codec data input

output: enable audio codec data output

Returns

The function returns nothing.

Example Code

Example: BasicInputOutput

Notes and Warnings

AudioCodec::end

Description

Stop all audio codec operation.

Syntax

```
void end();
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

AudioCodec::getBufferPageSize

Description

Get the byte size of a single page of the audio codec buffer.

Syntax

```
uint32_t getBufferPageSize();
```

Parameters

The function requires no input parameter.

Returns

The size of a audio codec buffer page, in number of bytes.

Example Code

NA

Notes and Warnings

The AudioCodec class includes a transmit and receive buffer to store audio sample data while transferring to and from the DAC output and ADC input. The buffer is divided into pages of fixed size, and audio data can be read and written

one page at a time. Depending on the configured bit depth (bits per audio sample) and channel count, a buffer page may contain a different number of audio samples.

AudioCodec::setSampleRate

Description

Configure the audio codec transmit and receive sampling rate.

Syntax

```
void setSampleRate(uint32_t sampleRate);
```

Parameters

sampleRate: desired audio codec sampling rate in Hz. Default value of 48000. Supported values: 8000, 16000, 32000, 44100, 48000, 88200, 96000.

Returns

The function returns nothing.

Example Code

Example: BasicInputOutput

Notes and Warnings

High sample rates above 48000Hz will require frequent buffer reads and writes to keep up with the large amount of data input and output. If there is insufficient processing time dedicated to this task, audio quality will be degraded.

AudioCodec::setBitDepth

Description

Configure the audio codec transmit and receive bit depth (bits per sample).

Syntax

```
void setBitDepth(uint8_t bitDepth);
```

Parameters

bitDepth: desired number of bits per sample. Default value of 16. Supported values: 8, 16, 24.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Setting a bit depth of 24 bits per sample will require 32 bits (4 bytes) of buffer space for storing each sample, with the most significant byte ignored.

AudioCodec::setChannelCount

Description

Configure the audio codec transmit and receive channel count.

Syntax

```
void setChannelCount(uint8_t monoStereo);
```

Parameters

monoStereo: number of channels. Default value of 1. Supported values: 1, 2.

Returns

The function returns nothing.

Example Code

Example: BasicInputOutput

Notes and Warnings

AudioCodec::setInputMicType

Description

Configure for analog or digital input microphone type.

Syntax

```
Void setInputMicType(Mic_Type micType);
```

Parameters

micType: Input microphone type. Default value ANALOGMIC. Valid values:

- ANALOGMIC –microphone with an analog output
- PDMMIC –digital microphone with a PDM output

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

For analog single-ended output, connect to PA_4 for the left channel and PA_2 for the right channel.

For digital PDM output, connect the PDM clock to PB_1 and PDM data to PB_2.

AudioCodec::setInputLRMux

Description

Configure input left right channel multiplexing.

Syntax

```
void setInputLRMux(uint32_t mux);
```

Parameters

mux: desired left right audio channel multiplexing setting. Default value RX_CH_LR. Valid values:

- RX_CH_LR
- RX_CH_RL
- RX_CH_LL
- RX_CH_RR

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

In mono channel mode, both RX_CH_LR and RX_CH_LL will result in the audio codec sampling input data from the left channel microphone. Similarly, both RX_CH_RL and RX_CH_RR will result in the audio codec sampling input data from the right channel microphone.

In stereo channel mode, RX_CH_RL will switch the positions of input data sampled from the microphones. RX_CH_RR and RX_CH_LL will result in duplicated samples from the right and left microphones respectively.** **

AudioCodec::setDMicBoost**Description**

Configure boost gain for digital microphone input.

Syntax

```
void setDMicBoost(uint32_t leftBoost, uint32_t rightBoost);
```

Parameters

leftBoost: boost gain for left channel digital microphone input

rightBoost: boost gain for right channel digital microphone input

Valid boost gain values:

- 0 : 0dB
- 1 : 12dB
- 2 : 24dB

- 3 : 36dB

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings**AudioCodec::setAMicBoost****Description**

Configure boost gain for analog microphone input.

Syntax

```
void setAMicBoost(uint32_t leftBoost, uint32_t rightBoost);
```

Parameters

leftBoost: boost gain for left channel analog microphone input

rightBoost: boost gain for right channel analog microphone input

Valid boost gain values:

- 0 : 0dB
- 1 : 20dB
- 2 : 30dB
- 3 : 40dB

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Only use this function if additional gain is required after using setADCGain function.

AudioCodec::setADCGain**Description**

Configure gain of ADC used to acquire analog input.

Syntax

```
void setADCGain(uint32_t leftGain, uint32_t rightGain);
```

Parameters

leftGain: Gain for left channel ADC

rightGain: Gain for right channel ADC

Valid value range is from 0x00 to 0x7f. Gain increases by 0.375dB for every increment in value:

- 0x00 : -17.625dB
- 0x01 : -17.25dB
- 0x2f : 0dB
- 0x30 : 0.375dB
- 0x7f : 30dB

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

AudioCodec::muteInput

Description

Mute input audio data stream.

Syntax

```
void muteInput(uint8_t leftMute, uint8_t rightMute);
```

Parameters

leftMute: 1 to mute left channel input, 0 to unmute

rightMute: 1 to mute right channel input, 0 to unmute

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

AudioCodec::setOutputVolume

Description

Configure output audio volume.

Syntax

```
void setOutputVolume(uint8_t leftVol, uint8_t rightVol);
```

Parameters

leftVol: left channel output volume

rightVol: right channel output volume

Valid value ranges from 0 to 100, corresponding to a volume of -65.625dB to 0dB.

Returns

The function returns nothing.

Example Code

Example: BasicInputOutput

Notes and Warnings**AudioCodec::muteOutput****Description**

Mute output audio.

Syntax

```
void muteOutput(uint8_t leftMute, uint8_t rightMute);
```

Parameters

leftMute: 1 to mute left channel output, 0 to unmute

rightMute: 1 to mute right channel output, 0 to unmute

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings**AudioCodec::writeAvaliable****Description**

Check for free buffer page available for data write.

Syntax

```
bool writeAvaliable();
```

Parameters

The function requires no input parameter.

Returns

Returns true if there is a buffer page that is available for writing data into. Returns false if all buffer pages are full.

Example Code

Example: BasicInputOutput

Notes and Warnings

AudioCodec::writeDataPage

Description

Write audio data to an available buffer page.

Syntax

```
uint32_t writeDataPage(int8_t* src, uint32_t len);  
uint32_t writeDataPage(int16_t* src, uint32_t len);
```

Parameters

src: pointer to array containing audio samples to write to audio codec.

len: number of audio samples in array.

Returns

The function returns the number of audio samples written to the audio codec.

Example Code

Example: BasicInputOutput

Notes and Warnings

AudioCodec::readAvaliable

Description

Check for buffer page with new data available for read.

Syntax

```
bool readAvaliable();
```

Parameters

The function requires no input parameter.

Returns

Returns true if there is a buffer page with new data that is ready for reading data from. Returns false if all buffer pages are empty.

Example Code

Example: BasicInputOutput

Notes and Warnings**AudioCodec::readDataPage****Description**

Read audio data from a ready buffer page.

Syntax

```
uint32_t readDataPage(int8_t* dst, uint32_t len);  
uint32_t readDataPage(int16_t* dst, uint32_t len);
```

Parameters

dst: pointer to array to contain audio samples read from audio codec.

len: number of audio samples to read.

Returns

The function returns the number of audio samples read from the audio codec.

Example Code

Example: BasicInputOutput

Notes and Warnings**AudioCodec::setWriteCallback****Description**

Set a callback function to be notified when a free buffer page is available for write.

Syntax

```
void setWriteCallback(void (writeCB)(**void*));
```

Parameters

writeCB: function to be called when a buffer page becomes available for data write. Takes no arguments and returns nothing

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

After starting the audio codec with `AudioCodec::begin()`, the callback function will be called each time the audio codec finishes outputting the data in a buffer page.

AudioCodec::setReadCallback

Description

Set a callback function to be notified when a buffer page with new data is available for read.

Syntax

```
void setReadCallback(void (readCB)(**void*));
```

Parameters

`readCB`: function to be called when a buffer page with new data becomes available for data read. Takes no arguments and returns nothing

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

After starting the audio codec with `AudioCodec::begin()`, the callback function will be called each time the audio codec fills up a buffer page with newly acquired audio samples.

Class FFT

Description

A class used for performing FFT calculations with real-number inputs and outputs.

Syntax

```
class FFT
```

Members

Public Constructors

FFT::FFT	Create an instance of the FFT class
----------	-------------------------------------

Public Methods

FFT::setWindow	Configure the window function used in FFT calculations
FFT::calculate	Calculate FFT for an input array of values
FFT::getFrequencyBins	Get the FFT output frequency bins
FFT::getFFTSIZE	Get the size of FFT output for a given input size

FFT::FFT**Description**

Create a FFT class object.

Syntax

```
void FFT();
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: FFT

Notes and Warnings**FFT::setWindow****Description**

Configure the window function used in FFT calculations.

Syntax

```
void setWindow(FFTWindow_t window, uint16_t sampleCount);
```

Parameters

window: The window function to be used in FFT calculations. Valid values: None, Hann, Hamming.

sampleCount: Number of sample datapoints in the input.

Returns

The function returns nothing.

Example Code

Example: FFT

Notes and Warnings

The window function is used to reduce the effects of discontinuities that occur when the input signal has frequencies that do not fit an integer number of periods in the sample datapoints.

More information on FFTs and window functions can be seen at:

<https://download.ni.com/evaluation/pxi/Understanding%20FFTs%20and%20Windowing.pdf>

https://en.wikipedia.org/wiki/Window_function

FFT::Calculate

Description

Calculate FFT for an input array of values.

Syntax

```
void calculate(float* inputBuf, float* outputBuf, uint16_t sampleCount);
```

```
void calculate(int16_t* inputBuf, float* outputBuf, uint16_t sampleCount);
```

Parameters

inputBuf: pointer to an array of sampleCount size, containing input sample datapoints, in float or uint16_t format.

outputBuf: pointer to a float array of sampleCount/2 size, for containing FFT output.

sampleCount: number of sample datapoints in the input array, valid values: 16, 32, 64, 128, 256, 512, 1024, 2048.

Returns

The function returns nothing.

Example Code

Example:FFT

Notes and Warnings

Large sample counts will require a longer time for FFT calculations, but will also return a result with higher frequency resolution.

FFT::getFrequencyBins

Description

Get the FFT output frequency bins.

Syntax

```
void getFrequencyBins(uint16_t* outputBuf, uint16_t sampleCount, uint32_t sampleRate);
```

Parameters

outputBuf: pointer to a uint16_t array of sampleCount/2 size, for containing the calculated center frequency of each FFT output element.

Returns

The function returns nothing.

Example Code

Example: FFT

Notes and Warnings NA

—

FFT::getFFTSIZE

Description

Get the size of FFT output for a given input size.

Syntax

```
uint16_t getFFTSIZE(uint16_t sampleCount);
```

Parameters

sampleCount: number of input sample datapoints.

Returns

The function returns the FFT output size for the given sampleCount, which is sampleCount/2.

Example Code

NA

Notes and Warnings NA

Class PlaybackWav

Description

A class used for control and playback of .wav file format audio data.

Syntax

```
class PlaybackWav
```

Members

Public Constructors

PlaybackWav::PlaybackWav	Create an instance of the PlaybackWav class
--------------------------	---

Public Methods

PlaybackWav::openFile	Open a .wav file for playback
PlaybackWav::closeFile	Close a previously opened file
PlaybackWav::fileOpened	Check if a .wav file is already opened
PlaybackWav::getSampleRate	Get the sample rate of the .wav file
PlaybackWav::getChannelCount	Get the number of audio channels in the .wav file
PlaybackWav::getBitDepth	Get the bit depth of each sample in the .wav file
PlaybackWav::getLengthMillis	Get the playback length of the .wav file in milliseconds
PlaybackWav::getPositionMillis	Get the current playback position in milliseconds
PlaybackWav::setPositionMillis	Set the current playback position in milliseconds
PlaybackWav::millisToBytes	Convert a playback duration to equivalent number of bytes
PlaybackWav::bytesToMillis	Convert number of bytes to an equivalent playback duration
PlaybackWav::readAudioData	Read audio data from the .wav file

PlaybackWav::PlaybackWav**Description**

Create a PlaybackWav class object.

Syntax

```
void PlaybackWav(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

PlaybackWav::fileOpened**Description**

Check if a .wav file is already opened.

Syntax

```
bool fileOpened(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns true if a .wav file is already open, false otherwise.

Example Code

Example: RecordPlaybackWav

Notes and Warnings

NA

PlaybackWav::getSampleRate**Description**

Get the sample rate of the .wav file.

Syntax

```
uint32_t getSampleRate(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns sampling rate encoded in the .wav file header.

Example Code

Example: PlaybackWavFile

Notes and Warnings

NA

PlaybackWav::getChannelCount**Description**

Get the number of audio channels in the .wav file.

Syntax

```
uint16_t getChannelCount(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns channel count encoded in the .wav file header.

Example Code

Example: PlaybackWavFile

Notes and Warnings

NA

PlaybackWav::getBitDepth

Description

Get the bit depth of each sample in the .wav file.

Syntax

```
uint16_t getBitDepth(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns bit depth encoded in the .wav file header.

Example Code

Example: PlaybackWavFile

Notes and Warnings

NA

PlaybackWav::getLengthMillis

Description

Get the playback length of the .wav file in milliseconds.

Syntax

```
uint32_t getLengthMillis(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns the total playback length of the currently open .wav file in milliseconds.

Example Code

Example: PlaybackWavFile

Notes and Warnings

NA

PlaybackWav::getPositionMillis

Description

Get the current playback position in milliseconds.

Syntax

```
uint32_t getPositionMillis(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns the current playback position of the currently open .wav file in milliseconds.

Example Code

Example: PlaybackWavFile

Notes and Warnings

NA

PlaybackWav::setPositionMillis

Description

Set the current playback position in milliseconds.

Syntax

```
void setPositionMillis(uint32_t pos);
```

Parameters

pos: The desired playback position expressed in milliseconds.

Returns

The function returns nothing.

Example Code

Example: PlaybackWavFile

Notes and Warnings

Any changes to playback position will only take effect on the next call to PlaybackWav::readAudioData. If the desired playback position is beyond the total playback length of the file, the playback position will be set to the end of file, and no audio data will be output on subsequent data reads.

PlaybackWav::millisToBytes

Description

Convert a playback duration to equivalent number of bytes.

Syntax

```
uint32_t millisToBytes(uint32_t ms);
```

Parameters

ms: playback duration in milliseconds.

Returns

The function returns the number of bytes that is equivalent to the input playback duration, converted using the current sample rate, number of channels and bit depth.

Example Code

NA

Notes and Warnings

NA

PlaybackWav::bytesToMillis

Description

Convert number of bytes to an equivalent playback duration.

Syntax

```
uint32_t bytesToMillis(uint32_t bytes);
```

Parameters

bytes: playback duration in number of bytes.

Returns

The function returns the time duration in milliseconds that is equivalent to the input number of bytes, converted using the current sample rate, number of channels and bit depth.

Example Code

NA

Notes and Warnings

NA

PlaybackWav::readAudioData

Description

Read audio data from the .wav file.

Syntax

- `uint32_t readAudioData(int8_t* dst, uint32_t len);`
- `uint32_t readAudioData(int16_t* dst, uint32_t len);`

Parameters

- `dst`: pointer to array to store data read from .wav file.
- `len`: number of audio samples to read from .wav file.

Returns

The function returns number of audio samples read.

Example Code

Example: PlaybackWavFile

Notes and Warnings

NA

Class RecordWav**Description**

A class used for control and recording of .wav file format audio data.

Syntax

`class RecordWav`

Members**Public Constructors**

<code>RecordWav::RecordWav</code>	Create an instance of the RecordWav class
-----------------------------------	---

Public Methods

RecordWav::openFile	Open a .wav file for playback
RecordWav::closeFile	Close a previously opened file
RecordWav::fileOpened	Check if a .wav file is already opened
RecordWav::setSampleRate	Get the sample rate of the .wav file
RecordWav::setChannelCount	Set the number of audio channels in the .wav file
RecordWav::setBitDepth	Set the bit depth of each sample in the .wav file
RecordWav::getLengthMillis	Get the current record length of the .wav file in milliseconds
RecordWav::millisToBytes	Convert a playback duration to equivalent number of bytes
RecordWav::bytesToMillis	Convert number of bytes to an equivalent playback duration
RecordWav::writeAudioData	Write audio data to the .wav file

RecordWav::RecordWav

Description

Create a RecordWav class object.

Syntax

```
void RecordWav(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: RecordWavFile

Notes and Warnings

NA

RecordWav::openFile

Description

Open a .wav file for recording.

Syntax

```
void openFile(const char* absFilepath);
```

Parameters

absFilepath: the filepath of the .wav file to open.

Returns

The function returns nothing.

Example Code

Example: RecordWavFile

Notes and Warnings

NA

RecordWav::closeFile**Description**

Close a previously opened file.

Syntax

```
void closeFile(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: RecordWavFile

Notes and Warnings

Any open .wav files should be closed after recording is complete, otherwise, loss of recorded audio data may occur.

RecordWav::fileOpened**Description**

Check if a .wav file is already opened.

Syntax

```
bool fileOpened(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns true if a .wav file is already open, false otherwise.

Example Code

Example: RecordWavFile

Notes and Warnings

NA

RecordWav::setSampleRate

Description

Set the recording sample rate of the .wav file.

Syntax

```
void setSampleRate(uint32_t sampleRate);
```

Parameters

sampleRate: The desired recording sample rate.

Returns

The function returns nothing.

Example Code

Example: RecordWavFile

Notes and Warnings

NA

RecordWav::setChannelCount

Description

Set the number of recording audio channels in the .wav file.

Syntax

```
void setChannelCount(uint16_t channelCount);
```

Parameters

channelCount: number of recording audio channels.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

RecordWav::setBitDepth**Description**

Set the recording bit depth of each sample in the .wav file.

Syntax

```
void setBitDepth(uint16_t bitDepth);
```

Parameters

bitDepth: number of bits per sample.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

RecordWav::getLengthMillis**Description**

Get the current recorded length of the .wav file in milliseconds.

Syntax

```
uint32_t getLengthMillis(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns the current recorded length of the currently open .wav file in milliseconds.

Example Code

NA

Notes and Warnings

NA

RecordWav::millisToBytes**Description**

Convert a playback duration to equivalent number of bytes.

Syntax

```
uint32_t millisToBytes(uint32_t ms);
```

Parameters

ms: playback duration in milliseconds.

Returns

The function returns the number of bytes that is equivalent to the input playback duration, converted using the current sample rate, number of channels and bit depth.

Example Code

NA

Notes and Warnings

NA

RecordWav::bytesToMillis**Description**

Convert number of bytes to an equivalent playback duration.

Syntax

```
uint32_t bytesToMillis(uint32_t bytes);
```

Parameters

bytes: playback duration in number of bytes.

Returns

The function returns the time duration in milliseconds that is equivalent to the input number of bytes, converted using the current sample rate, number of channels and bit depth.

Example Code

NA

Notes and Warnings

NA

RecordWav::writeAudioData**Description**

Write audio data to the .wav file.

Syntax

```
uint32_t writeAudioData(int8_t* src, uint32_t len); uint32_t writeAudioData(int16_t* src, uint32_t len);
```

Parameters

src: pointer to array containing data to write to .wav file. len: number of audio samples to write to .wav file.

Returns

The function returns number of audio samples written.

Example Code

Example: RecordWavFile

Notes and Warnings

NA

BLE**Class BLEAddr****BLEAddr Class****Description**

A class used for managing Bluetooth addresses.

Syntax

```
class BLEAddr
```

Members

Public Constructors	
BLEAddr::BLEAddr	Constructs a BLEAddr object
Public Methods	
BLEAddr::str	Get the Bluetooth address represented as a formatted string
BLEAddr::data	Get the Bluetooth address represented as an integer array

BLEAddr::BLEAddr**Description**

Constructs a BLEAddr object.

Syntax

```
BLEAddr::BLEAddr(void);  
BLEAddr::BLEAddr(uint8_t (&addr)[6]);  
BLEAddr::BLEAddr(const char* str);
```

Parameters

addr: An array of 6 bytes containing the desired Bluetooth address.

str: A character string representing the desired Bluetooth address.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

When expressed as a string, the Bluetooth address should be written as 6 bytes in hexadecimal format, using a colon “:” to separate the bytes is acceptable (example –00:11:22:33:EE:FF).

BLEAddr::str**Description**

Get the Bluetooth address represented as a formatted string.

Syntax

```
const char* str(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns a pointer to a character string containing the hexadecimal representation of the Bluetooth address.

Example Code

Example: BLEScan

Notes and Warnings

The Bluetooth address expressed as a string will be written as 6 bytes in hexadecimal format, with a colon ":" separating the bytes (example -00:11:22:33:EE:FF).

BLEAddr::data**Description**

Get the Bluetooth address represented as an integer array.

Syntax

```
uint8_t* data(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns a pointer to a 6 byte array containing the Bluetooth address.

Example Code

NA

Notes and Warnings

The Bluetooth address is stored with MSB at array index [5].

Class BLEAdvert

BLEAdvert Class

Description

A class used for managing BLE advertising settings.

Syntax

```
class BLEAdvert
```

Members

Public Constructors
No public constructor is available as this class is intended to be a singleton class. You can get a pointer to this class using BLEDevice::configAdvert().

Public Methods	
BLEAdvert::updateAdvertParams	Update the current BLE advertisement settings to the lower Bluetooth stack
BLEAdvert::startAdv	Start BLE advertising
BLEAdvert::stopAdv	Stop BLE advertising
BLEAdvert::setAdvType	Set the BLE advertising type
BLEAdvert::setMinInterval	Set the BLE advertising minimum interval
BLEAdvert::setMaxInterval	Set the BLE advertising maximum interval
BLEAdvert::setAdvData	Set BLE advertising data
BLEAdvert::setScanRspData	Set BLE scan response data

BLEAdvert::updateAdvertParams

Description

Update the lower Bluetooth stack with the current advertising settings.

Syntax

```
void updateAdvertParams(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Please use the other class member functions to set the BLE advertising parameters first before using this function.

BLEAdvert::startAdv**Description**

Start BLE advertising.

Syntax

```
void startAdv(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

This function is provided for flexibility in controlling and updating BLE advertising parameters. You should avoid using this function to directly start the BLE advertising process without first registering the necessary callback and handler functions. Call `BLEDevice::beginPeripheral()` to register the necessary functions and start advertising for the first time.

BLEAdvert::stopAdv

Description

Stop BLE advertising.

Syntax

```
void stopAdv(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

This function is provided for flexibility in controlling and updating BLE advertising parameters. You should avoid using this function to directly stop the BLE advertising process. Call `BLEDevice::end()` to stop advertising and free up used resources.

BLEAdvert::setAdvType

Description

Set the BLE advertising type.

Syntax

```
void setAdvType(uint8_t advType);
```

Parameters

advType: the desired advertisement type. Valid values:

- 0 = GAP_ADTYPE_ADV_IND : connectable undirected advertisement
- 1 = GAP_ADTYPE_ADV_HDC_DIRECT_IND : connectable high duty cycle directed
- 2 = GAP_ADTYPE_ADV_SCAN_IND : scannable undirected advertisement
- 3 = GAP_ADTYPE_ADV_NONCONN_IND : Non-connectable undirected advertisement
- 4 = GAP_ADTYPE_ADV_LDC_DIRECT_IND : connectable low duty cycle directed advertisement

Returns

The function returns nothing.

Example Code

Example: BLEBatteryService

Notes and Warnings

Call this function with the GAP_ADTYPE_ADV_IND argument if connection requests should be allowed, and GAP_ADTYPE_ADV_NONCONN_IND if all connection requests should be rejected.

BLEAdvert::setMinInterval**Description**

Set the minimum BLE advertising interval.

Syntax

```
void setMinInterval(uint16_t minInt_ms);
```

Parameters

minInt_ms: the desired advertisement minimum interval, expressed in milliseconds. The valid values for the interval are from 20ms to 10240ms.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

BLE advertisements will repeat with an interval between the set minimum and maximum intervals. Set a shorter interval for the BLE device to be discovered rapidly and set a longer interval to conserve power.

BLEAdvert::setMaxInterval

Description

Set the maximum BLE advertising interval.

Syntax

```
void setMaxInterval(uint16_t minInt_ms);
```

Parameters

minInt_ms: the desired advertisement maximum interval, expressed in milliseconds. The valid values for the interval are from 20ms to 10240ms.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

BLE advertisements will repeat with an interval between the set minimum and maximum intervals. Set a shorter interval for the BLE device to be discovered rapidly and set a longer interval to conserve power.

BLEAdvert::setAdvData

Description

Set BLE advertising data.

Syntax

```
void setAdvData(BLEAdvertData adData);  
void setAdvData(uint8_t* pData, uint8_t size);
```

Parameters

adData: scan response data formatted in a BLEAdvertData class object
pData: pointer to a byte array containing the required scan response data.
size: number of bytes the scan response data contains, maximum of 31 bytes.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

N/A

BLEAdvert::setScanRspData

Description

Set BLE scan response data.

Syntax

```
void setScanRspData(BLEAdvertData adData);  
void setScanRspData(uint8_t* pData, uint8_t size);
```

Parameters

adData: scan response data formatted in a BLEAdvertData class object

pData: pointer to a byte array containing the required scan response data.

size: number of bytes the scan response data contains, maximum of 31 bytes.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

N/A

Class BLEAdvertData

BLEAdvertData Class

Description

A class used for managing BLE advertising data.

Syntax

```
class BLEAdvertData
```

Members

Public Constructors	
BLEAdvertData::BLEAdvertData	Constructs a BLEAdvertData object

Public Methods	
BLEAdvertData::clear	Clear all advertising data
BLEAdvertData::addData	Add binary advertising data
BLEAdvertData::addFlags	Add flags to advertising data
BLEAdvertData::addPartialServices	Add partial services to advertising data
BLEAdvertData::addCompleteServices	Add complete services to advertising data
BLEAdvertData::addAppearance	Add device appearance to advertising data
BLEAdvertData::addShortName	Add short device name to advertising data
BLEAdvertData::addCompleteName	Add complete device name to advertising data
BLEAdvertData::parseScanInfo	Parse advertising data received from a scan
BLEAdvertData::hasFlags	Check if received data includes advertising flags
BLEAdvertData::hasUUID	Check if received data includes UUIDs
BLEAdvertData::hasName	Check if received data includes device name
BLEAdvertData::hasManufacturer	Check if received data includes manufacturer data
BLEAdvertData::getAdvType	Get advertising type of received data
BLEAdvertData::getAddrType	Get Bluetooth address type of received data
BLEAdvertData::getAddr	Get Bluetooth address of received data
BLEAdvertData::getRSSI	Get RSSI of received data
BLEAdvertData::getFlags	Get advertising flags of received data
BLEAdvertData::getServiceCount	Get number of advertised services in received data
BLEAdvertData::getServiceList	Get array of advertised services in received data
BLEAdvertData::getName	Get advertised device name in received data
BLEAdvertData::getTxPower	Get advertised transmission power in received data
BLEAdvertData::getAppearance	Get advertised device appearance in received data
BLEAdvertData::getManufacturer	Get advertised manufacturer in received data
BLEAdvertData::getManufacturerDataLength	Get length of manufacturer data in received data
BLEAdvertData::getManufacturerData	Get advertised manufacturer data in received data

BLEAdvertData::BLEAdvertData

Description

Constructs a BLEAdvertData object.

Syntax

```
BLEAdvertData::BLEAdvertData(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

This class is used for managing BLE advertising data for two primary uses. First is to assemble advertising data for broadcasting as advertising packets. Second is to process and split up the advertising data received from a scan into separate types.

BLEAdvertData::clear

Description

Clear all advertising data currently saved in class object.

Syntax

```
void clear(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEAdvertData::addData

Description

Add binary advertising data.

Syntax

```
void addData(const uint8_t* data, uint8_t size);
```

Parameters

data: pointer to array containing desired advertising data.

size: number of bytes in array.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

This function is provided for flexibility in adding BLE advertising data. Other functions should be used for adding advertising data if possible, as this function does not perform any checks on the validity of the data.

BLEAdvertData::addFlags

Description

Add flags to advertising data.

Syntax

```
uint8_t addFlags(uint8_t flags);
```

Parameters

flags: desired flags to add to advertising data. Valid values:

- GAP_ADTYPE_FLAGS_LIMITED
- GAP_ADTYPE_FLAGS_GENERAL
- GAP_ADTYPE_FLAGS_BREDR_NOT_SUPPORTED
- GAP_ADTYPE_FLAGS_SIMULTANEOUS_LE_BREDR_CONTROLLER
- GAP_ADTYPE_FLAGS_SIMULTANEOUS_LE_BREDR_HOST

Returns

Current total size of advertising data.

Example Code

Example: BLEBatteryService

Notes and Warnings

NA

BLEAdvertData::addPartialServices

Description

Add partial list of service UUIDs to advertising data.

Syntax

```
uint8_t addPartialServices(BLEUUID uuid);
```

Parameters

uuid: the desired UUID contained in BLEUUID class object.

Returns

Current total size of advertising data.

Example Code

NA

Notes and Warnings

NA

BLEAdvertData::addCompleteServices**Description**

Add complete list of service UUIDs to advertising data.

Syntax

```
uint8_t addCompleteServices(BLEUUID uuid);  
uint8_t addCompleteServices(uint8_t uuidBitLength);
```

Parameters

uuid: the desired UUID contained in BLEUUID class object.

uuidBitLength: UUID bit length for which a blank entry is to be added. Valid values: 16, 32, 128.

Returns

Current total size of advertising data.

Example Code

Example: BLEBatteryService

Notes and Warnings

uuidBitLength is used when it is desired to add a blank entry to the advertisement data, used to indicate that no services with UUIDs of a certain length are available.

BLEAdvertData::addAppearance

Description

Add device appearance to advertising data.

Syntax

```
uint8_t addAppearance(uint16_t appearance);
```

Parameters

appearance: the desired device appearance.

Returns

Current total size of advertising data.

Example Code

NA

Notes and Warnings

Refer to Bluetooth specifications for a full list of device appearance values.

BLEAdvertData::addShortName

Description

Add shortened device name to advertising data.

Syntax

```
uint8_t addShortName(const char* str);
```

Parameters

str: character string containing desired device name.

Returns

Current total size of advertising data.

Example Code

NA

Notes and Warnings

NA

BLEAdvertData::addCompleteName**Description**

Add complete device name to advertising data.

Syntax

```
uint8_t addCompleteName(const char* str);
```

Parameters

str: character string containing desired device name.

Returns

Current total size of advertising data.

Example Code

Example: BLEBatteryService

Notes and Warnings

NA

BLEAdvertData::parseScanInfo**Description**

Parse advertising data received from a scan.

Syntax

```
void parseScanInfo(T_LE_CB_DATA *p_data);
```

Parameters

p_data: pointer to advertising data received from a Bluetooth scan.

Returns

The function returns nothing.

Example Code

Example: BLEBatteryClient

Notes and Warnings

Advertising data fields of parsed receive data can be access using member functions starting with “has” and “get” .

BLEAdvertData::hasFlags

Description

Check if received data includes advertising flags.

Syntax

```
bool hasFlags(void);
```

Parameters

The function requires no input parameter.

Returns

True if flags are present in received advertising data.

Example Code

NA

Notes and Warnings

NA

BLEAdvertData::hasUUID**Description**

Check if received data includes service UUIDs.

Syntax

```
bool hasUUID(void);
```

Parameters

The function requires no input parameter.

Returns

True if service UUIDs are present in received advertising data.

Example Code

NA

Notes and Warnings

NA

BLEAdvertData::hasName**Description**

Check if received data includes device name.

Syntax

```
bool hasName(void);
```

Parameters

The function requires no input parameter.

Returns

True if device name is present in received advertising data.

Example Code

Example: BLEBatteryClient

Notes and Warnings

NA

BLEAdvertData::hasManufacturer

Description

Check if received data includes manufacturer specific data.

Syntax

```
bool hasManufacturer(void);
```

Parameters

The function requires no input parameter.

Returns

True if manufacturer specific data is present in received advertising data.

Example Code

NA

Notes and Warnings

NA

BLEAdvertData::getAdvType**Description**

Get advertising type of received data.

Syntax

```
T_GAP_ADV_EVT_TYPE getAdvType(void);
```

Parameters

The function requires no input parameter.

Returns

Advertising type of received advertising data.

Example Code

NA

Notes and Warnings

Possible types:

- GAP_ADV_EVT_TYPE_UNDIRECTED
- GAP_ADV_EVT_TYPE_DIRECTED
- GAP_ADV_EVT_TYPE_SCANNABLE
- GAP_ADV_EVT_TYPE_NON_CONNECTABLE
- GAP_ADV_EVT_TYPE_SCAN_RSP

BLEAdvertData::getAddrType**Description**

Get Bluetooth address type of received data.

Syntax

```
T_GAP_REMOTE_ADDR_TYPE getAddrType(void);
```

Parameters

The function requires no input parameter.

Returns

Bluetooth address type of received data.

Example Code

NA

Notes and Warnings

Possible types:

- GAP_REMOTE_ADDR_LE_PUBLIC
- GAP_REMOTE_ADDR_LE_RANDOM

BLEAdvertData::getRSSI

Description

Get received signal strength indicator (RSSI) of received data.

Syntax

```
Int8_t getRSSI(void);
```

Parameters

The function requires no input parameter.

Returns

Received signal strength.

Example Code

NA

Notes and Warnings

NA

BLEAdvertData::getFlags**Description**

Get advertising flags of received data.

Syntax

```
uint8_t getFlags(void);
```

Parameters

The function requires no input parameter.

Returns

Advertising flags present in received advertising data, expressed as a single byte.

Example Code

NA

Notes and Warnings

NA

BLEAdvertData::getServiceCount**Description**

Get number of advertised services in received data.

Syntax

```
uint8_t getServiceCount(void);
```

Parameters

The function requires no input parameter.

Returns

Number of advertised service UUIDs in received data.

Example Code

Example: BLEBatteryClient

Notes and Warnings

NA

BLEAdvertData::getServiceList

Description

Get list of advertised service UUIDs in received data.

Syntax

```
BLEUUID* getServiceList(void);
```

Parameters

The function requires no input parameter.

Returns

Pointer to a BLEUUID array containing all advertised service UUIDs.

Example Code

Example: BLEBatteryClient

Notes and Warnings

NA

BLEAdvertData::getName**Description**

Get advertised device name in received data.

Syntax

```
String getName(void);
```

Parameters

The function requires no input parameter.

Returns

Advertised device name contained in a String class object.

Example Code

Example: BLEBatteryClient

Notes and Warnings

NA

BLEAdvertData::getTxPower**Description**

Get advertised transmission power in received data.

Syntax

```
int8_t getTxPower(void);
```

Parameters

The function requires no input parameter.

Returns

Advertised transmission power.

Example Code

NA

Notes and Warnings

NA

BLEAdvertData::getAppearance

Description

Get advertised device appearance in received data.

Syntax

```
uint16_t getAppearance(void);
```

Parameters

The function requires no input parameter.

Returns

Advertised device appearance.

Example Code

NA

Notes and Warnings

Refer to Bluetooth specifications for full list of device appearance values.

BLEAdvertData::getManufacturer**Description**

Get advertised manufacturer in received data.

Syntax

```
uint16_t getManufacturer(void);
```

Parameters

The function requires no input parameter.

Returns

Advertised manufacturer.

Example Code

NA

Notes and Warnings

Refer to Bluetooth specifications for full list of manufacturer codes.

BLEAdvertData::getManufacturerDataLength**Description**

Get length of manufacturer data in received data.

Syntax

```
uint8_t getManufacturerDataLength(void);
```

Parameters

The function requires no input parameter.

Returns

Number of bytes of manufacturer data present in received advertising data.

Example Code

NA

Notes and Warnings

NA

BLEAdvertData::getManufacturerData

Description

Get manufacturer data in received data.

Syntax

```
uint8_t* getManufacturerData(void);
```

Parameters

The function requires no input parameter.

Returns

Pointer to array containing manufacturer data.

Example Code

NA

Notes and Warnings

NA

Class BLEBeacon

iBeacon Class

Description

A class used for managing iBeacon BLE advertising data.

Syntax

```
class iBeacon
```

Members

Public Constructors	
iBeacon::iBeacon	Create an instance of iBeacon advertising data
Public Methods	
iBeacon::getManufacturerId	Get current manufacturer ID value
iBeacon::getUUID	Get current UUID value
iBeacon::getMajor	Get current Major value
iBeacon::getMinor	Get current Minor value
iBeacon::getRSSI	Get current RSSI value
iBeacon::setManufacturerId	Set manufacturer ID value
iBeacon::setUUID	Set UUID value
iBeacon::setMajor	Set Major value
iBeacon::setMinor	Set Minor value
iBeacon::setRSSI	Set RSSI value
iBeacon::getAdvData	Get current advertising data
iBeacon::getScanRsp	Get current scan response data

altBeacon Class

Description

A class used for managing altBeacon BLE advertising data.

Syntax

```
class altBeacon
```

Members

Public Constructors	
altBeacon::altBeacon	Create an instance of altBeacon advertising data
Public Methods	
altBeacon::getManufacturerId	Get current manufacturer ID value
altBeacon::getUUID	Get current UUID value
altBeacon::getMajor	Get current Major value
altBeacon::getMinor	Get current Minor value
altBeacon::getRSSI	Get current RSSI value
altBeacon::getRSVD	Get current Reserved value
altBeacon::setManufacturerId	Set manufacturer ID value
altBeacon::setUUID	Set UUID value
altBeacon::setMajor	Set Major value
altBeacon::setMinor	Set Minor value
altBeacon::setRSSI	Set RSSI value
altBeacon::setRSVD	Set Reserved value
altBeacon::getAdvData	Get current advertising data
altBeacon::getScanRsp	Get current scan response data

iBeacon::iBeacon

Description

Create an iBeacon object.

Syntax

```
void iBeacon(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Include “BLEBeacon.h” to use this class function.

altBeacon::altBeacon**Description**

Create an altBeacon object.

Syntax

```
void altBeacon(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Include “BLEBeacon.h” to use this class function.

iBeacon::getManufacturerId**altBeacon::getManufacturerId****Description**

Get current Manufacturer ID value.

Syntax

```
uint16_t getManufacturerId(void);
```

Parameters

The function requires no input parameter.

Returns

A 16-bit unsigned integer containing the current Company ID.

Example Code

NA

Notes and Warnings

Refer to <https://www.bluetooth.com/specifications/assigned-numbers/company-identifiers/> for the full list of assigned Bluetooth company identifiers.

iBeacon::getUUID

altBeacon::getUUID

Description

Get the current UUID value.

Syntax

```
void getUUID(uint8_t* UUID);
```

Parameters

UUID: pointer to a 16 element uint8_t array, current UUID will be copied into the array.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

UUID is a 128-bit number used to uniquely identify a beacon. It is commonly expressed as a 32-character hexadecimal string. UUIDs can be generated at <https://www.uuidgenerator.net/>.

iBeacon::getMajor

altBeacon::getMajor

Description

Get current Major value.

Syntax

```
uint16_t getMajor(void);
```

Parameters

The function requires no input parameter.

Returns

A 16-bit unsigned integer containing the current Major value.

Example Code

NA

Notes and Warnings

Major and Minor are values used for customizing beacons. These can be set to any value. Refer to <https://developer.apple.com/ibeacon/> or <https://altbeacon.org/> for more information.

iBeacon::getMinor

altBeacon::getMinor

Description

Get current Minor value.

Syntax

```
uint16_t getMinor(void);
```

Parameters

The function requires no input parameter.

Returns

A 16-bit unsigned integer containing the current Minor value.

Example Code

NA

Notes and Warnings

Major and Minor are values used for customizing beacons. These can be set to any value. Refer to <https://developer.apple.com/ibeacon/> or <https://altbeacon.org/> for more information.

iBeacon::getRSSI

altBeacon::getRSSI

Description

Get the current RSSI value.

Syntax

```
int8_t getRSSI(void);
```

Parameters

The function requires no input parameter.

Returns

An 8-bit signed integer containing the currently set RSSI value.

Example Code

NA

Notes and Warnings

The beacon RSSI value is the received signal strength at 1 meter. This can be used to estimate the distance to the beacon. Refer to <https://developer.apple.com/ibeacon/> or <https://altbeacon.org/> for more information.

iBeacon::setManufacturerId**altBeacon::setManufacturerId****Description**

Set Manufacturer ID value.

Syntax

```
void setManufacturerId(uint16_t id);
```

Parameters

id: desired Manufacturer ID

Returns

The function returns nothing.

Example Code

Example: BLEBeacon

Notes and Warnings

Refer to <https://www.bluetooth.com/specifications/assigned-numbers/company-identifiers/> for the full list of assigned Bluetooth company identifiers.

iBeacon::setUUID

altBeacon::setUUID

Description

Set UUID value.

Syntax

```
void setUUID(uint8_t* UUID);
```

```
void setUUID(const char* UUID);
```

Parameters

uint8_t* UUID: pointer to a 16 element uint8_t array containing the desired UUID

const char* UUID: desired UUID expressed as a character string

Returns

The function returns nothing.

Example Code

Example: BLEBeacon

Notes and Warnings

UUID is a 128-bit number used to uniquely identify a beacon. It is commonly expressed as a 32-character hexadecimal string. UUIDs can be generated at <https://www.uuidgenerator.net/>.

iBeacon::setMajor

altBeacon::setMajor

Description

Set Major value.

Syntax

```
void setMajor(uint16_t major);
```

Parameters

major: desired Major value

Returns

The function returns nothing.

Example Code

Example: BLEBeacon

Notes and Warnings

Major and Minor are values used for customizing beacons. These can be set to any value. Refer to <https://developer.apple.com/ibeacon/> or <https://altbeacon.org/> for more information.

iBeacon::setMinor**altBeacon::setMinor****Description**

Set Minor value.

Syntax

```
void setMinor(uint16_t minor);
```

Parameters

minor: desired Minor value

Returns

The function returns nothing.

Example Code

Example: BLEBeacon

Notes and Warnings

Major and Minor are values used for customizing beacons. These can be set to any value. Refer to <https://developer.apple.com/ibeacon/> or <https://altbeacon.org/> for more information.

iBeacon::setRSSI

altBeacon::setRSSI

Description

Set RSSI value.

Syntax

```
void setRSSI(int8_t RSSI);
```

Parameters

RSSI: desired RSSI value

Returns

The function returns nothing.

Example Code

Example: BLEBeacon

Notes and Warnings

The beacon RSSI value is the received signal strength at 1 meter. This can be used to estimate the distance to the beacon. Refer to <https://developer.apple.com/ibeacon/> or <https://altbeacon.org/> for more information.

iBeacon::getAdvData

altBeacon::getAdvData

Description

Get current beacon advertising data.

Syntax

```
uint8_t* getAdvData(void);
```

Parameters

The function requires no input parameter.

Returns

A uint8_t pointer to the structure containing beacon advertising data.

Example Code

NA

Notes and Warnings

Avoid changing the beacon data through the returned pointer, use the member functions instead.

iBeacon::getScanRsp**altBeacon::getScanRsp****Description**

Get current beacon advertising scan response data.

Syntax

```
uint8_t* getScanRsp(void);
```

Parameters

The function requires no input parameter.

Returns

A uint8_t pointer to the structure containing beacon advertising scan response data.

Example Code

NA

Notes and Warnings

Avoid changing the beacon data through the returned pointer, use the member functions instead.

altBeacon::getRSVD

Description

Get current Reserved value.

Syntax

```
uint8_t getRSVD(void);
```

Parameters

The function requires no input parameter.

Returns

An 8-bit unsigned integer containing the current Reserved value.

Example Code

NA

Notes and Warnings

Reserved for use by the manufacturer to implement special features. The interpretation of this value is to be defined by the manufacturer and is to be evaluated based on the MFG ID value. Refer to <https://altbeacon.org/> for more information.

altBeacon::setRSVD

Description

Set Reserved value.

Syntax

```
void setRSVD(uint8_t rsvd);
```

Parameters

rsvd: desired Reserved value

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Reserved for use by the manufacturer to implement special features. The interpretation of this value is to be defined by the manufacturer and is to be evaluated based on the MFG ID value. Refer to <https://altbeacon.org/> for more information.

Class BLECharacteristic

BLECharacteristic Class

Description

A class used for creating and managing BLE GATT characteristics.

Syntax

```
class BLECharacteristic
```

Members

Public Constructors	
BLEC haracteristic::BLECharacteristic	Constructs a BLECharacteristic object
Public Methods	
BLECharacteristic::setUUID	Set the characteristic UUID
BLECharacteristic::getUUID	Get the characteristic UUID
BLECharacteristic::setBufferLen	Set the size of the internal data buffer
BLECharacteristic::getBufferLen	Get the current size of the internal data buffer
BLECharacteristic::setReadProperty	Get the current size of the internal data bufferSet the characteristic r
BLECharacteristic::setWriteProperty	Set the characteristic write property
BLEC haracteristic::setNotifyProperty	Set the characteristic notify property
BLECha racteristic::setIndicateProperty	Set the characteristic indicate property
BLECharacteristic::setProperties	Set the characteristic properties
BLECharacteristic::getProperties	Get the characteristic properties
BLECharacteristic::readString	Read the characteristic data buffer as a String object
BLECharacteristic::readData8	Read the characteristic data buffer as an unsigned 8-bit integer
BLECharacteristic::readData16	Read the characteristic data buffer as an unsigned 16-bit integer
BLECharacteristic::readData32	Read the characteristic data buffer as an unsigned 32-bit integer
BLECharacteristic::writeString	Write data to the characteristic data buffer as a String object or char
BLECharacteristic::writeData8	Write data to the characteristic data buffer as an unsigned 8-bit integer
BLECharacteristic::writeData16	Write data to the characteristic data buffer as an unsigned 16-bit integer
BLECharacteristic::writeData32	Write data to the characteristic data buffer as an unsigned 16-bit integer
BLECharacteristic::setData	Write data to the characteristic data buffer
BLECharacteristic::getData	Read data from the characteristic data buffer
BLECharacteristic::getDataBuff	Get a pointer to the characteristic data buffer
BLECharacteristic::getDataLen	Get the number of bytes of data in the characteristic data buffer
BLECharacteristic::notify	Send a notification to a connected device
BLECharacteristic::indicate	Send an indication to a connected device
BLEC haracteristic::setUserDescriptor	Add a user description descriptor to characteristic
BLECha racteristic::setFormatDescriptor	Add a data format descriptor to characteristic
BLECharacteristic::Add a data format descriptor to characteristic	Set a user function as a read callback
BLECharacteristic::setWriteCallback	Set a user function as a write callback
BLECharacteristic::setCCCDCallback	Set a user function as a CCCD write callback

BLECharacteristic::BLECharacteristic**Description**

Constructs a BLECharacteristic object.

Syntax

```
BLECharacteristic::BLECharacteristic(BLEUUID uuid);  
BLECharacteristic::BLECharacteristic(const char* uuid);
```

Parameters

uuid: characteristic UUID, expressed as a BLEUUID class object or a character array

Returns

The function returns nothing.

Example Code

Example: BLEUartService

Notes and Warnings

NA

BLECharacteristic::setUUID**Description**

Set the characteristic UUID.

Syntax

```
void setUUID(BLEUUID uuid);
```

Parameters

uuid: the new characteristic UUID, expressed with a BLEUUID class object

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLECharacteristic::getUUID

Description

Get the characteristic UUID.

Syntax

```
BLEUUID getUUID();
```

Parameters

The function requires no input parameter.

Returns

The function returns the characteristic UUID in a BLEUUID class object.

Example Code

NA

Notes and Warnings

NA

BLECharacteristic::setBufferLen

Description

Set the size of the internal data buffer of the characteristic.

Syntax

```
void setBufferLen(uint16_t max_len);
```

Parameters

max_len: number of bytes to resize the internal buffer to

Returns

The function returns nothing.

Example Code

Example: BLEUartService

Notes and Warnings

Characteristic data buffer has a default size of 20 bytes and can be increased up to 230 bytes.

BLECharacteristic::getBufferLen

Description

Get the size of the characteristic internal buffer.

Syntax

```
uint16_t getBufferLen();
```

Parameters

The function requires no input parameter.

Returns

The function returns the currently set internal buffer size.

Example Code

NA

Notes and Warnings

NA

BLECharacteristic::setReadProperty

Description

Set the characteristic read property.

Syntax

```
void setReadProperty(bool value);
```

Parameters

value: TRUE to allow connected devices to read characteristic data

Returns

The function returns nothing.

Example Code

Example: BLEBatteryService

Notes and Warnings

NA

BLECharacteristic::setWriteProperty

Description

Set the characteristic write property.

Syntax

```
void setWriteProperty(bool value);
```

Parameters

value: TRUE to allow connected devices to write characteristic data

Returns

The function returns nothing.

Example Code

Example: BLEUartService

Notes and Warnings

NA

BLECharacteristic::setNotifyProperty**Description**

Set the characteristic notify property.

Syntax

```
void setNotifyProperty(bool value);
```

Parameters

value: TRUE to allow connected devices to enable receiving characteristic data notifications.

Returns

The function returns nothing.

Example Code

Example: BLEUartService

Notes and Warnings

Enabling this property will add a CCCD descriptor to the characteristic.

BLECharacteristic::setIndicateProperty**Description**

Set the characteristic indicate property.

Syntax

```
void setIndicateProperty(bool value);
```

Parameters

value: TRUE to allow connected devices to enable receiving characteristic data indications.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Enabling this property will add a CCCD descriptor to the characteristic.

BLECharacteristic::setProperties

Description

Set the characteristic properties.

Syntax

```
void setProperties(uint8_t value);
```

Parameters

value: desired characteristic properties

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLECharacteristic::getProperties

Description

Get the currently set characteristic properties.

Syntax

```
uint8_t getProperties();
```

Parameters

The function requires no input parameter.

Returns

The function returns the currently set characteristic properties expressed as an unsigned 8-bit integer.

Example Code

NA

Notes and Warnings

NA

BLECharacteristic::readString

Description

Read the data in the characteristic internal buffer, expressed as a String class object.

Syntax

```
String readString();
```

Parameters

The function requires no input parameter.

Returns

The function returns the data in the characteristic internal buffer expressed as a String class object.

Example Code

Example: BLEUartService

Notes and Warnings

Non-ASCII data may result in unexpected characters in the string.

BLECharacteristic::readData8

Description

Read the data in the characteristic internal buffer, expressed as an unsigned 8-bit integer.

Syntax

```
uint8_t readData8();
```

Parameters

The function requires no input parameter.

Returns

The function returns the data in the characteristic internal buffer expressed as a uint8_t value.

Example Code

NA

Notes and Warnings

NA

BLECharacteristic::readData16

Description

Read the data in the characteristic internal buffer, expressed as an unsigned 16-bit integer.

Syntax

```
uint16_t readData16();
```

Parameters

The function requires no input parameter.

Returns

The function returns the data in the characteristic internal buffer expressed as a uint16_t value.

Example Code

NA

Notes and Warnings

NA

BLECharacteristic::readData32**Description**

Read the data in the characteristic internal buffer, expressed as an unsigned 32-bit integer.

Syntax

```
uint32_t readData32();
```

Parameters

The function requires no input parameter.

Returns

The function returns the data in the characteristic internal buffer expressed as a uint32_t value.

Example Code

NA

Notes and Warnings

NA

BLECharacteristic::readData32

Description

Write data to the characteristic data buffer as a String object or character array.

Syntax

```
bool writeString(String str);  
bool writeString(const char* str);
```

Parameters

str: the data to write to the characteristic buffer, expressed as a String class object or a char array.

Returns

The function returns TRUE if write data is successful.

Example Code

Example: BLEUartService

Notes and Warnings

NA

BLECharacteristic::writeData8

Description

Write data to the characteristic data buffer as an unsigned 8-bit integer.

Syntax

```
bool writeData8(uint8_t num);
```

Parameters

num: the data to write to the characteristic buffer expressed as an unsigned 8-bit integer.

Returns

The function returns TRUE if write data is successful.

Example Code

Example: BLEBatteryService

Notes and Warnings

NA

BLECharacteristic::writeData16**Description**

Write data to the characteristic data buffer as an unsigned 16-bit integer.

Syntax

```
bool writeData16(uint16_t num);
```

Parameters

num: the data to write to the characteristic buffer expressed as an unsigned 16-bit integer.

Returns

The function returns TRUE if write data is successful.

Example Code

NA

Notes and Warnings

NA

BLECharacteristic::writeData32

Description

Write data to the characteristic data buffer as a 32-bit integer.

Syntax

```
bool writeData32(uint32_t num);
```

```
bool writeData32(int num);
```

Parameters

num: the data to write to the characteristic buffer expressed as a 32-bit integer.

Returns

The function returns TRUE if write data is successful.

Example Code

NA

Notes and Warnings

NA

BLECharacteristic::setData

Description

Write data to the characteristic data buffer.

Syntax

```
bool setData(uint8_t* data, uint16_t datalen);
```

Parameters

data: pointer to byte array containing desired data

datalen: number of bytes of data to write

Returns

The function returns TRUE if write data is successful.

Example Code

NA

Notes and Warnings

NA

BLECharacteristic::getData

Description

Read data from the characteristic data buffer.

Syntax

```
uint16_t getData(uint8_t* data, uint16_t datalen);
```

Parameters

data: pointer to byte array to save data read from buffer

datalen: number of bytes of data to read

Returns

The function returns the number of bytes read.

Example Code

NA

Notes and Warnings

If the data buffer contains less data than requested, it will only read the available number of bytes of data.

BLECharacteristic::getDataBuff

Description

Get a pointer to the characteristic data buffer.

Syntax

```
uint8_t* getDataBuff();
```

Parameters

The function requires no input parameter.

Returns

The function returns a pointer to the uint8_t array used as the characteristic internal buffer.

Example Code

NA

Notes and Warnings

NA

BLECharacteristic::getDataLen

Description

Get the number of bytes of data in the characteristic data buffer.

Syntax

```
uint16_t getDataLen
```

Parameters

The function requires no input parameter.

Returns

The function returns the number of bytes of data in the internal buffer.

Example Code

NA

Notes and Warnings

NA

BLECharacteristic::notify**Description**

Send a notification to a connected device.

Syntax

```
void notify(uint8_t conn_id);
```

Parameters

conn_id: the connection ID for the device to send a notification to.

Returns

The function returns nothing.

Example Code

Example: BLEUartService

Notes and Warnings

NA

BLECharacteristic::indicate**Description**

Send an indication to a connected device.

Syntax

```
void indicate(uint8_t conn_id);
```

Parameters

conn_id: the connection ID for the device to send an indication to.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLECharacteristic::setUserDescriptor

Description

Add a user description descriptor attribute (UUID 0x2901) to the characteristic.

Syntax

```
void setUserDescriptor(const char* description);
```

Parameters

description: the desired user description string expressed in a char array.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLECharacteristic::setFormatDescriptor

Description

Add a data format descriptor attribute (UUID 0x2904) to the characteristic.

Syntax

```
void setFormatDescriptor(uint8_t format, uint8_t exponent, uint16_t unit, uint16_t description);
```

Parameters

format: refer to <https://www.bluetooth.com/specifications/assigned-numbers/format-types/> for the valid values and associated format types.

exponent: base-10 exponent to be applied to characteristic data value.

unit: refer to <https://btprodspecificationrefs.blob.core.windows.net/assigned-values/16-bit%20UUID%20Numbers%20Document.pdf> for the valid values and associated units.

descriptor: refer to <https://www.bluetooth.com/specifications/assigned-numbers/gatt-namespace-descriptors/> for the valid values and associated descriptors.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLECharacteristic::setReadCallback

Description

Set a user function to be called when the characteristic data is read by a connected device.

Syntax

```
void setReadCallback(void (*fCallback) (BLECharacteristic* chr, uint8_t conn_id));
```

Parameters

fCallback: A user callback function that returns void and takes two arguments.

chr: pointer to BLECharacteristic object containing data read

conn_id: connection ID of connected device that read characteristic data

Returns

The function returns nothing.

Example Code

Example: BLEBatteryService

Notes and Warnings

NA

BLECharacteristic::setWriteCallback

Description

Set a user function to be called when the characteristic data is written by a connected device.

Syntax

```
void setWriteCallback(void (*fCallback) (BLECharacteristic* chr, uint8_t conn_id));
```

Parameters

fCallback: A user callback function that returns void and takes two arguments.

chr: pointer to BLECharacteristic object containing written data.

conn_id: connection ID of connected device that wrote characteristic data.

Returns

The function returns nothing.

Example Code

Example: BLEUartService

Notes and Warnings

NA

BLECharacteristic::setCCCDCallback**Description**

Set a user function to be called when a connected device modifies the characteristic CCCD to enable or disable notifications or indications.

Syntax

```
void setCCCDCallback(void (*fCallback) (BLECharacteristic* chr, uint8_t conn_id, uint16_t ccc_bits));
```

Parameters

fCallback: A user callback function that returns void and takes two arguments.

chr: pointer to BLECharacteristic object containing written data.

conn_id: connection ID of connected device that wrote characteristic data.

ccc_bits: the new CCCD data bits after modification by the connected device

Returns

The function returns nothing.

Example Code

Example: BLEUartService

Notes and Warnings

NA

Class BLEClient

BLEClient Class

Description

A class used for discovering and accessing BLE GATT services on a connected remote device.

Syntax

```
class BLEClient
```

Members

Public Constructors
No public constructor is available for this class. You can get a pointer to an instance of this class using BLEDevice::addClient().

Public Methods	
BLEClient::connected	Check if the corresponding remote device for the client is connected
BLEClient::discoverServices	Start service discovery process for connected device
BLEClient::discoveryDone	Determine if service discovery process has been completed
BLEClient::printServices	Format and print discovered services to serial port
BLEClient::getService	Get a specific service on the remote device
BLEClient::getConnId	
BLEClient::getClientId	Get corresponding client ID
BLEClient::setDisconnectCallback	Set a user function to be called when the remote device is disconnected

BLEClient::connected

Description

Check if the remote device associated with the client is still connected.

Syntax

```
bool connected();
```

Parameters

The function requires no input parameter.

Returns

The function returns TRUE if the remote device is connected.

Example Code

NA

Notes and Warnings

NA

BLEClient::discoverServices**Description**

Start the service discovery process for the connected remote device.

Syntax

```
void discoverServices();
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: BLEUartClient

Notes and Warnings

NA

BLEClient::discoveryDone

Description

Check if the service discovery process has been completed.

Syntax

```
bool discoveryDone();
```

Parameters

The function requires no input parameter.

Returns

The function returns TRUE if the service discovery process has been completed successfully, FALSE if the service discovery process failed, is still in progress, or has yet to start.

Example Code

Example: BLEUartClient

Notes and Warnings

NA

BLEClient::printServices

Description

Print out a formatted list of discovered services to the serial port.

Syntax

```
void printServices();
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEClient::getService**Description**

Get a service with the specified UUID on the remote device.

Syntax

```
BLERemoteService* getService(const char* uuid);
```

```
BLERemoteService* getService(BLEUUID uuid);
```

Parameters

uuid: the desired service UUID, expressed as a character array or a BLEUUID object.

Returns

The function returns the found service as a BLERemoteService object pointer, otherwise nullptr is returned if a service with the UUID is not found.

Example Code

Example: BLEUartClient

Notes and Warnings

NA

BLEClient::getConnId

Description

Get the connection ID associated with the remote device.

Syntax

```
uint8_t getConnId;
```

Parameters

The function requires no input parameter.

Returns

The function returns the connection ID for the connected remote device.

Example Code

NA

Notes and Warnings

NA

BLEClient::getClientId

Description

Get the client ID for the BLEClient object.

Syntax

```
T_CLIENT_ID getClientId();
```

Parameters

The function requires no input parameter.

Returns

The function returns the BLEClient object's client ID.

Example Code

NA

Notes and Warnings

The client ID is used when calling internal GATT client API.

BLEClient::setDisconnectCallback**Description**

Set a user function as a callback function when the remote device is disconnected.

Syntax

```
void setDisconnectCallback(void (*fCallback) (BLEClient* client));
```

Parameters

fCallback: A user callback function that returns void and takes one argument.

client: A pointer to the BLEClient object corresponding to the disconnected remote device

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

The user callback function will be called after the remote device has disconnected, before the characteristics, services and client associated with the remote device are deleted.

Class BLEConnect

BLEConnect Class

Description

A class used for managing BLE connection settings.

Syntax

```
class BLEConnect
```

Members

Public Constructors
No public constructor is available as this class is intended to be a singleton class. You can get a pointer to this class using BLEDevice::configConnection.

Public Methods	
BLEConnect::connect	Connect to a target BLE device
BLEConnect::disconnect	Disconnect from a target BLE device
BLEConnect::setScanInterval	Set the BLE scanning interval when connecting
BLEConnect::setScanWindow	Set the BLE scanning window when connecting
BLEConnect::setConnInterval	Set the BLE connection interval duration
BLEConnect::setConnLatency	Set the BLE connection slave latency
BLEConnect::setConnTimeout	Set the BLE connection timeout value
BLEConnect::updateConnParams	Send new BLE connection parameters to a connected device
BLEConnect::getConnInfo	Get connection information
BLEConnect::getConnAddr	Get the Bluetooth address for a certain connection
BLEConnect::getConnId	Get the connection ID for a certain device

BLEConnect::connect

Description

Connect to a target BLE device.

Syntax

```
bool connect(char* btAddr, T_GAP_REMOTE_ADDR_TYPE destAddrType, uint16_t scanTimeout);
```

```
bool connect(uint8_t (&btAddr)[6], T_GAP_REMOTE_ADDR_TYPE destAddrType, uint16_t scanTimeout);
bool connect(BLEAdvertData targetDevice, uint16_t scanTimeout);
bool connect(BLEAddr destAddr, T_GAP_REMOTE_ADDR_TYPE destAddrType, uint16_t scanTimeout);
```

Parameters

char* btAddr: target device Bluetooth address expressed as a character string.

uint8_t (&btAddr): target device Bluetooth address contained in a 6 byte array.

destAddr: target device Bluetooth address contained in BLEAddr class object.

targetDevice: advertising data packet scanned from target device.

destAddrType: Bluetooth address type of target device. Valid values:

–GAP_REMOTE_ADDR_LE_PUBLIC

–GAP_REMOTE_ADDR_LE_RANDOM

scan timeout: duration in milliseconds for which to look for target device before giving up.

Returns

True if connection successful, false if connection failed.

Example Code

Example: BLEBatteryClient

Notes and Warnings

NA

BLEConnect::disconnect

Description

Disconnect from a target BLE device.

Syntax

```
bool disconnect(uint8_t connId);
```

Parameters

connId: connection ID for target device.

Returns

True if operation successful, false if otherwise.

Example Code

NA

Notes and Warnings

NA

BLEConnect::setScanInterval

Description

Set the BLE scan interval when searching for a target device to connect to.

Syntax

```
void setScanInterval(uint16_t scanInt_ms);
```

Parameters

scanInt_ms: scan interval in milliseconds. Value range of 3 to 10240.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEConnect::setScanWindow

Description

Set the BLE scan window when searching for a target device to connect to.

Syntax

```
void setScanWindow(uint16_t scanWindow_ms);
```

Parameters

scanWindow_ms: scan window in milliseconds. Value range of 3 to 10240.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEConnect::setConnInterval

Description

Set the BLE connection interval value.

Syntax

```
void setConnInterval(uint16_t min_ms, uint16_t max_ms);
```

Parameters

min_ms: minimum acceptable connection interval in milliseconds. Value range of 8 to 4000.

max_ms: maximum acceptable connection interval in milliseconds. Value range of 8 to 4000.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

The BLE connection interval defines the period between successive connection events between a connected central and peripheral device. Even if there is no data to exchange, a connection event is required to maintain the connection. max_ms should be larger than or equal to min_ms.

BLEConnect::setConnLatency

Description

Set the BLE connection slave latency value.

Syntax

```
void setConnLatency(uint16_t latency);
```

Parameters

latency: Connection slave latency value. Value range of 0 to 499.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

The BLE connection slave latency defines the number of successive connection events a connected peripheral device can ignore without being considered as disconnected by the central device.

BLEConnect::setConnTimeout

Description

Set the BLE connection timeout value.

Syntax

```
void setConnTimeout(uint16_t timeout_ms);
```

Parameters

timeout_ms: connection timeout in milliseconds. Value range of 100 to 32000.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

The BLE connection timeout defines the duration after a failed connection events before a peripheral or central device considers the connection broken.

BLEConnect::updateConnParams

Description

Update a connected device with new connection parameters.

Syntax

```
void updateConnParams(uint8_t conn_id);
```

Parameters

conn_id: connection ID of target device to update connection parameters.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Update a connected device with previously set connection interval, slave latency and timeout values. The connected device may reject the new values if it is unable to conform to them.

BLEConnect::getConnInfo

Description

Get connection information.

Syntax

```
bool getConnInfo(uint8_t connId, T_GAP_CONN_INFO *pConnInfo);
```

Parameters

connId: connection ID to get connection information from.

pConnInfo: pointer to T_GAP_CONN_INFO structure to store obtained connection information.

Returns

True if operation success, false if operation failed.

Example Code

NA

Notes and Warnings

NA

BLEConnect::getConnAddr**Description**

Get the Bluetooth address for a certain connection.

Syntax

```
bool getConnAddr(uint8_t connId, uint8_t* addr, uint8_t* addrType);
```

Parameters

connId: connection ID to get address information for

addr: pointer to 6 byte array to store retrieved Bluetooth address

addrType: pointer to uint8_t variable to store retrieved Bluetooth address type

Returns

True if operation success, false if operation failed.

Example Code

NA

Notes and Warnings

NA

BLEConnect::getConnId**Description**

Get the connection ID for a certain device.

Syntax

```
int8_t getConnId(char* btAddr, uint8_t addrType);
```

```
int8_t getConnId(uint8_t* btAddr, uint8_t addrType);
```

```
int8_t getConnId(BLEAdvertData targetDevice);
```

Parameters

char* btAddr: target device Bluetooth address expressed as a character string.

uint8_t* btAddr: pointer to a 6 byte array containing target device Bluetooth address.

targetDevice: advertising data packet scanned from target device.

addrType: Bluetooth address type of target device. Valid values:

–GAP_REMOTE_ADDR_LE_PUBLIC

–GAP_REMOTE_ADDR_LE_RANDOM

Returns

The function returns the requested connection ID. Returns -1 if failed to obtain connection ID.

Example Code

Example: BLEBatteryClient

Notes and Warnings

NA

Class BLEDevice**BLEDevice Class****Description**

A class used for general control and management of BLE functions.

Syntax

class BLEDevice

Members

Public Constructors
The public constructor should not be used as this class is intended to be a singleton class. Access member functions using the object instance named BLE.

Public Methods	
BLEDevice::init	Allocate resources required for BLE functionality
BLEDevice::deinit	Free resources used by BLE functionality
BLEDevice::connected	Check if a BLE device is connected
BLEDevice::setDeviceName	Set BLE GAP device name
BLEDevice::setDeviceAppearance	Set BLE GAP device appearance
BLEDevice::configAdvert	Configure BLE advertising parameters
BLEDevice::configScan	Configure BLE scan parameters
BLEDevice::setScanCallback	Set callback function for BLE scans
BLEDevice::beginCentral	Start BLE stack in central mode
BLEDevice::beginPeripheral	Start BLE stack in peripheral mode
BLEDevice::end	Stop BLE stack
BLEDevice::configServer	Configure BLE stack for services
BLEDevice::addService	Add a service to the BLE stack
BLEDevice::configClient	Configure BLE stack for clients
BLEDevice::addClient	Add a client to the BLE stack
BLEDevice::getLocalAddr	Get local device Bluetooth address

BLEDevice::init**Description**

Allocate resources required for BLE functionality.

Syntax

```
void init(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: BLEBatteryService

Notes and Warnings

Call this member function first before using any other member functions in the BLEDevice class.

BLEDevice::deinit

Description

Free up resources used for BLE functionality.

Syntax

```
void deinit(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Call this member function last after all other BLE operations are stopped.

BLEDevice::connected

Description

Check if a BLE device is connected.

Syntax

```
bool connected(void);
```


Parameters

The function requires no input parameter.

Returns

TRUE if another BLE device is connected, FALSE if no BLE device is connected.

Example Code

NA

Notes and Warnings

NA

BLEDevice::setDeviceName**Description**

Set the BLE GAP device name.

Syntax

```
void setDeviceName(String devName);
```

Parameters

devName: desired device name contained in an Arduino String object

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

The GAP device name has a maximum length of 39 characters. Other devices can see this name after a BLE connection is established. This name is separate and different from the device name sent in a BLE advertisement, the names should be the same but are not required.

BLEDevice::setDeviceAppearance

Description

Set the BLE GAP device appearance.

Syntax

```
void setDeviceAppearance(uint16_t devAppearance);
```

Parameters

devAppearance: desired device appearance expressed as a 16-bit unsigned integer.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Refer to Bluetooth SIG assigned device appearances at <https://www.bluetooth.com/specifications/gatt/characteristics/>.

BLEDevice::configAdvert

Description

Configure BLE advertising parameters.

Syntax

```
BLEAdvert* configAdvert(void);
```

Parameters

The function requires no input parameter.

Returns

A pointer to a BLEAdvert class instance for configuring BLE advertising parameters.

Example Code

Example: BLEBatteryService

Notes and Warnings

Use this member function instead of creating a BLEAdvert class instance manually.

BLEDevice::configScan**Description**

Configure BLE scanning parameters.

Syntax

```
BLEScan* configScan(void);
```

Parameters

The function requires no input parameter.

Returns

A pointer to a BLEScan class instance for configuring BLE scanning parameters.

Example Code

Example: BLEScan

```
#include "BLEDevice.h"

#include "BLEScan.h"

int dataCount = 0;

void scanFunction(T_LE_CB_DATA* p_data) {
    printf("  rnScan Data %drn" , ++dataCount);
    BLE.configScan()->printScanInfo(p_data);
}

void setup() {
    BLE.init();
    BLE.configScan()->setScanMode(GAP_SCAN_MODE_ACTIVE);
    BLE.configScan()->setScanInterval(500); // Start a scan every 500ms
    BLE.configScan()->setScanWindow(250); // Each scan lasts for 250ms
    // Provide a callback function to process scan data.
    // If no function is provided, default BLEScan::printScanInfo is used
    BLE.setScanCallback(scanFunction);
    BLE.beginCentral(0);
    BLE.configScan()->startScan(5000); // Repeat scans for 5 seconds, then stop
}

void loop() {
}
```

Notes and Warnings

Use this member function instead of creating a BLEScan class instance manually.

BLEDevice::setScanCallback

Description

Set a callback function for processing BLE scan results.

Syntax

```
void setScanCallback(void (scanCB)(T_LE_CB_DATA));
```

Parameters

scanCB: a function that returns nothing and takes in a scan data pointer of type T_LE_CB_DATA*

Returns

The function returns nothing.

Example Code

Example: BLEScan

Notes and Warnings

Use this member function to set a callback function that will be called for each BLE device scan result found.

BLEDevice::beginCentral

Description

Start the BLE stack in central mode.

Syntax

```
void beginCentral(uint8_t connCount);
```

Parameters

connCount: maximum number of allowed connected devices. If no argument is provided, default to maximum allowed connected devices for specific board.

Returns

The function returns nothing.

Example Code

Example: BLEScan

The function returns nothing.

Notes and Warnings

Use this member function to start the device in BLE central mode, after other BLE parameters are set correctly.

BLEDevice::beginPeripheral

Description

Start the BLE stack in peripheral mode.

Syntax

```
void beginPeripheral(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: BLEBatteryService

Notes and Warnings

Use this member function to start the device in BLE peripheral mode, after other BLE parameters are set correctly.

BLEDevice::end

Description

Stop the BLE stack.

Syntax

```
void end(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Use this member function to stop the device operating in either BLE peripheral mode or BLE central mode.

BLEDevice::configServer**Description**

Configure the BLE stack for services.

Syntax

```
void configServer(uint8_t maxServiceCount);
```

Parameters

maxServiceCount: Maximum number of services that will run on the device

Returns

The function returns nothing.

Example Code

Example: BLEBatteryService

Notes and Warnings

Use this member function before adding any service to the BLE stack.

BLEDevice::addService

Description

Add a new service to the BLE stack.

Syntax

```
void addService(BLEService& newService);
```

Parameters

newService: the service to be added, defined using a BLEService class object.

Returns

The function returns nothing.

Example Code

Example: BLEBatteryService

Notes and Warnings

N/A

BLEDevice::configClient

Description

Configure the BLE stack for clients.

Syntax

```
void configClient();
```


Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: BLEBatteryClient

Notes and Warnings

Use this member function before adding any client to the BLE stack.

BLEDevice::addClient**Description**

Add a new client to the BLE stack.

Syntax

```
BLEClient* addClient(uint8_t connId);
```

Parameters

connId: the connection ID of the connected device to create a client for.

Returns

The function returns a pointer to a BLEClient class object, corresponding to the device with the specified connection ID, which can be used to access the services and characteristics on the connected device.

Example Code

Example: BLEBatteryClient

Notes and Warnings

Only one client should be added per connected device.

The BLEClient object and any service, characteristic, descriptor associated with the connected device will be deleted when the device is disconnected.

BLEDevice::getLocalAddr

Description

Get local device Bluetooth address.

Syntax

```
void getLocalAddr(uint8_t (&addr)[GAP_BD_ADDR_LEN]);
```

Parameters

addr: 6 byte array to store local device Bluetooth address.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Local device address is only available after starting in central or peripheral mode. This function will return all zeros for the address if central or peripheral mode is not in operation.

Class BLEHIDDevice

BLEHIDDevice Class

Description

A class used for creating and managing HID over GATT Profile (HOGP) services.

Syntax

```
class BLEHIDDevice
```

Members

Public Constructors

The public constructor should not be used as this class is intended to be a singleton class. Access member functions using the object instance named BLEHIDDev.

Public Methods	
BLEHIDDevice::init	Initialize the HID Device Profile by creating the required services
BLEHIDDevice::setNumOutputReport	Configure the number of HID output reports
BLEHIDDevice::setNumInputReport	Configure the number of HID input reports
BLEHIDDevice::setReportMap	Configure the HID report map
BLEHIDDevice::inputReport	Send a HID input report
BLEHIDDevice::setOutputReportCallback	Set a user callback function for receiving HID output reports
BLEHIDDevice::bootKeyboardReport	Send a HID boot keyboard input report
BLEHIDDevice::setHidInfo	Set HID info of the HID service
BLEHIDDevice::setBattLevel	Set battery level info of the Battery service
BLEHIDDevice::setPNPInfo	Set PNP information of the Device Information service
BLEHIDDevice::setManufacturerString	Set manufacturer information of the Device Information service
BLEHIDDevice::setModelString	Set model information of the Device Information service
BLEHIDDevice::hidService	Get reference to HID service
BLEHIDDevice::devInfoService	Get reference to Device Information service
BLEHIDDevice::battService	Get reference to Battery service

BLEHIDDevice::init

Description

Initialize the HID Device profile by creating the required services.

Syntax

```
void init(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: BLEHIDGamepad

Notes and Warnings

The HID Device object should be initialized before any HID reports can be sent.

BLEHIDDevice::setNumOutputReport

Description

Configure the number of HID output reports.

Syntax

```
void setNumOutputReport (uint8_t numOutputReports);
```

Parameters

numOutputReports: number of output reports

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

The number of output reports should be configured before BLEHIDDevice init() function is called.

BLEHIDDevice::setNumInputReport

Description

Configure the number of HID input reports.

Syntax

```
void setNumInputReport (uint8_t numInputReports);
```

Parameters

numInputReports: number of input reports

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

The number of input reports should be configured before BLEHIDDevice init() function is called.

BLEHIDDevice::setReportMap**Description**

Configure the HID report map characteristic with a HID report descriptor.

Syntax

```
void setReportMap (uint8_t* report_map, uint16_t len);
```

Parameters

report_map: pointer to HID report descriptor

len: HID report descriptor length in bytes

Returns

The function returns nothing.

Example Code

Example: BLEHIDGamepad

Notes and Warnings

The HID report map characteristic can only be configured after BLEHIDDevice init() function is called.

BLEHIDDevice::inputReport

Description

Send a HID input report.

Syntax

```
void inputReport (uint8_t reportID, uint8_t* data, uint16_t len, uint8_t conn_id);
```

Parameters

reportID: HID report ID of input report

data: pointer to HID input report data to send

len: length of HID input report data in bytes

conn_id: connection ID of device to send HID report to

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

HID input reports can only be sent after BLEHIDDevice init() function has been called.

BLEHIDDevice::setOutputReportCallback

Description

Set a user callback function for receiving HID output report data.

Syntax

```
void setOutputReportCallback (uint8_t reportID, void (*fCallback) (BLECharacteristic* chr, uint8_t conn_id));
```

Parameters

reportID: HID report ID of output report to link callback function with

chr: BLECharacteristic class object containing received HID output report data

conn_id: connection ID of device which sent HID report data

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Setting a user callback function for output reports can only occur after BLEHIDDevice init() function has been called.

BLEHIDDevice::bootKeyboardReport**Description**

Send a HID boot keyboard input report.

Syntax

```
void bootKeyboardReport (uint8_t* data, uint16_t len, uint8_t conn_id);
```

Parameters

data: pointer to HID input report data to send

len: length of HID input report data in bytes

conn_id: connection ID of device to send HID report to

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

By default, the HID service Protocol Mode characteristic has boot mode disabled. To send boot keyboard input reports, the Protocol Mode characteristic needs to have boot mode enabled.

BLEHIDDevice::setHidInfo

Description

Set data of the HID Info characteristic of the HID service.

Syntax

```
void setHidInfo (uint16_t bcd, uint8_t country, uint8_t flags);
```

Parameters

bcd: 16-bit unsigned integer representing version number of base USB HID Specification implemented by HID Device

country: 8-bit integer identifying country HID Device hardware is localized for. Most hardware is not localized (value 0x00).

flags: Bit flags indicating remote-wake capability and advertising when bonded but not connected.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

For detailed information on the characteristic, refer to Bluetooth SIG HID Service specifications.

BLEHIDDevice::setBattLevel**Description**

Set battery level data of the Battery service.

Syntax

```
void setBattLevel (uint8_t level);
```

Parameters

level: battery level expressed as % of full charge

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Battery level is set to 100% by default. For detailed information refer to Bluetooth SIG Battery service specifications.

BLEHIDDevice::setPNPInfo**Description**

Set PNP data of the Device Information service.

Syntax

```
void setPNPInfo (uint8_t sig, uint16_t vid, uint16_t pid, uint16_t version);
```

Parameters

sig: The Vendor ID Source field designates which organization assigned the value used in the Vendor ID field value.

vid: The Vendor ID field is intended to uniquely identify the vendor of the device.

pid: The Product ID field is intended to distinguish between different products made by the vendor.

version: The Product Version field is a numeric expression identifying the device release number in Binary-Coded Decimal.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

By default, sig and vid are configured to indicate Realtek as the vendor. For detailed information refer to Bluetooth SIG Device Information service specifications.

BLEHIDDevice::setManufacturerString**Description**

Set manufacturer information of the Device Information service.

Syntax

```
void setManufacturerString (const char* manufacturer);
```

Parameters

manufacturer: pointer to character string containing manufacturer name info.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Manufacturer is set to “Realtek” by default. For detailed information refer to Bluetooth SIG Device Information service specifications.

BLEHIDDevice::setModelString**Description**

Set model information of the Device Information service.

Syntax

```
void setModelString (const char* model);
```

Parameters

model: pointer to character string containing device model info.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Model is set to “Ameba_BLE_HID” by default. For detailed information refer to Bluetooth SIG Device Information service specifications.

BLEHIDDevice::hidService**Description**

Get reference to HID service

Syntax

```
BLEService& hidService ();
```

Parameters

The function requires no input parameter.

Returns

The function returns a reference to the BLEService class object for the HID service.

Example Code

Example: BLEHIDMouse

Notes and Warnings

NA

BLEHIDDevice::devInfoService

Description

Get reference to Device Information service

Syntax

```
BLEService& devInfoService ();
```

Parameters

The function requires no input parameter.

Returns

The function returns a reference to the BLEService class object for the Device Information service.

Example Code

Example: BLEHIDMouse

Notes and Warnings

NA

BLEHIDDevice::battService

Description

Get reference to Battery service

Syntax

```
BLEService& battService ();
```

Parameters

The function requires no input parameter.

Returns

The function returns a reference to the BLEService class object for the Battery service.

Example Code

Example: BLEHIDMouse

Notes and Warnings

NA

Class BLEHIDGamepad**BLEHIDGamepad Class****Description**

A class used for creating and managing a BLE HID Gamepad.

Syntax

```
class BLEHIDGamepad
```

Members

Public Constructors	
BLEHIDGame pad::BLEHIDGamepad	Constructs a BLEHIDGamepad object
Public Methods	
BLEHIDGamepad::setReportID	Set HID report ID for the HID Gamepad
BLEHIDGame pad::gamepadReport	Send a HID Gamepad report
BLEHIDGamepad::buttonPress	Send a HID Gamepad report indicating buttons pressed
BLEHIDGame pad::buttonRelease	Send a HID Gamepad report indicating buttons released
BLEHIDGamepad::buttonReleaseAll	Send a HID Gamepad report indicating no buttons pressed
BLEHIDGamepad::setHat	Send a HID Gamepad report indicating hat switch position
BLEHIDGamepad::setAxes	Send a HID Gamepad report indicating position of all axes
BLEHIDGamepad::setLeftStick	Send a HID Gamepad report indicating position of axes corresponding to left analog stick
BLEHIDGamepad::setRightStick	Send a HID Gamepad report indicating position of axes corresponding to right analog stick
BLEHIDGamepad::setTriggers	Send a HID Gamepad report indicating position of axes corresponding to triggers

BLEHIDGamepad::BLEHIDGamepad

Description

Constructs a BLE object

Syntax

```
BLEHIDGamepad::BLEHIDGamepad();
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: BLEHIDGamepad

Notes and Warnings

By default, the BLEHIDGamepad class assumes the HID report descriptor implements a gamepad device with 16 buttons, 6 16-bit axes and an 8-direction hat switch. This class will not work if a different gamepad report descriptor is implemented.

BLEHIDGamepad::setReportID

Description

Set HID report ID for the HID Gamepad.

Syntax

```
void setReportID (uint8_t reportID);
```

Parameters

reportID: The report ID for the gamepad device, corresponding to the HID report descriptor.

Returns

The function returns nothing.

Example Code

Example: BLEHIDGamepad

Notes and Warnings

HID report ID should start at 1. Some systems may consider a report ID of 0 as invalid.

BLEHIDGamepad::gamepadReport

Description

Send a HID Gamepad report.

Syntax

```
void gamepadReport (hid_gamepad_report_t* report);  
void gamepadReport (uint16_t buttons, uint8_t hat, int16_t x, int16_t y, int16_t z, int16_t Rz, int16_t Rx, int16_t Ry);
```

Parameters

report: pointer to gamepad report structure containing data on all inputs

buttons: bitmap indicating state of each button. 1 = pressed, 0 = released.

hat: position of hat switch. Valid values:

–GAMEPAD_HAT_CENTERED = 0

–GAMEPAD_HAT_UP = 1

–GAMEPAD_HAT_UP_RIGHT = 2

–GAMEPAD_HAT_RIGHT = 3

–GAMEPAD_HAT_DOWN_RIGHT = 4

–GAMEPAD_HAT_DOWN = 5

–GAMEPAD_HAT_DOWN_LEFT = 6

–GAMEPAD_HAT_LEFT = 7

–GAMEPAD_HAT_UP_LEFT = 8

x: position of x axis. Integer value from -32767 to 32767.

y: position of y axis. Integer value from -32767 to 32767.

z: position of z axis. Integer value from -32767 to 32767.

Rz: position of Rz axis. Integer value from -32767 to 32767.

Rx: position of Rx axis. Integer value from -32767 to 32767.

Ry: position of Ry axis. Integer value from -32767 to 32767.

Returns

The function returns nothing.

Example Code

Example: BLEHIDGamepad

Notes and Warnings

NA

BLEHIDGamepad::buttonPress**Description**

Send a HID Gamepad report indicating buttons pressed.

Syntax

```
void buttonPress (uint16_t buttons);
```

Parameters

buttons: bitmap indicating buttons pressed. 1 = pressed.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEHIDGamepad::buttonRelease**Description**

Send a HID Gamepad report indicating buttons released.

Syntax

```
void buttonRelease (uint16_t buttons);
```

Parameters

buttons: bitmap indicating buttons released. 1 = released.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEHIDGamepad::buttonReleaseAll

Description

Send a HID Gamepad report indicating no buttons pressed.

Syntax

```
void buttonReleaseAll (void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: BLEHIDGamepad

Notes and Warnings

NA

BLEHIDGamepad::setHat

Description

Send a HID Gamepad report indicating hat switch position.

Syntax

```
void setHat (uint8_t hat);
```

Parameters

hat: position of hat switch. Valid values:

- GAMEPAD_HAT_CENTERED = 0
- GAMEPAD_HAT_UP = 1
- GAMEPAD_HAT_UP_RIGHT = 2
- GAMEPAD_HAT_RIGHT = 3
- GAMEPAD_HAT_DOWN_RIGHT = 4
- GAMEPAD_HAT_DOWN = 5
- GAMEPAD_HAT_DOWN_LEFT = 6
- GAMEPAD_HAT_LEFT = 7
- GAMEPAD_HAT_UP_LEFT = 8

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEHIDGamepad::setAxes

Description

Send a HID Gamepad report indicating position of all axes.

Syntax

```
void setAxes (int16_t x, int16_t y, int16_t z, int16_t Rz, int16_t Rx, int16_t Ry);
```

Parameters

x: position of x axis. Integer value from -32767 to 32767.

y: position of y axis. Integer value from -32767 to 32767.

z: position of z axis. Integer value from -32767 to 32767.

Rz: position of Rz axis. Integer value from -32767 to 32767.

Rx: position of Rx axis. Integer value from -32767 to 32767.

Ry: position of Ry axis. Integer value from -32767 to 32767.

Returns

The function returns nothing.

Example Code

Example: BLEHIDGamepad

Notes and Warnings

NA

BLEHIDGamepad::setLeftStick

Description

Send a HID Gamepad report indicating position of axes corresponding to left analog stick.

Syntax

```
void setLeftStick (int16_t x, int16_t y);
```

Parameters

x: position of x axis. Integer value from -32767 to 32767.

y: position of y axis. Integer value from -32767 to 32767.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEHIDGamepad::setRightStick**Description**

Send a HID Gamepad report indicating position of axes corresponding to right analog stick.

Syntax

```
void setLeftStick (int16_t z, int16_t Rz);
```

Parameters

z: position of z axis. Integer value from -32767 to 32767.

Rz: position of Rz axis. Integer value from -32767 to 32767.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEHIDGamepad::setTriggers

Description

Send a HID Gamepad report indicating position of axes corresponding to triggers.

Syntax

```
void setTriggers (int16_t Rx, int16_t Ry);
```

Parameters

Rx: position of Rx axis. Integer value from -32767 to 32767.

Ry: position of Ry axis. Integer value from -32767 to 32767.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

Class BLEHIDKeyboard

BLEHIDKeyboard Class

Description

A class used for creating and managing a BLE HID Keyboard.

Syntax

```
class BLEHIDKeyboard
```

Members

Public Constructors	
BLEHIDKeyboard ard::BLEHIDKeyboard	Constructs a BLEHIDKeyboard object
Public Methods	
BLEHIDKeyboard::setReportID	Set HID report ID for the HID Keyboard and HID consumer control
BLEHIDKeyboard::consumerReport	Send a HID Consumer report
BLEHIDKeyboard::keyboardReport	Send a HID Keyboard report
BLEHIDKeyboard::consumerPress	Send a HID Consumer report indicating button pressed
BLEHIDKeyboard::consumerRelease	Send a HID Consumer report indicating button released
BLEHIDKeyboard::keypress	Send a HID Keyboard report indicating keys pressed
BLEHIDKeyboard::keyRelease	Send a HID Keyboard report indicating keys released
BLEHIDKeyboard::keyReleaseAll	Send a HID Keyboard report indicating no keys pressed
BLEHIDKeyboard::keyCharPress	Send a HID Keyboard report indicating keys pressed to output an ASCII character
BLEHIDKeyboard::keySequence	Send a HID Keyboard report indicating keys pressed to output an ASCII string

BLEHIDKeyboard::BLEHIDKeyboard

Description

Constructs a BLEHIDKeyboard object.

Syntax

```
BLEHIDKeyboard::BLEHIDKeyboard();
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: BLEHIDKeyboard

Notes and Warnings

NA

BLEHIDKeyboard::setReportID

Description

Set HID report ID for the HID Keyboard and HID consumer control.

Syntax

```
void setReportID (uint8_t reportIDKeyboard, uint8_t reportIDConsumer);
```

Parameters

reportIDKeyboard: The report ID for the HID keyboard device, corresponding to the HID report descriptor.

reportIDConsumer: The report ID for the HID consumer control device, corresponding to the HID report descriptor.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEHIDKeyboard::consumerReport

Description

Send a HID Consumer report.

Syntax

```
void consumerReport (uint16_t usage_code);
```

Parameters

usage_code: HID consumer control usage code for the button pressed.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEHIDKeyboard::keyboardReport

Description

Send a HID Keyboard report.

Syntax

```
void keyboardReport (void);  
void keyboardReport (uint8_t modifiers, uint8_t keycode[6]);
```

Parameters

modifiers: bitmap indicating key modifiers pressed (CTRL, ALT, SHIFT).
keycode: byte array indicating keys pressed.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEHIDKeyboard::consumerPress

Description

Send a HID Consumer report indicating button pressed.

Syntax

```
void consumerPress (uint16_t usage_code);
```

Parameters

usage_code: HID consumer control usage code for the button pressed.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEHIDKeyboard::consumerRelease

Description

Send a HID Consumer report indicating button released.

Syntax

```
void consumerRelease (void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEHIDKeyboard::keypress**Description**

Send a HID Keyboard report indicating keys pressed.

Syntax

```
void keyPress (uint16_t key);
```

Parameters

key: HID keycode for key pressed, value ranges from 0x00 to 0xE7.

Returns

The function returns nothing.

Example Code

Example: BLEHIDKeyboard

Notes and Warnings

NA

BLEHIDKeyboard::keyRelease**Description**

Send a HID Keyboard report indicating keys released.

Syntax

```
void keyRelease (uint16_t key);
```

Parameters

key: HID keycode for key pressed, value ranges from 0x00 to 0xE7.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEHIDKeyboard::keyReleaseAll

Description

Send a HID Keyboard report indicating no keys pressed.

Syntax

```
void keyReleaseAll(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: BLEHIDKeyboard

Notes and Warnings

NA

BLEHIDKeyboard::keyCharPress

Description

Send a HID Keyboard report indicating keys pressed to output an ASCII character.

Syntax

```
void keyCharPress (char ch);
```

Parameters

ch: ASCII character to output.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEHIDKeyboard::keySequence

Description

Send a HID Keyboard report indicating keys pressed to output an ASCII string.

Syntax

```
void keySequence (const char* str, uint16_t delayTime);
```

```
void keySequence (String str, uint16_t delayTime);
```

Parameters

str: pointer to character string to output

str: String object containing character string to output

delayTime: time delay between key press and release, in milliseconds. Default value of 5.

Returns

The function returns nothing.

Example Code

Example: BLEHIDKeyboard

Notes and Warnings

NA

Class BLEHIDMouse**BLEHIDMouse Class****Description**

A class used for creating and managing a BLE HID Mouse.

Syntax

```
class BLEHIDMouse
```

Members

Public Constructors	
BLE HIDMouse::BLEHIDMouse	Constructs a BLEHIDMouse object
Public Methods	
BLE HIDMouse::setReportID	Set HID report ID for the HID Mouse
BLE HIDMouse::mouseReport	Send a HID Mouse report
BL EHIDMouse::mousePress	Send a HID Mouse report indicating buttons pressed
BLEH IDMouse::mouseRelease	Send a HID Mouse report indicating buttons released
BLEHIDM ouse::mouseReleaseAll	Send a HID Mouse report indicating no buttons pressed
B LEHIDMouse::mouseMove	Send a HID Mouse report indicating mouse movement
BLE HIDMouse::mouseScroll	Send a HID Mouse report indicating mouse scroll wheel movement

BLEHIDMouse::BLEHIDMouse

Description

Constructs a BLEHIDMouse object.

Syntax

```
BLEHIDMouse::BLEHIDMouse();
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: BLEHIDMouse

Notes and Warnings

NA

BLEHIDMouse::setReportID

Description

Set HID report ID for the HID Mouse.

Syntax

```
void setReportID (uint8_t reportID);
```

Parameters

reportID: The report ID for the HID mouse device, corresponding to the HID report descriptor.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEHIDMouse::mouseReport

Description

Send a HID Mouse report.

Syntax

```
void mouseReport (hid_mouse_report_t* report);  
void mouseReport (uint8_t buttons, int8_t x, int8_t y, int8_t scroll);
```

Parameters

report: pointer to mouse report structure containing data on mouse inputs

buttons: bitmap indicating state of each button. 1 = pressed, 0 = released.

x: mouse x-axis movement. Integer value from -127 to 127.

y: mouse y-axis movement. Integer value from -127 to 127.

scroll: mouse scroll wheel movement. Integer value from -127 to 127.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEHIDMouse::mousePress

Description

Send a HID Mouse report indicating buttons pressed.

Syntax

```
void mousePress (uint8_t buttons);
```

Parameters

buttons: bitmap indicating buttons pressed. 1 = pressed.

Returns

The function returns nothing.

Example Code

Example: BLEHIDMouse

Notes and Warnings

NA

BLEHIDMouse::mouseRelease

Description

Send a HID Mouse report indicating buttons released.

Syntax

```
void mouseRelease (uint8_t buttons);
```

Parameters

buttons: bitmap indicating buttons released. 1 = released.

Returns

The function returns nothing.

Example Code

Example: BLEHIDMouse

Notes and Warnings

NA

BLEHIDMouse::mouseReleaseAll

Description

Send a HID Mouse report indicating no buttons pressed.

Syntax

```
void mouseReleaseAll(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEHIDMouse::mouseMove

Description

Send a HID Mouse report indicating mouse movement.

Syntax

```
void mouseMove (int8_t x, int8_t y);
```

Parameters

x: mouse x-axis movement. Integer value from -127 to 127.

y: mouse y-axis movement. Integer value from -127 to 127.

Returns

The function returns nothing.

Example Code

Example: BLEHIDMouse

Notes and Warnings

NA

BLEHIDMouse::mouseScroll**Description**

Send a HID Mouse report indicating mouse scroll wheel movement.

Syntax

```
void mouseScroll (int8_t scroll);
```

Parameters

scroll: mouse scroll wheel movement. Integer value from -127 to 127.

Returns

The function returns nothing.

Example Code

Example: BLEHIDMouse

Notes and Warnings

NA

Class BLERemoteCharacteristic

BLERemoteCharacteristic Class

Description

A class used for managing BLE GATT characteristics on connected remote devices.

Syntax

```
class BLERemoteCharacteristic
```

Members

Public Constructors
No public constructor is available for this class. You can get a pointer to an instance of this class using BLERemoteService::getCharacteristic().

Public Methods	
BLERemoteCharacteristic::getDescriptor	Get a specific descriptor on the remote device
BLERemoteCharacteristic::getUUID	Get the characteristic UUID
BLERemoteCharacteristic::setBufferLen	Set the size of the internal data buffer
BLERemoteCharacteristic::getBufferLen	Get the current size of the internal data buffer
BLERemoteCharacteristic::canRead	Determine if characteristic has read property enabled
BLERemoteCharacteristic::canWrite	Determine if characteristic has write property enabled
BLERemoteCharacteristic::canNotify	Determine if characteristic has notify property enabled
BLERemoteCharacteristic::canIndicate	Determine if characteristic has indicate property enabled
BLERemoteCharacteristic::getProperties	Get the characteristic properties
BLERemoteCharacteristic::readString	Read the characteristic data buffer as a String object
BLERemoteCharacteristic::readData8	Read the characteristic data buffer as an unsigned 8-bit integer
BLERemoteCharacteristic::readData16	Read the characteristic data buffer as an unsigned 16-bit integer
BLERemoteCharacteristic::readData32	Read the characteristic data buffer as an unsigned 32-bit integer
BLERemoteCharacteristic::writeString	Write data to the characteristic as a String object or character array
BLERemoteCharacteristic::writeData8	Write data to the characteristic as an unsigned 8-bit integer
BLERemoteCharacteristic::writeData16	Write data to the characteristic as an unsigned 16-bit integer
BLERemoteCharacteristic::writeData32	Write data to the characteristic as an unsigned 16-bit integer
BLERemoteCharacteristic::setData	Write data to the characteristic
BLERemoteCharacteristic::getData	Read data from the characteristic
BLERemoteCharacteristic::enableNotifyIndicate	Enable notification or indication for the characteristic
BLERemoteCharacteristic::disableNotifyIndicate	Disable notification and indication for the characteristic
BLERemoteCharacteristic::setNotifyCallback	Set a user function as a notification callback

BLERemoteCharacteristic::getDescriptor

Description

Get a descriptor with the specified UUID on the remote device.

Syntax

```
BLERemoteDescriptor* getDescriptor(const char* uuid);
```

```
BLERemoteDescriptor* getDescriptor(BLEUUID uuid);
```

Parameters

uuid: the desired descriptor UUID, expressed as a character array or a BLEUUID object

Returns

The function returns the found descriptor as a BLERemoteDescriptor object pointer, otherwise nullptr is returned if a descriptor with the UUID is not found.

Example Code

NA

Notes and Warnings

NA

BLERemoteCharacteristic::getUUID

Description

Get the characteristic UUID.

Syntax

```
BLEUUID getUUID();
```

Parameters

The function requires no input parameter.

Returns

The function returns the characteristic UUID as a BLEUUID class object.

Example Code

NA

Notes and Warnings

NA

BLERemoteCharacteristic::setBufferLen

Description

Set the size of the internal data buffer of the characteristic.

Syntax

```
void setBufferLen(uint16_t max_len);
```

Parameters

max_len: number of bytes to resize the internal buffer to.

Returns

The function returns nothing.

Example Code

Example: BLEUartClient

Notes and Warnings

Characteristic data buffer has a default size of 20 bytes and can be increased up to 230 bytes.

BLERemoteCharacteristic::getBufferLen

Description

Get the size of the characteristic internal buffer.

Syntax

```
uint16_t getBufferLen();
```

Parameters

The function requires no input parameter.

Returns

The function returns the currently set internal buffer size.

Example Code

NA

Notes and Warnings

NA

BLERemoteCharacteristic::canRead

Description

Determine if characteristic has read property enabled.

Syntax

```
bool canRead();
```

Parameters

The function requires no input parameter.

Returns

The function returns TRUE if the read property for the characteristic is enabled.

Example Code

NA

Notes and Warnings

NA

BLERemoteCharacteristic::canWrite

Description

Determine if characteristic has write property enabled.

Syntax

```
bool canWrite();
```

Parameters

The function requires no input parameter.

Returns

The function returns TRUE if the write property for the characteristic is enabled.

Example Code

NA

Notes and Warnings

NA

BLERemoteCharacteristic::canNotify**Description**

Determine if characteristic has notify property enabled.

Syntax

```
bool canNotify();
```

Parameters

The function requires no input parameter.

Returns

The function returns TRUE if the notify property for the characteristic is enabled.

Example Code

NA

Notes and Warnings

NA

BLERemoteCharacteristic::canIndicate

Description

Determine if characteristic has indicate property enabled.

Syntax

```
bool canIndicate();
```

Parameters

The function requires no input parameter.

Returns

The function returns TRUE if the indicate property for the characteristic is enabled.

Example Code

NA

Notes and Warnings

NA

BLERemoteCharacteristic::getProperties

Description

Get the characteristic properties.

Syntax

```
uint16_t getProperties();
```

Parameters

The function requires no input parameter.

Returns

The function returns the characteristic properties.

Example Code

NA

Notes and Warnings

NA

BLERemoteCharacteristic::readString**Description**

Request for characteristic data from the remote device and read the data in the buffer, expressed as a String class object.

Syntax

```
String readString();
```

Parameters

The function requires no input parameter.

Returns

The function returns the data in the characteristic buffer expressed as a String class object.

Example Code

Example: BLEUartClient

Notes and Warnings

NA

BLERemoteCharacteristic::readData8

Description

Request for characteristic data from the remote device and read the data in the buffer, expressed as an unsigned 8-bit integer.

Syntax

```
uint8_t readData8();
```

Parameters

The function requires no input parameter.

Returns

The function returns the data in the characteristic buffer expressed as a uint8_t value.

Example Code

Example: BLEBatteryClient

Notes and Warnings

NA

BLERemoteCharacteristic::readData16

Description

Request for characteristic data from the remote device and read the data in the buffer, expressed as an unsigned 16-bit integer.

Syntax

```
uint16_t readData16();
```

Parameters

The function requires no input parameter.

Returns

The function returns the data in the characteristic buffer expressed as a uint16_t value.

Example Code

NA

Notes and Warnings

NA

BLERemoteCharacteristic::readData32**Description**

Request for characteristic data from the remote device and read the data in the buffer, expressed as an unsigned 32-bit integer.

Syntax

```
uint32_t readData32();
```

Parameters

The function requires no input parameter.

Returns

The function returns the data in the characteristic buffer expressed as a uint32_t value.

Example Code

NA

Notes and Warnings

NA

BLERemoteCharacteristic::writeString

Description

Write data to the remote device characteristic as a String object or character array.

Syntax

```
bool writeString(String str);  
bool writeString(const char* str);
```

Parameters

str: the data to write to the remote characteristic, expressed as a String class object or a char array.

Returns

The function returns TRUE if write data is successful.

Example Code

NA

Notes and Warnings

NA

BLERemoteCharacteristic::writeData8

Description

Write data to the remote device characteristic as an unsigned 8-bit integer.

Syntax

```
bool writeData8(uint8_t num);
```

Parameters

num: the data to write to the characteristic buffer expressed as an unsigned 8-bit integer.

Returns

The function returns TRUE if write data is successful.

Example Code

NA

Notes and Warnings

NA

BLERemoteCharacteristic::writeData16**Description**

Write data to the remote device characteristic as an unsigned 16-bit integer.

Syntax

```
bool writeData16(uint16_t num);
```

Parameters

num: the data to write to the characteristic buffer expressed as an unsigned 16-bit integer.

Returns

The function returns TRUE if write data is successful.

Example Code

NA

Notes and Warnings

NA

BLERemoteCharacteristic::writeData32

Description

Write data to the remote device characteristic as a 32-bit integer.

Syntax

```
bool writeData32(uint32_t num);
```

```
bool writeData32(int num);
```

Parameters

num: the data to write to the characteristic buffer expressed as a 32-bit integer.

Returns

The function returns TRUE if write data is successful.

Example Code

NA

Notes and Warnings

NA

BLERemoteCharacteristic::setData

Description

Write data to the remote device characteristic.

Syntax


```
bool setData(uint8_t* data, uint16_t datalen);
```

Parameters

data: pointer to byte array containing desired data

datalen: number of bytes of data to write

Returns

The function returns TRUE if write data is successful.

Example Code

NA

Notes and Warnings

NA

BLERemoteCharacteristic::getData**Description**

Request for characteristic data from the remote device and read the data in the buffer.

Syntax

```
uint16_t getData(uint8_t* data, uint16_t datalen);
```

Parameters

data: pointer to byte array to save data read from buffer

datalen: number of bytes of data to read

Returns

The function returns the number of bytes read.

Example Code

NA

Notes and Warnings

If the data buffer contains less data than requested, it will only read the available number of bytes of data.

BLERemoteCharacteristic::enableNotifyIndicate

Description

Enable the remote device to send notifications or indications for the characteristic.

Syntax

```
void enableNotifyIndicate(bool notify = 1);
```

Parameters

notify: TRUE to enable notifications, FALSE to enable indications.

Returns

The function returns nothing.

Example Code

Example: BLEUartClient

Notes and Warnings

NA

BLERemoteCharacteristic::disableNotifyIndicate

Description

Disable receiving notifications and indications for the characteristic from the remote device.

Syntax

```
void disableNotifyIndicate();
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLERemoteCharacteristic::setNotifyCallback**Description**

Set a user function to be called when the characteristic receives a notification from the remote device.

Syntax

```
void setNotifyCallback(void (*fCallback) (BLERemoteCharacteristic* chr, uint8_t* data, uint16_t length));
```

Parameters

fCallback: A user callback function that returns void and takes three arguments.

chr: pointer to BLERemoteCharacteristic object associated with notification.

data: pointer to byte array containing notification data.

length: number of bytes of notification data in array.

Returns

The function returns nothing.

Example Code

Example: BLEUartClient

Notes and Warnings

NA

Class BLERemoteDescriptor

BLERemoteDescriptor Class

Description

A class used for managing BLE GATT descriptors on connected remote devices.

Syntax

```
class BLERemoteDescriptor
```

Members

Public Constructors
No public constructor is available for this class. You can get a pointer to an instance of this class using BLERemoteCharacteristic::getDescriptor().

Public Methods	
BLERemoteDescriptor::getUUID	Get the descriptor UUID
BLERemoteDescriptor::setBufferLen	Set the size of the internal data buffer
BLERemoteDescriptor::getBufferLen	Get the current size of the internal data buffer
BLERemoteDescriptor::readString	Read the descriptor data buffer as a String object
BLERemoteDescriptor::readData8	Read the descriptor data buffer as an unsigned 8-bit integer
BLERemoteDescriptor::readData16	Read the descriptor data buffer as an unsigned 16-bit integer
BLERemoteDescriptor::readData32	Read the descriptor data buffer as an unsigned 32-bit integer
BLERemoteDescriptor::writeString	Write data to the descriptor as a String object or character array
BLERemoteDescriptor::writeData8	Write data to the descriptor as an unsigned 8-bit integer
BLERemoteDescriptor::writeData16	Write data to the descriptor as an unsigned 16-bit integer
BLERemoteDescriptor::writeData32	Write data to the descriptor as an unsigned 16-bit integer
BLERemoteDescriptor::setData	Write data to the descriptor
BLERemoteDescriptor::getData	Read data from the descriptor

BLERemoteDescriptor::getUUID

Description

Get the descriptor UUID.

Syntax

```
BLEUUID getUUID();
```

Parameters

The function requires no input parameter.

Returns

The function returns the descriptor UUID as a BLEUUID class object.

Example Code

NA

Notes and Warnings

NA

BLERemoteDescriptor::setBufferLen

Description

Set the size of the internal data buffer of the descriptor.

Syntax

```
void setBufferLen(uint16_t max_len);
```

Parameters

max_len: number of bytes to resize the internal buffer to.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Descriptor data buffer has a default size of 20 bytes and can be increased up to 230 bytes.

BLERemoteDescriptor::getBufferLen

Description

Get the size of the descriptor internal buffer.

Syntax

```
uint16_t getBufferLen();
```

Parameters

The function requires no input parameter.

Returns

The function returns the currently set internal buffer size.

Example Code

NA

Notes and Warnings

NA

BLERemoteDescriptor::readString

Description

Request for descriptor data from the remote device and read the data in the buffer, expressed as a String class object.

Syntax

```
String readString();
```

Parameters

The function requires no input parameter.

Returns

The function returns the data in the descriptor buffer expressed as a String class object.

Example Code

NA

Notes and Warnings

NA

BLERemoteDescriptor::readData8**Description**

Request for descriptor data from the remote device and read the data in the buffer, expressed as an unsigned 8-bit integer.

Syntax

```
uint8_t readData8();
```

Parameters

The function requires no input parameter.

Returns

The function returns the data in the descriptor buffer expressed as a uint8_t value.

Example Code

NA

Notes and Warnings

NA

BLERemoteDescriptor::readData16

Description

Request for descriptor data from the remote device and read the data in the buffer, expressed as an unsigned 16-bit integer.

Syntax

```
uint16_t readData16();
```

Parameters

The function requires no input parameter.

Returns

The function returns the data in the descriptor buffer expressed as a uint16_t value.

Example Code

NA

Notes and Warnings

NA

BLERemoteDescriptor::readData32

Description

Request for descriptor data from the remote device and read the data in the buffer, expressed as an unsigned 32-bit integer.

Syntax

```
uint32_t readData32();
```

Parameters

The function requires no input parameter.

Returns

The function returns the data in the descriptor buffer expressed as a uint32_t value.

Example Code

NA

Notes and Warnings

NA

BLERemoteDescriptor::writeString**Description**

Write data to the remote device descriptor as a String object or character array.

Syntax

```
bool writeString(String str);  
bool writeString(const char* str);
```

Parameters

str: the data to write to the remote descriptor, expressed as a String class object or a char array.

Returns

The function returns TRUE if write data is successful.

Example Code

NA

Notes and Warnings

NA

BLERemoteDescriptor::writeData8

Description

Write data to the remote device descriptor as an unsigned 8-bit integer.

Syntax

```
bool writeData8(uint8_t num);
```

Parameters

num: the data to write to the descriptor buffer expressed as an unsigned 8-bit integer.

Returns

The function returns TRUE if write data is successful.

Example Code

NA

Notes and Warnings

NA

BLERemoteDescriptor::writeData16

Description

Write data to the remote device descriptor as an unsigned 16-bit integer.

Syntax

```
bool writeData16(uint16_t num);
```

Parameters

num: the data to write to the descriptor buffer expressed as an unsigned 16-bit integer.

Returns

The function returns TRUE if write data is successful.

Example Code

NA

Notes and Warnings

NA

BLERemoteDescriptor::writeData32**Description**

Write data to the remote device descriptor as a 32-bit integer.

Syntax

```
bool writeData32(uint32_t num);
```

```
bool writeData32(int num);
```

Parameters

num: the data to write to the descriptor buffer expressed as a 32-bit integer.

Returns

The function returns TRUE if write data is successful.

Example Code

NA

Notes and Warnings

NA

BLERemoteDescriptor::setData

Description

Write data to the remote device descriptor.

Syntax

```
bool setData(uint8_t* data, uint16_t datalen);
```

Parameters

data: pointer to byte array containing desired data

datalen: number of bytes of data to write

Returns

The function returns TRUE if write data is successful.

Example Code

NA

Notes and Warnings

NA

BLERemoteDescriptor::getData

Description

Request for descriptor data from the remote device and read the data in the buffer.

Syntax

```
uint16_t getData(uint8_t* data, uint16_t datalen);
```

Parameters

data: pointer to byte array to save data read from buffer

datalen: number of bytes of data to read

Returns

The function returns the number of bytes read.

Example Code

NA

Notes and Warnings

If the data buffer contains less data than requested, it will only read the available number of bytes of data.

Class BLERemoteService**BLERemoteService Class****Description**

A class used for managing BLE GATT services on connected remote devices.

Syntax

```
class BLERemoteService
```

Members

Public Constructors

No public constructor is available for this class. You can get a pointer to an instance of this class using BLE-Client::getService().

Public Methods	
BLERemoteService::getUUID	Get the service UUID
BLE RemoteService::getCharacteristic	Get a specific characteristic on the remote device

BLERemoteService::getUUID**Description**

Get the service UUID.

Syntax

```
BLEUUID getUUID();
```

Parameters

The function requires no input parameter.

Returns

The function returns the service UUID as a BLEUUID class object.

Example Code

NA

Notes and Warnings

NA

BLERemoteService::getCharacteristic**Description**

Get a characteristic with the specified UUID on the remote device.

Syntax

```
BLERemoteCharacteristic* getCharacteristic (const char* uuid);  
BLERemoteCharacteristic* getCharacteristic (BLEUUID uuid);
```

Parameters

uuid: the desired characteristic UUID, expressed as a character array or a BLEUUID object.

Returns

The function returns the found characteristic as a BLERemoteCharacteristic object pointer, otherwise nullptr is returned if a characteristic with the UUID is not found.

Example Code

Example: BLEUartClient

Notes and Warnings

NA

Class BLEScan

BLEScan Class

Description

A class used for managing BLE scanning settings.

Syntax

```
class BLEScan
```

Members

Public Constructors
No public constructor is available as this class is intended to be a singleton class. You can get a pointer to this class using BLEDevice::configScan

Public Methods	
BLEScan::updateScanParams	Update the current BLE advertisement settings to the lower Bluetooth stack
BLEScan::startScan	Start a BLE scan
BLEScan::stopScan	Stop a BLE scan
BLEScan::setScanMode	Set the BLE scanning mode
BLEScan::setScanInterval	Set the BLE scanning interval
BLEScan::setScanWindow	Set the BLE scanning window
BLEScan::setScanDuplicateFilter	Set the BLE scan duplicate filter
BLEScan::scanInProgress	Check if a scan is currently in progress
BLEScan::printScanInfo	Print out scanned information

BLEScan::updateScanParams

Description

Update the lower Bluetooth stack with the current scan settings.

Syntax

```
void updateScanParams(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: BLEScan

Notes and Warnings

Stop any scans in progress first before using this function.

BLEScan::startScan

Description

Start BLE scanning.

Syntax

```
void startScan();  
void startScan(uint32_t scanDuration_ms);
```

Parameters

scanDuration: BLE scan will stop after scanDuration milliseconds.

Returns

The function returns nothing.

Example Code

Example: BLEScan

Notes and Warnings

Set the scan parameters first before starting a scan. BLE scans will occur continuously for the duration set with BLEDevice::setScanWindow() and will repeat with a time interval set with BLEDevice::setScanInterval(). Call this member function without an argument to start scanning until BLEDevice::stopScan() is called.

BLEScan::stopScan**Description**

Stop BLE scanning.

Syntax

```
void stopScan(void);
```

Parameters

The function requires no input paramter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEScan::setScanMode

Description

Set the BLE scan mode.

Syntax

```
void setScanMode(uint8_t scanMode);
```

Parameters

scanMode: GAP_SCAN_MODE_PASSIVE for passive scanning, GAP_SCAN_MODE_ACTIVE for active scanning

Returns

The function returns nothing.

Example Code

Example: BLEScan

Notes and Warnings

Active scanning will request for scan response packets after discovering an advertising device. Passive scanning will only capture advertising data packets.

BLEScan::setScanInterval

Description

Set the BLE scan interval.

Syntax

```
void setScanInterval(uint16_t scanInt_ms);
```

Parameters

scanInt_ms: scan interval in milliseconds. Value range of 3 to 10240.

Returns

The function returns nothing.

Example Code

Example: BLEScan

Notes and Warnings

A BLE scan will repeat with a time interval set with this member function.

BLEScan::setScanWindow

Description

Set the BLE scan window.

Syntax

```
void setScanWindow(uint16_t scanWindow_ms);
```

Parameters

scanWindow_ms: scan window in milliseconds. Value range of 3 to 10240.

Returns

The function returns nothing.

Example Code

Example: BLEScan

Notes and Warnings

A BLE scan will scan continuously for a window duration set with this member function. The scan window should be less than or equal to the scan interval.

BLEScan::setScanDuplicateFilter

Description

Set the scan duplicate filter.

Syntax

```
void setScanDuplicateFilter(bool dupeFilter);
```

Parameters

dupeFilter: TRUE to enable duplicate filtering.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Enabling duplicate filters will ignore scan results for devices already discovered previously.

BLEScan::scanInProgress**Description**

Set the scan duplicate filter.

Syntax

```
bool scanInProgress(void);
```

Parameters

The function requires no input paramter.

Returns

TRUE if BLE scanning is in progress.

Example Code

NA

Notes and Warnings

NA

BLEScan::printScanInfo**Description**

Parse and print out scanned information.

Syntax

```
void printScanInfo(T_LE_CB_DATA* p_data);
```

Parameters

p_data: pointer to scan data of type T_LE_CB_DATA*

Returns

The function returns nothing.

Example Code

Example: BLEScan

Notes and Warnings

Use this member function to parse the various fields of received advertisement data packets and print the results out to the serial monitor.

Class BLEService**BLEService Class****Description**

A class used for creating and managing BLE GATT services.

Syntax

```
class BLEService
```

Members

Public Constructors	
BLEService::BLEService	Constructs a BLEService object
Public Methods	
BLEService::setUUID	Set service UUID
BLEService::getUUID	Get service UUID
BLEService::addCharacteristic	Add a characteristic to service
BLEService::getCharacteristic	Get a previously added characteristic

BLEService::BLEService**Description**

Constructs a BLEService object.

Syntax

```
BLEService::BLEService(BLEUUID uuid);  
BLEService::BLEService(const char* uuid);
```

Parameters

uuid: service UUID, expressed as a BLEUUID class object or a character array

Returns

The function returns nothing.

Example Code

Example: BLEUartService

Notes and Warnings

NA

BLEService::setUUID**Description**

Set the service UUID.

Syntax

```
void setUUID(BLEUUID uuid);
```

Parameters

uuid: service UUID, expressed as a BLEUUID class object.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEService::getUUID

Description

Get the service UUID.

Syntax

```
BLEUUID getUUID();
```

Parameters

The function requires no input parameter.

Returns

The function returns the service UUID in a BLEUUID class object.

Example Code

NA

Notes and Warnings

NA

BLEService::addCharacteristic

Description

Add a characteristic to the service.

Syntax

```
void addCharacteristic(BLECharacteristic& newChar);
```

Parameters

newChar: the BLECharacteristic to add to the service.

Returns

The function returns nothing.

Example Code

Example: BLEUartService

Notes and Warnings

NA

BLEService::getCharacteristic**Description**

Get a previously added characteristic.

Syntax

```
BLECharacteristic* getCharacteristic(uint8_t charIndex);
```

Parameters

charIndex: position index of characteristic.

Returns

The function returns a pointer to the BLECharacteristic at the requested position index.

Example Code

NA

Notes and Warnings

NA

Class BLEUUID

BLEUUID Class

Description

A class used for creating and managing UUIDs.

Syntax

```
class BLEUUID
```

Members

Public Constructors	
BLEUUID::BLEUUID	Create a UUID object
Public Methods	
BLEUUID::str	Get the character string representation of UUID
BLEUUID::data	Get the binary representation of UUID
BLEUUID::length	Get the length of UUID

BLEUUID::BLEUUID

Description

Create a UUID object from a UUID character string

Syntax

```
BLEUUID();  
BLEUUID(const char* str);  
BLEUUID(uint8_t* data, uint8_t length);
```

Parameters

str: UUID character string used to created object

data: pointer to byte array containing the desired UUID

length: number of bytes in array containing the desired UUID. Valid values of 2, 4 or 16

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings**BLEUUID::str****Description**

Get the character string representation of UUID

Syntax

```
const char* str(void);
```

Parameters

The function requires no input parameter.

Returns

Pointer to a character string representation of the UUID

Example Code

NA

Notes and Warnings**BLEUUID::data**

Description

Get the binary representation of UUID

Syntax

```
const uint8_t* data(void);
```

Parameters

The function requires no input parameter.

Returns

Pointer to an unsigned 8-bit integer array containing the UUID expressed in binary form

Example Code

NA

Notes and Warnings

Returned pointer is of const uint8_t* type and will not allow changing of the data.

BLEUUID::length

Description

Get the length of UUID

Syntax

```
uint8_t length(void);
```

Parameters

The function requires no input parameter.

Returns

Length of the UUID, in terms of bytes

Example Code

NA

Notes and Warnings

A 4-character UUID will be 16 bits / 2 bytes long.

A 32-character UUID will be 128 bits / 16 bytes long.

Class BLEWifiConfigService**BLEWifiConfigService Class****Description**

A class used for managing a BLE WiFi configuration service running on the device.

Syntax

```
class BLEWifiConfigService
```

Members

Public Constructors	
BLEWifiCon figService::BLEWifiConfigService	Only one instance of this class should be created

Public Methods	
BLEWifiConfigService::begin	Start background thread to process WiFi configuration commands
BLEWifiConfigService::end	Stop background thread processing WiFi configuration commands
BLEWifiConfigService::addService	Add the service to the BLE stack
BLEWifiConfigService::advData	Get advertising data correctly formatted for WiFi configuration service

BLEWifiConfigService::BLEWifiConfigService**Description**

Create an instance of the BLEWifiConfigService object.

Syntax

```
void BLEWifiConfigService ();
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: BLEWifiConfig

Notes and Warnings

Only one instance of this class / service should be created.

BLEWifiConfigService::begin

Description

Start background thread to process WiFi configuration commands.

Syntax

```
void begin();
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: BLEWifiConfig

Notes and Warnings

NA

BLEWifiConfigService::end**Description**

Stop background thread processing WiFi configuration commands.

Syntax

```
void end();
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEWifiConfigService::addService**Description**

Add the WiFi configuration service to the BLE stack.

Syntax

```
void addService();
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: BLEWifiConfig

Notes and Warnings

NA

BLEWifiConfigService::advData

Description

Get advertising data correctly formatted for WiFi configuration service.

Syntax

```
BLEAdvertData advData();
```

Parameters

The function requires no input parameter.

Returns

The function returns a BLEAdvertData object that contains the required advertising data fields for the WiFi configuration service to work.

Example Code

Example: BLEWifiConfig

Notes and Warnings

The advertisement data needs to be correctly formatted for the corresponding smartphone app to recognise the device. WiFi configuration service advertisement data requires the local BT address, and should be called only after peripheral mode is started and may also require stopping and restarting the advertising process.

EPDIF

Class EpdIF

EpdIf Class

Description

A class used to control the electronic paper display internal functions.

Syntax

```
class EpdIf
```

Members

Public Constructors

A public constructor should not be used as this class is intended to be a singleton class. Access member functions using the object instance named EpdIf.

Public Methods

EpdIf::EPD_Dis_Part	Put an image buffer to the frame memory, but not updating the display
EpdIf::EPD_SetFrame	Put display data to the frame memory, usually used for setup text display functions
EpdIf::EPD_SetRAMValue_BaseMap	To read image data stored in the RAM, but not display on the screen
EpdIf::EPD_SetFrameMemory	To read image data stored in the buffer, but not display on the screen
EpdIf::EPD_UpdateDisplay	Update the display
EpdIf::EPD_ClearScreen_White	Clear the frame memory with the White color, but not updating the display
EpdIf::EPD_ClearScreen_Black	Clear the frame memory with the Black color, but not updating the display
EpdIf::EPD_Busy	Wait until the Busy pin goes to low, which is the idle state
EpdIf::EPD_Reset	Used for the Epaper module reset. Often used to awaken the module in deep sleep
EpdIf::EPD_Sleep	After this command is transmitted, the chip would enter the deep-sleep mode to save power

EpdIf:: EPD_Dis_Part

Description

Put an image buffer to the frame memory, but not updating the display.

Syntax

```
void EPD_Dis_Part(unsigned int x_start, unsigned int y_start, const unsigned char* datas, unsigned int PART_COLUMN, unsigned int PART_LINE);
```

Parameters

x_start: starting position of the x-axis

y_start: starting position of the y-axis

datas: data to be displayed on the e-paper module

PART_COLUMN: height of the display area

PART_LINE: width of the display area

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

EpdIf:: EPD_SetFrame

Description

Put display data to the frame memory, usually used for setup text display functions.

Syntax

```
void EPD_SetFrame(const unsigned char* image_buffer, int x, int y, int image_width, int image_height);
```

Parameters

image_buffer: the buffer which stores the data to be displayed on the e-paper module, usually used to display texts.

x: starting position of the x-axis

y: starting position of the y-axis

image_width: width of the display area

image_height: height of the display area

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

EpdIf:: EPD_SetRAMValue_BaseMap**Description**

To read image data stored in the RAM, but not display on the screen.

Syntax

```
void EPD_SetRAMValue_BaseMap(const unsigned char* datas);
```

Parameters

datas: contains the black and white information that forms the image stored in RAM

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

EpdIf:: EPD_SetFrameMemory

Description

To read image data stored in the buffer but not display on the screen.

Syntax

```
void EPD_SetFrameMemory(const unsigned char* image_buffer);
```

Parameters

image_buffer: the buffer where stores the image data in hexadecimal numbers

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

EpdIf:: EPD_UpdateDisplay

Description

Update the ePaper display module. Always combined used with functions set the frames.

Syntax

```
void EPD_UpdateDisplay(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

There are 2 memory areas embedded in the e-paper display but once this function is called, then the next action of SetFrameMemory or ClearScreen will set the other memory area.

EpdIf:: EPD_ClearScreen_White**Description**

Clear the frame memory with the White color.

Syntax

```
void EpdIf::EPD_ClearScreen_White(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

If the users want to see the actual display on the e-paper screen, the function EPD_UpdateDisplay() is required to be added behind this code.

EpdIf:: EPD_ClearScreen_Black

Description

Clear the frame memory with the Black color.

Syntax

```
void EpdIf::EPD_ClearScreen_Black(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

If the users want to see the actual display on the e-paper screen, the function EPD_UpdateDisplay() is required to be added behind this code.

EpdIf:: EPD_Busy

Description

Wait until the busy_pin goes to low, which is the idle state.

Syntax

```
void EpdIf::EPD_Busy(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

If the users want to see the actual display on the e-paper screen, the function EPD_UpdateDisplay() is required to be added behind this code.

EpdIf:: EPD_Reset**Description**

This command will let the E-paper module reset, it is often used to awaken the module in while it' s in the deep sleep mode, you will find more details in the function EpdIf:: EPD_Sleep().

Syntax

```
void EpdIf::EPD_Reset(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

EpdIf::EPD_Sleep

Description

After this command is transmitted, the chip would enter the deep-sleep mode to save power. The deep sleep mode would return to standby by hardware reset. You can use EPD:: Init() to awaken the E-paper module.

Syntax

```
void EpdIf::EPD_Sleep(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

FatfsSDCard

Class SdFatFs

Description

Defines a class of SD FAT File system.

Syntax

```
class SdFatFs
```

Members

Public Constructors

SdFatFs::SdFatFs Constructs a SdFatFs object

SdFatFs::~~SdFatFs Destructs a SdFatFs object

Public Methods

SdFatFs::begin	Initialize SD FAT File System
SdFatFs::end	Deinitialize SD FAT File System
SdFatFs::*getRootPath	Get the root path of the SD FAT File System
SdFatFs::readDir	List items under a specific folder
SdFatFs::mkdir	Create folder
SdFatFs::rm	Remove folder or file
SdFatFs::isDir	Check if a specific path is a directory
SdFatFs::isFile	Check if a specific path is a file
SdFatFs::getLastModTime	Get the last modified time for a file or directory
SdFatFs::setLastModTime	Set the last modified time for a file or directory
SdFatFs::status	Return the current status of SD
SdFatFs::open	Open a file

SdFatFs::begin**Description**

Initialize SD FAT File System.

Syntax

```
int SdFatFs::begin(void);
```

Parameters

The function requires no input parameter.

Returns

Returns “0” if success, else returns a negative value.

Example Code

Example: create_folder; file_read_write; get_file_attribute; last_modified_time; list_root_files.

Notes and Warnings

Include “SdFatFs.h” to use the class function.

SdFatFs::end

Description

De-initialize SD FAT File System.

Syntax

```
int SdFatFs::end(void);
```

Parameters

The function requires no input parameter.

Returns

Returns “0” if success, else returns a negative value.

Example Code

Example: create_folder; file_read_write; get_file_attribute; last_modified_time; list_root_files.

Notes and Warnings

Include “SdFatFs.h” to use the class function.

SdFatFs::*getRootPath

Description

Get the root path of the SD FAT File System. The logical volume character is starting from ‘0’, so the root path would like “0:” .

Syntax

```
char *SdFatFs::getRootPath(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns the root path.

Example Code

Example: create_folder; file_read_write; get_file_attribute; last_modified_time; list_root_files.

Notes and Warnings

Include “SdFatFs.h” to use the class function.

SdFatFs::readDir**Description**

List items under a specific folder. List items under a specific folder and store the result in the buffer that user specified. Each item is separated by ‘0’ .

Syntax

```
int SdFatFs::readDir(char *path, char *result_buf, unsigned int bufsize);
```

Parameters

path: The absolute directory path to be listed.

result_buf: The buffer to be stored results.

bufsize: The size of result_buf. If results exceed this size, then the results larger than this size would be discarded.

Returns

Returns “0” if success, else returns a negative value.

Example Code

Example: get_file_attribute; list_root_files

Notes and Warnings

Include “SdFatFs.h” to use the class function.

SdFatFs::mkdir

Description

Create folder.

Syntax

```
int SdFatFs::mkdir(char *absolute_path);
```

Parameters

absolute_path: The absolute directory path to be created

Returns

Returns “0” if success, else returns a negative value.

Example Code

Example: create_folder

Notes and Warnings

Include “SdFatFs.h” to use the class function.

SdFatFs::rm

Description

Remove folder or file.

Syntax

```
int SdFatFs::rm(char *absolute_path);
```

Parameters

absolute_path: The absolute directory or file path to be deleted

Returns

Returns “0” if success, else returns a negative value.

Example Code

NA

Notes and Warnings

Include “SdFatFs.h” to use the class function.

SdFatFs::isDir**Description**

Check if a specific path is a directory.

Syntax

```
unsigned char SdFatFs::isDir(char *absolute_path);
```

Parameters

absolute_path: The absolute path to be queried

Returns

The function returns “1” if it is a directory, else returns “0” .

Example Code

Example: get_file_attribute

Notes and Warnings

Include “SdFatFs.h” to use the class function.

SdFatFs::isFile

Description

Check if a specific path is a file.

Syntax

```
unsigned char SdFatFs::isFile(char *absolute_path);
```

Parameters

absolute_path: The absolute path to be queried

Returns

The function returns “1” if it is a directory, else returns “0” .

Example Code

Example: get_file_attribute

Notes and Warnings

Include “SdFatFs.h” to use the class function.

SdFatFs::getLastModTime

Description

Get the last modified time for a file or directory.

Syntax

```
int SdFatFs::getLastModTime(char *absolute_path, uint16_t *year, uint16_t *month, uint16_t *date, uint16_t *hour, uint16_t *minute, uint16_t *second);
```

Parameters

absolute_path: The absolute path to be queried.

year: The value of the year.

month: The value of the month.

date: The value of the date.

hour: The value of an hour.

minute: The value of a minute.

second: field “second” contains no valid information in the current version.

Returns

The function returns “0” if success, otherwise returns a negative value for failure.

Example Code

Example: last_modified_time

Notes and Warnings

Include “SdFatFs.h” to use the class function.

SdFatFs::setLastModTime

Description

Set the last modified time for a file or directory. Ameba doesn't have built-in RTC. So we manually change file/directory last modified time.

Syntax

```
int SdFatFs::setLastModTime(char *absolute_path, uint16_t year, uint16_t month, uint16_t date, uint16_t hour,
uint16_t minute, uint16_t second);
```

Parameters

absolute_path: The absolute path to be queried.

year: The value of the year.

month: The value of the month.

date: The value of the date.

hour: The value of an hour.

minute: The value of a minute.

second: field “second” contains no valid information in the current version.

Returns

The function returns “0” if success, otherwise returns a negative value for failure.

Example Code

Example: last_modified_time

Notes and Warnings

Include “SdFatFs.h” to use the class function.

SdFatFs::open

Description

Open a file.

Syntax

```
SdFatFile SdFatFs::open(char *absolute_path);
```

Parameters

absolute_path: The path to a file.

Returns

The file object is an instance of SdFatFile.

Example Code

Example: create_folder; file_read_write; get_file_attribute; last_modified_time; list_root_files.

Notes and Warnings

Include “SdFatFs.h” to use the class function.

SdFatFs::status

Description

Return the current status of SD.

Syntax

```
int SdFatFs::status(void);
```

Parameters

The function requires no input parameter.

Returns

Function returns “1” if ready to use, else return “0” if the status is inactivating or abnormal.

Example Code

NA.

Notes and Warnings

Include “SdFatFs.h” to use the class function.

Class SdFatFile**Description**

Defines a class of SD FAT File.

Syntax

```
class SdFatFile
```

Members

Public Constructors	
SdFatFile::SdFatFile	Constructs a SdFatFile object
SdFatFile::~SdFatFile	Destructs a SdFatFile object
Public Methods	
SdFatFile::write	Write 1 byte/bytes to file
SdFatFile::read	Read 1 byte/bytes from the file
SdFatFile::peek	Read 1 byte from file without move curser
SdFatFile::available	Check if the cursor is at EOF (End-Of-File)
SdFatFile::bool	Check if file is opened
SdFatFile::seek	Change cursor to a specific position
SdFatFile::close	Close file

SdFatFile::write

Description

Write 1 byte or bytes to the file.

Syntax

```
size_t SdFatFile::write(uint8_t c);
```

```
size_t SdFatFile::write(const uint8_t *buf, size_t size);
```

Parameters

c: The character to be written.

buf: The buffer to be written.

size: The length of buffer to be written.

Returns

The function returns the number of byte count that has been successfully written to the file.

Example Code

NA.

Notes and Warnings

Include “SdFatFile.h” to use the class function.

SdFatFile:: read**Description**

Read 1 byte or bytes from the file.

Syntax

```
int SdFatFile::read(void);
```

```
int SdFatFile::read(void *buf, uint16_t nbyte);
```

Parameters

buf: The buffer to store the content.

nbyte: The buffer size. (Or can be regarded as the desired length to read).

Returns

The function returns a read character or the read size of the buffer.

Example Code

```
1. #include "FatFs_SD.h"
2.
3. char dirname[] = "testdir" ;
4. char filename[] = "test.txt" ;
5. char write_content[] = "hello world!" ;
6.
7. FatFsSD fs;
8.
9. void setup() {
10. char buf[128];
11. char absolute_filename[128];
12.
13. fs.begin();
14.
```

```
15. sprintf(absolute_filename, "%s%s" , fs.getRootPath(), dirname);
16. fs.mkdir(absolute_filename);
17. printf( "create dir at \" %s\"rn" , absolute_filename);
18.
19. sprintf(absolute_filename, "%s%s/%s" , fs.getRootPath(), dirname, filename);
20. SdFatFile file = fs.open(absolute_filename);
21. file.println(write_content);
22. file.close();
23. printf( "create file at \" %s\"rn" , absolute_filename);
24.
25. printf( "read back from \" %s\"rn" , absolute_filename);
26. file = fs.open(absolute_filename);
27.
28. memset(buf, 0, sizeof(buf));
29. file.read(buf, sizeof(buf));
30.
31. file.close();
32. printf( "==== content ====rn" );
33. printf( "%s" , buf);
34. printf( "==== end ====rn" );
35.
36. fs.end();
37. }
38.
39. void loop() {
40. delay(1000);
41. }
42.
```

Example: create_folder;

This example shows how to create a folder and open a file under it.

```
1. #include "FatFs_SD.h"
2.
3. char filename[] = "test.txt" ;
4. char write_content[] = "hello world!" ;
5.
6. FatFsSD fs;
7.
8. void setup() {
9.   char buf[128];
10.  char absolute_filename[128];
11.
12.  fs.begin();
13.
14.  printf( "write something to \" %s\"rn" , filename);
15.  sprintf(absolute_filename, "%s%s" , fs.getRootPath(), filename);
16.  SdFatFile file = fs.open(absolute_filename);
17.
18.  file.println(write_content);
19.
20.  file.close();
21.  printf( "write finishrn" );
22.
23.  printf( "read back from \" %s\"rn" , filename);
24.  file = fs.open(absolute_filename);
25.
26.  memset(buf, 0, sizeof(buf));
27.  file.read(buf, sizeof(buf));
28.
```

```
29. file.close();
30. printf( "==== content =====rn" );
31. printf( "%s" , buf);
32. printf( "==== end =====rn" );
33.
34. fs.end();
35. }
36.
37. void loop() {
38. delay(1000);
39. }
40.
```

Example: file_read_write;

This example shows how to open/close files and perform read/write to it.

Notes and Warnings

Include “SdFatFile.h” to use the class function.

SdFatFile:: peek

Description

Read one byte from the file without moving the curser.

Syntax

```
int SdFatFile::peek(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns the read character as an integer number.

Example Code

NA

Notes and Warnings

Include “SdFatFile.h” to use the class function.

SdFatFile:: available

Description

Check if the cursor is at EOF.

Syntax

```
int SdFatFile::available(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns “0” if the cursor is at EOF, else returns “1” .

Example Code

NA

Notes and Warnings

Include “SdFatFile.h” to use the class function.

SdFatFile:: flush

Description

It is a nop. This is an inherited function from class Stream. And it does not affect SD File.

Syntax

```
void SdFatFile::flush(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Include “SdFatFile.h” to use the class function.

SdFatFile:: seek

Description

Change cursor to a specific position.

Syntax

```
int SdFatFile::seek(uint32_t pos);
```

Parameters

pos: The desired position.

Returns

The function returns 0 if success otherwise returns a negative value.

Example Code

NA

Notes and Warnings

Include “SdFatFile.h” in order to use the class function.

SdFatFile:: close

Description

Close file.

Syntax

```
int SdFatFile::close(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns 0 if runs successfully otherwise it returns a negative value.

Example Code

Example: last_modified_time;

The example shows how to get and set last modified time of a file.

Example: create_folder;

This example shows how to create a folder and open a file under it. The details of the code can be found in the section of SdFatFile:: read.

Example: file_read_write;

This example shows how to open/close files and perform read/write to it. The details of the code can be found in the section of SdFatFile:: read.

1. #include <FatFs_SD.h>
- 2.
3. FatFsSD fs;
- 4.
5. char filename[] = “test.txt” ;

```
6.
7. void setup() {
8.   char absolute_filename[128];
9.
10.  uint16_t year = 2021;
11.  uint16_t month = 4;
12.  uint16_t date = 4;
13.  uint16_t hour = 12;
14.  uint16_t minute = 12;
15.  uint16_t second = 12;
16.
17.  fs.begin();
18.
19.  sprintf(absolute_filename, "%s%s", fs.getRootPath(), filename);
20.  SdFatFile file = fs.open(absolute_filename);
21.  file.close();
22.
23.  fs.setLastModTime(absolute_filename, year, month, date, hour, minute, second);
24.
25.  fs.getLastModTime(absolute_filename, &year, &month, &date, &hour, &minute, &second);
26.  printf( "filename:""%s""rn" , absolute_filename);
27.  printf( "time mod:%04d/%02d/%02d %02d:%02d:%02drn" , year, month, date, hour, minute, second);
28.
29.  fs.end();
30. }
31.
32. void loop() {
33.   delay(1000);
34. }
35.
```

Notes and Warnings

Include “SdFatFile.h” in order to use the class function.

FlashMemory

Class EpdIF

FlashMemoryClass Class

Description

Defines a class of Flash memory API

Syntax

```
class FlashMemoryClass
```

Members

Public Constructors	
FlashMemoryClass::FlashMemoryClass	Constructs a FlashMemoryClass object
FlashMemoryClass::~FlashMemoryClass	Deconstructs a FlashMemoryClass object
Public Methods	
FlashMemoryClass::begin	Initialize/Re-initialize the base address and size
FlashMemoryClass::read	Read the content to buf
FlashMemoryClass::update	Write buf back to flash memory
FlashMemoryClass::readWord	Read 4 bytes from flash memory
FlashMemoryClass::writeWord	Write 4 bytes into flash memory
FlashMemoryClass::buf_size	The buf size
FlashMemoryClass::*buf	The buf to be operated

FlashMemoryClass::FlashMemoryClass

Description

Constructs a FlashMemoryClass object.

Syntax

FlashMemoryClass(unsigned int _base_address, unsigned int _buf_size);

Parameters

_base_address: The base address to operate.

_buf_size: The buf size for mirror a copy to reduce flash memory operation

Returns

The function returns nothing.

Example Code

Example: FleshMemory_Basic

This example demonstrates the basic use of flash memory. Since boot count is stored in flash, each time upon device boot up, the boot count will be read from the flash, add one, then write back to the flash. Ameba's flash memory can be edit in a unit of a sector which has the size of 4K bytes.

Direct read from flash memory is allowed. To write data into flash memory, each bit on flash memory can only change from '1' to '0' and it cannot change from '0' to '1'. To make sure the data are correctly written we do erase the flash memory sector before write data on it.

#include <FlashMemory.h>

```
void setup() {  
  FlashMemory.read();  
  if (FlashMemory.buf[0] == 0xFF) {  
    FlashMemory.buf[0] = 0x00;  
    FlashMemory.update();  
    Serial.println( "write count to 0" );  
  } else {  
    FlashMemory.buf[0]++;  
    FlashMemory.update();  
    Serial.print( "Boot count: ");  
    Serial.println(FlashMemory.buf[0]);  
  }  
}
```

```

}

void loop() {
  delay(1000);
}

```

Example: ReadWriteOneWord

This example shows how to request flash memory larger than default 0x4000, and read/write one specific word (32-bit).

```

#include <FlashMemory.h>

void setup() {
  unsigned int value;

  /* request flash size 0x4000 from 0xFC000 */
  FlashMemory.begin(0xFC000, 0x4000);

  /* read one word (32-bit) from 0xFC000 plus offset 0x3F00 */
  value = FlashMemory.readWord(0x3F00);
  printf( "value is 0x%08X\r\n" , value);
  if (value == 0xFFFFFFFF) {
    value = 0;
  } else {
    value++;
  }

  /* write one word (32-bit) to 0xFC000 plus offset 0x3F00 */
  FlashMemory.writeWord(0x3F00, value);
}

void loop() {
  // put your main code here, to run repeatedly:
}

```

Notes and Warnings

Include “FlashMemory.h” to use the class function.

FlashMemoryClass::begin

Description

Initialize/Re-initialize the base address and size. The base address shell aligns with the size of 0x1000. And the size shell is multiple of 0x1000.

Syntax

```
void begin(unsigned int _base_address, unsigned int _buf_size);
```

Parameters

_base_address: The base address

_buf_size: The desired work size

Returns

The function returns nothing.

Example Code

Example: FleshMemory_Basic

This example demonstrates the basic use of flash memory. Since boot count is stored in flash, each time upon device boot up, the boot count will be read from the flash, add one, then write back to the flash. Ameba's flash memory can be edit in a unit of a sector which has the size of 4K bytes.

Example: ReadWriteOneWord

This example shows how to request flash memory larger than default 0x4000, and read/write one specific word (32-bit). Details of the example codes can be found in the previous section of “FlashMemoryClass:: FlashMemoryClass” .

Notes and Warnings

Include “FlashMemory.h” to use the class function.

FlashMemoryClass::read

Description

Read the content to buf. Read flash memory into the buf. The size would be 0x1000.

Syntax

```
void read(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: FleshMemory_Basic

This example demonstrates the basic use of flash memory. Since boot count is stored in flash, each time upon device boot up, the boot count will be read from the flash, add one, then write back to the flash. Ameba's flash memory can be edit in a unit of a sector which has the size of 4K bytes.

Details of the example codes can be found in the previous section of “FlashMemoryClass:: FlashMemoryClass” .

Notes and Warnings

Include “FlashMemory.h” to use the class function.

FlashMemoryClass::update**Description**

Write buf back to flash memory. Write flash memory with the content of the buffer. The size is 0x1000.

Syntax

```
void update(bool erase = true);
```

Parameters

erase: By default, it is true and erases flash memory before writing to it

Returns

The function returns nothing.

Example Code

Example: `FleshMemory_Basic`

This example demonstrates the basic use of flash memory. Since boot count is stored in flash, each time upon device boot up, the boot count will be read from the flash, add one, then write back to the flash. Ameba's flash memory can be edit in a unit of a sector which has the size of 4K bytes.

Details of the example codes can be found in the previous section of `"FlashMemoryClass:: FlashMemoryClass"` .

Notes and Warnings

Include `"FlashMemory.h"` to use the class function.

FlashMemoryClass::readWord

Description

Read 4 bytes from flash memory. Read 4 byte from specific offset based on base address.

Syntax

```
unsigned int readWord(unsigned int offset);
```

Parameters

offset: The offset according to the base address

Returns

The read data with a size of 4 bytes

Example Code

Example: `ReadWriteOneWord`

This example shows how to request flash memory larger than default 0x4000, and read/write one specific word (32-bit).

Details of the example codes can be found in the previous section of `"FlashMemoryClass:: FlashMemoryClass"` .

Notes and Warnings

Include `"FlashMemory.h"` to use the class function.

FlashMemoryClass::writeWord

Description

Write 4 bytes into flash memory. It will try to write 4 bytes first. If the read data differ from the write data, then we buffer the sector of flash memory, erase it, and write correct data back to it.

Syntax

```
void writeWord(unsigned int offset, unsigned int data);
```

Parameters

offset: The offset according to the base address

data: The data to be written

Returns

The function returns nothing.

Example Code

Example: ReadWriteOneWord

This example shows how to request flash memory larger than default 0x4000, and read/write one specific word (32-bit).

Details of the example codes can be found in the previous section of “FlashMemoryClass:: FlashMemoryClass” .

Notes and Warnings

Include “FlashMemory.h” to use the class function.

FlashMemoryClass::buf_size

Description

The buf size (It can be regarded as work size).

Syntax

```
unsigned int buf_size;
```

Example Code

Example: FlashMemory_Basic

This example demonstrates the basic use of flash memory. Since boot count is stored in flash, each time upon device boot up, the boot count will be read from the flash, add one, then write back to the flash. Ameba's flash memory can be edit in a unit of a sector which has the size of 4K bytes.

Details of the example codes can be found in the previous section of “FlashMemoryClass:: FlashMemoryClass” .

Notes and Warnings

Include “FlashMemory.h” to use the class function.

FlashMemoryClass::*buf

Description

The buf to be operated. Modify buf won't change the content of the buf. It needs an update to write back to flash memory.

Syntax

```
unsigned char *buf;
```

Example Code

NA

Notes and Warnings

Include “FlashMemory.h” to use the class function.

GPIO

Class DHT

DHT Class

Description

Defines a class of using DHT temperature & humidity sensors

Syntax

```
class DHT
```

Members

Public Constructors	
DHT::DHT	Constructs a DHT object
Public Methods	
DHT::begin	Initialize the DHT sensor
DHT::readTemperature	Read temperature(Fahrenheit or Celcius) from the DHT sensor
DHT::convertCtoF	Convert a value from Celcius to Fahrenheit
DHT::convertFtoC	Convert a value from Fahrenheit to Celcius
DHT::readHumidity	Read humidity(%) from the DHT sensor
DHT::computeHeatIndex	Compute the HeatIndex from the readings (Using both Rothfusz and Steadman' s equations)
DHT::read	Check if the sensor is readable

DHT::DHT

Description

Constructs a DHT object.

Syntax

```
DHT::DHT(uint8_t pin, uint8_t type, uint8_t count)
```

Parameters

pin: The Arduino digital PIN connected

type: The DHT sensor type(DHT11, DHT22, or DHT21)

count: The count is now ignored as the DHT reading algorithm adjusts itself based on the speed of the processor

Returns

The function returns nothing.

Example Code

Example:DHTTester

The code demos basic testing for various DHT humidity & temperature sensors.

Notes and Warnings

Every time must include the header file “DHT.h” in front of the project to use the class function.

```
// Example testing sketch for various DHT humidity/temperature sensors
// Written by ladyada, public domain

#include "DHT.h"

// The digital pin we're connected to.

#define DHTPIN 8

// Uncomment whatever type you're using!

#define DHTTYPE DHT11 // DHT 11

// #define DHTTYPE DHT22 // DHT 22 (AM2302), AM2321
// #define DHTTYPE DHT21 // DHT 21 (AM2301)

// Connect pin 1 (on the left) of the sensor to +5V

// NOTE: If using a board with 3.3V logic like an Arduino Due connect pin 1
// to 3.3V instead of 5V!

// Connect pin 2 of the sensor to whatever your DHTPIN is

// Connect pin 4 (on the right) of the sensor to GROUND

// Connect a 10K resistor from pin 2 (data) to pin 1 (power) of the sensor

// Initialize DHT sensor.

// Note that older versions of this library took an optional third parameter to
// tweak the timings for faster processors. This parameter is no longer needed
```

```

// as the current DHT reading algorithm adjusts itself to work on faster procs.
DHT dht(DHTPIN, DHTTYPE);

void setup() {
  Serial.begin(115200);

  Serial.println( "DHTxx test!" );

  dht.begin();
}

void loop() {
  // Wait a few seconds between measurements.
  delay(2000);

  // Reading temperature or humidity takes about 250 milliseconds!
  // Sensor readings may also be up to 2 seconds 'old' (its a very slow sensor)

  float h = dht.readHumidity();

  // Read temperature as Celsius (the default)
  float t = dht.readTemperature();

  // Read temperature as Fahrenheit (isFahrenheit = true)
  float f = dht.readTemperature(true);

  // Check if any reads failed and exit early (to try again).
  if (isnan(h) || isnan(t) || isnan(f)) {

    Serial.println( "Failed to read from DHT sensor!" );

    return;
  }

  // Compute heat index in Fahrenheit (the default)
  float hif = dht.computeHeatIndex(f, h);

  // Compute heat index in Celsius (isFahreheit = false)
  float hic = dht.computeHeatIndex(t, h, false);

  Serial.print( "Humidity:  ");
  Serial.print(h);
  Serial.print(" %t" );

  Serial.print( "Temperature:  ");

```

```
Serial.print(t);  
Serial.print(" *C ");  
Serial.print(f);  
Serial.print(" *Ft" );  
Serial.print( "Heat index: " );  
Serial.print(hic);  
Serial.print(" *C ");  
Serial.print(hif);  
Serial.println(" *F" );  
}
```

DHT::begin

Description

Initialize the DHT sensor.

Syntax

```
void DHT::begin(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: DHTTester

The code demos basic testing for various DHT humidity & temperature sensors. Please refer to code in the “DHT: DHT” section.

Notes and Warnings

Every time must include the header file “DHT.h” in front of the project to use the class function.

DHT::readTemperature

Description

Read temperature(Fahrenheit or Celcius) from the DHT sensor.

Syntax

```
float DHT::readTemperature(bool S, bool force);
```

Parameters

S: Temperature scale, True is Fahrenheit and False is Celcius

force: Index of checking sensor readability, default is False

Returns

The function returns the current temperature as a float value.

Example Code

Example: DHTTester

The code demos basic testing for various DHT humidity & temperature sensors. Please refer to code in the “DHT: DHT” section.

Notes and Warnings

Every time must include the header file “DHT.h” in front of the project to use the class function.

DHT::convertCtoF

Description

Convert a value from Celcius to Fahrenheit.

Syntax

```
float DHT::convertCtoF(float c);
```

Parameters

c: The value in Celcius

Returns

The function returns the temperature in Fahrenheit as a float number.

Example Code

Example: DHTTester

The code demos basic testing for various DHT humidity & temperature sensors. Please refer to code in the “DHT: DHT” section.

Notes and Warnings

Every time must include the header file “DHT.h” in front of the project to use the class function.

DHT::convertFtoC

Description

Convert a value from Fahrenheit to Celcius.

Syntax

```
float DHT::convertFtoC(float f);
```

Parameters

f: The value in Fahrenheit

Returns

The function returns the temperature in Celcius as a float number.

Example Code

Example: DHTTester

The code demos basic testing for various DHT humidity & temperature sensors. Please refer to code in the “DHT: DHT” section.

Notes and Warnings

Every time must include the header file “DHT.h” in front of the project to use the class function.

DHT::computeHeatIndex

Description

Compute the HeatIndex from the readings (Using both Rothfusz and Steadman’ s equations). More details refer to http://www.wpc.ncep.noaa.gov/html/heatindex_equation.shtml .

Syntax

float DHT::computeHeatIndex(float temperature, float percentHumidity, bool isFahrenheit);

Parameters

temperature: The temperature value

percentHumidity: The humidity percent value

isFahrenheit: True, temperature value in Fahrenheit (Default); False, temperature value in Celcius

Returns

The function returns the heat index in Fahrenheit or Celsius as a float value.

Example Code

Example: DHTTester

The code demos basic testing for various DHT humidity & temperature sensors. Please refer to code in the “DHT: DHT” section.

Notes and Warnings

Every time must include the header file “DHT.h” in front of the project to use the class function.

DHT::readHumidity

Description

Reading temperature or humidity from the DHT sensor and return as a float value(%).

Syntax

```
float DHT::readHumidity(bool force);
```

Parameters

force: Ignored.

Returns

The function returns current humidity in a float number (in %).

Example Code

Example: DHTTester

The code demos basic testing for various DHT humidity & temperature sensors. Please refer to code in the “DHT: DHT” section.

Notes and Warnings

Every time must include the header file “DHT.h” in front of the project to use the class function. Reading temperature or humidity takes about 250 milliseconds! Sensor readings may also be up to 2 seconds.

DHT::read

Description

Check if the sensor is readable.

Syntax

```
boolean DHT::read(bool force);
```

Parameters

force: Index of whether checking the sensor was read less than two seconds ago or not. False, checking; True, not checking.

Returns

Return the last correct measurement of the sensor. False, low means not readable; True, high means readable.

Example Code

Example: DHTTester

The code demos basic testing for various DHT humidity & temperature sensors. Please refer to code in the “DHT: DHT” section.

Notes and Warnings

Every time must include the header file “DHT.h” in front of the project to use the class function.

Class HttpClient**InterruptLock Class****Description**

Defines a class of turning off/on interrupts temporarily

Syntax

class InterruptLock

Members

Public Constructors	
InterruptLock::InterruptLock	Constructs a InterruptLock object
InterruptLock::~~ InterruptLock	Deconstructs a InterruptLock object

GTimer

Class EpdIF

GTimerClass Class

Description

GTimer is a hardware timer and this class is to operate it. The GTimer occupy same resource as PWM. Please make sure the timer is not conflict with you PWM index.

Syntax

```
class GTimerClass
```

Members

Public Constructors	
GTimerClass::GTimerClass	Constructs a GTimerClass object
Public Methods	
GTimerClass::begin	Initialize a timer and start it immediately
GTimerClass::stop	Stop a specific timer
GTimerClass::reload	Reload a specific timer
GTimerClass::read_us	Read current countdown value

GTimerClass::begin

Description

Initialize a timer and start it immediately.

Syntax

```
void GTimerClass::begin(uint32_t timerid, uint32_t duration_us, void (*handler)(uint32_t), bool periodical, uint32_t userdata);
```

Parameters

timerid: There are 5 valid GTimer with timer id 0~4.

duration_us: The duration of the timer. The time unit is microsecond and the precision is 32768Hz.

periodical: By default, the timer would keep periodically countdown and reload which means the handler would periodically be invoked.

userdata: The user data brings to the handler.

Returns

The function returns nothing.

Example Code

Example: TimerOneshot

```
/*  
  
This sketch shows how to use several hardware timers in invoke handler only once for each timer.  
  
*/  
  
#include <GTimer.h>  
  
void myhandler(uint32_t data) {  
  Serial.print( "I am timer!" );  
  Serial.println(data);  
}  
  
void setup() {  
  // Open serial communications and wait for port to open:  
  Serial.begin(115200);  
  
  while (!Serial) {  
    ; // wait for serial port to connect. Needed for native USB port only  
  }  
  
  // timerid 0, period 1s, invoke myhandler, invoke only once, user data is 0  
  GTimer.begin(0, 1 * 1000 * 1000, myhandler, false, 0);  
  
  // timerid 1, period 2s, invoke myhandler, invoke only once, user data is 1  
  GTimer.begin(1, 2 * 1000 * 1000, myhandler, false, 1);  
  
  GTimer.begin(2, 3 * 1000 * 1000, myhandler, false, 2);  
  
  GTimer.begin(3, 4 * 1000 * 1000, myhandler, false, 3);  
}
```

```
void loop() {  
  delay(1000);  
}
```

Example: TimerPeriodical

```
/*
```

This sketch shows how to use hardware timer and invoke interrupt handler periodically

```
*/
```

```
#include <GTimer.h>
```

```
int counter = 0;
```

```
void myhandler(uint32_t data) {
```

```
  counter++;
```

```
  Serial.print( "counter: ");
```

```
  Serial.println(counter);
```

```
  if (counter >= 10) {
```

```
    Serial.println( "stop timer" );
```

```
    GTimer.stop(0);
```

```
  }
```

```
}
```

```
void setup() {
```

```
  // Open serial communications and wait for port to open:
```

```
  Serial.begin(115200);
```

```
  while (!Serial) {
```

```
    ; // wait for serial port to connect. Needed for native USB port only
```

```
  }
```

```
  // timerid 0, period 1s, invoke myhandler
```

```
  GTimer.begin(0, (1 * 1000 * 1000), myhandler);
```

```
}
```

```
void loop() {
```

```
  delay(1000);
```

```
}
```

Notes and Warnings

Include “GTimer.h” to use the class function.

GTimerClass::stop

Description

Stop a specific timer

Syntax

```
void GTimerClass::stop(uint32_t timerid);
```

Parameters

timerid: Stop the timer with this timer id

Returns

The function returns nothing.

Example Code

Example: TimerPeriodical, please refer to GTimerClass:: begin for more details.

Notes and Warnings

Include “GTimer.h” to use the class function.

GTimerClass::reload

Description

Reload a specific timer. The GTimer is a countdown timer. Reload it would make it discard the current countdown value and restart countdown based on the duration.

Syntax

```
void GTimerClass::reload(uint32_t timerid, uint32_t duration_us);
```

Parameters

timerid: The timer to be modified

duration_us: The updated duration in unit of microseconds

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Include “GTimer.h” to use the class function.

GTimerClass::read_us

Description

Read the current countdown value

Syntax

```
uint64_t GTimerClass::read_us(uint32_t timerid);
```

Parameters

timerid: The timer to be read

Returns

The function returns the current countdown value.

Example Code

NA

Notes and Warnings

Include “GTimer.h” to use the class function.

Http

Class HttpClient

HttpClient Class

Description

Defines a class of using HttpClient

Syntax

```
class HttpClient
```

Members

Public Constructors	
HttpClient::HttpClient	Constructs a HttpClient object
Public Methods	
HttpClient::beginRequest	Start a more complex request
HttpClient::endRequest	End a more complex request
HttpClient::get	Connect to the server and start to send a GET request
HttpClient::post	Connect to the server and start to send a POST request
HttpClient::put	Connect to the server and start to send a PUT request
HttpClient::startRequest	Connect to the server and start to send the request
HttpClient::sendHeader	Send an additional header line
HttpClient::sendBasicAuth	Send a basic authentication header
HttpClient::finishRequest	Finish sending the HTTP request
HttpClient::responseStatusCode	Get the HTTP status code contained in the response
HttpClient::readHeader	Read the next character of the response headers
HttpClient::skipResponseHeaders	Skip any response headers to get to the body
HttpClient::endOfHeadersReached	Test whether all of the response headers have been consumed
HttpClient::endOfBodyReached	Test whether the end of the body has been reached
HttpClient::contentLength	Return the length of the body

HttpClient::HttpClient

Description

Constructs a HttpClient object. If Macro “PROXY_ENABLED” is defined, currently disabled as introduces a dependency on DNS.h in Ethernet.

Syntax

```
HttpClient::HttpClient(Client& aClient, const char* aProxy = NULL, uint16_t aProxyPort = 0);
```

```
HttpClient::HttpClient(Client& aClient);
```

Parameters

aClient: The object of class WiFiClient.

aProxy: The proxy name. The default proxy name is “NULL” .

aProxyPort: The proxy port. The default value for the proxy port is 0.

Returns

The function returns nothing.

Example Code

Example: SimpleHttpExample

The example demonstrate how to download the content from URL indicated in kHostname[].

```
#include <HttpClient.h>
```

```
#include <WiFi.h>
```

```
#include <WiFiClient.h>
```

```
char ssid[] = “YourNetwork” ;// your network SSID (name)
```

```
char pass[] = “password” ;// your network password (use for WPA, or use as key for WEP)
```

```
int keyIndex = 0; // your network key Index number (needed only for WEP)
```

```
// Name of the server we want to connect to
```

```
const char kHostname[] = “www.google.com” ;
```

```
const char kPath[] = “/” ;
```

```
// Number of milliseconds to wait without receiving any data before we give up
```

```

const int kNetworkTimeout = 30*1000;

// Number of milliseconds to wait if no data is available before trying again
const int kNetworkDelay = 1000;

int status = WL_IDLE_STATUS;

void setup() {
  Serial.begin(9600);

  while ( status != WL_CONNECTED) {
    Serial.print( "Attempting to connect to SSID: ");
    Serial.println(ssid);
    status = WiFi.begin(ssid, pass);
    // wait 10 seconds for connection:
    delay(10000);
  }
  Serial.println( "Connected to wifi" );
  printWifiStatus();
}

void loop() {
  int err =0;
  WiFiClient c;
  HttpClient http(c);
  err = http.get(kHostname, kPath);
  if (err == 0)
  {
    Serial.println( "startedRequest ok" );
    err = http.responseStatusCode();
    if (err >= 0)
    {
      Serial.print( "Got status code: ");
      Serial.println(err);
      // Usually you'd check that the response code is 200 or a

```

```
// similar "success" code (200-299) before carrying on,

// but we' ll print out whatever response we get

err = http.skipResponseHeaders();

if (err >= 0)

{

int bodyLen = http.contentLength();

Serial.print( "Content length is: ");

Serial.println(bodyLen);

Serial.println();

Serial.println( "Body returned follows:" );

// Now we' ve got to the body, so we can print it out

unsigned long timeoutStart = millis();

char c;

// Whilst we haven' t timed out & haven' t reached the end of the body

while ( (http.connected() || http.available()) &&

((millis() - timeoutStart) < kNetworkTimeout) )

{

if (http.available())

{

c = http.read();

// Print out this character

Serial.print(c);

bodyLen--;

// We read something, reset the timeout counter

timeoutStart = millis();

}

else

{

// We haven' t got any data, so let' s pause to allow some to arrive

delay(kNetworkDelay);
```

```
}  
}  
}  
else  
{  
  Serial.print( "Failed to skip response headers: ");  
  Serial.println(err);  
}  
}  
else  
{  
  Serial.print( "Getting response failed: ");  
  Serial.println(err);  
}  
}  
else  
{  
  Serial.print( "Connect failed: ");  
  Serial.println(err);  
}  
}  
http.stop();  
// And just stop, now that we' ve tried a download  
while(1);  
}  
void printWifiStatus() {  
  // print the SSID of the network you' re attached to:  
  Serial.print( "SSID: ");  
  Serial.println(WiFi.SSID());  
  // print your WiFi shield' s IP address:  
  IPAddress ip = WiFi.localIP();
```

```
Serial.print( "IP Address: ");  
Serial.println(ip);  
  
// print the received signal strength:  
  
long rssi = WiFi.RSSI();  
Serial.print( "signal strength (RSSI):" );  
Serial.print(rssi);  
Serial.println(" dBm" );  
  
}
```

Notes and Warnings

Include "HttpClient.h" to use the class function.

HttpClient::beginRequest

Description

Start a more complex request. Use this when you need to send additional headers in the request, but you will also need to call endRequest() when you are finished.

Syntax

```
void HttpClient::beginRequest(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: SimpleHttpExample

The example demonstrates how to download the content from the URL indicated in kHostname[]. Details of the code can be found in the previous section of HttpClient: HttpClient.

Notes and Warnings

Include “HttpClient.h” to use the class function.

HttpClient::endRequest

Description

End a more complex request. Use this when you need to have sent additional headers in the request, but you will also need to call beginRequest() at the start.

Syntax

```
void HttpClient::endRequest(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: SimpleHttpExample

The example demonstrates how to download the content from the URL indicated in kHostname[]. Details of the code can be found in the previous section of HttpClient:: HttpClient.

Notes and Warnings

Include “HttpClient.h” to use the class function.

HttpClient::get

Description

Connect to the server and start to send a “GET” request. If the input parameter contains “aServerAddress” , the connection will not perform a DNS lookup and just purely connect to the given IP address.

Syntax

```
int HttpClient::get(const char* aServerName, uint16_t aServerPort, const char* aURLPath, const char* aUserAgent = NULL);  
int HttpClient::get(const char* aServerName, const char* aURLPath, const char* aUserAgent = NULL);  
int HttpClient::get(const IPAddress& aServerAddress, const char* aServerName, uint16_t aServerPort, const char* aURLPath, const char* aUserAgent = NULL);  
int HttpClient::get(const IPAddress& aServerAddress, const char* aServerName, const char* aURLPath, const char* aUserAgent = NULL);
```

Parameters

aServerName: The name of the server being connected to. If aServerName is “NULL” , the “Host” header line will not be sent.

aServerPort: The port on which server connected.

aURLPath: The URL to request.

aUserAgent: User-Agent string to be sent. If aUserAgent indicated as “NULL” , the default user-agent kUserAgent will be sent.

aServerAddress: IP address of the server to connect to.

Returns

Return 0 if successful, otherwise indicates an error occurs.

Example Code

Example: SimpleHttpExample

The example demonstrates how to download the content from the URL indicated in kHostname[]. Details of the code can be found in the previous section of HttpClient:: HttpClient.

Notes and Warnings

Include “HttpClient.h” to use the class function.

HttpClient::post

Description

Connect to the server and start to send a “POST” request. If the input parameter has “aServerAddress” , connects doesn’t perform a DNS lookup and just connects to the given IP address.

Syntax

```
int HttpClient::post(const char* aServerName, uint16_t aServerPort, const char* aURLPath, const char* aUserAgent =
NULL);
int HttpClient::post(const char* aServerName, const char* aURLPath, const char* aUserAgent = NULL);
int HttpClient::post(const IPAddress& aServerAddress, const char* aServerName, uint16_t aServerPort, const char*
aURLPath, const char* aUserAgent = NULL);
int HttpClient::post(const IPAddress& aServerAddress, const char* aServerName, const char* aURLPath, const char*
aUserAgent = NULL);
```

Parameters

aServerName: Name of the server being connected to. If NULL, the “Host” header line won’t be sent.

aServerPort: Port to connect to on the server.

aURLPath: Url to request.

aUserAgent: User-Agent string to be sent. If aUserAgent indicated as “NULL” , the default user-agent kUserAgent will be sent.

aServerAddress: IP address of the server to connect to.

Returns

Return 0 if successful, otherwise indicates an error occurs.

Example Code

Example: SimpleHttpExample

The example demonstrates how to download the content from the URL indicated in kHostname[]. Details of the code can be found in the previous section of HttpClient:: HttpClient.

Notes and Warnings

Include “HttpClient.h” to use the class function.

HttpClient::put**Description**

Connect to the server and start to send a PUT request. If the input parameter has “aServerAddress” , connects doesn’t perform a DNS lookup and just connects to the given IP address.

Syntax

```
int HttpClient::put(const char* aServerName, uint16_t aServerPort, const char* aURLPath, const char* aUserAgent = NULL);  
  
int HttpClient::put(const char* aServerName, const char* aURLPath, const char* aUserAgent = NULL);  
  
int HttpClient::put(const IPAddress& aServerAddress, const char* aServerName, uint16_t aServerPort, const char* aURLPath, const char* aUserAgent = NULL);  
  
int HttpClient::put(const IPAddress& aServerAddress, const char* aServerName, const char* aURLPath, const char* aUserAgent = NULL);
```

Parameters

aServerName: Name of the server being connected to. If NULL, the “Host” header line won’t be sent.

aServerPort: Port to connect to on the server.

aURLPath: Url to request.

aUserAgent: User-Agent string to be sent. If aUserAgent indicated as “NULL” , the default user-agent kUserAgent will be sent.

aServerAddress: IP address of the server to connect to.

Returns

Return 0 if successful, otherwise indicates an error occurs.

Example Code

Example: SimpleHttpExample

The example demonstrates how to download the content from the URL indicated in kHostname[]. Details of the code can be found in the previous section of HttpClient:: HttpClient.

Notes and Warnings

Include “HttpClient.h” to use the class function.

HttpClient::startRequest**Description**

Connect to the server and start to send the request.

Syntax

```
int HttpClient::startRequest(const char* aServerName, uint16_t aServerPort, const char* aURLPath, const char*
aHttpMethod, const char* aUserAgent);
int HttpClient::startRequest(const IPAddress& aServerAddress, const char* aServerName, uint16_t aServerPort, const
char* aURLPath, const char* aHttpMethod, const char* aUserAgent);
```

Parameters

aServerAddress: IP address of the server to connect to.

aServerName: Name of the server being connected to. If NULL, the “Host” header line won’t be sent.

aServerPort: Port to connect to on the server.

aURLPath: Url to request.

aHttpMethod: Type of HTTP request to make, e.g. “GET” , “POST” , etc.

aUserAgent: User-Agent string to send. If NULL the default user-agent kUserAgent will be sent.

Returns

Return 0 if successful, else error.

Example Code

Example: SimpleHttpExample

The example demonstrates how to download the content from the URL indicated in kHostname[]. Details of the code can be found in the previous section of HttpClient:: HttpClient.

Notes and Warnings

Include “HttpClient.h” to use the class function.

HttpClient::sendHeader

Description

The function sends an additional header line.

The function void HttpClient:: sendHeader(const char* aHeader);can only be called in between the calls to startRequest and finishRequest.

The other 2 functions void HttpClient::sendHeader(const char* aHeaderName, const char* aHeaderValue); and void HttpClient::sendHeader(const char* aHeaderName, const int aHeaderValue); are alternate form the previous one, which takes the header name and content as separately (as strings or integer). For example, to send an XXXXXX header, user might call sendHeader(“XXXXXX” , “Something”) or sendHeader(“XXXXXX” , 123).And the call will add the “: ” in the log to separate different header in the case of multiple headers.

Syntax

```
void HttpClient::sendHeader(const char* aHeader);  
void HttpClient::sendHeader(const char* aHeaderName, const char* aHeaderValue);  
void HttpClient::sendHeader(const char* aHeaderName, const int aHeaderValue);
```

Parameters

aHeader: Header line to send, in its entirety (but without the trailing CRLF. E.g. “Authorization: Basic YQDDCAIGES” .

aHeaderName: Type of header being sent.

aHeaderValue: Value for that header.

Returns

The function returns nothing.

Example Code

Example: SimpleHttpExample

The example demonstrates how to download the content from the URL indicated in kHostname[]. Details of the code can be found in the previous section of HttpClient:: HttpClient.

Notes and Warnings

Include “HttpClient.h” to use the class function.

HttpClient::sendBasicAuth

Description

The function sends a basic authentication header which will encode the given username and password, and send them in a suitable header line for doing Basic Authentication.

Syntax

```
void HttpClient::sendBasicAuth(const char* aUser, const char* aPassword);
```

Parameters

aUser: Username for the authorization.

aPassword: Password for the user aUser.

Returns

The function returns nothing.

Example Code

Example: SimpleHttpExample

The example demonstrates how to download the content from the URL indicated in kHostname[]. Details of the code can be found in the previous section of HttpClient:: HttpClient.

Notes and Warnings

Include “HttpClient.h” to use the class function.

HttpClient::finishRequest

Description

Finish sending the HTTP request. The function sends a blank line to signify the end of the request.

Syntax

```
void HttpClient::finishRequest(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: SimpleHttpExample

The example demonstrates how to download the content from the URL indicated in kHostname[]. Details of the code can be found in the previous section of HttpClient:: HttpClient.

Notes and Warnings

Include “HttpClient.h” to use the class function.

HttpClient::responseStatusCode

Description

Get the HTTP status code contained in the response. For example, “200” for successful requests, “404” for file not found, etc.

Syntax

```
int HttpClient::responseStatusCode(void);
```

Parameters

The function requires no input parameter.

Returns

Return 0 if successful, else error.

Example Code

Example: SimpleHttpExample

The example demonstrates how to download the content from the URL indicated in kHostname[]. Details of the code can be found in the previous section of HttpClient: HttpClient.

Notes and Warnings

Include “HttpClient.h” to use the class function.

HttpClient::readHeader

Description

The function reads the next character of the response headers. This functions the same as read() but to be used when reading through the headers which are slightly less efficient. The user might check whether the end of the headers has been reached by calling endOfHeadersReached(), although after that point this will still return data as read() would.

Syntax

```
int HttpClient::readHeader(void);
```

Parameters

The function requires no input parameter.

Returns

Return the next character of the response headers.

Example Code

Example: SimpleHttpExample

The example demonstrates how to download the content from the URL indicated in kHostname[]. Details of the code can be found in the previous section of HttpClient: HttpClient.

Notes and Warnings

Include “HttpClient.h” to use the class function.

HttpClient::skipResponseHeaders**Description**

Skip any response headers to get to the body. Use this if you don't want to do any special processing of the headers returned in the response. You can also use it after you've found all of the headers you're interested in, and just want to get on with processing the body.

Syntax

```
int HttpClient::skipResponseHeaders(void);
```

Parameters

The function requires no input parameter.

Returns

Return 0 if successful, else error.

Example Code

Example: SimpleHttpExample

The example demonstrates how to download the content from the URL indicated in kHostname[]. Details of the code can be found in the previous section of HttpClient:: HttpClient.

Notes and Warnings

Include “HttpClient.h” to use the class function.

HttpClient::endOfHeadersReached

Description

Test whether all of the response headers have been consumed.

Syntax

```
bool HttpClient::endOfHeadersReached(void);
```

Parameters

The function requires no input parameter.

Returns

Return true if we are now processing the response body, else false.

Example Code

Example: SimpleHttpExample

The example demonstrates how to download the content from the URL indicated in kHostname[]. Details of the code can be found in the previous section of HttpClient:: HttpClient.

Notes and Warnings

Include “HttpClient.h” to use the class function.

HttpClient::endOfBodyReached

Description

Test whether the end of the body has been reached. It only works if the Content-Length header was returned by the server.

Syntax

```
bool HttpClient::endOfBodyReached(void);
```

Parameters

The function requires no input parameter.

Returns

Return true if we are now at the end of the body, else false.

Example Code

Example: SimpleHttpExample

The example demonstrates how to download the content from the URL indicated in kHostname[]. Details of the code can be found in the previous section of HttpClient:: HttpClient.

Notes and Warnings

Include “HttpClient.h” to use the class function.

HttpClient::contentLength**Description**

The function returns the length of the body.

Syntax

```
int HttpClient::contentLength(void);
```

Parameters

The function requires no input parameter.

Returns

Return Length of the body, in bytes, or kNoContentLengthHeader if no Content-Length header was returned by the server.

Example Code

Example: SimpleHttpExample

The example demonstrates how to download the content from the URL indicated in kHostname[]. Details of the code can be found in the previous section of HttpClient:: HttpClient.

Notes and Warnings

Include “HttpClient.h” to use the class function.

IRDevice

Class HttpClient

IRDevice Class

Description

A class used for managing, sending, and receiving data using IR.

Syntax

```
class IRDevice
```

Members

Public Constructors	
A public constructor should not be used as this class is intended to be a singleton class. Access member functions using the object instance named IR.	

Public Methods	
IRDevice::getFreq	Get the current IR modulation frequency
IRDevice::begin	Allocate resources and start the IR device with a custom frequency
IRDevice::end	Stop the IR device operations and free up resources
IRDevice::send	Send IR raw data
IRDevice::beginNEC	Allocate resources and start the IR device with a frequency suitable for the NEC protocol
IRDevice::sendNEC	Send data using the NEC protocol
IRDevice::recvNEC	Receive data using the NEC protocol

IRDevice::getFreq**Description**

Get the current IR modulation frequency.

Syntax

```
uint32_t getFreq(void);
```

Parameters

The function requires no input parameter.

Returns

Currently set IR modulation frequency in Hertz.

Example Code

NA

Notes and Warnings

NA

IRDevice::begin**Description**

Allocate resources and start the IR device with a custom frequency.

Syntax

```
void begin(uint8_t receivePin, uint8_t transmitPin, uint32_t irMode, uint32_t freq);
```

Parameters

receivePin: pin on which IR sensor is connected. Hardware IR receiver is available at pins 3, 8, 17.

transmitPin: pin on which IR LED is connected. Hardware IR transmitter is available at pins 6, 9, 16.

irMode: transmit or receive mode. Valid values: IR_MODE_TX, IR_MODE_RX

freq: IR modulation frequency in Hertz

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

IR device can only operate in either transmit or receive mode.

IRDevice::end**Description**

Stop the IR device operations and free up resources.

Syntax

```
void end(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

IRDevice::send**Description**

Send IR raw data.

Syntax

```
void send(const unsigned int buf[ ], uint16_t len);
```

Parameters

buf[] : IR raw signals (in us) in an array form.

len: total length of the IR raw signal array.

Returns

The function returns nothing.

Example Code

```
#include "IRDevice.h"
```

```
// User defined txPin, rxPin and carrier frequency
```

```
#define IR_RX_PIN 8
```

```
#define IR_TX_PIN 9
```

```
#define CARRIER_FREQ 38000
```

```
unsigned int irRawSignal[] = {
```

```
9000, 4500, // starting bit

560, 560, 560, 560, 560, 1690, 560, 560, 560, 560, 560, 560, 560, 560, 560, // address 00100000 : 4

560, 1690, 560, 1690, 560, 560, 560, 1690, 560, 1690, 560, 1690, 560, 1690, 560, 1690, // ~ address 11011111

560, 560, 560, 560, 560, 560, 560, 1690, 560, 560, 560, 560, 560, 560, 560, 560, // data 00010000 : 8

560, 1690, 560, 1690, 560, 1690, 560, 560, 560, 1690, 560, 1690, 560, 1690, 560, 1690, //~ data 11101111

560 // stoping bit

};

int DataLen = sizeof(irRawSignal) / sizeof(irRawSignal[0]); // 284/ 4 = 71

void setup()

{

Serial.begin(115200);

IR.begin(IR_RX_PIN, IR_TX_PIN, IR_MODE_TX, CARRIER_FREQ);

}

void loop()

{

IR.send(irRawSignal, DataLen);

Serial.println( "Finished Sending NEC Raw Data..." );

delay(3000);

}
```

Notes and Warnings

IR Raw Data array contains information in the form of consecutive microseconds (us). For more details, please refer to:
<http://www.righ.to.com/2009/08/multi-protocol-infrared-remote-library.html>.

IRDevice::beginNEC

Description

Allocate resources and start the IR device with a frequency suitable for the NEC protocol.

Syntax

```
void beginNEC(uint8_t receivePin, uint8_t transmitPin, uint32_t irMode);
```

Parameters

receivePin: pin on which IR sensor is connected. Hardware IR receiver is available at pins 3, 8, 17.

transmitPin: pin on which IR LED is connected. Hardware IR transmitter is available at pins 6, 9, 16.

irMode: transmit or receive mode. Valid values: IR_MODE_TX, IR_MODE_RX

Returns

The function returns nothing.

Example Code

Example: IRRecvNEC

```
#include "IRDevice.h"

uint8_t adr = 0;
uint8_t cmd = 0;

void setup() {
  //Initialize serial and wait for port to open:
  Serial.begin(115200);

  while (!Serial) {
    ; // wait for serial port to connect. Needed for native USB port only
  }

  IR.beginNEC(8, 9, IR_MODE_RX); // configure for NEC IR protocol
}

void loop() {
  if (IR.recvNEC(adr, cmd, 1000)) {
    Serial.print( "Received ");
    Serial.print(adr);
    Serial.print(cmd);
    Serial.println();
  } else {
```

```
Serial.println( "Received nothing, timed out" );  
  
}  
  
//IR.end();  
  
}
```

Notes and Warnings

IR device can only operate in either transmit or receive mode. Refer to <https://techdocs.altium.com/display/FPGA/NEC+Infrared+Transmission+Protocol> for the NEC protocol.

IRDevice::sendNEC

Description

Send data using the NEC protocol.

Syntax

```
void sendNEC(uint8_t adr, uint8_t cmd);
```

Parameters

adr: 8-bit address to transmit

cmd: 8-bit command to transmit

Returns

The function returns nothing.

Example Code

Example: IRSendNEC

```
#include "IRDevice.h"
```

```
uint8_t adr = 0;
```

```
uint8_t cmd = 0;
```

```
void setup() {
```



```

//Initialize serial and wait for port to open:
Serial.begin(115200);

while (!Serial) {

; // wait for serial port to connect. Needed for native USB port only

}

IR.beginNEC(8, 9, IR_MODE_TX); // configure for NEC IR protocol

}

void loop() {

if (cmd++ >=255) {

adr++;

}

IR.sendNEC(adr, cmd);

Serial.print( "Sent  ");

Serial.print(adr);

Serial.print(cmd);

Serial.println();

//IR.end(); // Call this method to stop IR device and free up the pins for other uses

}

```

Notes and Warnings

IR device can only operate in either transmit or receive mode. Refer to <https://techdocs.altium.com/display/FPGA/NEC+Infrared+Transmission+Protocol> for the NEC protocol.

IRDevice::recvNEC

Description

Receive data using the NEC protocol.

Syntax

```
void recvNEC(uint8_t& adr, uint8_t& cmd uint32_t timeout);
```

Parameters

adr: variable to store received NEC address

cmd: variable to store received NEC command

timeout: time duration to wait for an incoming transmission

Returns

The function returns “1” if data has been received, returns “0” if no data has been received.

Example Code

Example: IRRecvNEC

Details of the code can be found in the previous section of IRDevice::beginNEC.

Notes and Warnings

IR device can only operate in either transmit or receive mode. Refer to <https://techdocs.altium.com/display/FPGA/NEC+Infrared+Transmission+Protocol> for the NEC protocol.

MDNS

Class HttpClient

MDNSClass Class

Description

A class used for registering and removing MDNS service records.

Syntax

```
class MDNSClass
```

Members

Public Constructors	
The public constructor should not be used as this class is intended to be a singleton class. Access member functions using the object instance named MDNS.	

Public Methods	
MDNSClass::begin	Start MDNS operations
MDNSClass::end	Stop MDNS operations
MDNSClass::registerService	Add a service record
MDNSClass::deregisterService	Remove service record
MDNSClass::updateService	Update service record

MDNSClass::begin**Description**

Start MDNS operations to begin responding to MDNS queries.

Syntax

```
void begin(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: mDNS_On_Arduino_IDE

This example shows how to register Ameba as a service that can be recognized by Arduino IDE. If both of the PC runs Arduino IDE and the Ameba board are connecting to the same local network. Then you can find Ameba in “Tools” -> “Port” -> “Arduino at 192.168.1.238 (Ameba RTL8195A), which means the Arduino IDE find Ameba via mDNS.

```
#include <WiFi.h>
```

```
#include <AmebaMDNS.h>
```

```
char ssid[] = “yourNetwork” ;// your network SSID (name)
```

```
char pass[] = “secretPassword” ;// your network password
```

```
MDNSService service( “MyAmeba” , “_arduino._tcp” , “local” , 5000);
```

```
void setup() {
```

```
printf( "Try to connect to %srn" , ssid);

while (WiFi.begin(ssid, pass) != WL_CONNECTED) {

printf( "Failed. Wait 1s and retry...rn" );

delay(1000);

}

printf( "Connected to %srn" , ssid);

service.addTxtRecord( "board" , strlen( "ameba_rtl8195a" ), "ameba_rtl8195a" );

service.addTxtRecord( "auth_upload" , strlen( "no" ), "no" );

service.addTxtRecord( "tcp_check" , strlen( "no" ), "no" );

service.addTxtRecord( "ssh_upload" , strlen( "no" ), "no" );

printf( "Start mDNS servicern" );

MDNS.begin();

printf( "register mDNS servicern" );

MDNS.registerService(service);

}

void loop() {

// put your main code here, to run repeatedly:

delay(1000);

}
```

Notes and Warnings

Include "AmebaMDNS.h" to use the class function.

MDNSClass::end

Description

Stop MDNS operations and stop responding to MDNS queries.

Syntax

```
void end(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Include “AmebaMDNS.h” to use the class function.

MDNSClass::registerService**Description**

Add a service record to be included in MDNS responses.

Syntax

```
void register service(MDNSService service);
```

Parameters

service: MDNSService class object with required MDNS service data

Returns

The function returns nothing.

Example Code

Example: mDNS_On_Arduino_IDE

Details of the code can be found in the previous section of MDNSClass:: begin.

Notes and Warnings

Include “AmebaMDNS.h” to use the class function.

MDNSClass::deregisterService

Description

Remove a service record from MDNS responses.

Syntax

```
void deregisterService(MDNSService service);
```

Parameters

service: MDNSService class object to be removed

Returns

The function returns nothing.

Example Code

Example: mDNS_On_Arduino_IDE

Details of the code can be found in the previous section of MDNSClass:: begin.

Notes and Warnings

Include “AmebaMDNS.h” to use the class function.

MDNSClass::updateService

Description

Update a service record.

Syntax

```
void updateService(MDNSService service, unsigned int ttl);
```

Parameters

service: MDNSService class object to be updated

ttl: time-to-live(TTL) for service

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Include “AmebaMDNS.h” to use the class function.

Class HttpClient

MDNSService Class

Description

A class used for creating MDNS service records.

Syntax

```
class MDNSService
```

Members

Public Constructors	
MDNSService::MDNSService	Create a MDNS service record
Public Methods	
MDNSService::addTxtRecord	Add text to MDNS service record

MDNSService::MDNSService

Description

Create a MDNS service record.

Syntax

```
MDNSService(char* name, char* service_type, char* domain, unsigned short port, int bufsize);
```

Parameters

name: device name

service_type: MDNS service type

domain: host domain

port: network port

bufsize: size of buffer for MDNS text record

Returns

The function returns nothing.

Example Code

Example: mDNS_On_Arduino_IDE

Notes and Warnings

Include “AmebaMDNS.h” to use the class function.

MDNSService::addTxtRecord

Description

Add text to MDNS service record.

Syntax

```
int addTextRecord(char* key, int value_len, char* value);
```

Parameters

key: record type expressed as character string

value_len: length of value string

value: record value expressed as character string

Returns

0 if add record successful

Example Code

Example: mDNS_On_Arduino_IDE

Notes and Warnings

Include “AmebaMDNS.h” to use the class function.

MQTTClient**Class PMUClass****PubSubClient Class****Description**

Defines a class of MQTT implementation for Ameba.

Syntax

```
class PubSubClient
```

Members

Public Constructors	
PubSubClient::PubSubClient	Constructs a PubSubClient object
Public Methods	
PubSubClient::setServer	Set MQTT server address and port
PubSubClient::setCallback	Set callback function
PubSubClient::setClient	Set WiFi client
PubSubClient::setStream	Set data stream
PubSubClient::connect	Attempt to connect to server
PubSubClient::disconnect	Disconnect from current session
PubSubClient::publish	Publish a message to server
PubSubClient::publish_P	Same as above
PubSubClient::subscribe	Subscribe to a topic
PubSubClient::unsubscribe	Unsubscribe to a topic
PubSubClient::loop	Keep MQTT session alive and process any queuing tasks
PubSubClient::connected	Check if client still connected
PubSubClient::state	Return connection state

PubSubClient::PubSubClient

Description

Constructs a PubSubClient object and, if applicable, sets server address, port, callback function, data stream and wifi client.

Syntax

```
PubSubClient::PubSubClient();
PubSubClient::PubSubClient(Client& client);
PubSubClient::PubSubClient(IPAddress, uint16_t, Client& client);
PubSubClient::PubSubClient(IPAddress, uint16_t, Client& client, Stream&);
PubSubClient::PubSubClient(IPAddress, uint16_t, MQTT_CALLBACK_SIGNATURE, Client& client);
PubSubClient::PubSubClient(IPAddress, uint16_t, MQTT_CALLBACK_SIGNATURE, Client& client, Stream&);
PubSubClient::PubSubClient(uint8_t *, uint16_t, Client& client);
PubSubClient::PubSubClient(uint8_t *, uint16_t, Client& client, Stream&);
PubSubClient::PubSubClient(uint8_t *, uint16_t, MQTT_CALLBACK_SIGNATURE, Client& client);
PubSubClient::PubSubClient(uint8_t *, uint16_t, MQTT_CALLBACK_SIGNATURE, Client& client, Stream&);
PubSubClient::PubSubClient(const char*, uint16_t, Client& client);
PubSubClient::PubSubClient(const char*, uint16_t, Client& client, Stream&);
PubSubClient::PubSubClient(const char*, uint16_t, MQTT_CALLBACK_SIGNATURE, Client& client);
```

```
PubSubClient::PubSubClient(const char*, uint16_t, MQTT_CALLBACK_SIGNATURE, Client& client, Stream&);
```

Parameters

client: the network client to use, for example WiFiClient

IPAddress: MQTT server address

port: port for MQTT, usually 1883 for unencrypted connection

MQTT_CALLBACK_SIGNATURE: callback function for MQTT

Stream: a stream to write received messages to

Returns

The function returns nothing.

Example Code

Example: MQTT_Basic

```
#include <WiFi.h>

#include <PubSubClient.h>

// Update these with values suitable for your network.

char ssid[] = "yourNetwork" ; // your network SSID (name)
char pass[] = "secretPassword" ; // your network password
int status = WL_IDLE_STATUS; // the Wifi radio's status

char mqttServer[] = "test.mosquitto.org" ;
char clientId[] = "amebaClient" ;
char publishTopic[] = "outTopic" ;
char publishPayload[] = "hello world" ;
char subscribeTopic[] = "inTopic" ;

void callback(char* topic, byte* payload, unsigned int length) {
  Serial.print( "Message arrived [ ");
  Serial.print(topic);
  Serial.print(" ] ");

  for (int i=0;i<length;i++) {
```

```
Serial.print((char)payload[i]);  
  
}  
  
Serial.println();  
  
}  
  
WiFiClient wifiClient;  
  
PubSubClient client(wifiClient);  
  
void reconnect() {  
  // Loop until we' re reconnected  
  
  while (!client.connected()) {  
  
    Serial.print( "Attempting MQTT connection..." );  
  
    // Attempt to connect  
  
    if (client.connect(clientId)) {  
  
      Serial.println( "connected" );  
  
      // Once connected, publish an announcement...  
  
      client.publish(publishTopic, publishPayload);  
  
      // ...and resubscribe  
  
      client.subscribe(subscribeTopic);  
  
    } else {  
  
      Serial.print( "failed, rc=" );  
  
      Serial.print(client.state());  
  
      Serial.println(" try again in 5 seconds" );  
  
      // Wait 5 seconds before retrying  
  
      delay(5000);  
  
    }  
  
  }  
  
}  
  
void setup()  
{  
  
  Serial.begin(38400);  
  
  while (status != WL_CONNECTED) {
```

```

Serial.print( "Attempting to connect to SSID: ");
Serial.println(ssid);
// Connect to WPA/WPA2 network. Change this line if using open or WEP network:
status = WiFi.begin(ssid, pass);
// wait 10 seconds for connection:
delay(10000);
}
client.setServer(mqttServer, 1883);
client.setCallback(callback);
// Allow the hardware to sort itself out
delay(1500);
}
void loop()
{
if (!client.connected()) {
reconnect();
}
client.loop();
}

```

Notes and Warnings

PubSubClient::PubSubClient(Client& client) would suffice for normal MQTT connection

PubSubClient::setServer

Description

Sets the server details.

Syntax

PubSubClient& PubSubClient::setServer(uint8_t * ip, uint16_t port)

PubSubClient& PubSubClient::setServer(IPAddress ip, uint16_t port)

PubSubClient& PubSubClient::setServer(const char * domain, uint16_t port)

Parameters

ip: the address of the server

port: the port to connect to, default 1883

domain: the address of the server

Returns

The client instance, allowing the function to be chained

Example Code

Example: MQTT_Basic

Notes and Warnings

NA

PubSubClient::setCallback

Description

Sets the message callback function.

Syntax

PubSubClient& PubSubClient::setCallback(MQTT_CALLBACK_SIGNATURE)

Parameters

MQTT_CALLBACK_SIGNATURE: a pointer to a message callback function called when a message arrives for a subscription created by this client.

Returns

The client instance, allowing the function to be chained.

Example Code

Example: MQTT_Basic

Notes and Warnings

NA

PubSubClient::setClient

Description

Sets the network client instance to use.

Syntax

```
PubSubClient& PubSubClient::setClient(Client& client)
```

Parameters

client: the network client to use, for example WiFiClient

Returns

The client instance, allowing the function to be chained

Example Code

NA

Notes and Warnings

NA

PubSubClient::setStream

Description

Sets the stream to write received messages to.

Syntax

```
PubSubClient& PubSubClient::setStream(Stream& stream)
```

Parameters

stream: a stream to write received messages to

Returns

The client instance, allowing the function to be chained.

Example Code

NA

Notes and Warnings

NA

PubSubClient::connect

Description

Connects the client to the server.

Syntax

```
boolean PubSubClient::connect(const char *id)
```

```
boolean PubSubClient::connect(const char *id, const char *user, const char *pass)
```

```
boolean PubSubClient::connect(const char *id, const char* willTopic, uint8_t willQos, boolean willRetain, const char* willMessage)
```

```
boolean PubSubClient::connect(const char *id, const char *user, const char *pass, const char* willTopic, uint8_t willQos, boolean willRetain, const char* willMessage)
```

Parameters

id: Client ID, a unique string identifier

user: Username for authentication, default NULL

pass: Password for authentication, default NULL

willTopic: the topic to be used by the will message

willQoS: the quality of service to be used by the will message

willRetain: whether the will should be published with the retain flag

willMessage: the payload of the will message

Returns

True –connection succeeded

False –connection failed

Example Code

Example: MQTT_Basic

Notes and Warnings

Client ID is required and should always be unique else connection might be rejected by the server.

PubSubClient::disconnect**Description**

Disconnect the client

Syntax

void PubSubClient::disconnect(void)

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

PubSubClient::publish

Description

Publishes a message to the specified topic.

Syntax

`boolean PubSubClient::publish(const char* topic, const char* payload)`

`boolean PubSubClient::publish(const char* topic, const char* payload, boolean retained)`

`boolean PubSubClient::publish(const char* topic, const uint8_t* payload, unsigned int plength)`

`boolean PubSubClient::publish(const char* topic, const uint8_t* payload, unsigned int plength, boolean retained)`

Parameters

topic: the topic to publish to

payload: the message to publish

plength: the length of the payload. Required if payload is a byte[]

retained: whether the message should be retained

–false –not retained

–true –retained

Returns

False –publish failed, either connection lost or message too large

True –publish succeeded

Example Code

Example: MQTT_Basic

Notes and Warnings

Default max packet size is 128 bytes.

PubSubClient::publish_P**Description**

Publishes a message stored in PROGMEM to the specified topic.

Syntax

boolean PubSubClient::publish_P(const char* topic, const uint8_t* payload, unsigned int plength, boolean retained)

Parameters

topic: the topic to publish to

payload: the message to publish

plength: the length of the payload. Required if payload is a byte[]

retained: whether the message should be retained

–false –not retained

–true –retained

Returns

False –publish failed, either connection lost or message too large

True –publish succeeded

Example Code

NA

Notes and Warnings

NA

PubSubClient::subscribe

Description

Subscribes to messages published to the specified topic.

Syntax

boolean PubSubClient::subscribe(const char* topic)

boolean PubSubClient::subscribe(const char* topic, uint8_t qos)

Parameters

topic: the topic to subscribe to

qos: the qos to subscribe at

Returns

False –sending the subscribe failed, either connection lost or message too large

True –sending the subscribe succeeded

Example Code

Example: MQTT_Basic

Notes and Warnings

NA

PubSubClient::unsubscribe

Description

Unsubscribes from the specified topic.

Syntax

boolean PubSubClient::unsubscribe(const char* topic)

Parameters

topic: the topic to unsubscribe to

Returns

False –sending the unsubscribe failed, either connection lost or message too large

True –sending the unsubscribe succeeded

Example Code

NA

Notes and Warnings

NA

PubSubClient::loop

Description

A must method called regularly to allow the client to process incoming messages and maintain its connection to the server.

Syntax

```
boolean PubSubClient::loop(void)
```

Parameters

The function requires no input parameter.

Returns

False –the client is no longer connected

True –the client is still connected

Example Code

Example: MQTT_Basic

Notes and Warnings

A required method that should not be blocked for too long.

PubSubClient::connected**Description**

Checks whether the client is connected to the server.

Syntax

```
boolean PubSubClient::connected(void)
```

Parameters

The function requires no input parameter.

Returns

False –the client is not connected

True –the client is connected

Example Code

Example: MQTT_Basic

Notes and Warnings

NA

PubSubClient::state

Description

Returns the current state of the client. If a connection attempt fails, this can be used to get more information about the failure.

All of the values have corresponding constants defined in PubSubClient.h.

Syntax

```
int PubSubClient::state(void)
```

Parameters

The function requires no input parameter.

Returns

-4 : MQTT_CONNECTION_TIMEOUT –the server didn’ t respond within the keepalive time

-3 : MQTT_CONNECTION_LOST –the network connection was broken

-2 : MQTT_CONNECT_FAILED –the network connection failed

-1 : MQTT_DISCONNECTED –the client is disconnected cleanly

0 : MQTT_CONNECTED –the client is connected

1 : MQTT_CONNECT_BAD_PROTOCOL –the server doesn’ t support the requested version of MQTT

2 : MQTT_CONNECT_BAD_CLIENT_ID –the server rejected the client identifier

3 : MQTT_CONNECT_UNAVAILABLE –the server was unable to accept the connection

4 : MQTT_CONNECT_BAD_CREDENTIALS –the username/password were rejected

5 : MQTT_CONNECT_UNAUTHORIZED –the client was not authorized to connect

Example Code

Example: MQTT_Basic

Notes and Warnings

NA

Readme

The Ameba MQTT related APIs and examples are works based on the [PubSubClient libraries](#) written by Nicholas O'Leary

These include,

- `PubSubClient.cpp`
- `PubSubClient.h`

These libraries are under MIT License.

NTPClient

Readme

The NTPClient library is based on the NTPClient library written by Fabrice Weinberg, which can be found at <https://github.com/arduino-libraries/NTPClient>.

These include,

- `NTPClient.cpp`
- `NTPClient.h`

These libraries are licensed under MIT License.

PowerSave

Class PMUClass

PMUClass Class

Description

Defines a class of using Power Save API

Syntax

```
class PMUClass
```

Members

Public Constructors	
PMUClass::PMUClass	Constructs a PMUClass object
Public Methods	
PMUCLASS::begin	Initialize the PMUCLASS and select sleep mode
PMUCLASS::AONTimerDuration	Set the duration of AON Timer
PMUCLASS::AONTimerCmd	Disable the AON Timer for power save usage
PMUCLASS::RTCWakeSetup	Set up RTC Timer for power save usage
PMUCLASS::enable	Enable power save deep sleep mode
PMUCLASS::AONWakeReason	Check AON wakeup source
PMUCLASS::WakePinCheck	Check AON GPIO pin wakeup source
PMUCLASS::AONWakeClear	Clear all the AON wakeup source
PMUCLASS::DsleepWakeStatusGet	Check if deepsleep mode is set
PMUCLASS::TL_sysactive_time	Tickless mode system active time
PMUCLASS::TL_wakelock	Tickless mode wake lock, select acquire of release
PMUCLASS::DS_AON_TIMER_WAKEUP	Return the Wakeup source
PMUCLASS::DS_RTC_WAKEUP	Return the Wakeup source
PMUCLASS::TL_UART_WAKEUP	Return the Wakeup source
PMUCLASS::TL_RTC_WAKEUP	Return the Wakeup source
PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA12	Return the Wakeup source
PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA13	Return the Wakeup source
PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA14	Return the Wakeup source
PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA15	Return the Wakeup source
PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA16	Return the Wakeup source
PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA17	Return the Wakeup source
PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA18	Return the Wakeup source
PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA19	Return the Wakeup source
PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA20	Return the Wakeup source
PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA21	Return the Wakeup source
PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA25	Return the Wakeup source
PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA26	Return the Wakeup source

PMUCLASS::PMUCLASS

Description

Constructs a PMUCLASS object.

Syntax

```
PMUCLASS::PMUCLASS(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::begin

Description

Initialize the PMUCLASS and select sleep mode.

Syntax

```
void PMUClass::begin(uint32_t sleep_mode);
```

Parameters

sleep_mode: Selection value, “11” enters the DeepSleep Mode, “22” enters the Tickless Mode

Returns

The function returns nothing.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::AONTimerDuration

Description

Set the duration of AON Timer

Syntax

```
void PMUClass::AONTimerDuration(uint32_t duration_ms);
```

Parameters

duration_ms: Timer duration between 0 to 32760000ms.

Returns

The function returns nothing.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::AONTimerCmd

Description

Disable the AON timer for power save usage.

Syntax

```
void PMUClass::AONTimerCmd(void);
```

Parameters

c: The value in Celcius.

Returns

The function returns nothing.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::RTCWakeSetup

Description

Set up the RTC timer for power save usage.

Syntax

```
void PMUClass::RTCWakeSetu(uint32_t duration_d, uint32_t duration_h, uint32_t duration_m, uint32_t duration_s);
```

Parameters

duration_d: Set alarm for number of days from 0.

duration_h: Set alarm for number of hours from 0.

duration_m: Set alarm for number of minutes from 0.

duration_s: Set alarm for number of seconds from 0.

Returns

The function returns nothing.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::enable

Description

Enable power save deep sleep mode

Syntax

```
void PMUClass::enable(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::AONWakeReason

Description

Check the AON wakeup source

Syntax

```
uint32_t PMUClass::AONWakeReason(void);
```

Parameters

The function requires no input parameter.

Returns

Returns the value of wakeup deepsleep source. “11” for AON pin, “22” for AON timer, “33” for RTC timer and “0” for none.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::WakePinCheck

Description

Check which AON GPIO pins are the wakeup source

Syntax

```
int PMUClass::WakePinCheck(void);
```

Parameters

The function requires no input parameter.

Returns

Return the pin number for indicating Arduino pin names.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::AONWakeClear

Description

Clear all AON Wakeup source.

Syntax

```
void PMUClass::AONWakeClear(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::DsleepWakeStatusGet

Description

Check if deepsleep mode is set.

Syntax

```
bool PMUClass::DsleepWakeStatusGet(void);
```

Parameters

The function requires no input parameter.

Returns

Return TRUE when enter DeepSleep Mode or FALSE for negative.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::TL_sysactive_time

Description

Tickless mode system active time.

Syntax

```
void PMUClass::TL_sysactive_time(uint32_t duration_ms);
```

Parameters

duration_ms: Set the duration of system active time. The unit is in milliseconds.

Returns

The function returns nothing.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::TL_wakelock

Description

Tickless mode wake lock, select acquire or release.

Syntax

```
void PMUClass::TL_wakelock(uint32_t select_lock);
```


Parameters

select_lock: Wake lock selection value, “1” for acquire or “0” for release.

Returns

The function returns nothing.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::DS_AON_TIMER_WAKEUP**Description**

Return the Wakeup source for DeepSleep Mode.

Syntax

```
void PMUClass::DS_AON_TIMER_WAKEUP(void);
```

Parameters

The function requires no input parameter.

Returns

This function returns AON Timer as the wakeup source and output it on the Serial monitor.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::DS_RTC_WAKEUP

Description

Return the Wakeup source for DeepSleep Mode.

Syntax

```
void PMUClass::DS_RTC_WAKEUP(void);
```

Parameters

The function requires no input parameter.

Returns

This function returns RTC as the wakeup source and output it on the Serial monitor.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::TL_UART_WAKEUP

Description

Return the Wakeup source for Tickless Mode.

Syntax

```
void PMUClass::TL_UART_WAKEUP(void);
```

Parameters

The function requires no input parameter.

Returns

This function returns LOGUART as the wakeup source and output it on the Serial monitor.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::TL_RTC_WAKEUP**Description**

Return the Wakeup source for Tickless Mode.

Syntax

```
void PMUClass::TL_RTC_WAKEUP(void);
```

Parameters

The function requires no input parameter.

Returns

This function returns RTC as the wakeup source and output it on the Serial monitor.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA12**Description**

Return the Wakeup source.

Syntax

```
void PMUClass::AON_WAKEPIN_WAKEUP_GPIOA12(void);
```

Parameters

The function requires no input parameter.

Returns

This function returns AON GPIOA12 pin as the wakeup source and output it on the Serial monitor.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA13

Description

Return the Wakeup source.

Syntax

```
void PMUClass::AON_WAKEPIN_WAKEUP_GPIOA13(void);
```

Parameters

The function requires no input parameter.

Returns

This function returns AON GPIOA13 pin as the wakeup source and output it on the Serial monitor.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA14

Description

Return the Wakeup source.

Syntax

```
void PMUClass::AON_WAKEPIN_WAKEUP_GPIOA14(void);
```

Parameters

The function requires no input parameter.

Returns

This function returns AON GPIOA14 pin as the wakeup source and output it on the Serial monitor.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA15

Description

Return the Wakeup source.

Syntax

```
void PMUClass::AON_WAKEPIN_WAKEUP_GPIOA15(void);
```

Parameters

The function requires no input parameter.

Returns

This function returns AON GPIOA15 pin as the wakeup source and output it on the Serial monitor.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA16

Description

Return the Wakeup source.

Syntax

```
void PMUClass::AON_WAKEPIN_WAKEUP_GPIOA16(void);
```

Parameters

The function requires no input parameter.

Returns

This function returns AON GPIOA16 pin as the wakeup source and output it on the Serial monitor.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA17

Description

Return the Wakeup source.

Syntax

```
void PMUClass::AON_WAKEPIN_WAKEUP_GPIOA17(void);
```

Parameters

The function requires no input parameter.

Returns

This function returns AON GPIOA17 pin as the wakeup source and output it on the Serial monitor.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA18**Description**

Return the Wakeup source.

Syntax

```
void PMUClass::AON_WAKEPIN_WAKEUP_GPIOA18(void);
```

Parameters

The function requires no input parameter.

Returns

This function returns AON GPIOA18 pin as the wakeup source and output it on the Serial monitor.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA19

Description

Return the Wakeup source.

Syntax

```
void PMUClass::AON_WAKEPIN_WAKEUP_GPIOA19(void);
```

Parameters

The function requires no input parameter.

Returns

This function returns AON GPIOA19 pin as the wakeup source and output it on the Serial monitor.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA20

Description

Return the Wakeup source.

Syntax

```
void PMUClass::AON_WAKEPIN_WAKEUP_GPIOA20(void);
```

Parameters

The function requires no input parameter.

Returns

This function returns AON GPIOA20 pin as the wakeup source and output it on the Serial monitor.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA21**Description**

Return the Wakeup source.

Syntax

```
void PMUClass::AON_WAKEPIN_WAKEUP_GPIOA21(void);
```

Parameters

The function requires no input parameter.

Returns

This function returns AON GPIOA21 pin as the wakeup source and output it on the Serial monitor.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA25**Description**

Return the Wakeup source.

Syntax

```
void PMUClass::AON_WAKEPIN_WAKEUP_GPIOA25(void);
```

Parameters

The function requires no input parameter.

Returns

This function returns AON GPIOA25 pin as the wakeup source and output it on the Serial monitor.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA26

Description

Return the Wakeup source.

Syntax

```
void PMUClass::AON_WAKEPIN_WAKEUP_GPIOA26(void);
```

Parameters

The function requires no input parameter.

Returns

This function returns AON GPIOA26 pin as the wakeup source and output it on the Serial monitor.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

RTC

Class RTC

RTC Class

Description

A class used for displaying date and time and alarm configuration using RTC, the independent BCD (Binary-Coded-Decimal) timer.

Syntax

```
class RTC
```

Members

Public Constructors	
A public constructor should not be used as this class is intended to be a singleton class. Access member functions using the object instance named RTC.	

Public Methods	
RTC:: Init	Initializes the RTC device, including the Clock, the RTC registers, and other functions
RTC:: DeInit	Deinitialize the RTC device
RTC:: Write	Set the specified timestamp in seconds to RTC
RTC:: Read	Get the current timestamp in seconds from RTC
RTC:: Wait	Wait for 1 second
RTC:: SetEpoch	Convert human-readable time to epoch time

RTC::Init

Description

Initializes the RTC device, including the Clock, the RTC registers, and other functions.

Syntax

```
void RTC::Init(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: RTC

```
/*  
* This function describes how to use the RTC API.  
* The RTC function is implemented by an independent BCD timer/counter.  
* This example will print out the time information every second.  
*/  
  
#include <stdio.h>  
#include <time.h>  
#include "rtc.h"  
#define YEAR 2020  
#define MONTH 9  
#define DAY 10  
#define HOUR 20  
#define MIN 30  
#define SEC 40  
  
/* Create an rtc object */  
RTC rtc;  
  
int32_t seconds;  
  
struct tm *timeinfo;  
  
void setup() {  
    Serial.begin(115200);  
    rtc.Init(); // initialize RTC  
}
```

```

void loop() {
// step 1: convert user time to epoch
int epochTime = humanReadableToEpoch(YEAR, MONTH, DAY, HOUR, MIN, SEC);

// step 2: write epoch time to rtc
rtc.Write(epochTime);

while (1) {
seconds = rtc.Read();

printf( "Epoch Time (in s) since January 1, 1970 = %dsn" , seconds);

printf( "Time as a basic string = %s" , ctime(&seconds));

timeinfo = localtime(&seconds);

printf( "Time as a custom formatted string = %d-%d-%d %d:%d:%dn" ,
(timeinfo->tm_year + 1900), (timeinfo->tm_mon + 1), timeinfo->tm_mday, timeinfo->tm_hour,
timeinfo->tm_min, timeinfo->tm_sec);

Serial.println();

rtc.wait(1);
}
}

// convert human readable time to epoch time
int humanReadableToEpoch(int year, int month, int day, int hour, int min, int sec) {
struct tm t;
time_t t_of_day;

t.tm_year = year - 1900; // Year - 1970
t.tm_mon = month - 1; // Month, where 0 = jan
t.tm_mday = day; // Day of the month
t.tm_hour = hour;
t.tm_min = min;
t.tm_sec = sec;

t.tm_isdst = -1; // Is DST on? 1 = yes, 0 = no, -1 = unknown
t_of_day = mktime(&t);

// printf( "seconds since the Epoch: %dn" , (long)t_of_day);

```

```
return t_of_day;  
}
```

Notes and Warnings

NA

RTC::DeInit

Description

Deinitializes the RTC device.

Syntax

```
void RTC::DeInit(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: RTC

Details of the code can be found in the previous section of RTC:: Init.

Notes and Warnings

NA

RTC:: Write

Description

Set the specified timestamp in seconds to RTC. Seconds from 1970.1.1 00:00:00 (YEAR.MONTH.DAY, HOUR: MIN: SECONDS) to specified date and time which is to be set.

Syntax

```
void RTC::Write(int t);
```

Parameters

Parameters

t: Seconds from 1970.1.1 00:00:00 (YEAR.MONTH.DAY, HOUR: MIN: SECONDS) to specified date and time which is to be set.

Returns

The function returns nothing.

Example Code

Example: RTC

Details of the code can be found in the previous section of RTC:: Init.

Notes and Warnings

NA

RTC::Read**Description**

Get the current timestamp in seconds from RTC. The current timestamp in seconds which is calculated from 1970.1.1 00:00:00 (YEAR.MONTH.DAY, HOUR: MIN: SECONDS).

Syntax

```
int32_t RTC::Read(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns the current timestamp in seconds which is calculated from 1970.1.1 00:00:00 (YEAR.MONTH.DAY, HOUR: MIN: SECONDS).

Example Code

Example: RTC

Details of the code can be found in the previous section of RTC:: Init.

Notes and Warnings

NA

RTC:: Wait

Description

Send IR raw data.

Syntax

```
void RTC::wait(float s);
```

Parameters

s: unit microseconds (1 us)

Returns

The function returns nothing.

Example Code

Example: RTC

Details of the code can be found in the previous section of RTC:: Init.

Notes and Warnings

NA

RTC:: SetEpoch

Description

Convert human-readable time to epoch time

Syntax

```
int RTC:: SetEpoch(int year, int month, int day, int hour, int min, int sec);
```

Parameters

year: user input year

month: user input month

day: user input day

hour: user input hour

min: user input minutes

sec: user input seconds

Returns

The function returns epoch time in seconds for RTC use.

Example Code

Example: RTC

Details of the code can be found in the previous section of RTC:: Init.

Notes and Warnings

NA

SoftwareSerial**Class Adafruit_GPS****Adafruit_GPS Class****Description**

Defines a class to use GPS module on Ameba.

Syntax

```
class Adafruit_GPS
```

Members

Public Constructors	
Adafruit_GPS::Adafruit_GPS	Constructs an Adafruit_GPS object
Public Methods	
Adafruit_GPS::begin	Initialize serial communication
*Adafruit_GPS:: lastNMEA	Returns the last NMEA line received and unsets the received flag
Adafruit_GPS:: newNMEAreceived	Check to see if a new NMEA line has been received
Adafruit_GPS:: common_init	Initialization code used by all constructor types
Adafruit_GPS:: sendCommand	Send a command to the GPS device
Adafruit_GPS:: pause	Pause/unpause receiving new data
Adafruit_GPS:: parseHex	Read a Hex value and return the decimal equivalent
Adafruit_GPS:: read	Read one character from the GPS device
Adafruit_GPS:: parse	Parse an NMEA string
Adafruit_GPS:: wakeup	Wake the sensor up
Adafruit_GPS:: standby	Standby Mode Switches
Adafruit_GPS::waitForSentence	Wait for a specified sentence from the device
Adafruit_GPS::LOCUS_StartLogger	Start the LOCUS logger
Adafruit_GPS::LOCUS_StopLogger	Stop the LOCUS logger
Adafruit_GPS::LOCUS_ReadStatus	Read the logger status

Adafruit_GPS::Adafruit_GPS

Description

Constructs an Adafruit_GPS object and initialize serial using a SoftSerial object.

Syntax

```
Adafruit_GPS::Adafruit_GPS(SoftwareSerial *ser)
```

```
Adafruit_GPS::Adafruit_GPS(HardwareSerial *ser)
```

Parameters

ser: a Serial instance

Returns

The function returns nothing.

Example Code

Example: Adafruit_GPS_parsing

This example code from Adafruit demonstrates GPS modules using MTK3329/MTK3339 driver. This code shows how to listen to the GPS module in an interrupt which allows the program to have more ‘freedom’ –just parse when a new NMEA sentence is available! Then access data when desired.

```
#include <Adafruit_GPS.h>

#include <SoftwareSerial.h>

// If you're using a GPS module:

// Connect the GPS Power pin to 3.3V

// Connect the GPS Ground pin to ground

// Connect the GPS TX (transmit) pin to Digital 0

// Connect the GPS RX (receive) pin to Digital 1

#if defined(BOARD_RTL8195A)

SoftwareSerial mySerial(0, 1);

#elif defined(BOARD_RTL8710)

SoftwareSerial mySerial(17, 5); // RTL8710 need change GPS TX/RX to pin 17 and 5

#else

SoftwareSerial mySerial(0, 1);

#endif

Adafruit_GPS GPS(&mySerial);

// Set GPSECHO to 'false' to turn off echoing the GPS data to the Serial console

// Set to 'true' if you want to debug and listen to the raw GPS sentences.

#define GPSECHO false

void setup()

{

Serial.begin(38400);

Serial.println( "Adafruit GPS library basic test!" );

// 9600 NMEA is the default baud rate for Adafruit MTK GPS's- some use 4800

GPS.begin(9600);

// uncomment this line to turn on RMC (recommended minimum) and GGA (fix data) including altitude
```

```
GPS.sendCommand(PMTK_SET_NMEA_OUTPUT_RMCGGA);

// uncomment this line to turn on only the "minimum recommended" data
//GPS.sendCommand(PMTK_SET_NMEA_OUTPUT_RMCONLY);

// For parsing data, we don't suggest using anything but either RMC only or RMC+GGA since
// the parser doesn't care about other sentences at this time

// Set the update rate

GPS.sendCommand(PMTK_SET_NMEA_UPDATE_1HZ); // 1 Hz update rate

// For the parsing code to work nicely and have time to sort thru the data, and
// print it out we don't suggest using anything higher than 1 Hz

// Request updates on antenna status, comment out to keep quiet

GPS.sendCommand(PGCMD_ANTENNA);

delay(1000);

// Ask for firmware version

mySerial.println(PMTK_Q_RELEASE);

}

uint32_t timer = millis();

void loop() // run over and over again

{

// in case you are not using the interrupt above, you'll
// need to "hand query" the GPS, not suggested :(
// read data from the GPS in the "main loop"

char c = GPS.read();

// if you want to debug, this is a good time to do it!

if (GPSECHO)

if (c) Serial.print(c);

// if a sentence is received, we can check the checksum, parse it...

if (GPS.newNMEAreceived()) {

// a tricky thing here is if we print the NMEA sentence, or data
// we end up not listening and catching other sentences!

// so be very wary if using OUTPUT_ALLDATA and trying to print out data
```

```

//Serial.println(GPS.lastNMEA()); // this also sets the newNMEAreceived() flag to false
if (!GPS.parse(GPS.lastNMEA())) // this also sets the newNMEAreceived() flag to false
return; // we can fail to parse a sentence in which case we should just wait for another
}

// if millis() or timer wraps around, we'll just reset it
if (timer > millis()) timer = millis();

// approximately every 2 seconds or so, print out the current stats
if (millis() - timer > 2000) {
timer = millis(); // reset the timer

Serial.print(" nTime: ");
Serial.print(GPS.hour, DEC); Serial.print( ':' );
Serial.print(GPS.minute, DEC); Serial.print( ':' );
Serial.print(GPS.seconds, DEC); Serial.print( '.' );
Serial.println(GPS.milliseconds);
Serial.print( "Date: ");
Serial.print(GPS.day, DEC); Serial.print( '/' );
Serial.print(GPS.month, DEC); Serial.print( "/20" );
Serial.println(GPS.year, DEC);
Serial.print( "Fix: "); Serial.print((int)GPS.fix);
Serial.print(" quality: "); Serial.println((int)GPS.fixquality);
if (GPS.fix) {
Serial.print( "Location: ");
Serial.print(GPS.latitude, 4); Serial.print(GPS.lat);
Serial.print(" , ");
Serial.print(GPS.longitude, 4); Serial.println(GPS.lon);
Serial.print( "Location (in degrees, works with Google Maps): ");
Serial.print(GPS.latitudeDegrees, 4);
Serial.print(" , ");
Serial.println(GPS.longitudeDegrees, 4);
Serial.print( "Speed (knots): "); Serial.println(GPS.speed);
}
}

```

```
Serial.print( "Angle: "); Serial.println(GPS.angle);  
Serial.print( "Altitude: "); Serial.println(GPS.altitude);  
Serial.print( "Satellites: "); Serial.println((int)GPS.satellites);  
}  
}  
}
```

Notes and Warnings

IMPORTANT: SoftSerial is using hardware serial so pin mapping cannot be altered.

Adafruit_GPS::begin

Description

Initialize serial communication

Syntax

```
void Adafruit_GPS::begin(uint16_t baud)
```

Parameters

baud: serial baud rate

Returns

The function returns nothing.

Example Code

Example: Adafruit_GPS_parsing

The details of the code can be found in the previous section of Adafruit_GPS:: Adafruit_GPS.

Notes and Warnings

NA

Adafruit_GPS::lastNMEA*Description**

Returns the last NMEA line received and unsets the received flag

Syntax

```
char *Adafruit_GPS::lastNMEA(void)
```

Parameters

The function requires no input parameter.

Returns

Pointer to the last line string

Example Code

Example: Adafruit_GPS_parsing

The details of the code can be found in the previous section of Adafruit_GPS:: Adafruit_GPS.

Notes and Warnings

NA

Adafruit_GPS::newNMEAreceived**Description**

Check to see if a new NMEA line has been received

Syntax

```
boolean Adafruit_GPS::newNMEAreceived(void)
```

Parameters

The function requires no input parameter.

Returns

True if received, false if not

Example Code

Example: Adafruit_GPS_parsing

The details of the code can be found in the previous section of Adafruit_GPS:: Adafruit_GPS.

Notes and Warnings

NA

Adafruit_GPS::common_init

Description

Initialization code used by all constructor types

Syntax

```
void Adafruit_GPS::common_init(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

Adafruit_GPS::sendCommand

Description

Send a command to the GPS device

Syntax

```
void Adafruit_GPS::sendCommand(const char *str)
```

Parameters

str: Pointer to a string holding the command to send

Returns

The function returns nothing.

Example Code

Example: Adafruit_GPS_parsing

The details of the code can be found in the previous section of Adafruit_GPS:: Adafruit_GPS.

Notes and Warnings

NA

Adafruit_GPS::pause

Description

Pause/unpause receiving new data

Syntax

```
void Adafruit_GPS::pause(boolean p)
```

Parameters

p: True = pause, false = unpause

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

Adafruit_GPS::parseHex

Description

Read a Hex value and return the decimal equivalent

Syntax

```
uint8_t Adafruit_GPS::parseHex(char c)
```

Parameters

c: Hex value

Returns

The decimal equivalent of the Hex value

Example Code

NA

Notes and Warnings

NA

Adafruit_GPS::read

Description

Read one character from the GPS device

Syntax

```
char Adafruit_GPS::read(void)
```

Parameters

The function requires no input parameter.

Returns

The character that we received, or 0 if nothing was available

Example Code

Example: Adafruit_GPS_parsing

The details of the code can be found in the previous section of Adafruit_GPS:: Adafruit_GPS.

Notes and Warnings

NA

Adafruit_GPS::parse**Description**

Parse an NMEA string

Syntax

```
boolean Adafruit_GPS::parse(char *nmea)
```

Parameters

nmea: an NMEA string

Returns

True if we parsed it, false if it has invalid data

Example Code

Example: Adafruit_GPS_parsing

Notes and Warnings

NA

Adafruit_GPS::wakeup

Description

Wake the sensor up

Syntax

boolean Adafruit_GPS::wakeup(void)

Parameters

The function requires no input parameter.

Returns

True if woken up, false if not in standby or failed to wake

Example Code

NA

Notes and Warnings

NA

Adafruit_GPS::standby

Description

Standby Mode Switches

Syntax

boolean Adafruit_GPS::standby(void)

Parameters

The function requires no input parameter.

Returns

False if already in standby, true if it entered standby

Example Code

NA

Notes and Warnings

NA

Adafruit_GPS::waitForSentence**Description**

Wait for a specified sentence from the device

Syntax

boolean Adafruit_GPS::waitForSentence(const char *wait4me, uint8_t max)

Parameters

wait4me: Pointer to a string holding the desired response

max: How long to wait, default is MAXWAITSENTENCE

Returns

True if we got what we wanted, false otherwise

Example Code

NA

Notes and Warnings

NA

Adafruit_GPS::LOCUS_StartLogger

Description

Start the LOCUS logger

Syntax

boolean Adafruit_GPS::LOCUS_StartLogger(void)

Parameters

The function requires no input parameter.

Returns

True on success, false if it failed

Example Code

NA

Notes and Warnings

NA

Adafruit_GPS::LOCUS_StopLogger

Description

Stop the LOCUS logger

Syntax

```
boolean Adafruit_GPS::LOCUS_StopLogger(void)
```

Parameters

The function requires no input parameter.

Returns

True on success, false if it failed

Example Code

NA

Notes and Warnings

NA

Adafruit_GPS::LOCUS_ReadStatus**Description**

Read the logger status

Syntax

```
boolean Adafruit_GPS::LOCUS_ReadStatus(void)
```

Parameters

The function requires no input parameter.

Returns

True if we read the data, false if there was no response

Example Code

NA

Notes and Warnings

NA

Class HttpClient**PMS3003 Class****Description**

Defines a class to work with PMS3003 air quality sensor on Ameba.

Syntax

```
class PMS3003
```

Members

Public Constructors	
PMS3003::PMS3003	Constructs a PMS3003 object
Public Methods	
PMS3003::begin	Initialize hardware UART
PMS3003::end	Free allocated space thus stopping UART
PMS3003::get_pm1p0_cf1	Get PM1.0 under correction factor = 1
PMS3003:: get_pm2p5_cf1	Get PM2.5 under correction factor = 1
PMS3003:: get_pm10_cf1	Get PM10 under correction factor = 1
PMS3003:: get_pm1p0_air	Get PM1.0 air quality
PMS3003:: get_pm2p5_air	Get PM2.5 air quality
PMS3003:: get_pm10_air	Get PM10 air quality
PMS3003:update_cache	Updates the cache memory
PMS3003::pms3003_handle_interrupt	Set up the serial event handler

PMS3003::PMS3003**Description**

Constructs a PMS3003 object and initialize the pin mapping.

Syntax

```
PMS3003::PMS3003(int _rx, int _tx, int _set, int _reset)
```

Parameters

_rx: RX pin of UART

_tx: TX pin of UART

_set: Set pin

_reset: Reset pin

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

PMS3003::begin**Description**

Initialize hardware UART and allocate space for serial buffer

Syntax

```
void PMS3003::begin(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

PMS3003::end

Description

Free serial buffer space and stop UART

Syntax

```
void PMS3003::end(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

PMS3003::get_pm1p0_cf1

Description

Get PM1.0 under correction factor = 1

Syntax

```
int PMS3003::get_pm1p0_cf1(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns the value “pm1p0_cf1” as an integer.

Example Code

NA

Notes and Warnings

NA

PMS3003::get_pm2p5_cf1**Description**

Get PM2.5 under correction factor = 1

Syntax

```
int PMS3003::get_pm2p5_cf1(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns the value of “pm2p5_cf1” as an integer.

Example Code

NA

Notes and Warnings

NA

PMS3003::get_pm10_cf1

Description

Get PM10 under correction factor = 1

Syntax

```
int PMS3003::get_pm10_cf1(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns the value of “pm10_cf1” as an integer.

Example Code

NA

Notes and Warnings

NA

PMS3003::get_pm1p0_air

Description

Get PM1.0 air quality

Syntax

```
int PMS3003::get_pm1p0_air(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns the value of “pm1p0_air” as an integer.

Example Code

NA

Notes and Warnings

NA

PMS3003::get_pm2p5_air**Description**

Get PM2.5 air quality

Syntax

```
int PMS3003::get_pm2p5_air(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns the value of “pm2p5_air” as an integer.

Example Code

NA

Notes and Warnings

NA

PMS3003::get_pm10_air

Description

Get PM10 air quality

Syntax

```
int PMS3003::get_pm10_air(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns the value of “pm10_air” as an integer.

Example Code

NA

Notes and Warnings

NA

PMS3003::pms3003_handle_interrupt

Description

Set up the serial event handler

Syntax

```
void pms3003_handle_interrupt(uint32_t id, uint32_t event)
```

Parameters

id: device identifier

event: Serial event for handling incoming data

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

PMS3003::update_cache**Description**

Serves the function of updating cache memory. One package has 32 bytes. Illustrate the formate by using below raw data: 42 4d 00 1c 00 1b 00 21 00 29 00 1a 00 21 00 29 2b fb 04 be 00 6b 00 10 00 04 00 04 67 00 04 46

42 4d : header signature

00 1c : frame length, 0x001c = 28 bytes (not include header and this field)

00 1b : PM1.0 under CF=1

00 21 : PM2.5 under CF=1

00 29 : PM10 under CF=1

00 1a : PM1.0 under air

00 21 : PM2.5 under air

00 29 : PM10 under air

2b fb : number of pariticle, diameter size 0.3 um in 0.1 liter air

04 be : number of pariticle, diameter size 0.5 um in 0.1 liter air

00 6b : number of pariticle, diameter size 1.0 um in 0.1 liter air

00 10 : number of pariticle, diameter size 2.5 um in 0.1 liter air

00 04 : number of pariticle, diameter size 5.0 um in 0.1 liter air

00 04 : number of pariticle, diameter size 10 um in 0.1 liter air

67 : serial number

00 : error code

04 46 :

checksum,0x42+0x4d+0x00+0x1c+0x00+0x1b+0x00+0x21+0x00+0x29+0x00+0x1a+0x00+0x21+0x00+0x29+
0x2b+0xfb+0x04+0xbe+0x00+0x6b+0x00+0x10+0x00+0x04+0x00+0x04+0x67+0x00 = 0x0446

Syntax

```
void PMS3003::update_cache(void)
```

Parameters

The function requires no input parameters.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

Class SoftwareSerial

SoftwareSerial Class

Description

Defines a class of software serial implementation for Ameba.

Syntax

```
class SoftwareSerial
```

Members

Public Constructors	
SoftwareSerial::SoftwareSerial	Constructs a SoftwareSerial object
Public Methods	
SoftwareSerial::begin	Sets the speed (baud rate) for the serial communication
SoftwareSerial::listen	Enables the selected software serial port to listen
SoftwareSerial::end	Same as stopListening
SoftwareSerial::stopListening	Stop listening on the port
SoftwareSerial::peek	Return a character that was received on the RX pin of the software serial port
SoftwareSerial::write	Prints data to the transmit pin of the software serial port as raw bytes
SoftwareSerial::read	Return a character that was received on the RX pin of the software serial port
SoftwareSerial::available	Get the number of bytes (characters) available for reading from a software serial port
SoftwareSerial::flush	Flush the received buffer
SoftwareSerial::setBufferSize	Set buffer size
SoftwareSerial::setAvailableCallback	Set available callback
SoftwareSerial::handle_interrupt	Private methods handles interrupt

SoftwareSerial::SoftwareSerial

Description

Constructs a SoftwareSerial object and sets RX and TX pin, and inverse logic.

Syntax

```
SoftwareSerial::SoftwareSerial(uint8_t receivePin, uint8_t transmitPin, bool inverse_logic /* = false */)
```

Parameters

receivePin: the pin on which to receive serial data

transmitPin: the pin on which to transmit serial data

inverse_logic: is used to invert the sense of incoming bits

Returns

The function returns nothing.

Example Code

Example: SoftwareSerialExample

The example demonstrates a software serial test, it receives from serial RX and sends it to serial TX.

```
/*  
  
The circuit: (BOARD RTL8195A)  
  
* RX is digital pin 0 (connect to TX of other devices)  
* TX is digital pin 1 (connect to RX of other devices)  
  
*/  
  
#include <SoftwareSerial.h>  
  
#if defined(BOARD_RTL8195A)  
  
SoftwareSerial mySerial(0, 1); // RX, TX  
  
#elif defined(BOARD_RTL8710)  
  
SoftwareSerial mySerial(17, 5); // RX, TX  
  
#else  
  
SoftwareSerial mySerial(0, 1); // RX, TX  
  
#endif  
  
void setup() {  
  
  // Open serial communications and wait for port to open:  
  Serial.begin(57600);  
  
  while (!Serial) {  
  
    ; // wait for serial port to connect. Needed for native USB port only  
  
  }  
  
  Serial.println( "Goodnight moon!" );  
  
  // set the data rate for the SoftwareSerial port  
  mySerial.begin(4800);  
  
  mySerial.println( "Hello, world?" );  
  
}  
  
void loop() { // run over and over  
  
  if (mySerial.available()) {  
  
    mySerial.write(mySerial.read());  
  
  }  
  
}
```

```
}
```

Notes and Warnings

Software Serial is using hardware serial thus DO NOT change the default pins

SoftwareSerial::begin

Description

Sets the speed (baud rate) for the serial communication

Syntax

```
void SoftwareSerial::begin(long speed)
```

```
void SoftwareSerial::begin(long speed, int data_bits, int parity, int stop_bits)
```

```
void SoftwareSerial::begin(long speed, int data_bits, int parity, int stop_bits, int flowctrl, int rtsPin, int ctsPin)
```

Parameters

speed: the baud rate

data_bits: number of data bits, 8 bits(default) or 7 bits

stop_bits: number of stop bits, 1 bit(default), 1.5 bits or 2 bits

flowctrl: flow control pin

rtsPin: request to send pin

ctsPin: clear to send pin

Returns

The function returns nothing.

Example Code

Example: SoftwareSerialExample

The example demonstrates a software serial test, it receives from serial RX and sends it to serial TX. Details of the code can be found in the previous section of SoftwareSerial_Basic:: SoftwareSerial.

Notes and Warnings

NA

SoftwareSerial::listen

Description

Enables the selected software serial port to listen

Syntax

```
bool SoftwareSerial::listen(void)
```

Parameters

The function requires no input parameter.

Returns

Returns true if it replaces another

Example Code

NA

Notes and Warnings

NA

SoftwareSerial::end

Description

Same as stopListening

Syntax

```
void SoftwareSerial::end(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

SoftwareSerial::isListening**Description**

Tests to see if requested software serial port is actively listening

Syntax

```
bool SoftwareSerial::isListening(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns “True” if the port is listening.

Example Code

NA

Notes and Warnings

NA

SoftwareSerial::stopListening

Description

Stop listening on the port

Syntax

```
bool SoftwareSerial::stopListening(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns “True” if listening on the port is stopped.

Example Code

NA

Notes and Warnings

NA

SoftwareSerial::peek

Description

Return a character that was received on the RX pin of the software serial port

Syntax

```
int SoftwareSerial::peek(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns the character read, or returns “-1” if none is available.

Example Code

NA

Notes and Warnings

NA

SoftwareSerial::write**Description**

Prints data to the transmit pin of the software serial port as raw bytes

Syntax

```
size_t SoftwareSerial::write(uint8_t b)
```

Parameters

b: byte to be written

Returns

The function returns the number of bytes written.

Example Code

Example: SoftwareSerialExample

The example demonstrates a software serial test, it receives from serial RX and sends it to serial TX. Details of the code can be found in the previous section of SoftwareSerial:: SoftwareSerial.

Notes and Warnings

NA

SoftwareSerial::read

Description

Return a character that was received on the RX pin of the software serial port

Syntax

```
int SoftwareSerial::read(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns the character read, or -1 if none is available.

Example Code

Example: SoftwareSerialExample

The example demonstrates a software serial test, it receives from serial RX and sends it to serial TX. Details of the code can be found in the previous section of SoftwareSerial: SoftwareSerial.

Notes and Warnings

NA

SoftwareSerial::available

Description

Get the number of bytes available for reading from a software serial port

Syntax


```
int SoftwareSerial::available(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns the number of bytes available to read.

Example Code

Example: SoftwareSerialExample

The example demonstrates a software serial test, it receives from serial RX and sends it to serial TX. Details of the code can be found in the previous section of SoftwareSerial:: SoftwareSerial.

Notes and Warnings

NA

SoftwareSerial::flush**Description**

Flush the received buffer

Syntax

```
void SoftwareSerial::flush(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

SoftwareSerial::setBufferSize

Description

Set buffer size

Syntax

```
void SoftwareSerial::setBufferSize(uint32_t buffer_size)
```

Parameters

buffer_size: the size of the serial buffer

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

SoftwareSerial::setAvailableCallback

Description

Set available callback

Syntax

```
void SoftwareSerial::setAvailableCallback(void (*callback)(char c))
```

Parameters

*callback: user-defined serial callback function

Returns

The function returns nothing.

Example Code

Example: SoftwareSerialIrqCallback

This example demonstrates the software serial testing using IRQ callback and semaphore. Set callback function “mySerialCallback” to software serial. Whenever there is data comes in, “mySerialCallback” is invoked. In this sketch, it does nothing until the end of the line. And then it sends a semaphore. The loop() uses a non-busy loop to wait for the semaphore. To test this sketch, you need to type something on software serial and then press Enter.

```

/*
The circuit: (BOARD RTL8195A)
RX is digital pin 0 (connect to TX of other devices)
TX is digital pin 1 (connect to RX of other devices)
*/

#include <SoftwareSerial.h>

#if defined(BOARD_RTL8195A)
SoftwareSerial mySerial(0, 1); // RX, TX
#elif defined(BOARD_RTL8710)
SoftwareSerial mySerial(17, 5); // RX, TX
#else
SoftwareSerial mySerial(0, 1); // RX, TX
#endif

uint32_t semaID;

// The callback is hooking at UART IRQ handler and please don't do heavy task here.

void mySerialCallback(char c)

```

```
{  
/* The parameter c is only for peeking. The actual data is  
* still in the buffer of SoftwareSerial.  
*/  
  
if (c == 'r' || c == 'n' ) {  
  os_semaphore_release(semaID);  
}  
}  
  
void setup() {  
  // use 1 count for binary semaphore  
  semaID = os_semaphore_create(1);  
  
  // There is a token in the semaphore, clear it.  
  os_semaphore_wait(semaID, 0xFFFFFFFF);  
  
  // set the data rate for the SoftwareSerial port  
  mySerial.begin(38400);  
  
  mySerial.setAvailableCallback(mySerialCallback);  
}  
  
void loop() { // run over and over  
  // wait semaphore for 5s timeout  
  if (os_semaphore_wait(semaID, 5 * 1000)) {  
    // we got data before timeout  
    while(mySerial.available()) {  
      mySerial.print((char)mySerial.read());  
    }  
    mySerial.println();  
  } else {  
    mySerial.println( "No data comes in." );  
  }  
}
```

Notes and Warnings

NA

SoftwareSerial::handle_interrupt

Description

A private method handles the interrupt

Syntax

```
void handle_interrupt(uint32_t id, uint32_t event)
```

Parameters

id: the interrupt id

event: interrupt event

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

Readme

The Ameba Software Serial related APIs and examples are works based on libraries formerly known as `NewSoftSerial.h` by Mikal Hart (<http://arduiniiana.org/libraries/newsoftserial>).

These include,

- `SoftwareSerial.cpp`
- `SoftwareSerial.h`

These libraries are under GNU Lesser General Public License.

The Ameba GPS related APIs and examples are works based on Adafruit GPS library written by Limor Fried/Ladyada for Adafruit Industries (<http://www.adafruit.com/products/746>).

These include,

- `Adafruit_GPS.cpp`
- `Adafruit_GPS.h`

These libraries are under BSD License.

SPI

Class AmebaILI9341

AmebaILI9341 Class

Description

Defines a class to use ILI9341 TFT SPI display for Ameba.

Syntax

```
class AmebaILI9341
```

Members

Public Constructors	
AmebaILI9341::AmebaILI9341	Constructs an AmebaILI9341 object
Public Methods	
AmebaILI9341::begin	Initialize SPI, pin mapping and screen configuration
AmebaILI9341::setAddress	Initialize image size and position
AmebaILI9341::writecommand	SPI transfer a command
AmebaILI9341::writedata	SPI transfer a piece of data
AmebaILI9341::setRotation	Set screen orientation
AmebaILI9341::fillScreen	Fill the screen with a color
AmebaILI9341::clr	Clear screen
AmebaILI9341::fillRectangle	Fill a rectangular space with a color
AmebaILI9341::drawPixel	Turn on a pixel on the screen
AmebaILI9341::drawChar	To print a character on the screen
AmebaILI9341::drawLine	Draw line on the screen
AmebaILI9341::drawRectangle	Draw a rectangle on the screen
AmebaILI9341::drawCircle	Draw a circle on the screen
AmebaILI9341::write	Same as drawChar
AmebaILI9341::getWidth	Return the width 240
AmebaILI9341::getHeight	Return the height 320
AmebaILI9341::setCursor	Set cursor to the desired position
AmebaILI9341::setForeground	Set foreground color
AmebaILI9341::setBackground	Set background color
AmebaILI9341::setFontSize	Set character font size
AmebaILI9341::reset	Reset pin to High or Low

AmebaILI9341::AmebaILI9341

Description

Constructs an AmebaILI9341 object and set CS, DC and RESET pins .

Syntax

```
AmebaILI9341::AmebaILI9341(int csPin, int dcPin, int resetPin)
```

Parameters

csPin: pin for Chip Select dcPin: pin for Data/Command resetPin: pin for Reset

Returns

The function returns nothing.

Example Code

Example: : PM25_ON_ILI9341_TFT_LCD

This example demonstrates how to read pm2.5 value on PMS 3003 air-condition sensor and display it on ILI9341 TFT LCD.

/*

PMS 3003 pin map is as follow:

PIN1 :VCC, connect to 5V

PIN2 :GND

PIN3 :SET, 0:Standby mode, 1:operating mode

PIN4 :RXD :Serial RX

PIN5 :TXD :Serial TX

PIN6 :RESET

PIN7 :NC

PIN8 :NC

In this example, we only use Serial to get PM 2.5 value.

The circuit:

* RX is digital pin 0 (connect to TX of PMS 3003)

* TX is digital pin 1 (connect to RX of PMS 3003)

For RTL8195A ILI9341 TFT LCD with SPI interface has these pins:

D/C : connect to pin 9

CS : connect to pin 10

MOSI : connect to pin 11

MISO : connect to pin 12

CLK : connect to pin 13

VCC : connect to 3V3

GND : connect to GND

*/

#include "SoftwareSerial.h"

#include "SPI.h"

#include "AmebaILI9341.h"

#if defined(BOARD_RTL8195A)

SoftwareSerial mySerial(0, 1); // RX, TX


```

#define TFT_RESET 8

#define TFT_DC 9

#define TFT_CS 10

#elif defined(BOARD_RTL8710)

SoftwareSerial mySerial(17, 5); // RX, TX

// IMPORTANT: Due to limit pin, we do not connect TFT_RESET pin.

#define TFT_RESET 0xFFFFFFFF

#define TFT_DC 2

#define TFT_CS 10

#endif

AmebaILI9341 tft = AmebaILI9341(TFT_CS, TFT_DC, TFT_RESET);

#define ILI9341_SPI_FREQUENCY 20000000

#define pmsDataLen 32

uint8_t buf[pmsDataLen];

int idx = 0;

int pm10 = 0;

int last_pm25 = 0;

int pm25 = 0;

int pm100 = 0;

uint16_t pm25color[] = {

0x9FF3,

0x37E0,

0x3660,

0xFFE0,

0xFE60,

0xFCC0,

0xFB2C,

0xF800,

0x9800,

0xC99F

```

```
};

void setup() {
  Serial.begin(57600);

  mySerial.begin(9600); // PMS 3003 UART has baud rate 9600

  SPI.setDefaultFrequency(ILI9341_SPI_FREQUENCY);

  tft.begin();

  drawPictureFrames();
}

void loop() { // run over and over

  uint8_t c;

  idx = 0;

  memset(buf, 0, pmsDataLen);

  while (true) {

    while (c != 0x42) {

      while (!mySerial.available());

      c = mySerial.read();

    }

    while (!mySerial.available());

    c = mySerial.read();

    if (c == 0x4d) {

      // now we got a correct header

      buf[idx++] = 0x42;

      buf[idx++] = 0x4d;

      break;

    }

  }

  while (idx != pmsDataLen) {

    while (!mySerial.available());

    buf[idx++] = mySerial.read();

  }

}
```

```
pm10 = ( buf[10] << 8 ) | buf[11];
last_pm25 = pm25;
pm25 = ( buf[12] << 8 ) | buf[13];
pm100 = ( buf[14] << 8 ) | buf[15];
updateValueToTftScreen();
}

void drawPictureFrames() {
tft.setRotation(1);

tft.clr();

tft.setFontSize(1);

// Upper title
tft.setFontSize(1);
tft.setCursor(20,20);
tft.print( "PM2.5 DETECTOR" );

// PM 2.5 Circle Frame
tft.drawCircle(100,130,60, ILI9341_BLUE);
tft.drawCircle(100,130,61, ILI9341_BLUE);
tft.setFontSize(1);
tft.setCursor(90,85);
tft.print( "PM2.5" );
tft.setFontSize(1);
tft.setCursor(90,170);
tft.print( "um/m3" );

// PM 10 Circle Frame
tft.drawCircle(220,70,40, ILI9341_BLUE);
tft.setFontSize(1);
tft.setCursor(210,40);
tft.print( "PM10" );
tft.setFontSize(1);
tft.setCursor(205,95);
```

```
tft.print( "um/m3" );
// PM 1.0 Circle Frame
tft.drawCircle(220,170,40, ILI9341_BLUE);
tft.setFontSize(1);
tft.setCursor(205,140);
tft.print( "PM1.0" );
tft.setFontSize(1);
tft.setCursor(205,195);
tft.print( "um/m3" );
// right side bar, referenced from: http://taqm.epa.gov.tw/taqm/tw/
tft.fillRect(290, 30+ 0*2, 10, 12*2, pm25color[0]); // 0~11
tft.fillRect(290, 30+12*2, 10, 12*2, pm25color[1]); // 12-23
tft.fillRect(290, 30+24*2, 10, 12*2, pm25color[2]); // 24-35
tft.fillRect(290, 30+36*2, 10, 6*2, pm25color[3]); // 36-41
tft.fillRect(290, 30+42*2, 10, 6*2, pm25color[4]); // 42-47
tft.fillRect(290, 30+48*2, 10, 6*2, pm25color[5]); // 48-53
tft.fillRect(290, 30+54*2, 10, 6*2, pm25color[6]); // 54-58
tft.fillRect(290, 30+59*2, 10, 6*2, pm25color[7]); // 59-64
tft.fillRect(290, 30+65*2, 10, 6*2, pm25color[8]); // 65-70
tft.fillRect(290, 30+71*2, 10, 10*2, pm25color[9]); // >=71
tft.setCursor(302, 30);
tft.setFontSize(1);
tft.print( "0" );
tft.setCursor(302, 30+36*2);
tft.print( "36" );
tft.setCursor(302, 30+54*2);
tft.print( "54" );
tft.setCursor(302, 30+71*2);
tft.print( "71" );
// bottom right text
```

```
tft.setCursor(210,230);
tft.setFontSize(1);
tft.print( "Powered by Realtek" );
updateValueToTftScreen();
}

void updateValueToTftScreen() {
tft.setCursor(60, 111);
tft.setFontSize(5);
tft.setForeground( getPm25Color(pm25) );
if (pm25 < 10) {
tft.print(" ");
} else if (pm25 < 100) {
tft.print(" ");
}
tft.print(pm25);
tft.setCursor(195,60);
tft.setFontSize(3);
if (pm100 < 10) {
tft.print(" ");
} else if (pm100 < 100) {
tft.print(" ");
}
tft.print(pm100);
tft.setCursor(198,160);
if (pm10 < 10) {
tft.print(" ");
} else if (pm10 < 100) {
tft.print(" ");
}
tft.print(pm10);
```

```
tft.setFontSize(1);

tft.setForeground(ILI9341_WHITE);

if (last_pm25 > 80) {
tft.fillRect(275, 80*2+30-3, 12, 8, ILI9341_BLACK);
} else {
tft.fillRect(275, last_pm25*2+30-3, 12, 8, ILI9341_BLACK);
}

if (pm25 > 80) {
tft.setCursor(275, 80*2+30-3);
} else {
tft.setCursor(275, pm25*2+30-3);
}

tft.print( "=>" );
}

uint16_t getPm25Color(int v) {
if (v < 12) {
return pm25color[0];
} else if (v < 24) {
return pm25color[1];
} else if (v < 36) {
return pm25color[2];
} else if (v < 42) {
return pm25color[3];
} else if (v < 48) {
return pm25color[4];
} else if (v < 54) {
return pm25color[5];
} else if (v < 59) {
return pm25color[6];
} else if (v < 65) {
```

```

return pm25color[7];
} else if (v < 71) {
return pm25color[8];
} else {
return pm25color[9];
}
}

```

Notes and Warnings

NA

AmebaILI9341::begin

Description

Initialize hardware SPI, pin mapping and screen configuration

Syntax

```
void AmebaILI9341::begin(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: PM25_ON_ILI9341_TFT_LCD

Details of the code are given in the previous section of AmebaILI9341:: AmebaILI9341.

Notes and Warnings

This method is required to run first before other operations on the display.

AmebaILI9341::setAddress

Description

Initialize image size and positioning on the display

Syntax

```
void AmebaILI9341::setAddress(uint16_t x0, uint16_t y0, uint16_t x1, uint16_t y1)
```

Parameters

x0: leftmost coordinate of the image y0: top coordinate of the image x1: rightmost coordinate of the image y1: bottom coordinate of the image

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Do not use this to set the cursor, use the “setCursor” method instead.

AmebaILI9341::writecommand

Description

Write a single-byte command to display

Syntax

```
void AmebaILI9341::writecommand(uint8_t command)
```

Parameters

command: a single byte command

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

AmebaILI9341::writedata

Description

Write 1 byte of data to display

Syntax

```
void AmebaILI9341::writedata(uint8_t data)
```

Parameters

data: 1 byte data

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Only use this method to write 1 byte at a time.

AmebaILI9341::setRotation**Description**

Setting screen orientation, “0” for no rotation, “1” for 90 degrees rotation and so on so forth.

Syntax

void AmebaILI9341::setRotation(uint8_t m)/span> **Parameters**

m: one of the 4 rotation modes -> “0” for no rotation, “1” for 90⁰, “2” for 180⁰, “3” for 270⁰

Returns

The function returns nothing.

Example Code

Example: PM25_ON_ILI9341_TFT_LCD

Details of the code are given in the previous section of AmebaILI9341:: AmebaILI9341.

Notes and Warnings

if m=4, it’ s equivalent to mode 0, and m=5 for mode 1, m=6 for mode 2 so on so forth.

AmebaILI9341::fillScreen**Description**

Fill the entire screen with one color

Syntax

void AmebaILI9341::fillScreen(uint16_t color)

Parameters

color: a 16-bit color reference defined in AmebaILI9341.h

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Refer to AmebaILI9341.h for available colors.

AmebaILI9341::clr

Description

Fill the entire screen with a certain background-color

Syntax

```
void AmebaILI9341::clr(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: PM25_ON_ILI9341_TFT_LCD

Details of the code are given in the previous section of AmebaILI9341:: AmebaILI9341

Notes and Warnings

background-color can be set by calling setBackground method.

AmebaILI9341::fillRectangle

Description

Fill a rectangular space with a color on the screen

Syntax

```
void AmebaILI9341::fillRectangle(int16_t x, int16_t y, int16_t w, int16_t h, uint16_t color)
```

Parameters

x: leftmost coordinate of the image y: top coordinate of the image w: width of the image h: height of the image color: the color of the image

Returns

The function returns nothing.

Example Code

Example: PM25_ON_ILI9341_TFT_LCD

Details of the code are given in the previous section of AmebaILI9341:: AmebaILI9341.

Notes and Warnings

NA

AmebaILI9341::drawPixel

Description

Turn on a pixel on the screen

Syntax

```
void AmebaILI9341::drawPixel(int16_t x, int16_t y, uint16_t color)
```

Parameters

x: leftmost coordinate of the image y: top coordinate of the image color: the color of the image

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

AmebaILI9341::drawChar**Description**

Draw character on the screen

Syntax

```
void AmebaILI9341::drawChar(unsigned char c) void AmebaILI9341::drawChar(int16_t x, int16_t y, unsigned char c, uint16_t _fontcolor, uint16_t _background, uint8_t _fontsize)
```

Parameters

x: leftmost coordinate of the image y: top coordinate of the image c: a character _fontcolor: font color _background: background color _fontsize: font size

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

In the actual example, the Print method is used to print a string of character on the screen instead of using this method.

AmebaILI9341::drawLine**Description**

Draw a straight line on the screen

Syntax

```
void AmebaILI9341::drawLine(int16_t x0, int16_t y0, int16_t x1, int16_t y1) void AmebaILI9341::drawLine(int16_t x0, int16_t y0, int16_t x1, int16_t y1, uint16_t color)
```

Parameters

x0: leftmost coordinate of the image y0: top coordinate of the image x1: leftmost coordinate of the image y1: top coordinate of the image color: the color of the image

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

AmebaILI9341::drawRectangle**Description**

Draw a rectangular shape on the screen

Syntax

```
void AmebaILI9341::drawRectangle(int16_t x, int16_t y, int16_t w, int16_t h) void AmebaILI9341::drawRectangle(int16_t x, int16_t y, int16_t w, int16_t h, uint16_t color)
```

Parameters

x: leftmost coordinate of the image y: top coordinate of the image w: width of the image h: height of the image color: the color of the image

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

AmebaILI9341::drawCircle**Description**

Draw a circular shape on the screen

Syntax

```
void AmebaILI9341::drawCircle(int16_t x0, int16_t y0, int16_t r) void AmebaILI9341::drawCircle(int16_t x0, int16_t y0, int16_t r, uint16_t color)
```

Parameters

x0: leftmost coordinate of the image y0: top coordinate of the image r: radius of the image color: the color of the image

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Include “AmebaServo.h” to use the class function.

AmebaILI9341::write**Description**

Same as drawChar, write a character on the screen

Syntax

```
size_t AmebaILI9341::write(uint8_t c)
```

Parameters

c: a character to be written on the screen

Returns

Number of bytes written

Example Code

NA

Notes and Warnings

This an inherited method from Print class and is seldom used.

AmebaILI9341::getWidth**Description**

Get the width of the image

Syntax

```
int16_t AmebaILI9341::getWidth(void)
```

Parameters

The function requires no input parameter.

Returns

Width of the image

Example Code

NA

Notes and Warnings

NA

AmebaILI9341::getHeight

Description

Get the height of the image

Syntax

```
int16_t AmebaILI9341::getHeight(void)
```

Parameters

The function requires no input parameter.

Returns

Height of the image

Example Code

NA

Notes and Warnings

NA

AmebaILI9341::setCursor

Description

Set the cursor to a specific position on the screen

Syntax

```
void AmebaILI9341::setCursor(int16_t x, int16_t y)
```

Parameters

x: coordinate on the x-axis y: coordinate on the y-axis

Returns

The function returns nothing.

Example Code

Example: PM25_ON_ILI9341_TFT_LCD

Details of the code are given in the previous section of AmebaILI9341:: AmebaILI9341.

Notes and Warnings

NA

AmebaILI9341::setForeground

Description

Set foreground color

Syntax

```
void AmebaILI9341::setForeground(uint16_t color)
```

Parameters

color: one of the colors available in AmebaILI9341.h

Returns

The function returns nothing.

Example Code

Example: PM25_ON_ILI9341_TFT_LCD

Details of the code are given in the previous section of AmebaILI9341:: AmebaILI9341.

Notes and Warnings

NA

AmebaILI9341::setBackground

Description

Set background color

Syntax

```
void AmebaILI9341::setBackground(uint16_t _background)
```

Parameters

_background: one of the colors available in AmebaILI9341.h

Returns

The function returns nothing.

Example Code

Example: PM25_ON_ILI9341_TFT_LCD

Details of the code are given in the previous section of AmebaILI9341:: AmebaILI9341.

Notes and Warnings

NA

AmebaILI9341::setFontSize

Description

Set the font size of the characters printed on the screen.

Syntax

```
void AmebaILI9341::setFontSize(uint8_t size)
```

Parameters

size: font size, default 1 for smallest, 5 for largest font size

Returns

The function returns nothing.

Example Code

Example: PM25_ON_ILI9341_TFT_LCD

Details of the code are given in the previous section of AmebaILI9341:: AmebaILI9341.

Notes and Warnings

NA

AmebaILI9341::reset

Description

Reset the pin to High or Low

Syntax

```
void AmebaILI9341::reset(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

Class SPISettings_SPIClass

SPISettings Class

Description

Defines a class to set SPI parameters.

Syntax

```
class SPISettings
```

Members

Public Constructors	
SPISettings::SPISettings	Create a SPISettings object and set SPI clock speed, bit order and data mode

SPISettings::SPISettings

Description

Construct an object and configure SPI parameters —clock speed, bit order and data model to the preferred default value.

Syntax

```
SPISettings YourObject(uint32_t clock, BitOrder bitOrder, uint8_t dataMode);
```

Parameters

clock: SPI clock speed, default is 4000000

bitOrder: order of bit stream, MSB first or LSB first, default is MSBFIRST

dataMode: There are 4 modes -> SPI_MODE0~3, default is SPI_MODE0

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

This class seldom used alone, it is always used with `beginTransaction()` as a parameter in `SPIClass`.

SPIClass Class

Description

Defines a class of SPI implementation for Ameba.

Syntax

```
class SPIClass
```

Members

Public Constructors	
<code>SPIClass::SPIClass</code>	Constructs an SPI object
Public Methods	
<code>SPIClass::transfer</code>	Transfer data through SPI
<code>SPIClass::transfer16</code>	Transfer a 16-bits data through SPI
<code>SPIClass::beginTransaction</code>	Set slave select pin and SPI initial settings
<code>SPIClass::endTransaction</code>	Stop SPI transaction
<code>SPIClass::begin</code>	Associate each SPI pin to Ameba pin using ameba HAL APIs
<code>SPIClass::end</code>	Stop SPI master mode
<code>SPIClass::setBitOrder</code>	Set MSB first or LSB first
<code>SPIClass::setDataMode</code>	Set to one of the four data modes
<code>SPIClass::setClockDivider</code>	Set to correct clock speed (no effect on Ameba)
<code>SPIClass::setDefaultFrequency</code>	Set default SPI frequency

SPIClass::SPIClass

Description

Construct an SPI object, create a pointer to the object, and attach “MOSI, MISO, CLK, and SS” to each pin on Ameba.

Syntax

```
SPIClass(void *pSpiObj, int mosi, int miso, int clk, int ss);
```

Parameters

pSpiObj: SPI pointer to the object

mosi: master out slave in

miso: master in slave out

clk: clock

ss: slave select

Returns

The function returns nothing.

Example Code

```
SPIClass SPI((void *)&spi_obj0), 11, 12, 13, 10);
```

Notes and Warnings

2 SPI objects are created in the library for 2 different hardware SPI on Ameba (if applicable), use “SPI” for first hardware SPI and “SPI1” for the second.

SPIClass::transfer**Description**

Calling HAL API to send data in the buffer to the slave

Syntax

```
byte SPIClass::transfer (byte _pin, uint8_t _data, SPITransferMode _mode);
```

```
byte SPIClass::transfer (uint8_t _data, SPITransferMode _mode);
```

```
void SPIClass::transfer (byte _pin, void *_buf, size_t _count, SPITransferMode _mode);
```

```
void SPIClass::transfer (void *_buf, size_t _count, SPITransferMode _mode);
```

Parameters

_pin: Slave select pin

_data: Actual data being sent over

_mode: SPI transfer mode

_count: number of bytes of data

_buf: data buffer

Returns

Void or “0” in case of error, “d” in case success

Example Code

NA

Notes and Warnings

NA

SPIClass::transfer16

Description

Same as “transfer” method above except data being of 16-bits.

Syntax

```
uint16_t SPIClass::transfer16(byte _pin, uint16_t _data, SPITransferMode _mode)
```

```
uint16_t SPIClass::transfer16(uint16_t _data, SPITransferMode _mode)
```

Parameters

_pin: Slave select pin

_data: Actual data being sent over

_mode: SPI transfer mode

Returns

The data being transferred

Example Code

NA

Notes and Warnings

NA

SPIClass::beginTransaction**Description**

Set slave select pin and initialize SPI with default settings using SPISettings class.

Syntax

```
void SPIClass::beginTransaction(uint8_t pin, SPISettings settings)
```

```
void SPIClass::beginTransaction(SPISettings settings)
```

Parameters

pin: slave select pin

settings: an object of SPISettings class

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Refer to SPISettings class for details of the initial settings.

SPIClass::endTransaction**Description**

Set slave select pin to 1 and stop SPI transaction.

Syntax

```
void SPIClass::endTransaction(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

SPIClass::begin

Description

Calling HAL APIs to initialize SPI pins to physical Ameba pins and set SPI format and frequency

Syntax

```
void SPIClass::begin(void)
```

```
void SPIClass::begin(int ss)
```

Parameters

void or ss: slave select

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

This is a required method to use SPI on Ameba.

SPIClass::end

Description

Free hardware SPI from any activity.

Syntax

```
void SPIClass::end(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

SPIClass::setBitOrder

Description

A specific method to set bit order to either MSB first or LSB first and set slave select pin.

Syntax

```
void SPIClass::setBitOrder(uint8_t _pin, BitOrder _bitOrder)
void SPIClass::setBitOrder(BitOrder _order)
```

Parameters

_pin: slave select
_bitOrder: bit order -> either MSB first or LSB first
_order: same as above

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

SPIClass::setDataMode

Description

A specific method to set data mode to one of the 4 modes (default: SPI_MODE0) and set slave select pin.

Syntax

```
void SPIClass::setDataMode(uint8_t _pin, uint8_t _mode)
void SPIClass::setDataMode(uint8_t _mode)
```

Parameters

_pin: slave select
_mode: one of the 4 modes (default: SPI_MODE0)

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

SPIClass::setClockDivider**Description**

A specific method to set to divider in order to get correct clock speed

Syntax

```
void SPIClass::setClockDivider(uint8_t _pin, uint8_t _divider)
```

```
void SPIClass::setClockDivider(uint8_t _div)
```

Parameters

_pin: slave select

_divider: clock divider

_div: same as above

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

This function does not affect the Ameba board.

SPIClass::setDefaultFrequency

Description

A specific method to set default SPI frequency

Syntax

```
void SPIClass::setDefaultFrequency(int _frequency)
```

Parameters

_frequency: the default SPI frequency

Returns

The function returns nothing.

Example Code

Example: PM25_on_ILI9341_TFT_LCD

Details of the code are given in the previous section of AmebaILI9341:: AmebaILI9341.

Notes and Warnings

Take note that defaultFrequency = _frequency.

Readme

The Ameba SPI related APIs and examples are works based on SPI Master library for arduino written by Cristian Maglie <c.maglie@arduino.cc> and Paul Stoffregen <paul@pjrc.com> (Transaction API).

These include,

SPI.cpp

SPI.h

These libraries are under GNU Lesser General Public License, version 2.1.

Sys

Wiring_OS_API

Wiring OS API

Description

A wrapper to CMSIS (Cortex Microcontroller Software Interface Standard) OS API which serve as a RTOS to create multi-threaded application with real-time behaviour.

Syntax

NA

Members

Public Methods	
os_thread_create_arduino	Create a thread and add it to Active Threads and set it to state READY
os_thread_get_id_arduino	Return the thread ID of the current running thread
os_thread_terminate_arduino	Terminate execution of a thread and remove it from Active Threads
os_thread_yield_arduino	Pass control to next thread that is in state READY
os_thread_set_priority_arduino	Change priority of an active thread
os_thread_get_priority_arduino	Get current priority of an active thread
os_signal_set_arduino	Set the specified Signal Flags of an active thread
os_signal_clear_arduino	Clear the specified Signal Flags of an active thread
os_signal_wait_arduino	Wait for one or more Signal Flags to become signaled for the current RUNNING thread
os_timer_create_arduino	Create a timer
os_timer_start_arduino	Start or restart a timer
os_timer_stop_arduino	Stop the timer
os_timer_delete_arduino	Delete a timer that was created by os_timer_create
os_semaphore_create_arduino	Create and Initialize a Semaphore object used for managing resources
os_semaphore_wait_arduino	Wait until a Semaphore token becomes available
os_semaphore_release_arduino	Release a Semaphore token
os_semaphore_delete_arduino	Delete a Semaphore that was created by os_semaphore_create
os_get_free_heap_size_arduino	Return the available heap memory space when called

os_thread_create_arduino

Description

Create a thread and add it to Active Threads and set it to state READY.

Syntax

```
uint32_t os_thread_create_arduino (void (*task)(const void *argument), void *argument, int priority, uint32_t stack_size);
```

Parameters

task: task Function pointer which is the thread body. It should not run into the end of function unless os_thread_terminate is invoked

argument: the data pointer which brings to task

priority: The underlying os is FreeRTOS. It executes tasks with highest priority which are not in idle state.

stack_size: The stack_size is used as memory heap only for this task.

Returns

The thread id which is used in thread operation and signalling.

Example Code

NA

Notes and Warnings

NA

os_thread_get_id_arduino

Description

Return the thread ID of the current running thread

Syntax

```
uint32_t os_thread_get_id_arduino (void);
```

Parameters

The function requires no input parameter.

Returns

Current thread id which calls `os_thread_get_id`.

Example Code

NA

Notes and Warnings

NA

`os_thread_terminate_arduino`**Description**

Terminate execution of a thread and remove it from Active Threads

Syntax

```
uint32_t os_thread_terminate_arduino (uint32_t thread_id);
```

Parameters

`thread_id`: Terminate the thread with specific `thread_id`

Returns

`os_status` code

Example Code

NA

Notes and Warnings

Thread should not ended without terminate first.

os_thread_yield_arduino

Description

Pass control to next thread that is in state READY

Syntax

```
uint32_t os_thread_yield_arduino (void);
```

Parameters

The function requires no input parameter.

Returns

os_status code

Example Code

NA

Notes and Warnings

By default, the minimal execution unit is 1 millisecond. In a scenario that if a thread with smaller want to handout execution right to a thread with higher priority immediately without waiting for the ending of current 1 millisecond, then invoke os_thread_yield can transfer execution right to OS' s idle task and check which is the next execution thread.

os_thread_set_priority_arduino

Description

Change priority of an active thread

Syntax

```
uint32_t os_thread_set_priority_arduino (uint32_t thread_id, int priority);
```

Parameters

thread_id: The target thread with the thread id to be changed
priority: The updated priority

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

os_thread_get_priority_arduino**Description**

Get current priority of an active thread

Syntax

```
uint32_t os_thread_get_priority_arduino (uint32_t thread_id);
```

Parameters

thread_id: The target thread with the thread id to be searched

Returns

os_priority

Example Code

NA

Notes and Warnings

NA

os_signal_set_arduino

Description

Set the specified Signal Flags of an active thread

Syntax

```
int32_t os_signal_set_arduino (uint32_t thread_id, int32_t signals);
```

Parameters

thread_id: Send signal to a thread with the thread id

signals: the signals to be send

Returns

os_status code

Example Code

NA

Notes and Warnings

NA

os_signal_clear_arduino

Description

Clear the specified Signal Flags of an active thread

Syntax

```
int32_t os_signal_clear_arduino (uint32_t thread_id, int32_t signals);
```


Parameters

thread_id: Clear signal to a thread with the thread id

signals: The signals to be clear

Returns

os_status code

Example Code

NA

Notes and Warnings

NA

os_signal_wait_arduino**Description**

Wait for one or more Signal Flags to become signaled for the current RUNNING thread

Syntax

```
os_event_t os_signal_wait_arduino (int32_t signals, uint32_t millisec);
```

Parameters

signals: the signals to be wait

millisec: the timeout value if no signal comes in. Fill in 0xFFFFFFFF for infinite wait

Returns

os_status code

Example Code

NA

Notes and Warnings

NA

os_timer_create_arduino

Description

Create a timer

Syntax

```
uint32_t os_timer_create_arduino (void (*callback)(void const *argument), uint8_t isPeriodic, void *argument);
```

Parameters

callback: The function to be invoke when timer timeout

isPeriodic: OS_TIMER_ONCE or OS_TIMER_PERIODIC

argument: The argument that is bring into callback function

Returns

timer id

Example Code

NA

Notes and Warnings

NA

os_timer_start_arduino

Description

Start or restart a timer

Syntax

```
uint32_t os_timer_start_arduino (uint32_t timer_id, uint32_t millisec);
```

Parameters

timer_id: The timer id obtained from by os_timer_create

millisec: The delays after timer starts

Returns

os_status code

Example Code

NA

Notes and Warnings

NA

os_timer_stop_arduino**Description**

Stop the timer

Syntax

```
uint32_t os_timer_stop_arduino (uint32_t timer_id);
```

Parameters

timer_id: The timer id obtained from by os_timer_create

Returns

os_status code

Example Code

NA

Notes and Warnings

NA

os_timer_delete_arduino

Description

Delete a timer that was created by os_timer_create

Syntax

```
uint32_t os_timer_delete_arduino (uint32_t timer_id);
```

Parameters

timer_id: The timer id obtained from by os_timer_create

Returns

os_status code

Example Code

NA

Notes and Warnings

NA

os_semaphore_create_arduino

Description

Create and Initialize a Semaphore object used for managing resources

Syntax

```
uint32_t os_semaphore_create_arduino (int32_t count);
```

Parameters

count: The number of available resources

Returns

semaphore ID

Example Code

NA

Notes and Warnings

NA

os_semaphore_wait_arduino**Description**

Wait until a Semaphore token becomes available

Syntax

```
int32_t os_semaphore_wait_arduino (uint32_t semaphore_id, uint32_t millisec);
```

Parameters

semaphore_id: semaphore id obtained from os_semaphore_create

millisec: timeout value

Returns

os_status code

Example Code

NA

Notes and Warnings

NA

os_semaphore_release_arduino

Description

Release a Semaphore token

Syntax

```
uint32_t os_semaphore_release_arduino (uint32_t semaphore_id);
```

Parameters

semaphore_id: semaphore id obtained from os_semaphore_create

Returns

os_status code

Example Code

NA

Notes and Warnings

NA

os_semaphore_delete_arduino

Description

Delete a Semaphore that was created by os_semaphore_create

Syntax

```
uint32_t os_semaphore_delete_arduino (uint32_t semaphore_id);
```

Parameters

semaphore_id: semaphore id obtained from os_semaphore_create

Returns

os_status code

Example Code

NA

Notes and Warnings

NA

os_get_free_heap_size_arduino**Description**

Return the available heap memory space when called

Syntax

```
size_t os_get_free_heap_size_arduino(void);
```

Parameters

The function requires no input parameter.

Returns

current free heap size

Example Code

Example: MemInfo

Notes and Warnings

NA

WDT

Class WDT

WDT Class

Description

A class used for initializing, starting, stopping watchdog timer.

Syntax

```
class WDT
```

Members

Public Constructors	
A public constructor should not be used as this class is intended to be a singleton class. Access member functions using the object instance named WDT.	

Public Methods	
WDT:: InitWatchdog	Initializes the watchdog, include time setting, and mode register
WDT:: StartWatchdog	Start the watchdog counting
WDT:: StopWatchdog	Stop the watchdog counting
WDT:: RefreshWatchdog	Refresh the watchdog counting to prevent WDT timeout
WDT:: InitWatchdogIRQ	Switch the watchdog timer to interrupt mode and register a watchdog timer timeout interrupt handler

WDT:: InitWatchdog

Description

Initializes the watchdog, include time setting, and mode register.

Syntax

```
void InitWatchdog(uint32_t timeout_ms);
```

Parameters

timeout_ms: the watch-dog timer timeout value in millisecond (ms). The default action after watchdog timer timeout is to reset the whole system.

Returns

The function returns nothing.

Example Code

Example: WatchdogTimer

```
/*
 * This example describes how to use watchdog api.
 * In this example, watchdog is setup to 5s timeout.
 * Watchdog won't bark if we refresh it before timeout in smallTask.
 * The timer is also reloaded after refresh.
 * Otherwise, while running bigTask, watchdog will restart system in default or call callback function if registered.
 */
#include "wdt.h"

#define RUN_CALLBACK_IF_WATCHDOG_BARKS (0)

WDT wdt;

void setup() {
  Serial.begin(115200);

  wdt.InitWatchdog(5000); // setup 5s watchdog

  #if RUN_CALLBACK_IF_WATCHDOG_BARKS

  wdt.InitWatchdogIRQ(my_watchdog_irq_handler, 0);

  #else

  // system would restart in default when watchdog barks

  #endif
```

```
wdt.StartWatchdog(); // enable watchdog timer

successfulTask();

failedTask();

while (1)

;

}

void loop() {

}

void successfulTask(void) {

Serial.println(" ... doing small task ... ");

for (int i = 0; i < 50000000; i++) // dummy task

asm(" nop" );

Serial.println( "refresh watchdogrn" );

wdt.RefreshWatchdog();

}

/*

* Doing this task will lead to failed refresh the

* watchdog timer within the time limits of 5 seconds

*/

void failedTask(void) {

Serial.println(" ... doing big task ... ");

for (int i = 0; i < 10; i++) {

Serial.print( "doing dummy task #" );

Serial.println(i, DEC);

for (int j = 0; j < 50000000; j++) // dummy task

asm(" nop" );

}

Serial.println( "refresh watchdogrn" );

wdt.RefreshWatchdog();

}
```

```
void my_watchdog_irq_handler(uint32_t id) {  
    printf( "watchdog barks!!!rn" );  
    WDG_Cmd(DISABLE);  
}
```

Notes and Warnings

NA

WDT:: StartWatchdog

Description

Start the watchdog counting.

Syntax

```
void StartWatchdog(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: WatchdogTimer

You may refer to the code in previous section of WDT::InitWatchdog.

Notes and Warnings

NA

WDT:: StopWatchdog

Description

Stop the watchdog counting.

Syntax

```
void StopWatchdog(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: WatchdogTimer

You may refer to the code in previous section of WDT::InitWatchdog.

Notes and Warnings

NA

WDT:: RefreshWatchdog

Description

Refresh the watchdog counting to prevent WDT timeout.

Syntax

```
void RefreshWatchdog(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: WatchdogTimer

You may refer to the code in previous section of WDT::InitWatchdog.

Notes and Warnings

NA

WDT:: InitWatchdogIRQ**Description**

Switch the watchdog timer to interrupt mode and register a watchdog timer timeout interrupt handler. The interrupt handler will be called when the watchdog timer is timeout.

Syntax

```
void WDT::InitWatchdogIRQ(wdt_irq_handler handler, uint32_t id)
```

Parameters

handler: the callback function for WDT timeout interrupt.

id: the parameter for the callback function

Returns

The function returns nothing.

Example Code

Example: WatchdogTimer

You may refer to the code in previous section of WDT::InitWatchdog.

Notes and Warnings

NA

WiFi

Class WiFi

WiFiClass Class

Description

Defines a class of WiFi and network implementation for Ameba.

Syntax

```
class WiFiClass
```

Members

Public Constructors	
WiFiClass::WiFiClass	Constructs a WiFiClass object and initializes the WiFi libraries and network settings
Public Methods	
WiFiClass::firmwareVersion	Get firmware version
WiFiClass:: begin	Start Wifi connection for OPEN networks
WiFiClass:: config	Configure network IP settings
WiFiClass:: setDNS	Set the DNS server IP address to use
WiFiClass:: disconnect	Disconnect from the network
WiFiClass:: macAddress	Get the interface MAC address
WiFiClass:: localIP	Get the interface IP address
WiFiClass:: subnetMask	Get the interface subnet mask address
WiFiClass:: gatewayIP	Get the gateway IP address
WiFiClass:: SSID	Return the current SSID associated with the network
WiFiClass:: BSSID	Return the current BSSID associated with the network
WiFiClass:: RSSI	Return the current RSSI (Received Signal Strength in dBm) associated with the network
WiFiClass:: encryption-Type	Return the Encryption Type associated with the network
WiFiClass:: scanNetworks	Start scan WiFi networks available
WiFiClass:: SSID	Return the SSID discovered during the network scan
WiFiClass:: encryption-Type	Return the encryption type of the networks discovered during the scanNetworks
WiFiClass:: encryption-TypeEx	Return the security type and encryption type of the networks discovered during the scanNetworks
WiFiClass:: RSSI	Return the RSSI of the networks discovered during the scanNetworks
WiFiClass:: status	Return Connection status
WiFiClass:: hostByName	Resolve the given hostname to an IP address
WiFiClass:: apbegin	Start AP mode
WiFiClass:: disablePower-Save	Disable power-saving mode

WiFiClass::WiFiClass

Description

Constructs a WiFiClass object and initializes the WiFi libraries and network settings.

Syntax

```
WiFiClass::WiFiClass()
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

An instance of WiFiClass is created as WiFi inside WiFi.h and is extern for direct use.

WiFiClass::firmwareVersion

Description

Get firmware version

Syntax

```
char* WiFiClass::firmwareVersion()
```

Parameters

The function requires no input parameter.

Returns

WiFi firmware version

Example Code

Example: ConnectWithWPA

This example demos how to connect to an unencrypted WiFi network, and prints the MAC address of the Wifi shield, the IP address obtained, and other network details.

```
#include <WiFi.h>
```



```

// char ssid[] = "yourNetwork" ; // your network SSID (name)

// char pass[] = "secretPassword" ; // your network password

char ssid[] = "SINGTEL-D45F" ; // your network SSID (name)

char pass[] = "mooxuteeth" ; // your network key

int status = WL_IDLE_STATUS; // the Wifi radio's status

void setup() {

//Initialize serial and wait for port to open:

Serial.begin(9600);

while (!Serial) {

; // wait for serial port to connect. Needed for native USB port only

}

// check for the presence of the shield:

if (WiFi.status() == WL_NO_SHIELD) {

Serial.println( "WiFi shield not present" );

// don't continue:

while (true);

}

String fv = WiFi.firmwareVersion();

if (fv != "1.1.0" ) {

Serial.println( "Please upgrade the firmware" );

}

// attempt to connect to Wifi network:

while (status != WL_CONNECTED) {

Serial.print( "Attempting to connect to WPA SSID: ");

Serial.println(ssid);

// Connect to WPA/WPA2 network:

status = WiFi.begin(ssid, pass);

// wait 10 seconds for connection:

delay(10000);

}

```

```
// you' re connected now, so print out the data:

Serial.print( "You' re connected to the network" );

printCurrentNet();

printWifiData();

}

void loop() {

// check the network connection once every 10 seconds:

delay(10000);

printCurrentNet();

}

void printWifiData() {

// print your WiFi shield' s IP address:

IPAddress ip = WiFi.localIP();

Serial.print( "IP Address: ");

Serial.println(ip);

Serial.println(ip);

// print your MAC address:

byte mac[6];

WiFi.macAddress(mac);

Serial.print( "MAC address: ");

Serial.print(mac[0], HEX);

Serial.print( ":" );

Serial.print(mac[1], HEX);

Serial.print( ":" );

Serial.print(mac[2], HEX);

Serial.print( ":" );

Serial.print(mac[3], HEX);

Serial.print( ":" );

Serial.print(mac[4], HEX);

Serial.print( ":" );
```

```
Serial.println(mac[5], HEX);
}

void printCurrentNet() {
// print the SSID of the network you' re attached to:
Serial.print( "SSID: ");
Serial.println(WiFi.SSID());

// print the MAC address of the router you' re attached to:
byte bssid[6];
WiFi.BSSID(bssid);
Serial.print( "BSSID: ");
Serial.print(bssid[5], HEX);
Serial.print( ":" );
Serial.print(bssid[4], HEX);
Serial.print( ":" );
Serial.print(bssid[3], HEX);
Serial.print( ":" );
Serial.print(bssid[2], HEX);
Serial.print( ":" );
Serial.print(bssid[1], HEX);
Serial.print( ":" );
Serial.println(bssid[0], HEX);

// print the received signal strength:
long rssi = WiFi.RSSI();
Serial.print( "signal strength (RSSI):" );
Serial.println(rssi);

// print the encryption type:
byte encryption = WiFi.encryptionType();
Serial.print( "Encryption Type:" );
Serial.println(encryption, HEX);
Serial.println();
```

```
}
```

Notes and Warnings

NA

WiFiClass::begin

Description

Start Wifi connection for OPEN networks

Syntax

```
int WiFiClass::begin(char* ssid)
int WiFiClass::begin(char* ssid, uint8_t key_idx, const char *key)
int WiFiClass::begin(char* ssid, const char *passphrase)
```

Parameters

ssid: Pointer to the SSID string

key_idx: The key index to set. Valid values are 0-3.

key: Key input buffer.

passphrase: Passphrase. Valid characters in a passphrase must be between ASCII 32-126 (decimal).

Returns

WiFi status

Example Code

Example: ConnectWithWPA

This example demos how to connect to an unencrypted WiFi network, and prints the MAC address of the Wifi shield, the IP address obtained, and other network details. The details of the code can be found in the previous section of `WiFiClass::firmwareVersion`.

Notes and Warnings

NA

WiFiClass::config

Description

Configure network settings for the WiFi network

Syntax

```
void WiFiClass::config(IPAddress local_ip)
void WiFiClass::config(IPAddress local_ip, IPAddress dns_server)
void WiFiClass::config(IPAddress local_ip, IPAddress dns_server, IPAddress gateway)
void WiFiClass::config(IPAddress local_ip, IPAddress dns_server, IPAddress gateway, IPAddress subnet)
```

Parameters

local_ip: Local device IP address to use on the network
dns_server: IP address of the DNS server to use
gateway: IP address of the gateway device on the network
subnet: Subnet mask for the network, expressed as a IP address

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

This will disable the DHCP client when connecting to a network, and will require the network accepts a static IP. The configured IP addresses will also apply to AP mode, but the DHCP server will not be disabled in AP mode.

WiFiClass::setDNS

Description

Configure the IP address of the DNS server to use

Syntax

```
void WiFiClass::setDNS(IPAddress dns_server1)
void WiFiClass::setDNS(IPAddress dns_server1, IPAddress dns_server2)
```

Parameters

dns_server1: IP address of DNS server to use

dns_server2: IP address of DNS server to use

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

WiFiClass::disconnect

Description

Disconnect from the network

Syntax

```
int WiFiClass::disconnect()
```

Parameters

The function requires no input parameter.

Returns

The function returns one value of wl_status_t enum as an integer.

Example Code

NA

Notes and Warnings

NA

WiFiClass::macAddress**Description**

Get the interface MAC address

Syntax

```
uint8_t* WiFiClass::macAddress(uint8_t* mac)
```

Parameters

mac: an array to store MAC address

Returns

The function returns a pointer to uint8_t array with length WL_MAC_ADDR_LENGTH.

Example Code

Example: ConnectWithWPA

This example demos how to connect to an unencrypted WiFi network, and prints the MAC address of the Wifi shield, the IP address obtained, and other network details. The details of the code can be found in the previous section of `WiFiClass::firmwareVersion`.

Notes and Warnings

NA

WiFiClass::localIP**Description**

Get the interface IP address

Syntax

IPAddress WiFiClass::localIP()

Parameters

The function requires no input parameter.

Returns

Ip address value

Example Code

Example: ConnectWithWPA

This example demos how to connect to an unencrypted WiFi network, and prints the MAC address of the Wifi shield, the IP address obtained, and other network details. The details of the code can be found in the previous section of WiFiClass:: firmwareVersion.

Notes and Warnings

NA

WiFiClass::subnetMask

Description

Get the interface subnet mask address

Syntax

IPAddress WiFiClass::subnetMask()

Parameters

The function requires no input parameter.

Returns

subnet mask address value

Example Code

Example: ConnectNoEncryption

This example demonstrates how to connect to an unencrypted WiFi network and prints the MAC address of the WiFi shield, the IP address obtained, and other network details.

```
#include <WiFi.h>

char ssid[] = "SINGTEL-D45F_5G" ;// the name of your network
int status = WL_IDLE_STATUS; // the Wifi radio's status

void setup() {
  //Initialize serial and wait for port to open:
  Serial.begin(9600);

  while (!Serial) {
    ; // wait for serial port to connect. Needed for native USB port only
  }

  // check for the presence of the shield:
  if (WiFi.status() == WL_NO_SHIELD) {
    Serial.println( "WiFi shield not present" );
    // don't continue:
    while (true);
  }

  String fv = WiFi.firmwareVersion();
  if (fv != "1.1.0" ) {
    Serial.println( "Please upgrade the firmware" );
  }

  // attempt to connect to Wifi network:
  while (status != WL_CONNECTED) {
    Serial.print( "Attempting to connect to open SSID: ");
    Serial.println(ssid);
    status = WiFi.begin(ssid);

    // wait 10 seconds for connection:
    delay(10000);
  }
```

```
// you' re connected now, so print out the data:

Serial.print( "You' re connected to the network" );

printCurrentNet();

printWifiData();

}

void loop() {

// check the network connection once every 10 seconds:

delay(10000);

printCurrentNet();

}

void printWifiData() {

// print your WiFi shield' s IP address:

IPAddress ip = WiFi.localIP();

Serial.print( "IP Address: ");

Serial.println(ip);

Serial.println(ip);

// print your MAC address:

byte mac[6];

WiFi.macAddress(mac);

Serial.print( "MAC address: ");

Serial.print(mac[0], HEX);

Serial.print( ":" );

Serial.print(mac[1], HEX);

Serial.print( ":" );

Serial.print(mac[2], HEX);

Serial.print( ":" );

Serial.print(mac[3], HEX);

Serial.print( ":" );

Serial.print(mac[4], HEX);

Serial.print( ":" );
```

```
Serial.println(mac[5], HEX);

// print your subnet mask:
IPAddress subnet = WiFi.subnetMask();

Serial.print( "NetMask: ");

Serial.println(subnet);

// print your gateway address:
IPAddress gateway = WiFi.gatewayIP();

Serial.print( "Gateway: ");

Serial.println(gateway);

}

void printCurrentNet() {

// print the SSID of the network you' re attached to:
Serial.print( "SSID: ");

Serial.println(WiFi.SSID());

// print the MAC address of the router you' re attached to:
byte bssid[6];

WiFi.BSSID(bssid);

Serial.print( "BSSID: ");

Serial.print(bssid[5], HEX);

Serial.print( ":" );

Serial.print(bssid[4], HEX);

Serial.print( ":" );

Serial.print(bssid[3], HEX);

Serial.print( ":" );

Serial.print(bssid[2], HEX);

Serial.print( ":" );

Serial.print(bssid[1], HEX);

Serial.print( ":" );

Serial.println(bssid[0], HEX);

// print the received signal strength:
```

```
long rssi = WiFi.RSSI();  
Serial.print( "signal strength (RSSI):" );  
Serial.println(rssi);  
  
// print the encryption type:  
byte encryption = WiFi.encryptionType();  
Serial.print( "Encryption Type:" );  
Serial.println(encryption, HEX);  
}
```

Notes and Warnings

NA

WiFiClass::gatewayIP

Description

Get the gateway IP address

Syntax

```
IPAddress WiFiClass::gatewayIP()
```

Parameters

The function requires no input parameter.

Returns

The function returns the value of the gateway IP address.

Example Code

Example: ConnectNoEncryption

This example demonstrates how to connect to an unencrypted WiFi network and prints the MAC address of the WiFi shield, the IP address obtained, and other network details. Details of the code can be found in the section of `WiFiClass::subnetMask`.

Notes and Warnings

NA

WiFiClass::SSID**Description**

Return the current SSID associated with the network

Syntax

```
char* WiFiClass::SSID()
```

Parameters

The function requires no input parameter.

Returns

The function returns current SSID associate with the network.

Example Code

Example: ConnectWithWPA

This example demos how to connect to an unencrypted WiFi network, and prints the MAC address of the Wifi shield, the IP address obtained, and other network details. The details of the code can be found in the previous section of `WiFiClass::firmwareVersion`.

Notes and Warnings

NA

WiFiClass::BSSID**Description**

Return the current BSSID associated with the network

Syntax

uint8_t* WiFiClass::BSSID(uint8_t* bssid)

Parameters

bssid: an array to store bssid

Returns

pointer to uint8_t array with length WL_MAC_ADDR_LENGTH

Example Code

Example: ConnectWithWPA

This example demos how to connect to an unencrypted WiFi network, and prints the MAC address of the Wifi shield, the IP address obtained, and other network details. The details of the code can be found in the previous section of WiFiClass:: firmwareVersion.

Notes and Warnings

NA

WiFiClass::RSSI

Description

Return the current RSSI (Received Signal Strength in dBm) associated with the network

Syntax

int32_t WiFiClass::RSSI()

Parameters

The function requires no input parameter.

Returns

The function returns a signed-value signal strength

Example Code

Example: ConnectWithWPA

This example demos how to connect to an unencrypted WiFi network, and prints the MAC address of the Wifi shield, the IP address obtained, and other network details. The details of the code can be found in the previous section of `WiFiClass::firmwareVersion`.

Notes and Warnings

NA

WiFiClass::encryptionType

Description

Return the Encryption Type associated with the network

Syntax

```
uint8_t WiFiClass::encryptionType()
```

Parameters

The function requires no input parameter.

Returns

The function returns one unsigned integer value of `wl_enc_type` enum.

Example Code

Example: ConnectWithWPA

Notes and Warnings

NA

WiFiClass::scanNetworks

Description

Start scan WiFi networks available

Syntax

```
int8_t WiFiClass::scanNetworks()
```

Parameters

The function requires no input parameter.

Returns

The function returns the number of discovered networks as an integer.

Example Code

Example: ScanNetworks

This example prints the Wifi shield's MAC address, and scans for available Wifi networks using the Wifi shield. Every ten seconds, it scans again. It doesn't connect to any network, so no encryption scheme is specified.

```
#include <WiFi.h>
```

```
void setup() {
```

```
//Initialize serial and wait for port to open:
```

```
Serial.begin(9600);
```

```
while (!Serial) {
```

```
; // wait for serial port to connect. Needed for native USB port only
```

```
}
```

```
// check for the presence of the shield:
```

```
if (WiFi.status() == WL_NO_SHIELD) {
```

```
Serial.println( "WiFi shield not present" );
```

```
// don't continue:
```

```
while (true);
```

```
}
```

```
String fv = WiFi.firmwareVersion();
```

```
if (fv != "1.1.0" ) {
```

```
Serial.println( "Please upgrade the firmware" );
```

```
}
```



```
// Print WiFi MAC address:

printMacAddress();

}

void loop() {
// scan for existing networks:

Serial.println( "Scanning available networks..." );

listNetworks();

delay(10000);

}

void printMacAddress() {
// the MAC address of your Wifi shield

byte mac[6];

// print your MAC address:

WiFi.macAddress(mac);

Serial.print( "MAC: ");

Serial.print(mac[0], HEX);

Serial.print( ":" );

Serial.print(mac[1], HEX);

Serial.print( ":" );

Serial.print(mac[2], HEX);

Serial.print( ":" );

Serial.print(mac[3], HEX);

Serial.print( ":" );

Serial.print(mac[4], HEX);

Serial.print( ":" );

Serial.println(mac[5], HEX);

}

void listNetworks() {

// scan for nearby networks:

Serial.println(" * Scan Networks *" );
```

```
int numSsid = WiFi.scanNetworks();

if (numSsid == -1) {
  Serial.println( "Couldn' t get a wifi connection" );

  while (true);
}

// print the list of networks seen:

Serial.print( "number of available networks:" );

Serial.println(numSsid);

// print the network number and name for each network found:

for (int thisNet = 0; thisNet < numSsid; thisNet++) {
  Serial.print(thisNet);

  Serial.print(" ) ");

  Serial.print(WiFi.SSID(thisNet));

  Serial.print(" tSignal: ");

  Serial.print(WiFi.RSSI(thisNet));

  Serial.print(" dBm" );

  Serial.print(" tEncryptionRaw: ");

  printEncryptionTypeEx(WiFi.encryptionTypeEx(thisNet));

  Serial.print(" tEncryption: ");

  printEncryptionType(WiFi.encryptionType(thisNet));
}

}

void printEncryptionTypeEx(uint32_t thisType) {
  /* Arduino wifi api use encryption type to mapping to security type.
   * This function demonstrate how to get more richful information of security type.
   */

  switch (thisType) {
  case SECURITY_OPEN:

    Serial.print( "Open" );

    break;
```

```
case SECURITY_WEP_PSK:
Serial.print( "WEP" );
break;

case SECURITY_WPA_TKIP_PSK:
Serial.print( "WPA TKIP" );
break;

case SECURITY_WPA_AES_PSK:
Serial.print( "WPA AES" );
break;

case SECURITY_WPA2_AES_PSK:
Serial.print( "WPA2 AES" );
break;

case SECURITY_WPA2_TKIP_PSK:
Serial.print( "WPA2 TKIP" );
break;

case SECURITY_WPA2_MIXED_PSK:
Serial.print( "WPA2 Mixed" );
break;

case SECURITY_WPA_WPA2_MIXED:
Serial.print( "WPA/WPA2 AES" );
break;
}
}

void printEncryptionType(int thisType) {
// read the encryption type and print out the name:
switch (thisType) {

case ENC_TYPE_WEP:
Serial.println( "WEP" );
break;

case ENC_TYPE_TKIP:
```

```
Serial.println( "WPA" );  
  
break;  
  
case ENC_TYPE_CCMP:  
Serial.println( "WPA2" );  
  
break;  
  
case ENC_TYPE_NONE:  
Serial.println( "None" );  
  
break;  
  
case ENC_TYPE_AUTO:  
Serial.println( "Auto" );  
  
break;  
  
}  
  
}
```

Notes and Warnings

NA

WiFiClass::SSID

Description

Return the SSID discovered during the network scan

Syntax

```
char* WiFiClass::SSID(uint8_t networkItem)
```

Parameters

networkItem: specify from which network item want to get the information

Returns

The function returns ssid string of the specified item on the networks scanned a list.

Example Code

Example: ScanNetworks

This example prints the Wifi shield's MAC address, and scans for available Wifi networks using the Wifi shield. Every ten seconds, it scans again. It doesn't connect to any network, so no encryption scheme is specified. The details of the code can be found in the previous section of `WiFiClass::scanNetworks`.

Notes and Warnings

NA

WiFiClass::encryptionType**Description**

Return the encryption type of the networks discovered during the `scanNetworks`

Syntax

```
uint8_t WiFiClass::encryptionType(uint8_t networkItem)
```

Parameters

networkItem: specify from which network item want to get the information

Returns

encryption type (enum `wl_enc_type`) of the specified item on the networks scanned a list

Example Code

Example: ScanNetworks

This example prints the Wifi shield's MAC address, and scans for available Wifi networks using the Wifi shield. Every ten seconds, it scans again. It doesn't connect to any network, so no encryption scheme is specified. The details of the code can be found in the previous section of `WiFiClass::scanNetworks`.

Notes and Warnings

NA

WiFiClass::encryptionTypeEx

Description

Return the security type and encryption type of the networks discovered during the scanNetworks

Syntax

```
uint32_t WiFiClass::encryptionTypeEx(uint8_t networkItem)
```

Parameters

networkItem: specify from which network item want to get the information

Returns

security and encryption type of the specified item on the networks scanned a list

Example Code

Example: ScanNetworks

This example prints the Wifi shield's MAC address, and scans for available Wifi networks using the Wifi shield. Every ten seconds, it scans again. It doesn't connect to any network, so no encryption scheme is specified. The details of the code can be found in the previous section of WiFiClass:: scanNetworks.

Notes and Warnings

NA

WiFiClass::RSSI

Description

Return the RSSI of the networks discovered during the scanNetworks

Syntax

```
int32_t WiFiClass::RSSI(uint8_t networkItem)
```

Parameters

networkItem: specify from which network item want to get the information

Returns

signed value of RSSI of the specified item on the networks scanned a list

Example Code

Example: ScanNetworks

This example prints the Wifi shield's MAC address, and scans for available Wifi networks using the Wifi shield. Every ten seconds, it scans again. It doesn't connect to any network, so no encryption scheme is specified. The details of the code can be found in the previous section of `WiFiClass::scanNetworks`.

Notes and Warnings

NA

WiFiClass::status**Description**

Return Connection status

Syntax

```
uint8_t WiFiClass::status()
```

Parameters

The function requires no input parameter.

Returns

The function returns one of the values defined in `wl_status_t` as an unsigned integer.

Example Code

Example: ConnectWithWPA

This example demos how to connect to an unencrypted WiFi network, and prints the MAC address of the Wifi shield, the IP address obtained, and other network details. The details of the code can be found in the previous section of `WiFiClass::firmwareVersion`.

Notes and Warnings

NA

WiFiClass::hostByName

Description

Resolve the given hostname to an IP address

Syntax

```
int WiFiClass::hostByName(const char* aHostname, IPAddress& aResult)
```

Parameters

aHostname: Name to be resolved

aResult: IPAddress structure to store the returned IP address

Returns

The function returns “1” if aIPAddrString was successfully converted to an IP address,else otherwise, it will return as an error code.

Example Code

NA

Notes and Warnings

NA

WiFiClass::apbegin

Description

Start AP mode

Syntax

```
int WiFiClass::apbegin(char* ssid, char* channel)
```

```
int WiFiClass::apbegin(char* ssid, char* password, char* channel)
```


Parameters

ssid: SSID of the AP network

channel: AP' s channel, default 1

password: AP' s password

Returns

The function will return the WiFi status.

Example Code

Example: WiFiAPMode

#include

```

char ssid[] = "yourNetwork" ;//Set the AP' s SSID

char pass[] = "Password" ;//Set the AP' s password

char channel[] = "1" ;//Set the AP' s channel

int status = WL_IDLE_STATUS; // the Wifi radio' s status

void setup() {

//Initialize serial and wait for port to open:

Serial.begin(9600);

while (!Serial) {

; // wait for serial port to connect. Needed for native USB port only

}

// check for the presence of the shield:

if (WiFi.status() == WL_NO_SHIELD) {

Serial.println( "WiFi shield not present" );

while (true);

}

String fv = WiFi.firmwareVersion();

if (fv != "1.1.0" ) {

Serial.println( "Please upgrade the firmware" );

}

```

```
// attempt to start AP:

while (status != WL_CONNECTED) {

Serial.print( "Attempting to start AP with SSID: ");

Serial.println(ssid);

status = WiFi.apbegin(ssid, pass, channel);

delay(10000);

}

//AP MODE already started:

Serial.println( "AP mode already started" );

Serial.println();

printWifiData();

printCurrentNet();

}

void loop() {

// check the network connection once every 10 seconds:

delay(10000);

printCurrentNet();

}

void printWifiData() {

// print your WiFi shield's IP address:

IPAddress ip = WiFi.localIP();

Serial.print( "IP Address: ");

Serial.println(ip);

// print your subnet mask:

IPAddress subnet = WiFi.subnetMask();

Serial.print( "NetMask: ");

Serial.println(subnet);

// print your gateway address:

IPAddress gateway = WiFi.gatewayIP();

Serial.print( "Gateway: ");
```

```
Serial.println(gateway);

Serial.println();

}

void printCurrentNet() {
// print the SSID of the AP:
Serial.print( "SSID: ");
Serial.println(WiFi.SSID());
// print the MAC address of AP:
byte bssid[6];
WiFi.BSSID(bssid);
Serial.print( "BSSID: ");
Serial.print(bssid[0], HEX);
Serial.print( ":" );
Serial.print(bssid[1], HEX);
Serial.print( ":" );
Serial.print(bssid[2], HEX);
Serial.print( ":" );
Serial.print(bssid[3], HEX);
Serial.print( ":" );
Serial.print(bssid[4], HEX);
Serial.print( ":" );
Serial.println(bssid[5], HEX);
// print the encryption type:
byte encryption = WiFi.encryptionType();
Serial.print( "Encryption Type:" );
Serial.println(encryption, HEX);
Serial.println();
}
```

Notes and Warnings

NA

WiFiClass::disablePowerSave

Description

Disable power-saving mode

Syntax

```
int WiFiClass::disablePowerSave()
```

Parameters

The function requires no input parameter.

Returns

1 if disable success, 0 if failed

Example Code

NA

Notes and Warnings

NA

Class WiFiClient

WiFiClient Class

Description

Defines a class of WiFi Client implementation for Ameba.

Syntax

```
class WiFiClient
```

Members

Public Constructors	
WiFiClient::WiFiClient	Constructs a WiFiClient instance that connects to the specified IP address and port.
Public Methods	
WiFiClient::connect	Connect to the IP address and port
WiFiClient::write	Write a single byte into the packet
WiFiClient::available	Number of bytes remaining in the current packet
WiFiClient::read	Read a single byte from the current packet
WiFiClient:: peek	Return the next byte from the current packet without moving on to the next byte
WiFiClient:: flush	Finish reading the current packet
WiFiClient::stop	Stop client connection
WiFiClient::connected	Check if client is connected, return 1 if connected, 0 if not
WiFiClient::setRecvTimeout	Set receiving timeout

WiFiClient::WiFiClient

Description

Constructs a WiFiClient instance that connects to the specified IP address and port.

Syntax

```
WiFiClient::WiFiClient()
```

```
WiFiClient::WiFiClient(uint8_t sock)
```

Parameters

sock: socket state, default -1.

Returns

The function returns nothing.

Example Code

Example: WiFiWebClient

```
#include <WiFi.h>
```

```
char ssid[] = "yourNetwork" ; // your network SSID (name)
```

```
char pass[] = "password" ; // your network password (use for WPA, or use as key for WEP)

int keyIndex = 0; // your network key Index number (needed only for WEP)

int status = WL_IDLE_STATUS;

//IPAddress server(64,233,189,94); // numeric IP for Google (no DNS)

char server[] = "www.google.com" ; // name address for Google (using DNS)

WiFiClient client;

void setup() {

//Initialize serial and wait for port to open:

Serial.begin(9600);

while (!Serial) {

;

}

// check for the presence of the shield:

if (WiFi.status() == WL_NO_SHIELD) {

Serial.println( "WiFi shield not present" );

// don' t continue:

while (true);

}

String fv = WiFi.firmwareVersion();

if (fv != "1.1.0" ) {

Serial.println( "Please upgrade the firmware" );

}

// attempt to connect to Wifi network:

while (status != WL_CONNECTED) {

Serial.print( "Attempting to connect to SSID: ");

Serial.println(ssid);

// Connect to WPA/WPA2 network. Change this line if using open or WEP network:

status = WiFi.begin(ssid, pass);

// wait 10 seconds for connection:

delay(10000);
```

```
}  
  
Serial.println( "Connected to wifi" );  
printWifiStatus();  
  
Serial.println(" nStarting connection to server..." );  
  
// if you get a connection, report back via serial:  
  
if (client.connect(server, 80)) {  
  
    Serial.println( "connected to server" );  
  
    // Make a HTTP request:  
  
    client.println( "GET /search?q=ameba HTTP/1.1" );  
    client.println( "Host: www.google.com" );  
    client.println( "Connection: close" );  
  
    client.println();  
  
}  
  
void loop() {  
  
    // if there are incoming bytes available  
  
    // from the server, read them and print them:  
  
    while (client.available()) {  
  
        char c = client.read();  
  
        Serial.write(c);  
  
    }  
  
    // if the server' s disconnected, stop the client:  
  
    if (!client.connected()) {  
  
        Serial.println();  
  
        Serial.println( "disconnecting from server." );  
  
        client.stop();  
  
        // do nothing forevermore:  
  
        while (true);  
  
    }  
  
}
```

```
void printWifiStatus() {  
  // print the SSID of the network you're attached to:  
  Serial.print( "SSID: ");  
  Serial.println(WiFi.SSID());  
  // print your WiFi shield's IP address:  
  IPAddress ip = WiFi.localIP();  
  Serial.print( "IP Address: ");  
  Serial.println(ip);  
  // print the received signal strength:  
  long rssi = WiFi.RSSI();  
  Serial.print( "signal strength (RSSI):" );  
  Serial.print(rssi);  
  Serial.println(" dBm" );  
}
```

Notes and Warnings

NA

WiFiClient::connect

Description

Connect to the IP address and port

Syntax

```
int WiFiClient::connect(IPAddress ip, uint16_t port)  
int WiFiClient::connect(const char *host, uint16_t port)
```

Parameters

ip: IP address

host: Host name

port: the port to listen on

Returns

Returns “1” : if successful

Returns “0” : if failed

Example Code

Example: WiFiWebClient

The details of the example are explained in the previous section of WiFiClient:: WiFiClient.

Notes and Warnings

NA

WiFiClient::write**Description**

Write a single byte into the packet

Syntax

size_t WiFiClient::write(uint8_t byte)

size_t WiFiClient::write(const uint8_t *buf, size_t size)

Parameters

byte: the outgoing byte

buf: the outgoing message

size: the size of the buffer

Returns

The function returns single byte into the packet or returns bytes size from buffer into the packet.

Example Code

NA

Notes and Warnings

NA

WiFiClient::available

Description

Number of bytes remaining in the current packet

Syntax

```
int WiFiClient::available(void)
```

Parameters

The function requires no input parameter.

Returns

- Function returns the number of bytes available in the current packet

Function returns 0: if no data available

Example Code

Example: WiFiWebClient

The details of the example are explained in the previous section of WiFiClient:: WiFiClient.

Notes and Warnings

NA

WiFiClient::read

Description

Read a single byte from the current packet

Syntax

```
int WiFiClient::read()  
int WiFiClient::read(unsigned char* buf, size_t size)  
int WiFiClient::read(char *buf, size_t size)
```

Parameters

buf: buffer to hold incoming packets (char*)
size: maximum size of the buffer (int)

Returns

size: the size of the buffer
-1: if no buffer is available

Example Code

Example: WiFiWebClient

The details of the example are explained in the previous section of WiFiClient:: WiFiClient.

Notes and Warnings

NA

WiFiClient::peek**Description**

Return the next byte from the current packet without moving on to the next byte

Syntax

```
int WiFiClient::peek(void)
```

Parameters

The function requires no input parameter.

Returns

b: the next byte or character

-1: if none is available

Example Code

NA

Notes and Warnings

NA

WiFiClient::flush

Description

Finish reading the current packet

Syntax

```
void WiFiClient::flush(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

WiFiClient::stop

Description

Disconnect from the server. Stop client connection

Syntax

```
void WiFiClient::stop(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: WiFiWebClient

The details of the example are explained in the previous section of WiFiClient:: WiFiClient.

Notes and Warnings

NA

WiFiClient::connected**Description**

Check if client is connected, return 1 if connected, 0 if not.

Syntax

```
uint8_t WiFiClient::connected(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns “1” if connected, returns “0” if not connected.

Example Code

Example: WiFiWebClient

The details of the example are explained in the previous section of WiFiClient:: WiFiClient.

Notes and Warnings

NA

WiFiClient::setRecvTimeout

Description

Set receiving timeout

Syntax

int WiFiClient::setRecvTimeout(int timeout)

Parameters

timeout: timeout in seconds

Returns

0

Example Code

NA

Notes and Warnings

NA

Class WiFiServer

WiFiServer Class

Description

Defines a class of WiFi server implementation for Ameba.

Syntax

```
class WiFiServer
```

Members

Public Constructors	
WiFiServer::WiFiServer(uint16_t port)	Constructs a WiFiServer object and creates a server that listens for incoming connections on the specified port
Public Methods	
WiFiServer::available()	Gets a client that is connected to the server and has data available for reading. The connection persists when the returned client object goes out of scope; you can close it by calling the client.stop()
WiFiServer::begin()	Tells the server to begin listening for incoming connections
WiFiServer::write(const uint8_t* data, size_t len)	Write data to all the clients connected to a server

WiFiServer::WiFiServer

Description

Constructs a WiFiServer object and creates a server that listens for incoming connections on the specified port.

Syntax

```
WiFiServer::WiFiServer(uint16_t port)
```

Parameters

port: The port number being connected to.

Returns

The function returns nothing.

Example Code

Example: SimpleServerWiFi

```
#include <WiFi.h>

char ssid[] = "yourNetwork" ; // your network SSID (name)

char pass[] = "secretPassword" ; // your network password

int keyIndex = 0; // your network key Index number (needed only for WEP)

int status = WL_IDLE_STATUS;

WiFiServer server(5000);

void setup() {

  Serial.begin(9600); // initialize serial communication

  pinMode(9, OUTPUT); // set the LED pin mode

  // check for the presence of the shield:

  if (WiFi.status() == WL_NO_SHIELD) {

    Serial.println( "WiFi shield not present" );

    while (true); // don't continue

  }

  String fv = WiFi.firmwareVersion();

  if ( fv != "1.1.0" )

    Serial.println( "Please upgrade the firmware" );

  // attempt to connect to Wifi network:

  while ( status != WL_CONNECTED) {

    Serial.print( "Attempting to connect to Network named: ");

    Serial.println(ssid); // print the network name (SSID);

    // Connect to WPA/WPA2 network. Change this line if using open or WEP network:

    status = WiFi.begin(ssid, pass);

    // wait 10 seconds for connection:
```



```
delay(10000);
}

server.begin(); // start the tcp server on port 5000

printWifiStatus(); // you're connected now, so print out the status
}

char buffer[256];

void loop() {
  WiFiClient client = server.available();

  while (client.connected()) {
    memset(buffer, 0, 256);

    int n = client.read((uint8_t*)&buffer[0], sizeof(buffer));

    if (n > 0) {
      for (int i=0; i<n; i++) {
        Serial.print(buffer[i]);
      }

      n = client.write(buffer, n);

      if (n <= 0) break;
    }
  }

  client.stop();
}

void printWifiStatus() {
  // print the SSID of the network you're attached to:
  Serial.print( "SSID: ");
  Serial.println(WiFi.SSID());

  // print your WiFi shield's IP address:
  IPAddress ip = WiFi.localIP();
  Serial.print( "IP Address: ");
  Serial.println(ip);

  // print the received signal strength:
```

```
long rssi = WiFi.RSSI();  
Serial.print( "signal strength (RSSI):" );  
Serial.print(rssi);  
Serial.println(" dBm" );  
}
```

Notes and Warnings

NA

WiFiServer::available

Description

Gets a client that is connected to the server and has data available for reading. The connection persists when the returned client object goes out of scope; you can close it by calling the client.stop().

Syntax

WiFiClient WiFiServer::available(uint8_t* status)

Parameters

status: WiFi availability status

Returns

A Client object; if no Client has data available for reading, this object will evaluate to false in an if-statement

Example Code

Example: SimpleServerWiFi

Details of the code can be found in the previous section of WiFiServer:: WiFiServer.

Notes and Warnings

NA

WiFiServer::begin

Description

Tells the server to begin listening for incoming connections

Syntax

```
void WiFiServer::begin(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: SimpleServerWiFi

Details of the code can be found in the previous section of WiFiServer:: WiFiServer.

Notes and Warnings

NA

WiFiServer::write

Description

Write data to all the clients connected to a server

Syntax

```
size_t WiFiServer::write(uint8_t b)  
size_t WiFiServer::write(const uint8_t *buf, size_t size)
```

Parameters

b: byte to be written

buf: data buffer

size: Size of the data in the buffer

Returns

The function returns the number of bytes written. It is not necessary to read this.

Example Code

Example: SimpleServerWiFi

Details of the code can be found in the previous section of WiFiServer:: WiFiServer.

Notes and Warnings

NA

Class WiFiSSLClient

WiFiSSLClient Class

Description

Defines a class of WiFi Secure Socket Layer Client implementation for Ameba.

Syntax

```
class WiFiSSLClient
```

Members

Public Constructors	
WiFiSSLClient::WiFiSSLClient	Constructs a WiFiSSLClient instance that always connects in SSL to the specified IP address and port
Public Methods	
WiFiSSLClient::connect	Connect to the IP address and port
WiFiSSLClient::write	Write a single byte into the packet
WiFiSSLClient::available	Number of bytes remaining in the current packet
WiFiSSLClient::read	Read a single byte from the current packet
WiFiSSLClient:: peek	Return the next byte from the current packet without moving on to the next byte
WiFiSSLClient:: flush	Finish reading the current packet
WiFiSSLClient::stop	Stop SSL client connection
WiFiSSLClient::connected	Check if SSL client is connected, return 1 if connected, 0 if not
WiFiSSLClient:: setRootCA	Set Root CA for authentication
WiFiSSLClient:: set-ClientCertificate	Set certificate of the client
WiFiSSLClient::setRecvTimeout	Set receiving timeout
WiFiSSLClient::setPreSharedKey	Set the pre shared key (PSK) to use for authentication

WiFiSSLClient::WiFiSSLClient**Description**

Constructs a WiFiSSLClient instance that always connects in SSL to the specified IP address and port.

Syntax

```
WiFiSSLClient::WiFiSSLClient(void)
```

```
WiFiSSLClient::WiFiSSLClient(uint8_t sock)
```

Parameters

sock: socket state, default -1

Returns

The function returns nothing.

Example Code

Example: WiFiSSLClient

#include

```
char ssid[] = "yourNetwork" ;// your network SSID (name)

char pass[] = "secretPassword" ;// your network password (use for WPA, or WEP)

int keyIndex = 0; // your network key Index number (needed only for WEP)

int status = WL_IDLE_STATUS;

char server[] = "www.google.com" ;// name address for Google (using DNS)

//unsigned char test_client_key[] = "" ;//For the usage of verifying client
//unsigned char test_client_cert[] = "" ;//For the usage of verifying client
//unsigned char test_ca_cert[] = "" ;//For the usage of verifying server

WiFiSSLClient client;

void setup() {

//Initialize serial and wait for port to open:
Serial.begin(9600);

while (!Serial) {

; // wait for serial port to connect. Needed for native USB port only

}

// check for the presence of the shield:
if (WiFi.status() == WL_NO_SHIELD) {

Serial.println( "WiFi shield not present" );

// don' t continue:

while (true);

}

// attempt to connect to Wifi network:

while (status != WL_CONNECTED) {

Serial.print( "Attempting to connect to SSID: ");

Serial.println(ssid);

// Connect to WPA/WPA2 network. Change this line if using open or WEP network:

status = WiFi.begin(ssid,pass);

// wait 10 seconds for connection:

delay(10000);
```

```

}

Serial.println( "Connected to wifi" );

printWifiStatus();

Serial.println(" nStarting connection to server..." );

// if you get a connection, report back via serial:

if (client.connect(server, 443)) { //client.connect(server, 443, test_ca_cert, test_client_cert, test_client_key)

Serial.println( "connected to server" );

// Make a HTTP request:

client.println( "GET /search?q=realtek HTTP/1.0" );

client.println( "Host: www.google.com" );

client.println( "Connection: close" );

client.println();

}

else

Serial.println( "connected to server failed" );

}

void loop() {

// if there are incoming bytes available

// from the server, read them and print them:

while (client.available()) {

char c = client.read();

Serial.write(c);

}

// if the server' s disconnected, stop the client:

if (!client.connected()) {

Serial.println();

Serial.println( "disconnecting from server." );

client.stop();

// do nothing forevermore:

while (true);

```

```
}  
}  
  
void printWifiStatus() {  
  // print the SSID of the network you're attached to:  
  Serial.print( "SSID: ");  
  Serial.println(WiFi.SSID());  
  
  // print your WiFi shield's IP address:  
  IPAddress ip = WiFi.localIP();  
  Serial.print( "IP Address: ");  
  Serial.println(ip);  
  
  // print your MAC address:  
  byte mac[6];  
  WiFi.macAddress(mac);  
  Serial.print( "MAC address: ");  
  Serial.print(mac[0], HEX);  
  Serial.print( ":" );  
  Serial.print(mac[1], HEX);  
  Serial.print( ":" );  
  Serial.print(mac[2], HEX);  
  Serial.print( ":" );  
  Serial.print(mac[3], HEX);  
  Serial.print( ":" );  
  Serial.print(mac[4], HEX);  
  Serial.print( ":" );  
  Serial.println(mac[5], HEX);  
  
  // print the received signal strength:  
  long rssi = WiFi.RSSI();  
  Serial.print( "signal strength (RSSI):" );  
  Serial.print(rssi);  
  Serial.println(" dBm" );  
}
```



```
}
```

Notes and Warnings

NA

WiFiSSLClient::connect

Description

Connect to the IP address and port.

Syntax

```
int WiFiSSLClient::connect(IPAddress ip, uint16_t port)
```

```
int WiFiSSLClient::connect(const char *host, uint16_t port)
```

```
int WiFiSSLClient::connect(const char* host, uint16_t port, unsigned char* rootCABuff, unsigned char* cli_cert, unsigned char* cli_key)
```

```
int WiFiSSLClient::connect(IPAddress ip, uint16_t port, unsigned char* rootCABuff, unsigned char* cli_cert, unsigned char* cli_key)
```

Parameters

ip: IP address

host: Host name

port: the port to listen on

rootCABuff: buffer that store root CA

cli_cert: buffer that store client certificate

cli_key buffer that store client key pair

Returns

1: if successful

0: if failed

Example Code

Example: WiFiSSLClient

Details of the code can be found in the previous section of WiFiSSLClient:: WiFiSSLClient.

Notes and Warnings

NA

WiFiSSLClient::write

Description

Write a single byte into the packet

Syntax

```
size_t WiFiSSLClient::write(uint8_t byte)
```

```
size_t WiFiSSLClient::write(const uint8_t *buf, size_t size)
```

Parameters

byte: the outgoing byte

buf: the outgoing message

size: the size of the buffer

Returns

The function returns single -byte into the packet or turns bytes size from the buffer into the packet.

Example Code

NA

Notes and Warnings

NA

WiFiSSLClient::available

Description

Number of bytes remaining in the current packet

Syntax

```
int WiFiSSLClient::available(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns the number of bytes available in the current packet; else return “0:” if no data available.

Example Code

Example: WiFiSSLClient

Details of the code can be found in the previous section of WiFiSSLClient:: WiFiSSLClient.

Notes and Warnings

NA

WiFiSSLClient::read

Description

Read a single byte from the current packet

Syntax

```
int WiFiSSLClient::read()
```

```
int WiFiSSLClient::read(unsigned char* buf, size_t size)
```

Parameters

buf: buffer to hold incoming packets (char*)

size: maximum size of the buffer (int)

Returns

size: the size of the buffer

-1: if no buffer is available

Example Code

Example: WiFiSSLClient

Details of the code can be found in the previous section of WiFiSSLClient:: WiFiSSLClient.

Notes and Warnings

NA

WiFiSSLClient::peek

Description

Return the next byte from the current packet without moving on to the next byte.

Syntax

```
int WiFiSSLClient::peek(void)
```

Parameters

The function requires no input parameter.

Returns

b: the next byte or character

-1: if none is available

Example Code

NA

Notes and Warnings

NA

WiFiSSLClient::flush

Description

Finish reading the current packet

Syntax

`void WiFiSSLClient::flush(void)`

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

WiFiSSLClient::stop**Description**

Disconnect from the server. Stop SSL client connection

Syntax

`void WiFiSSLClient::stop(void)`

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: WiFiSSLClient

Details of the code can be found in the previous section of WiFiSSLClient:: WiFiSSLClient.

Notes and Warnings

NA

WiFiSSLClient::connected

Description

Check if SSL client is connected, return 1 if connected, 0 if not.

Syntax

```
uint8_t WiFiSSLClient::connected(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns “1” if connected, returns “0” if not connected.

Example Code

Example: WiFiSSLClient

Details of the code can be found in the previous section of WiFiSSLClient:: WiFiSSLClient.

Notes and Warnings

NA

WiFiSSLClient::setRootCA

Description

Set Root CA for authentication

Syntax

```
void WiFiSSLClient::setRootCA(unsigned char *rootCA)
```

Parameters

rootCA: a string of rootCA

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

WiFiSSLClient::setClientCertificate**Description**

Set certificate of client

Syntax

```
void WiFiSSLClient::setClientCertificate(unsigned char *client_ca, unsigned char *private_key)
```

Parameters

client_ca: Client certificate

private_key: client's private key pair

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

WiFiSSLClient::setRecvTimeout

Description

Set receiving timeout

Syntax

```
int WiFiSSLClient::setRecvTimeout(int timeout)
```

Parameters

timeout: timeout in seconds

Returns

The function returns “0” .

Example Code

NA

Notes and Warnings

NA

WiFiSSLClient::setPreSharedKey

Description

Set the pre shared key (PSK) to use for authentication

Syntax

```
void WiFiSSLClient::setPreSharedKey(unsigned char *pskIdent, unsigned char *psKey)
```

Parameters

pskIdent: identity for PSK

psKey: Pre shared key

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Do not set a root CA and client certificate if PSK should be used for authentication. If root CA, client certificate and PSK are all set, certificate based authentication will be used.

Class WiFiUdp**WiFiUDP Class****Description**

Defines a class of WiFi UDP implementation for Ameba.

Syntax

```
class WiFiUDP
```

Members

Public Constructors	
WiFiUDP::WiFiUDP	Constructs a WiFiUDP instance of the WiFi UDP class that can send and receive UDP messages
Public Methods	
WiFiUDP:: begin	initialize, start listening on the specified port. Returns 1 if successful, 0 if there are no sockets available to use
WiFiUDP:: stop	Finish with the UDP socket
WiFiUDP:: begin-Packet	Start building up a packet to send to the remote host-specific in IP and port
WiFiUDP:: endPacket	Finish off this packet and send it
WiFiUDP:: write	Write a single byte into the packet
WiFiUDP:: writeImmediately	Send packet immediately from the buffer
WiFiUDP:: parsePacket	Start processing the next available incoming packet
WiFiUDP::available	Number of bytes remaining in the current packet
WiFiUDP::read	Read a single byte from the current packet
WiFiUDP:: peek	Return the next byte from the current packet without moving on to the next byte
WiFiUDP:: flush	Finish reading the current packet
WiFiUDP:: remoteIP	Return the IP address of the host who sent the current incoming packet
WiFiUDP:: remotePort	Return the port of the host who sent the current incoming packet
WiFiUDP:: setRecv-Timeout	Set receiving timeout

WiFiUDP::WiFiUDP**Description**

Constructs a WiFiUDP instance of the WiFi UDP class that can send and receive UDP messages.

Syntax

```
WiFiUDP::WiFiUDP(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: WiFiUdpSendReceiveString

This example demonstrates WiFi UDP send and receive string. This sketch waits for a UDP packet on a local port using a WiFi shield. When a packet is received an Acknowledge packet is sent to the client on port remotePort.

```
#include <WiFi.h>

#include <WiFiUdp.h>

int status = WL_IDLE_STATUS;

char ssid[] = "yourNetwork" ; // your network SSID (name)

char pass[] = "secretPassword" ; // your network password (use for WPA, or use as key for WEP)

int keyIndex = 0; // your network key Index number (needed only for WEP)

unsigned int localPort = 2390; // local port to listen on

char packetBuffer[255]; //buffer to hold incoming packet

char ReplyBuffer[] = "acknowledged" ; // a string to send back

WiFiUDP Udp;

void setup() {

//Initialize serial and wait for port to open:

Serial.begin(9600);

while (!Serial) {

; // wait for serial port to connect. Needed for native USB port only

}

// check for the presence of the shield:

if (WiFi.status() == WL_NO_SHIELD) {

Serial.println( "WiFi shield not present" );

// don't continue:

while (true);

}

String fv = WiFi.firmwareVersion();

if (fv != "1.1.0" ) {

Serial.println( "Please upgrade the firmware" );

}

}
```

```
// attempt to connect to Wifi network:

while (status != WL_CONNECTED) {

Serial.print( "Attempting to connect to SSID: ");

Serial.println(ssid);

// Connect to WPA/WPA2 network. Change this line if using open or WEP network:

status = WiFi.begin(ssid,pass);

// wait 10 seconds for connection:

delay(10000);

}

Serial.println( "Connected to wifi" );

printWifiStatus();

Serial.println(" Starting connection to server..." );

// if you get a connection, report back via serial:

Udp.begin(localPort);

}

void loop() {

// if there's data available, read a packet

int packetSize = Udp.parsePacket();

if (packetSize) {

Serial.print( "Received packet of size ");

Serial.println(packetSize);

Serial.print( "From ");

IPAddress remoteIp = Udp.remoteIP();

Serial.print(remoteIp);

Serial.print(" , port ");

Serial.println(Udp.remotePort());

// read the packet into packetBuffer

int len = Udp.read(packetBuffer, 255);

if (len > 0) {

packetBuffer[len] = 0;
```

```

}

Serial.println( "Contents:" );

Serial.println(packetBuffer);

// send a reply, to the IP address and port that sent us the packet we received
Udp.beginPacket(Udp.remoteIP(), Udp.remotePort());

Udp.write(ReplyBuffer);

Udp.endPacket();

}

}

void printWifiStatus() {
// print the SSID of the network you' re attached to:
Serial.print( "SSID: ");
Serial.println(WiFi.SSID());

// print your WiFi shield' s IP address:
IPAddress ip = WiFi.localIP();
Serial.print( "IP Address: ");
Serial.println(ip);

// print the received signal strength:
long rssi = WiFi.RSSI();
Serial.print( "signal strength (RSSI):" );
Serial.print(rssi);
Serial.println(" dBm" );
}

```

Notes and Warnings

This constructor does not take in any parameter, thus use another method to set up the IP address and port number.

WiFiUDP::begin

Description

Initialize, start listening on the specified port. Returns 1 if successful, 0 if there are no sockets available to use.

Syntax

```
uint8_t WiFiUDP::begin(uint16_t port)
```

Parameters

port: the local port to listen on

Returns

1: if successful

0: if there are no sockets available to use

Example Code

Example: WiFiUdpSendReceiveString

This example demonstrates WiFi UDP send and receive string. This sketch waits for a UDP packet on a local port using a WiFi shield. When a packet is received an Acknowledge packet is sent to the client on port remotePort. The detail of the code can be found in WiFiUDP:: WiFiUDP.

Notes and Warnings

NA

WiFiUDP::stop

Description

Disconnect from the server. Release any resource being used during the UDP session.

Syntax

```
void WiFiUDP::stop(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

WiFiUDP::beginPacket**Description**

Start building up a packet to send to the remote host-specific in IP and port.

Syntax

```
int WiFiUDP::beginPacket(const char *host, uint16_t port)
```

```
int WiFiUDP::beginPacket(IPAddress ip, uint16_t port)
```

Parameters

host: hostname

port: port number

ip: IP address

Returns

1: if successful

0: if there was a problem with the supplied IP address or port

Example Code

Example: WiFiUdpSendReceiveString

This example demonstrates WiFi UDP send and receive string. This sketch waits for a UDP packet on a local port using a WiFi shield. When a packet is received an Acknowledge packet is sent to the client on port remotePort. The detail of the code can be found in WiFiUDP:: WiFiUDP.

Notes and Warnings

NA

WiFiUDP::endPacket

Description

Finish off this packet and send it

Syntax

```
int WiFiUDP::endPacket(void)
```

Parameters

The function requires no input parameter.

Returns

1: if the packet was sent successfully

0: if there was an error

Example Code

Example: WiFiUdpSendReceiveString

This example demonstrates WiFi UDP send and receive string. This sketch waits for a UDP packet on a local port using a WiFi shield. When a packet is received an Acknowledge packet is sent to the client on port remotePort. The detail of the code can be found in WiFiUDP:: WiFiUDP.

Notes and Warnings

NA

WiFiUDP::write

Description

Write a single byte into the packet.

Syntax

```
size_t WiFiUDP::write(uint8_t byte)
```

```
size_t WiFiUDP::write(const uint8_t *buffer, size_t size)
```

Parameters

byte: the outgoing byte

buffer: the outgoing message

size: the size of the buffer

Returns

single-byte into the packet

bytes size from the buffer into the packet

Example Code

Example: WiFiUdpSendReceiveString

This example demonstrates WiFi UDP send and receive string. This sketch waits for a UDP packet on a local port using a WiFi shield. When a packet is received an Acknowledge packet is sent to the client on port remotePort. The detail of the code can be found in WiFiUDP:: WiFiUDP.

Notes and Warnings

NA

WiFiUDP::writeImmediately**Description**

Send packet immediately from the buffer

Syntax

```
size_t WiFiUDP::writeImmediately(const uint8_t *buffer, size_t size)
```

Parameters

buffer: the outgoing message

size: the size of the buffer

Returns

single-byte into the packet

bytes size from the buffer into the packet

Example Code

NA

Notes and Warnings

NA

WiFiUDP::parsePacket

Description

Start processing the next available incoming packet

Syntax

```
int WiFiUDP::parsePacket(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns the size of the packet in bytes or returns “0:” if no packets are available.

Example Code

Example: WiFiUdpSendReceiveString

Notes and Warnings

NA

WiFiUDP::available**Description**

Number of bytes remaining in the current packet.

Syntax

```
int WiFiUDP::available(void)
```

Parameters

The function requires no input parameter.

Returns

the number of bytes available in the current packet

0: if parsePacket hasn't been called yet

Example Code

NA

Notes and Warnings

NA

WiFiUDP::read**Description**

Read a single byte from the current packet

Syntax

```
int WiFiUDP::read()
```

```
int WiFiUDP::read(unsigned char* buffer, size_t len)
```

Parameters

buffer: buffer to hold incoming packets (char*)

len: maximum size of the buffer (int)

Returns

size: the size of the buffer

-1: if no buffer is available

Example Code

Example: WiFiUdpSendReceiveString

his example demonstrates WiFi UDP send and receive string. This sketch waits for a UDP packet on a local port using a WiFi shield. When a packet is received an Acknowledge packet is sent to the client on port remotePort. The detail of the code can be found in WiFiUDP:: WiFiUDP.

Notes and Warnings

NA

WiFiUDP::peek

Description

Return the next byte from the current packet without moving on to the next byte

Syntax

```
int WiFiUDP::peek(void)
```

Parameters

The function requires no input parameter.

Returns

b: the next byte or character

-1: if none is available

Example Code

NA

Notes and Warnings

NA

WiFiUDP::flush**Description**

Finish reading the current packet

Syntax

```
void WiFiUDP::flush(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

WiFiUDP::remoteIP**Description**

Return the IP address of the host who sent the current incoming packet

Syntax

IPAddress WiFiUDP::remoteIP(void)

Parameters

The function requires no input parameter.

Returns

IP address connecting to

Example Code

Example: WiFiUdpSendReceiveString

This example demonstrates WiFi UDP send and receive string. This sketch waits for a UDP packet on a local port using a WiFi shield. When a packet is received an Acknowledge packet is sent to the client on port remotePort. The detail of the code can be found in WiFiUDP:: WiFiUDP.

Notes and Warnings

NA

WiFiUDP::remotePort

Description

Return the port of the host who sent the current incoming packet

Syntax

uint16_t WiFiUDP::remotePort(void)

Parameters

The function requires no input parameter.

Returns

The remote port connecting to

Example Code

Example: WiFiUdpSendReceiveString

This example demonstrates WiFi UDP send and receive string. This sketch waits for a UDP packet on a local port using a WiFi shield. When a packet is received an Acknowledge packet is sent to the client on port remotePort. The detail of the code can be found in WiFiUDP:: WiFiUDP.

Notes and Warnings

NA

WiFiUDP::setRecvTimeout**Description**

Set receiving timeout

Syntax

```
void WiFiUDP::setRecvTimeout(int timeout)
```

Parameters

timeout in seconds

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

Readme

The Ameba WiFi related APIs and examples are works based on Arduino WiFi shield libraries (<https://www.arduino.cc/en/Reference/WiFi>).

These include,

- `WiFi.cpp`
- `WiFi.h`
- `WiFiServer.cpp`
- `WiFiServer.h`
- `WiFiUdp.cpp`
- `WiFiUdp.h`

These libraries are under GNU Lesser General Public License, either version 2.1 of the License, or (at your option) any later version.

Wire

Class TwoWire

TwoWire Class

Description

Defines a class of I2C API

Syntax

```
class TwoWire
```

Members

Public Constructors	
TwoWire::TwoWire	Constructs a TwoWire object
Public Methods	
TwoWire::begin	Initialize I2C master/slave
TwoWire::setClock	Set I2C frequency
TwoWire::beginTransaction	Begin I2C transmission
TwoWire::endTransmission	End I2C transmission
TwoWire::requestFrom	Set I2C requestFrom
TwoWire::write	Write data to I2C
TwoWire::available	Check if I2C is available
TwoWire::read	Read data from I2C
TwoWire::peek	Read peek from I2C
TwoWire::flush	Do nothing, use, and transmission(..) to force data transfer
TwoWire::onReceive	Callback function when I2C on receive
TwoWire::onRequest	Callback function when I2C on request

TwoWire::TwoWire**Description**

Constructs a TwoWire object.

Syntax

```
TwoWire::TwoWire (uint32_t dwSDAPin, uint32_t dwSCLPin);
```

Parameters

dwSDAPin: The Arduino PIN to be set as an SDA pin.

dwSCLPin: The Arduino PIN to be set as an SCL pin.

Returns

The function returns nothing.

Example Code

Example: MasterWriter

This example demonstrates the use of the wire library writes to an I2C/TWI slave device.

```
#include <Wire.h>

void setup() {
  Wire.begin(); // join i2c bus (address optional for master)
}

byte x = 0;

void loop() {
  Wire.beginTransmission(8); // transmit to device #8
  Wire.write( "x is "); // sends five bytes
  Wire.write(x); // sends one byte
  Wire.endTransmission(); // stop transmitting
  x++;
  delay(500);
}
```

Example: MasterReader

```
#include <Wire.h>

void setup() {
  Wire.begin(); // join i2c bus (address optional for master)
  Serial.begin(9600); // start serial for output
}

void loop() {
  Wire.requestFrom(8, 6); // request 6 bytes from slave device #8
  while (Wire.available()) { // slave may send less than requested
    char c = Wire.read(); // receive a byte as character
    Serial.print(c); // print the character
  }
  delay(500);
}
```

This example demonstrates the use of the wire library reads data from an I2C/TWI slave device.

Notes and Warnings

Include “Wire.h” to use the class function.

TwoWire::begin

Description

Initialize I2C master/slave.

Syntax

```
void TwoWire::begin (void);  
void TwoWire::begin (uint8_t address = 0);  
void TwoWire::begin (int address);
```

Parameters

void: Set the I2C master mode.

address: Set the I2C master mode with slave address value.

Returns

The function returns nothing.

Example Code

Example: MasterReader; MasterWriter

The details of the code can be found in the previous section of TwoWire:: TwoWire.

Notes and Warnings

Include “Wire.h” to use the class function.

TwoWire::setClock

Description

Set I2C frequency.

Syntax

```
void TwoWire::setClock(uint32_t frequency);
```

Parameters

frequency: The frequency values.

Returns

The function returns nothing.

Example Code

Example: MasterReader; MasterWriter

The details of the code can be found in the previous section of TwoWire:: TwoWire.

Notes and Warnings

Include “Wire.h” to use the class function.

TwoWire::beginTransmission

Description

Begin I2C transmission.

Syntax

```
void TwoWire::beginTransmission (uint8_t address);
```

```
void TwoWire::beginTransmission (int address);
```

Parameters

address: The transmission address.

Returns

The function returns nothing.

Example Code

Example: MasterReader; MasterWriter

The details of the code can be found in the previous section of TwoWire:: TwoWire.

Notes and Warnings

Include “Wire.h” to use the class function.

TwoWire::endTransmission

Description

End I2C transmission. Originally, ‘endTransmission’ was an f(void) function. It has been modified to take one parameter indicating whether or not a STOP should be performed on the bus. Calling endTransmission(false) allows a sketch to perform a repeated start.

WARNING: Nothing in the library keeps track of whether the bus tenure has been properly ended with a STOP. It is very possible to leave the bus in a hung state if no call to endTransmission(true) is made. Some I2C devices will behave oddly if they do not see a STOP.

If the input parameter is void, this provides backward compatibility with the original definition, and expected behavior, of endTransmission.

Syntax

```
uint8_t TwoWire::endTransmission (uint8_t sendStop);
```

```
uint8_t TwoWire::endTransmission (void);
```

Parameters

sendStop: True to end the transmission

Returns

Return 0 if successful, else error.

Example Code

Example: MasterReader; MasterWriter

The details of the code can be found in the previous section of TwoWire:: TwoWire.

Notes and Warnings

Include “Wire.h” to use the class function.

TwoWire::requestFrom

Description

Set I2C requestFrom.

Syntax

```
uint8_t TwoWire::requestFrom (uint8_t address, uint8_t quantity, uint8_t sendStop);  
uint8_t TwoWire::requestFrom (uint8_t address, uint8_t quantity);  
uint8_t TwoWire::requestFrom(int address, int quantity);  
uint8_t TwoWire::requestFrom (int address, int quantity, int sendStop);
```

Parameters

address: I2C read address.

quantity: I2C read quantity.

sendStop: True to end the transmission.

Returns

Return 0 if successful, else error.

Example Code

Example: MasterReader; MasterWriter

The details of the code can be found in the previous section of TwoWire:: TwoWire.

Notes and Warnings

Include “Wire.h” to use the class function.

TwoWire::write

Description

Write data to I2C.

Syntax

```
size_t TwoWire::write (uint8_t data);
```

```
size_t TwoWire::write (const uint8_t *data, size_t quantity);
```

Parameters

data: The data to be transmitted.

quantity: The quantity of data.

Returns

Return 0 if successful, else error.

Example Code

Example: MasterReader; MasterWriter

The details of the code can be found in the previous section of TwoWire:: TwoWire.

Notes and Warnings

Include “Wire.h” to use the class function.

TwoWire::available

Description

Check if I2C is available.

Syntax

```
int TwoWire::available (void);
```

Parameters

The function requires no input parameter.

Returns

Return 0 if successful, else error.

Example Code

Example: MasterReader; MasterWriter

The details of the code can be found in the previous section of TwoWire:: TwoWire.

Notes and Warnings

Include “Wire.h” to use the class function.

TwoWire::read

Description

Read data from I2C

Syntax

```
int TwoWire::read (void);
```

Parameters

The function requires no input parameter.

Returns

The read data from the receive buffer.

Example Code

Example: MasterReader; MasterWriter

The details of the code can be found in the previous section of TwoWire:: TwoWire.

Notes and Warnings

Include “Wire.h” to use the class function.

TwoWire::peek**Description**

Read peek from I2C.

Syntax

```
int TwoWire::peek (void);
```

Parameters

The function requires no input parameter.

Returns

The peek data read from the receive buffer.

Example Code

Example: MasterReader; MasterWriter

The details of the code can be found in the previous section of TwoWire:: TwoWire.

Notes and Warnings

Include “Wire.h” to use the class function.

TwoWire::flush**Description**

Do nothing, use endTransmission(..) to force data transfer.

Syntax

```
void TwoWire::flush (void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: MasterReader; MasterWriter

Notes and Warnings

Include “Wire.h” in order to use the class function.

TwoWire::onReceive

Description

Callback function when I2C on receive.

Syntax

```
void TwoWire::onReceive (void(*function)(int));
```

Parameters

function: The callback function.

Returns

The function returns nothing.

Example Code

Example: MasterReader; MasterWriter

The details of the code can be found in the previous section of TwoWire:: TwoWire.

Notes and Warnings

Include “Wire.h” to use the class function.

TwoWire::onRequest

Description

Callback function when I2C on request.

Syntax

```
void TwoWire::onRequest (void(*function)(void));
```

Parameters

function: The callback function

Returns

The function returns nothing.

Example Code

Example: MasterReader; MasterWriter

The details of the code can be found in the previous section of TwoWire:: TwoWire.

Notes and Warnings

Include “Wire.h” to use the class function.

Wire_Readme

The Ameba LCD related api and example are works based on “New LiquidCrystal library” (<https://bitbucket.org/fmalpartida/new-liquidcrystal/>).

These include,

LCD.h

LCD.cpp

I2CIO.h

I2CIO.cpp

LiquidCrystal_I2C.h

LiquidCrystal_I2C.cpp

examples/LcdHelloWorld/LcdHelloWorld.ino

These files inherit the licence of “New LiquidCrystal Library” which are under a Creative Commons Attribution-ShareAlike 3.0 Unported License. CC BY-SA 3.0.

1.1.6 Resources

Links

- [AmebaD Arduino Github](#)
- [Arduino Website](#)

1.1.7 Support

FAQ

Where to buy Ameba RTL8722DM Board?

Refer to [Purchase link](#).

Which Bluetooth standards are supported by RTL8722CSM/RTL8722DM?

Both boards support BLE 5.0. Classic Bluetooth (BR/EDR) is not supported.

Which BLE roles are supported?

RTL8722CSM/RTL8722DM can operate as either a BLE Central or BLE Peripheral device.

Are all pins on RTL8722CSM/RTL8722DM usable?

No, those marked NC are not connected to any pin and thus unusable.

Is XIP (execute in place) supported on RTL8722CSM/RTL8722DM?

Yes, it is supported.

Does RTL8722CSM support 5G WiFi?

No. Only RTL8722DM supports dual band 2.4G + 5G WiFi. RTL8722CSM only supports single band 2.4G WiFi.

How to enter the download mode?

Press and hold the UART DOWNLOAD button. Then Press the RESET button and release both UART DOWNLOAD and RESET buttons.

Trouble shooting

RTL8722CSM/RTL8722DM cannot be found as a Bluetooth device.

Please make sure the antenna is connected properly. Check your code for the correct Bluetooth configurations.

My code is not behaving as I expected.

Try to debug your program using `printf()` and `Serial.print()` statements. If the issue persists, you can ask for help at [Forums](#)

Why is there no output on my serial terminal after connecting to RTL8722CSM/RTL8722DM UART?

RTL8722CSM/RTL8722DM is by default configured at 115200 baudrate, please check if your serial terminal is configured to 115200.

My program is not being downloaded into RTL8722CSM/RTL8722DM?

Please follow the procedure for the correct downloading:

1. Enter the download mode. The on-board Green LED will blink when entered download mode.
 2. When downloading the image into board the on-board Red LED will blink
 3. After a successful download, you will see log like this “All images sent successfully” .
-

Sometimes WiFi signal is weak?

The default antenna for RTL8722CSM/RTL8722DM uses the I-Pex Connector. Please change/connect the I-Pex Connector antenna.

Why is my board not powering up?

Please make sure the connector J38 beside resistor R43 is connected. The connector is used to link the power to IC.

If you have driver issue to connect board to your computer?

Please go to <https://ftdichip.com/drivers/> for USB driver.

1.2 Ameba RTL8722DM MINI

Welcome to Ameba RTL8722DM MINI Arduino online documentation.



1.2.1 Getting Started

Ameba ARDUINO: Getting Started with RTL8722DM MINI


Required Environment

AmebaD RTL8722DM MINI board currently supports Windows OS 32-bits and 64-bits (WIN7/8/10), Linux OS (Ubuntu 18 LTS/20 LTS/latest) and macOS operating systems. Please use the latest OS version to have the best experiences. In this documentation, please use the latest version Arduino IDE (at least version 1.8.12).


Introduction to AmebaD RTL8722DM MINI

Ameba is an easy-to-program platform for developing all kind of IoT applications. AmebaD is equipped with various peripheral interfaces, including WiFi, GPIO INT, I2C, UART, SPI, PWM, ADC. Through these interfaces, AmebaD can connect with electronic components such as LED, switches, manometer, hygrometer, PM2.5 dust sensors, ...etc.

The collected data can be uploaded via WiFi and be utilized by applications on smart devices to realize IoT implementation.

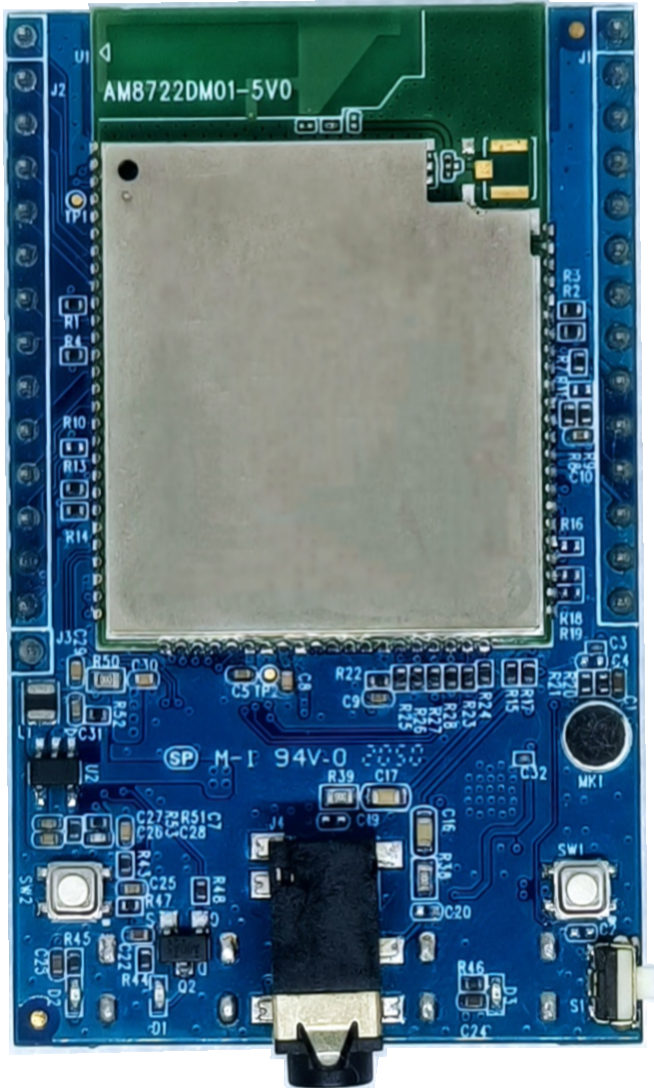



RTL8722DM MINI has smaller size than Arduino Uno, as shown in the above figure.

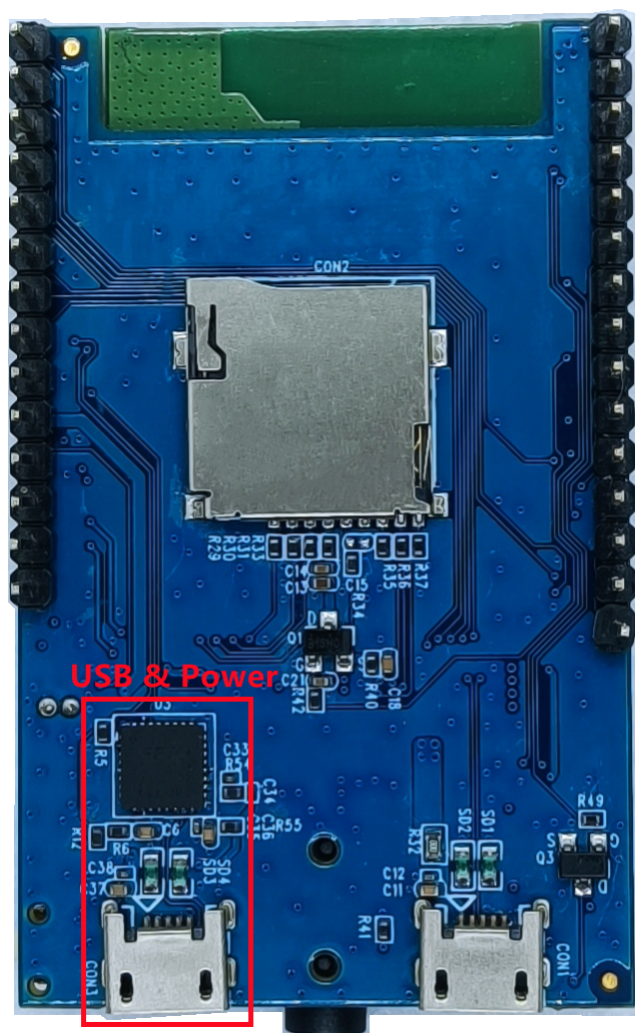

RTL8722DM MINI uses Micro USB to supply power, which is common in many smart devices.

Please refer to the following figure and table for the pin diagram and function of RTL8722DM MINI.

RTL8722DM MINI EVB

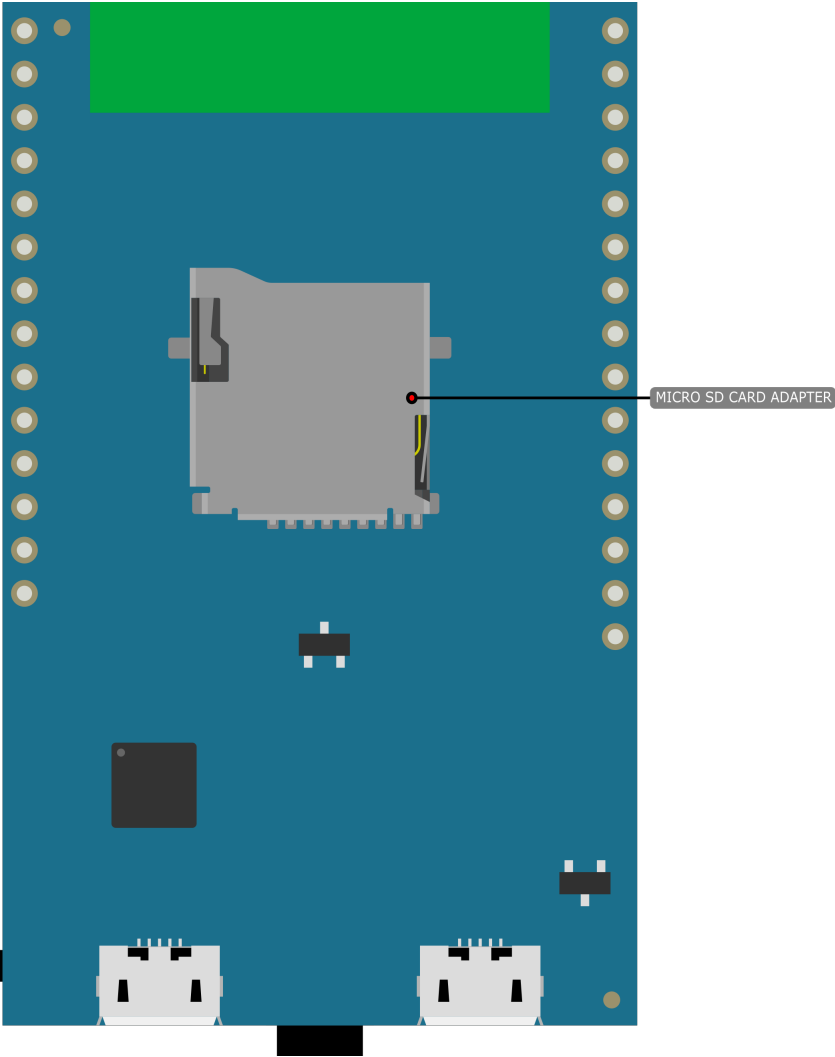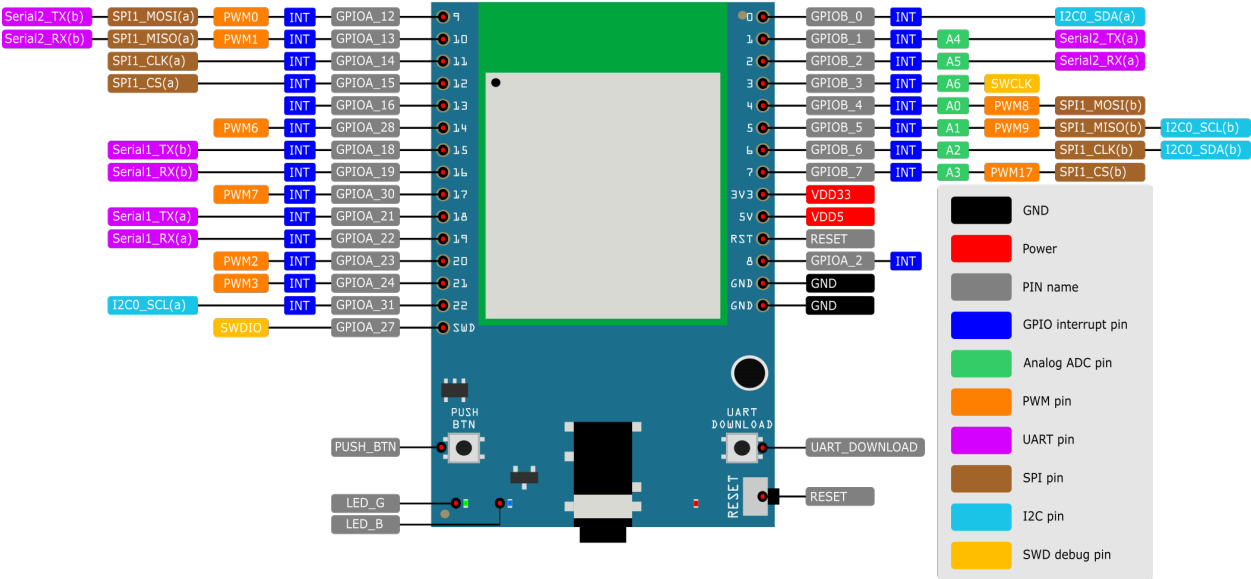


#	PIN name	GPIO INT	ADC	PWM	UART	SPI	I2C
D0	GPIOB_0	✓					I2C0 SDA
D1	GPIOB_1	✓	A4		Serial2_TX		
D2	GPIOB_2	✓	A5		Serial2_RX		
D3	GPIOB_3	✓	A6				
D4	GPIOB_4	✓	A0	✓			
D5	GPIOB_5	✓	A1	✓			I2C0 SCL
D6	GPIOB_6	✓	A2				I2C0 SDA
D7	GPIOB_7	✓	A3	✓			
D8	GPIOA_2	✓					
D9	GPIOA_12	✓		✓	Serial2_TX	SPI1_MOSI	
D10	GPIOA_13	✓		✓	Serial2_RX	SPI1_MISO	
D11	GPIOA_14	✓				SPI1_CLK	
D12	GPIOA_15	✓				SPI1_CS	
D13	GPIOA_16	✓					
D14	GPIOA_28	✓		✓			
D15	GPIOA_18	✓			Serial1_TX		
D16	GPIOA_19	✓			Serial1_RX		
D17	GPIOA_30	✓		✓			
D18	GPIOA_21	✓			Serial1_TX		
D19	GPIOA_22	✓			Serial1_RX		
D20	GPIOA_23	✓		✓			
D21	GPIOA_24	✓		✓			
D22	GPIOA_31	✓					I2C0 SCL

Setting up Development Environment

Step 1. Installing the Driver


First, connect RTL8722DM MINI to the computer via Micro USB (same as power):

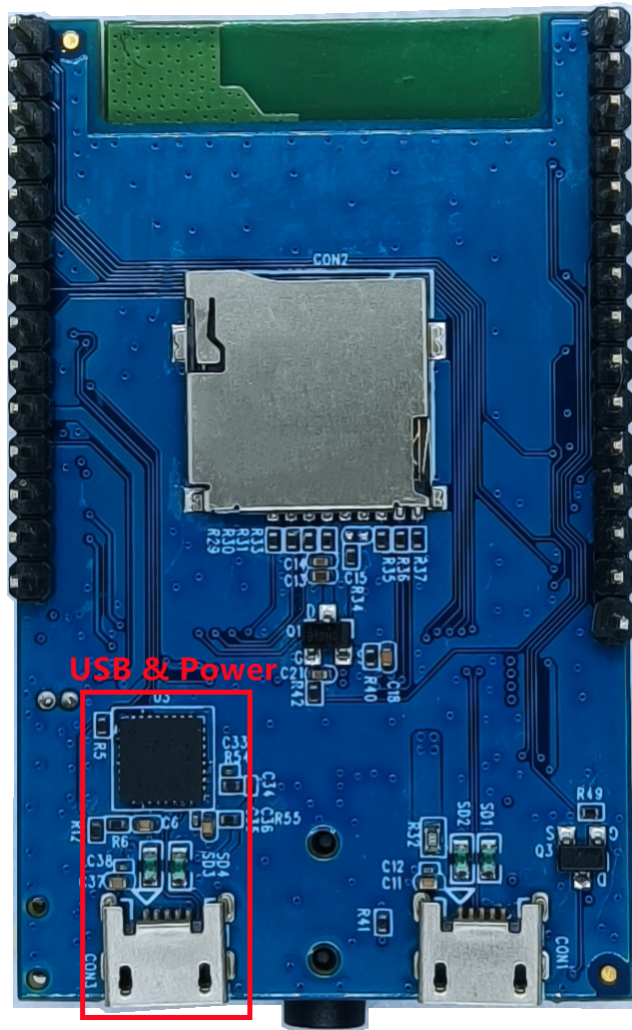

If this is the first time you connect RTL8722DM MINI to your computer, the USB driver for RTL8722DM MINI will be automatic installed.

If you have driver issue of connect board to your computer please go to [here](#) for USB driver.

You can check the COM port number in Device Manager of your computer:

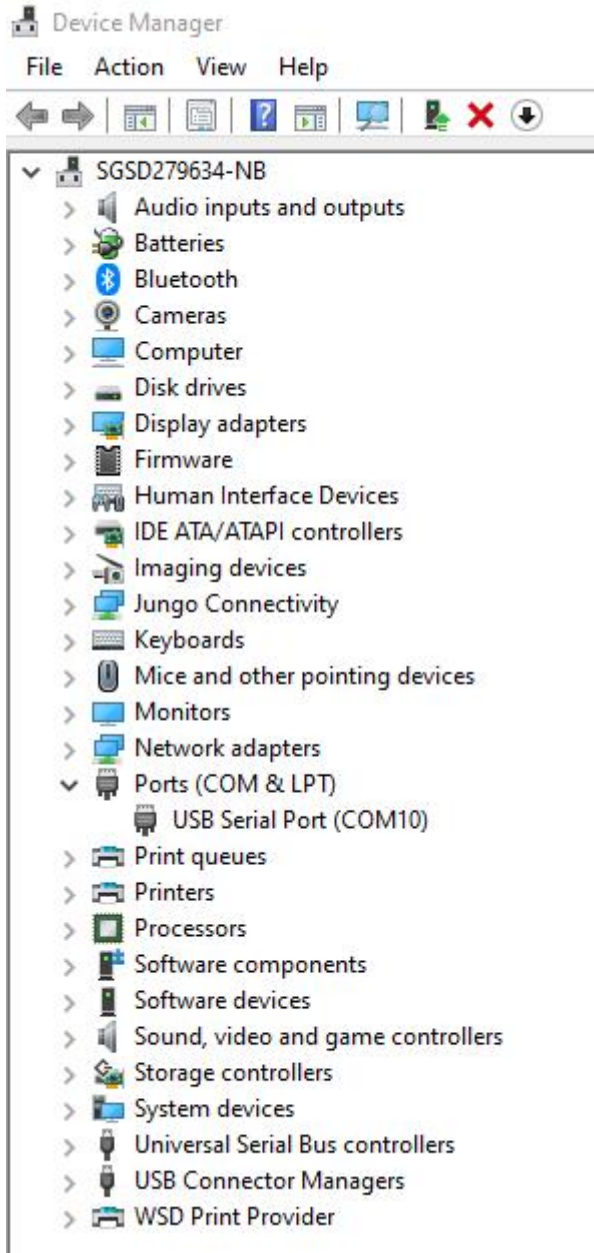


Step 2. Set up Arduino IDE

From version 1.6.5, Arduino IDE supports third-party hardware. Therefore, we can use Arduino IDE to develop applications on RTL8722DM MINI, and the examples of Arduino can run on RTL8722DM MINI too. Refer to [basic example link](#).

Arduino IDE can be downloaded in the Arduino website:

<https://www.arduino.cc/en/Main/Software>


When the installation is finished, open Arduino IDE. To set up RTL8722DM MINI correctly in Arduino IDE, go to “File” -> “Preferences” .

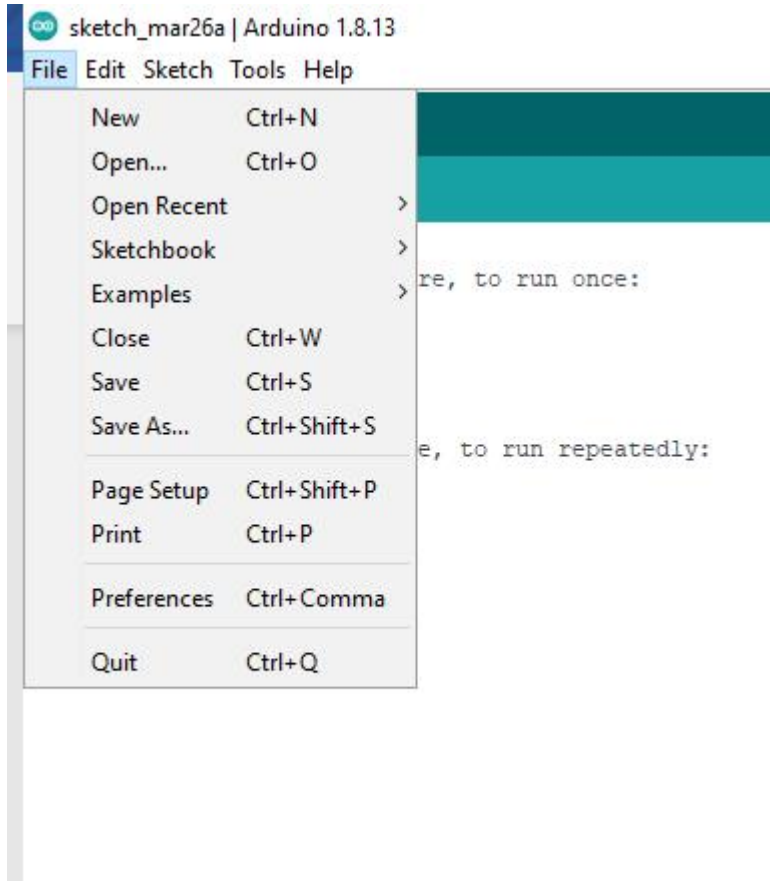


And paste the following URL into “Additional Boards Manager URLs” field:

```
https://github.com/ambiot/ambd_arduino/raw/master/Arduino_package/package_realtek.com_amebad_index.json
```

Next, go to “Tools” -> “Board” -> “Boards Manager” :

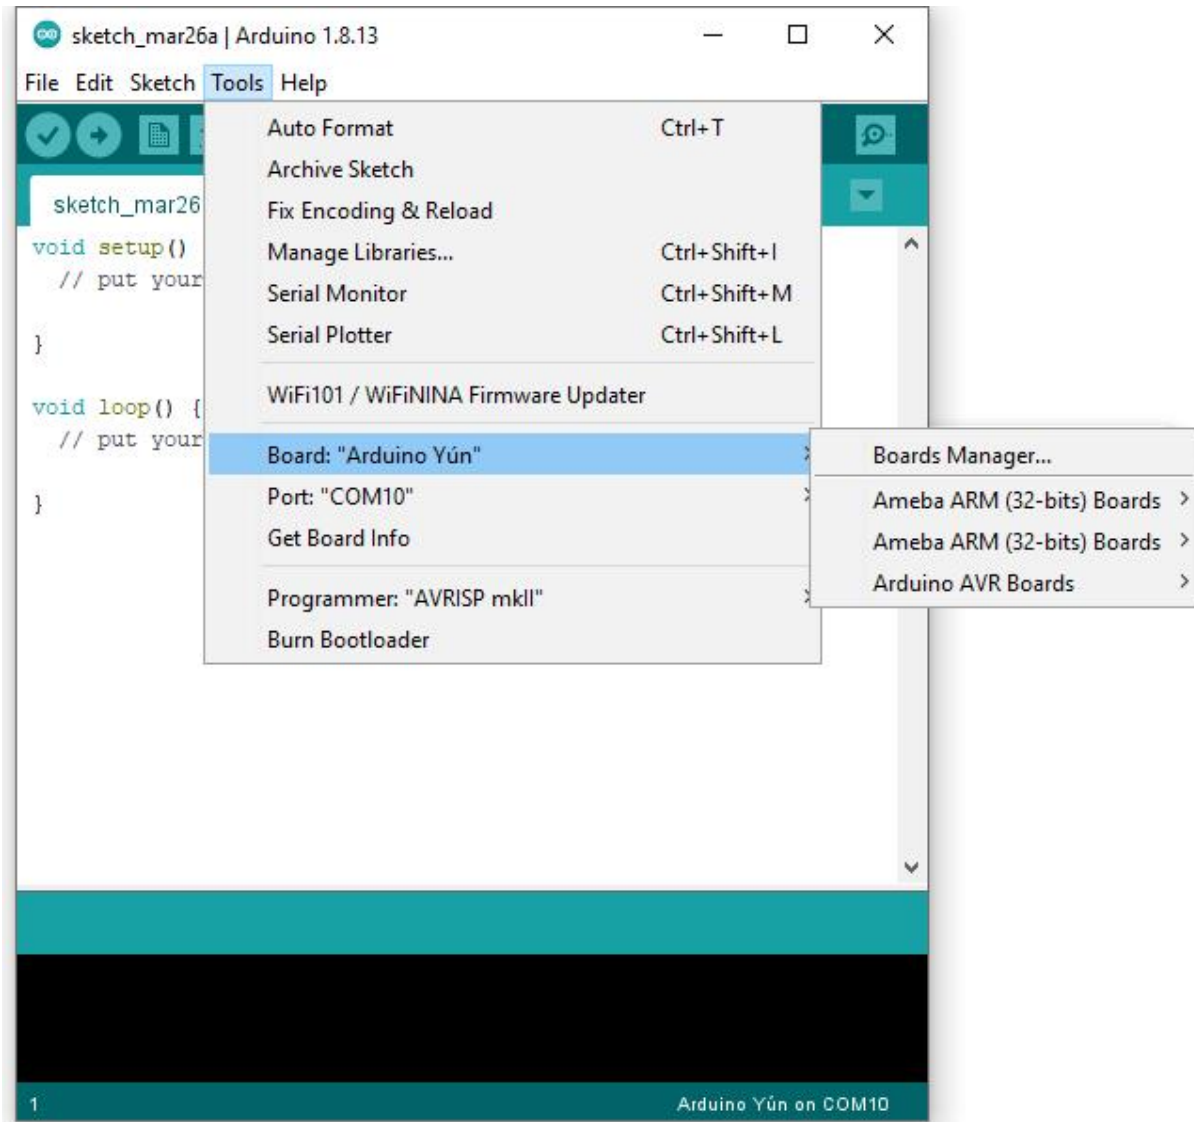

The “*Boards Manager*” requires about 10~20 seconds to refresh all hardware files (if the network is in bad condition, it may take longer). Every time the new hardware is connected, we need to reopen the Board Manager. So, we close the “*Boards Manager*”, and then open it again. Find “*Realtek AmebaD Boards (32-bits ARM Cortex-M4 @200MHz)*” in the list, click “*Install*”, then the Arduino IDE starts to download required files for AmebaD.

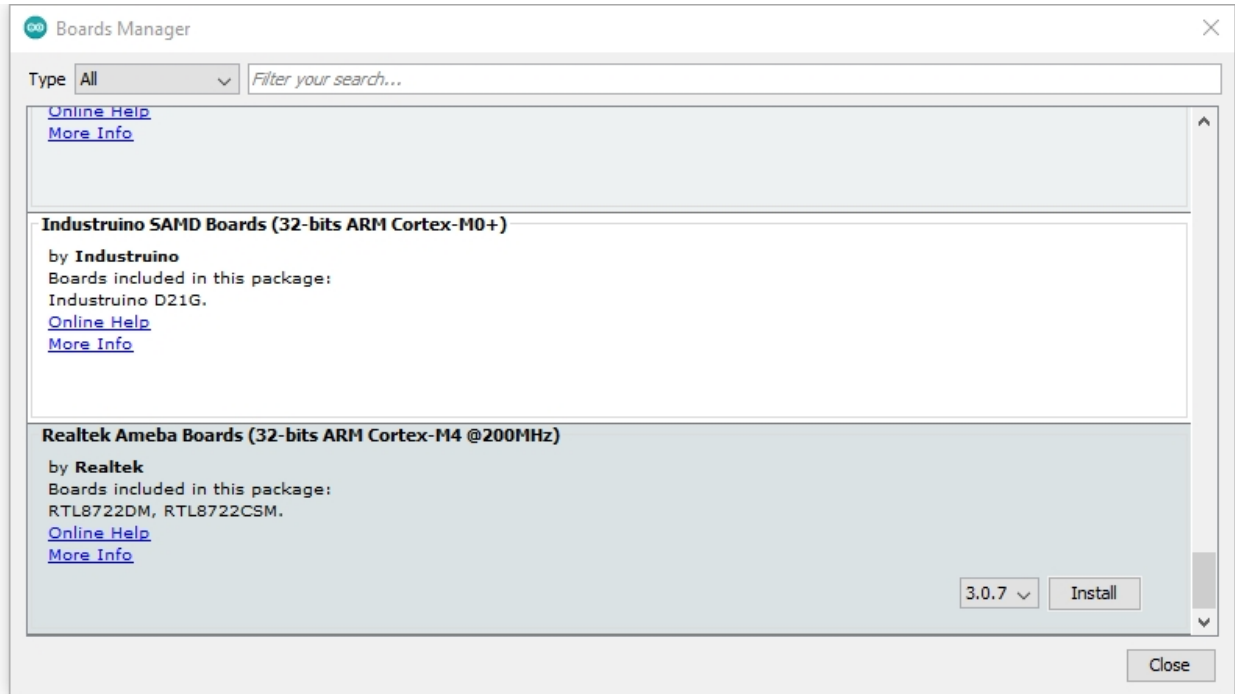

If you are facing GitHub downloading issue, please refer to the following link at [Download/Software Development Kit](#).


There are 3 sections:

1. “AmebaD_Arduino_patch1_SDK” , please select at least 1 of the SDKs. There are 5 latest released SDK options.
2. “AmebaD_Arduino_patch2_Tools” , please select according to your operation system. There are Windows, Linux and MacOS.
3. “AmebaD_Arduino_Source_Code” , this section is optional download only wants to refer the latest source code.

Download the files selected, then unzip (patch1 and patch2 are compulsory). There are “Install.doc” / “Install.pdf” for you to refer installation steps. According to your system, please run the installation tool in the “Offline_SDK_installation_tool” folder.

After the installation tool running successfully, you may open Arduino IDE and proceed to “Tools” -> “Board” -> “Boards Manager...”. Try to find “Realtek AmebaD Boards (32-bits ARM Cortex-M4 @200MHz)” ‘ in the list, click “Install” , then the Arduino IDE starts to download required files for AmebaD.

Finally, we select AmebaD as current connected board in “Tools” -> “Board” -> “Ameba ARM (32-bits) Boards” -> “RTL8722DM MIN”:

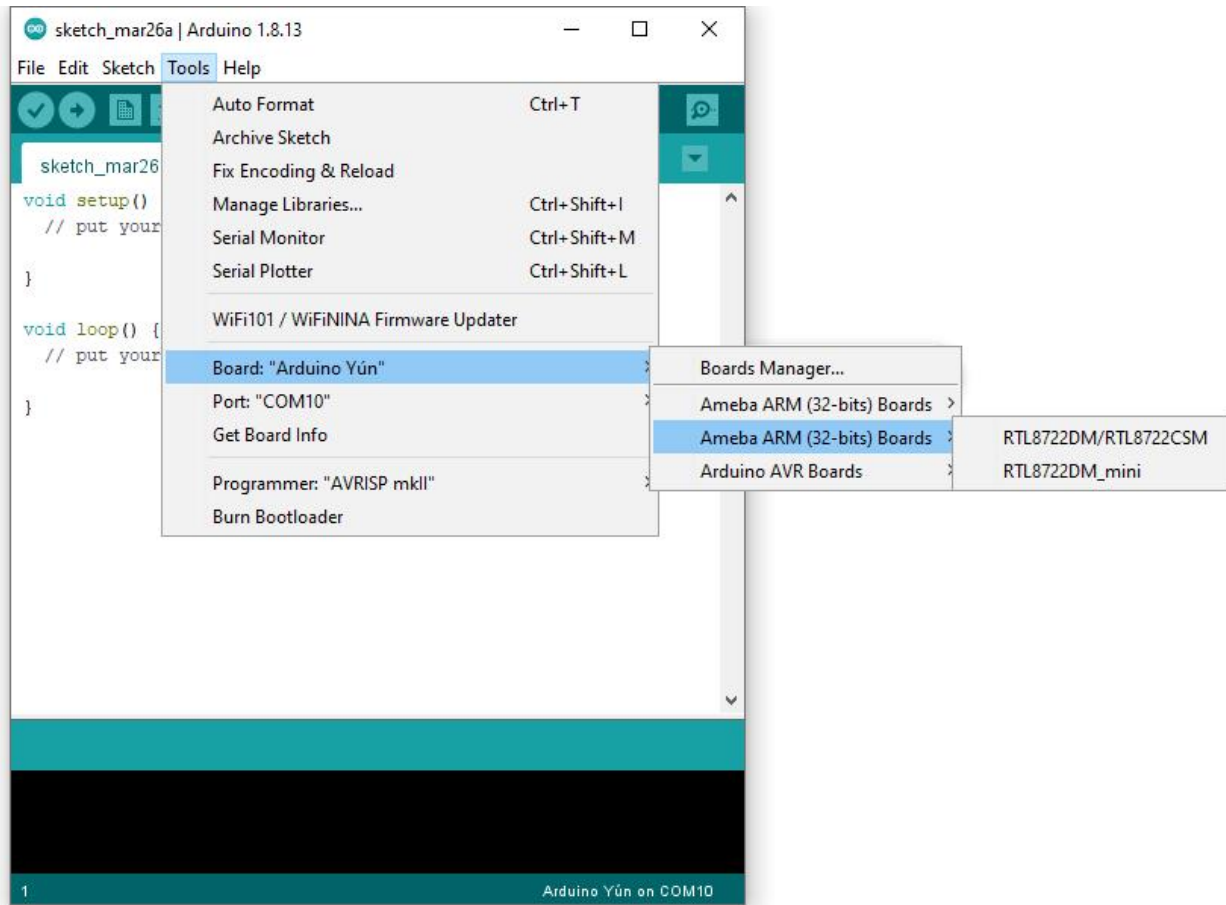


Try the First Example

Step 1. Compile & Upload

Arduino IDE provides many built-in examples, which can be compiled, uploaded and run directly on the boards. Here, we take the “Blink” example as the first try.

Open “File” -> “Examples” -> “01.Basics” -> “Blink” :

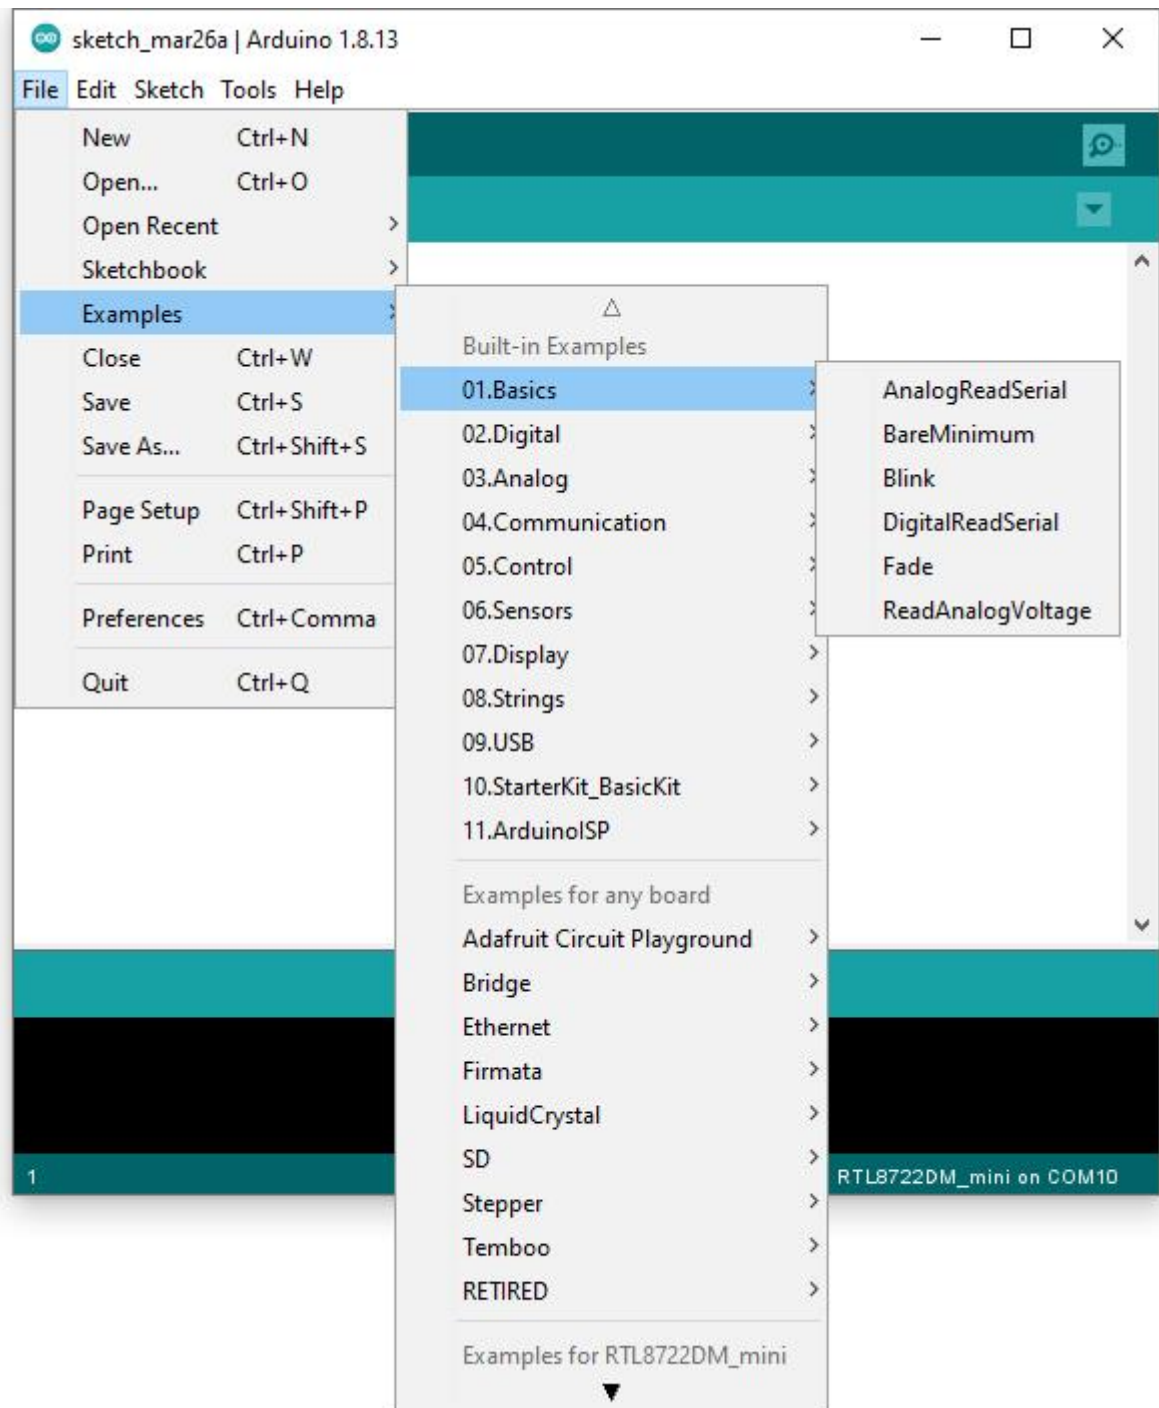

Arduino IDE opens a new window with the complete sample code.

```

Blink | Arduino 1.8.13
File Edit Sketch Tools Help

Blink $
If you want to know what pin the on-board LED is connected to on your Arduino
model, check the Technical Specs of your board at:
https://www.arduino.cc/en/Main/Products

modified 8 May 2014
by Scott Fitzgerald
modified 2 Sep 2016
by Arturo Guadalupi
modified 8 Sep 2016
by Colby Newman

This example code is in the public domain.

http://www.arduino.cc/en/Tutorial/Blink
*/

// the setup function runs once when you press reset or power the board
void setup() {
  // initialize digital pin LED_BUILTIN as an output.
  pinMode(LED_BUILTIN, OUTPUT);
}

// the loop function runs over and over again forever
void loop() {
  digitalWrite(LED_BUILTIN, HIGH);   // turn the LED on (HIGH is the voltage level)
  delay(1000);                       // wait for a second
  digitalWrite(LED_BUILTIN, LOW);    // turn the LED off by making the voltage LOW
  delay(1000);                       // wait for a second
}

28 RTL8722DM_mini on COM10


```

There are onboard LED of RTL8722DM_MINI, the default “LED_BUILTIN” is blue onboard LED.

Change “LED_BUILTIN” to “LED_B” or “LED_G” for different colour. Onboard LEDs options LED_B and LED_G (blue and green).



Next, we compile the sample code directly; click “Sketch” -> “Verify/Compile”

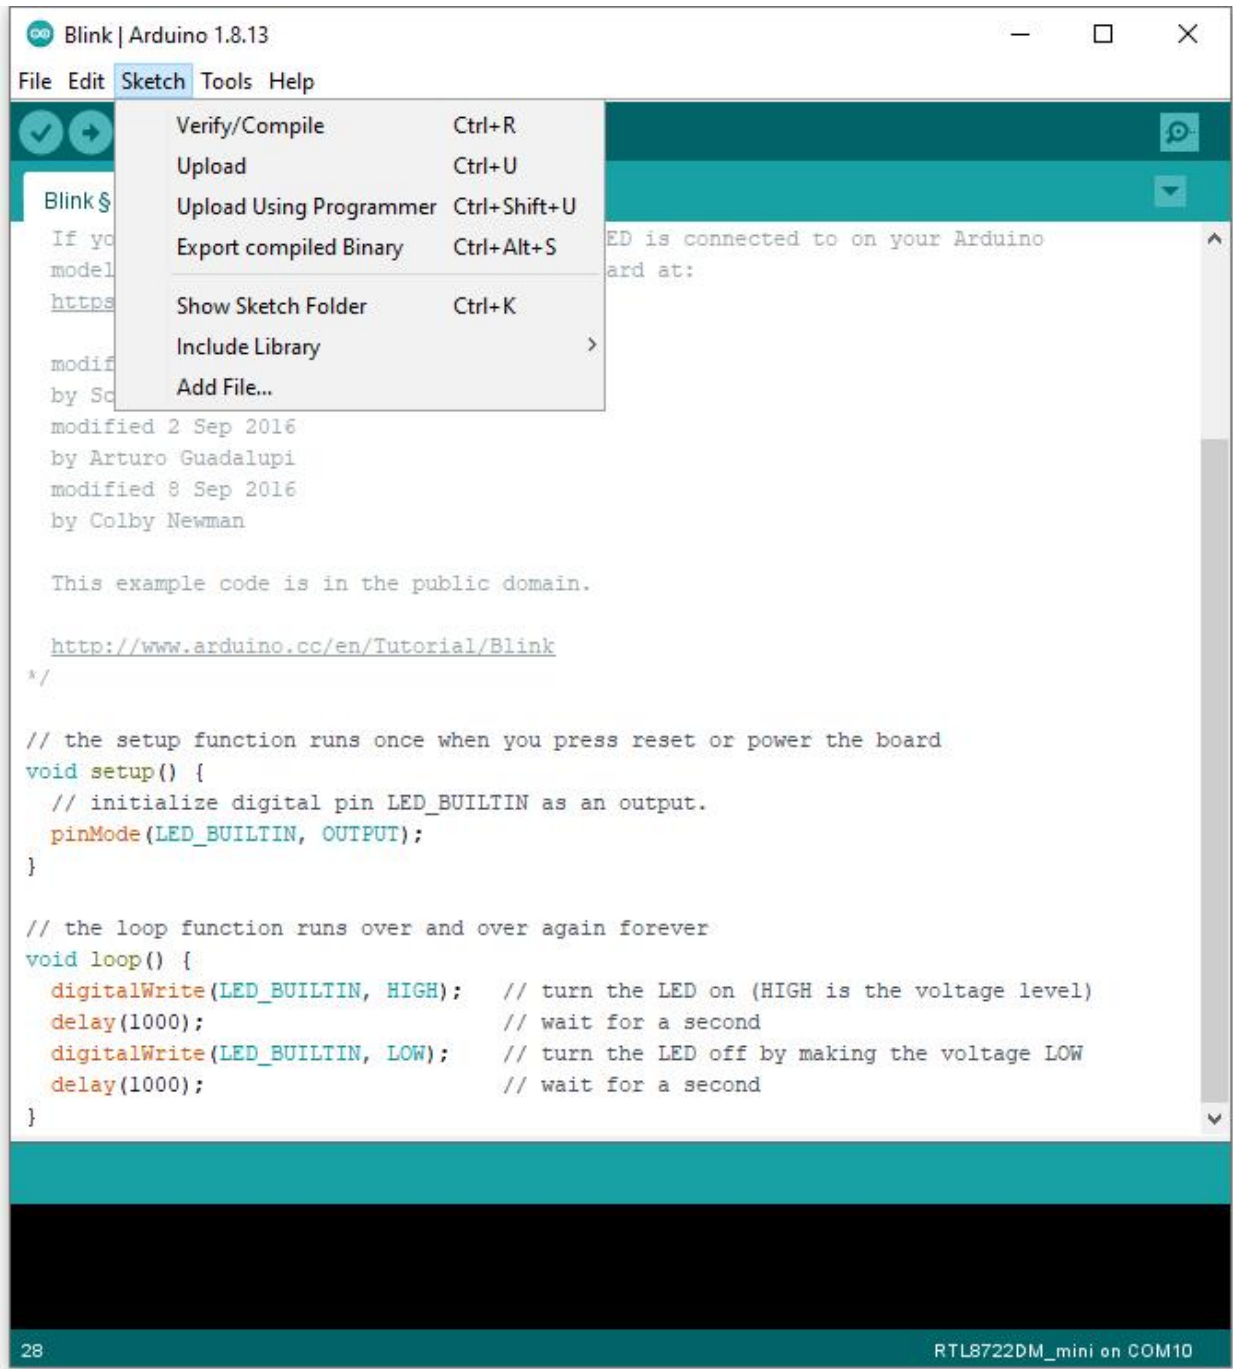


Arduino IDE prints the compiling messages in the bottom area of the IDE window. When the compilation is finished, you will get the message similar to the following figure:




Afterwards, we will upload the compiled code to RTL8722DM MINI.

Please make sure RTL8722DM MINI is connected to your computer, then click “Sketch” -> “Upload” .


The Arduino IDE will compile first then upload. During the uploading process, users are required to enter the upload mode of the board. Arduino IDE will wait 5s for DEV board to enter the upload mode.

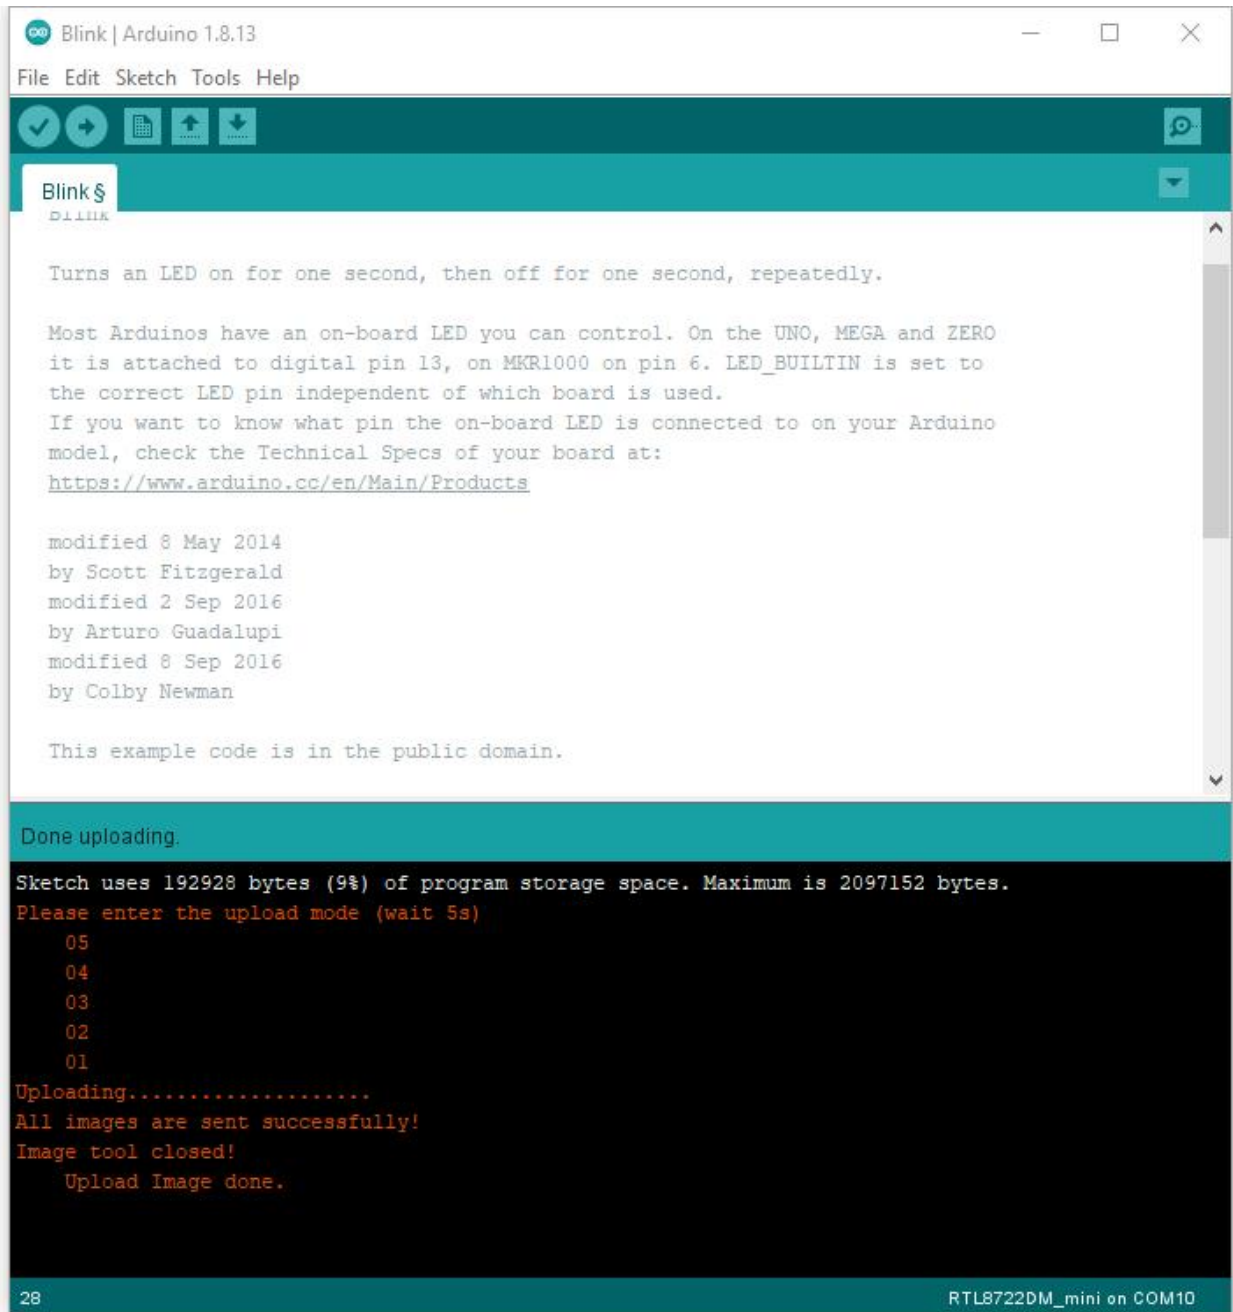

To enter the upload mode, first press and hold the *UART_DOWNLOAD* button, then press the *RESET* button. If success, you should see the onboard green LED and blue LED all turned off.

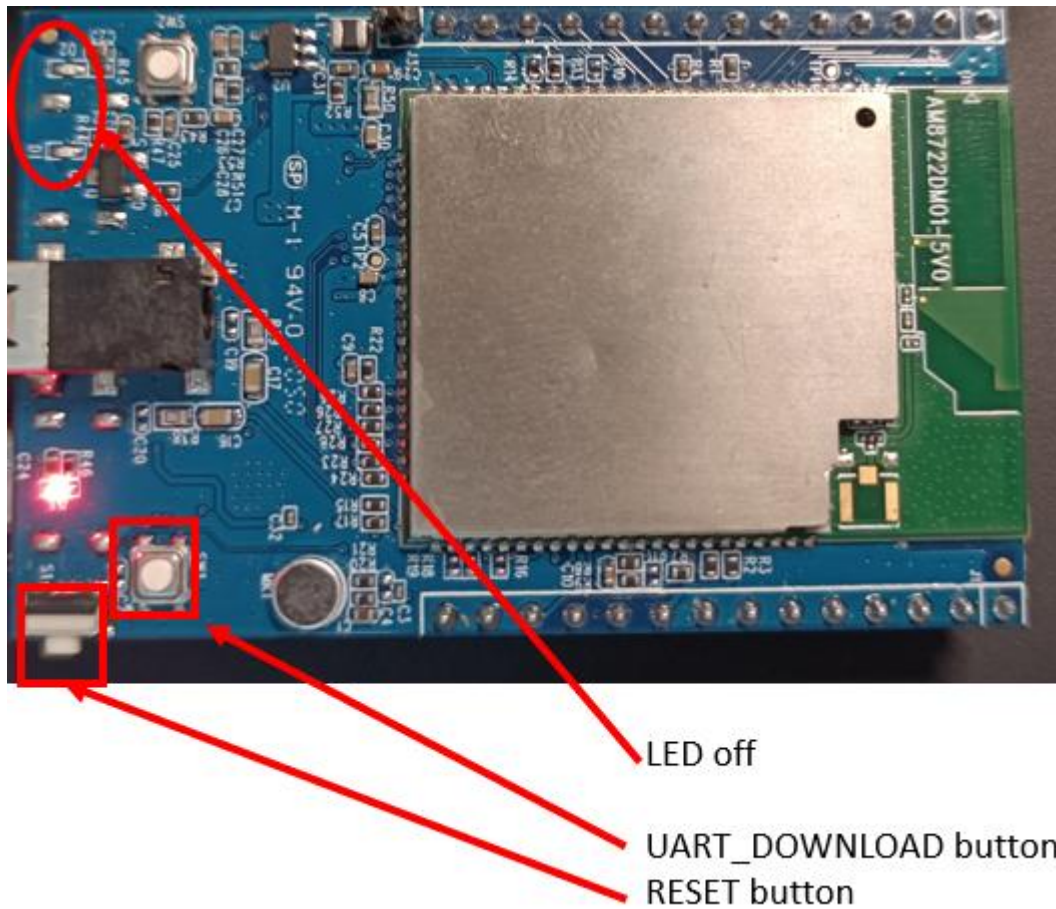

It is optional for users to check if the board entered the upload mode. Open serial monitor/terminal and look for “#Flash Download Start” . Note, it is normal that some serial terminals may show unknown characters as following picture.

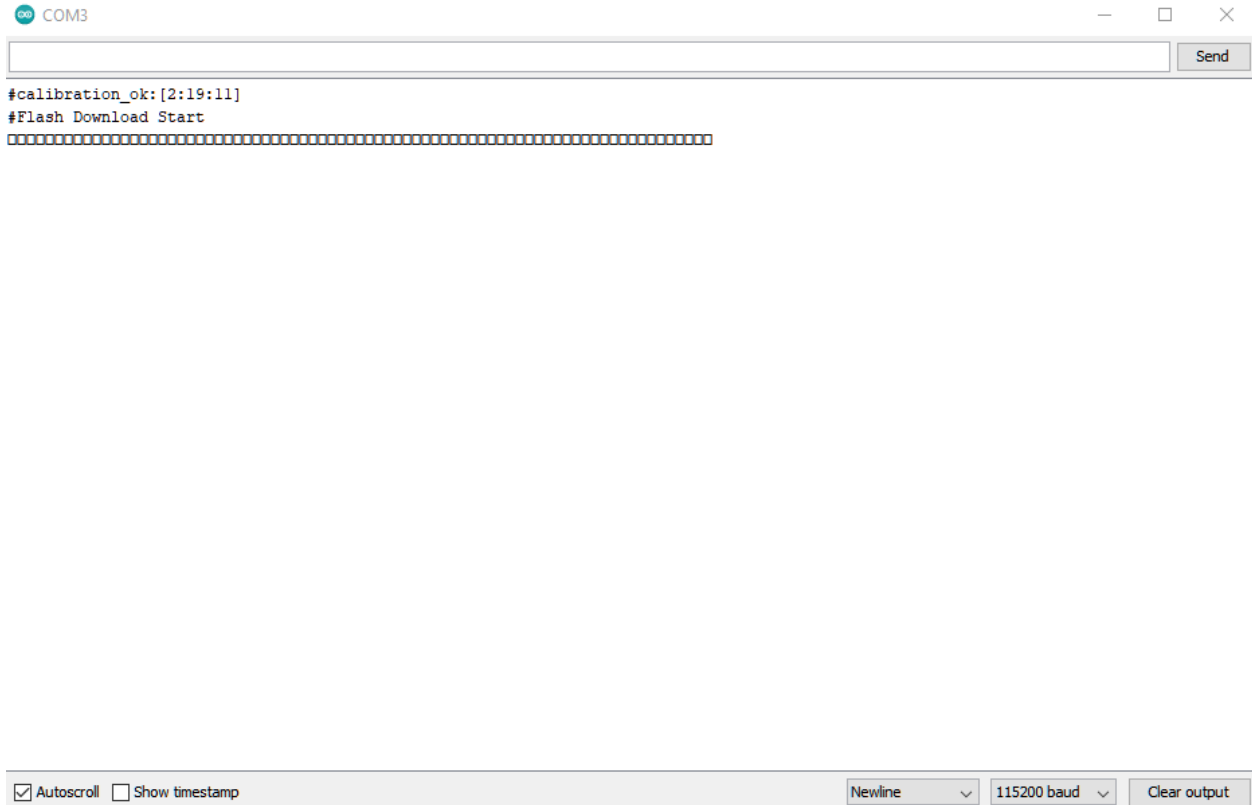

Again, during the uploading procedure the IDE prints messages. Uploading procedure takes considerably longer time (about 30 seconds to 1 minute). When upload completed, the “Done uploading” message is printed.

Step 2.Run the Blink example

In each example, Arduino not only provides sample code, but also detailed documentation, including wiring diagram, sample code explanation, technical details, …etc. These examples can be directly used on RTL8722DM MINI.

So, we find the detailed information of the “Blink” example:

<https://www.arduino.cc/en/Tutorial/BuiltInExamples/Blink>

In short, for RTL8722DM MINI, the example can be run on both onboard LEDs (green or blue) or external LED (use any GPIO pins for signal output).

Finally, press the *RESET* button, and you can see the *LED* blinking.

(End)

注解: If you face any issue, please refer to the FAQ and Trouble shooting sections on [../support/index](#) page.

1.2.2 Peripherals & Examples

Basic Examples

Ameba ARDUINO: [RTL8722CSM][RTL8722DM] Supported ARDUINO built-in example list

There are many built-in examples in Arduino. In the table below, we list all examples that are compatible with Ameba.

Category	Name	Comment
01.Basics	AnalogReadSerial	Connect potentiometer to 3.3V
	BareMinimum	
	Blink	Connect LED to pin 8
	DigitalReadSerial	
	Fade	
	ReadAnalogVoltage	ADC can read a maximum of 3.3V.
02.Digital	BlinkWithoutDelay	Connect LED to pin 8
	Button	Connect LED to pin 13
	Debounce	Connect LED to pin 13
	DigitalInputPullup	Connect LED to pin 13
	StateChangeDetection	Connect LED to pin 13
	toneKeyboard	
	toneMelody	
	toneMultiple	
	tonePitchFollower	
03.Analog	AnalogInOutSerial	
	AnalogInput	Connect LED to pin 13
	Analog Write Mega	
	Calibration	Connect another LED to pin 13
	Fading	
	Smoothing	
04.Communication	ASCIITable	
	Dimmer	Use serial baud rate 115200
	Graph	Use serial baud rate 115200, Connect potentiometer to 3.3V
	Midi	Please use Serial1 and pin 26, or use Serial2 and pin 17
	MultiSerial	
	PhysicalPixel	Use serial baud rate 115200
	ReadASCIIString	
	SerialCallResponse	Use serial baud rate 115200

下页继续

表 4 - 续上页

Category	Name	Comment
	Serial CallResponseASCII	Use serial baud rate 115200
	SerialEvent	
	SerialPassthrough	
	VirtualColorMixer	Use serial baud rate 115200
05.Control	Arrays	Use pins 1, 2, 3, 4, 5, 6
	ForLoopIteration	Use pins 1, 2, 3, 4, 5, 6
	IfStatementConditional	
	switchCase	
	switchCase2	
	While StatementConditional	Connect another LED to pin 13
06.Display	barGraph	Use another pin to replace pin 7
	RowColumnScanning	
07.Strings	CharacterAnalysis	
	String AdditionOperator	
	StringAppendOperator	
	StringCaseChanges	
	StringCharacters	
	String ComparisonOperators	
	StringIndexOf	
	StringLength	
	StringLengthTrim	
	StringReplace	
	String StartsWithEndsWith	
	StringSubstring	
	StringToInt	

Network Examples

Scan Available WiFi Hotspots in The Surroundings

Materials


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Antenna x 1

Example

In this example, we use Ameba to scan available WiFi hotspots in the surroundings, and prints the SSID, encryption type, signal strength information of each detected hotspot.

First, make sure the correct Ameba development board is selected in Arduino IDE: “Tools” -> “Board”

Open the “ScanNetworks” example in “File” -> “Examples” -> “AmebaWiFi” -> “ScanNetworks” :

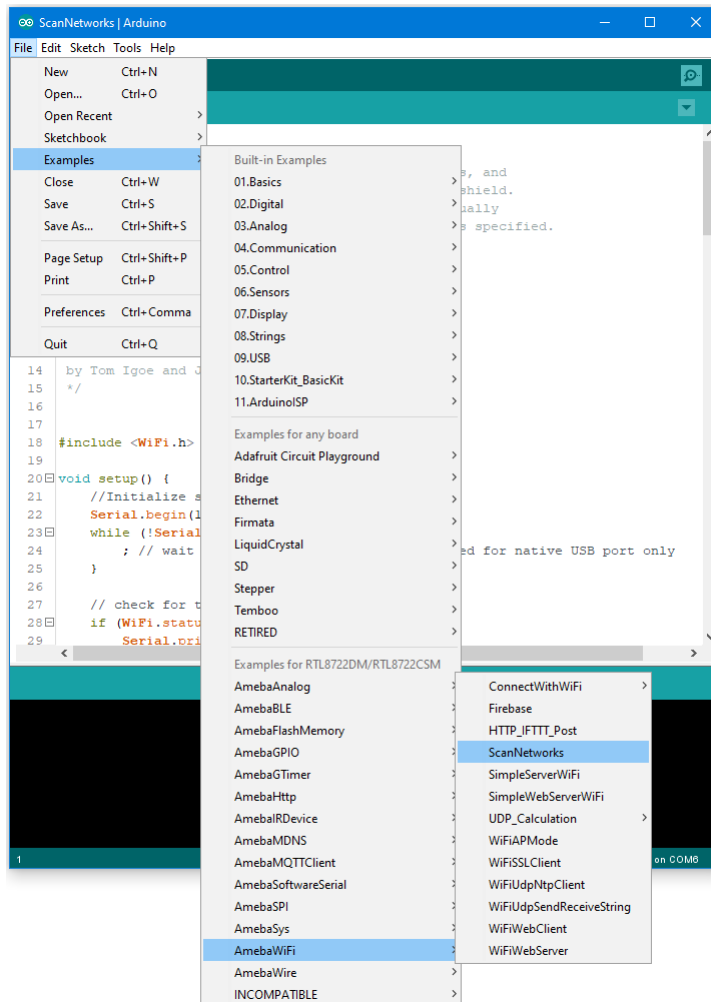

Then upload the sample code and press the reset button on Ameba. Afterwards, you can see “**Scan Networks**” message appears, with the detected WiFi hotspots and the information of each hotspot.

```

** Scan Networks **
number of available networks:20
0)      Signal: -76 dBm EncryptionRaw: WPA2 AES Encryption: WPA2
1) Askey5100-ADFF9 Signal: -80 dBm EncryptionRaw: WPA2 AES Encryption: WPA2
2) TP-LINK_52F5 Signal: -88 dBm EncryptionRaw: WPA/WPA2 AES Encryption: WPA2
3) SINGTEL-88RW Signal: -90 dBm EncryptionRaw: WPA2 AES Encryption: WPA2
4) Askey5100-DC9A Signal: -92 dBm EncryptionRaw: WPA2 AES Encryption: WPA2
5) littleBIGfamily_Study Signal: -92 dBm EncryptionRaw: WPA/WPA2 AES Encr
6) DUCATI_84 Signal: -94 dBm EncryptionRaw: WPA2 AES Encryption: WPA2
7) Askey5100-ADFF9 Signal: -96 dBm EncryptionRaw: WPA2 AES Encryption: WPA2
8) SINGTEL-DDDE(2.4G) Signal: -96 dBm EncryptionRaw: WPA2 AES Encryption: WPA2
9) elijah24 Signal: -96 dBm EncryptionRaw: WPA2 AES Encryption: WPA2
10) Linksys23699 Signal: -98 dBm EncryptionRaw: WPA2 AES Encryption: WPA2
11) sweetchild-AP Signal: -102 dBm EncryptionRaw: WPA2 AES Encryption: W
12) elijah Signal: -107 dBm EncryptionRaw: WPA2 AES Encryption: WPA2
13) SINGTEL-B6B4 Signal: -108 dBm EncryptionRaw: WPA2 AES Encryption: W
14) Yowie Network Signal: -108 dBm EncryptionRaw: WPA/WPA2 AES Encr
15) SINGTEL-A01F Signal: -109 dBm EncryptionRaw: WPA/WPA2 AES Encr
16) ASUS Signal: -109 dBm EncryptionRaw: WPA2 AES Encryption: WPA2
17) TP-LINK_5385 Signal: -109 dBm EncryptionRaw: WPA/WPA2 AES Encr
18) Signal: -109 dBm EncryptionRaw: WPA2 AES Encryption: WPA2
19) ORBI33 Signal: -109 dBm EncryptionRaw: WPA2 AES Encryption: WPA2

```

Code Reference

- First we use `WiFi.macAddress(mac)` to get the MAC address of Ameba: <https://www.arduino.cc/en/Reference/WiFiMACAddress>
- Then we use `WiFi.scanNetworks()` to detect WiFi hotspots: <https://www.arduino.cc/en/Reference/WiFiScanNetworks>
- To get information of detected WiFi hotspot: We use `WiFi.SSID(thisNet)` to retrieve SSID of a network: <https://www.arduino.cc/en/Reference/WiFiSSID> We use `WiFi.RSSI(thisNet)` to get the signal strength of the connection to the router: <https://www.arduino.cc/en/Reference/WiFiRSSI>
- We use `WiFi.encryptionType(thisNet)` to get the encryption type of the network: <https://www.arduino.cc/en/Reference/WiFiEncryptionType>

Comparison with Arduino

In the Arduino platform, we need to add an extra WiFi shield to be the WiFi module to realize the WiFi connection. And we must `#include` to use SPI to communicate with WiFi module. However, Ameba is already equipped with WiFi module. Therefore, `#include` is not needed.

Connect to WiFi

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1

Procedure

There are three common encryption types in a WiFi connection. The first one is “OPEN”, which means there is no password needed to connect to this network. The second type of encryption is WPA, which requires the correct password to access. The third type is WEP, which requires a hexadecimal password and a key index.

In the following, we will give a brief introduction on how to establish WiFi connection with these three types of encryption on Ameba.

First, make sure the correct Ameba development board is selected in “Tools” -> “Board” .

- Open (WiFi connection without password)

Open the “ConnectNoEncryption” example in “File” -> “Examples” -> “AmebaWiFi” -> “ConnectWithWiFi” -> “ConnectNoEncryption”

In the sample code, modify “ssid” to be the same as the WiFi SSID to be connected to.

Next, upload the sample code, and press the reset button on Ameba. Then you will see a message “You’re connected to the networkSSID: XXXXX”, and the information of this WiFi connection is printed in the serial monitor every 10 seconds.

```

COM6
Interface 0 IP address : 192.168.43.32
You're connected to the networkSSID: Test network
BSSID: EE:C0:E7:86:9E:E
signal strength (RSSI):-55
Encryption Type:0
IP Address: 192.168.43.32
192.168.43.32
MAC address: 70:1D:8:4:55:32
NetMask: 255.255.255.0
Gateway: 192.168.43.235
SSID: Test network
BSSID: EE:C0:E7:86:9E:E
signal strength (RSSI):-55
Encryption Type:0
SSID: Test network
BSSID: EE:C0:E7:86:9E:E
signal strength (RSSI):-58
Encryption Type:0
SSID: Test network
BSSID: EE:C0:E7:86:9E:E
signal strength (RSSI):-57
Encryption Type:0

```

- WiFi connection with WPA encryption

Open the “ConnectWithWPA” example in “File” -> “Examples” -> “AmebaWiFi” -> “ConnectWithWiFi” -> “ConnectWithWPA”

```

ConnectWithWPA | Arduino
File Edit Sketch Tools Help
ConnectWithWPA
1 /*
2
3 This example connects to an unencrypted Wifi network.
4 Then it prints the MAC address of the Wifi shield,
5 the IP address obtained, and other network details.
6
7 Circuit:
8 * Wifi shield attached
9
10 created 13 July 2010
11 by dlf (Metodo2 srl)
12 modified 31 May 2012
13 by Tom Igoe
14 */
15 #include <WiFi.h>
16
17 char ssid[] = "yourNetwork"; // your network SSID (name)
18 char pass[] = "secretPassword"; // your network password
19 int status = WL_IDLE_STATUS; // the Wifi radio's status
20
21 void setup() {
22 //Initialize serial and wait for port to open:
23 Serial.begin(115200);
24 while (!Serial) {
25 // wait for serial port to connect. Needed for native USB port only
26 }
27
28 // ...
29 }
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223
2224
2225
2226
2227
2228
2229
2230
2231
2232
2233
2234
2235
2236
2237
2238
2239
2240
2241
2242
2243
2244
2245
2246
2247
2248
2249
2250
2251
2252
2253
2254
2255
2256
2257
2258
2259
2260
2261
2262
2263
2264
2265
2266
2267
2268
2269
2270
2271
2272
2273
2274
2275
2276
2277
2278
2279
2280
2281
2282
2283
2284
2285
2286
2287
2288
2289
2290
2291
2292
2293
2294
2295
2296
2297
2298
2299
2300
2301
2302
2303
2304
2305
2306
2307
2308
2309
2310
2311
2312
2313
2314
2315
2316
2317
2318
2319
2320
2321
2322
2323
2324
2325
2326
2327
2328
2329
2330
2331
2332
2333
2334
2335
2336
2337
2338
2339
2340
2341
2342
2343
2344
2345
2346
2347
2348
2349
2350
2351
2352
2353
2354
2355
2356
2357
2358
2359
2360
2361
2362
2363
2364
2365
2366
2367
2368
2369
2370
2371
2372
2373
2374
2375
2376
2377
2378
2379
2380
2381
2382
2383
2384
2385
2386
2387
2388
2389
2390
2391
2392
2393
2394
2395
2396
2397
2398
2399
2400
2401
2402
2403
2404
2405
2406
2407
2408
2409
2410
2411
2412
2413
2414
2415
2416
2417
2418
2419
2420
2421
2422
2423
2424
2425
2426
2427
2428
2429
2430
2431
2432
2433
2434
2435
2436
2437
2438
2439
2440
2441
2442
2443
2444
2445
2446
2447
2448
2449
2450
2451
2452
2453
2454
2455
2456
2457
2458
2459
2460
2461
2462
2463
2464
2465
2466
2467
2468
2469
2470
2471
2472
2473
2474
2475
2476
2477
2478
2479
2480
2481
2482
2483
2484
2485
2486
2487
2488
2489
2490
2491
2492
2493
2494
2495
2496
2497
```

Next, upload the sample code, and press the reset button on Ameba. Then you will see a message “You’ re connected to the networkSSID: XXXXX” , and the information of this WiFi connection is printed in the serial monitor every 10 seconds.

- WiFi connection with WEP encryption

Open the “ConnectWithWEP” example in “File” -> “Examples”
-> “AmebaWiFi” -> “ConnectWithWiFi” -> “ConnectWithWEP”

```
1  ConnectWithWEP | Arduino
File Edit Sketch Tools Help

[Icons]

ConnectWithWEP

16
17 Circuit:
18 * WiFi shield attached
19
20 created 13 July 2010
21 by dlf (Metodo2 srl)
22 modified 31 May 2012
23 by Tom Igoe
24 */
25 #include <WiFi.h>
26
27 char ssid[] = "yourNetwork";           // your network SSID (name)
28 char key[] = "D0D0DEADF00DABBADEAFBEADED"; // your network key
29 int keyIndex = 0;                       // your network key Index number
30 int status = WL_IDLE_STATUS;           // the Wifi radio's status
31
32 void setup() {
33   //Initialize serial and wait for port to open:
34   Serial.begin(115200);
35   while (!Serial) {
36     ; // wait for serial port to connect. Needed for native USB port only
37   }
38
39   // check for the presence of the shield:
40   if (WiFi.status() == WL_NO_SHIELD) {
41     Serial.println("WiFi shield not present");
42     // don't continue:
43   }
44 }
```

In the sample code, modify “ssid” to the SSID to be connected, “key” to the hexadecimal password, “keyIndex” to your key index number.

Next, upload the sample code, and press the reset button on Ameba. Then you will see a message “You’re connected to the networkSSID: XXXXX” , and the information of this WiFi connection is printed in the IDE every 10 seconds.

Code Reference

<https://www.arduino.cc/en/Reference/WiFiBegin>

To get the information of a WiFi connection:

Use `WiFi.SSID()` to get SSID of the current connected network.

<https://www.arduino.cc/en/Reference/WiFiSSID>

Use `WiFi.RSSI()` to get the signal strength of the connection.

<https://www.arduino.cc/en/Reference/WiFiRSSI>

Use `WiFi.encryptionType()` to get the encryption type of the WiFi connection.

<https://www.arduino.cc/en/Reference/WiFiEncryptionType>

Use `WiFi.BSSID()` to get the MAC address of the router you are connected to.

<https://www.arduino.cc/en/Reference/WiFiBSSID>

To get the information of Ameba:

Use `WiFi.macAddress()` to get the MAC address of Ameba.

<https://www.arduino.cc/en/Reference/WiFiMACAddress>

Use `WiFi.localIP()` to get the IP address of Ameba.

<https://www.arduino.cc/en/Reference/WiFiLocalIP>

Use `WiFi.subnetMask()` to get the subnet mask.

<https://www.arduino.cc/en/Reference/WiFiSubnetMask>

Use `WiFi.gatewayIP()` to get the WiFi shield's gateway IP address.

<https://www.arduino.cc/en/Reference/WiFiGatewayIP>

Comparison with Arduino

In the Arduino platform, we need to add an extra WiFi shield to be the WiFi module to realize the WiFi connection.

And we must `#include` to use SPI to communicate with WiFi module.

However, Ameba is already equipped with WiFi module. Therefore, `#include` is not needed.

Use Ameba as Server to communicate with Client

Materials


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Laptop (Make sure it is connected to the same network domain as Ameba, and tcp tools are installed.)

Example

In this example, we first connect Ameba to WiFi, then we use Ameba as server to communicate with client.

First, we make sure the correct Ameba development board is set in “Tools” -> “Board”

Then, open the Simple WiFi Server example in “File” -> “Examples” -> “AmebaWiFi” -> “SimpleServerWiFi”

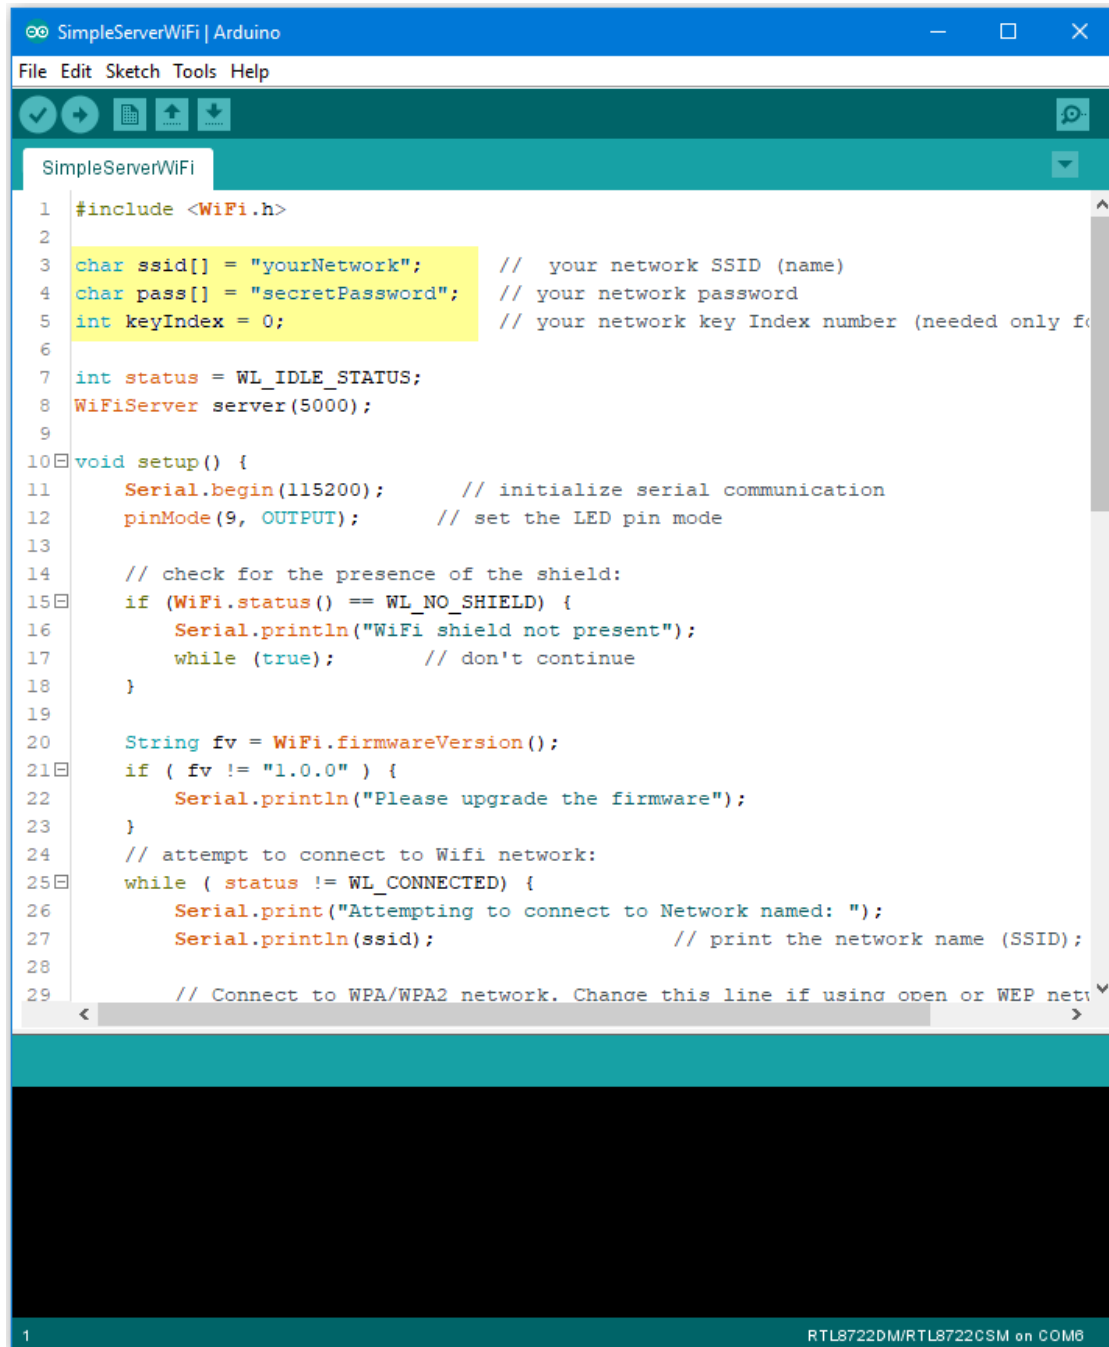


```
SimpleServerWiFi | Arduino
File Edit Sketch Tools Help

SimpleServerWiFi


1 #include <WiFi.h>
2
3 char ssid[] = "yourNetwork"; // your network SSID (name)
4 char pass[] = "secretPassword"; // your network password
5 int keyIndex = 0; // your network key Index number (needed only for WEP)
6
7 int status = WL_IDLE_STATUS;
8 WiFiServer server(5000);
9
10 void setup() {
11     Serial.begin(115200); // initialize serial communication
12     pinMode(9, OUTPUT); // set the LED pin mode
13
14     // check for the presence of the shield:
15     if (WiFi.status() == WL_NO_SHIELD) {
16         Serial.println("WiFi shield not present");
17         while (true); // don't continue
18     }
19
20     String fv = WiFi.firmwareVersion();
21     if ( fv != "1.0.0" ) {
22         Serial.println("Please upgrade the firmware");
23     }
24     // attempt to connect to Wifi network:
25     while ( status != WL_CONNECTED) {
26         Serial.print("Attempting to connect to Network named: ");
27         Serial.println(ssid); // print the network name (SSID);
28
29         // Connect to WPA/WPA2 network. Change this line if using open or WEP network
    
```

In the sample code, modify the highlighted parameters and enter the ssid and password for your WiFi connection.

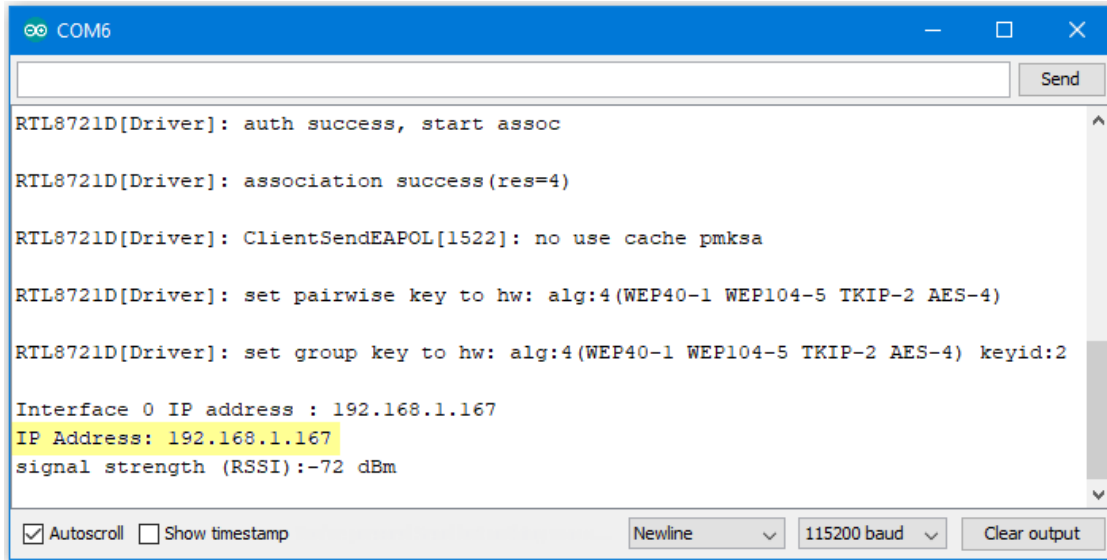

Next, upload the code, then press the reset button on Ameba. At this moment, you will see the connection information is displayed in the console.

Next, we use the socket tool in the laptop to be the client and connect to the IP address of the Ameba board shown in the connection information at port 5000. (Note: The socket tool we used in this example is “sokit”)

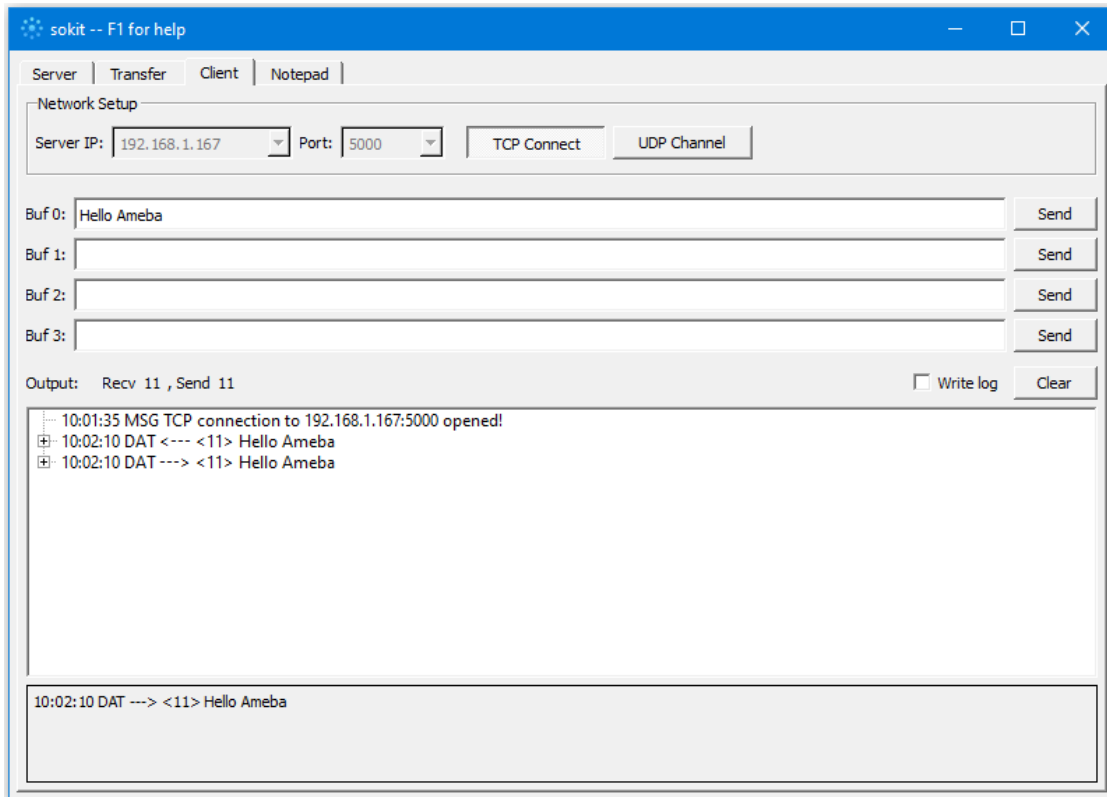


Click on the “Client” tab to choose the client mode, specify the IP and port of the server, then click “TCP Connect” .

If the connection is established successfully, the server shows a message: “A client connected to this Server” , and the

IP and port of the connected client.

In this example, when the client and server are connected and the client sends a string to Ameba server, the Ameba server returns the identical string back to the client.

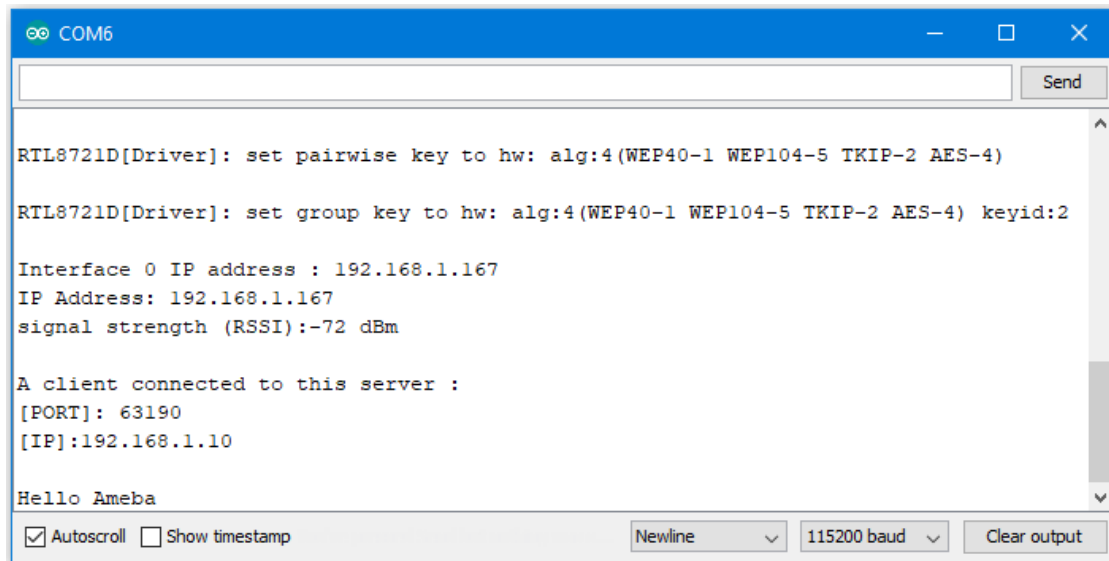

```
COM6

RTL8721D[Driver]: set pairwise key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4)

RTL8721D[Driver]: set group key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4) keyid:2

Interface 0 IP address : 192.168.1.167
IP Address: 192.168.1.167
signal strength (RSSI):-72 dBm

A client connected to this server :
[PORT]: 63190
[IP]:192.168.1.10

Hello Ameba

☒ Autoscroll ☐ Show timestamp
Newline 115200 baud Clear output
```

The string sent to server is returned and showed at the client side.

Code Reference

Use `WiFi.begin()` to establish WiFi connection;

<https://www.arduino.cc/en/Reference/WiFiBegin>

To get the information of a WiFi connection:

Use `WiFi.SSID()` to get SSID of the current connected network.

<https://www.arduino.cc/en/Reference/WiFiSSID>

Use `WiFi.RSSI()` to get the signal strength of the connection.

<https://www.arduino.cc/en/Reference/WiFiRSSI>

Use `WiFi.localIP()` to get the Ameba WiFi shield's IP address.

<https://www.arduino.cc/en/Reference/WiFiLocalIP>

Create server and transmitting data:

Use `Server(port)` to create a server that listens on the specified port.

<https://www.arduino.cc/en/Reference/WiFiServer>

Use `server.begin()` to tell the server to begin listening for incoming connections.

<https://www.arduino.cc/en/Reference/WiFiServerBegin>

Use `server.available()` to get a client that is connected to the server and has data available for reading.

<https://www.arduino.cc/en/Reference/WiFiServerAvailable>

Use `client.read()` to read the next byte received from the server.

<https://www.arduino.cc/en/Reference/WiFiClientRead>

Use `client.write()` to write data to the server.

<https://www.arduino.cc/en/Reference/WiFiClientWrite>

Use `client.stop()` to disconnect from the server.

<https://www.arduino.cc/en/Reference/WiFiClientStop>

Use Ameba to retrieve HTTP websites from the internet

Materials


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1

Example


In this example, the `HttpClient` library is used to retrieve a webpage using the HTTP protocol.

First, make sure that the correct Ameba development board is selected in “Tools” -> “Board”

Then open “File” -> “Examples” -> “AmebaHttp” -> “SimpleHttpExample”

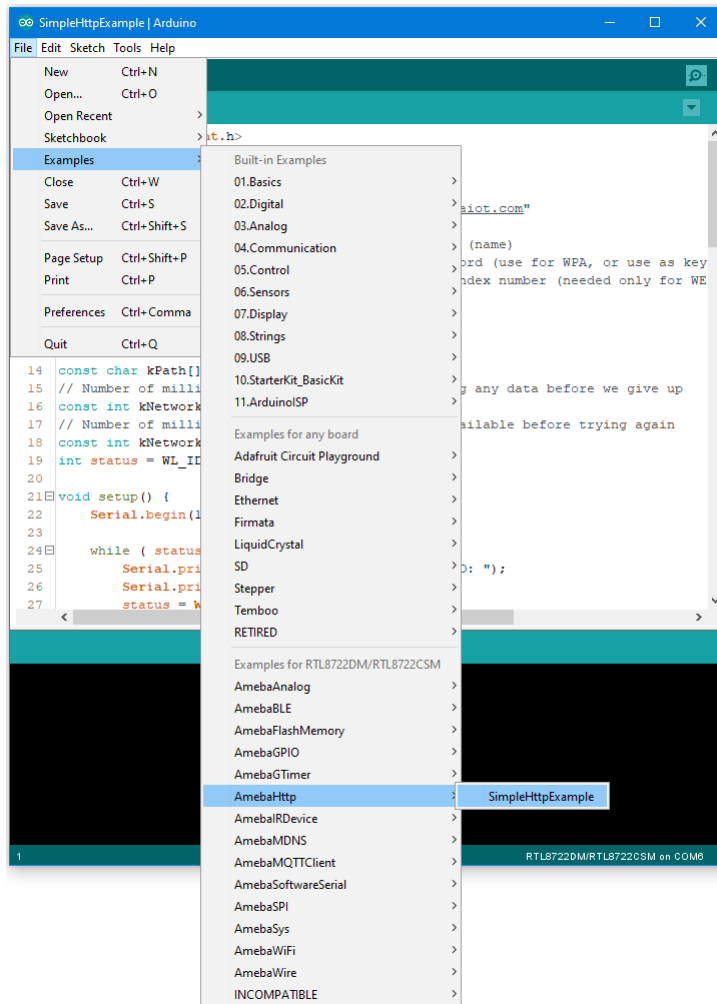

In the sample code, modify the highlighted section to enter the information required (ssid, password, key index) to connect to your WiFi network.

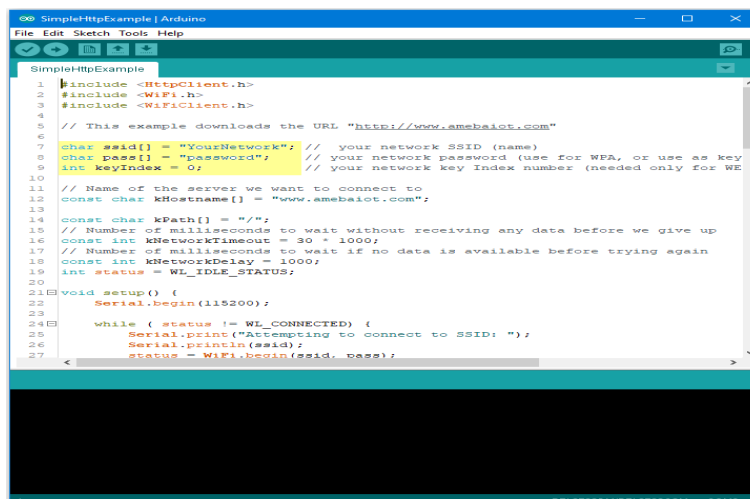

Upload the code and press the reset button on Ameba once the upload is finished. Open the serial monitor in the Arduino IDE and you can see the information retrieved from the website.

```

COM4

Interface 0 IP address : 172.25.24.188Connected to wifi
SSID: RealEZ
IP Address: 172.25.24.188
signal strength (RSSI):-56 dBm

Connect to Server successful!
startedRequest ok
Got status code: 200
Content length is: 0

Body returned follows:
<!doctype html><html itemscope="" itemtype="http://schema.org/WebPage" lang="en-SG"><head><meta content=
document.documentElement.addEventListener("submit",function(b){var a;if(a=b.target){var c=a.getAttribute
var a=window.location,b=a.href.indexOf("#");if(0<=b){var c=a.href.substring(b+1);/^(s)q=/.test(c)ss-l==
</style><style>body,td,a,p,h{font-family:arial,sans-serif}body{margin:0;overflow-y:scroll}#gog{padding:
if (!iesg){document.f.q.focus();document.gbqf.q.focus();}
}
})();</script><div id="mngh"><div id=gbar><nobr><b class=gbl>Search</b><a class=gbl href="http://www.g
else top.location='/doodles/';})();</script><input value="AAPIELEAAAAAKjAd2Cy4lLwKhgib7of5MoLQmLDRW2G
setTimeout(function(){var b=document;var a="SCRIPT";"application/xhtml+xml"===b.contentType&&(a=a.toLowe
function _F_installCss(c){
(function(){google.spjs=false;google.snet=true;google.em=[];google.emm=false;})();(function(){var pnc='
<

```

Code Reference

Use `WiFi.begin()` to establish WiFi connection:

<https://www.arduino.cc/en/Reference/WiFiBegin>

To get the information of a WiFi connection:

Use `WiFi.SSID()` to get SSID of the current connected network.

<https://www.arduino.cc/en/Reference/WiFiSSID>

Use `WiFi.RSSI()` to get the signal strength of the connection.

<https://www.arduino.cc/en/Reference/WiFiRSSI>

Use `WiFi.localIP()` to get the IP address of Ameba.

<https://www.arduino.cc/en/Reference/WiFiLocalIP>

Use `WiFiClient` to create a client to handle the WiFi connection.

<https://www.arduino.cc/en/Reference/WiFiClient>

Use `HTTPClient` to create a client to handle the HTTP connection.

Use `http.get()` to send a GET request to the website.

Use Ameba to retrieve information from the Internet

Materials


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1

Example


In this example, we use Ameba to be a web client to retrieve information from the Internet.

First, make sure the correct Ameba development board is selected in “Tools” -> “Board”

Then open “File” -> “Examples” -> “AmebaWiFi” -> “WiFiWebClient”

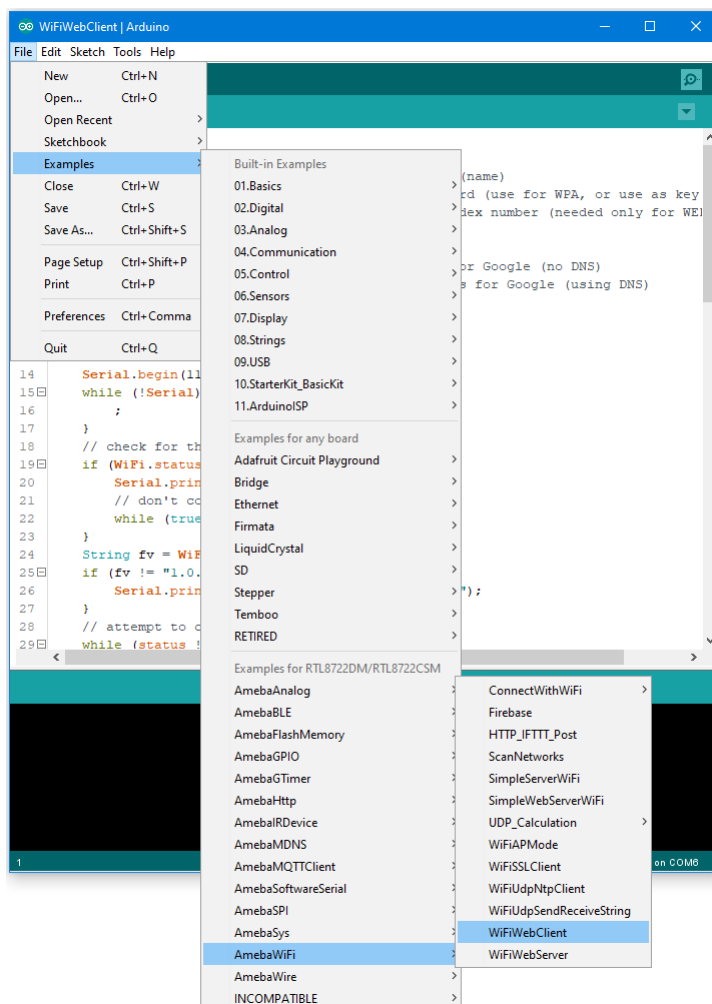

In the sample code, modify the highlighted snippet and enter the required information (ssid, password, key index) required to connect to your WiFi network.

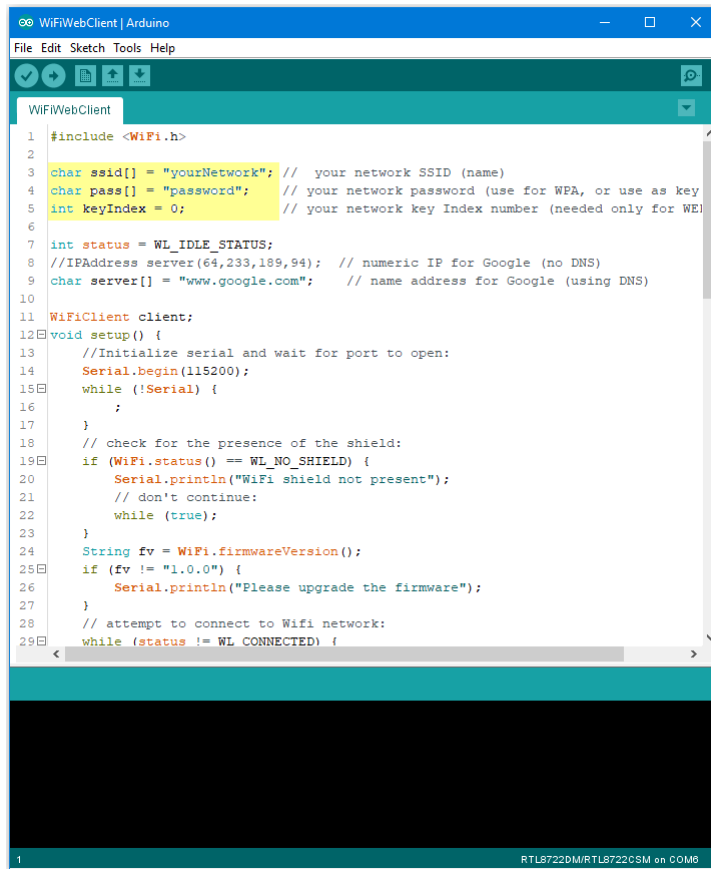


```

1 #include <WiFi.h>
2
3 char ssid[] = "yourNetwork"; // your network SSID (name)
4 char pass[] = "password"; // your network password (use for WPA, or use as key
5 int keyIndex = 0; // your network key Index number (needed only for WE
6
7 int status = WL_IDLE_STATUS;
8 //IPAddress server(64,233,189,94); // numeric IP for Google (no DNS)
9 char server[] = "www.google.com"; // name address for Google (using DNS)
10
11 WiFiClient client;
12 void setup() {
13     //Initialize serial and wait for port to open:
14     Serial.begin(115200);
15     while (!Serial) {
16         ;
17     }
18     // check for the presence of the shield:
19     if (WiFi.status() == WL_NO_SHIELD) {
20         Serial.println("WiFi shield not present");
21         // don't continue:
22         while (true);
23     }
24     String fv = WiFi.firmwareVersion();
25     if (fv != "1.0.0") {
26         Serial.println("Please upgrade the firmware");
27     }
28     // attempt to connect to Wifi network:
29     while (status != WL_CONNECTED) {

```

Upload the code and press the reset button on Ameba. Then you can see the information retrieved from Google is shown in the Arduino serial monitor.

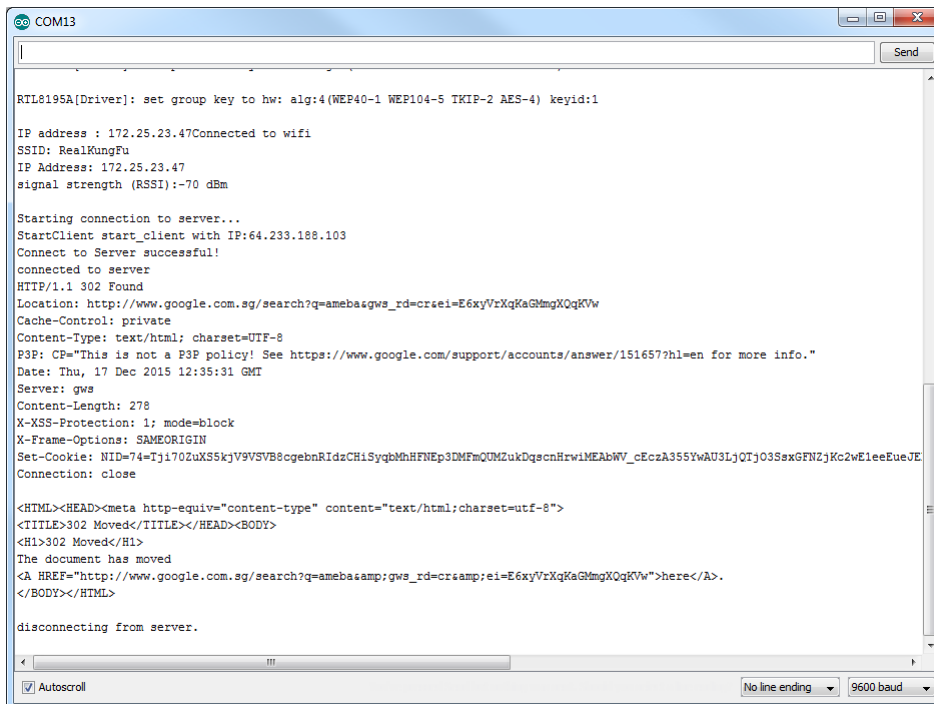

```

RTL8195A[Driver]: set group key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4) keyid:1

IP address : 172.25.23.47Connected to wifi
SSID: RealKungFu
IP Address: 172.25.23.47
signal strength (RSSI): -70 dBm

Starting connection to server...
StartClient start_client with IP:64.233.188.103
Connect to Server successful!
connected to server
HTTP/1.1 302 Found
Location: http://www.google.com.sg/search?q=amebas&gws_rd=cr&ei=E6xyVrXqKaGmngXQqKVw
Cache-Control: private
Content-Type: text/html; charset=UTF-8
P3P: CP="This is not a P3P policy! See https://www.google.com/support/accounts/answer/151657?hl=en for more info."
Date: Thu, 17 Dec 2015 12:35:31 GMT
Server: gws
Content-Length: 278
X-XSS-Protection: 1; mode=block
X-Frame-Options: SAMEORIGIN
Set-Cookie: NID=74=Tji70ZuX55kjV9VSVB8cgebnRIdzChISyqkMhHFNEp3DMFmQUMZukDqscnHrwiMEAbWV_cEcA355YwAU3LjQTj03SsxGFNZjKc2wE1eeEueJE
Connection: close

<HTML><HEAD><meta http-equiv="content-type" content="text/html; charset=utf-8">
<TITLE>302 Moved</TITLE></HEAD><BODY>
<H1>302 Moved</H1>
The document has moved
<A HREF="http://www.google.com.sg/search?q=amebas&gws_rd=cr&ei=E6xyVrXqKaGmngXQqKVw">here</A>.
</BODY></HTML>

disconnecting from server.

```

Code Reference

<https://www.arduino.cc/en/Reference/WiFiBegin>

To get the information of a WiFi connection: Use `WiFi.SSID()` to get SSID of the current connected network.

<https://www.arduino.cc/en/Reference/WiFiSSID>

Use `WiFi.RSSI()` to get the signal strength of the connection.

<https://www.arduino.cc/en/Reference/WiFiRSSI>

Use `WiFi.localIP()` to get the IP address of Ameba.

<https://www.arduino.cc/en/Reference/WiFiLocalIP>

Use `WiFiClient()` to create a client.

<https://www.arduino.cc/en/Reference/WiFiClient>

Use `client.connect()` to connect to the IP address and port specified.

<https://www.arduino.cc/en/Reference/WiFiClientConnect>

Use `client.println()` to print data followed by a carriage return and newline.

<https://www.arduino.cc/en/Reference/WiFiClientPrintln>

Use `client.available()` to return the number of bytes available for reading.

<https://www.arduino.cc/en/Reference/WiFiClientAvailable>

Use `client.read()` to read the next byte received from the server the client is connected to.

<https://www.arduino.cc/en/Reference/WiFiClientRead>

Use `client.stop()` to disconnect from the server the client is connected to.

<https://www.arduino.cc/en/Reference/WiFiClientStop>

Use Ameba as Server to control LED

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Breadboard x 1
- LED x 1
- 1K Ω Resistor x 1


Procedure


In this example, we connect Ameba to WiFi and use Ameba as server, the user can control the LED on/off through a webpage.

First, connect Ameba with the LED.


In a LED, the longer pin is the positive pole, and the shorter pin is the negative pole. So, we connect the shorter pin to GND and connect the longer pin to D13. Additionally, to avoid the electric current exceeds the tolerance of the LED and causes damage, we connect a resistance on the positive pole.

RTL8722DM / RTL8722CSM Wiring Diagram:

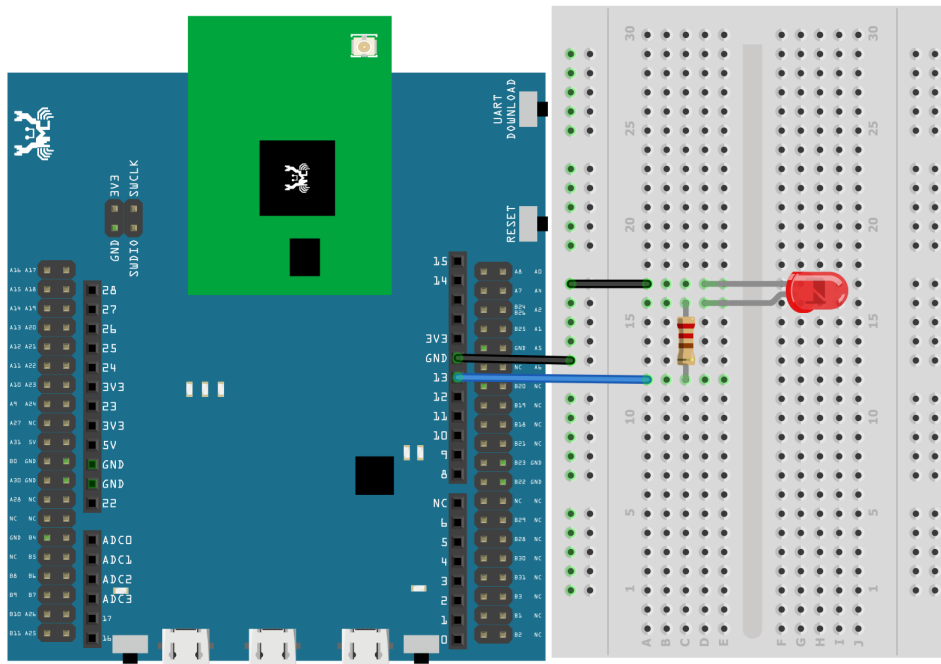


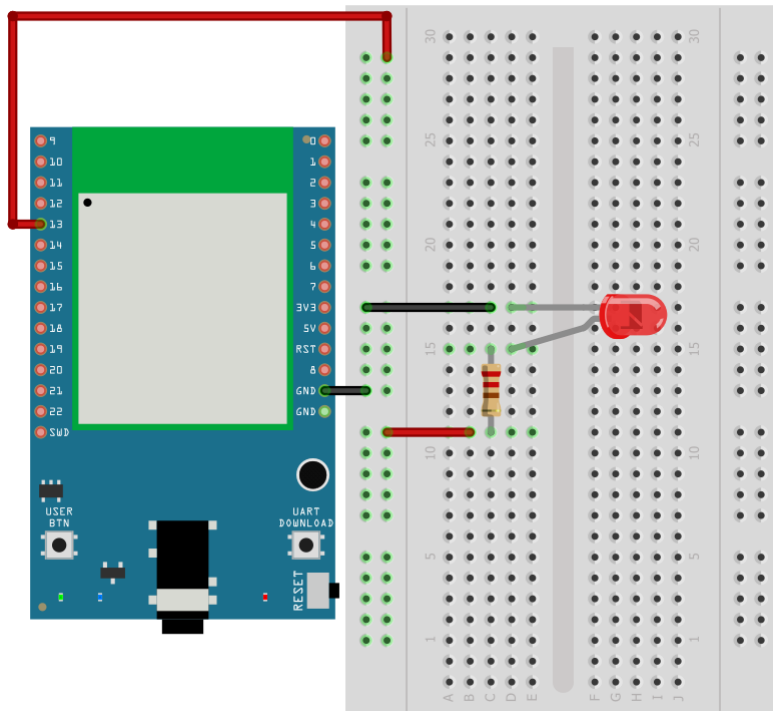

Then open “File” -> “Examples” -> “AmebaWiFi” -> “SimpleWebServerWiFi”

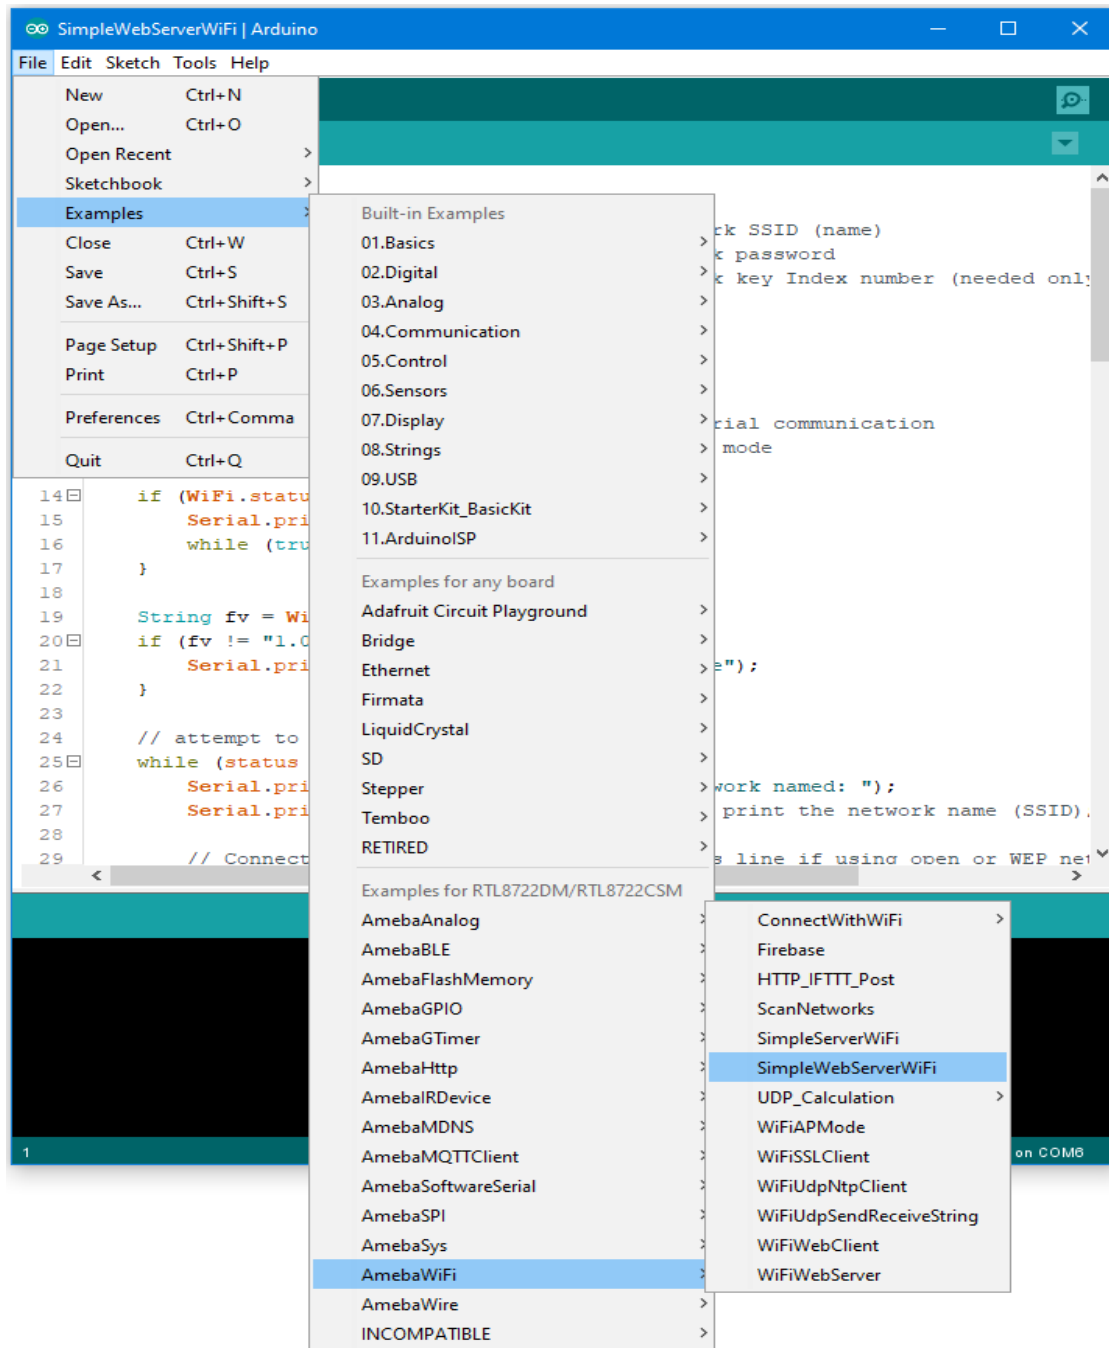

In the sample code, modify the highlighted snippet to corresponding information.

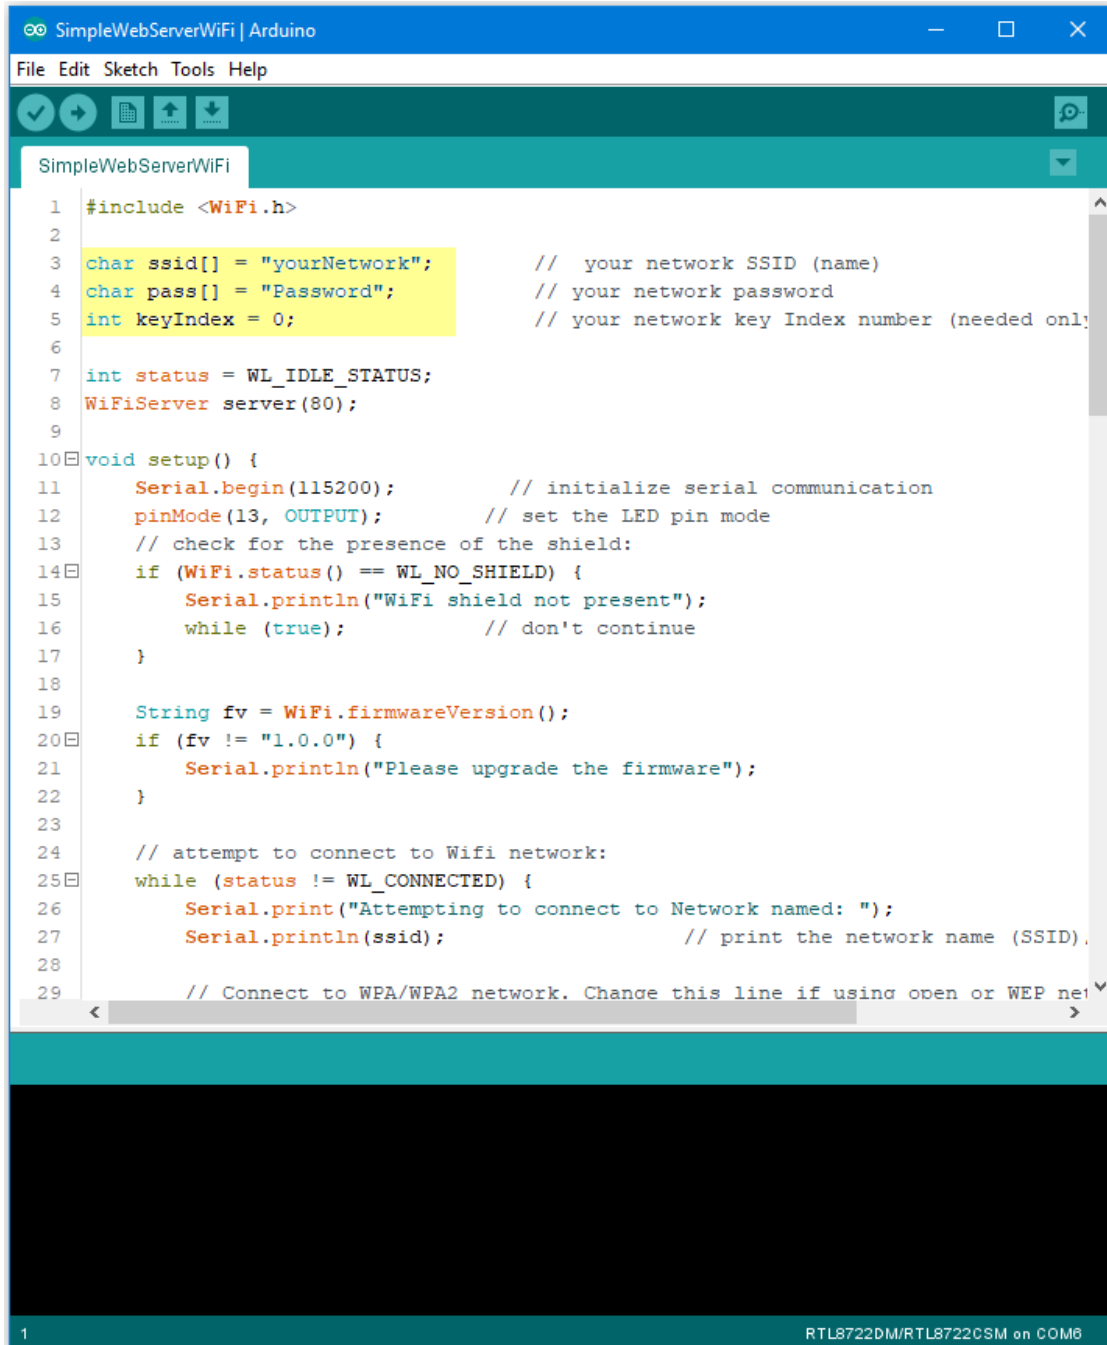

```


SimpleWebServerWiFi
1  #include <WiFi.h>
2
3  char ssid[] = "yourNetwork";      // your network SSID (name)
4  char pass[] = "Password";         // your network password
5  int keyIndex = 0;                 // your network key Index number (needed only)
6
7  int status = WL_IDLE_STATUS;
8  WiFiServer server(80);
9
10 void setup() {
11     Serial.begin(115200);          // initialize serial communication
12     pinMode(13, OUTPUT);           // set the LED pin mode
13     // check for the presence of the shield:
14     if (WiFi.status() == WL_NO_SHIELD) {
15         Serial.println("WiFi shield not present");
16         while (true);              // don't continue
17     }
18
19     String fv = WiFi.firmwareVersion();
20     if (fv != "1.0.0") {
21         Serial.println("Please upgrade the firmware");
22     }
23
24     // attempt to connect to Wifi network:
25     while (status != WL_CONNECTED) {
26         Serial.print("Attempting to connect to Network named: ");
27         Serial.println(ssid);        // print the network name (SSID)
28
29         // Connect to WPA/WPA2 network. Change this line if using open or WEP network

```

Upload the code and press the reset button on Ameba. When the connection is established, you will see the message:

"To see this page in action, open a browser to <http://xxx.xxx.xxx.xxx>"

in the Arduino IDE as shown in the figure:

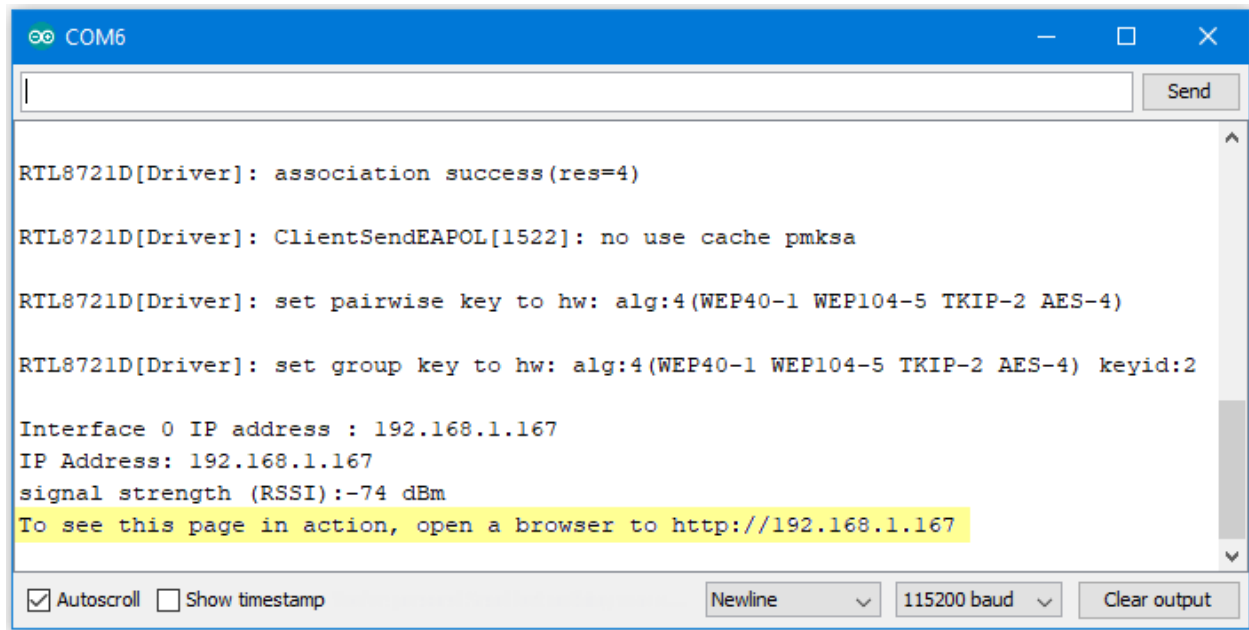


COM6

Send

```
RTL8721D[Driver]: association success(res=4)
RTL8721D[Driver]: ClientSendEAPOL[1522]: no use cache pmksa
RTL8721D[Driver]: set pairwise key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4)
RTL8721D[Driver]: set group key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4) keyid:2
Interface 0 IP address : 192.168.1.167
IP Address: 192.168.1.167
signal strength (RSSI):-74 dBm
To see this page in action, open a browser to http://192.168.1.167
```

☒ Autoscroll ☐ Show timestamp Newline 115200 baud Clear output

Next, open the browser of a computer or a cell phone under the same WiFi domain, enter the address in the message.

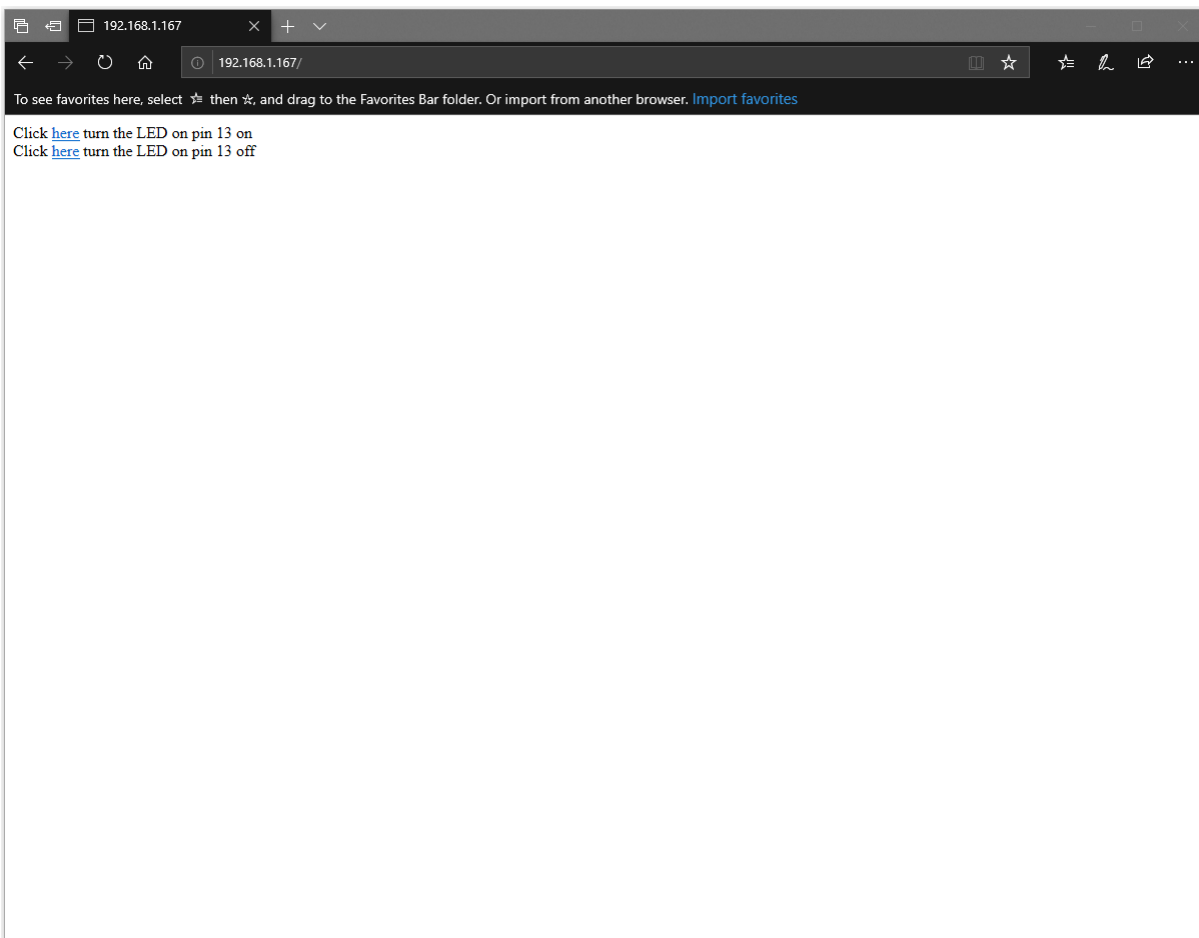

In the webpage, you can turn on/off the LED.

Code Reference

Use `WiFi.begin()` to establish WiFi connection.

<https://www.arduino.cc/en/Reference/WiFiBegin>

To get the information of a WiFi connection:

Use `WiFi.SSID()` to get SSID of the current connected network.

<https://www.arduino.cc/en/Reference/WiFiSSID>

Use `WiFi.RSSI()` to get the signal strength of the connection.

<https://www.arduino.cc/en/Reference/WiFiRSSI>

Use `WiFi.localIP()` to get the IP address of Ameba.

<https://www.arduino.cc/en/Reference/WiFiLocalIP>

Use `WiFiServer server()` to create a server that listens on the specified port.

<https://www.arduino.cc/en/Reference/WiFiServer>

Use `server.begin()` to tell the server to begin listening for incoming connections.

<https://www.arduino.cc/en/Reference/WiFiServerBegin>

Use `server.available()` to get a client that is connected to the server and has data available for reading.

<https://www.arduino.cc/en/Reference/WiFiServerAvailable>

Use `client.connected()` to get whether or not the client is connected.

<https://www.arduino.cc/en/Reference/WiFiClientConnected>

Use `client.println()` to print data followed by a carriage return and newline.

<https://www.arduino.cc/en/Reference/WiFiClientPrintln>

Use `client.print()` to print data to the server that a client is connected to.

<https://www.arduino.cc/en/Reference/WiFiClientPrint>

Use `client.available()` to return the number of bytes available for reading.

<https://www.arduino.cc/en/Reference/WiFiClientAvailable>

Use `client.read()` to read the next byte received from the server the client is connected to.

<https://www.arduino.cc/en/Reference/WiFiClientRead>

Use `client.stop()` to disconnect from the server the client is connected to.

<https://www.arduino.cc/en/Reference/WiFiClientStop>

Use Ameba as Server to send Ameba status


Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1


Example

In this example, we connect Ameba to WiFi and use Ameba as server to send message to connected client.

First, open “File” -> “Examples” -> “AmebaWiFi” -> “WiFiWebServer”

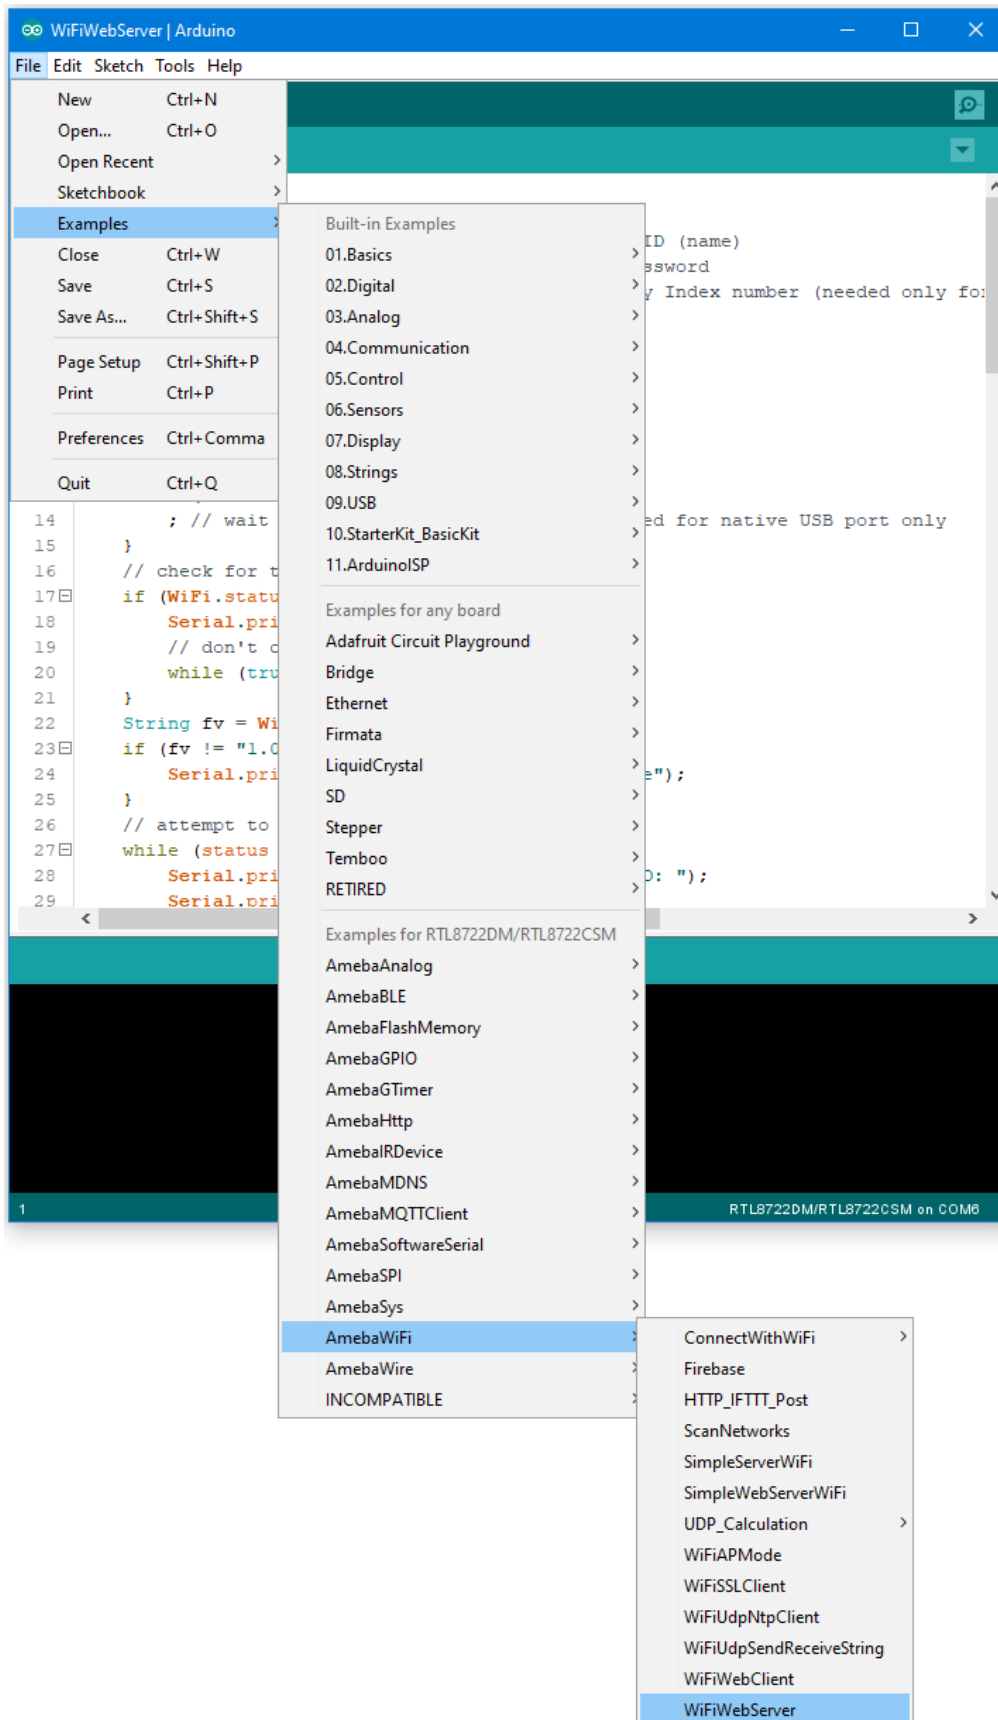

In the sample code, modify the highlighted snippet and enter the required information (ssid, password, key index) required to connect to your WiFi network.

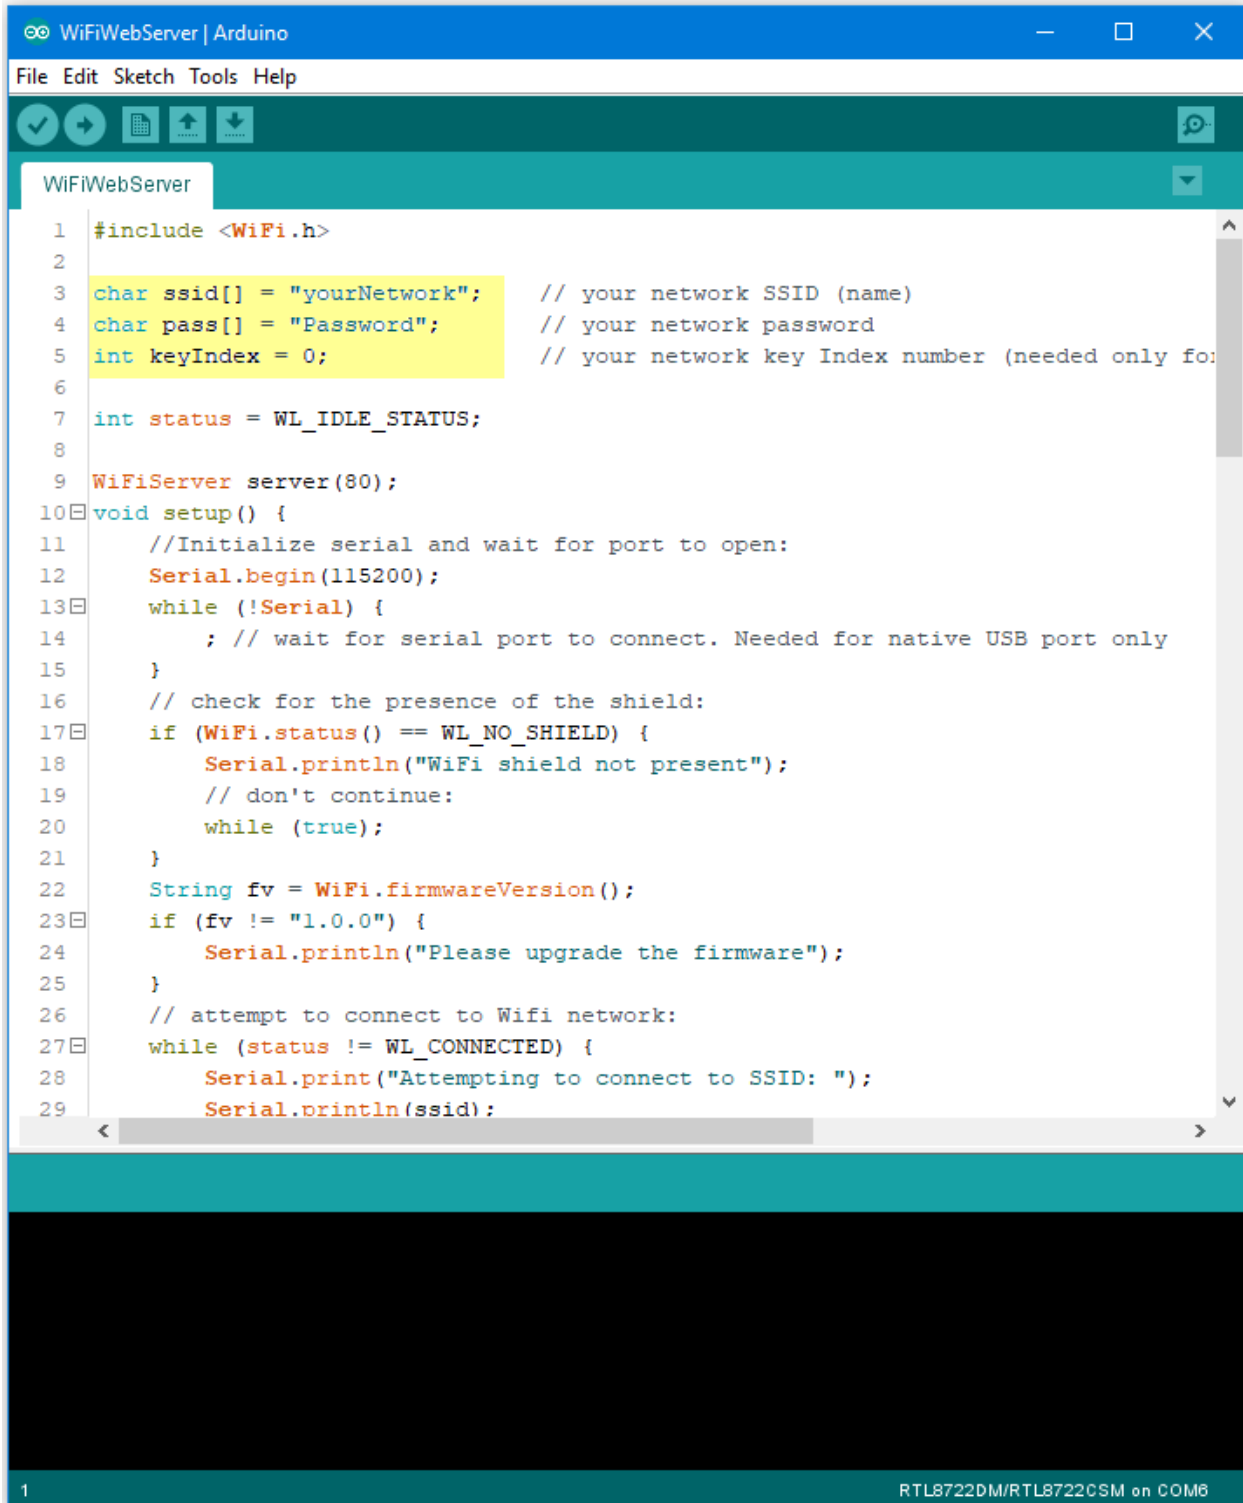


```
WiFiWebServer | Arduino
File Edit Sketch Tools Help

WiFiWebServer

1 #include <WiFi.h>
2
3 char ssid[] = "yourNetwork"; // your network SSID (name)
4 char pass[] = "Password"; // your network password
5 int keyIndex = 0; // your network key Index number (needed only for
6
7 int status = WL_IDLE_STATUS;
8
9 WiFiServer server(80);
10 void setup() {
11     //Initialize serial and wait for port to open:
12     Serial.begin(115200);
13     while (!Serial) {
14         ; // wait for serial port to connect. Needed for native USB port only
15     }
16     // check for the presence of the shield:
17     if (WiFi.status() == WL_NO_SHIELD) {
18         Serial.println("WiFi shield not present");
19         // don't continue:
20         while (true);
21     }
22     String fv = WiFi.firmwareVersion();
23     if (fv != "1.0.0") {
24         Serial.println("Please upgrade the firmware");
25     }
26     // attempt to connect to Wifi network:
27     while (status != WL_CONNECTED) {
28         Serial.print("Attempting to connect to SSID: ");
29         Serial.println(ssid);
```

Upload the code and press the reset button on Ameba. After connecting to WiFi, Ameba starts to run as server. The IP of the server is shown in the serial monitor, and port is 80.

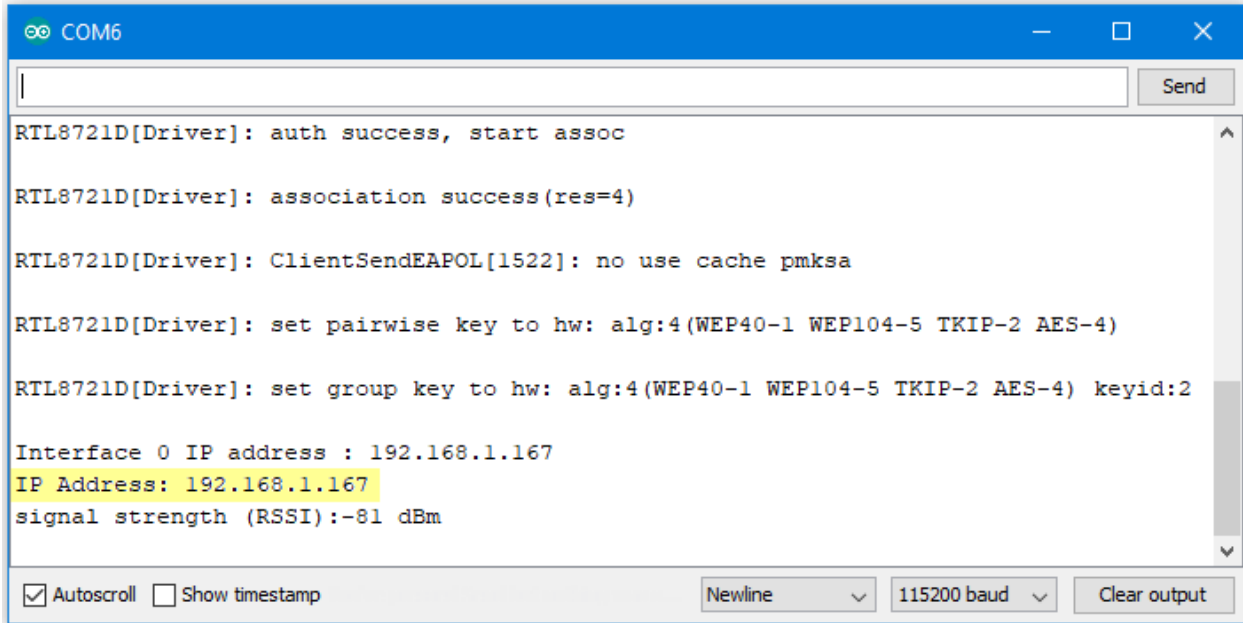


The screenshot shows a terminal window titled "COM6". The text inside the terminal is as follows:

```
RTL8721D[Driver]: auth success, start assoc  
RTL8721D[Driver]: association success(res=4)  
RTL8721D[Driver]: ClientSendEAPOL[1522]: no use cache pmksa  
RTL8721D[Driver]: set pairwise key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4)  
RTL8721D[Driver]: set group key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4) keyid:2  
Interface 0 IP address : 192.168.1.167  
IP Address: 192.168.1.167  
signal strength (RSSI):-81 dBm
```

At the bottom of the window, there are controls: a checked "Autoscroll" checkbox, an unchecked "Show timestamp" checkbox, a "Newline" dropdown menu, a "115200 baud" dropdown menu, and a "Clear output" button.

We connect to the server in a browser, and we can see the data sent from the server.

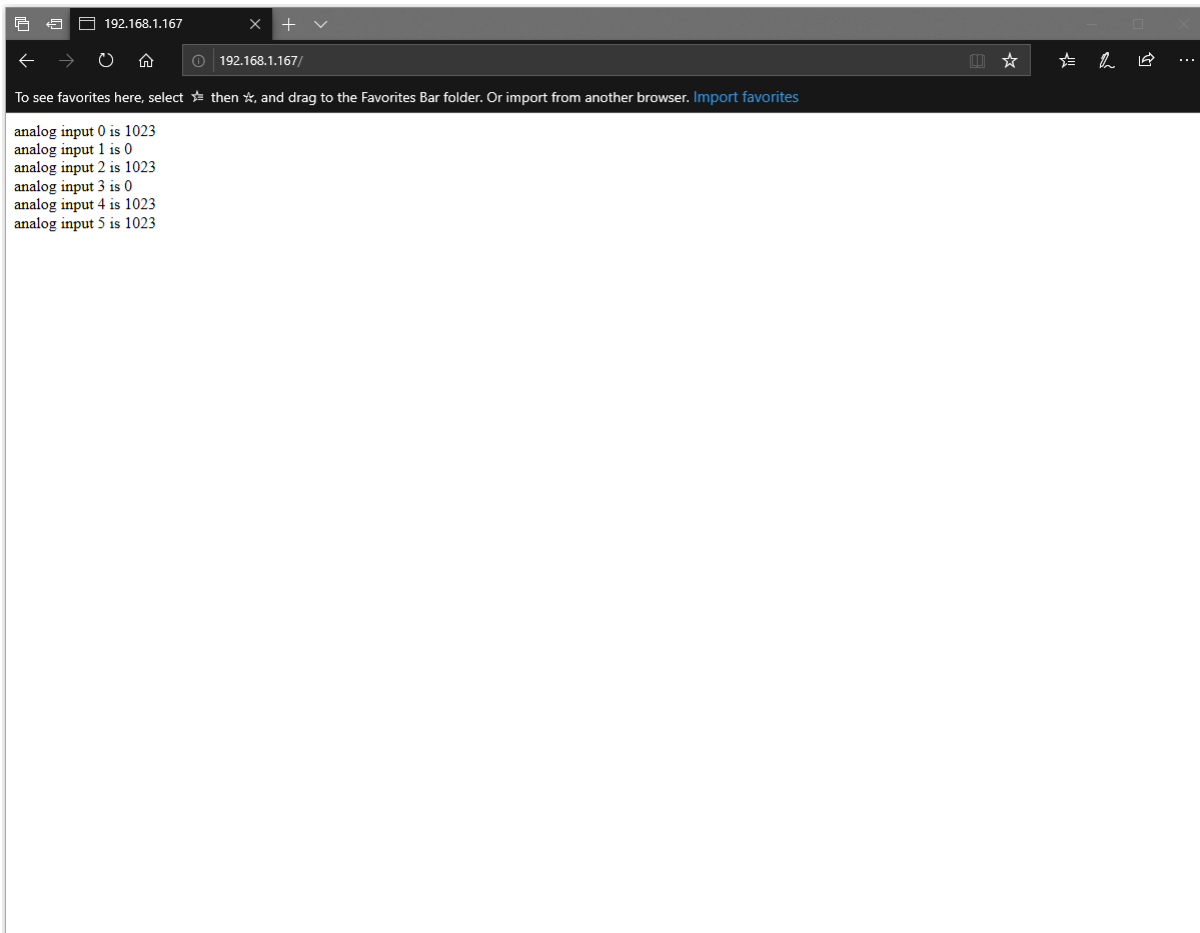

The screenshot shows a web browser window with the address bar set to "192.168.1.167". The page content displays the following text:

```
analog input 0 is 1023  
analog input 1 is 0  
analog input 2 is 1023  
analog input 3 is 0  
analog input 4 is 1023  
analog input 5 is 1023
```

Code Reference

Use `WiFi.begin()` to establish WiFi connection.

<https://www.arduino.cc/en/Reference/WiFiBegin>

To get the information of a WiFi connection:

Use `WiFi.SSID()` to get SSID of the current connected network.

<https://www.arduino.cc/en/Reference/WiFiSSID>

Use `WiFi.RSSI()` to get the signal strength of the connection.

<https://www.arduino.cc/en/Reference/WiFiRSSI>

Use `WiFi.localIP()` to get the IP address of Ameba.

<https://www.arduino.cc/en/Reference/WiFiLocalIP>

Use `WiFiServer server()` to create a server that listens on the specified port.

<https://www.arduino.cc/en/Reference/WiFiServer>

Use `server.begin()` to tell the server to begin listening for incoming connections.

<https://www.arduino.cc/en/Reference/WiFiServerBegin>

Use `server.available()` to get a client that is connected to the server and has data available for reading.

<https://www.arduino.cc/en/Reference/WiFiServerAvailable>

Use `client.connected()` to check whether or not the client is connected.

<https://www.arduino.cc/en/Reference/WiFiClientConnected>

Use `client.println()` to print data followed by a carriage return and newline.

<https://www.arduino.cc/en/Reference/WiFiClientPrintln>

Use `client.print()` to print data to the server that a client is connected to.

<https://www.arduino.cc/en/Reference/WiFiClientPrint>

Use `client.available()` to return the number of bytes available for reading.

<https://www.arduino.cc/en/Reference/WiFiClientAvailable>

Use `client.read()` to read the next byte received from the server the client is connected to.

<https://www.arduino.cc/en/Reference/WiFiClientRead>

Use `client.stop()` to disconnect from the server the client is connected to.

<https://www.arduino.cc/en/Reference/WiFiClientStop>

Use Ameba as UDP server


Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1


Example

In this example, we connect Ameba to WiFi and use Ameba to be an UDP server. When Ameba receives a message from UDP client, it replies “acknowledged” message to client.

Open the WiFi Web Server example. “File” -> “Examples” -> “AmebaWiFi” -> “WiFiUdpSendReceiveString”

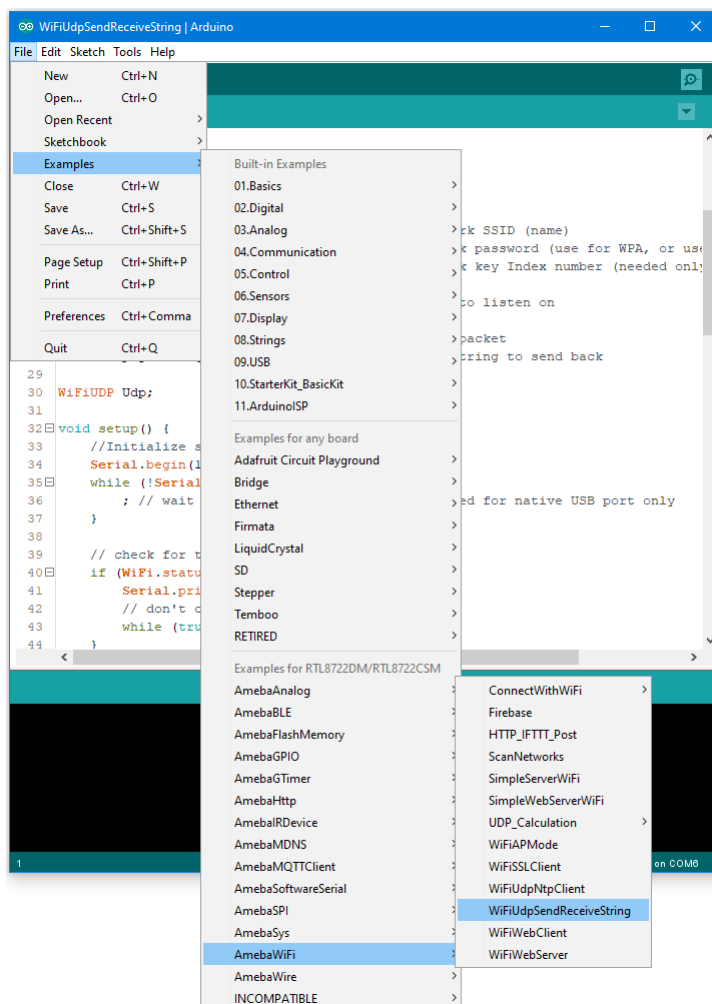


Modify the highlighted code section (ssid, password, keyindex) to connect to your WiFi network.

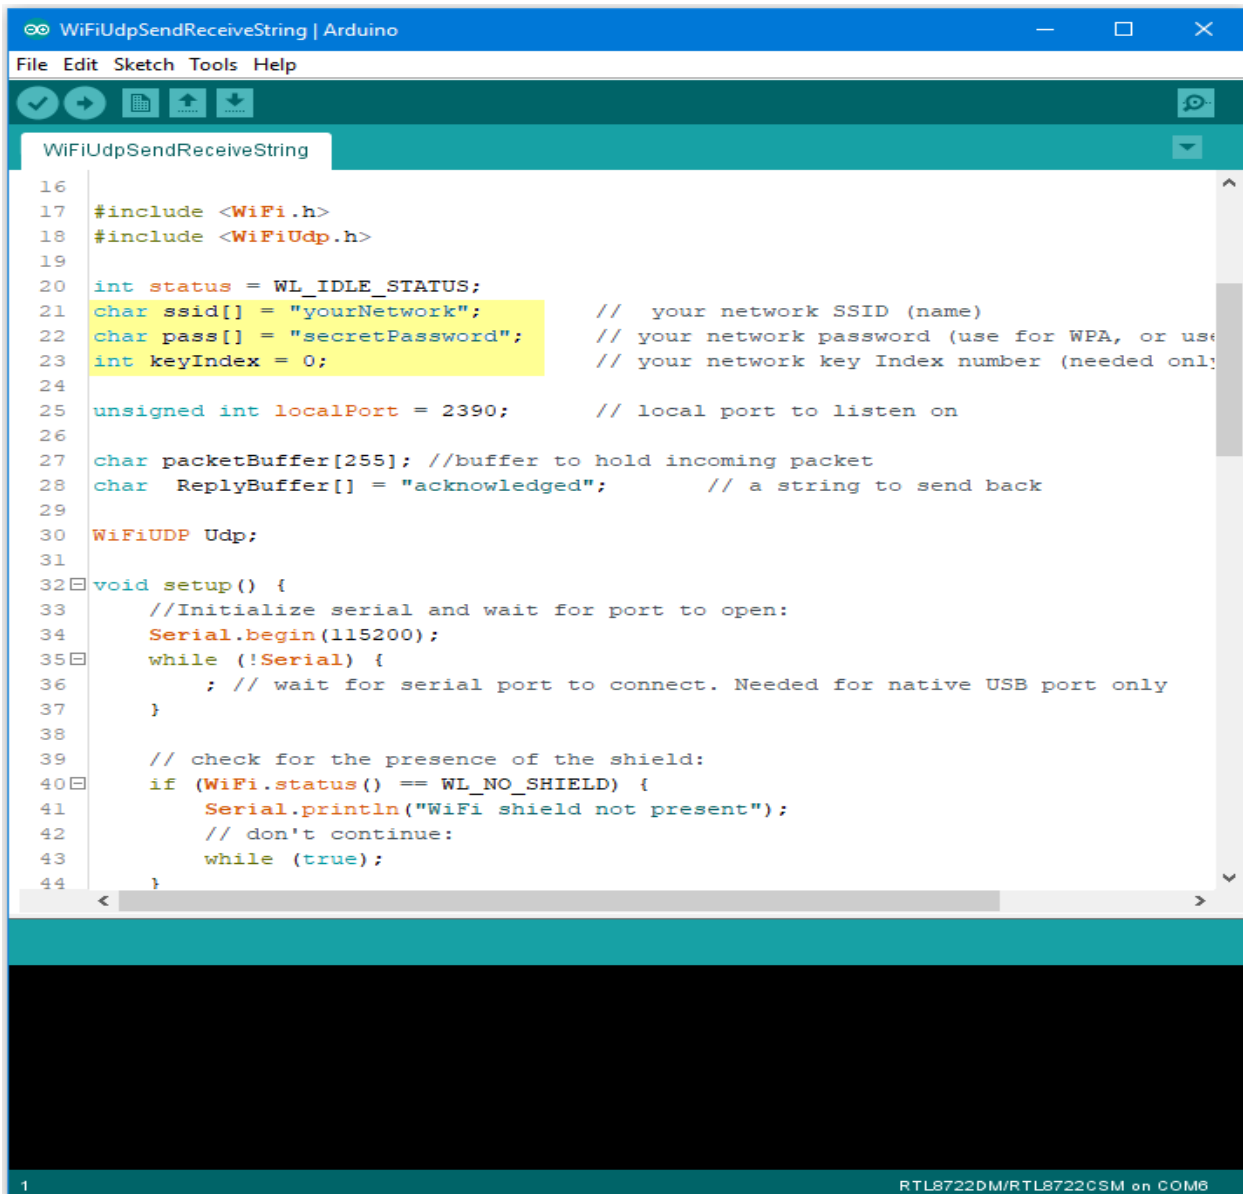The image shows the Arduino IDE interface with a sketch named 'WiFiUdpSendReceiveString'. The code is for a WiFi UDP server. It includes the necessary headers, defines network credentials (SSID, password, key index), and sets a local port of 2390. The setup function initializes the serial port and checks for the presence of the WiFi shield. The main loop (though not fully visible) would handle incoming UDP packets. The status bar at the bottom indicates the hardware is 'RTL8722DM/RTL8722CSM on COM8'.

```
16
17 #include <WiFi.h>
18 #include <WiFiUdp.h>
19
20 int status = WL_IDLE_STATUS;
21 char ssid[] = "yourNetwork"; // your network SSID (name)
22 char pass[] = "secretPassword"; // your network password (use for WPA, or use
23 int keyIndex = 0; // your network key Index number (needed only)
24
25 unsigned int localPort = 2390; // local port to listen on
26
27 char packetBuffer[255]; //buffer to hold incoming packet
28 char ReplyBuffer[] = "acknowledged"; // a string to send back
29
30 WiFiUDP Udp;
31
32 void setup() {
33     //Initialize serial and wait for port to open:
34     Serial.begin(115200);
35     while (!Serial) {
36         ; // wait for serial port to connect. Needed for native USB port only
37     }
38
39     // check for the presence of the shield:
40     if (WiFi.status() == WL_NO_SHIELD) {
41         Serial.println("WiFi shield not present");
42         // don't continue:
43         while (true);
44     }
```


Compile the code and upload it to Ameba. After pressing the Reset button, Ameba connects to WiFi and starts the UDP server with port 2390. After the UDP server starts service, Ameba prints the “Starting connection to server” message and waits for client connection.

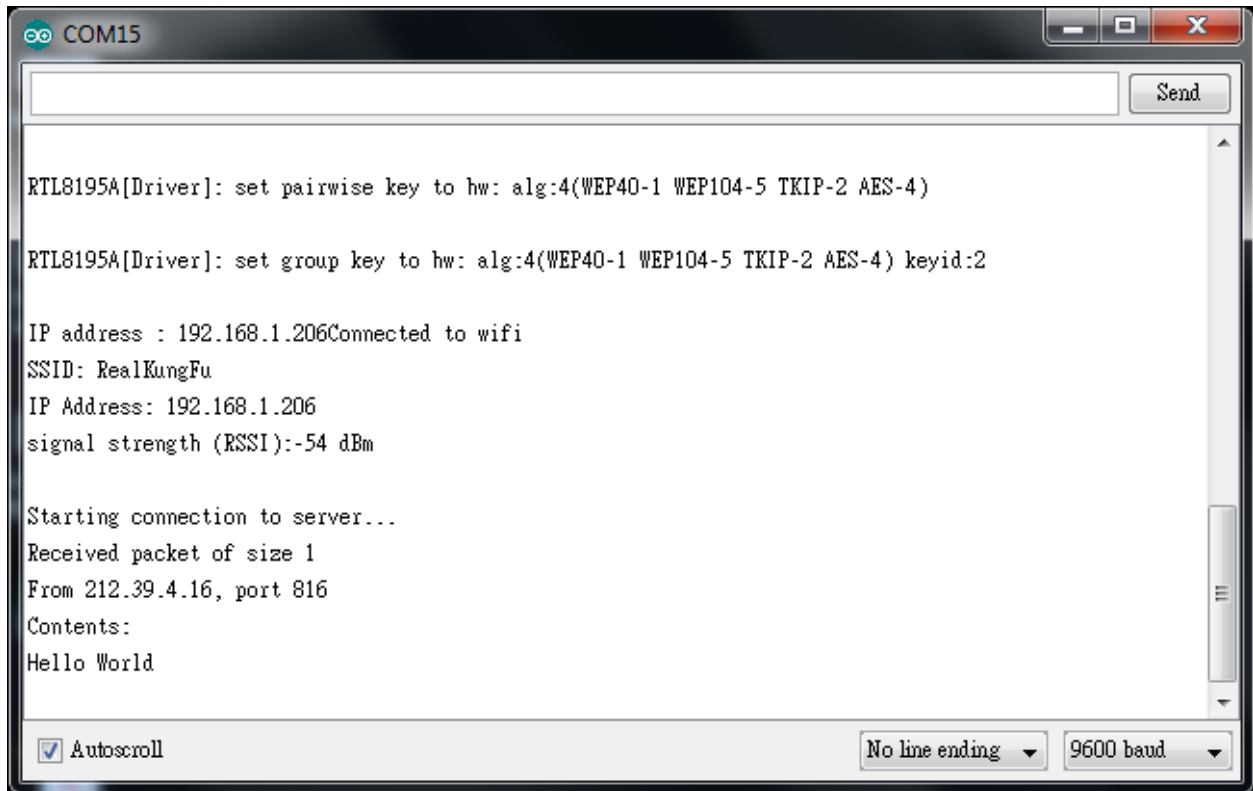

As to the UDP client, we use “sokit” program in the computer to connect to UDP server.

Choose client mode and fill in the IP of UDP server (which is the IP of Ameba) and port 2390, then click “UDP Connect” .

After the connection is established, fill in “Hello World” in the Buf 0 field in sokit and click “Send” . Then you can see the Ameba UDP server replies “acknowledged” .

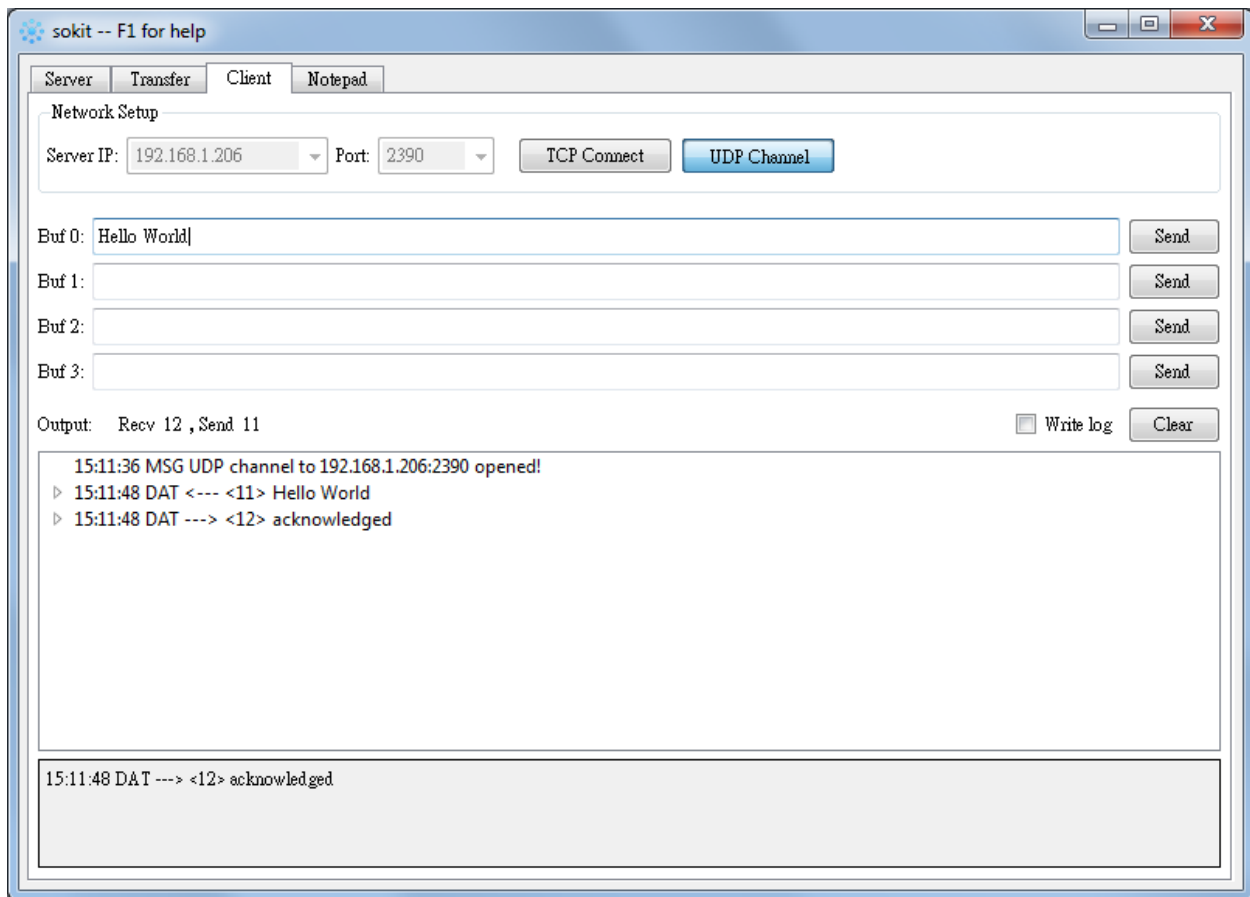

Code Reference

Refer to the Arduino tutorial for detailed information about this example.

<https://www.arduino.cc/en/Tutorial/WiFiSendReceiveUDPString>

First, use `begin()` to open an UDP port on Ameba.

<https://www.arduino.cc/en/Reference/WiFiUDPBgin>

Use `parsePacket()` to wait for data from client.

<https://www.arduino.cc/en/Reference/WiFiUDPParsePacket>

When a connection is established, use `remoteIP()` and `remotePort()` to get the IP and port of the client.

<https://www.arduino.cc/en/Reference/WiFiUDPRemoteIP>

Then use `read()` to read the data sent by client.

<https://www.arduino.cc/en/Reference/WiFiUDPRead>

To send reply, use `beginPacket()`, `write()`, `end()`.

<https://www.arduino.cc/en/Reference/WiFiUDPBeginPacket>

<https://www.arduino.cc/en/Reference/WiFiUDPWrite>

<https://www.arduino.cc/en/Reference/WiFiUDPEndPacket>

Retrieve Universal Time (UTC) By Ameba


Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1

Example

In this example, we connect Ameba to WiFi. Then send NTP (Network Time Protocol, RFC 1305) request to NTP server using UDP. After receiving the NTP request, the NTP server replies current UTC (Coordinated Universal Time) packet. We will parse the UTC packet to show current UTC time in the serial monitor.

Open the example: “File” -> “Examples” -> “AmebaWiFi” -> “WiFiUdpNtpClient”

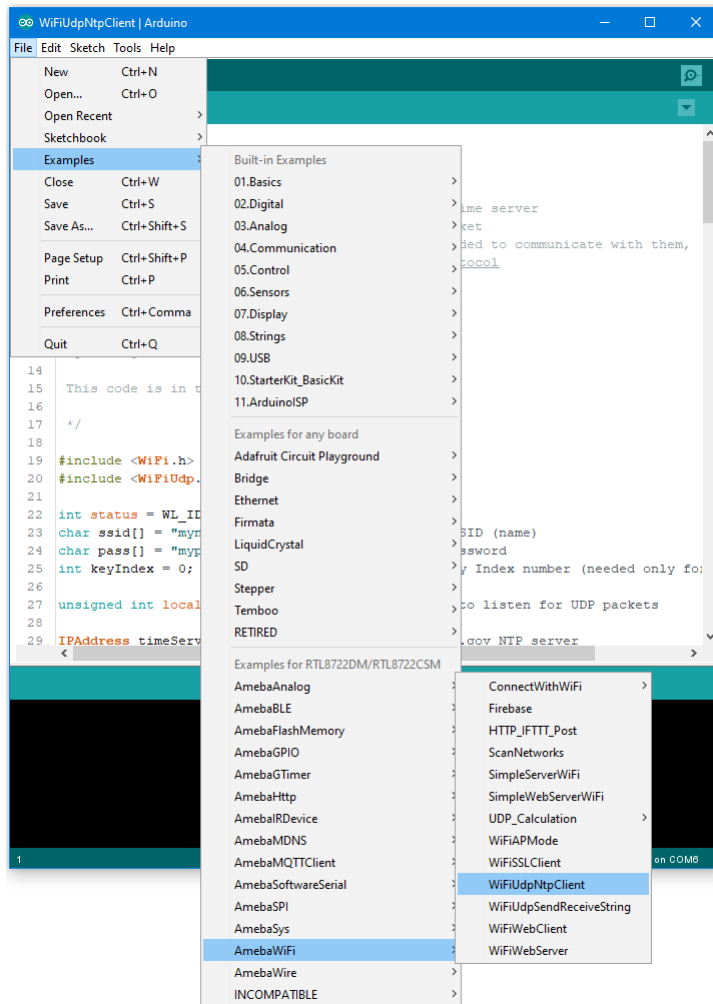

Modify the highlighted code section (ssid, password, keyindex) to connect to your WiFi network.

```

11  by Michael Margolis
12  modified 9 Apr 2012
13  by Tom Igoe
14
15  This code is in the public domain.
16
17  */
18
19  #include <WiFi.h>
20  #include <WiFiUdp.h>
21
22  int status = WL_IDLE_STATUS;
23  char ssid[] = "mynetwork"; // your network SSID (name)
24  char pass[] = "mypassword"; // your network password
25  int keyIndex = 0; // your network key Index number (needed only for
26
27  unsigned int localPort = 2390; // local port to listen for UDP packets
28
29  IPAddress timeServer(129, 6, 15, 28); // time.nist.gov NTP server
30
31  const int NTP_PACKET_SIZE = 48; // NTP time stamp is in the first 48 bytes of the
32
33  byte packetBuffer[ NTP_PACKET_SIZE]; //buffer to hold incoming and outgoing packets
34
35  // A UDP instance to let us send and receive packets over UDP
36  WiFiUDP Udp;
37
38  void setup() {
39    // Open serial communications and wait for port to open:

```

Compile the code and upload it to Ameba. After pressing the Reset button, Ameba connects to WiFi and sends NTP request packet to NTP server “129.6.15.28” .

We parse the replied packet and show UTC time in serial monitor:

```

Interface 0 IP address : 192.168.1.167Connected to wifi

IP Address: 192.168.1.167
signal strength (RSSI):-80 dBm


Starting connection to server...
1
packet received
Seconds since Jan 1 1900 = 3798154620
Unix time = 1589165820
The UTC time is 2:57:00
1
packet received
Seconds since Jan 1 1900 = 3798154631
Unix time = 1589165831
The UTC time is 2:57:11
1

```

Use MQTT To Upload And Listen To Data

Intro to MQTT

MQTT (Message Queuing Telemetry Transport) is a protocol proposed by IBM and Eurotech. The introduction in [MQTT Official Website](#): MQTT is a machine-to-machine (M2M)/"Internet of Things" connectivity protocol. It was designed as an extremely lightweight publish/subscribe messaging transport. We can say MQTT is a protocol designed for IoT. MQTT is based on TCP/IP and transmits/receives data via publish/subscribe. Please refer to the figure below:

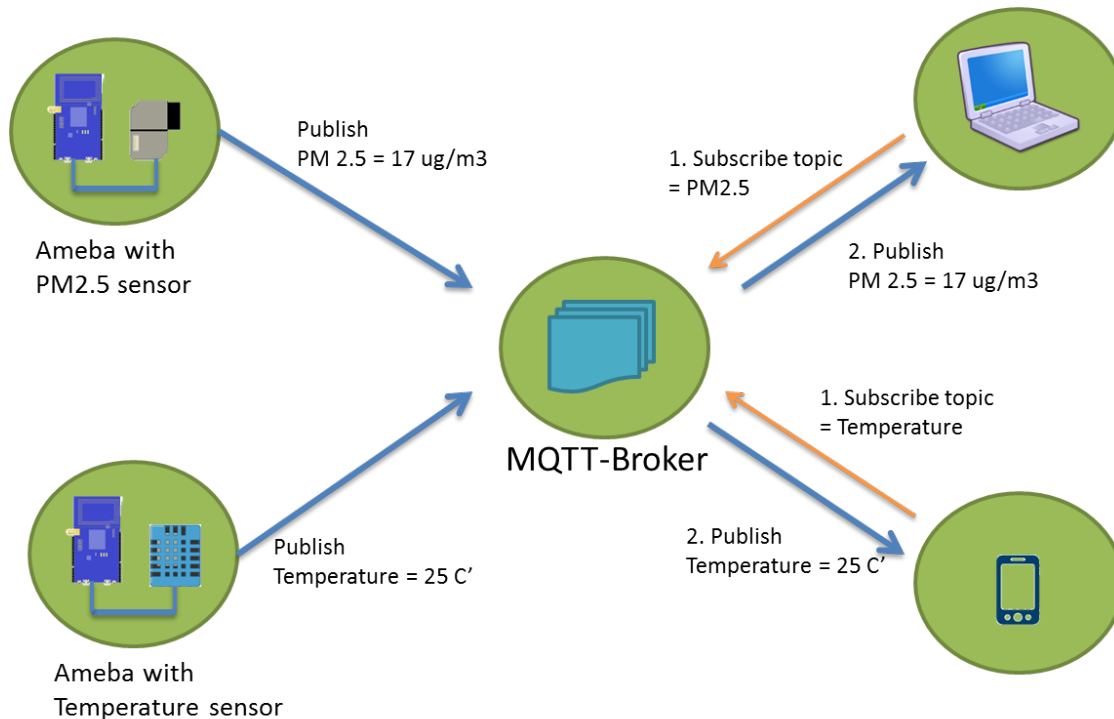

In the operation of MQTT, there are several roles:

- **Publisher:** Usually publishers are the devices equipped with sensors (ex. Ameba). Publishers uploads the data of the sensors to MQTT-Broker, which serves as a database with MQTT service.
- **Subscriber:** Subscribers are referred to the devices which receive and observe messages, such as a laptop or a mobile phone.
- **Topic:** Topic is used to categorized the messages, for example the topic of a message can be "PM2.5" or "Temperature". Subscribers can choose messages of which topics they want to receive.


Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1

Example

In this example, we connect Ameba to MQTT-Broker. Then send messages as publisher and receive messages from MQTT-Broker as subscriber.

Open the MQTT example “File” -> “Examples” -> “AmebaMQTTClient” -> “MQTT_Basic”

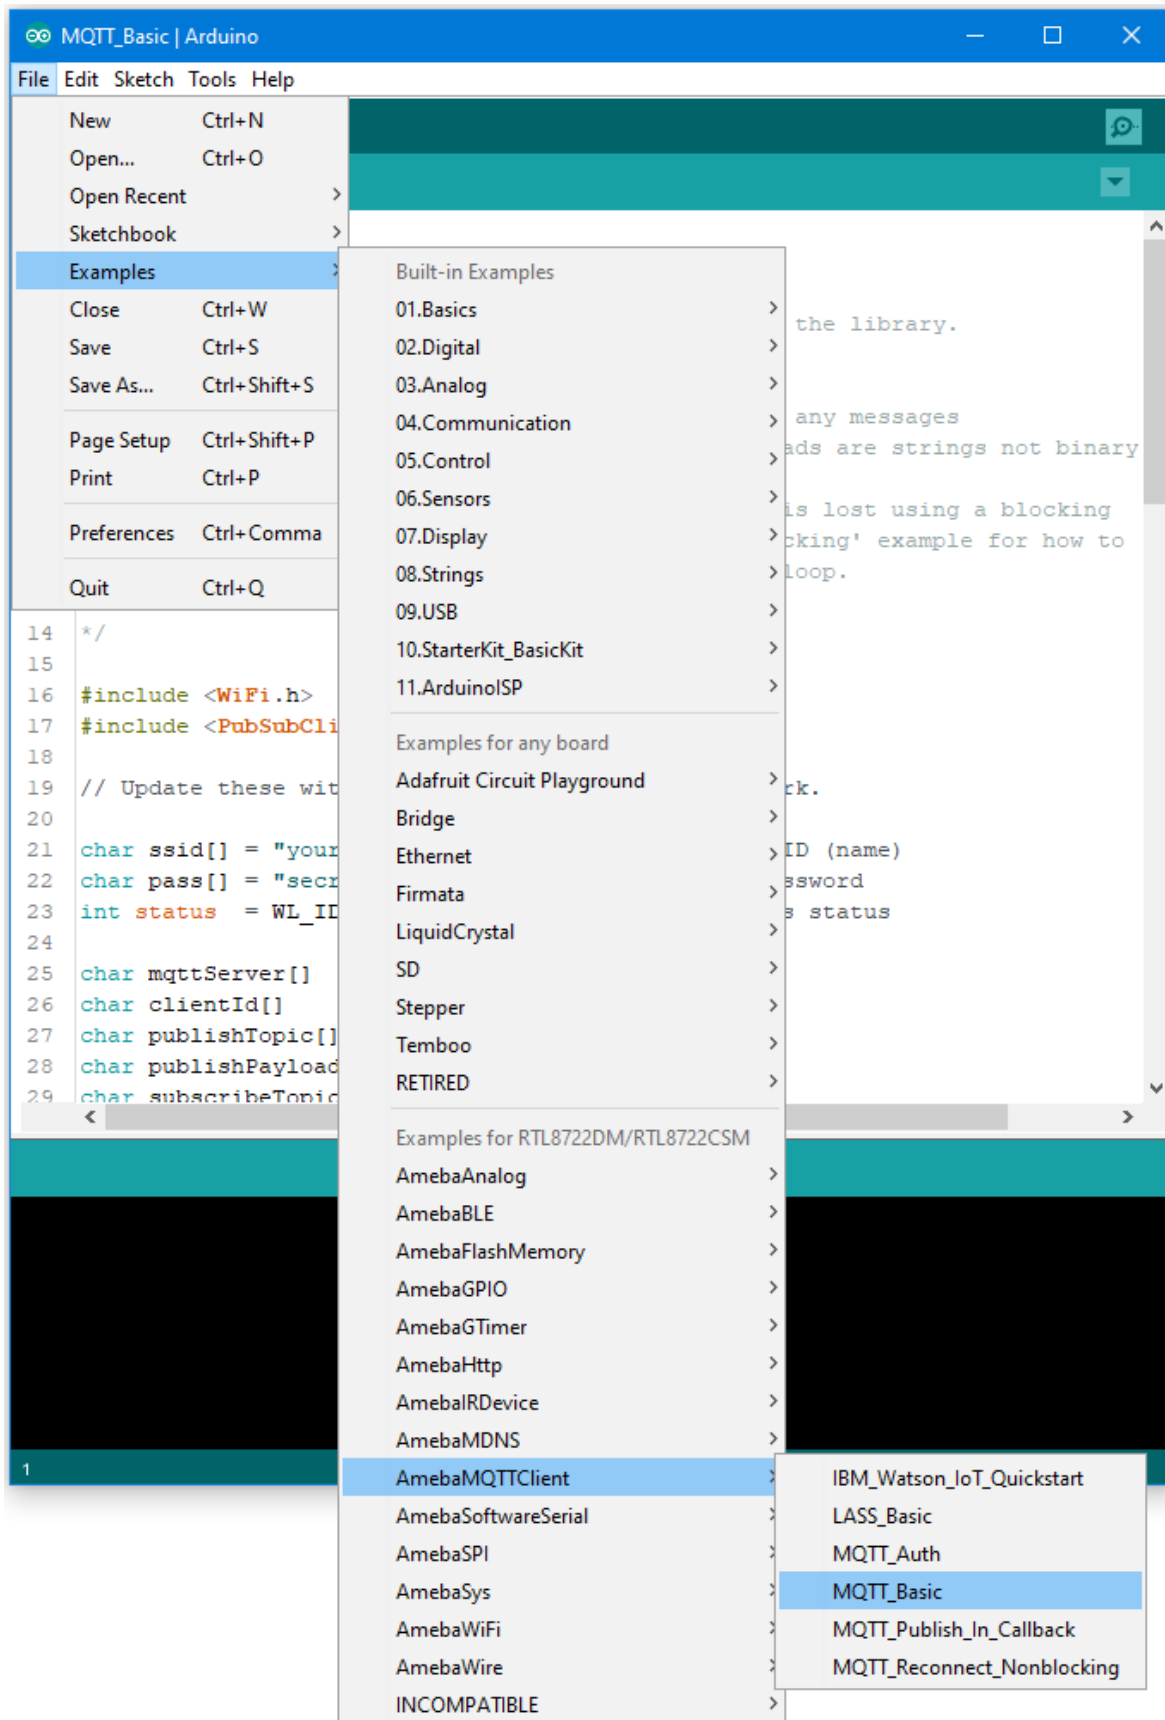

Please modify some WiFi-related parameters.

And some information related to MQTT:

```

MQTT_Basic | Arduino
File Edit Sketch Tools Help


MQTT_Basic
6   - publishes "hello world" to the topic "outTopic"
7   - subscribes to the topic "inTopic", printing out any messages
8     it receives. NB - it assumes the received payloads are strings not binary
9
10  It will reconnect to the server if the connection is lost using a blocking
11  reconnect function. See the 'mqtt_reconnect_nonblocking' example for how to
12  achieve the same result without blocking the main loop.
13
14  */
15
16  #include <WiFi.h>
17  #include <PubSubClient.h>
18
19  // Update these with values suitable for your network.
20
21  char ssid[] = "yourNetwork";    // your network SSID (name)
22  char pass[] = "secretPassword"; // your network password
23  int status = WL_IDLE_STATUS;    // the Wifi radio's status
24
25  char mqttServer[] = "test.mosquitto.org";
26  char clientId[] = "amebaClient";
27  char publishTopic[] = "outTopic";
28  char publishPayload[] = "hello world";
29  char subscribeTopic[] = "inTopic";
30
31  void callback(char* topic, byte* payload, unsigned int length) {
32    Serial.print("Message arrived [");
33    Serial.print(topic);
34    Serial.print("] ");
  
```

1 RTL8722DM/RTL8722CSM on COM8

The “mqttServer” refers to the MQTT-Broker, we use the free MQTT sandbox “test.mosquitto.org” for testing.

- “clientId” is an identifier for MQTT-Broker to identify the connected device.
- “publishTopic” is the topic of the published message, we use “outTopic” in the example. The devices subscribe to “outTopic” will receive the message.
- “publishPayload” is the content to be published.
- “subscribeTopic” is to tell MQTT-broker which topic we want to subscribe to.

Next, compile the code and upload it to Ameba. Press the reset button, then open the serial monitor

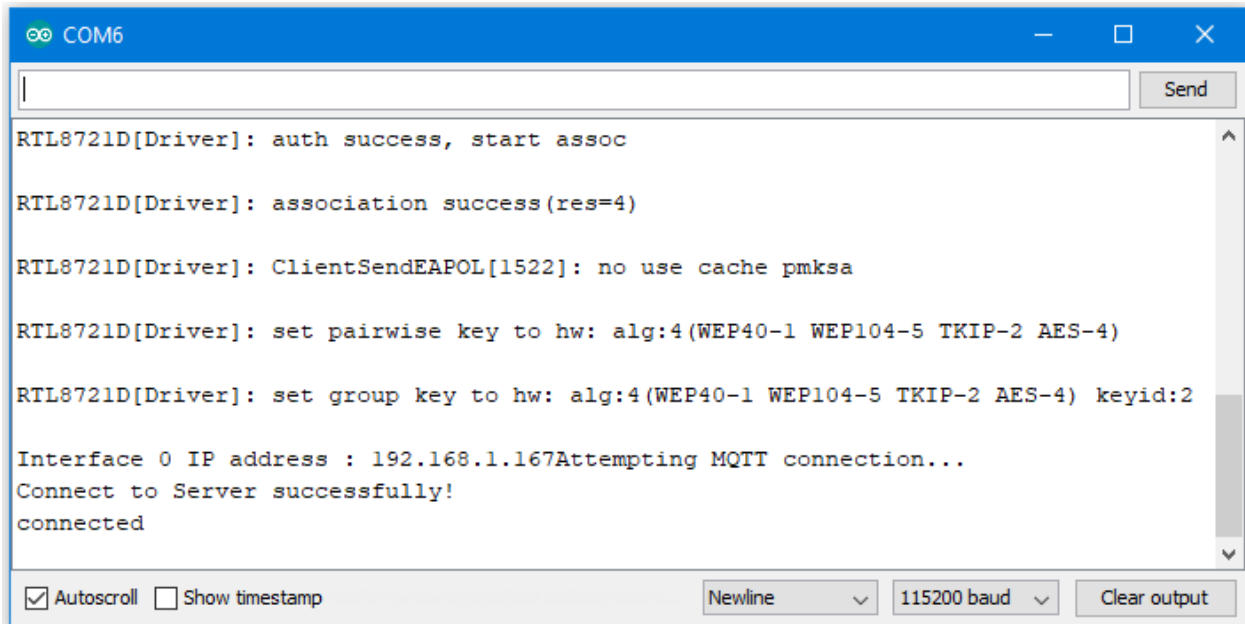

The screenshot shows a serial monitor window with a blue title bar labeled 'COM6'. The main area displays the following log messages:


```
RTL8721D[Driver]: auth success, start assoc
RTL8721D[Driver]: association success(res=4)
RTL8721D[Driver]: ClientSendEAPOL[1522]: no use cache pmksa
RTL8721D[Driver]: set pairwise key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4)
RTL8721D[Driver]: set group key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4) keyid:2
Interface 0 IP address : 192.168.1.167Attempting MQTT connection...
Connect to Server successfully!
connected
```

At the bottom, there are controls: a checked 'Autoscroll' checkbox, an unchecked 'Show timestamp' checkbox, a 'Newline' dropdown menu, a '115200 baud' dropdown menu, and a 'Clear output' button.

After Ameba is connected to MQTT server, it sends the message “hello world” to “outTopic” .

To see the message, we need another MQTT client.


Here we use a chrome plugin “MQTTLens” to be the MQTT client. You can find it in google webstore.

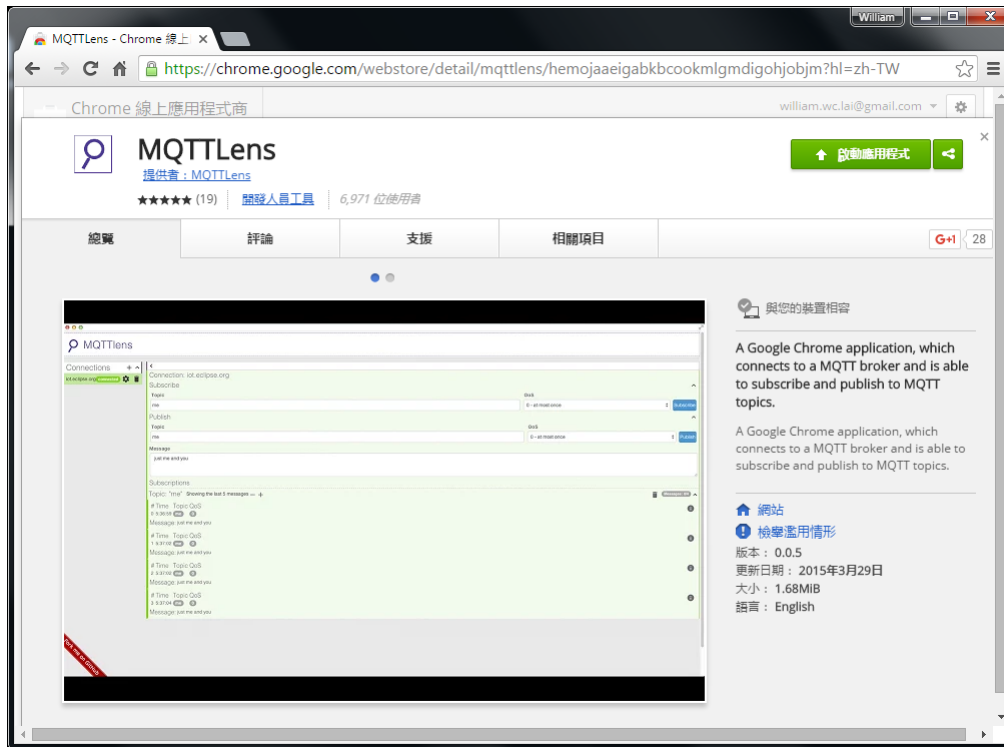

Install and open the MQTTLens, click “+” next to “Connection” on the left, and fill in the required information

- **Connection Name:** Used to identify the connection, you can choose a name you like.
- **Hostname:** The MQTT-Broker server, here we use “iot.eclipse.org”
- **Client ID:** We use the default randomly generated ID.


Then click “CREATE CONNECTION” .

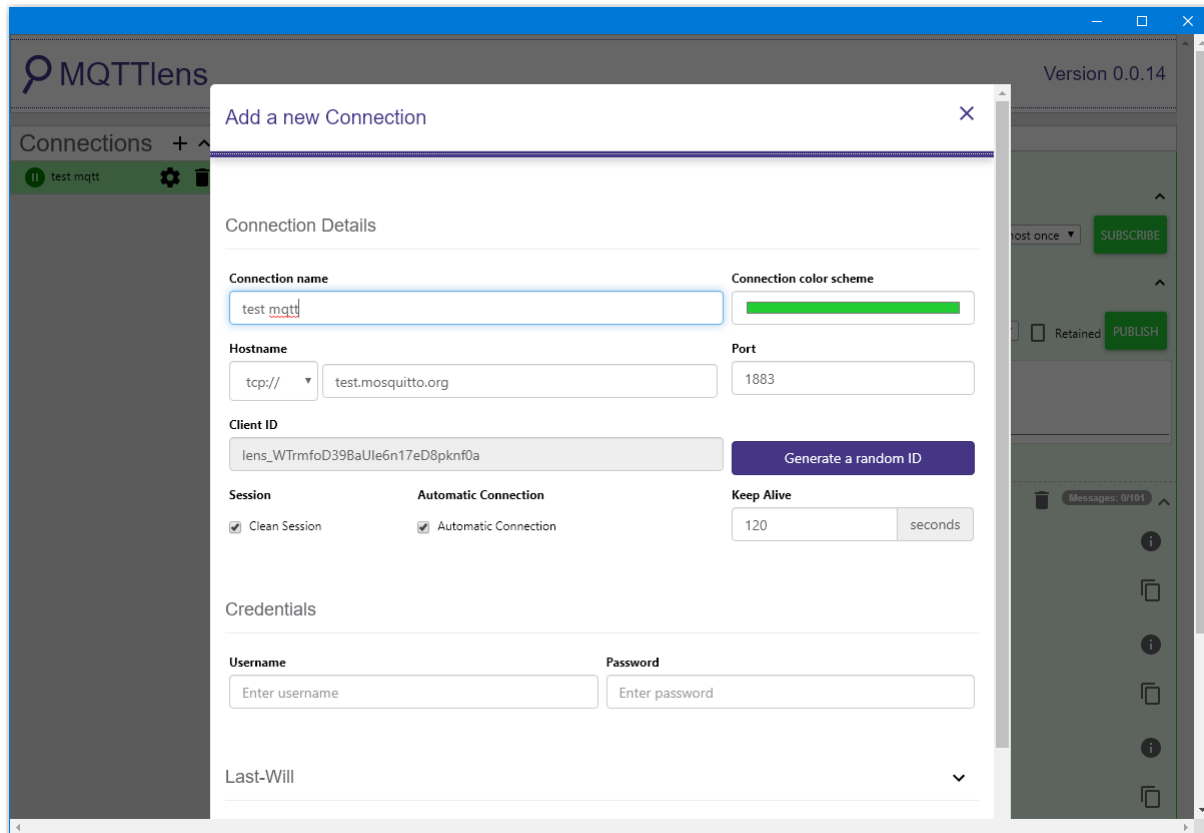

Since we have not registered the topic we want to listen to, we would not receive any messages now.

Fill in “outTopic” in the “Topic” field and click “Subscribe” .

Wait for Ameba to send next message (or you can press the reset button). Then you can see the “hello world” message show up.

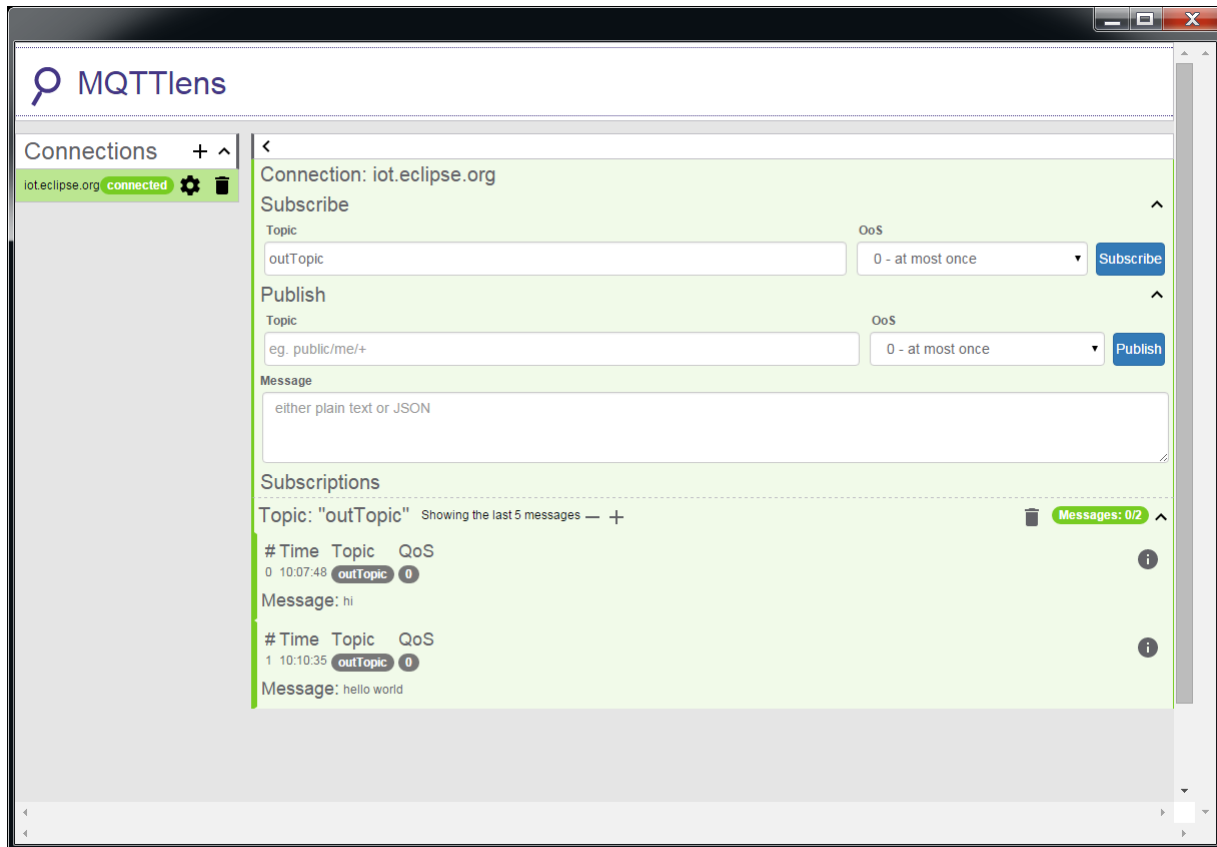

Use Amazon AWS IoT Shadow Service

Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1


Example

Introduction

Amazon AWS IoT is a cloud IoT service platform:

Amazon AWS IoT is a platform that enables you to connect devices to AWS Services and other devices, secure data and interactions, process and act upon device data, and enable applications to interact with devices even when they are offline. (<https://aws.amazon.com/iot/how-it-works/>)

The service architecture of AWS IoT:

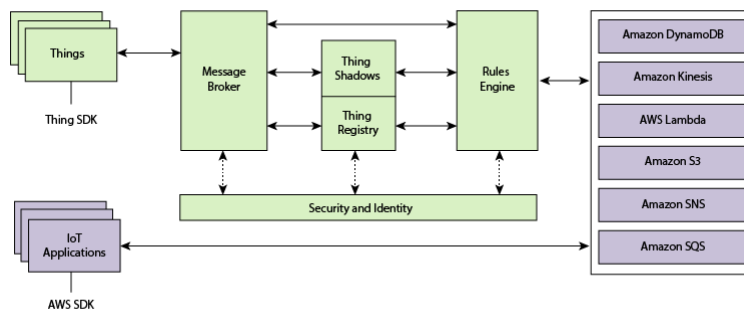

(Picture from <http://docs.aws.amazon.com/iot/latest/developerguide/aws-iot-how-it-works.html>)

In the architecture, Ameba belongs to the upper-left “Things” block. A TLS secure channel will be established between “Things” and the MQTT Message Broker. Afterwards, “Things” and “Message Broker” communicate using MQTT Protocol via this secure channel. Behind the “Message Broker”, the “Thing Shadows” keeps messages temporarily when Ameba is offline, and sends the control message to Ameba next time it is connected. The “Rules Engine” allows you to place restrictions to the behavior of Things or to connect Things to other services of Amazon.


AWS Management Console

First, create an account and sign up for AWS IoT [service:https://aws.amazon.com/](https://aws.amazon.com/)


Afterwards, log in to the Amazon Management Console and click “IoT Core” found under services -> Internet of Things.

Then you will enter the home page of AWS IoT. To offer the best service quality, Amazon offers servers in different regions for users to choose from.


Click the region dropdown menu at the upper-right:

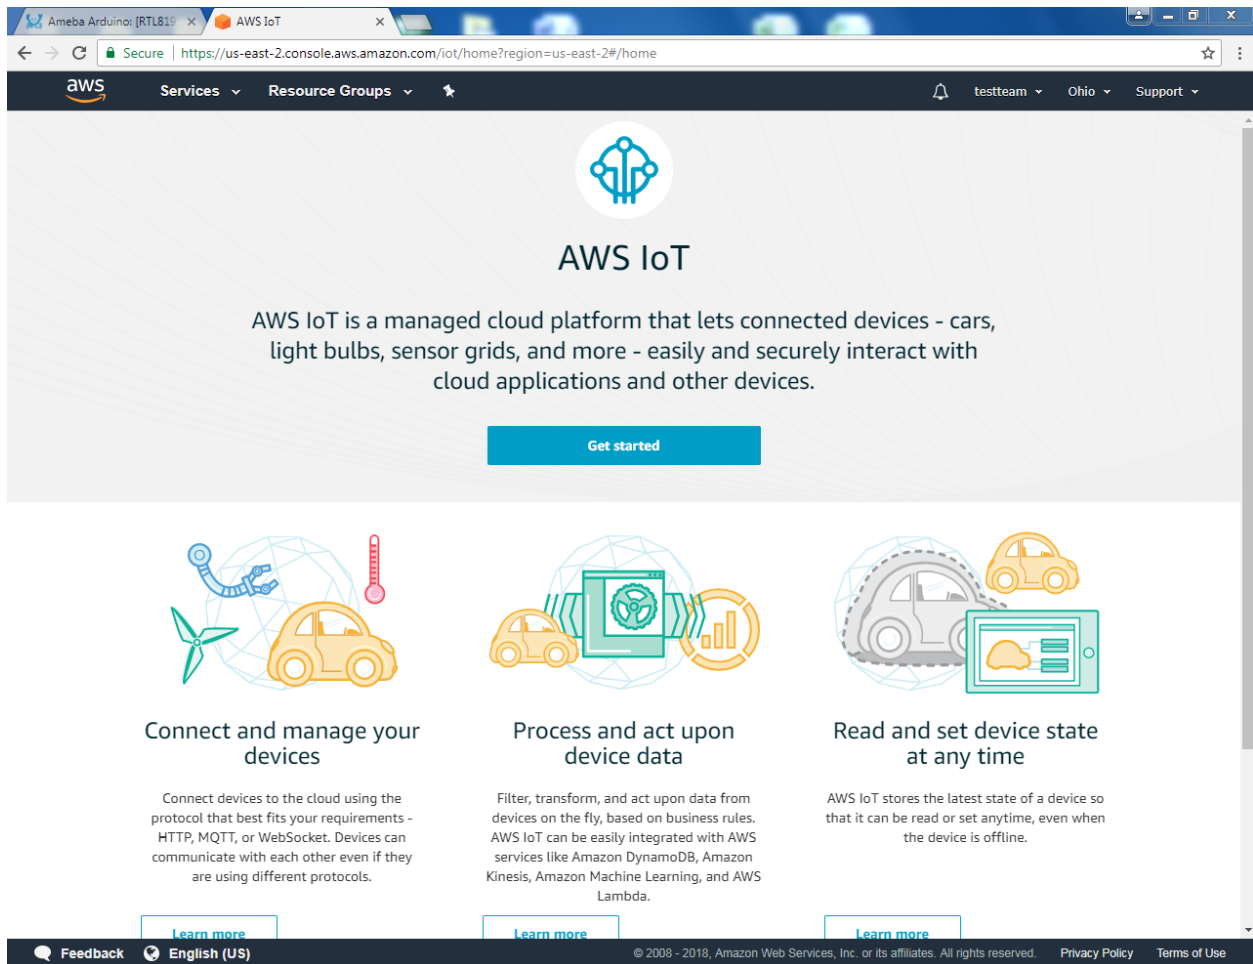


Choose a nearby region.

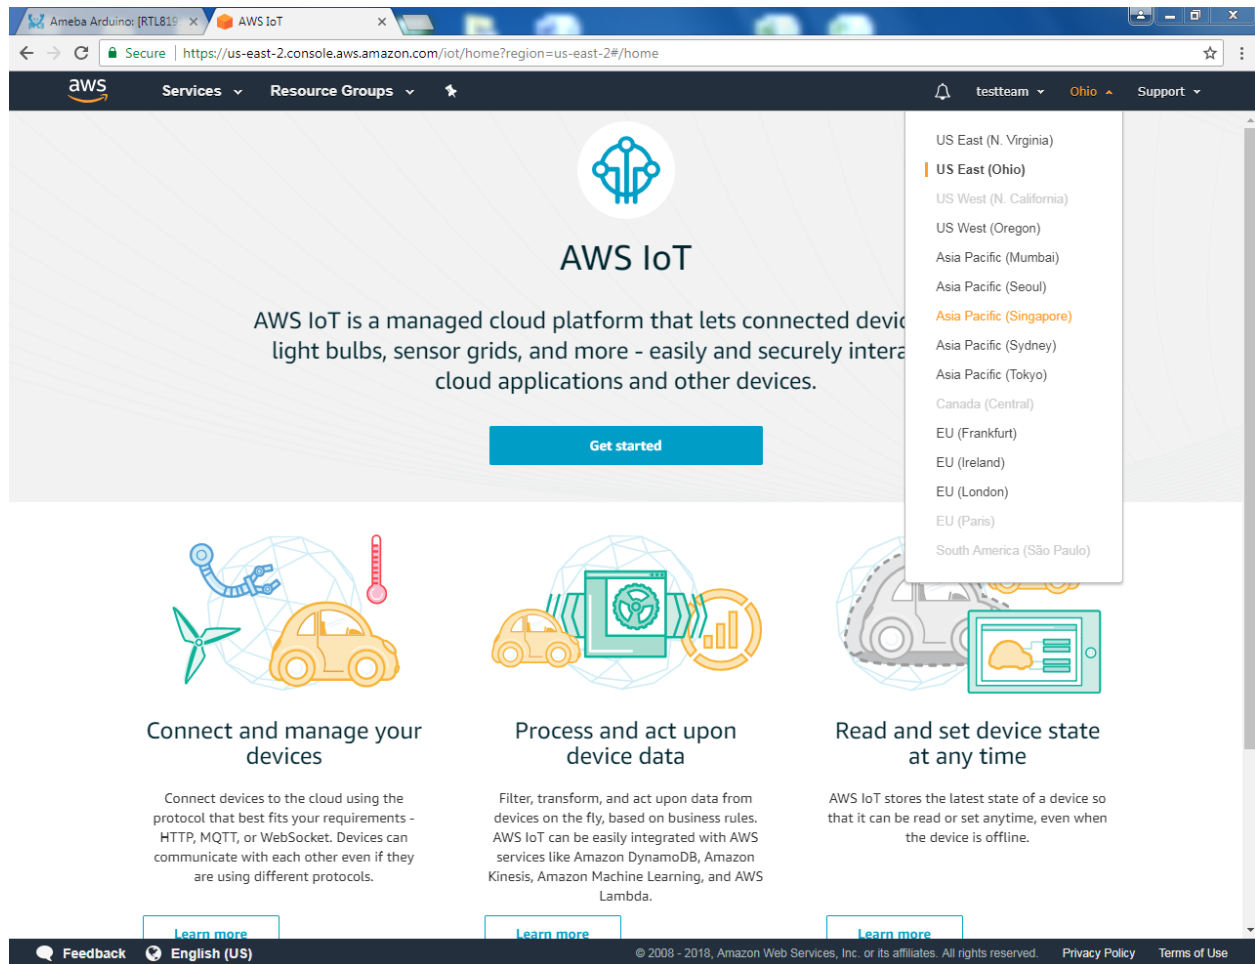

Then from Services, go to Onboard then Get Started.

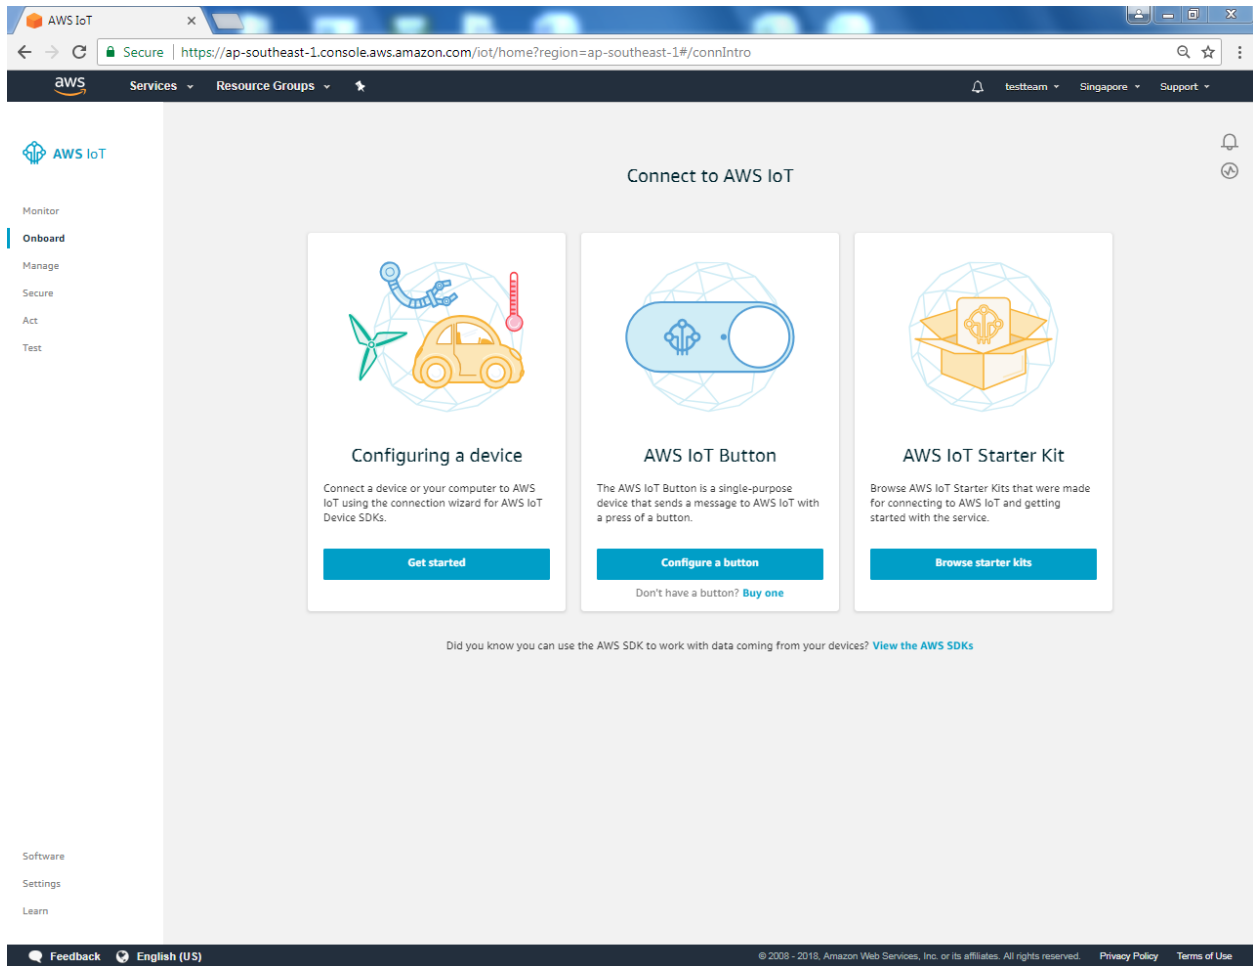

Enter the main page of AWS IoT. Under the Onboard a device, click Get started.

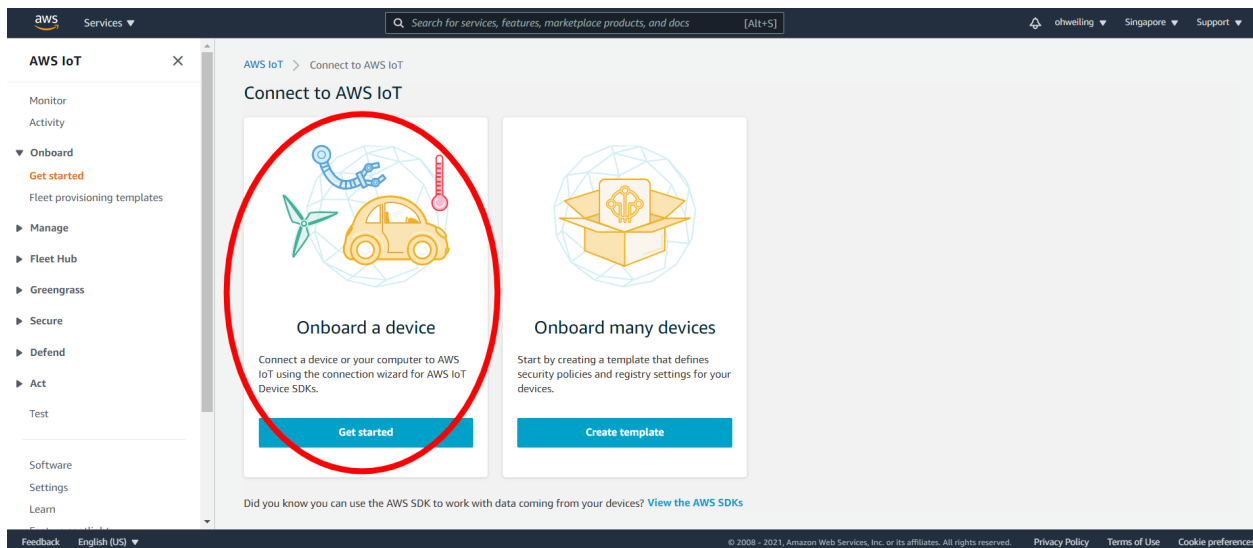

Click Create single thing

The screenshot shows the AWS IoT console's 'Create things' page. The breadcrumb trail is 'AWS IoT > Manage > Things > Create things'. The page title is 'Create things' with an 'Info' link. A descriptive paragraph states: 'A thing resource is a digital representation of a physical device or logical entity in AWS IoT. Your device or entity needs a thing resource in the registry to use AWS IoT features such as Device Shadows, events, jobs, and device management features.' Below this is a section titled 'Number of things to create' containing two radio button options: 'Create single thing' (selected) and 'Create many things'. The 'Create single thing' option has a sub-description: 'Create a thing resource to register a device. Provision the certificate and policy necessary to allow the device to connect to AWS IoT.' The 'Create many things' option has a sub-description: 'Create a task that creates multiple thing resources to register devices and provision the resources those devices require to connect to AWS IoT.' At the bottom right of this section are 'Cancel' and 'Next' buttons. The footer includes 'Feedback', 'English (US)', '© 2008 - 2021, Amazon Web Services, Inc. or its affiliates. All rights reserved.', 'Privacy Policy', 'Terms of Use', and 'Cookie preferences'.

Fill in “ameba” on the name field. Attributes represent the status of Ameba.

The screenshot shows the 'Specify thing properties' page in the AWS IoT console. The breadcrumb trail is 'AWS IoT > Manage > Things > Create things > Create single thing'. The left sidebar shows a step list: 'Step 1: Specify thing properties' (active), 'Step 2 - optional: Configure device certificate', and 'Step 3 - optional: Attach policies to certificate'. The main content area is titled 'Specify thing properties' with an 'Info' link. A descriptive paragraph is the same as in the previous screenshot. Below is a 'Thing properties' section with an 'Info' link. It contains a 'Thing name' field with the value 'ameba' entered. A note below the field says: 'Enter a unique name containing only: letters, numbers, hyphens, colons, or underscores. A thing name can't contain any spaces.' Below this is an 'Additional configurations' section with a note: 'You can use these configurations to add detail that can help you to organize, manage, and search your things.' It lists four expandable sections: 'Thing type - optional', 'Searchable thing attributes - optional', 'Thing groups - optional', and 'Billing group - optional'. The footer is identical to the previous screenshot.

Under the searchable thing attributes. The value of the attributes can be updated directly by Ameba or by the control side and control side can request Ameba to set the attribute to desired value.

Here we add an attribute named “led” with value “0” and click “Next” .

A thing resource is a digital representation of a physical device or logical entity in AWS IoT. Your device or entity needs a thing resource in the registry to use AWS IoT features such as Device Shadows, events, jobs, and device management features.

Thing properties [Info](#)

Thing name

ameba

Enter a unique name containing only: letters, numbers, hyphens, colons, or underscores. A thing name can't contain any spaces.

Additional configurations

You can use these configurations to add detail that can help you to organize, manage, and search your things.

▶ **Thing type - optional**

▼ **Searchable thing attributes - optional**

Add searchable attributes to allow your thing to be grouped and searched without using fleet indexing.

Searchable attribute	Value - optional	
led	0	Remove

Add new attribute

You can add up to 2 more attributes.

▶ **Thing groups - optional**

▶ **Billing group - optional**

Click Skip creating a certificate at this time and then Create thing

Configure device certificate - optional [Info](#)

A device requires a certificate to connect to AWS IoT. You can choose how you to register a certificate for your device now, or you can create and register a certificate for your device later. Your device won't be able to connect to AWS IoT until it has an active certificate with an appropriate policy.

Device certificate

☐ Auto-generate a new certificate (recommended)
Generate a certificate, public key, and private key using AWS IoT's certificate authority.

☐ Use my certificate
Use a certificate signed by your own certificate authority.

☐ Upload CSR
Register your CA and use your own certificates on one or many devices.


☒ Skip creating a certificate at this time
You can create a certificate for this thing and attach a policy to the certificate at a later time.

Cancel Previous **Create thing**


Next, click Policy, and create a policy. Policy is used to restrict the functions that a “thing” can do, it can limit the MQTT actions or specific topic that can be performed. Learn more about policy:

<http://docs.aws.amazon.com/iot/latest/developerguide/authorization.html>


Here we do not place policy on Ameba. Fill in “amebaPolicy” in the Name field, “iot:” in Action field and “*” in resources field. Then “Allow”. Finally, click “Create”.

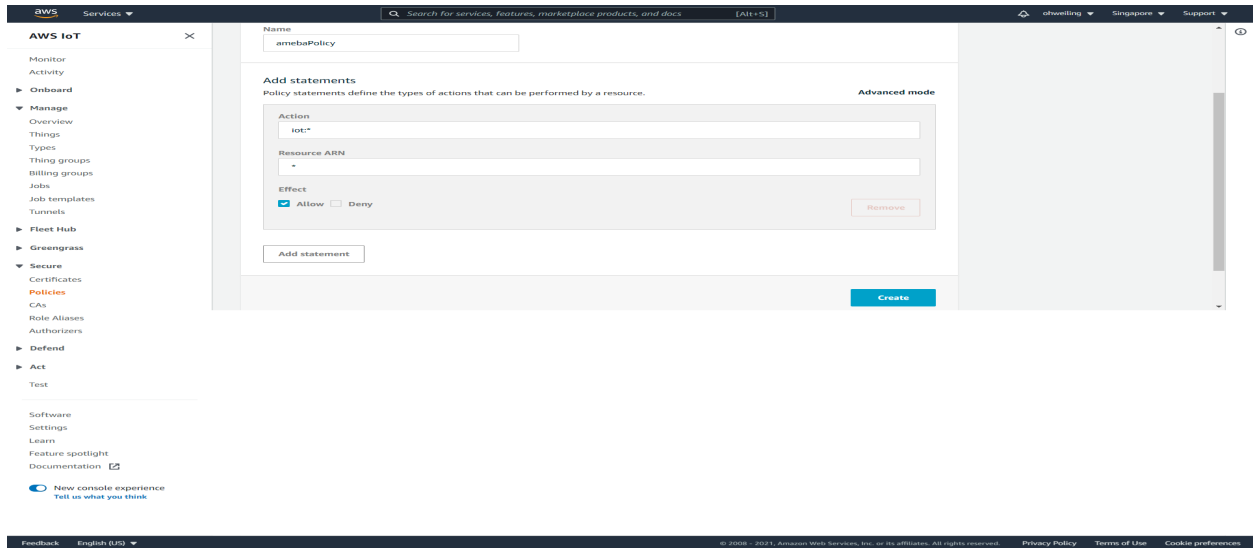


Next, we have to setup the TLS certificate. You can choose to user-defined or generate a certificate by AWS IoT. In this example we click Create Certificate to generate a TLS certificate.

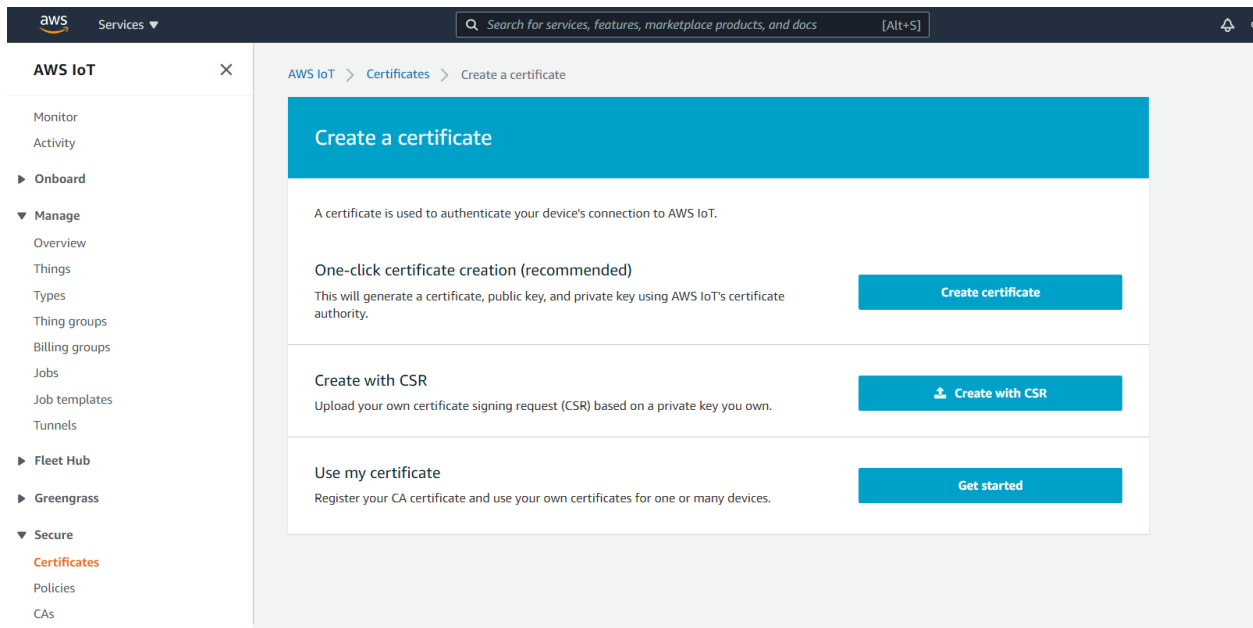


You can see 4 Links. Please download each of the link, “public key” , “private key” , “Certificate” and “rootCA” . After downloading the 4 files, click Done and go back to the certificate main page.

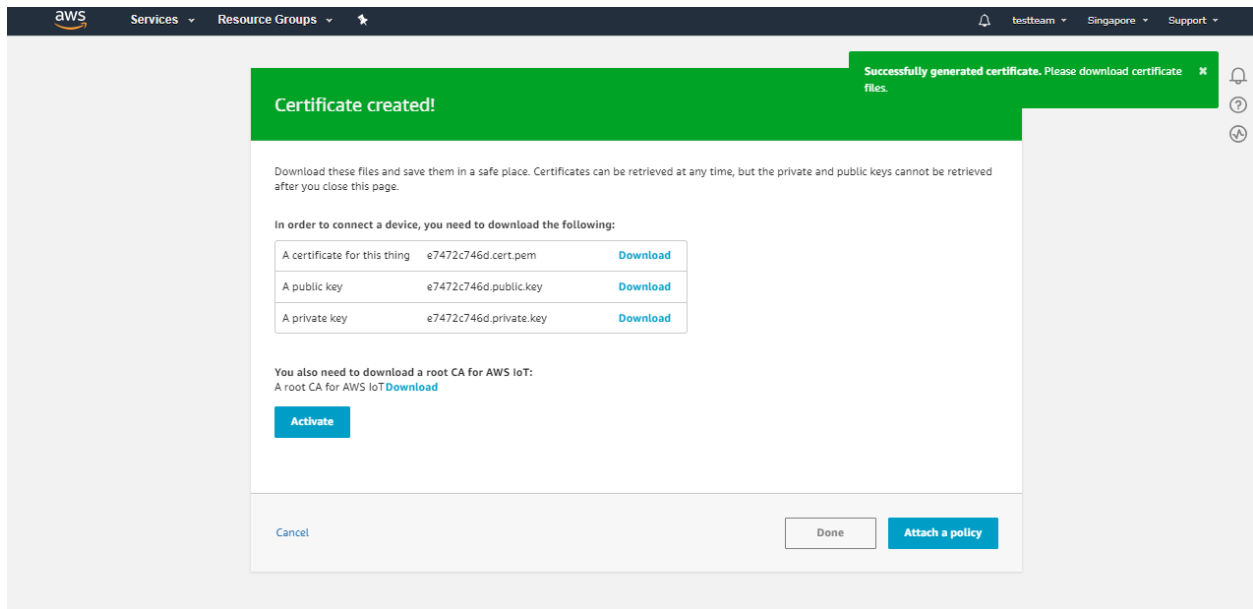


Click Attach a policy in the Actions dropdown menu.

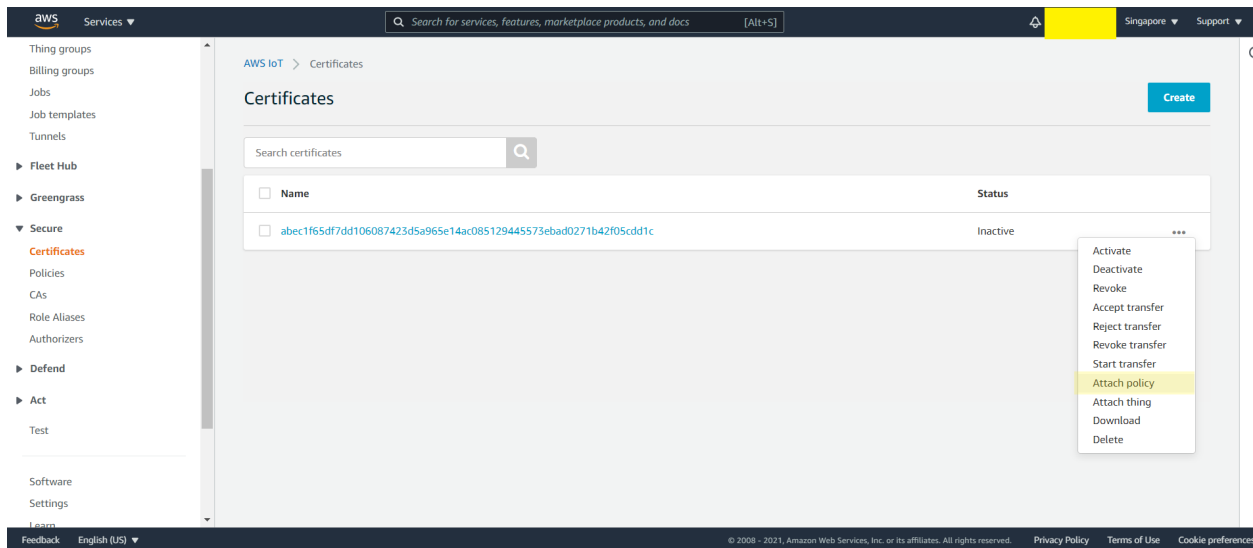


Choose amebaPolicy and click attach.

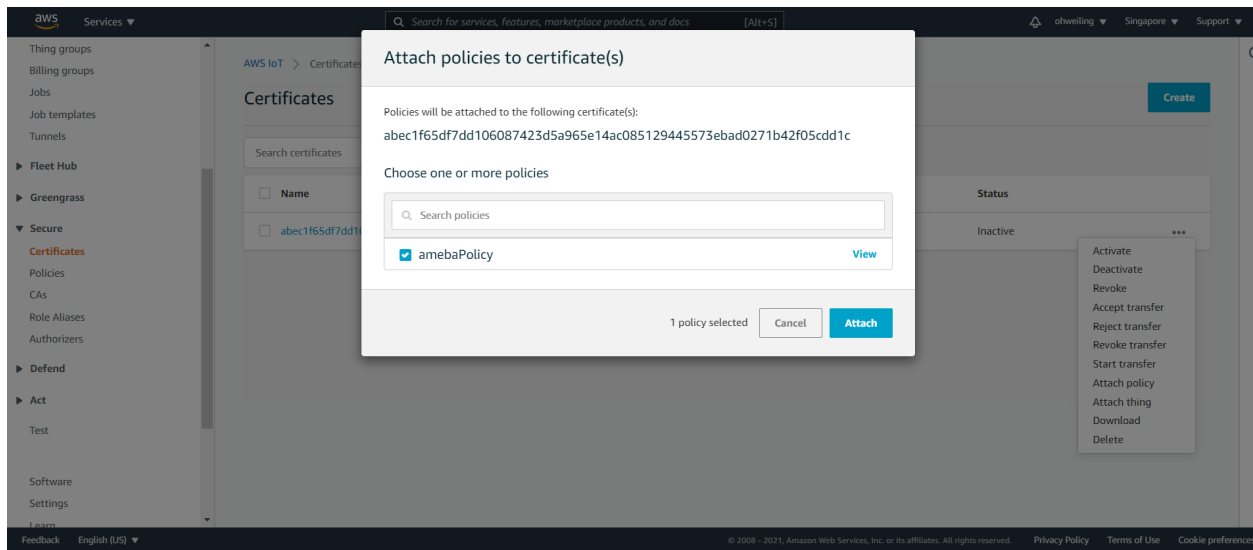

Then go back to the “Actions” drop-down menu at the top right of the certificates homepage, click on “Attach thing” , select the thing “ameba” you just created when the window below appears, then click on “Attach”

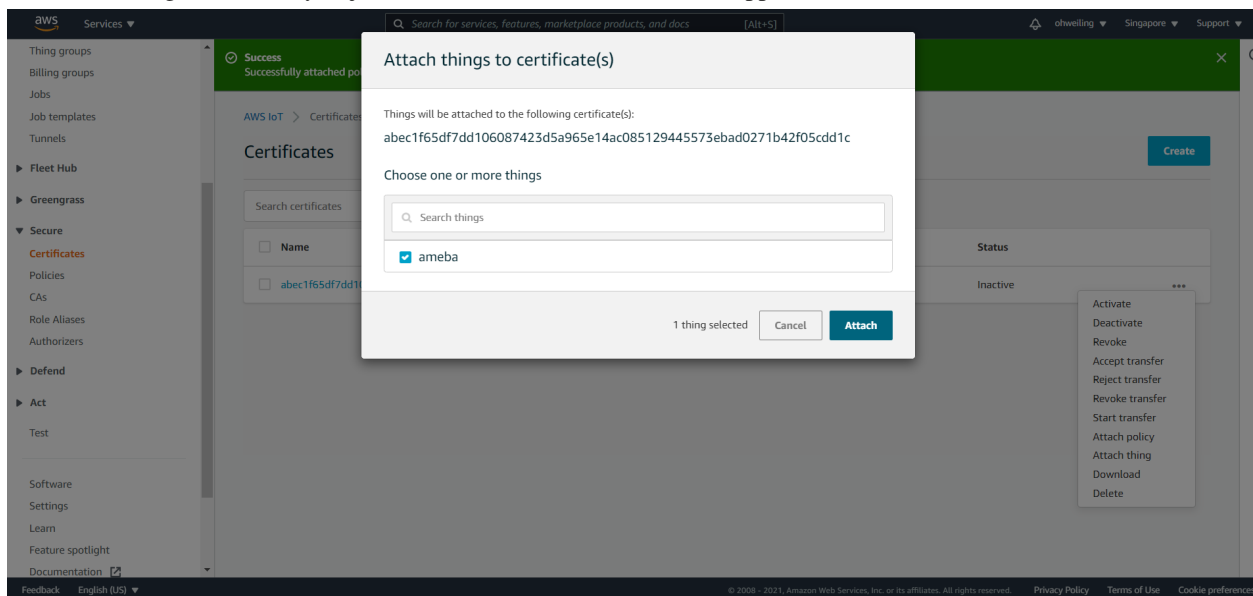


Go back to certificate main page and click Certificate and click Activate in the Actions drop down menu.

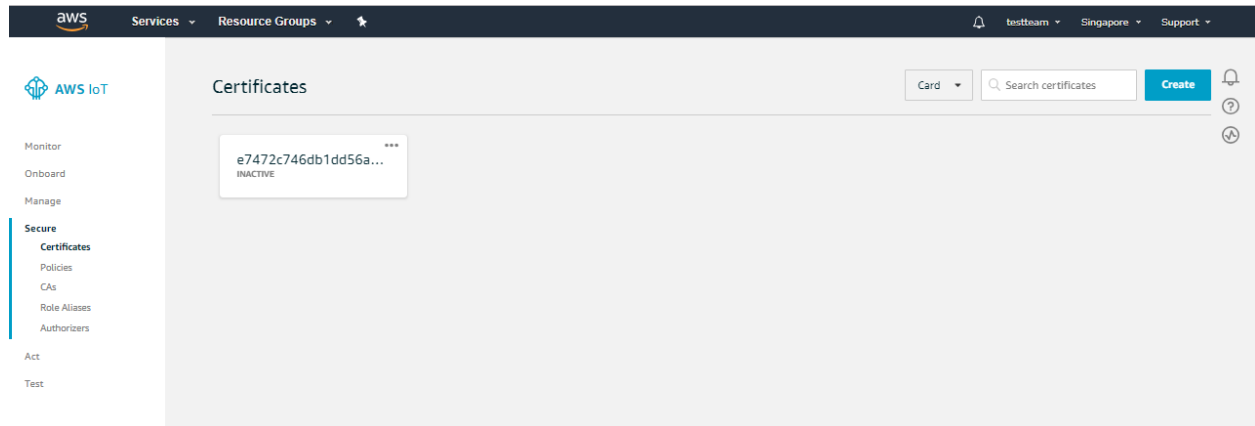

Next, click Manage, and click Things, then click “ameba” the thing we created just now.

Click on Interact and View settings.

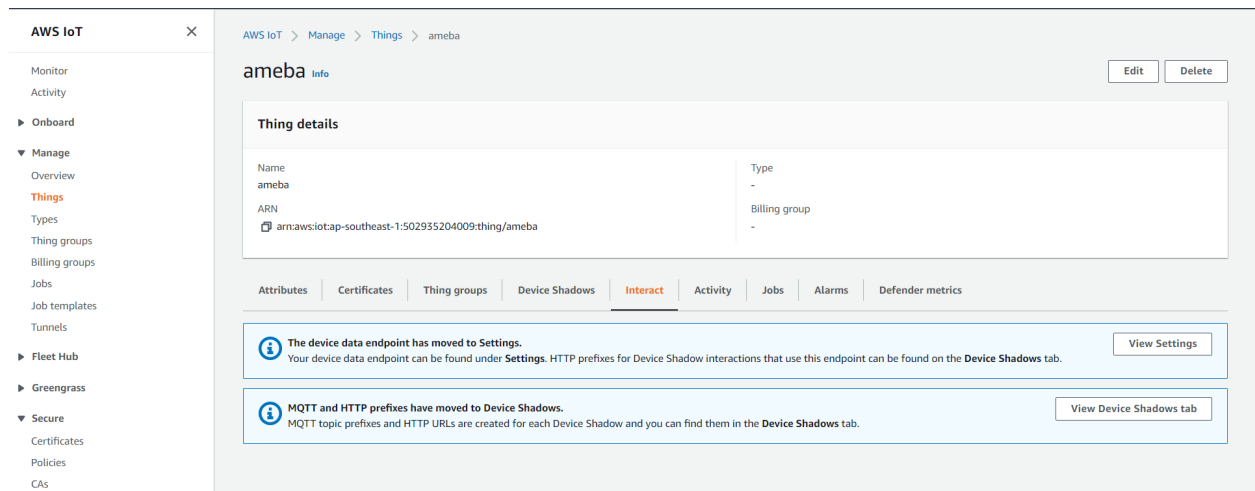


Find out the information of Rest API Endpoint to set Amazon Alexa:

- REST API endpoint: In the value “<https://a1a7004baosgyy.iot.us-east-1.amazonaws.com/things/ameba/shadow>”, the part “a1a7004baosgyy.iot.us-east-1.amazonaws.com” is the MQTT Broker server address.
- MQTT topic: The value “\$aws/things/ameba/shadow/update” represents the MQTT topic we will use in the AWS IoT Shadow service (if we use MQTT only, without AWS IoT Shadow service, then we can specify other topic name). It is recommended to use “\$aws/things/ameba/shadow/update” here.

Ameba setting

Open “File” -> “Examples” -> “AmebaMQTTClient” -> “Amazon_AWS_IoT_Basic”

In the sample code, modify the highlighted snippet to reflect your WiFi network settings.

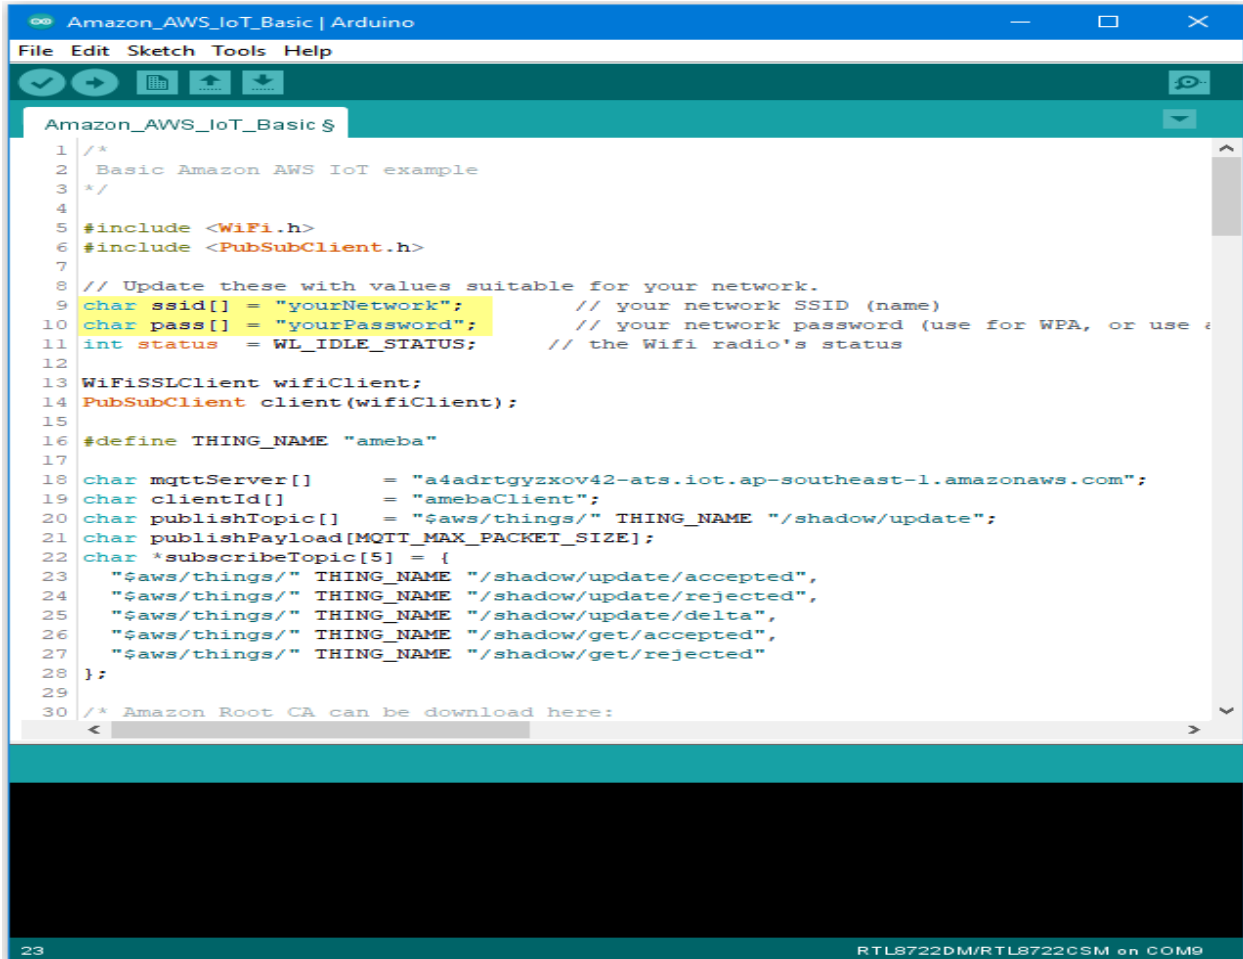

```
1  /*
2   Basic Amazon AWS IoT example
3  */
4
5  #include <WiFi.h>
6  #include <PubSubClient.h>
7
8  // Update these with values suitable for your network.
9  char ssid[] = "yourNetwork"; // your network SSID (name)
10 char pass[] = "yourPassword"; // your network password (use for WPA, or use e
11 int status = WL_IDLE_STATUS; // the Wifi radio's status
12
13 WiFiSSLClient wifiClient;
14 PubSubClient client(wifiClient);
15
16 #define THING_NAME "ameba"
17
18 char mqttServer[] = "a4adrtgyzxov42-ats.iot.ap-southeast-1.amazonaws.com";
19 char clientId[] = "amebaClient";
20 char publishTopic[] = "$aws/things/" THING_NAME "/shadow/update";
21 char publishPayload[MQTT_MAX_PACKET_SIZE];
22 char *subscribeTopic[5] = {
23   "$aws/things/" THING_NAME "/shadow/update/accepted",
24   "$aws/things/" THING_NAME "/shadow/update/rejected",
25   "$aws/things/" THING_NAME "/shadow/update/delta",
26   "$aws/things/" THING_NAME "/shadow/get/accepted",
27   "$aws/things/" THING_NAME "/shadow/get/rejected"
28 };
29
30 /* Amazon Root CA can be download here:
```

Then fill in the “thing” name “ameba” .


```

Amazon_AWS_IoT_Basic $
1  /*
2   Basic Amazon AWS IoT example
3  */
4
5  #include <WiFi.h>
6  #include <PubSubClient.h>
7
8  // Update these with values suitable for your network.
9  char ssid[] = "yourNetwork";      // your network SSID (name)
10 char pass[] = "yourPassword";     // your network password (use for WPA, or use a
11 int status = WL_IDLE_STATUS;      // the Wifi radio's status
12
13 WiFiSSLClient wifiClient;
14 PubSubClient client(wifiClient);
15
16 #define THING_NAME "ameba"
17
18 char mqttServer[] = "a4adrtgyzxov42-ats.iot.ap-southeast-1.amazonaws.com";
19 char clientId[] = "amebaClient";
20 char publishTopic[] = "$aws/things/" THING_NAME "/shadow/update";
21 char publishPayload[MQTT_MAX_PACKET_SIZE];
22 char *subscribeTopic[5] = {
23   "$aws/things/" THING_NAME "/shadow/update/accepted",
24   "$aws/things/" THING_NAME "/shadow/update/rejected",
25   "$aws/things/" THING_NAME "/shadow/update/delta",
26   "$aws/things/" THING_NAME "/shadow/get/accepted",
27   "$aws/things/" THING_NAME "/shadow/get/rejected"
28 };
29
30 /* Amazon Root CA can be download here:

```

23

RTL8722DM/RTL8722CSM on COM9

And the MQTT Broker server address we found earlier in AWS IoT.


```

Amazon_AWS_IoT_Basic $
1  /*
2   Basic Amazon AWS IoT example
3  */
4
5  #include <WiFi.h>
6  #include <PubSubClient.h>
7
8  // Update these with values suitable for your network.
9  char ssid[] = "yourNetwork";      // your network SSID (name)
10 char pass[] = "yourPassword";     // your network password (use for WPA, or use a
11 int status  = WL_IDLE_STATUS;     // the Wifi radio's status
12
13 WiFiSSLClient wifiClient;
14 PubSubClient client(wifiClient);
15
16 #define THING_NAME "ameba"
17
18 char mqttServer[] = "a4adrtgyzxov42-ats.iot.ap-southeast-1.amazonaws.com";
19 char clientId[] = "amebaClient";
20 char publishTopic[] = "$aws/things/" THING_NAME "/shadow/update";
21 char publishPayload[MQTT_MAX_PACKET_SIZE];
22 char *subscribeTopic[5] = {
23   "$aws/things/" THING_NAME "/shadow/update/accepted",
24   "$aws/things/" THING_NAME "/shadow/update/rejected",
25   "$aws/things/" THING_NAME "/shadow/update/delta",
26   "$aws/things/" THING_NAME "/shadow/get/accepted",
27   "$aws/things/" THING_NAME "/shadow/get/rejected"
28 };
29
30 /* Amazon Root CA can be download here:

```

23 RTL8722DM/RTL8722C5M on COM9

Next, fill in the root CA used in TLS. Download and make sure the downloaded root CA contents conforms to the root CA used in the sketch.

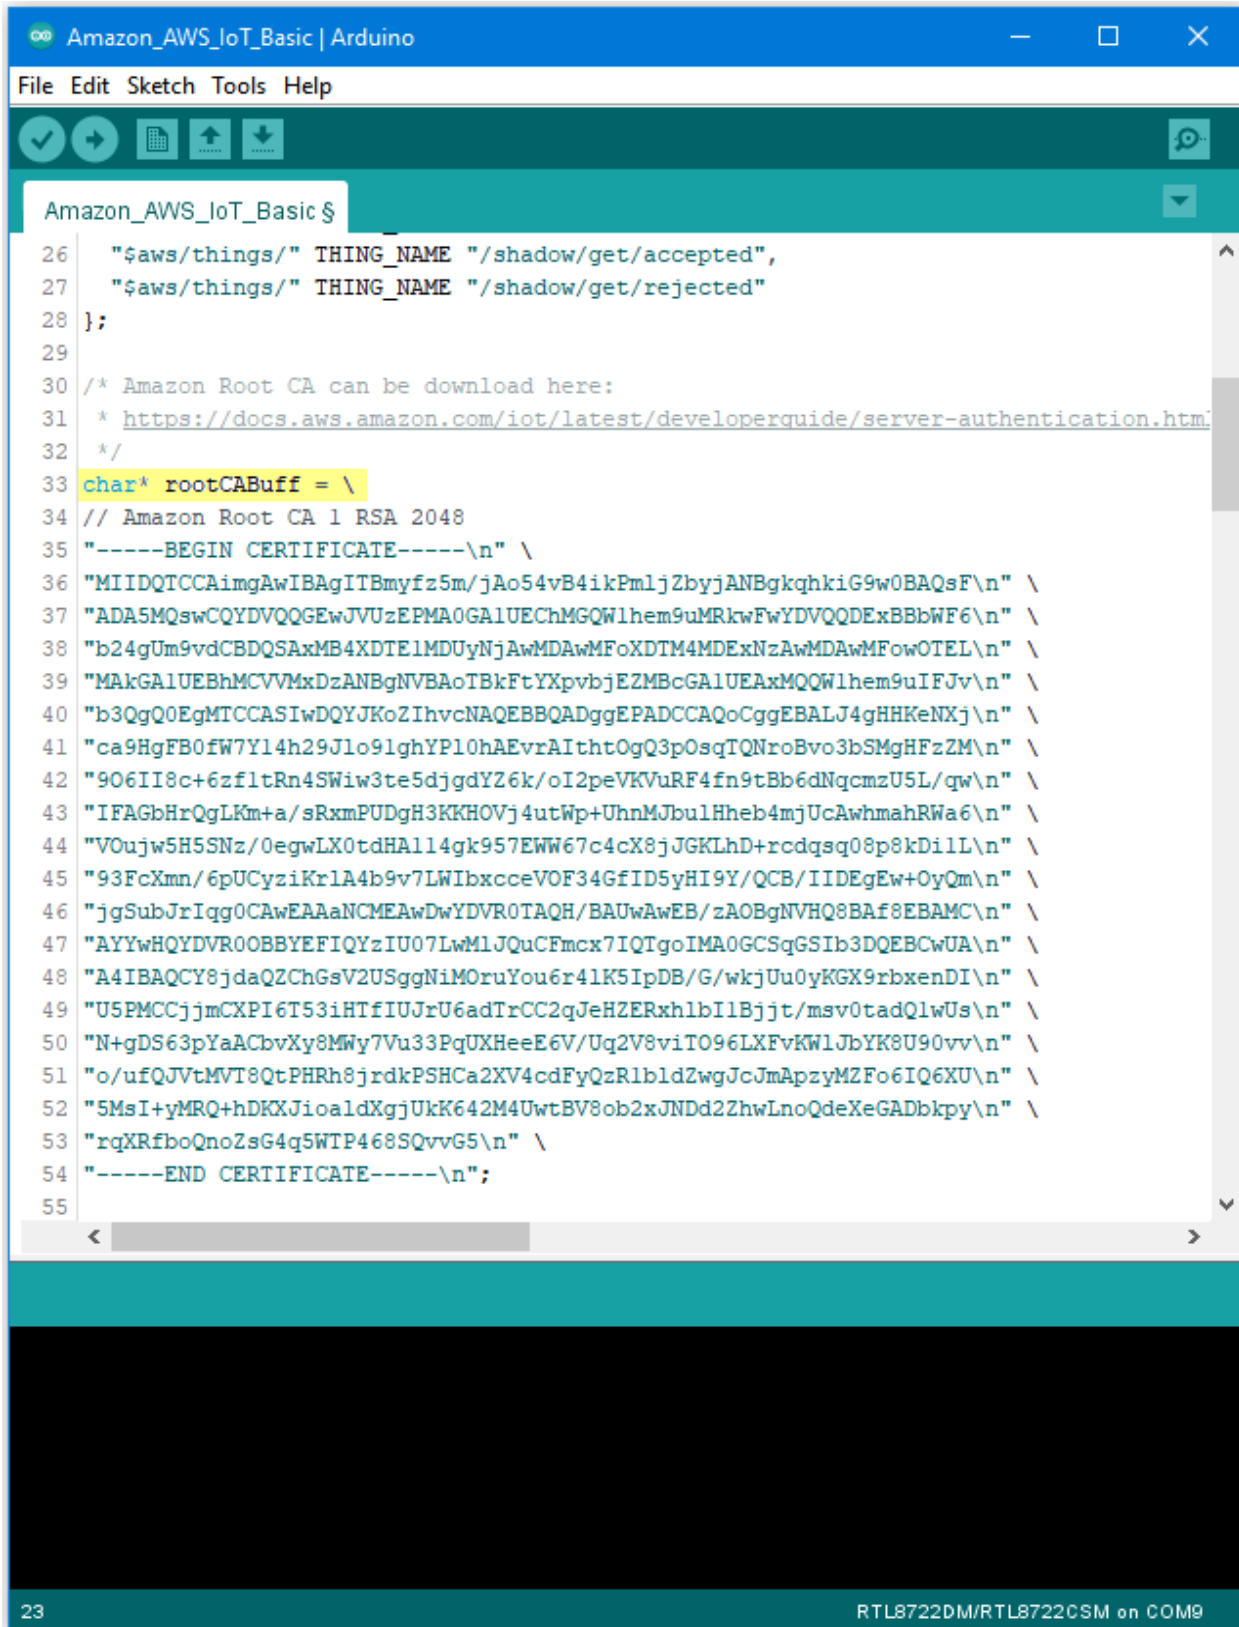

```

Amazon_AWS_IoT_Basic | Arduino
File Edit Sketch Tools Help

Amazon_AWS_IoT_Basic $
26  "$aws/things/" THING_NAME "/shadow/get/accepted",
27  "$aws/things/" THING_NAME "/shadow/get/rejected"
28  };
29
30  /* Amazon Root CA can be download here:
31   * https://docs.aws.amazon.com/iot/latest/developerguide/server-authentication.htm
32   */
33  char* rootCABuff = \
34  // Amazon Root CA 1 RSA 2048
35  "-----BEGIN CERTIFICATE-----\n" \
36  "MIIDQTCCAimgAwIBAgITBmyfz5m/jAo54vB4ikPmljZbyjANBgkqhkiG9w0BAQsF\n" \
37  "ADA5MQswCQYDVQQGEwJVUzEPMA0GA1UEChMGMGQWlhem9uMRkwFwYDVQQDExBBbWF6\n" \
38  "b24gUm9vdCBDQSAxMB4XDTE1MDUyNjAwMDAwMFoXDTE1MDUyNjAwMDAwMFowOTEL\n" \
39  "MAkGA1UEBhMCVVMxMC4zANBgNVBAoTBkFtYXNjYXZlZDZlZDZlZDZlZDZlZDZlZDZl\n" \
40  "b3QgQ0EgMTCCASIwDQYJKoZIhvcNAQEBBQADggEPADCCAQoCggEBALJ4gHHKeNXj\n" \
41  "ca9HgFB0fW7Y14h29Jl091ghYP10hAEvrAithtOgQ3pOsqTQNroBvo3bSMgHFzZM\n" \
42  "906II8c+6zfltRn4SWiw3te5djgdYZ6k/oI2peVKVuRF4fn9tBb6dNqcmzU5L/qw\n" \
43  "IFAGbHrQgLKm+a/sRxmPUDgH3KKHOVj4utWp+UhnMJbulHheb4mjUcAwhmahRWa6\n" \
44  "VOujw5H5SNz/0egwLX0tdHA114gk957EWW67c4cX8jJGKLhD+rcdqsq08p8kDilL\n" \
45  "93FcXmn/6pUCyziKrlA4b9v7LWIbxcceVOF34GfID5yHI9Y/QCB/IIDEgEw+OyQm\n" \
46  "jgSubJrIqq0CAwEAaNCMEAwDwYDVR0TAQH/BAUwAwEB/zA0BgNVHQ8BAf8EBAMC\n" \
47  "AYYwHQYDVIR0OBByEFIQYzIU07LwMlJQuCFmcx7IQTgoIMA0GCSqGSIB3DQEBCwUA\n" \
48  "A4IBAQCjY8jdaQZChGsV2USggNiMOruYou6r4lK5IpDB/G/wkjUu0yKGX9rbxenDI\n" \
49  "U5PMCCjjmCXPI6T53iHTfIUJrU6adTrCC2qJeH2ERxhlb1lBjtt/msv0tadQ1wUs\n" \
50  "N+gDS63pYaACbvXy8MWy7Vu33PqUXHeeE6V/Uq2V8viT096LXFvKW1JbYK8U90vv\n" \
51  "o/ufQJvtMVT8QtPHRh8jrdkPSHCa2XV4cdFyQzR1bldZwgJcJmApzyMZFo6IQ6XU\n" \
52  "5MsI+yMRQ+hDKXJioaldXgjUkK642M4UwtBV8ob2xJNDd2ZhwLnoQdeXeGADbkpy\n" \
53  "rqXRfboQnoZsG4q5WTP468SQvvG5\n" \
54  "-----END CERTIFICATE-----\n";
55
23
RTL8722DM/RTL8722CSM on COM9

```

Next, fill in the certificate we created in the AWS IoT Console (i.e., client certificate), usually its file name ends with “-certificate.pem.crt” (e.g., “efae24a533-certificate.pem.crt”). Open the certificate with a text editor, and adjust its format as follows to use in the sketch:

- Add the new line character “\n” at the end of each line.
- Add double-quote at the beginning and the end of each line.
- To concatenate each line as a string, add “” at the end of each line.
- The last line ends with semicolon.

Adjust the format of the private key in the same way and add it to privateKeyBuff.

```

56 /* Fill in YOUR certificate.pem.crt with LINE ENDINGS */
57 char* certificateBuff = \
58 "-----BEGIN CERTIFICATE-----\n" \
59 "MIIDWjCCAKKgAwIBAgIVAPsRFvnxpgcxvXwyMKczt/eeebcAMA0GCSqGSIb3DQEBA\n" \
60 "CwUAME0xSzBjBgNVBAsMQkFtYXpvbiBXZWlgaU2VydmljZXMGtZlBbWF6b24uY29t\n" \
61 "IEluYy4gTD1TZWF0dGx1IFNUPVdhc2hpbmd0b24gQz1VUzAeFw0yMDA3MDYwNjUy\n" \
62 "MzZaFw000TEyMzEyMzU5NTlaMB4xHDAaBgNVBAMME0FXUyBjblQgQ2VydGhmaWNh\n" \
63 "dGUwgGElMA0GCSqGSIb3DQEBAQUAA4IBDwAwggEKAoIBAQDKcYAWmFZwzGadgTlP\n" \
64 "4LK4uCs9vx9iHisnXl8pClDeBXxKt0QB2InvTtXGahjmUSLqnOBthabAxNTu+mo3\n" \
65 "N96KpQlmedBldkFfJtMG+2bQaFzjOEge0k3qFNqQdaM8JQkg+dv2VkhFoXVxr\n" \
66 "WKcwWcqWjexmb9hVFYKm8AlaNHyh+yHsv5J0xg9KP/2ThWqVG89kx/ssei+kw\n" \
67 "9pK7ghGpldszMKvSlwdTHcQJj1b3UC+22soJj1CICBqmOxMVBbQT575KNKFi+U\n" \
68 "yneF3oIYgwnDotX5kxHq3Cw0cUteaYmzYKITIUYBxXq5B2CRZJsrNG46FK492\n" \
69 "3TR/AgMBAAGjYDBeMB8GA1UdIwQYMBaFAFFJEaISt+QJLn05x8h7kXmC5WaQp\n" \
70 "AlUdDgQWBBTQuDC06walAD36MRM0Cz9TtRCPlzAMBgNVHRMBAf8EAjAAMA4GA1\n" \
71 "UdEB/wQEAwIHgDANBgkqhkiG9w0BAQsFAAOCAQEAFIzoSivJZyay6ltW0tMkqs4\n" \
72 "EXg3eXIhohXfkkxqKJNN4nUrp7hMYfII/HPf/6+JL9/ltvEth6QjvW9xfXFpti\n" \
73 "KvgIMyjqzILVpi5hUxM9ewdQJFK0b+v1X/VtkXHvgXYAHTceDOVC39blz/W7m\n" \
74 "wDKB69E8Hhp4/8YP0Bs+GOvAM8pnxJrVoNnCHpjerDFDSjmNoq33iaNtPws8F\n" \
75 "Dd65aHrDlcyRSYp+lC2Ovg0w2v2ECWWLuZDZOPPuyRdcRABLiAJYLakjE9G/n\n" \
76 "NbQjhqs3h0r43SWbU0zunJbJfpbWEBMDEB2gke2adCyD+lFauTyQDb+nXrSHA\n" \
77 "-----END CERTIFICATE-----\n";
78
79 /* Fill in YOUR private.pem.key with LINE ENDINGS */
80 char* privateKeyBuff = \
81 "-----BEGIN RSA PRIVATE KEY-----\n" \
82 "MIIEowIBAAKCAQEAynGAFphWcMxmnyE9T+CyuLgrPb8fYh4rJl5fKQtQ3gV8SrdE\n" \
83 "AdiJ707VxmoY51Ei6pzgbYWmwMTU7vpqNzfeiqUNZhHQ2XZBXybTBvtm0Ghc4z\n" \
84 "ntJN6hTakHWjPCUJIPnb9lZIRaFlca58BlinMFnKlo3sZm/YVRWCpvAJWjR8ofsh\n" \
85 "7L+SdMYPSj/9k4VqlRvPZMf7LHovpMDYQ/aSu4IRqdXbMzJL0tcHUx3ECY9W91Av\n"

```


23

RTL8722DM/RTL8722CSM on COM9

Compile and run

Upload the code and press the reset button on Ameba once the upload is finished.

Open the serial monitor in the Arduino IDE and observe as Ameba connects to the AWS IoT server and sends updates on the LED state variable.

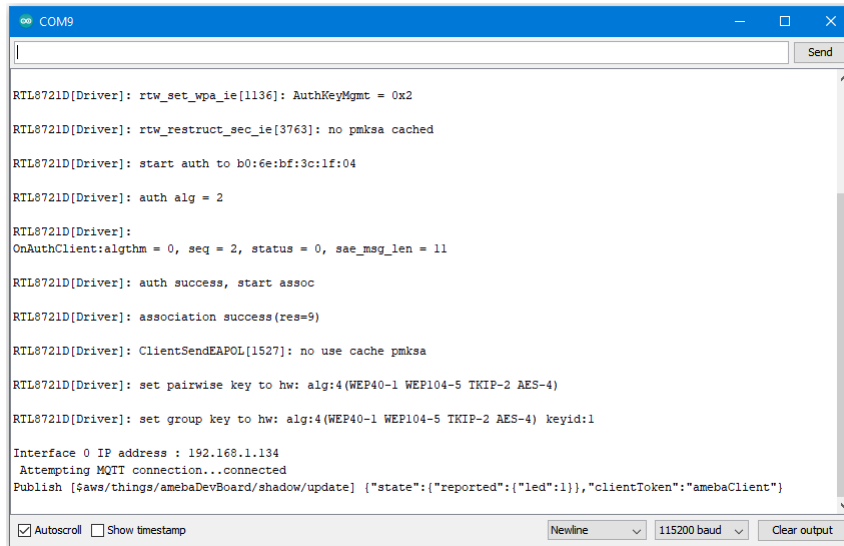

```

RTL8721D[Driver]: rtw_set_wpa_ie[1136]: AuthKeyMgmt = 0x2
RTL8721D[Driver]: rtw_restruct_sec_ie[3763]: no pmksa cached
RTL8721D[Driver]: start auth to b0:6e:bf:3c:1f:04
RTL8721D[Driver]: auth alg = 2
RTL8721D[Driver]:
OnAuthClient:alghth = 0, seq = 2, status = 0, sae_msg_len = 11
RTL8721D[Driver]: auth success, start assoc
RTL8721D[Driver]: association success(res=9)
RTL8721D[Driver]: ClientSendEAPOL[1527]: no use cache pmksa
RTL8721D[Driver]: set pairwise key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4)
RTL8721D[Driver]: set group key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4) keyid:1
Interface 0 IP address : 192.168.1.134
Attempting MQTT connection...connected
Publish [aws/things/amebaDevBoard/shadow/update] {"state":{"reported":{"led":1}}, "clientToken":"amebaClient"}
  
```

Alternatives

Ameba can also retrieve the current LED status variable from the AWS shadow. This is done by sending a message to the “shadow/get” topic. Refer to the Amazon_AWS_IoT_with_ACK example code for more information.

Code Reference

Change led state:

In this example, we use GPIO interface to control the led. We set led_pin to 10 and led_state to 1 by default in the sample code.

```
pinMode(led_pin, OUTPUT);
digitalWrite(led_pin, led_state);
```

Set up certificate:

Note that we use the WiFiSSLClient type of wifiClient.

```
WiFiSSLClient wifiClient;
```

WiFiSSLClient inherits Client, so it can be passed as the parameter of PubSubClient constructor.

Next, set up TLS certificate required in connection.

```
wifiClient.setRootCA((unsigned char*)rootCABuff);  
wifiClient.setClientCertificate((unsigned char*)certificateBuff, (unsigned_  
↳char*)privateKeyBuff);
```

Configure MQTT Broker server

Then MQTT PubClient set MQTT Broker server to connect

```
client.setServer(mqttServer, 8883);  
client.setCallback(callback);
```

Connect to MQTT Broker server:

In loop(), call reconnect() function and try to connect to MQTT Broker server and do the certificate verification.

```
while (!client.connected()) {
```

Subscribe & Publish

Next, subscribe to topics.

```
for (int i=0; i<5; i++) {  
    client.subscribe(subscribeTopic[i]);  
}
```

There are some common topics:

“\$aws/things/ameba/shadow/update/accepted” ,

“\$aws/things/ameba/shadow/update/rejected” ,

“\$aws/things/ameba/shadow/update/delta” ,
 “\$aws/things/ameba/shadow/get/accepted” ,
 “\$aws/things/ameba/shadow/get/rejected”

Related documentation:

<http://docs.aws.amazon.com/iot/latest/developerguide/thing-shadow-data-flow.html>

Then publish current status::

```
sprintf(publishPayload,
  "{\"state\":{\"reported\":{\"led\":%d}},\"clientToken\":\"%s\"}\",
  led_state, clientId);
```

```
client.publish(publishTopic, publishPayload);
```

Listen to topic and make response:

In the callback function, we listen to the 5 subscribed topics and check if there are messages of “/shadow/get/accepted” :

```
if (strstr(topic, "/shadow/get/accepted") != NULL) {
```

If there is, the message is from the control side. If the attribute state in the message is different from current state, publish the new state.

```
updateLedState(desired_led_state);
```

Use MQTT over TLS


Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1

Example


In this example, we connect Ameba to a MQTT broker using TLS authentication. Then send messages as a publisher

and receive messages from as a subscriber. Open the MQTT example “File” -> “Examples” -> “AmebaMQTTClient” -> “MQTT_TLS”

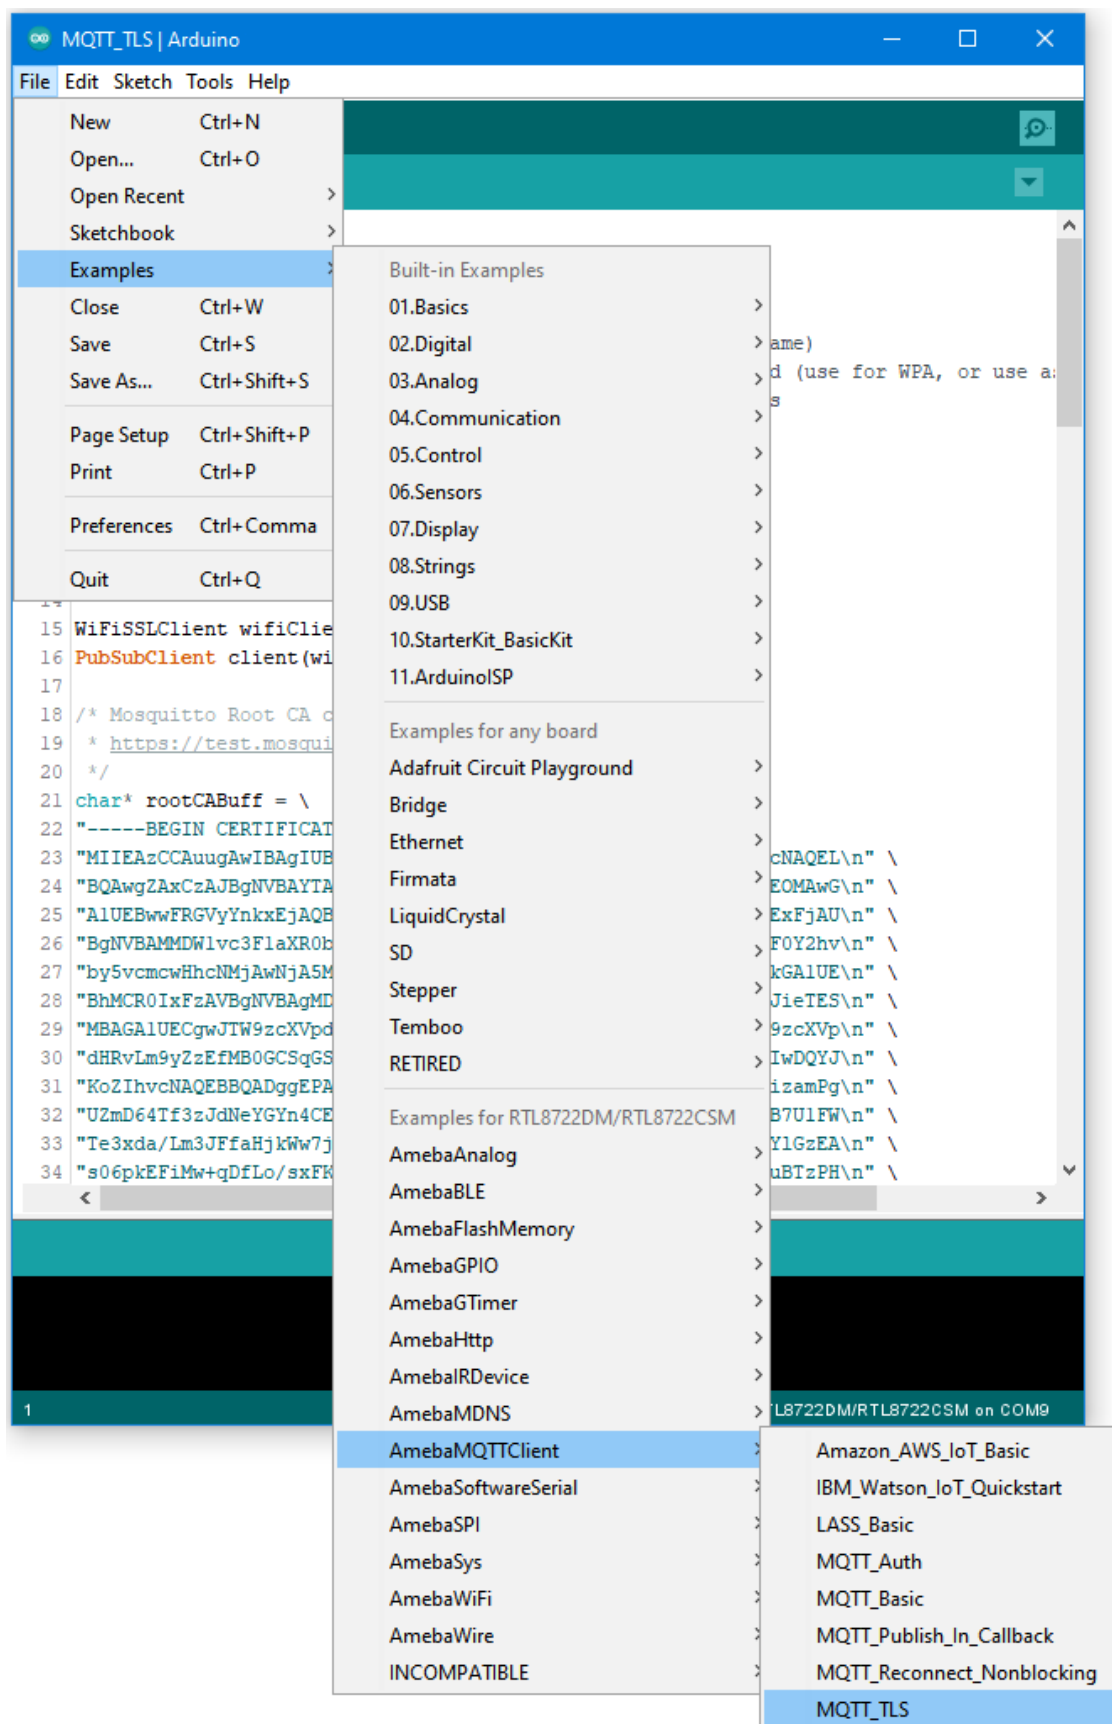

Please modify the WiFi-related parameters to connect to your WiFi network.

Modify the MQTT parameters to fit your application:

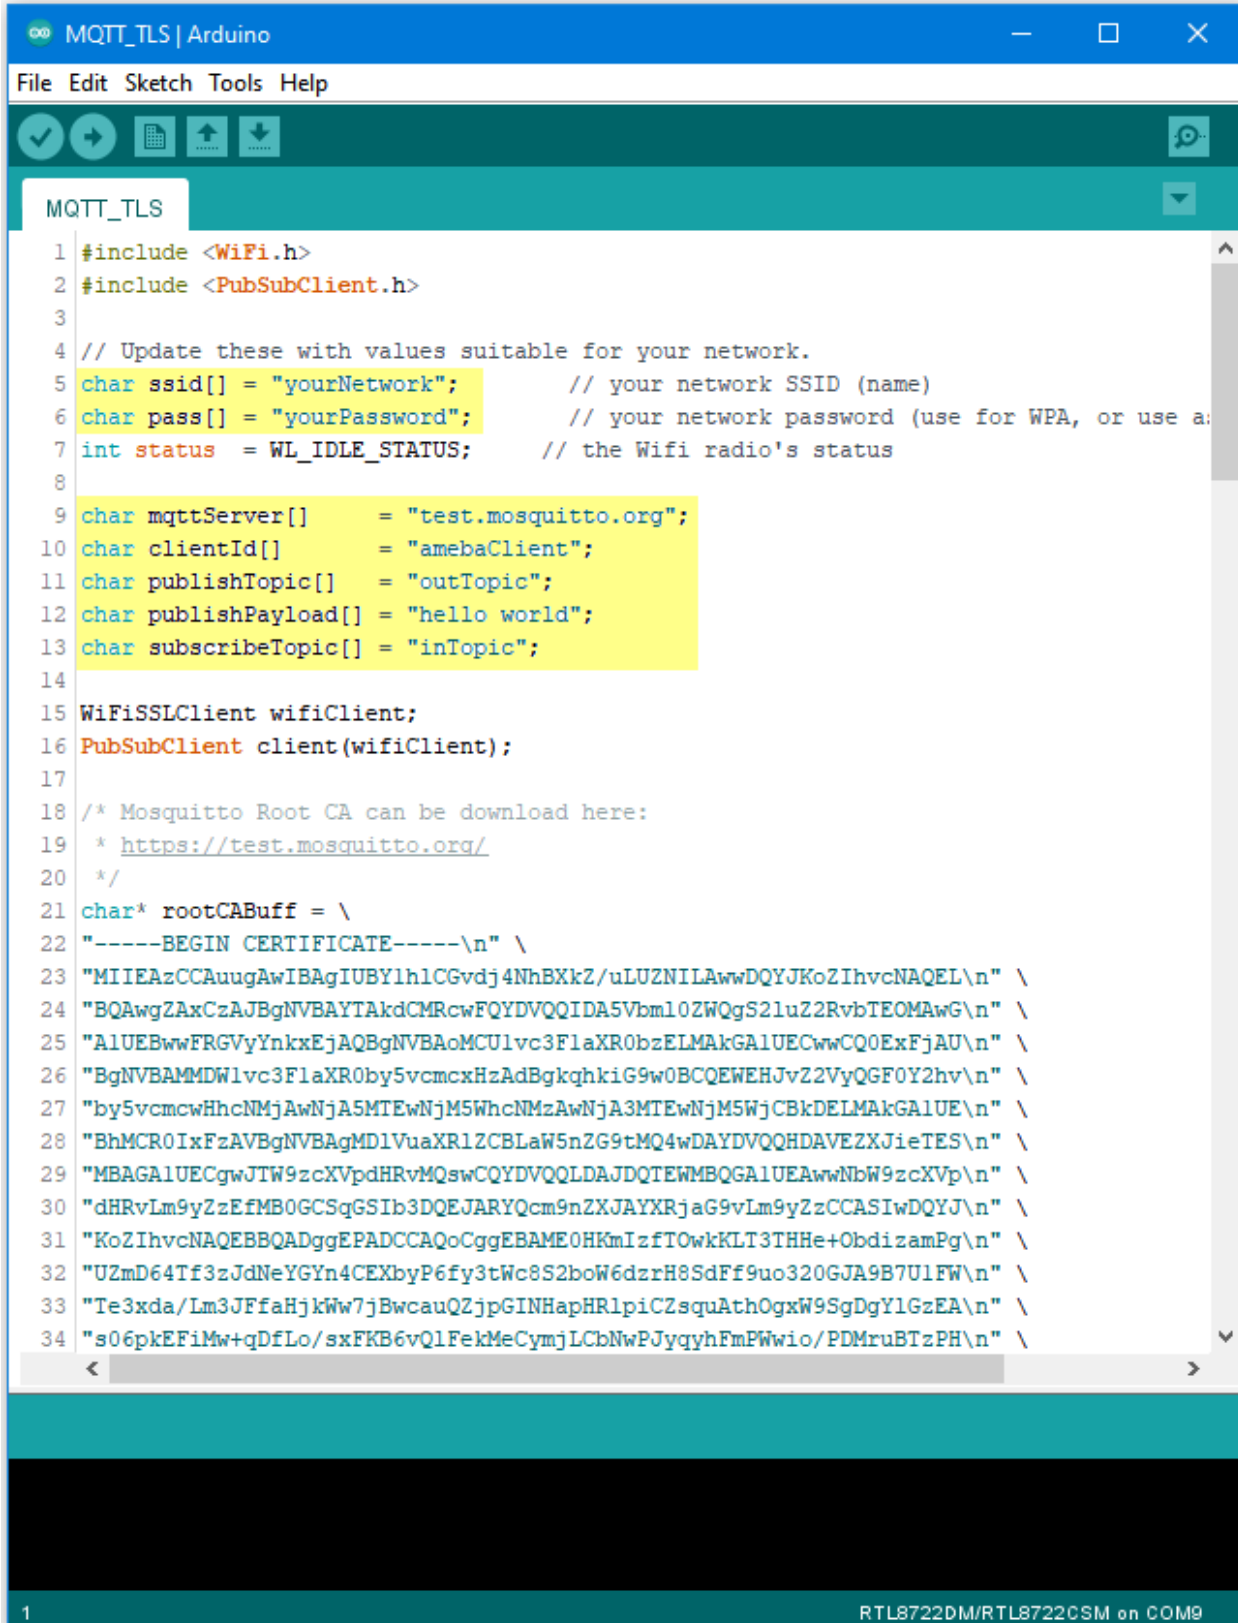

```

MQTT_TLS | Arduino
File Edit Sketch Tools Help

MQTT_TLS
1 #include <WiFi.h>
2 #include <PubSubClient.h>
3
4 // Update these with values suitable for your network.
5 char ssid[] = "yourNetwork"; // your network SSID (name)
6 char pass[] = "yourPassword"; // your network password (use for WPA, or use a:
7 int status = WL_IDLE_STATUS; // the Wifi radio's status
8
9 char mqttServer[] = "test.mosquitto.org";
10 char clientId[] = "amebaClient";
11 char publishTopic[] = "outTopic";
12 char publishPayload[] = "hello world";
13 char subscribeTopic[] = "inTopic";
14
15 WiFiSSLClient wifiClient;
16 PubSubClient client(wifiClient);
17
18 /* Mosquitto Root CA can be download here:
19 * https://test.mosquitto.org/
20 */
21 char* rootCABuff = \
22 "-----BEGIN CERTIFICATE-----\n" \
23 "MIIEAzCCAaugAwIBAgIUBYlh1CGvdj4NhBXkZ/uLUZNIkAwDQYJKoZIhvcNAQEL\n" \
24 "BQAwZAXCZAJBgNVBAYTAkdCMRcwFQYDVQQIDA5Vbm10ZWQgS2luZ2RvbTEOMAwG\n" \
25 "AlUEBwwFRGVyYnknxEjAQBgNVBAoMCUlv3FlaXR0bzELMAkGA1UECwwCQ0ExFjAU\n" \
26 "BgNVBAMDWlvc3FlaXR0by5vcmcxH2AdBgkqhkiG9w0BCQEWElJvZ2VyQG90Y2hv\n" \
27 "by5vcmcwHhcnMjAwNjA3MTEwNjM5WjCBDELMAkGA1UE\n" \
28 "BhMCR0IxZmZlbnVBAgMD1VuaXRlZCBLaW5nZG9tMQ4wDAYDVQQHDAVEZXJieTES\n" \
29 "MBAGA1UECgwJTW9zcXVpdHRvMQswCQYDVQQLDAJDQTEWMBQGA1UEAwNbW9zcXVp\n" \
30 "dHRvLm9yZzEzZmB0GCSqGSIb3DQEJARYQcm9nZXJAYXRjaG9vLm9yZzCCASIwDQYJ\n" \
31 "KoZIhvcNAQEBBQADggEPADCCAQoCggEBAME0HKmIzfTOwkKLT3THHe+ObdizamPg\n" \
32 "UZmD64Tf3zJdNeYGYn4CEXbyP6fy3tWc8S2boW6dZrH8SdFf9uo320GJA9B7U1FW\n" \
33 "Te3xda/Lm3JffaHjkWw7jBwcauQZjpGINHapHRlpiCZsquAthOgxW9SgDgYlGzEA\n" \
34 "s06pkEFiMw+qDfLo/sxFKB6vQ1FekMeCymjLCbNwPJyqyFmPWwio/PDMruBTzPH\n"

```

1 RTL8722DM/RTL8722CSM on COM9

The “mqttServer” refers to the MQTT-Broker, we use the free MQTT sandbox “test.mosquitto.org” for testing.


“clientId” is an identifier for MQTT-Broker to identify the connected device.

“publishTopic” is the topic of the published message, we use “outTopic” in the example. The devices subscribe to “outTopic” will receive the message.

“publishPayload” is the content to be published.

“subscribeTopic” is to tell MQTT-broker which topic we want to subscribe to.

Next, compile the code and upload it to Ameba. Press the reset button, then open the serial monitor

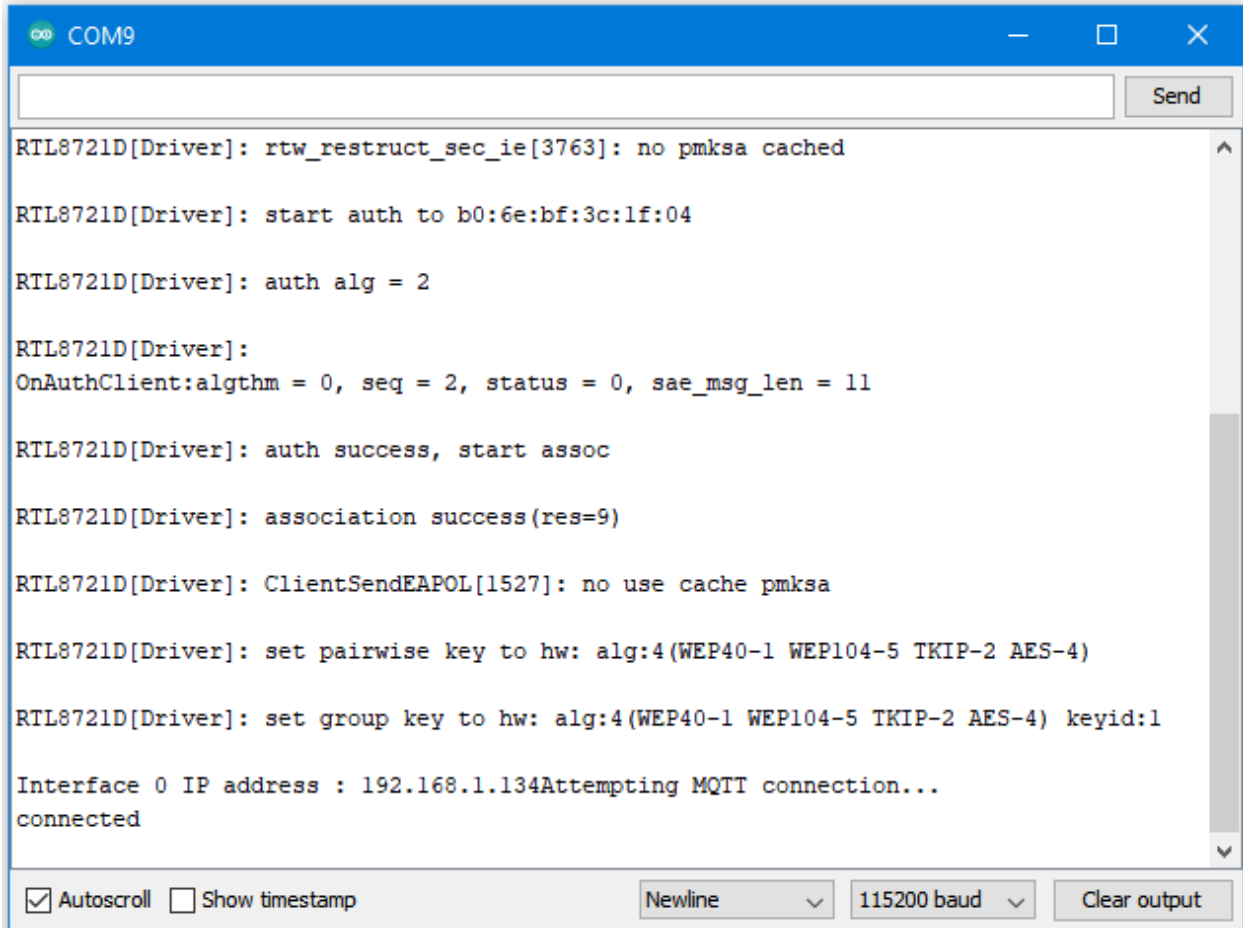

```

COM9
Send

RTL8721D[Driver]: rtw_restruct_sec_ie[3763]: no pmksa cached

RTL8721D[Driver]: start auth to b0:6e:bf:3c:1f:04

RTL8721D[Driver]: auth alg = 2

RTL8721D[Driver]:
OnAuthClient:alghm = 0, seq = 2, status = 0, sae_msg_len = 11

RTL8721D[Driver]: auth success, start assoc

RTL8721D[Driver]: association success(res=9)

RTL8721D[Driver]: ClientSendEAPOL[1527]: no use cache pmksa

RTL8721D[Driver]: set pairwise key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4)

RTL8721D[Driver]: set group key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4) keyid:1

Interface 0 IP address : 192.168.1.134Attempting MQTT connection...
connected

☒ Autoscroll ☐ Show timestamp
Newline 115200 baud Clear output

```

After Ameba is connected to MQTT server, it sends the message “hello world” to “outTopic” . To see the message, use another MQTT client. Refer to the MQTT_Basic example guide on how to setup a PC-based MQTT client.

If you wish to use TLS client authentication in addition to server authentication, you will need to generate an OpenSSL private key and obtain a signed certificate from the server. For testing purposes, signed certificates can be obtained from test.mosquitto.org by following the guide at <https://test.mosquitto.org/ssl/>.

Replace the character strings “certificateBuff” and “privateKeyBuff” with your signed certificate and OpenSSL private key, ensuring that they are formatted the same way as the shown in the example code. Also uncomment the highlighted code to enable client authentication, and to change the MQTT port number.

```


MQTT_TLS | Arduino
File Edit Sketch Tools Help

MQTT_TLS
45 "-----END CERTIFICATE-----\n";
46
47 char* certificateBuff = \
48 "-----BEGIN CERTIFICATE-----\n" \
49 "MIIDjTCCAnWgAwIBAgIBADANBgkqhkiG9w0BAQsFADCBkDELMAkGA1UEBhMCR0Ix\n" \
50 "FzAVBgNVBAGMD1VuaXRlZCBLaW5nZG9tMQ4wDAYDVQQHDAVEZXJieTESMBAGAlUE\n" \
51 "CgwJTW9zcXVpdHRvMQswCQYDVQQLDAJDTQTEWMBQGA1UEAwNBW9zcXVpdHRvLm9y\n" \
52 "ZzEfMB0GCSqGSIb3DQEJARYQcm9nZXJAYXRjaG9vLm9yZzAeFw0yMDA3MTcxMDM0\n" \
53 "MjRaFw0yMDEwMTUxMDM0MjRaMGcxZzAJBgNVBAYTA1NHMRIwEAYDVQQIDAlTaW5n\n" \
54 "YXBvcnUxZjAQBgNVBACMCVnbnmdhcG9yZTEQMA4GA1UECgwHUHVhbnRlZEMMAoG\n" \
55 "AlUECwWU0QzMRAdDgYDVQDDAdhdXJpY2FsMIIIBIjANBgkqhkiG9w0BAQEFAAO\n" \
56 "AQ8AMIIICgKCAQEAmoglck7TyKdDw/943tfGLvwY/rz6DCZkosOQCYEZhjMSjX4M\n" \
57 "BNcCU/rhwm8EP+luYZfHrdsijalMuSUGUOi9Ylt+SqzYLvvgLi8+h3LIGiGvqghs\n" \
58 "97iyWNUlWfWEMqBxjRVAI7/+u3b/lZtkz9UBN7+/y4jGLTsaW4IRQ5qCwt58ov+Q\n" \
59 "QU2PYS8qMlCRTxaokXOiLnBkxsOTq+aKLTdlx8nHjXSNCnOPjzzc4pq7rMjGyzq5\n" \
60 "edrO/pX9yFjD+wTgyssdnhTBgL8xTsx7mfDfpgdT/Bk7wZWQyFlosssdYLGqU6MN\n" \
61 "8wIl3wmqBymHAeFkihMBf4kDlglWLYZuziBWSwIDAQABoxowGDAJBgNVHRMEAjAA\n" \
62 "MAsGAlUdDwQEAwIF4DANBgkqhkiG9w0BAQsFAAOCAQEASqd/fRlpuUgehZMjzRNO\n" \
63 "RADV/gjX/UkWhlu66HbWhPDTuu5Nesms79bR7IbnP0umdt8nYdrW/ersTTFYkEv\n" \
64 "7rV6xlatPjXhuzlbwYeRSglcG+3cjiyFmMr2tlaVHMPXzfHBBEwOvbqIonPQnEe9\n" \
65 "6X0j/10xKMdsVKCb9OpAqlfDd4199M6t1TJiqaZ6OVAGpJ/ga0LNu0MNHPU8s68X\n" \
66 "ODZA8GwI0lkQUxUkrmaYmth3R4A3uIYfs4ff9u71TgT9wtnwQftacHhVAmF+hQpW\n" \
67 "luJqKtHI/Ox0Mya0YlaONZavT3WgtxnRmEdAv6gn9WNfko6qr98AqGijX2VZpjRf\n" \
68 "oQ==\n" \
69 "-----END CERTIFICATE-----\n";
70
71 char* privateKeyBuff = \
72 "-----BEGIN RSA PRIVATE KEY-----\n" \
73 "MIIEpAIBAAKCAQEAmoglck7TyKdDw/943tfGLvwY/rz6DCZkosOQCYEZhjMSjX4M\n" \
74 "BNcCU/rhwm8EP+luYZfHrdsijalMuSUGUOi9Ylt+SqzYLvvgLi8+h3LIGiGvqghs\n"

```

1

RTL8722DM/RTL8722CSM on COM9

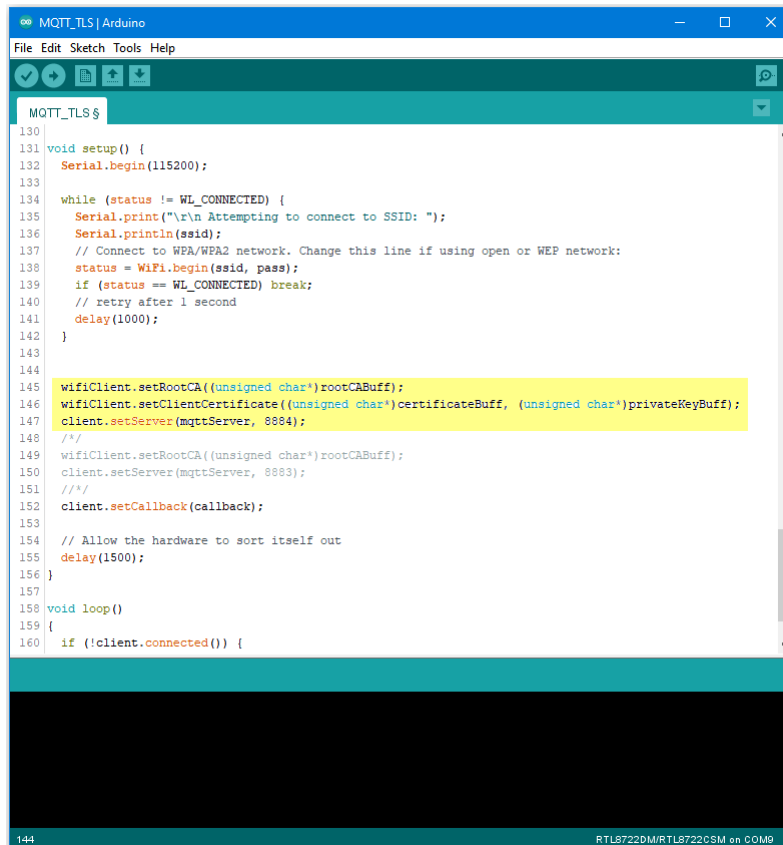

```

MQTT_TLS $
130
131 void setup() {
132   Serial.begin(115200);
133
134   while (status != WL_CONNECTED) {
135     Serial.print("\r\n Attempting to connect to SSID: ");
136     Serial.println(ssid);
137     // Connect to WPA/WPA2 network. Change this line if using open or WEP network:
138     status = WiFi.begin(ssid, pass);
139     if (status == WL_CONNECTED) break;
140     // retry after 1 second
141     delay(1000);
142   }
143
144
145   wifiClient.setRootCA((unsigned char*)rootCABuff);
146   wifiClient.setClientCertificate((unsigned char*)certificateBuff, (unsigned char*)privateKeyBuff);
147   client.setServer(mqttServer, 8884);
148   /*
149   wifiClient.setRootCA((unsigned char*)rootCABuff);
150   client.setServer(mqttServer, 8883);
151   /*
152   client.setCallback(callback);
153
154   // Allow the hardware to sort itself out
155   delay(1500);
156 }
157
158 void loop()
159 {
160   if (!client.connected()) {

```

Upload PM2.5 Data to LASS System

Intro to LASS

The LASS stands for “Location Aware Sensor System” . It is an open project and was started only for the interest of public welfare. Find detailed introduction [here](#).

Practically, LASS is based on MQTT protocol to collect all kinds of uploaded data, and for those who need these data can subscribe top as well.

Find more LASS information at their [official hackpad](#).

Preparation


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- PlanTower PMS3003 or PMS5003 x1

Example

In this example, we use applications mentioned at our website, including:


- **MQTT**: a MQTT-Broker to connect to LASS. The Client is “FT1_0XXXX” , the XXXX are the four last digits of Ameba’ s Wi-Fi MAC, and the outTopic is “LASS/Test/Pm25Ameba/**clientID**” , where clientID is the actual Ameba’ s MQTT client ID.
- **NTP**: uploaded data must have time notation
- **PM2.5**: uploaded data includes PM2.5 information

Open the example. “File” -> “Examples” -> “AmebaMQTTClient” -> “lass_basic”

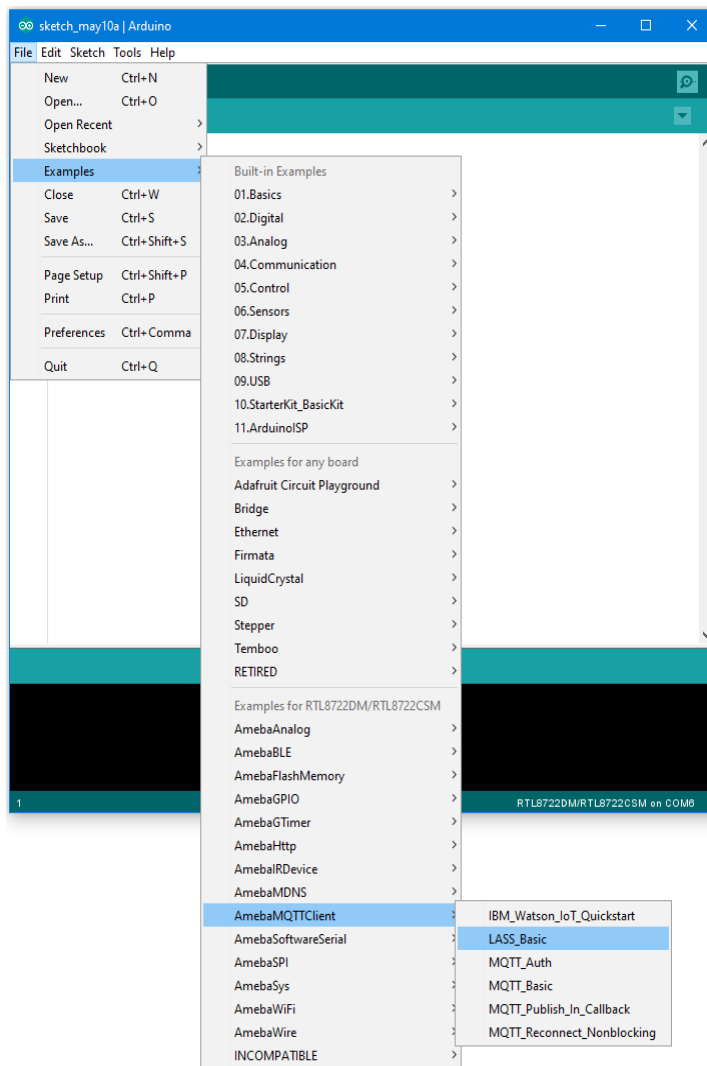

This example requires internet connection, so make sure you fill in SSID and PASS into AP information that you wish to connect.

Also, LASS requires GPS information. There is no GPS sensor included in this example, so you must manually provide GPS information. Use Google Map to find the coordinates you plan to place your Ameba. You can see in this example that the latitude is 24.7814033, and the longitude is 120.9933676

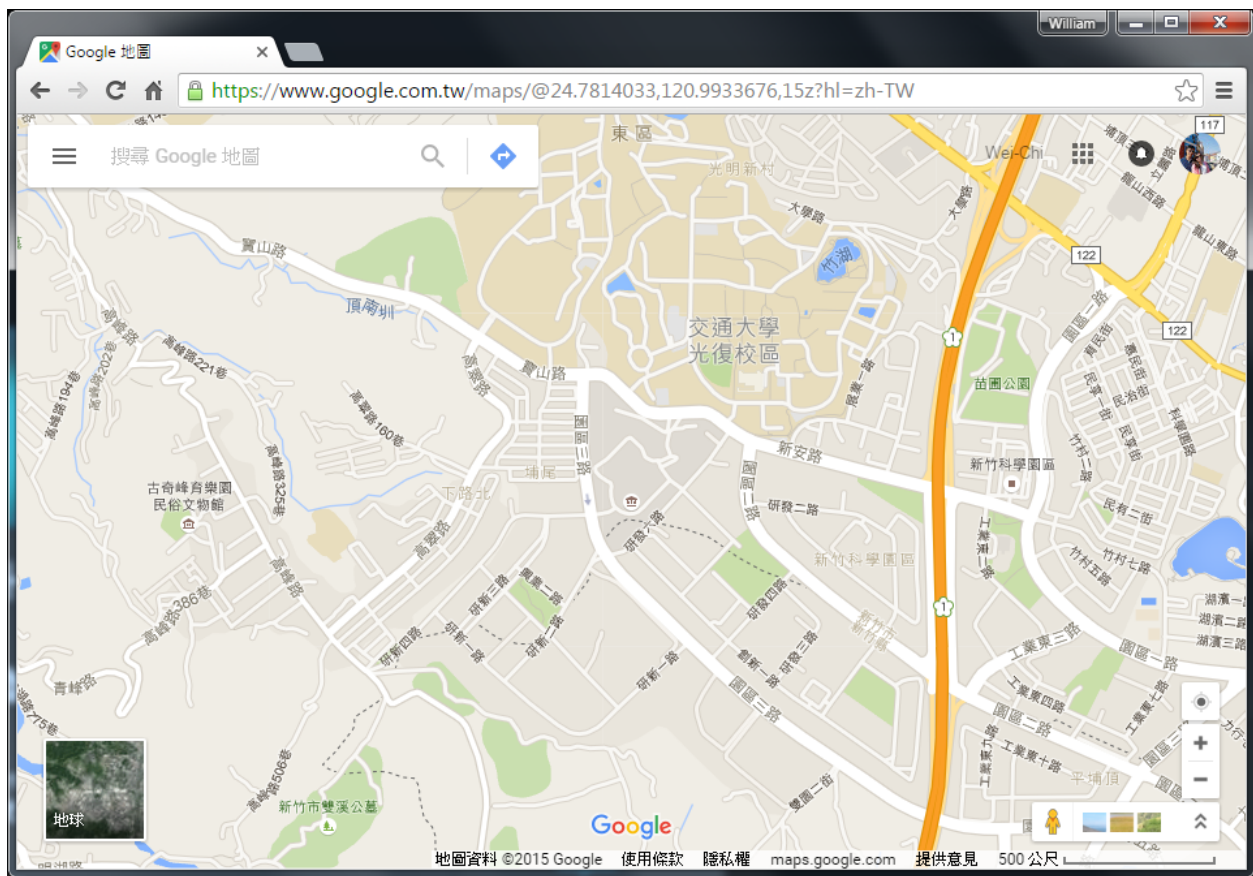

Fill in GPS info at `gps_lat` and `gps_lon`.

```

1  /*
2   This example demonstrate how to upload sensor data to MQTT server of LASS.
3   It include features:
4       (1) Connect to WiFi
5       (2) Retrieve NTP time with WiFiUDP
6       (3) Get PM 2.5 value from PMS3003 air condition sensor with UART
7       (4) Connect to MQTT server and try reconnect when disconnect
8
9   You can find more information at this site:
10
11   https://lass.hackpad.com/LASS-README-DtZ5T6DXLbu
12
13  */
14
15  #include <WiFi.h>
16  #include <PubSubClient.h>
17  #include <WiFiUDP.h>
18  #include <PMS3003.h>
19
20  char ssid[] = "yourNetwork"; // your network SSID (name)
21  char pass[] = "secretPassword"; // your network password
22  int keyIndex = 0; // your network key Index number (needed onl
23
24  char gps_lat[] = "24.7814033"; // device's gps latitude
25  char gps_lon[] = "120.9933676"; // device's gps longitude
26
27  char server[] = "gpssensor.ddns.net"; // the MQTT server of LASS
28  char clientId[17] = ""; // client id for MQTT
29  char outTopic[20] = "LASS/Test/PM25/live"; // MQTT publish topic
30


```

1


RTL8722DM/RTL8722CSM on COM8

Then connect sensors according to UART-PlanTower PMS3003 wiring example.

RTL8722DM / RTL8722CSM:

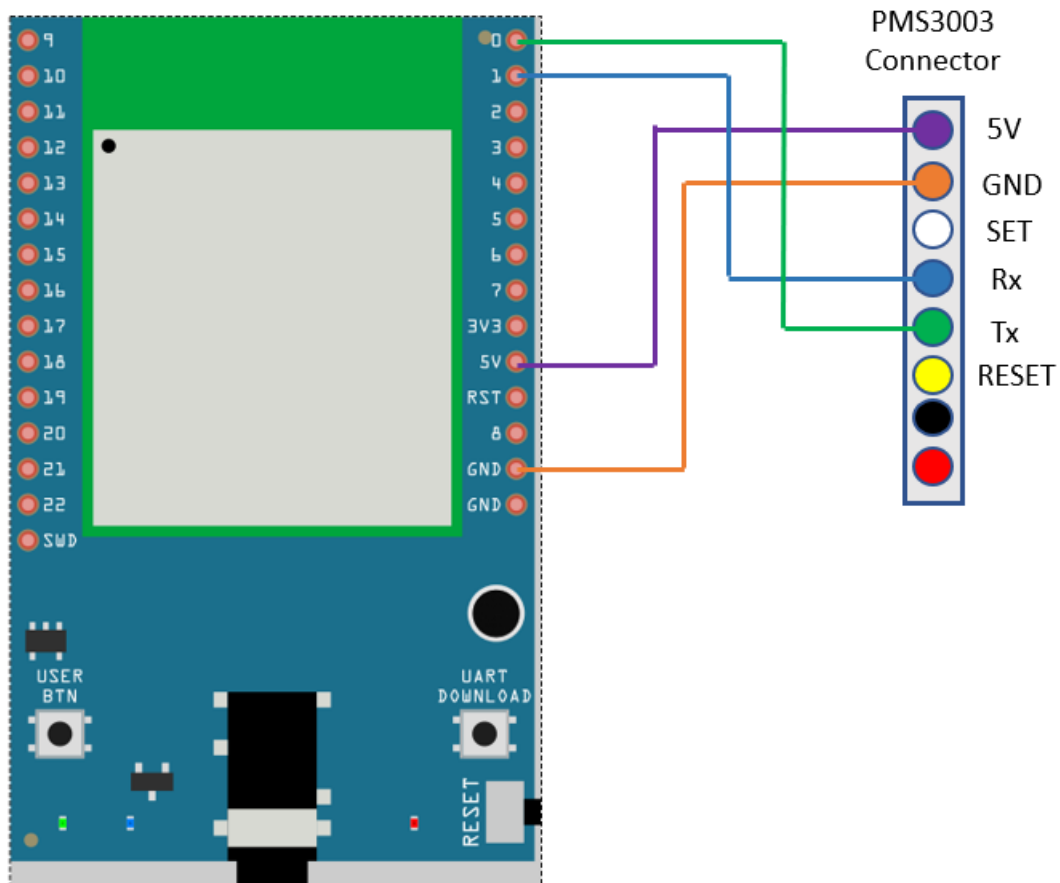


Compile the code and upload it to Ameba. After pressing the Reset button, Ameba will attempt to read PM2.5 data every minute and upload it to LASS MQTT-Broker. Open Serial Monitor to see the uploaded data, including client id, topic, and current PM2.5 status.

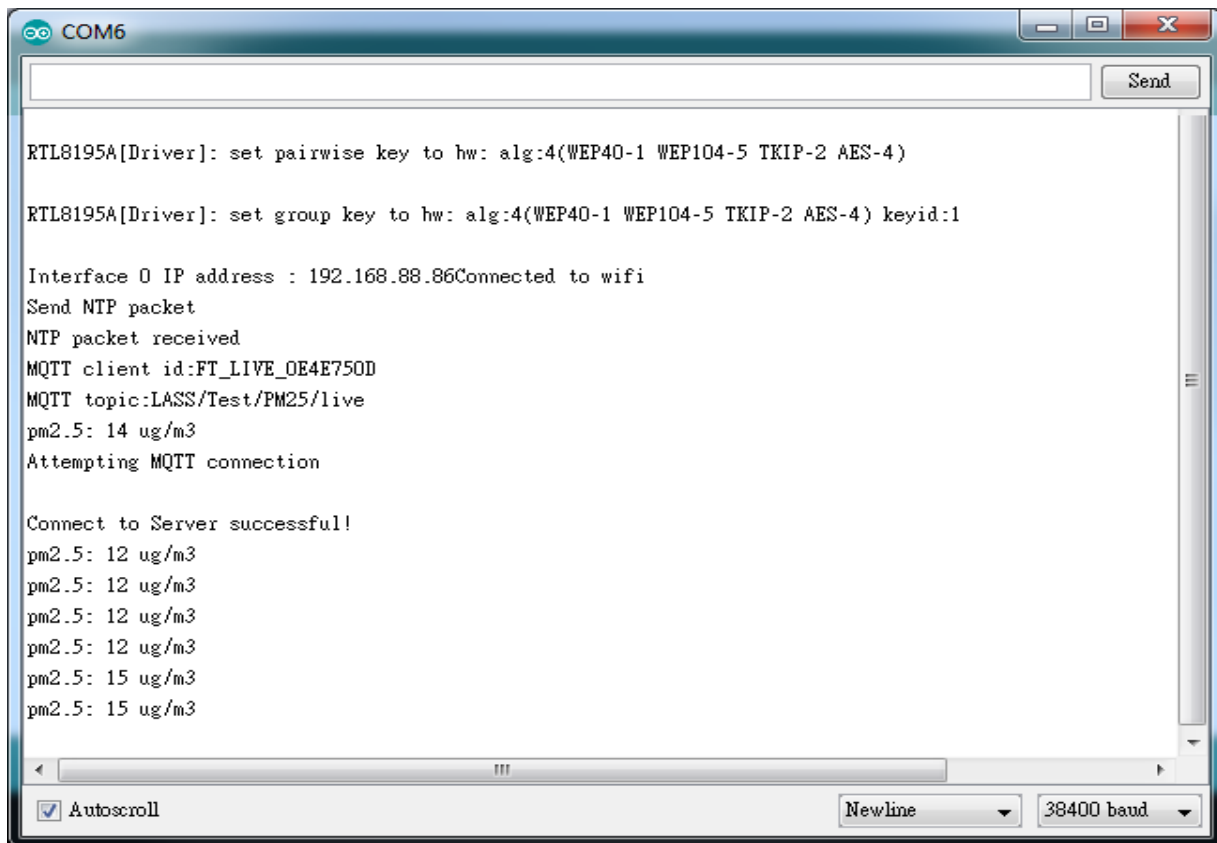

We can also use MQTTlens to verify if the data is properly uploaded.

Enter “gpssensor.ddns.net” as the MQTT-Broker server and “LASS/Test/PM25/live” as the subscribe topic to receive data.

The time uses UTC format, and the PM2.5 data stores in s_d0. In the figure, s_d0 = 9 represents that the PM2.5 is 9, meaning that the entire publish/subscribe process is working successfully.

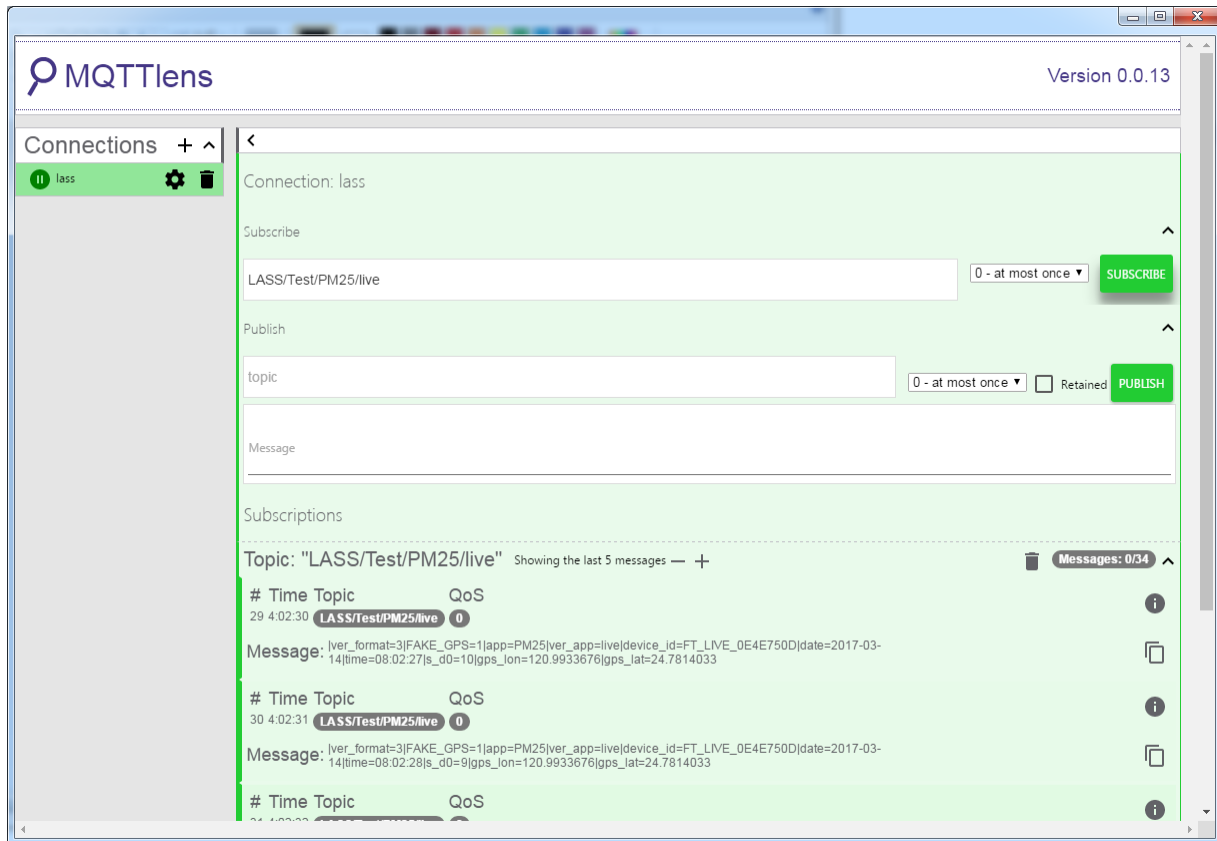

Ameba AP Mode

In AP mode, Ameba can accept at most 3 station connections, and can be set to open mode or WPA2 mode.


Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1

Example

In this example, we turn on the AP mode of Ameba and connect station to Ameba.

Open the WiFi AP example, “File” -> “Examples” -> “AmebaWiFi” -> “WiFiAPMode”

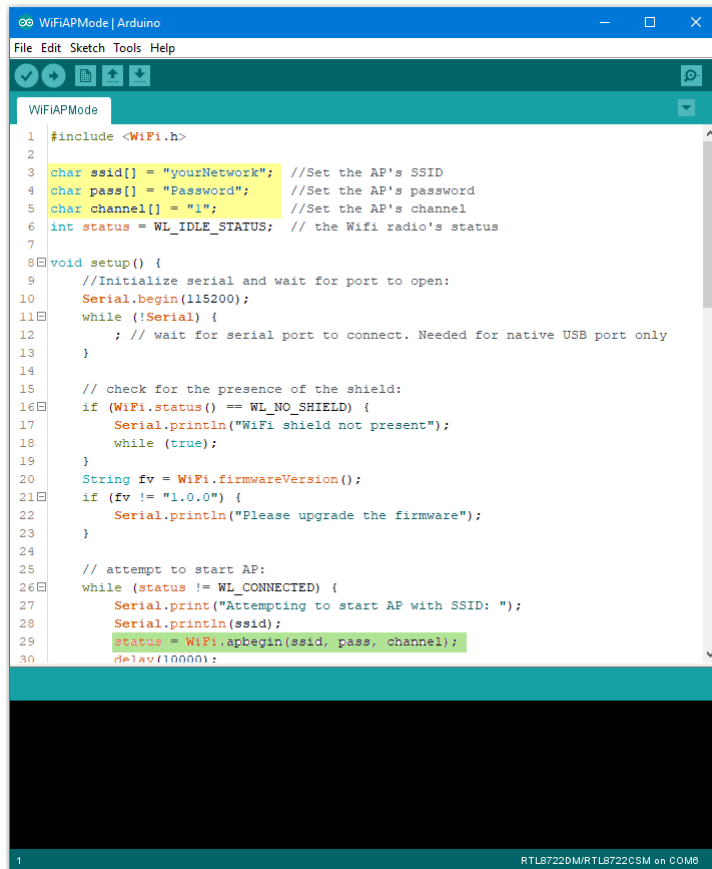

```
1 #include <WiFi.h>
2
3 char ssid[] = "yourNetwork"; //Set the AP's SSID
4 char pass[] = "Password"; //Set the AP's password
5 char channel[] = "1"; //Set the AP's channel
6 int status = WL_IDLE_STATUS; // the Wifi radio's status
7
8 void setup() {
9     //Initialize serial and wait for port to open:
10    Serial.begin(115200);
11    while (!Serial) {
12        ; // wait for serial port to connect. Needed for native USB port only
13    }
14
15    // check for the presence of the shield:
16    if (WiFi.status() == WL_NO_SHIELD) {
17        Serial.println("WiFi shield not present");
18        while (true);
19    }
20    String fw = WiFi.firmwareVersion();
21    if (fw != "1.0.0") {
22        Serial.println("Please upgrade the firmware");
23    }
24
25    // attempt to start AP:
26    while (status != WL_CONNECTED) {
27        Serial.print("Attempting to start AP with SSID: ");
28        Serial.println(ssid);
29        status = WiFi.apbegin(ssid, pass, channel);
30        delay(10000);
31    }
```


In the highlighted code snippet, fill in your SSID, PASSWORD and CHANNEL.

The code highlighted in green is the API we used to turn on the AP mode in security mode.

If you want to turn on the AP mode in open mode, please modify the code to

```
status = WiFi.apbegin(ssid, channel);
```

Then upload the sample code and press reset, and you can see related information shown in serial monitor.

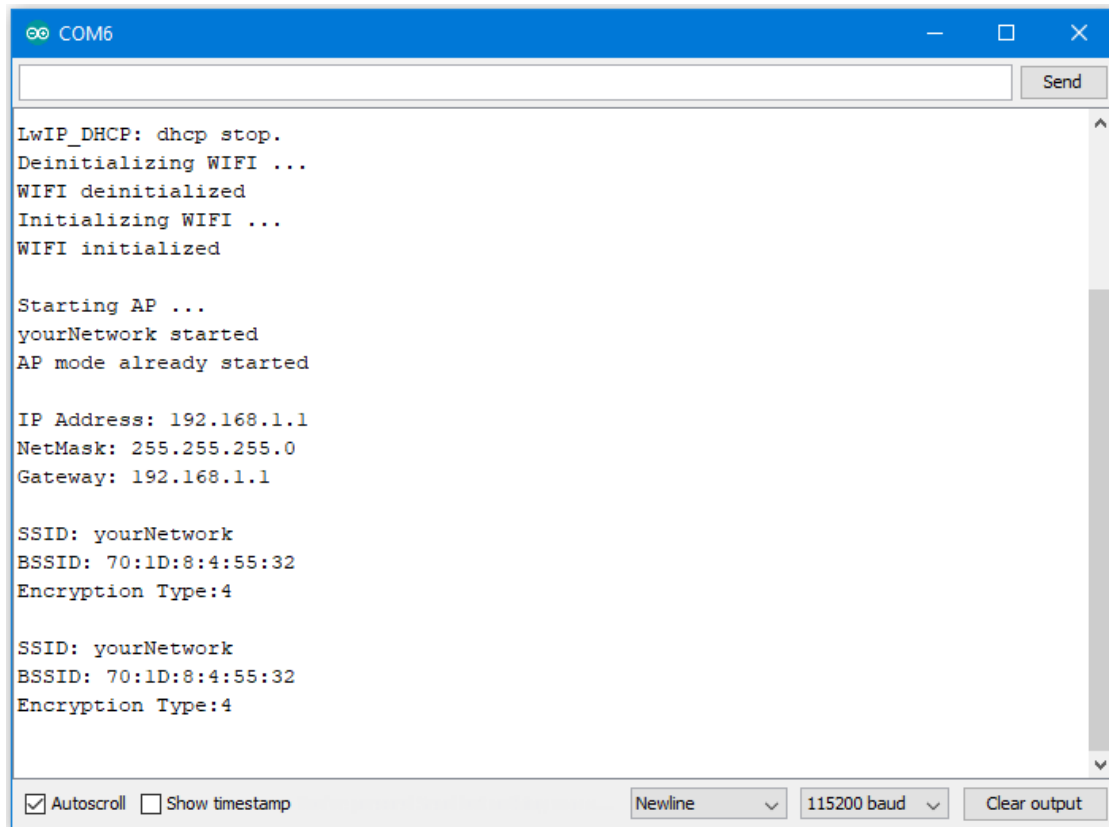

```
COM6
LwIP_DHCP: dhcp stop.
Deinitializing WIFI ...
WIFI deinitialized
Initializing WIFI ...
WIFI initialized

Starting AP ...
yourNetwork started
AP mode already started

IP Address: 192.168.1.1
NetMask: 255.255.255.0
Gateway: 192.168.1.1

SSID: yourNetwork
BSSID: 70:1D:8:4:55:32
Encryption Type:4


SSID: yourNetwork
BSSID: 70:1D:8:4:55:32
Encryption Type:4
```

Serial monitor window titled "COM6" with a "Send" button. The output shows the following messages:


- LwIP_DHCP: dhcp stop.
- Deinitializing WIFI ...
- WIFI deinitialized
- Initializing WIFI ...
- WIFI initialized
- Starting AP ...
- yourNetwork started
- AP mode already started
- IP Address: 192.168.1.1
- NetMask: 255.255.255.0
- Gateway: 192.168.1.1
- SSID: yourNetwork
- BSSID: 70:1D:8:4:55:32
- Encryption Type:4
- SSID: yourNetwork
- BSSID: 70:1D:8:4:55:32
- Encryption Type:4

At the bottom, there are controls: ☒ Autoscroll, ☐ Show timestamp, a Newline dropdown menu, a baud rate dropdown menu set to 115200 baud, and a Clear output button.

In the figure below, we show the messages shown in serial monitor when two stations connect to Ameba AP in open mode:

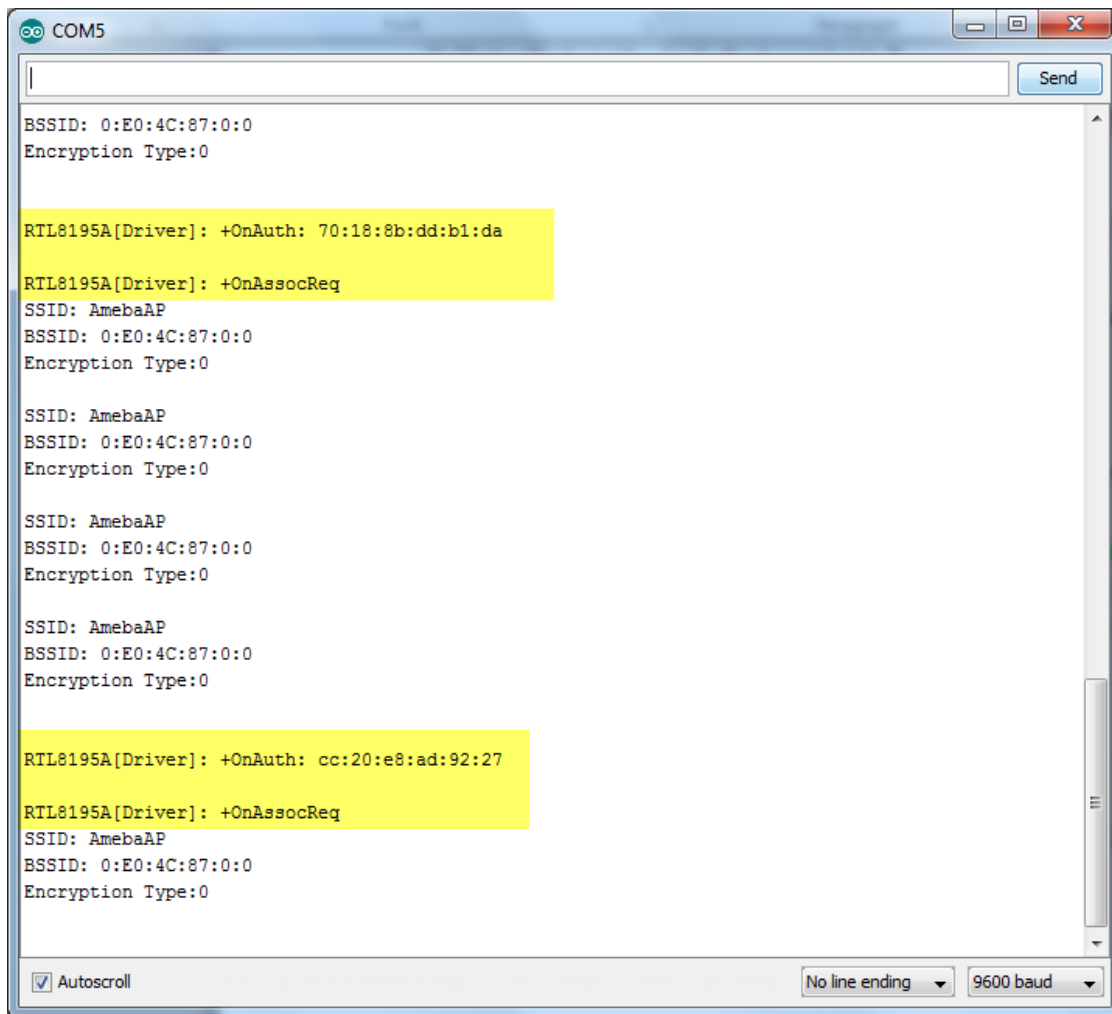

In the figure below, we show the messages shown in serial monitor when a station connects to Ameba AP in security mode:

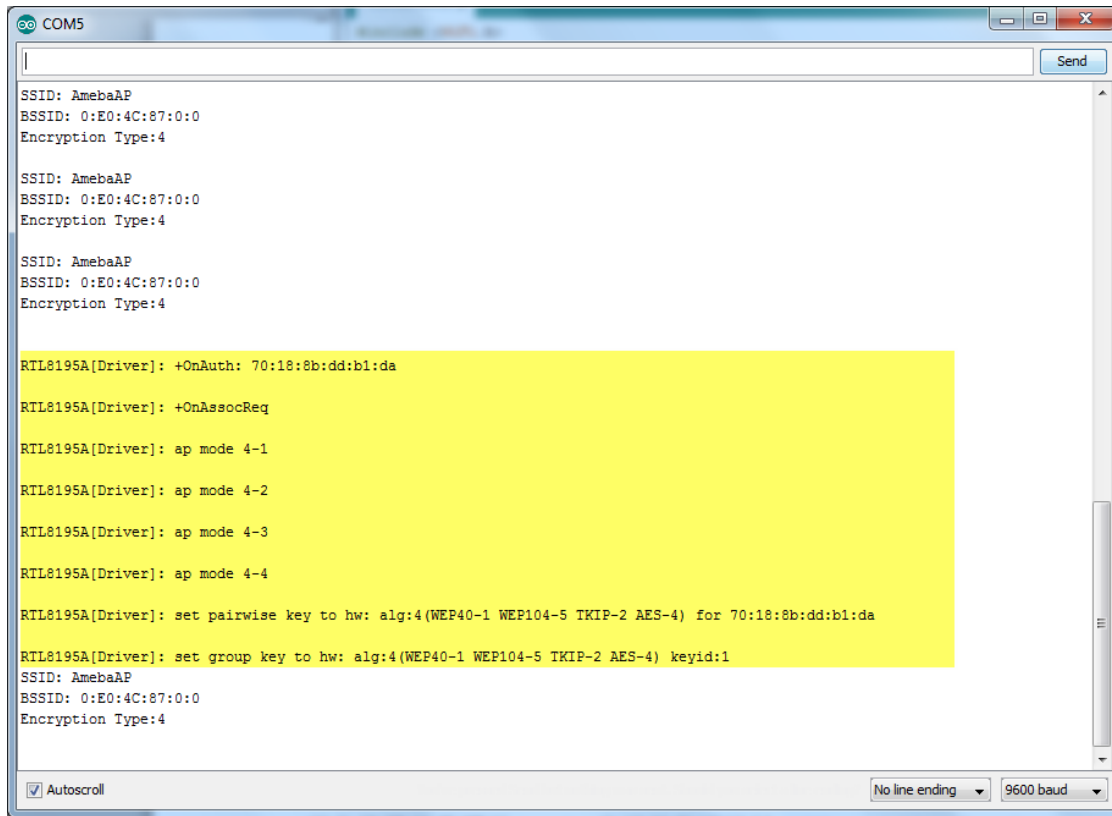

Use mDNS To Let Arduino IDE Find Ameba

Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1

Example

mDNS (Multicast DNS) is a protocol used in the local area network. It delivers the network information like IP address and provided services to others. mDNS is based on the UDP protocol, and it sends packets to 224.0.0.251 with port 5353 under IPv4 address. The naming style for the service follows the format: **{Instance Name}.{Protocol Name}.{Domain}**

- Instance Name: used to identify the name of the service
- Protocol Name: Divided into two parts, the front end is in regard to the name of the service, and it adds baseline as a prefix. The rear end is in regard to the transport protocol name it used, and it also adds baseline as a prefix
- Domain: Local area network in normal cases

For example, Arduino IDE adopts the naming for the mDNS service which is used in OTA as


following: **MyAmeba._arduino_tcp.local**

Among the naming example, “MyAmeba” can identify the Ameba device name and the name “MyAmeba” is changeable. “_arduino_tcp” is the protocol that Arduino IDE adopts, and the Domain is set as local in common.

Open the example, “File” -> “Examples” -> “AmebaMDNS” -> “mdns_on_arduino_ide”

You need to input ssid and password of the AP because the example will use WiFi connection.

And you can find out the naming of the service at the place where it declares MDNS Service. The example uses the default name “MyAmeba” and the name is changeable.

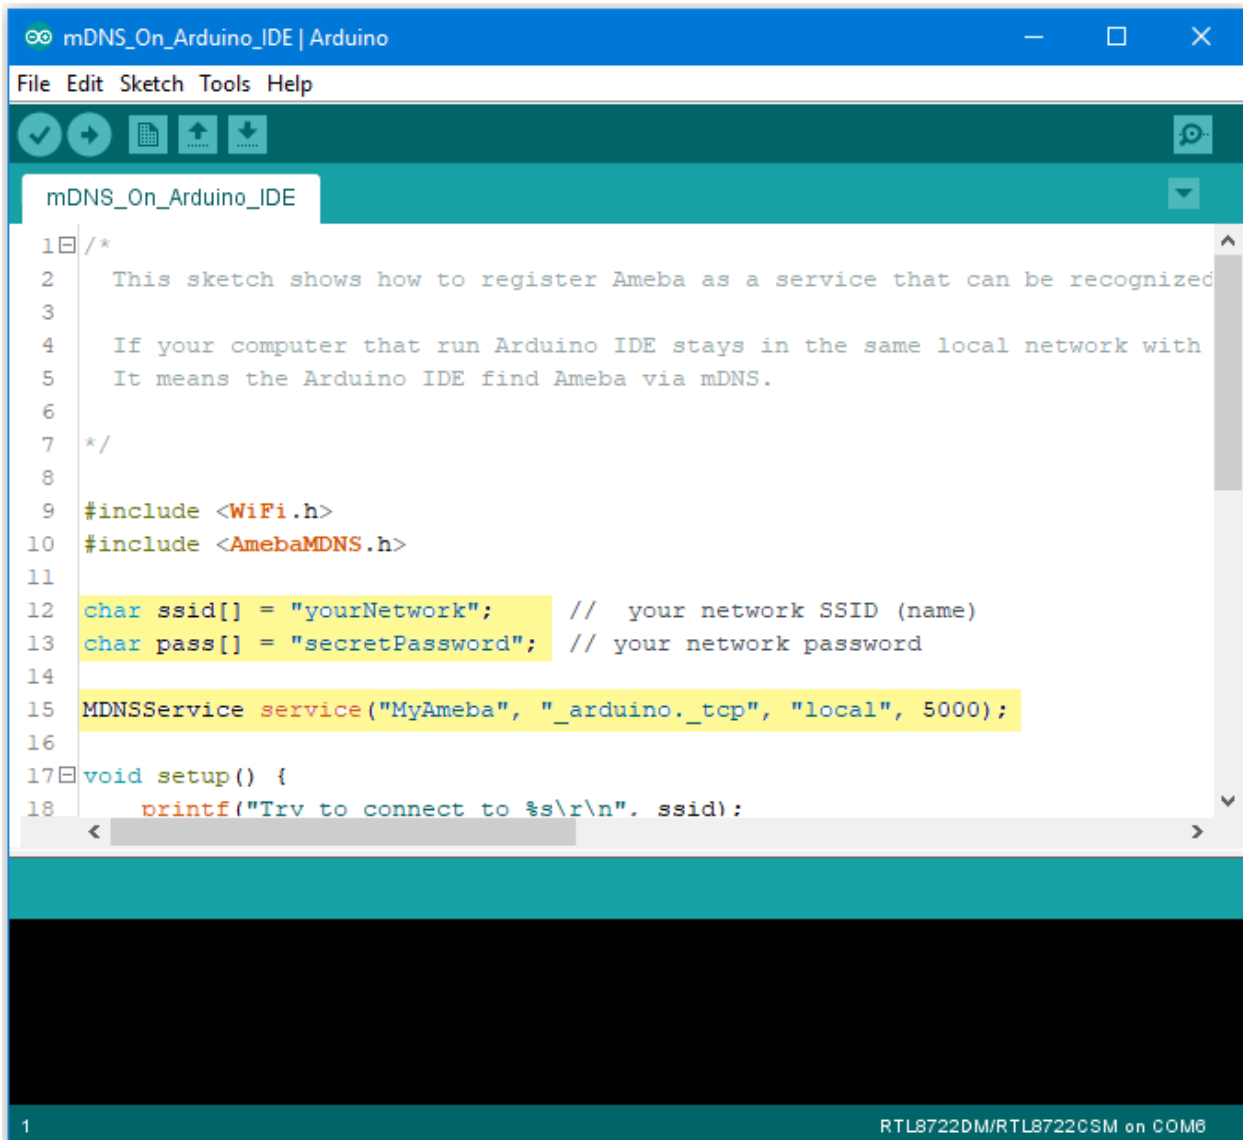


```


1  /*
2   This sketch shows how to register Ameba as a service that can be recognized
3
4   If your computer that run Arduino IDE stays in the same local network with
5   It means the Arduino IDE find Ameba via mDNS.
6
7  */
8
9  #include <WiFi.h>
10 #include <AmebaMDNS.h>
11
12 char ssid[] = "yourNetwork"; // your network SSID (name)
13 char pass[] = "secretPassword"; // your network password
14
15 MDNSService service("MyAmeba", "_arduino_tcp", "local", 5000);
16
17 void setup() {
18     printf("Try to connect to %s\r\n", ssid);

```

Next, go to (“Tools” -> “Port”), and you can find out at least one Serial Port. This port is simulated by Ameba board via USB. Choose this port and upload the compiled code to

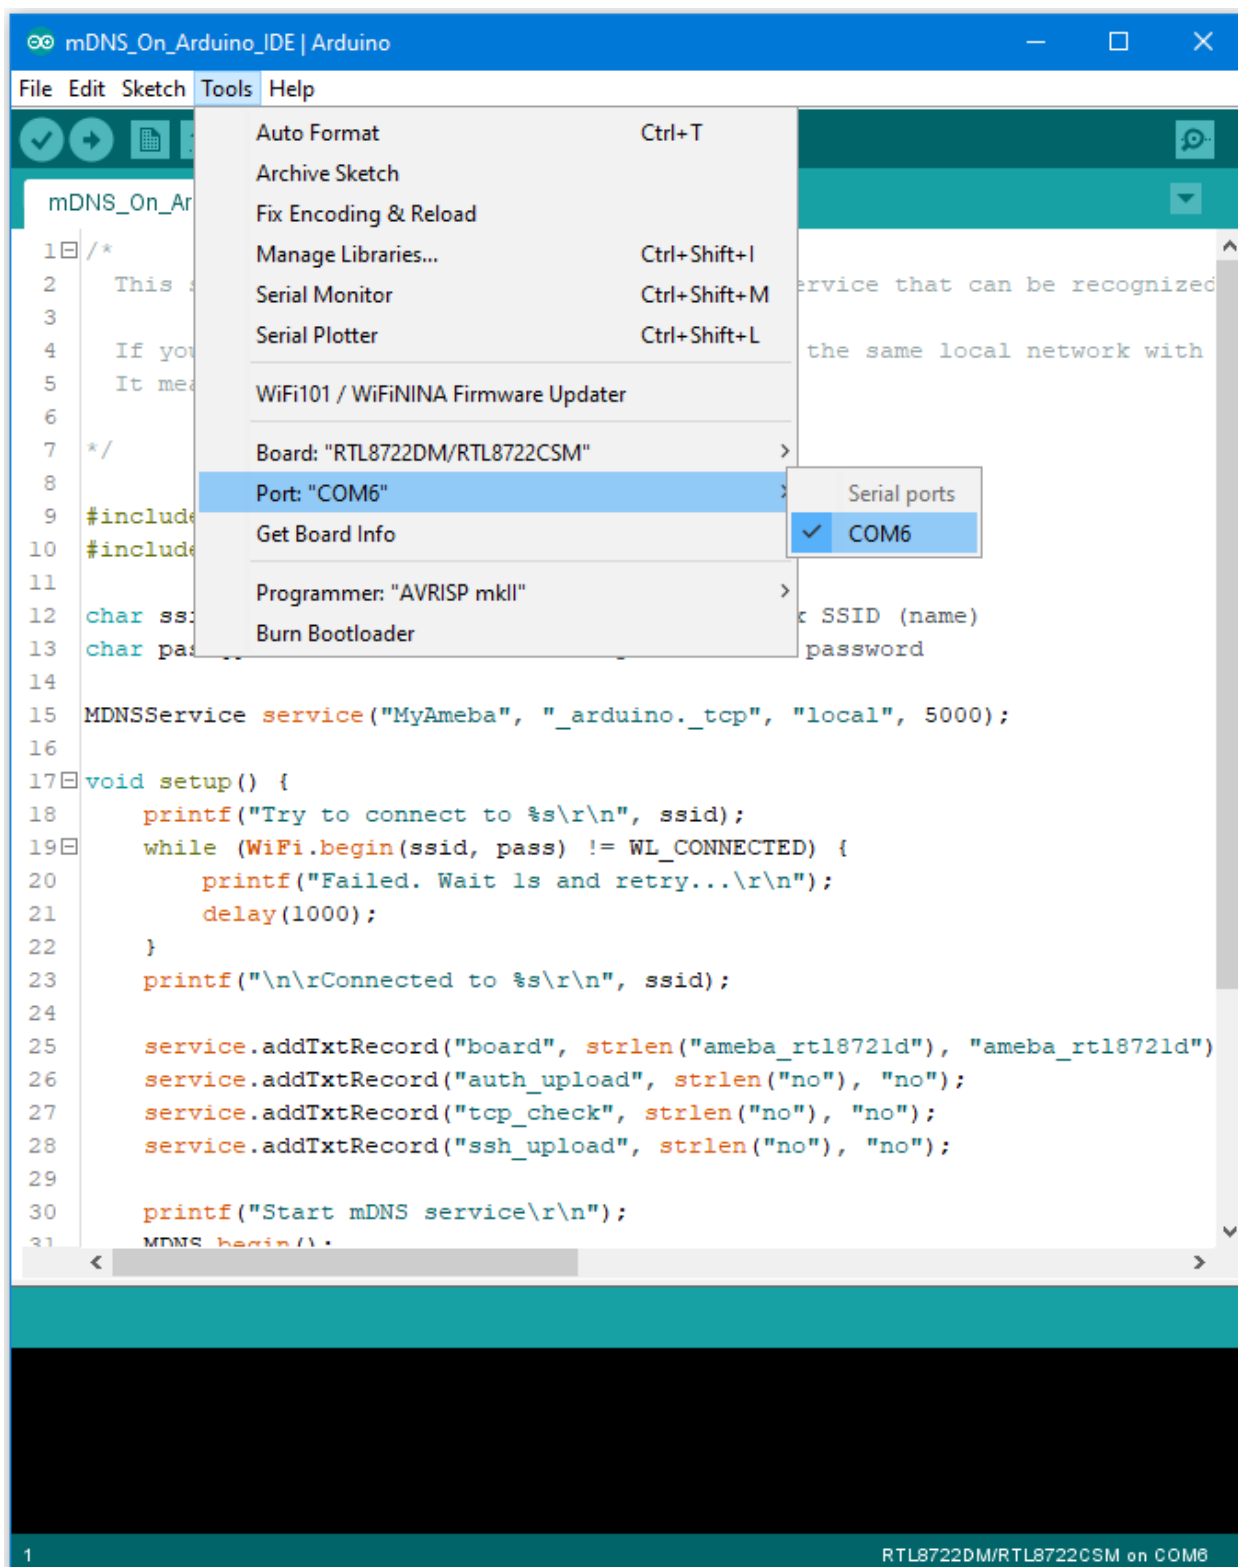

After uploading the code, press the reset button on Amega and waiting for Amega to connect with AP and activate the mDNS service after a while. You can see the Log at the bottom of the Serial Monitor.

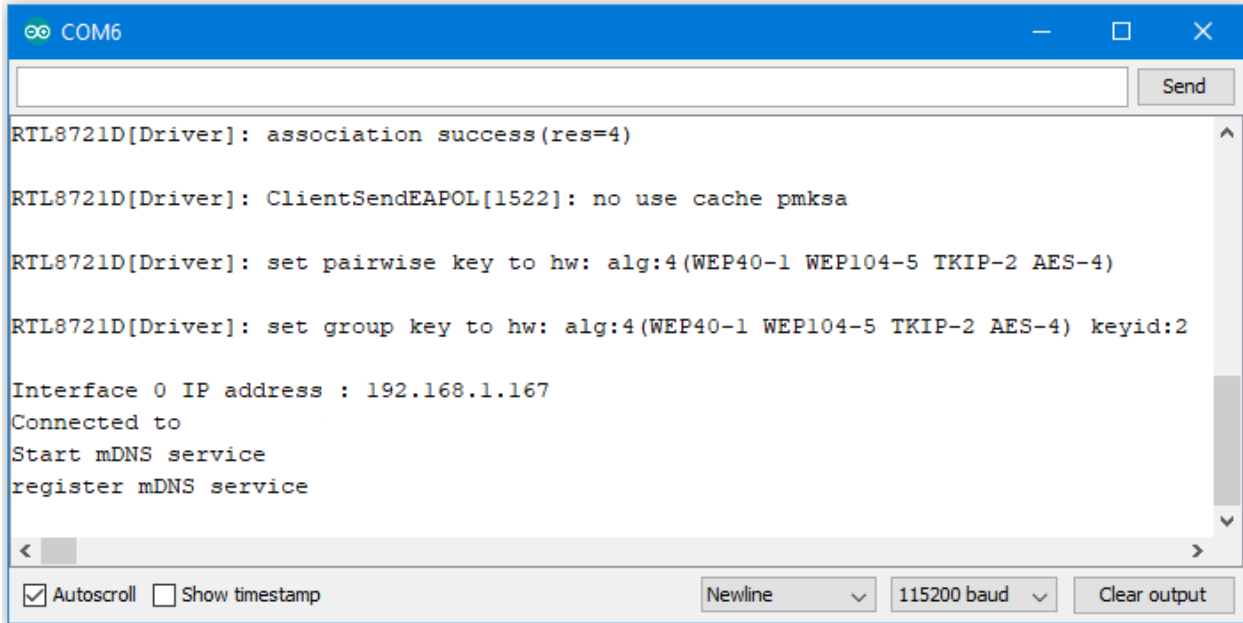

```
RTL8721D[Driver]: association success(res=4)

RTL8721D[Driver]: ClientSendEAPOL[1522]: no use cache pmksa


RTL8721D[Driver]: set pairwise key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4)

RTL8721D[Driver]: set group key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4) keyid:2

Interface 0 IP address : 192.168.1.167
Connected to
Start mDNS service
register mDNS service
```

The screenshot shows a serial monitor window with a blue title bar labeled 'COM6'. It contains a text area with several lines of log output from the RTL8721D driver, including association success, EAPOL client send, and key setting messages. It also shows network configuration for Interface 0, including an IP address of 192.168.1.167 and mDNS service registration. At the bottom, there are controls for 'Autoscroll' (checked), 'Show timestamp' (unchecked), a 'Newline' dropdown, a '115200 baud' dropdown, and a 'Clear output' button.

Then you can find out the added item “Network Ports” “**MyAmeba at 192.168.1.167 (Ameba RTL8722DM/RTL8722CSM)**”, “MyAmeba” is the device name we set up, and “IP” is the IP address that AP assigned to Ameba, the IP address should be the same with the IP shown in the Serial Monitor. Last, “Ameba RTL8722DM/RTL8722CSM” is the type name of the board, and it means that Ameba can let Arduino IDE identify the mDNS service successfully.(We still can not use the Internet to upload the code, and we will explain this part in the OTA exam-

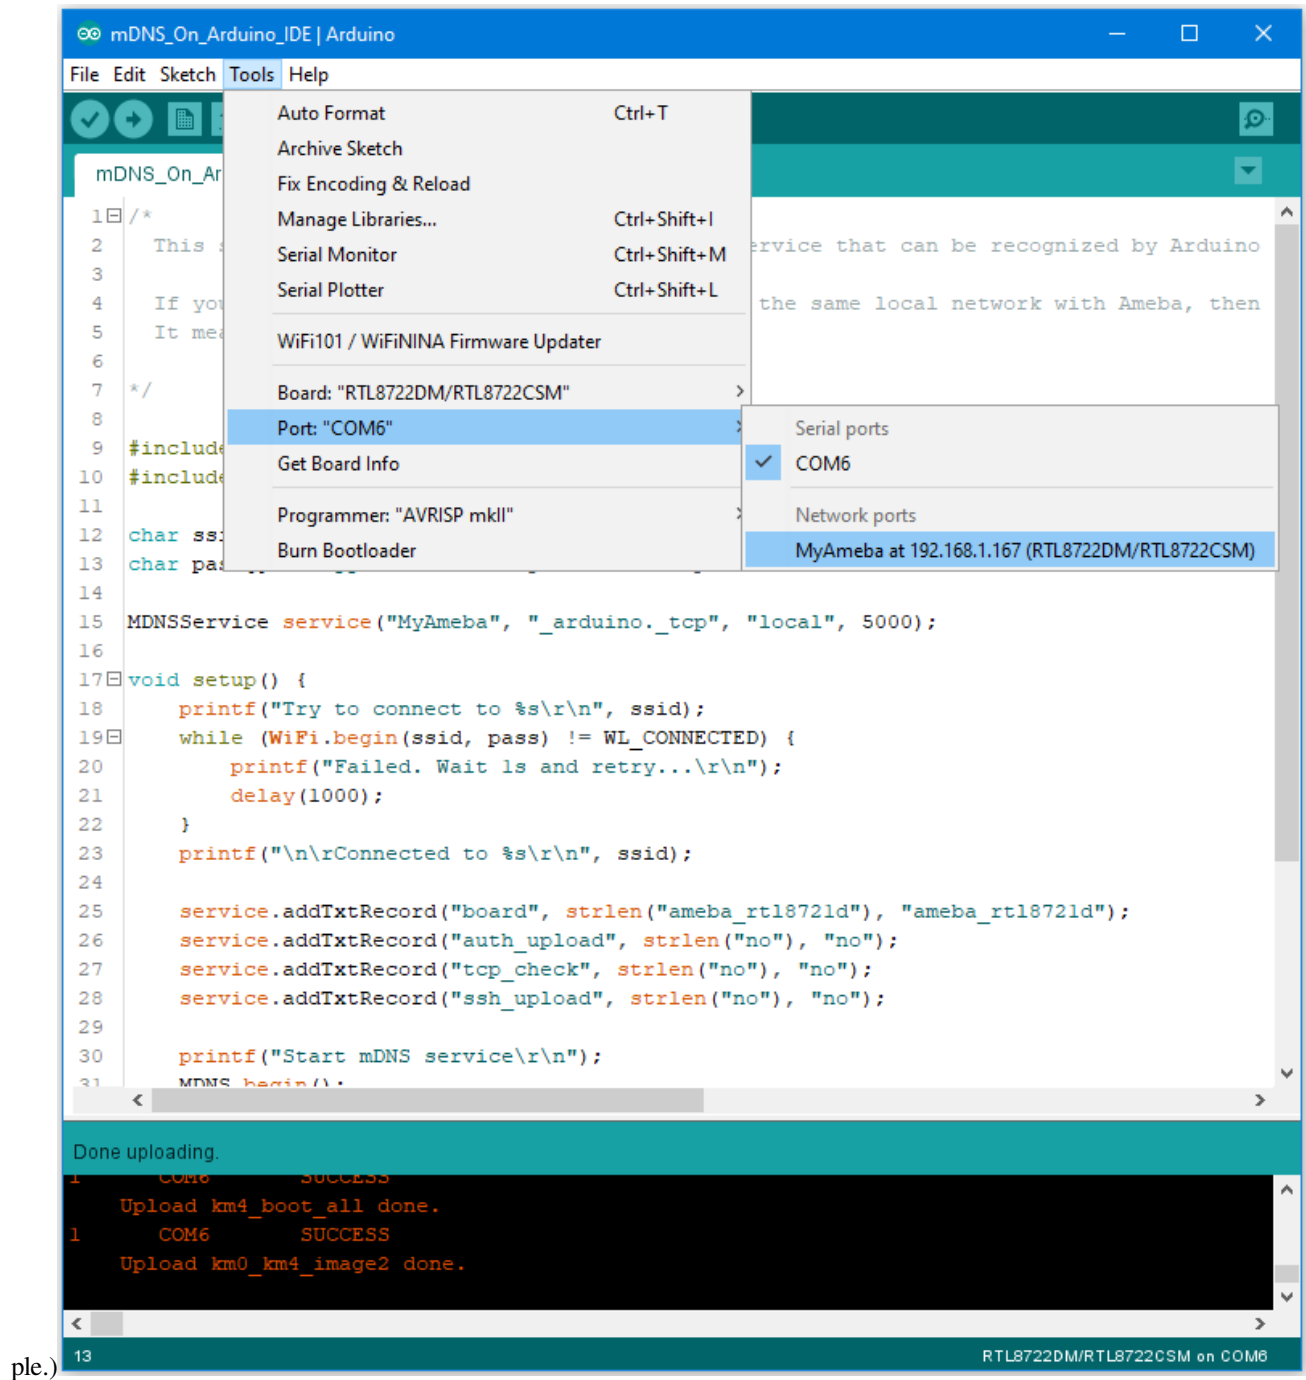

If you cannot find the Network ports on your Arduino IDE, please check:

- Does your computer in the same local area network with the Ameba?
- Restart the Arduino IDE, and it will find the mDNS service again
- Check the Log in Serial Monitor if the Ameba connects to the AP and activate mDNS service successfully

Code Reference

The program set up the mDNS service in the beginning, the first parameter is Instance Name, and it is changeable in this example. The second parameter is the protocol that the service used, and it would be “_arduino._tcp” for Arduino IDE. The third parameter is Domain, and it would be “local” in common. The fourth parameter is the port number for the service, it is 5000 here and we doesn’ t use it in the example.

```
MDNSService service("MyAmeba", "_arduino._tcp", "local", 5000);
```

After connected to the network, we set up some text fields for the service. For the following example, “board” is the name of the field, “ameba_rtl8721d” is the value of the field. “board” is used to let Arduino IDE check installed SDK to see if it exists known device or not. We will use the name of the device if there is known device, users can change “ameba_rtl8721d” to “yun” or other names to find out what’ s the difference if interested.

```
service.addTxtRecord("board", strlen("ameba_rtl8721d"), "ameba_rtl8721d");
```

Then we add three text fields “auth_upload” , “tcp_check” , and “ssh_upload” , this example does not activate these services.

```
service.addTxtRecord("auth_upload", strlen("no"), "no");  
service.addTxtRecord("tcp_check", strlen("no"), "no");  
service.addTxtRecord("ssh_upload", strlen("no"), "no");
```

Next we activate MDNS

```
MDNS.begin();
```

and register to the mDNS service.

```
MDNS.registerService(service);
```

Use Firebase To Push Messaging Services

Preparation


- Ameba x 1
- Android Studio
- Smart phone with Google Play Service x 1

Example

In the era of the popularity of smart phones, people often receive reminders from specific apps. In this example, we will teach how to use Google Firebase to send messages from the Ameba Client to mobile phones.

First, we use Firebase Cloud Messaging (FCM) as a cross-platform messaging solution that lets you deliver messages for free and reliably.

With FCM, you can notify your client application (App) to sync emails or other data. You can send a message to drive user engagement. For instant messaging content, a message can transfer up to 4KB of payload to the client application.

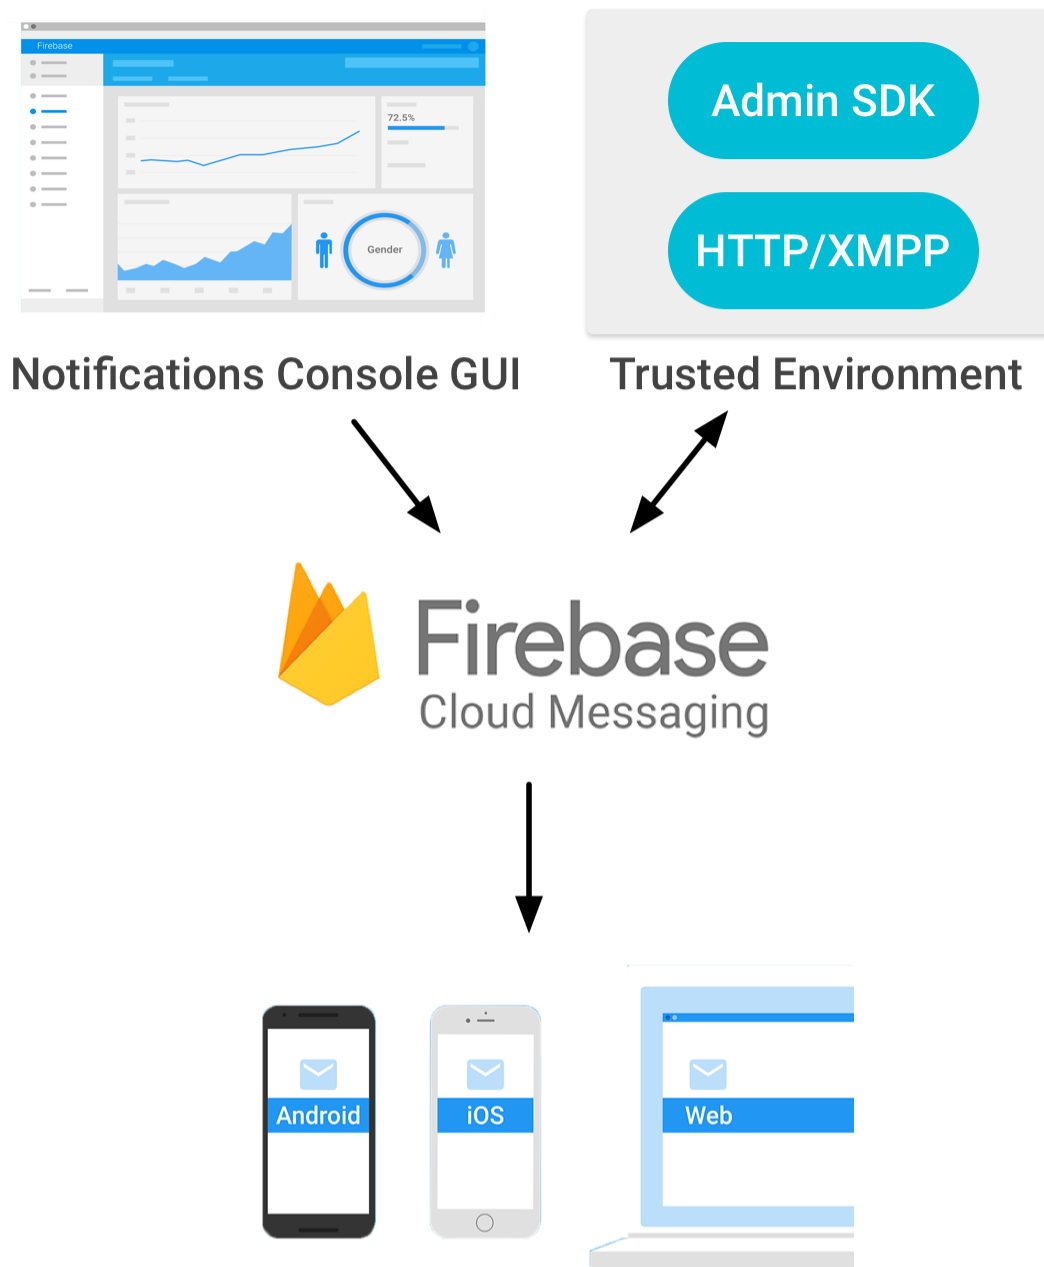

The FCM implementation includes two main parts for sending and receiving:

1. A trusted environment, such as Cloud Functions for Firebase or an application server for building, locating, and sending messages.
2. Receive iOS, Android or Web (JavaScript) client applications for messages.

You can use [Admin SDK](#) or [HTTP&XMPP API](#) to send messages. To test or send marketing or engagement messages with powerful built-in targeting and analytics, you can also use [Notifications composer](#)

We know that Ameba can send messages to specific apps as long as it implements the http client function.

First of all, we must first set up an environment for developing Android apps. Please download Android Studio first on Android official website.

<https://developer.android.com/studio/install>

Then we can use the Android example provided by Firebase to download Firebase Quickstart Samples.


<https://github.com/firebase/quickstart-android>

Open Android Studio and click on Import Project, select the messaging project in Firebase Quickstart Samples. Since we won't use other functions, we can only choose the messaging project.


Android Studio will need to install the SDK and Google repository for the first time to start the messaging project. You can refer to the following page for update.

<https://developer.android.com/studio/intro/update>


Wait until the required components for compiling the app are installed, you can open the messaging project, and Android Studio comes with the Firebase registration function.

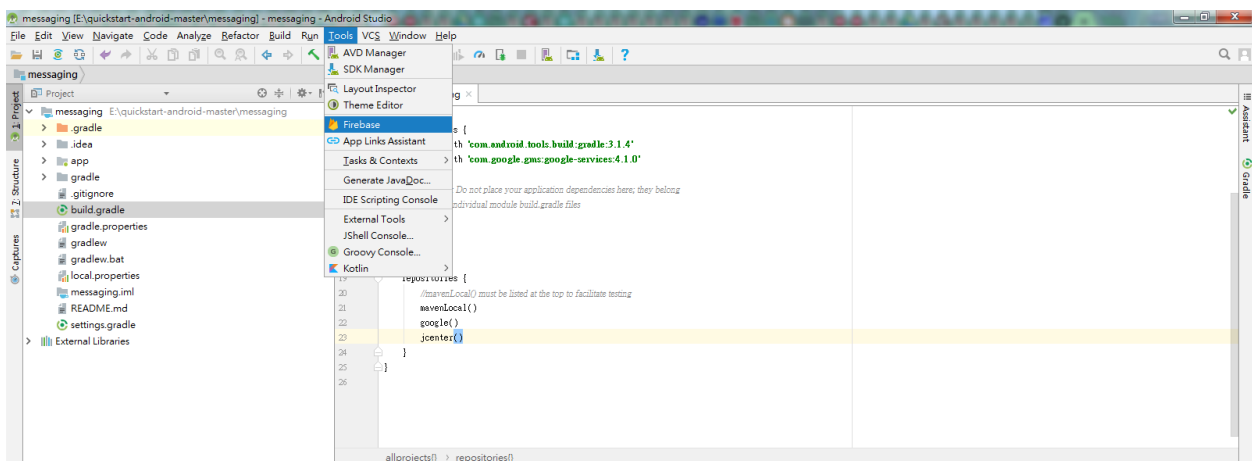


As shown above, open the toolbar and click Tools->Select Firebase.

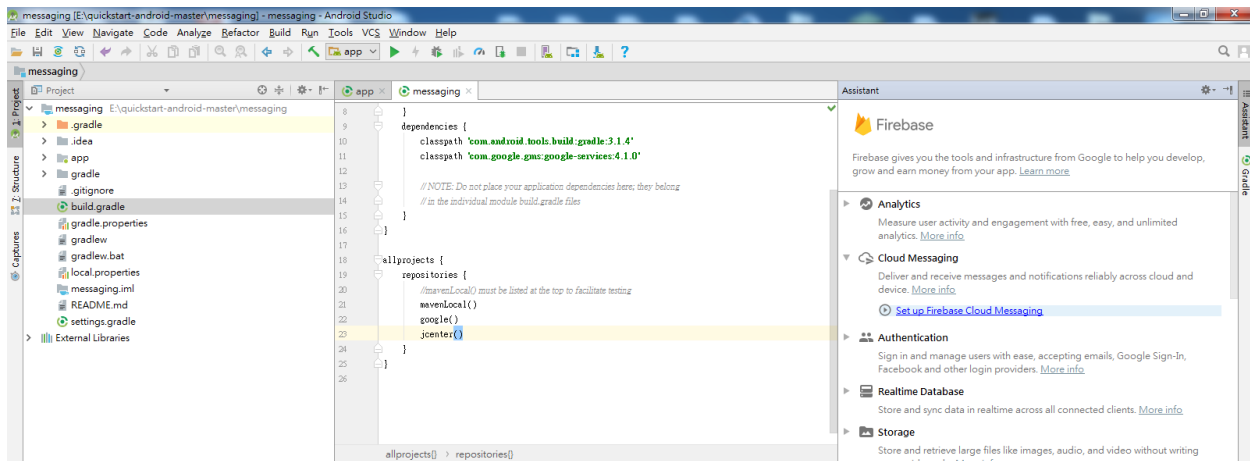

Open Firebase Assistant in the right pane, then see Cloud Messaging, select Set up Firebase Cloud Messaging to start the registration process.

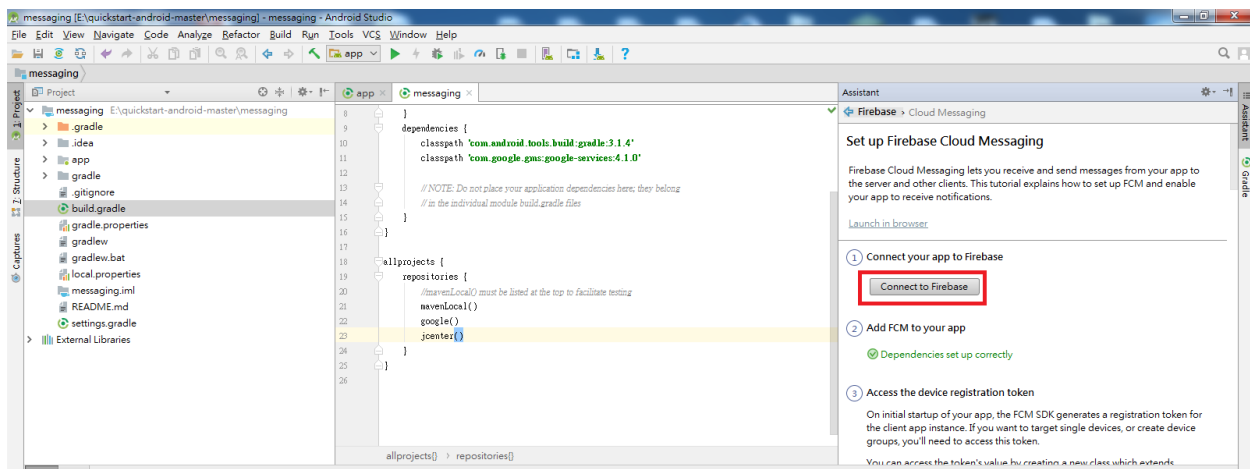

Click Connect to Firebase




Login to Android Studio


Use your Google Account to login to Android Studio and unlock the following services for your Android app:




Then bring out the page, and click on Firebase on the left and log in to the Gmail account. Once you log in, you will be taken to the Firebase homepage.

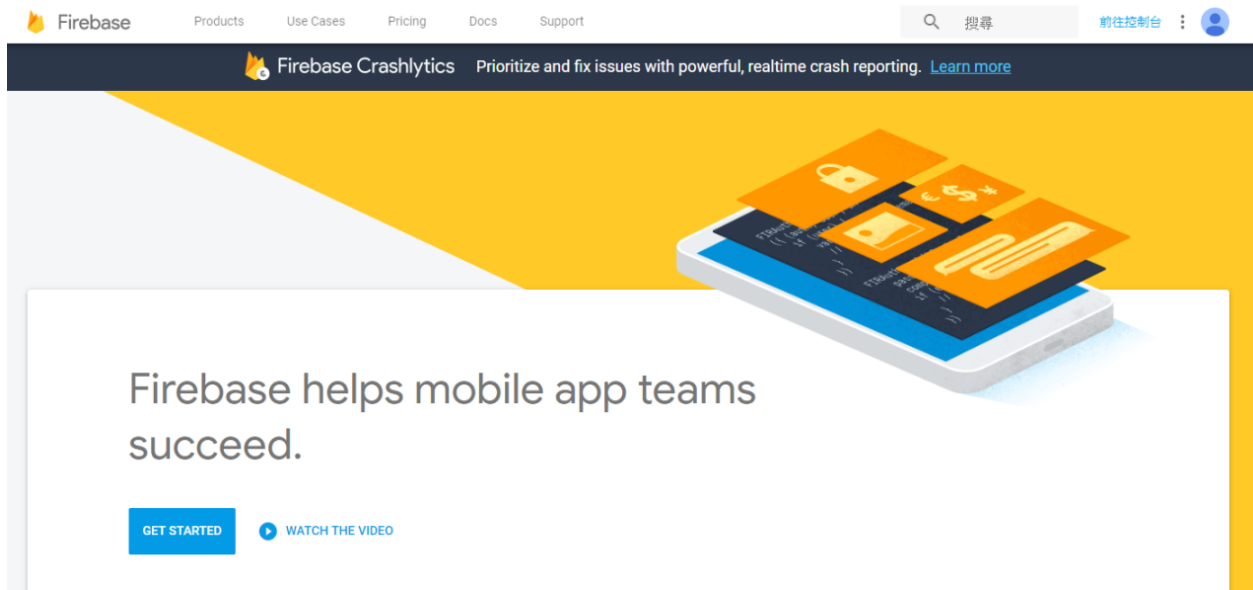

Let's keep the homepage first, we need to go to the Firebase Console and go back to Android Studio.

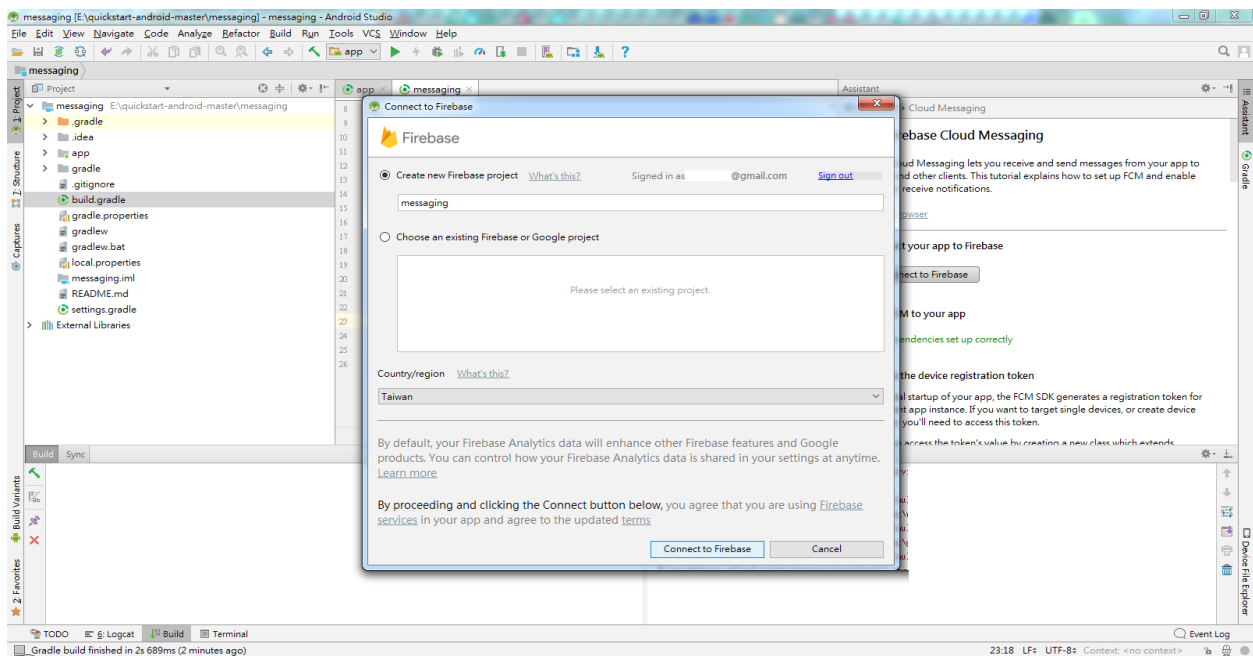


We can see that when the webpage is successfully logged in, Android Studio also brings up the login information dialog box, click connect to Firebase

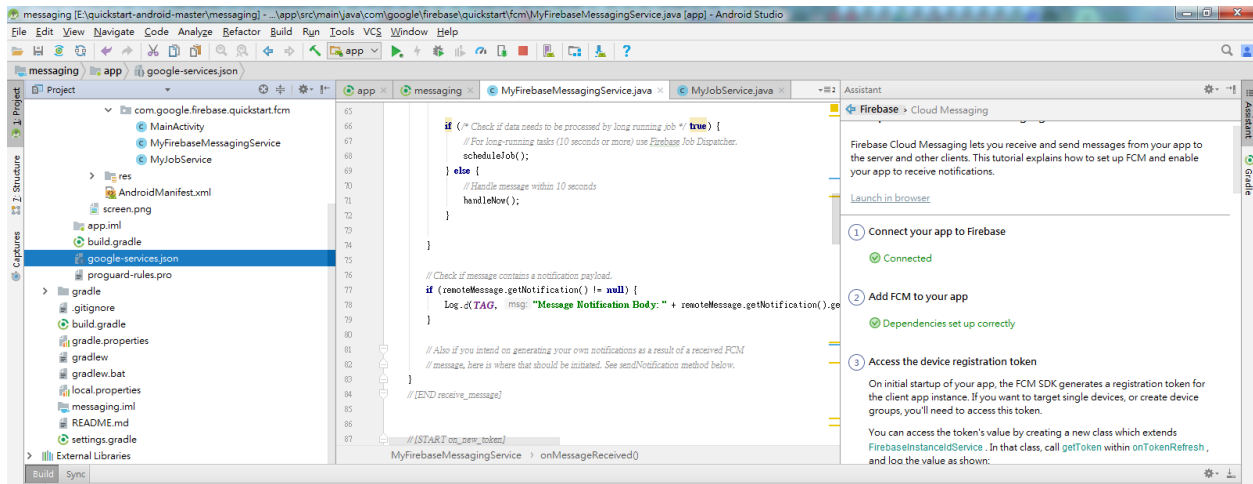


You can see Dependencies set up correctly in the right pane and see a google-service.json file in the left pane, indicating that the app has been registered successfully.

At this point, you can connect your phone to your computer (press Shift+F10) or press the Runs App in the toolbar. Please note here that Firebase requires a mobile phone to provide Google play service (GPS) service. An example of not being able to use Firebase without installing Google Play.

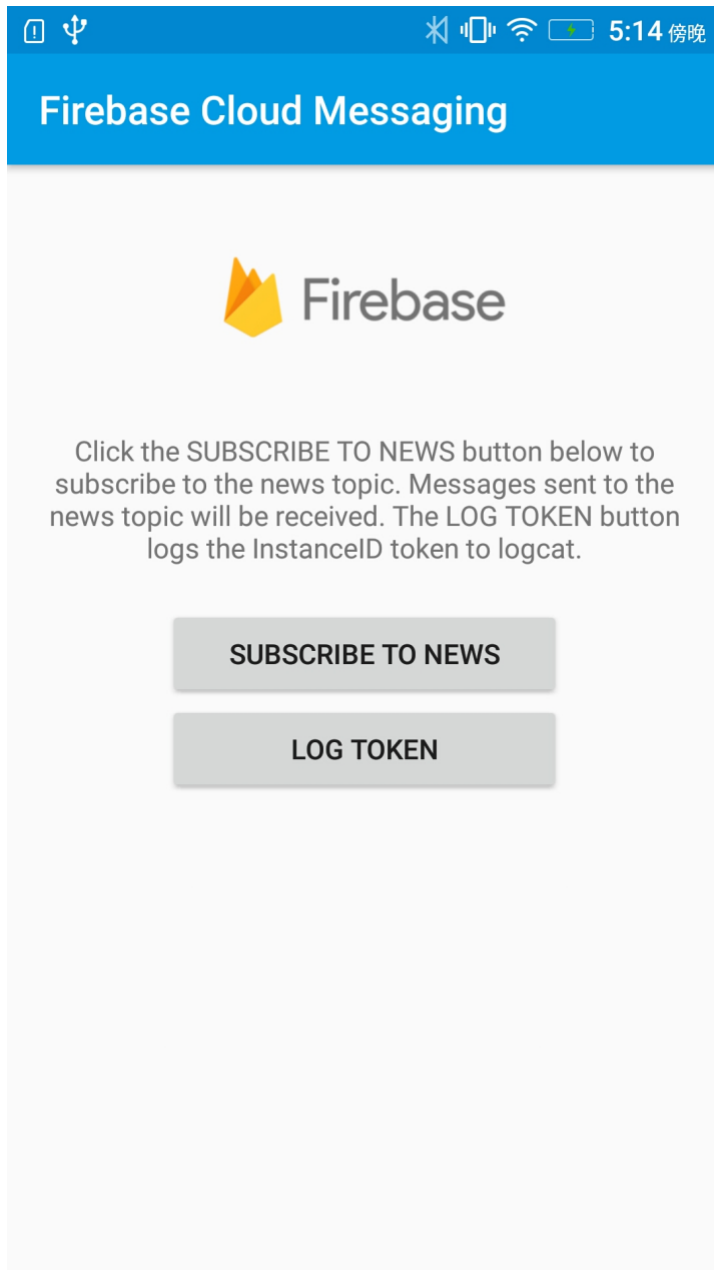


As shown above, the messaging app is installed and executed successfully on the phone. Click LOG TOKEN at this time.

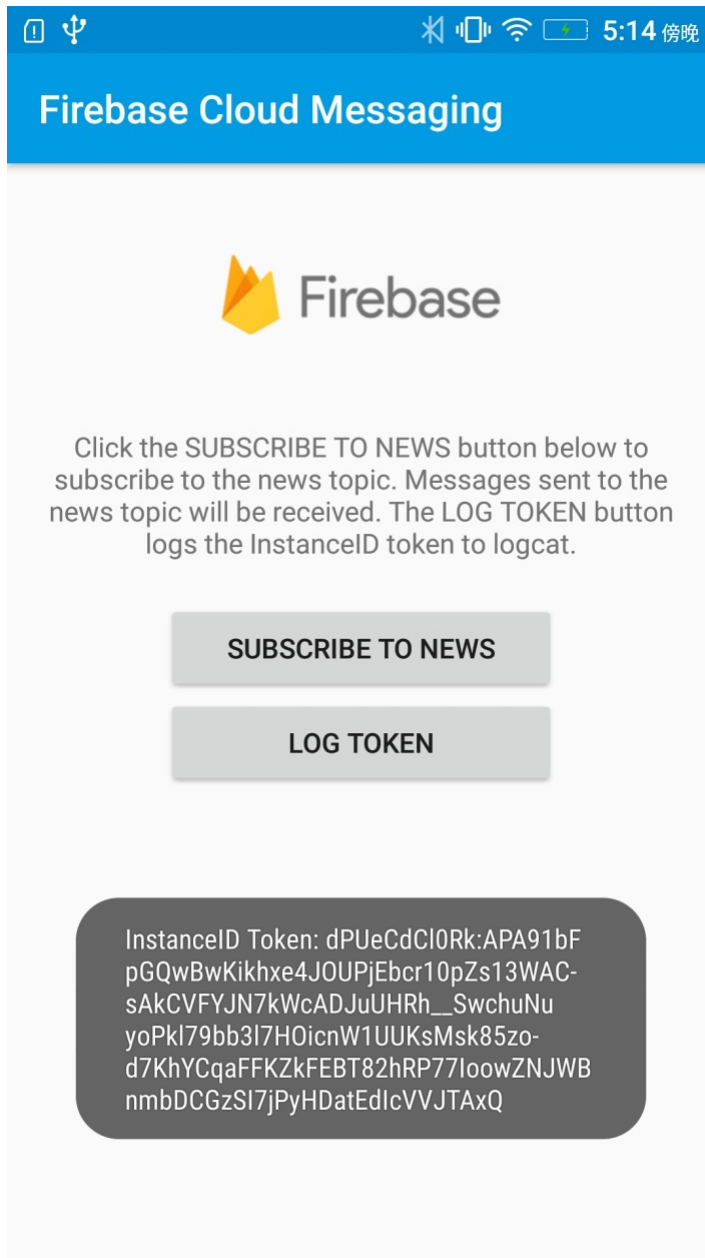


There will be a Token ID, which is the Access Token required to send the message, representing the ID of the FCM service APP installed on a particular phone. This ID is unique and will be reassigned when the app is removed and re-installed. It means that the message can be sent to a specific phone. The FCM service can also push messages to a NEWS (Topic). This section can be found in Firebase topic-messaging:

<https://firebase.google.com/docs/cloud-messaging/android/topic-messaging>


Therefore, we need to save this Access Token, return to Android Studio as shown below, select Debug at the log level of the Logcat. When you press the LOG TOKEN button on the App, Logcat will print out the Access Token ID. We will save the code after the InstanceID Token: in the Log message.

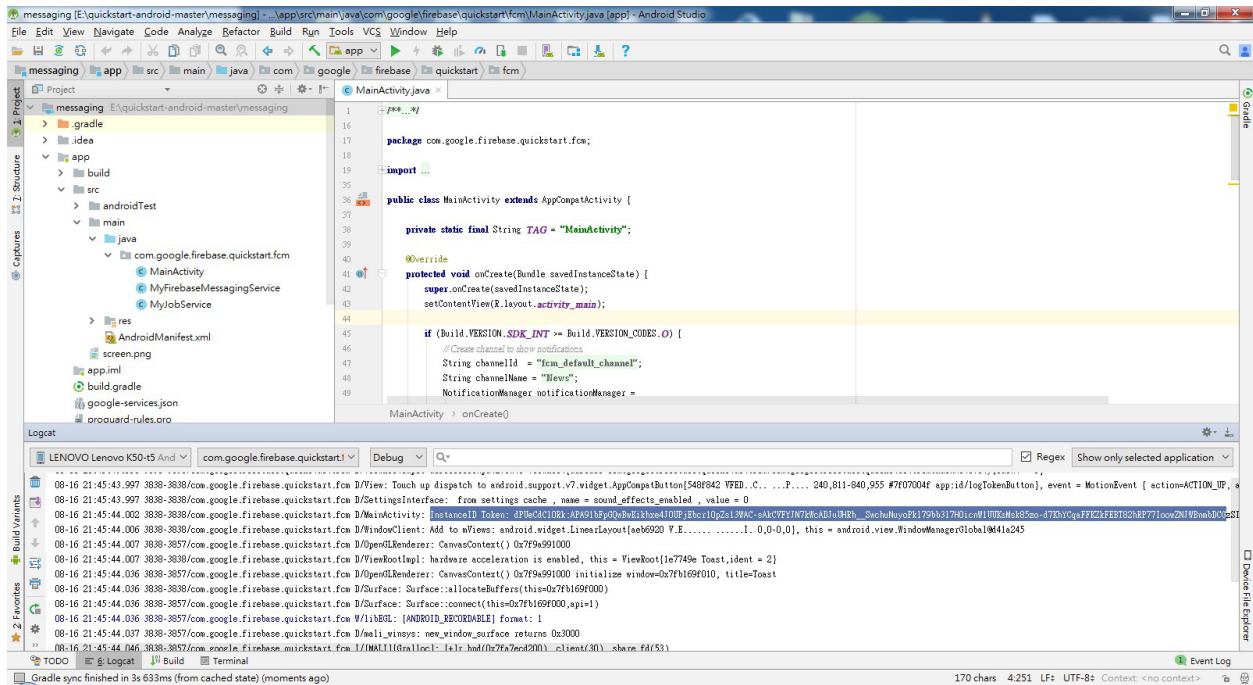


Then we have to go back to the page that was brought when we first logged into Firebase.

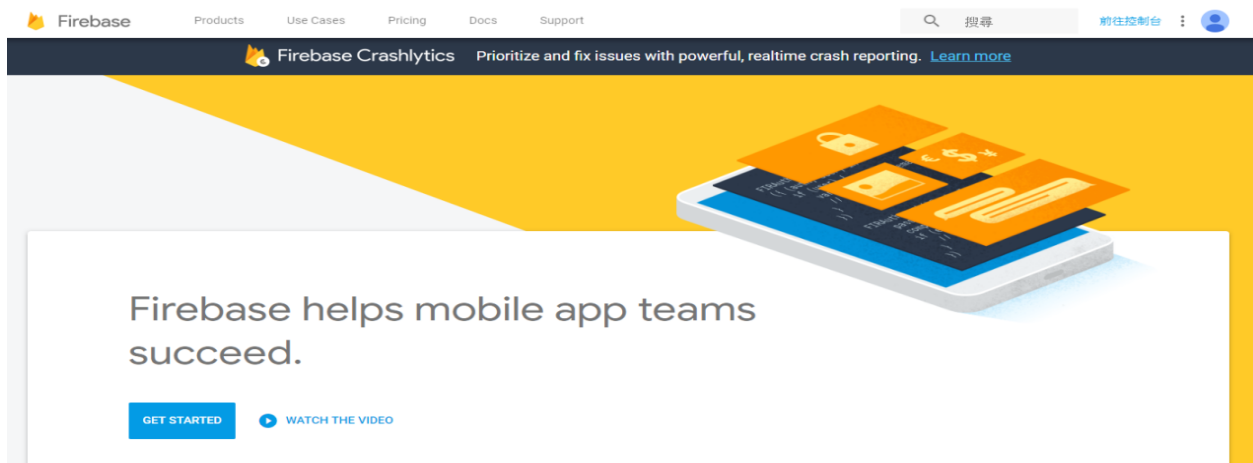


Click in the upper right corner to go to the console

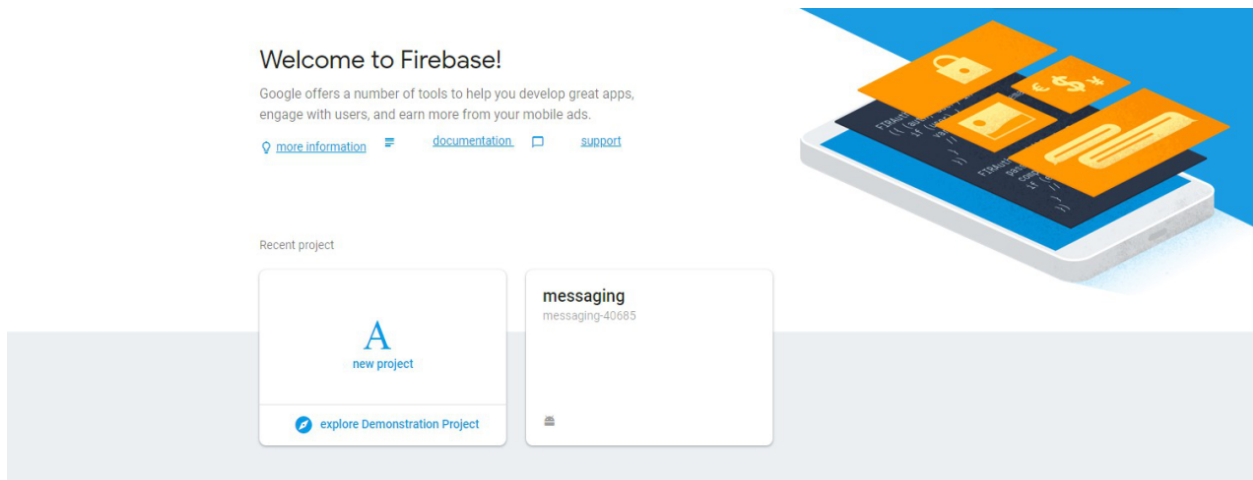


At this point, You can see that Android Studio has just built the messaging project for us in the operation.

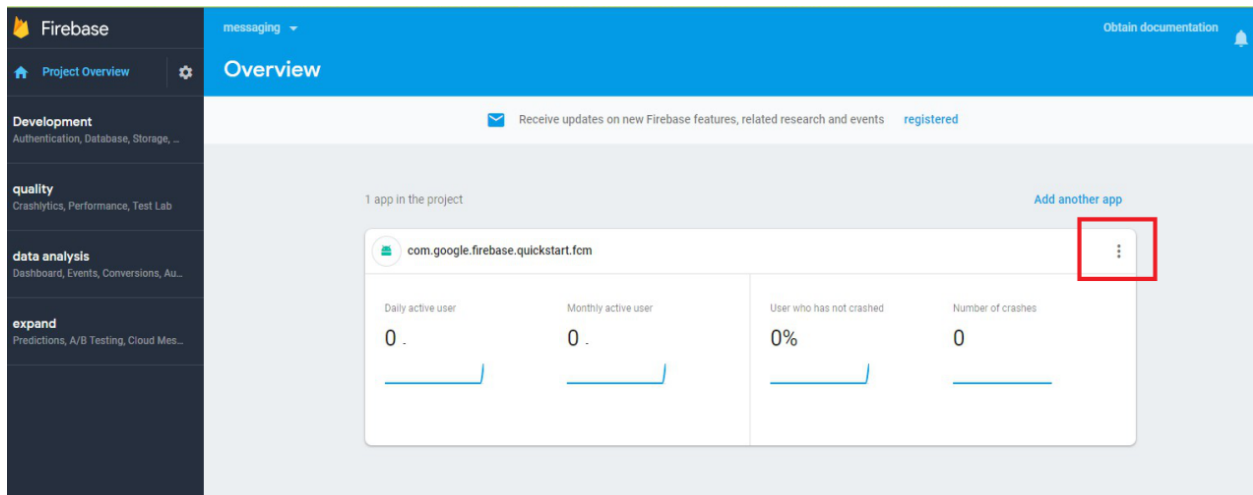

Click to enter the messaging project with settings page, as shown above.

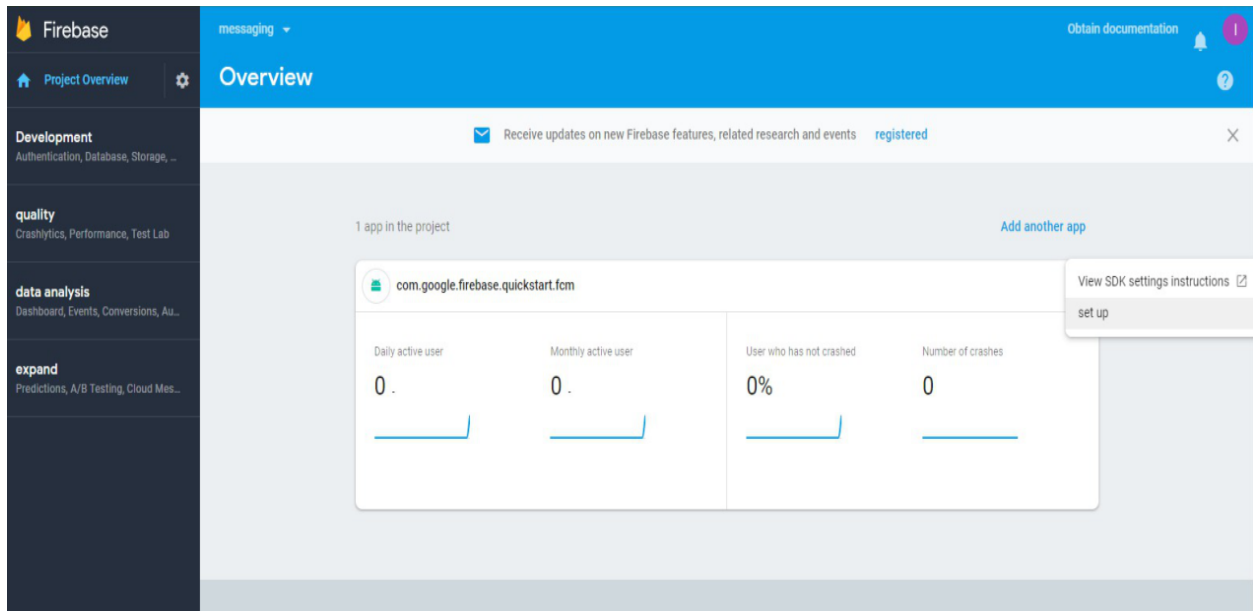


Select Set up

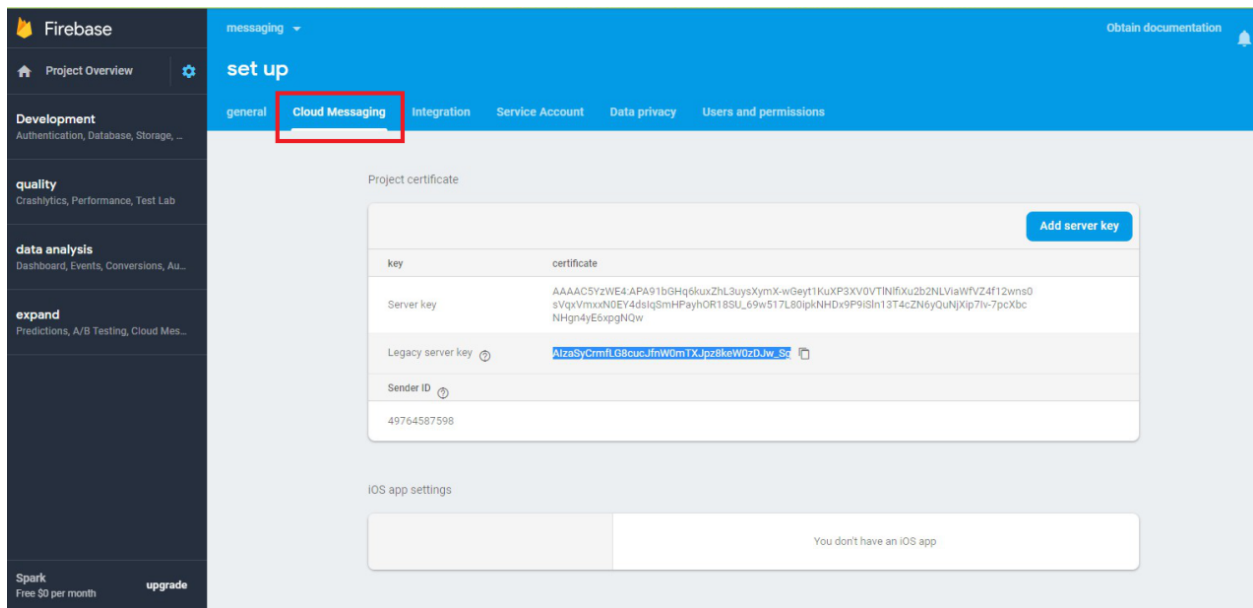

Go to the Settings page and select the Cloud Messaging page. We will see the Legacy server key. This Server key also needs to be used in the program. Let's save it and start editing the code.

Open the example "File" -> "Examples" -> "AmebaWiFi" -> "Firebase.ino"

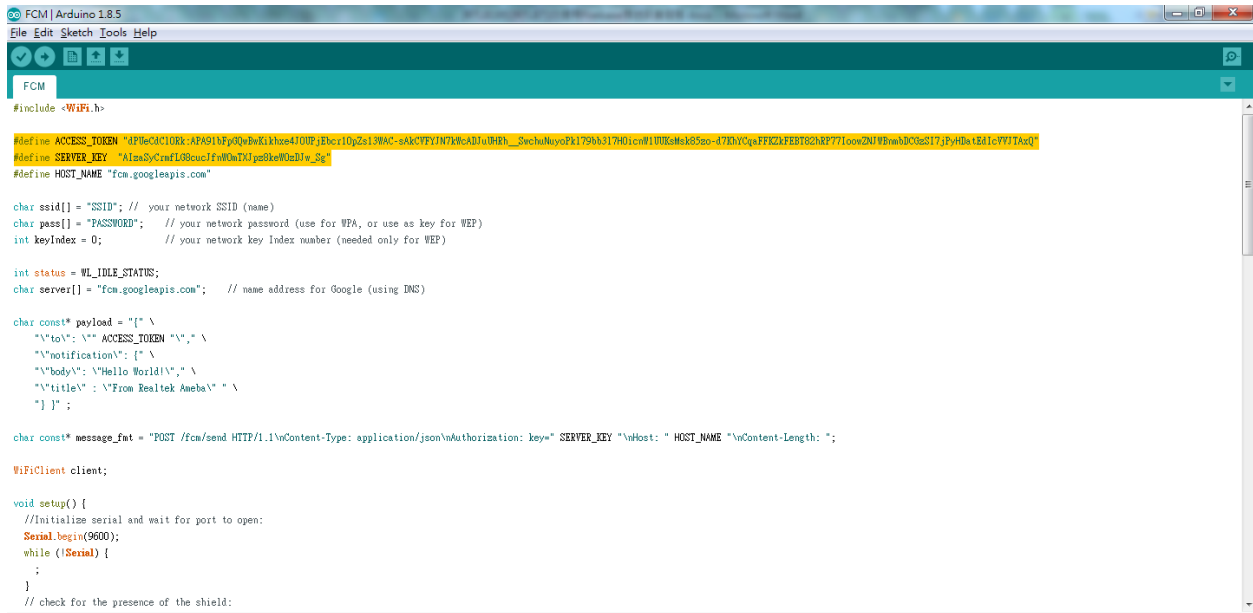

```

FCM | Arduino 1.8.5
File Edit Sketch Tools Help

FCM

#include <WiFi.h>

#define ACCESS_TOKEN "dFileOC10Rk:APA91bFpQbWkixze4J0IF_eHcr10pZs13WAC-sAkCYFYJN7KwADJuIHkH_ScehuNuyoPk179bK317H0icw11UUsMsk85zo-47EDV0qgFFK2KFEBT02hRP77/cooZNIWbm4DC0sS17jP4Hba4EdicV71TAcQ"
#define SERVER_KEY "AlmazCrmfL08oucIfnW0nTXjgs8keW0zDw_0g"
#define HOST_NAME "fcm.googleapis.com"

char ssid[] = "SSID"; // your network SSID (name)
char pass[] = "PASSWORD"; // your network password (use for WPA, or use as key for WEP)
int keyIndex = 0; // your network key Index number (needed only for WEP)

int status = WL_IDLE_STATUS;
char server[] = "fcm.googleapis.com"; // name address for Google (using DNS)

char const* payload = "[{" \
  "\"to\": \"\" ACCESS_TOKEN \"\", \"\n" \
  "\"notification\": { \"\n" \
  "\"body\": \"Hello World!\", \"\n" \
  "\"title\": \"From Realtek Ameba\" \"\n" \
  "}] ]";


char const* message_fmt = "POST /fcm/send HTTP/1.1\nContent-Type: application/json\nAuthorization: key= SERVER_KEY \"\nHost: \" HOST_NAME \"\nContent-Length: ";

WiFiClient client;

void setup() {
  //Initialize serial and wait for port to open:
  Serial.begin(9600);
  while (!Serial) {
    ;
  }
  // check for the presence of the shield:
}

```

As shown above, ACCESS_TOKEN and SERVER_KEY are defined in the reverse white part, that is, the ACCESS token ID that we just saved from the APP and the Server Key saved in the Firebase console page. We fill in the two sets of IDs, compile and upload them to Ameba. Press the Reset button and open the terminal.

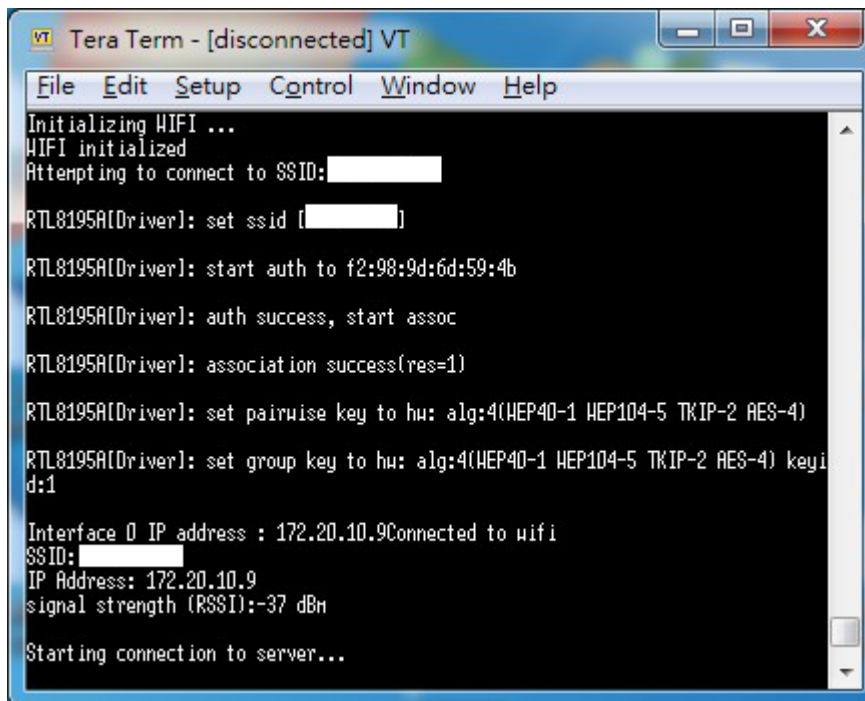

```

VT Tera Term - [disconnected] VT
File Edit Setup Control Window Help

Initializing WIFI ...
WIFI initialized
Attempting to connect to SSID: [redacted]

RTL8195A(Driver): set ssid [redacted]
RTL8195A(Driver): start auth to f2:98:9d:6d:59:4b
RTL8195A(Driver): auth success, start assoc
RTL8195A(Driver): association success(res=1)
RTL8195A(Driver): set pairwise key to hu: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4)
RTL8195A(Driver): set group key to hu: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4) keyi
d:1

Interface 0 IP address : 172.20.10.9Connected to wifi
SSID: [redacted]
IP Address: 172.20.10.9
signal strength (RSSI):-37 dBm

Starting connection to server...

```

Connect to FCM Server after connecting to AP


```
Connect to Server successful!  
connected to server
```

```
Request:  
POST /fcm/send HTTP/1.1  
Content-Type: application/json  
Authorization: key=AIzaSyCrmfLG8cucJfnH0nTXJpz8keH0zDJu_Sg  
Host: fcm.googleapis.com  
Content-Length: 258
```

```
{ "to": "dPUeCdC1ORk:APA91bFpGQuBuKikhxe4JOUPjEbc10pZs13HAC-sAkCVFYJN7kH  
h_SuchuMuyoPk179bb317H0icnH1UUKsHsk85zo-d7KhYCqaFFKZkFEbT82hRP77IoouZHNJ  
zSI7jPyHdatEdIcVWJTAxQ", "notification": { "body": "Hello World!", "title":  
Realtek Ameba" } }
```

```
HTTP/1.1 200 OK  
Content-Type: application/json; charset=UTF-8  
Date: Thu, 16 Aug 2018 10:47:30 GMT  
Expires: Thu, 16 Aug 2018 10:47:30 GMT  
Cache-Control: private, max-age=0  
X-Content-Type-Options: nosniff  
X-Frame-Options: SAMEORIGIN
```

After showing Connect to Server successful, it means that the FCM connection is successful and the message will be sent. During the process, HTTP/1.1 200 OK will be received to indicate that the message is successfully pushed. At this time, the mobile phone screen is opened and the App receives the message from Ameba.

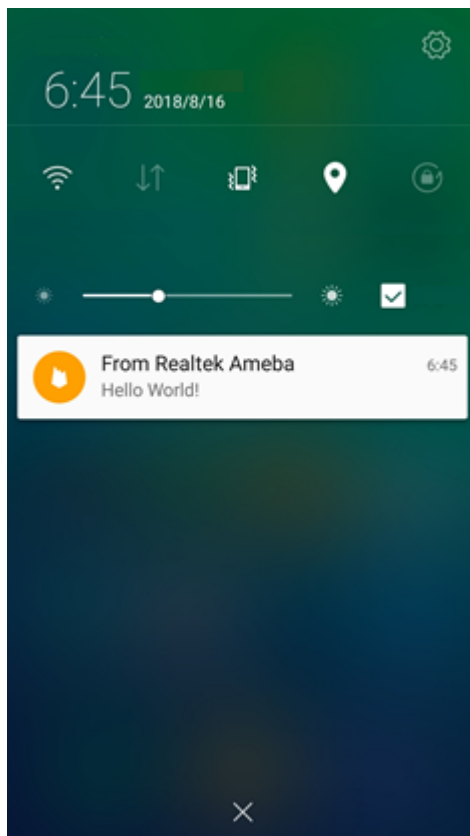

Code Reference

Firebase.ino

This example uses the HTTP protocol to push messages. Users can learn the payload format from the Firebase development website.

<https://firebase.google.com/docs/cloud-messaging/send-message>

The main payload format in the program is as follows. The user can freely change the Title and Body of the message. Body represents the content of the message.

```
char const* payload = "{" \
  "\"to\": \"" ACCESS_TOKEN "\", \"\
  "\"notification\": { \"\
  "\"body\": \"Hello World!\", \"\
  "\"title\" : \"From Realtek Ameba\" \"\
  \"} }" ;
```

```
setup() {
  if (client.connect(server, 80)) {
    Serial.println("connected to server");
    // Make a HTTP request:
    sprintf(message, "%s%s%s%s%s%d%s%s", "POST /fcm/send HTTP/1.1\nContent-Type:
↪application/json\nAuthorization: key=", SERVER_KEY, "\nHost: ", HOST_NAME, "\nContent-
↪Length: ", strlen(payload), "\n\n", payload, "\n");
    printf("\nRequest:\n%s \n", message);
    client.println(message);
    client.println();
  }
}
```

The sprintf part puts the payload into the HTTP POST content and sends the message out after connecting to the FCM Server.

```
loop() {
  while (client.available()) {
    char c = client.read();
    Serial.write(c);
  }
}
```

Waiting for the response from Server and printing out the response.


Access IFTTT Via Ameba

Introduction to IFTTT

IFTTT, known as If This Then That, is a website and mobile app and free web-based service to create the applets, or the chains of simple conditional statements. The applet is triggered by changes that occur within other web services such as Gmail, Facebook, Telegram, Instagram, Pinterest etc.

Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- An account from <https://ifttt.com/> , in order to access IFTTT service*

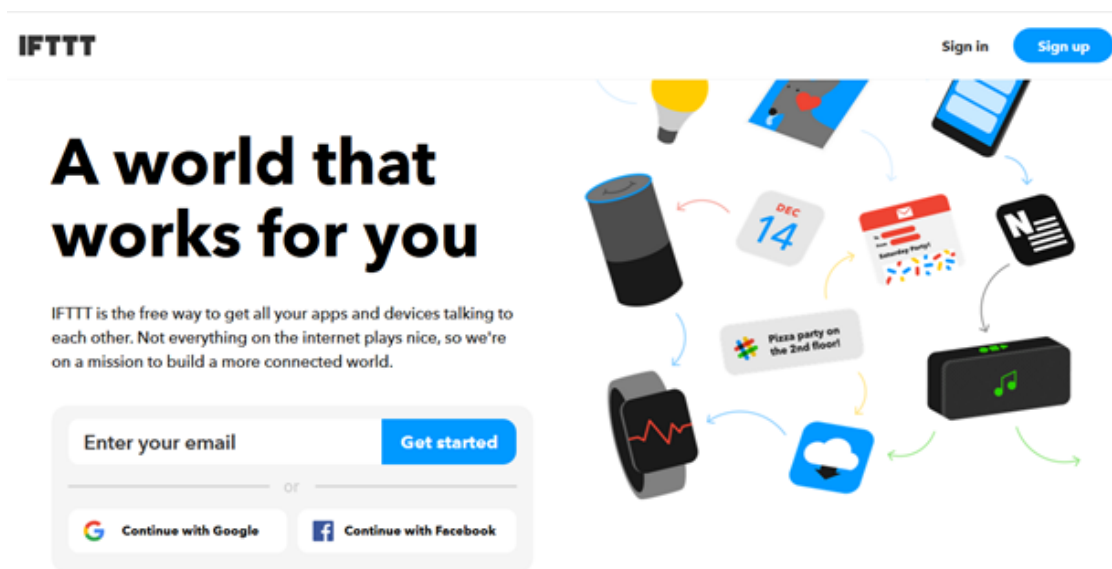

注解: Upon log in, there are several cloud and online services that are integrated with IFTTT platforms.


Example

- Generate Applet from IFTTT


In this example, we obtain an example of IFTTT Applet to send email to specified recipient.

To run the example, HTTP POST feature of the Ameba is used to post a simple webhook service that is received by IFTTT platform and in turn be used to trigger a response (sending an email).


After logging in <https://ifttt.com/>, click **Create** from the top bar.

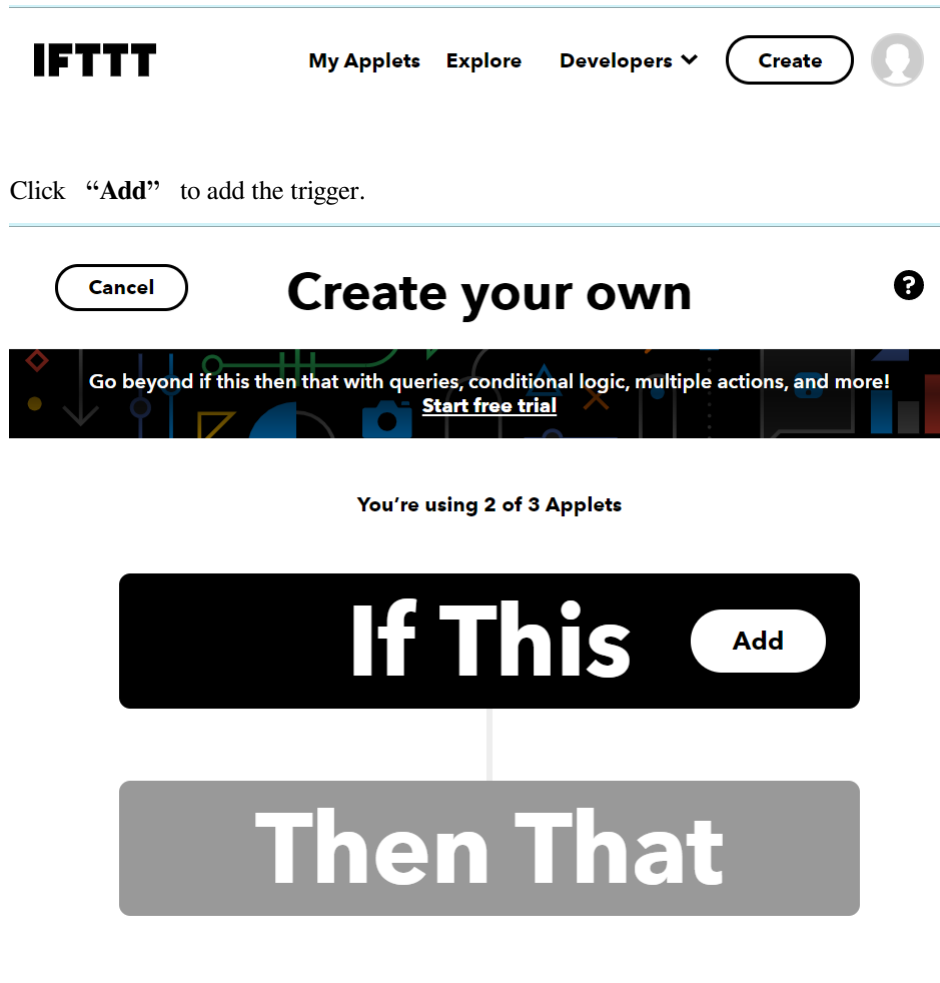

Choose Webhooks service as shown below. Alternatively, search the service by typing into the search bar.

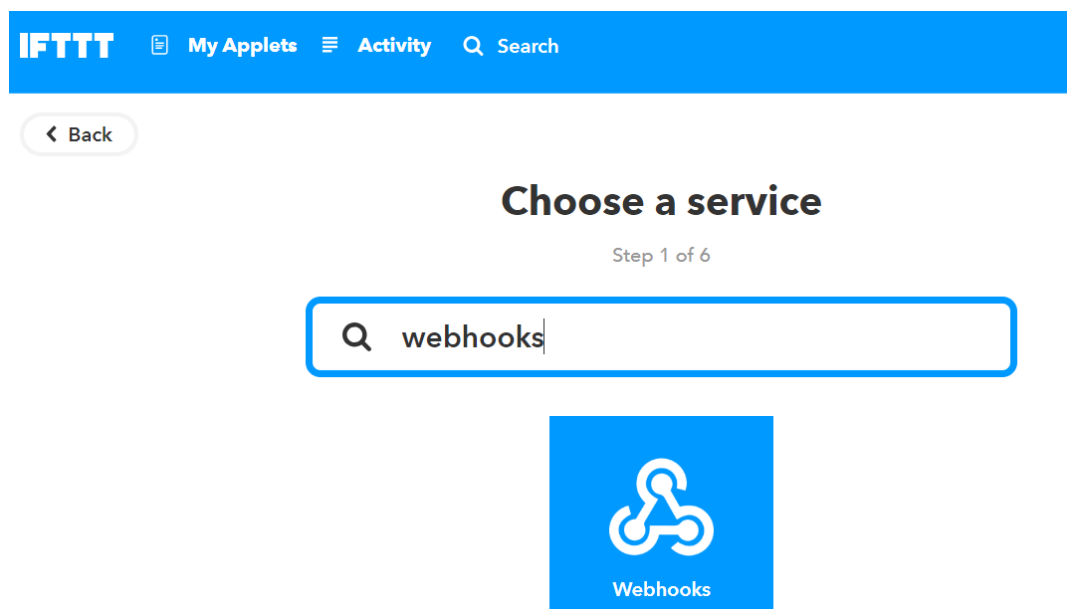

After that, the available triggers will appear. Choose Receive a Web request.

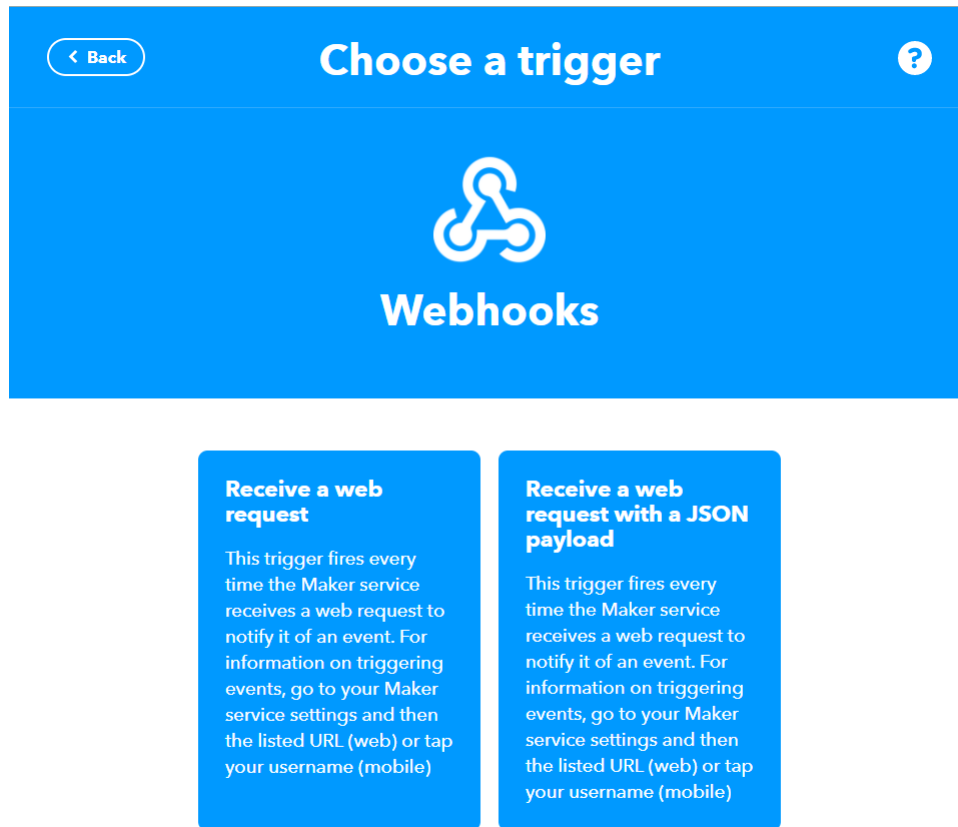

Next, an Event Name is required to identify the trigger successfully. In this example, set the Event name as “test_event” .

< Back

Complete trigger fields

Receive a web request

This trigger fires every time the Maker service receives a web request to notify it of an event. For information on triggering events, go to your Maker service settings and then the listed URL (web) or tap your username (mobile)

Event Name

test_event

The name of the event, like "button_pressed" or "front_door_opened"

Create trigger

Next, click **Add** in Then That field to create the action service taken in response to the last trigger.

Cancel

Create your own

Go beyond if this then that with queries, conditional logic, multiple actions, and more! [Start free trial](#)


You're using 2 of 3 Applets

If Receive a web request Edit Delete


+

Then That Add

Choose Email as the action service.

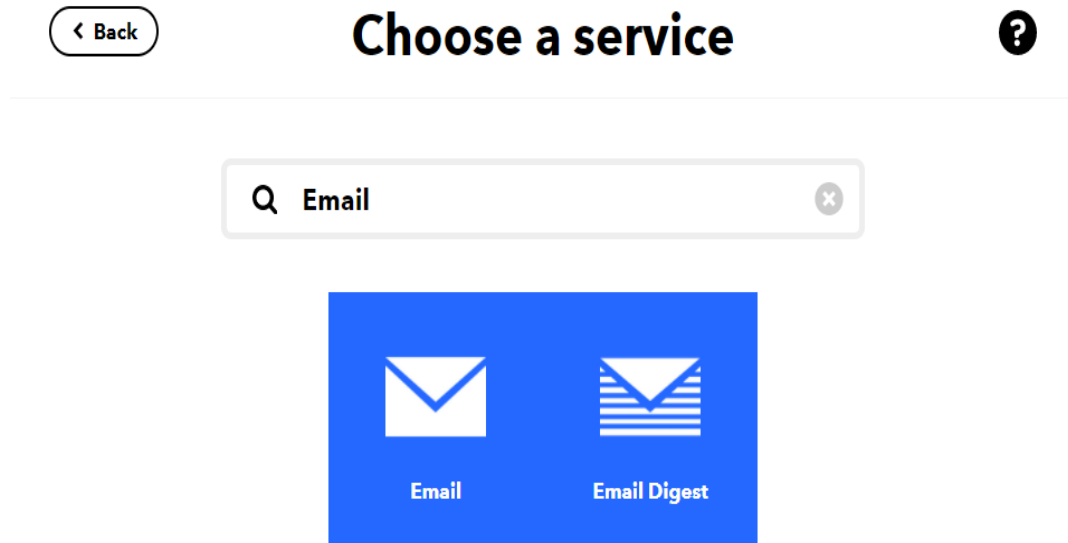

Click on Send me an email.

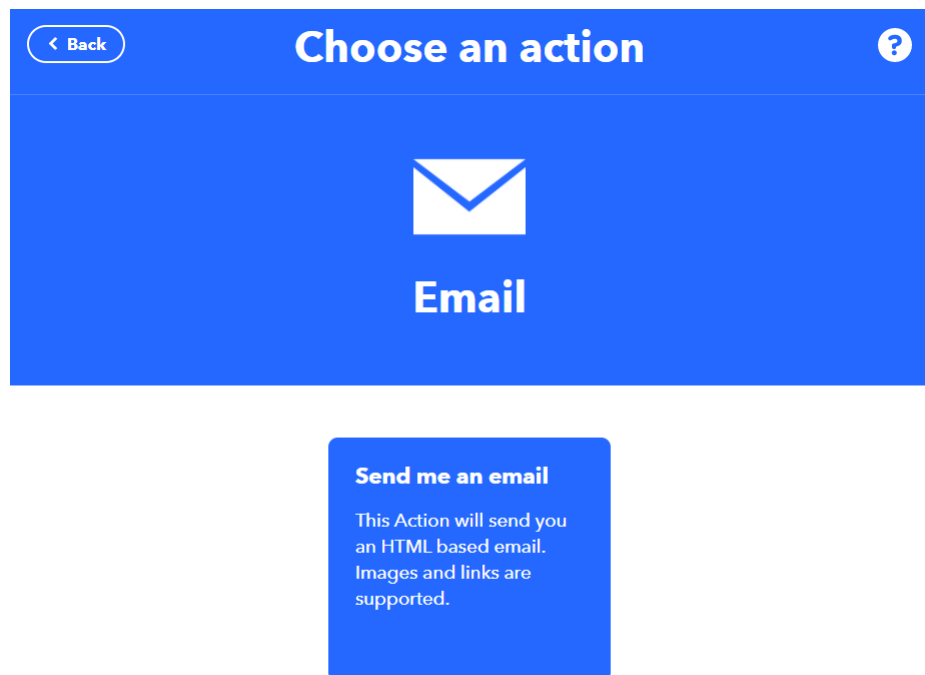

Under the template of **Send me an Email**, the contents of the email, such as subject and body is editable. Click **Create Action** to complete the action. Take note that **Email service** is offered to the

email address registered under IFTTT account.

The screenshot shows the 'Complete action fields' interface for the 'Send me an email' action in IFTTT. The background is blue. At the top left is a '< Back' button, and at the top right is a help icon (?). In the center, there is an envelope icon and the title 'Send me an email'. Below the title, a small text says 'This Action will send you an HTML based email. Images and links are supported.' The 'Subject' field contains the text 'The event named " **EventName** " occurred on the Maker Webhooks service'. Below the subject field is an 'Add ingredient' button. The 'Body' field contains the text 'What: **EventName**
 When: **OccurredAt**
 Extra Data: **Value1** , **Value2** , **Value3** ,'. Below the body field is another 'Add ingredient' button. At the bottom center is a large blue button labeled 'Create action'.


- Post the Trigger via Ameba

Once the Applet is ready in the IFTTT dashboard, the example program can be flashed onto the Ameba board to post the HTTP request.

Open the example code in “File” -> “Examples” -> “AmebaWiFi” -> “HTTP_IFTTT_Post”

In the example program, edit the following 3 items inside the code to make the program work.

1. The WiFi credentials to connect to the Wi-Fi hotspot or access point of desirable choice.
2. Under the Host name field, enter the host name of the IFTTT service “maker.ifttt.com” .
3. Under the Path name field, enter the Event name and key field “/trigger/Event name/with/key/Key Field”
 - Event name: The event name should be the same as the one specified in the IFTTT applet. In this example, the event name is “test_event” .
 - Key Field: Available under webhook service in individual IFTTT account. See the next step for the steps to obtain the Key Field.

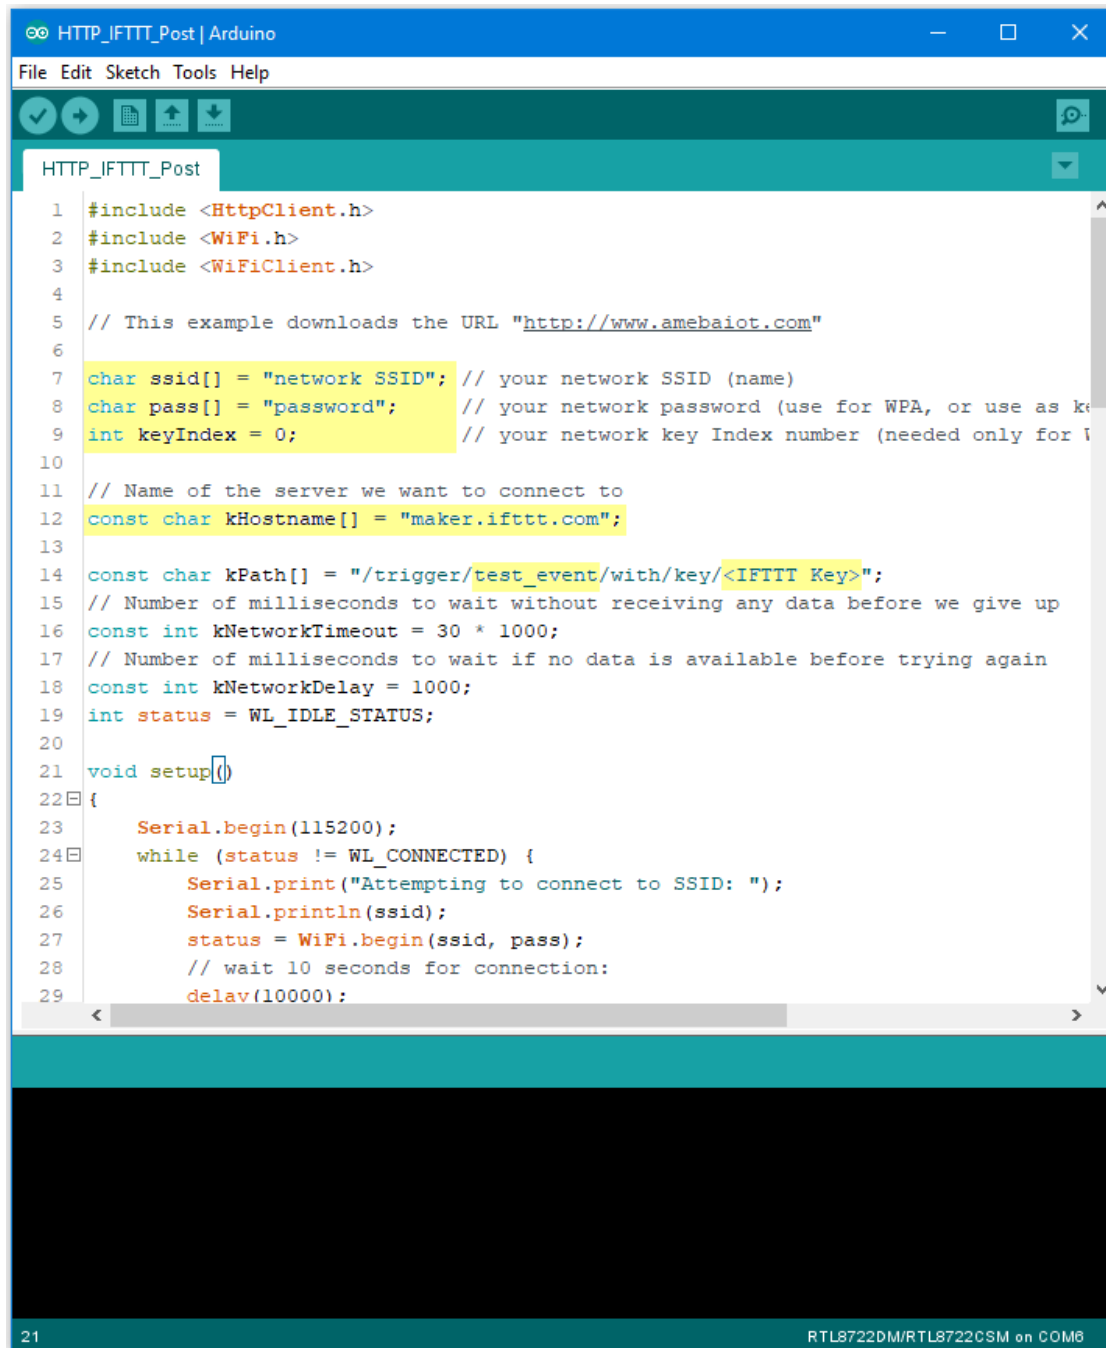

```
1 #include <HttpClient.h>
2 #include <WiFi.h>
3 #include <WiFiClient.h>
4
5 // This example downloads the URL "http://www.amebaiot.com"
6
7 char ssid[] = "network SSID"; // your network SSID (name)
8 char pass[] = "password";     // your network password (use for WPA, or use as key for WEP)
9 int keyIndex = 0;              // your network key Index number (needed only for WEP)
10
11 // Name of the server we want to connect to
12 const char kHostname[] = "maker.ifttt.com";
13
14 const char kPath[] = "/trigger/test_event/with/key/<IFTTT Key>";
15 // Number of milliseconds to wait without receiving any data before we give up
16 const int kNetworkTimeout = 30 * 1000;
17 // Number of milliseconds to wait if no data is available before trying again
18 const int kNetworkDelay = 1000;
19 int status = WL_IDLE_STATUS;
20
21 void setup()
22 {
23     Serial.begin(115200);
24     while (status != WL_CONNECTED) {
25         Serial.print("Attempting to connect to SSID: ");
26         Serial.println(ssid);
27         status = WiFi.begin(ssid, pass);
28         // wait 10 seconds for connection:
29         delay(10000);
30     }
31 }
```


21

RTL8722DM/RTL8722CSM on COM8


To obtain a key from documentation tab of the Webhooks, find the webhook service in the Explore tab.



On the Webhooks service page, click on the Documentation tab.

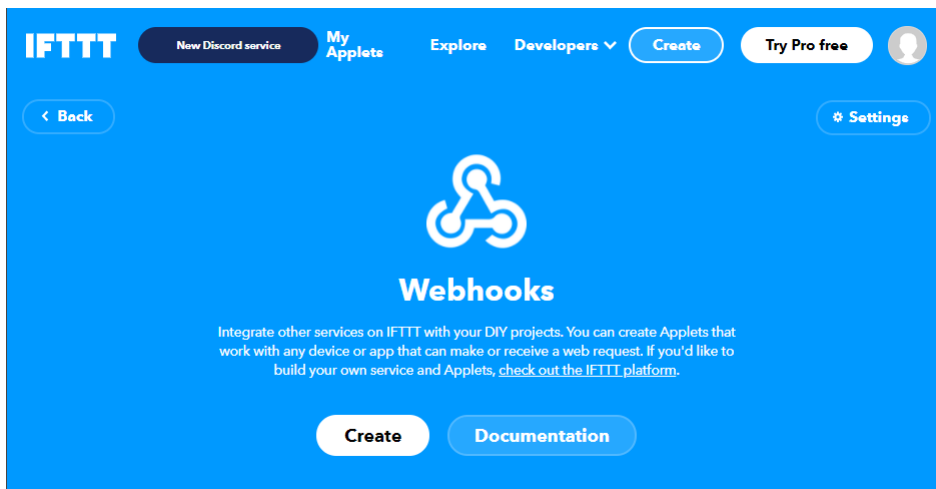


The key can be found in the documentation page. Also, information on how HTTP request can be used.

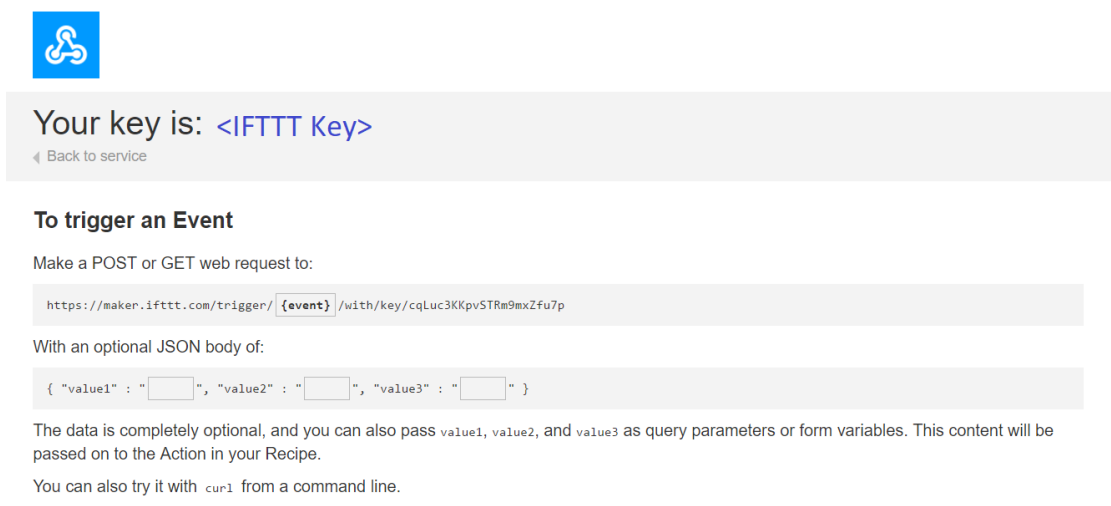


Once the example is ready, connect to Ameba board via USB Cable.

On the Arduino IDE, compile the code and upload the code onto Ameba and press the reset button. After the event has been successfully fired, “Congratulations! You have fired the test_event event” can be seen on the serial monitor and an email reminder for this event will be delivered.

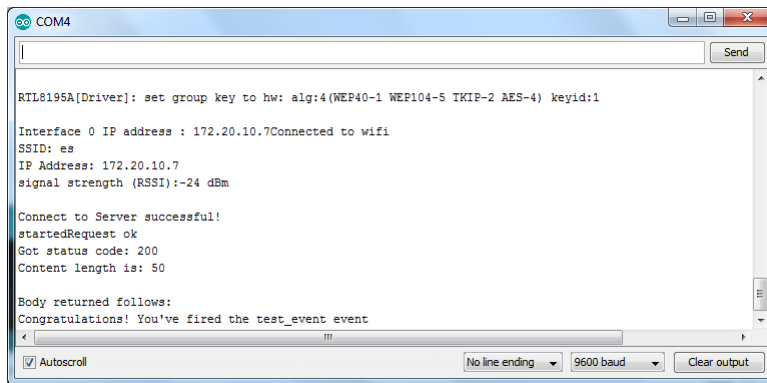

Thereafter an email is sent to recipient email account registered at IFTTT Applet and email notification will be received.

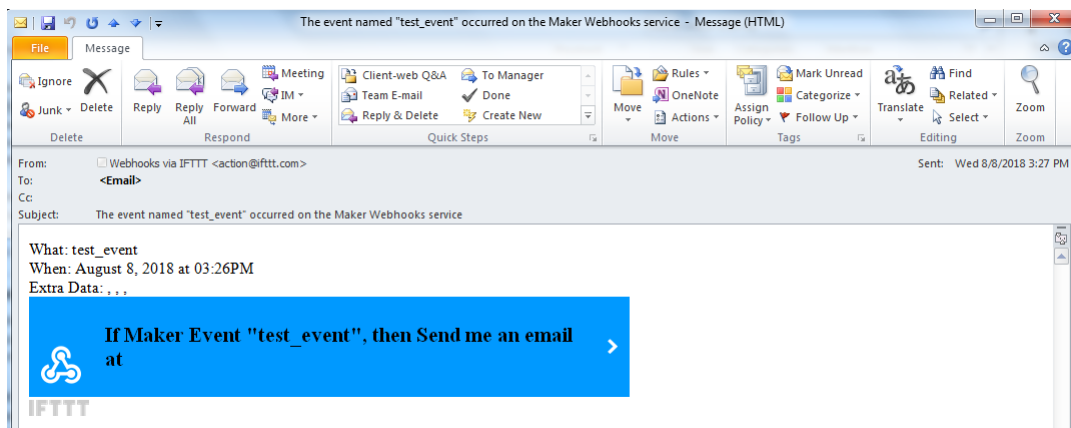

Use Ameba To Securely Retrieve Information From The Internet


Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1


Example

This example uses Ameba to securely retrieve information from the internet using SSL. SSL is an acronym for Secure Sockets Layer. It is a cryptographic protocol designed to provide communications security over a computer network, by encrypting the messages passed between server and client.

Open the “WiFiSSLClient” example in “File” -> “Examples” -> “AmebaWiFi” -> “WiFiSSLClient”

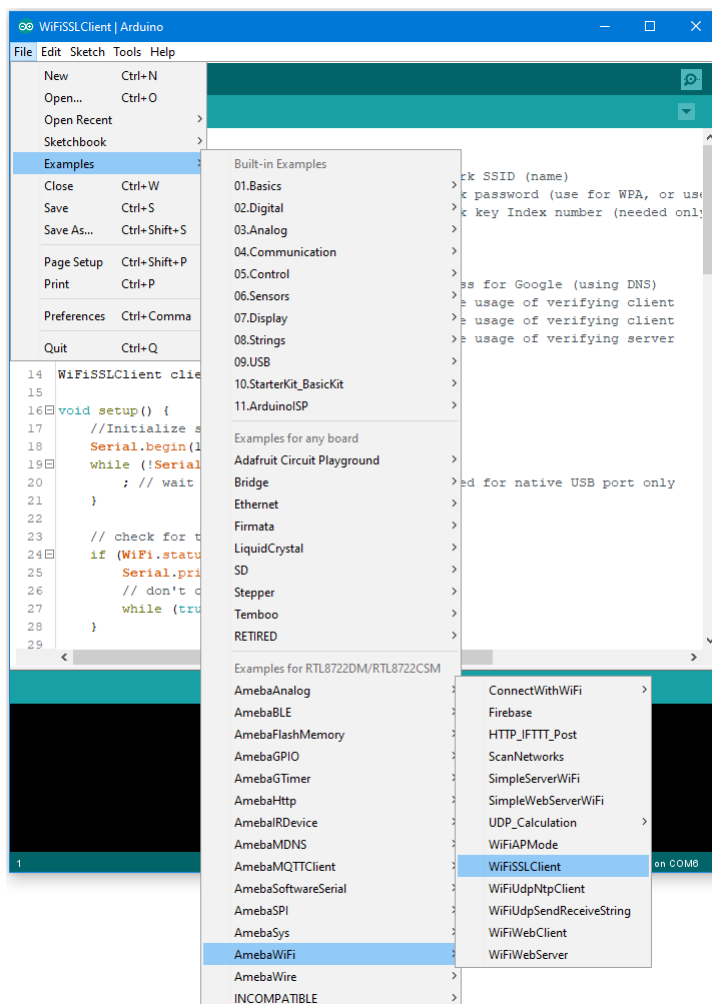


In the sample code, modify the highlighted snippet to reflect your WiFi network settings.

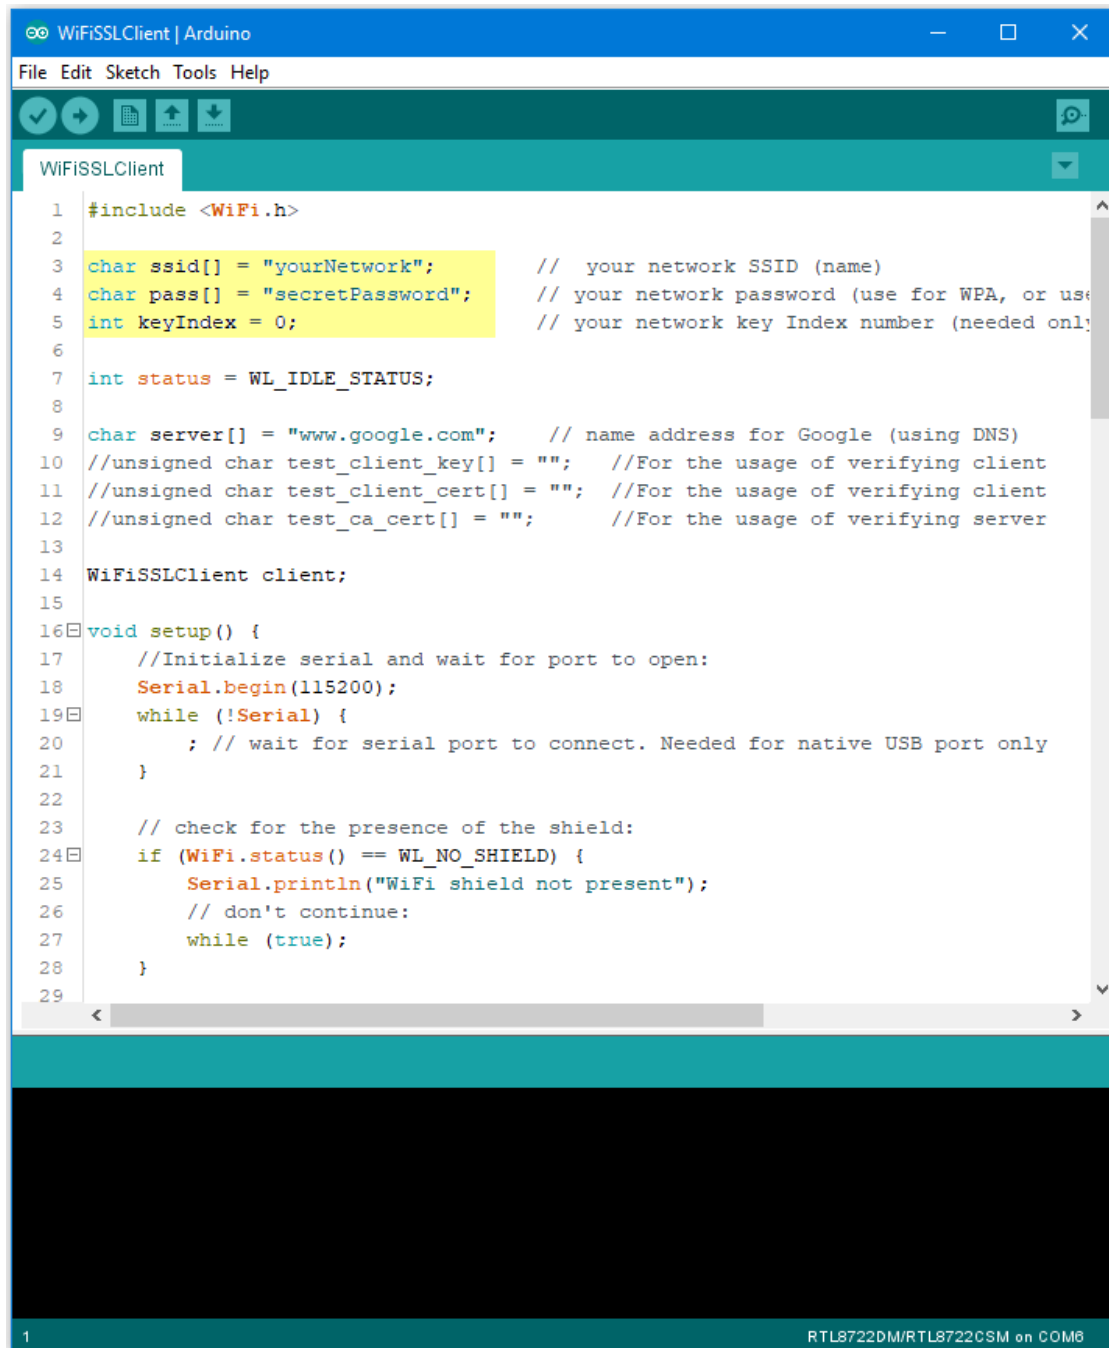

```
1 #include <WiFi.h>
2
3 char ssid[] = "yourNetwork";    // your network SSID (name)
4 char pass[] = "secretPassword"; // your network password (use for WPA, or use
5 int keyIndex = 0;               // your network key Index number (needed only)
6
7 int status = WL_IDLE_STATUS;
8
9 char server[] = "www.google.com"; // name address for Google (using DNS)
10 //unsigned char test_client_key[] = ""; //For the usage of verifying client
11 //unsigned char test_client_cert[] = ""; //For the usage of verifying client
12 //unsigned char test_ca_cert[] = ""; //For the usage of verifying server
13
14 WiFiSSLClient client;
15
16 void setup() {
17     //Initialize serial and wait for port to open:
18     Serial.begin(115200);
19     while (!Serial) {
20         ; // wait for serial port to connect. Needed for native USB port only
21     }
22
23     // check for the presence of the shield:
24     if (WiFi.status() == WL_NO_SHIELD) {
25         Serial.println("WiFi shield not present");
26         // don't continue:
27         while (true);
28     }
29 }
```

Upload the code and press the reset button on Ameba once the upload is finished.

Open the serial monitor in the Arduino IDE and observe as Ameba retrieves a text file from os.mbed.com.

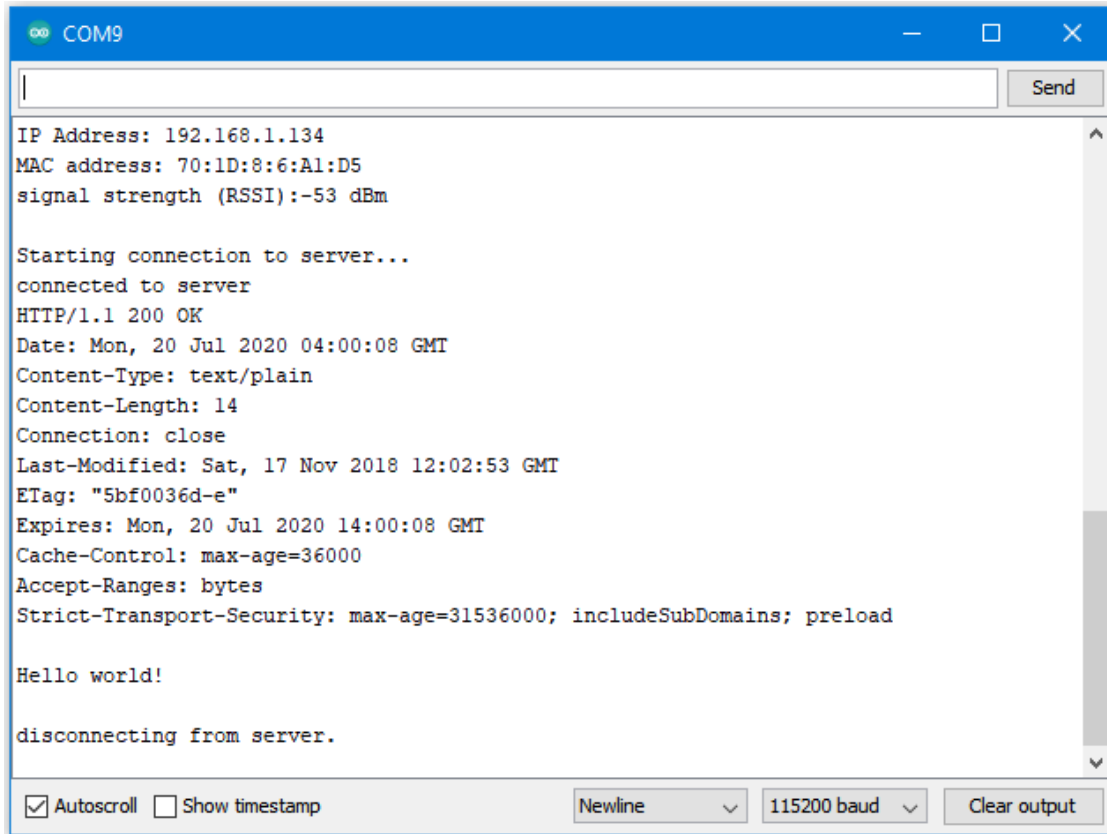

```
COM9
IP Address: 192.168.1.134
MAC address: 70:1D:8:6:A1:D5
signal strength (RSSI):-53 dBm

Starting connection to server...
connected to server
HTTP/1.1 200 OK
Date: Mon, 20 Jul 2020 04:00:08 GMT
Content-Type: text/plain
Content-Length: 14
Connection: close
Last-Modified: Sat, 17 Nov 2018 12:02:53 GMT
ETag: "5bf0036d-e"
Expires: Mon, 20 Jul 2020 14:00:08 GMT
Cache-Control: max-age=36000
Accept-Ranges: bytes
Strict-Transport-Security: max-age=31536000; includeSubDomains; preload

Hello world!

disconnecting from server.
```

☒ Autoscroll ☐ Show timestamp Newline 115200 baud Clear output

Code Reference

Use “WiFiSSLClient client;” to create a client that uses SSL. After creation, the client can be used in the same way as a regular client.

BLE –BLE Battery Service

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Android / iOS mobile phone

Example

Introduction

BLE connections use a server client model. The server contains the data of interest, while the client connects to the server to read the data. Commonly, a Bluetooth peripheral device acts as a server, while a Bluetooth central device acts as a

client. Servers can contain many services, with each service containing a some set of data. Clients can send requests to read or write some data and can also subscribe to notifications so that the server can send data updates to a client.

In this example, a basic battery service is set up on the Ameba Bluetooth stack. A mobile phone is used to connect to the Ameba peripheral device and read the battery data.

Procedure

Ensure that the following Bluetooth apps are installed on your mobile phone. These apps will show you the raw data sent by Ameba and allow you to interact with the data.


The recommended application is nRF connect, and is available at the links below:

- Android: <https://play.google.com/store/apps/details?id=no.nordicsemi.android.mcp>
- iOS : <https://apps.apple.com/us/app/nrf-connect/id1054362403>

LightBlue is an alternative application that can also be used, but has less features:


- Android: <https://play.google.com/store/apps/details?id=com.punchthrough.lightblueexplorer>
- iOS : <https://apps.apple.com/us/app/lightblue/id557428110>

Open the example, “Files” -> “Examples” -> “AmebaBLE” -> “BLEBatteryService”

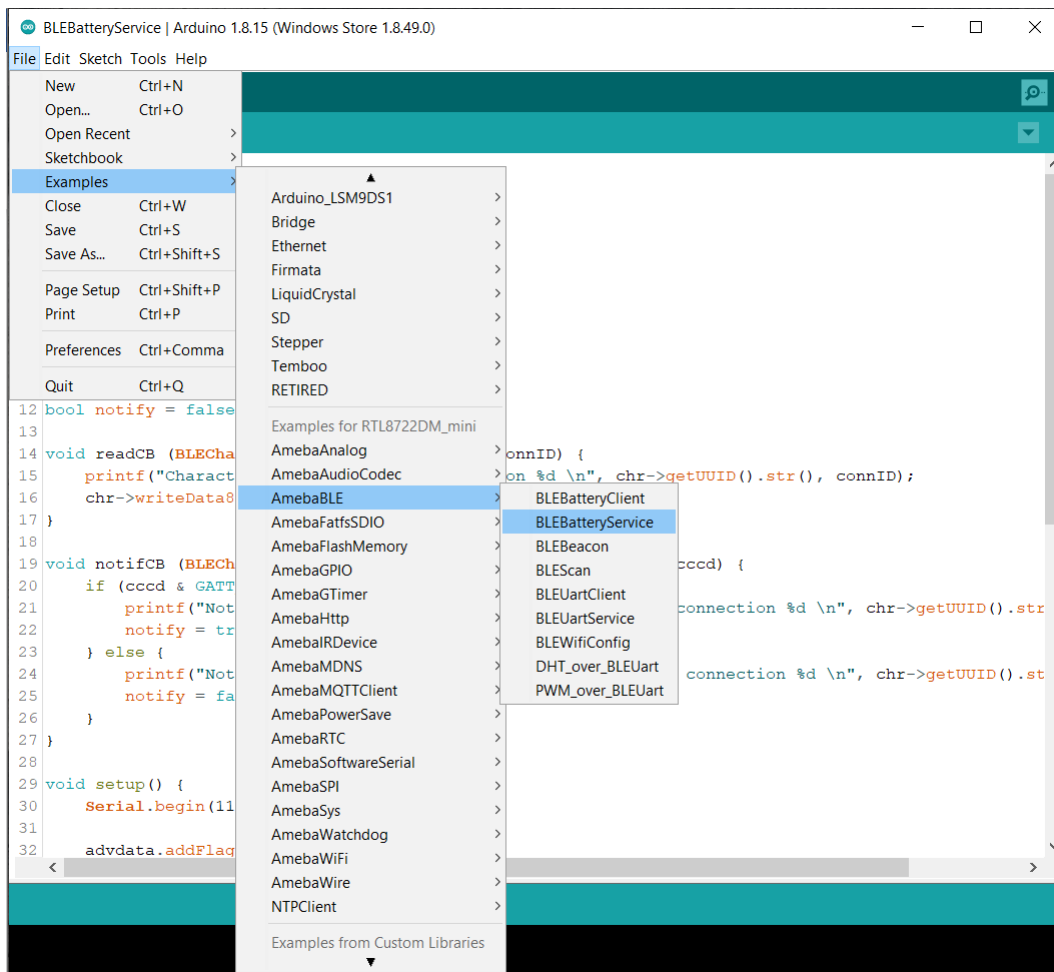


Upload the code and press the reset button on Ameba once the upload is finished.


On your mobile phone, open the Bluetooth app and scan for the Bluetooth signal broadcast by Ameba, it should appear as a device named “AMEBA_BLE_DEV” .

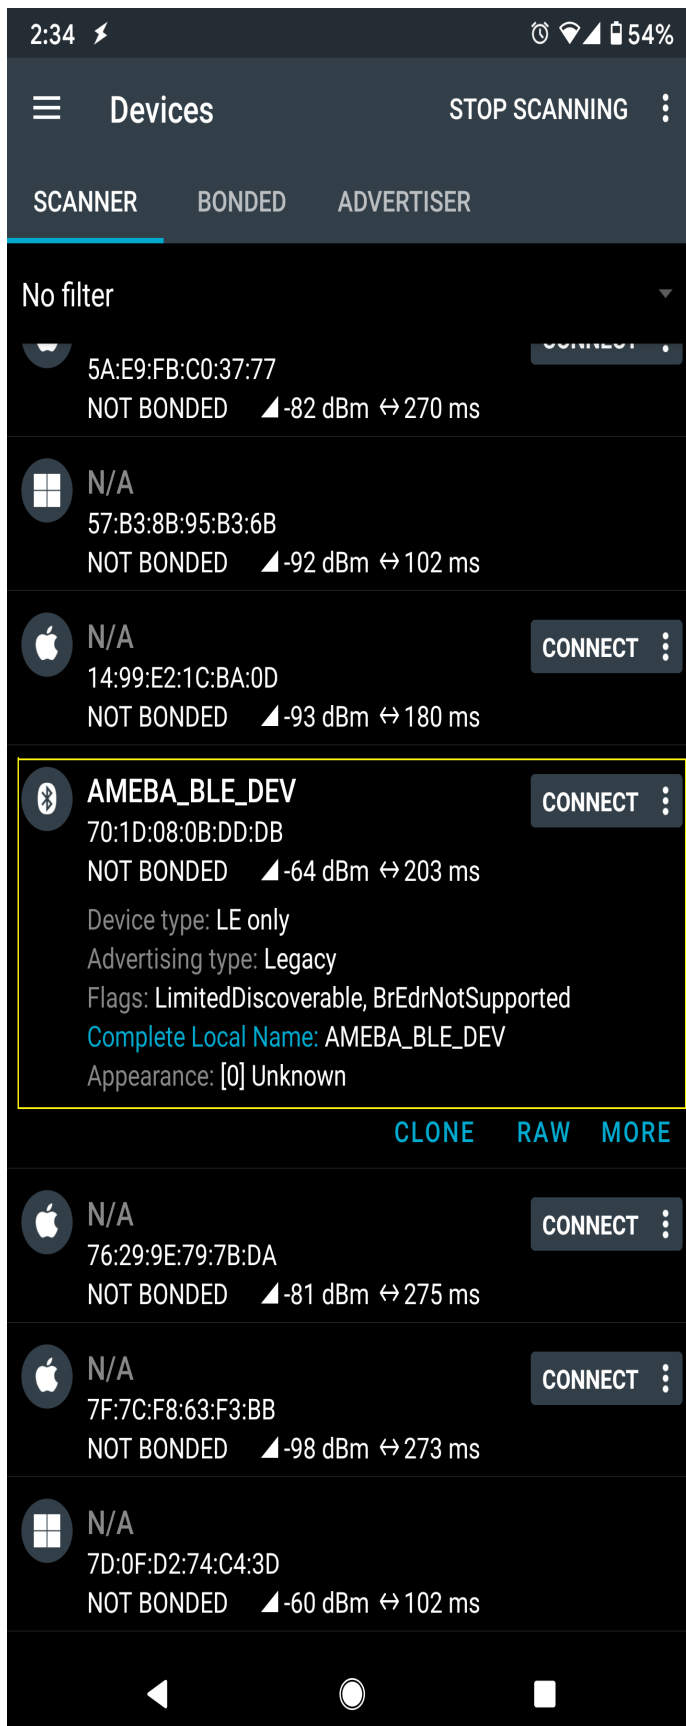


Connect to the Ameba Bluetooth device, and a list of available services should appear. Click on the battery service to expand it, and you can see the battery level data value. The arrows highlighted in the box on the right are used to read data and subscribe to notifications. Click on the single arrow to read the battery level value, and a 90% value will appear.

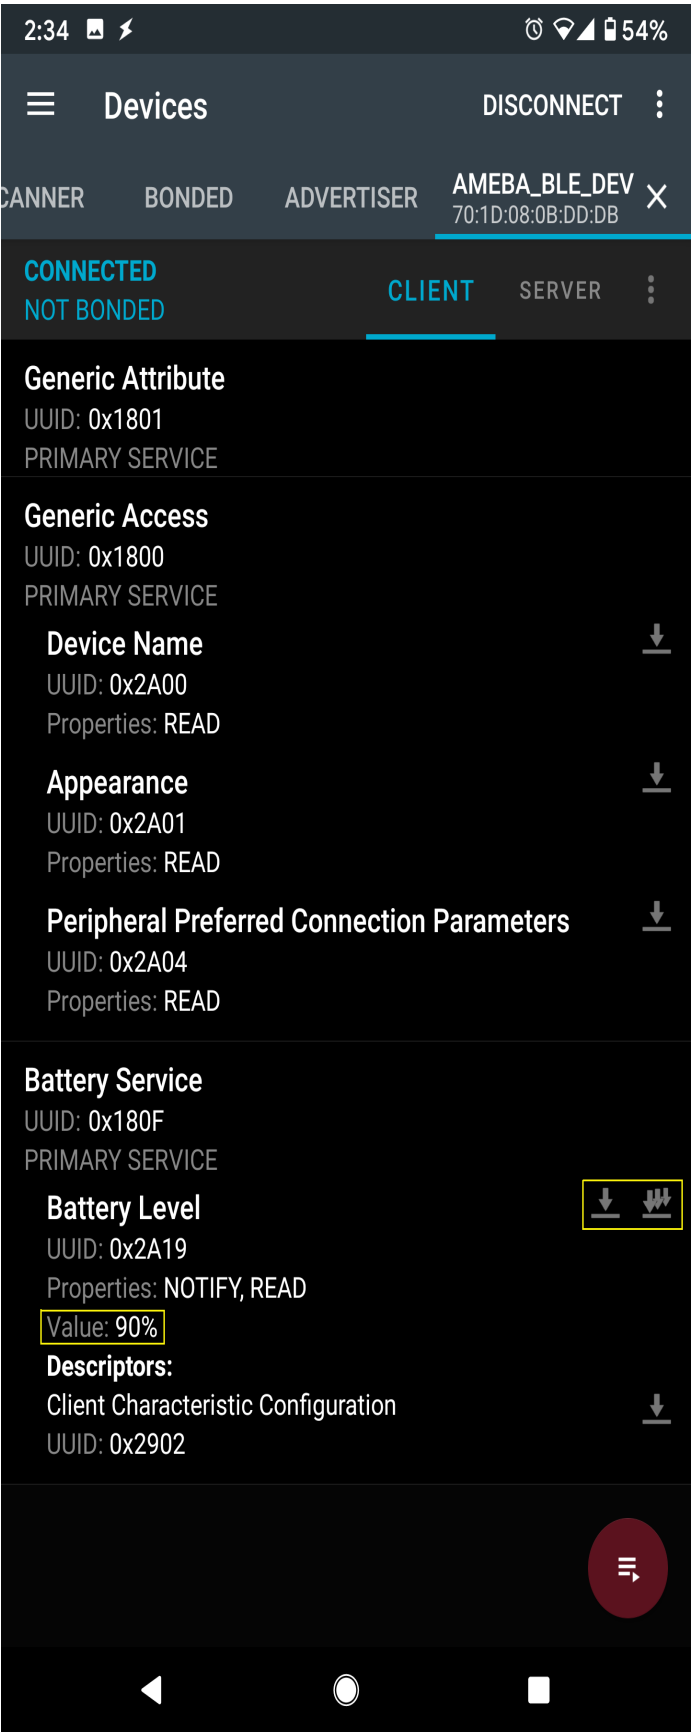

Click on the triple arrow to subscribe to updates on the battery level value, and the battery value will start updating by itself.

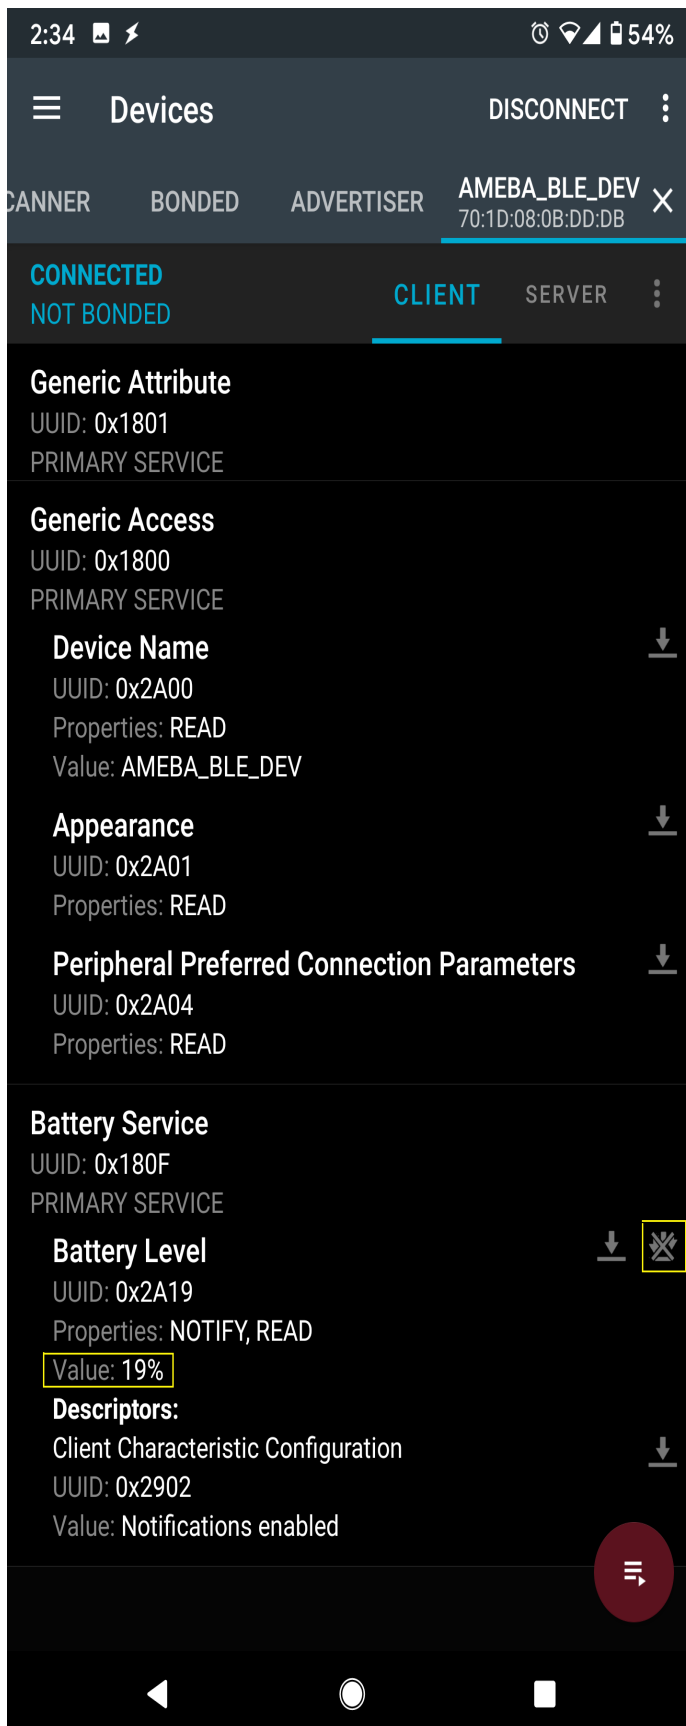

The serial monitor will show the sketch increasing the battery level every second. When you click on either of the arrows, the sketch running on the Ameba will be notified, and will print out the action taken.

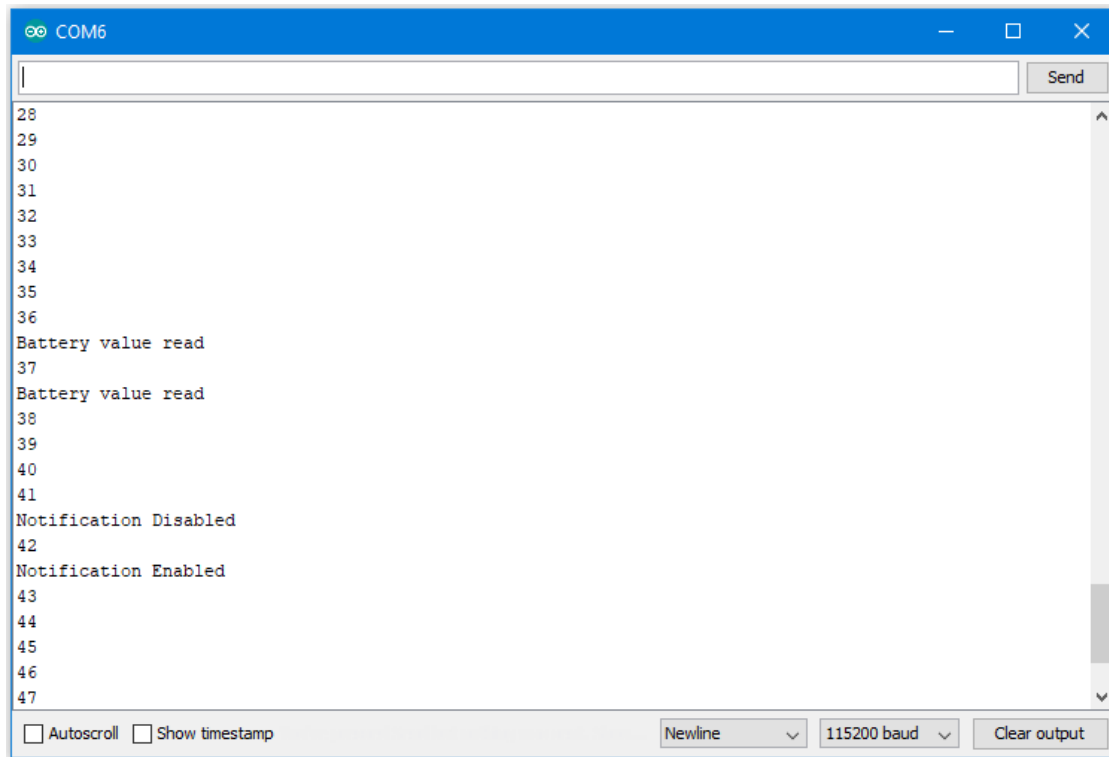

Code Reference

BLEService and BLECharacteristic classes are used to create and define the battery service to run on the Bluetooth device.

`BLE.configAdvert() -> setAdvType(GAP_ADTYPE_ADV_IND)` is used to set the advertisement type to a general undirected advertisement that allows for connections.

`setReadCallback()` and `setCCCDCallback()` is used to register functions that will be called when the battery level data is read, or notification is enabled by the user.

`BLE.configServer(1)` is used to tell the Bluetooth stack that there will be one service running.

`addService()` registers the battery service to the Bluetooth stack.

BLE –BLE Beacon

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Android / iOS mobile phone

Example

Introduction

A BLE beacon broadcasts its identity to nearby Bluetooth devices, to enable the other devices to determine their location relative to the beacon, and to perform actions based on information broadcasted by the beacon.

Example applications of beacons include indoor positioning system, location-based advertising and more.

From the definition of its purpose as a broadcast device, a BLE beacon thus cannot be connected to, and can only send information in its Bluetooth advertisement packets.

There are several BLE beacon protocols. The Ameba BLEBeacon library supports the iBeacon and AltBeacon protocols.

Procedure

First, you need to install some Bluetooth apps on your mobile phone. These apps will show you the raw data sent by Ameba and allow you to interact with the data.


The recommended application is nRF connect, and is available at the links below:

- **Android** : <https://play.google.com/store/apps/details?id=no.nordicsemi.android.mcp>
- **iOS** : <https://apps.apple.com/us/app/nrf-connect/id1054362403>

LightBlue is an alternative application that can also be used, but has less features:


- **Android** : <https://play.google.com/store/apps/details?id=com.punchthrough.lightblueexplorer>
- **iOS** : <https://apps.apple.com/us/app/lightblue/id557428110>

Open the example, “Files” -> “Examples” -> “AmebaBLE” -> “BLEBeacon”

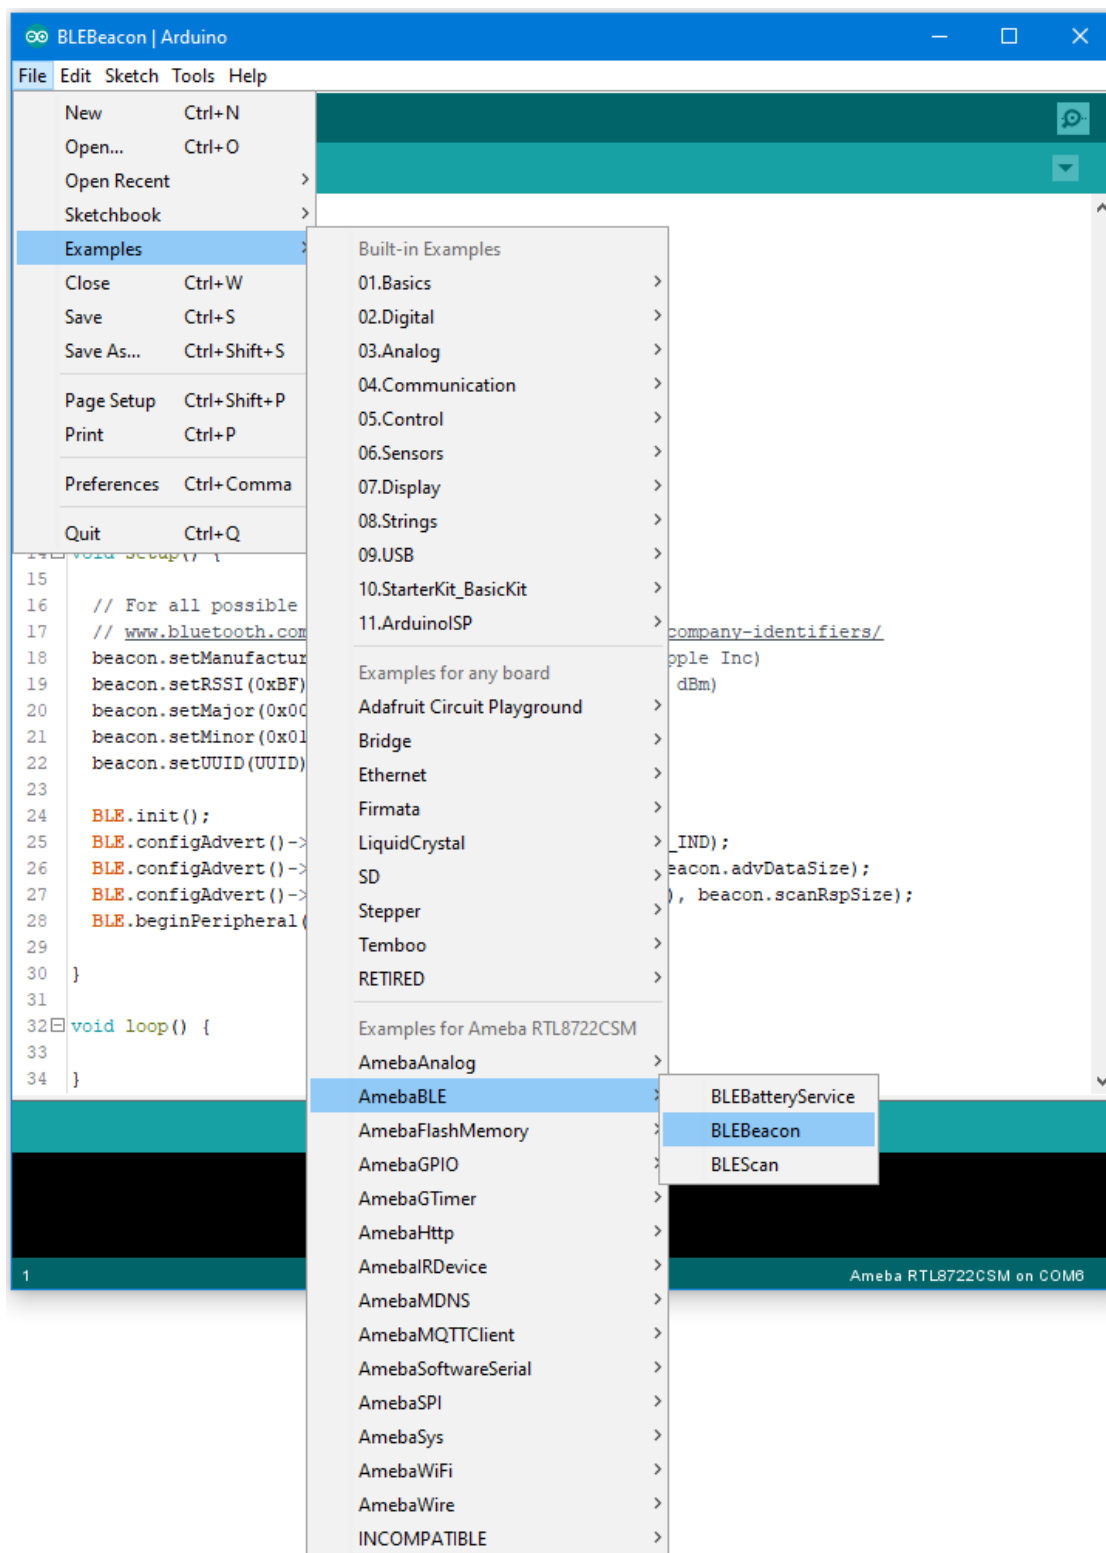

Upload the code and press the reset button on Ameba once the upload is finished.

On your mobile phone, open the Bluetooth app and scan for the beacon signal broadcast by Ameba.

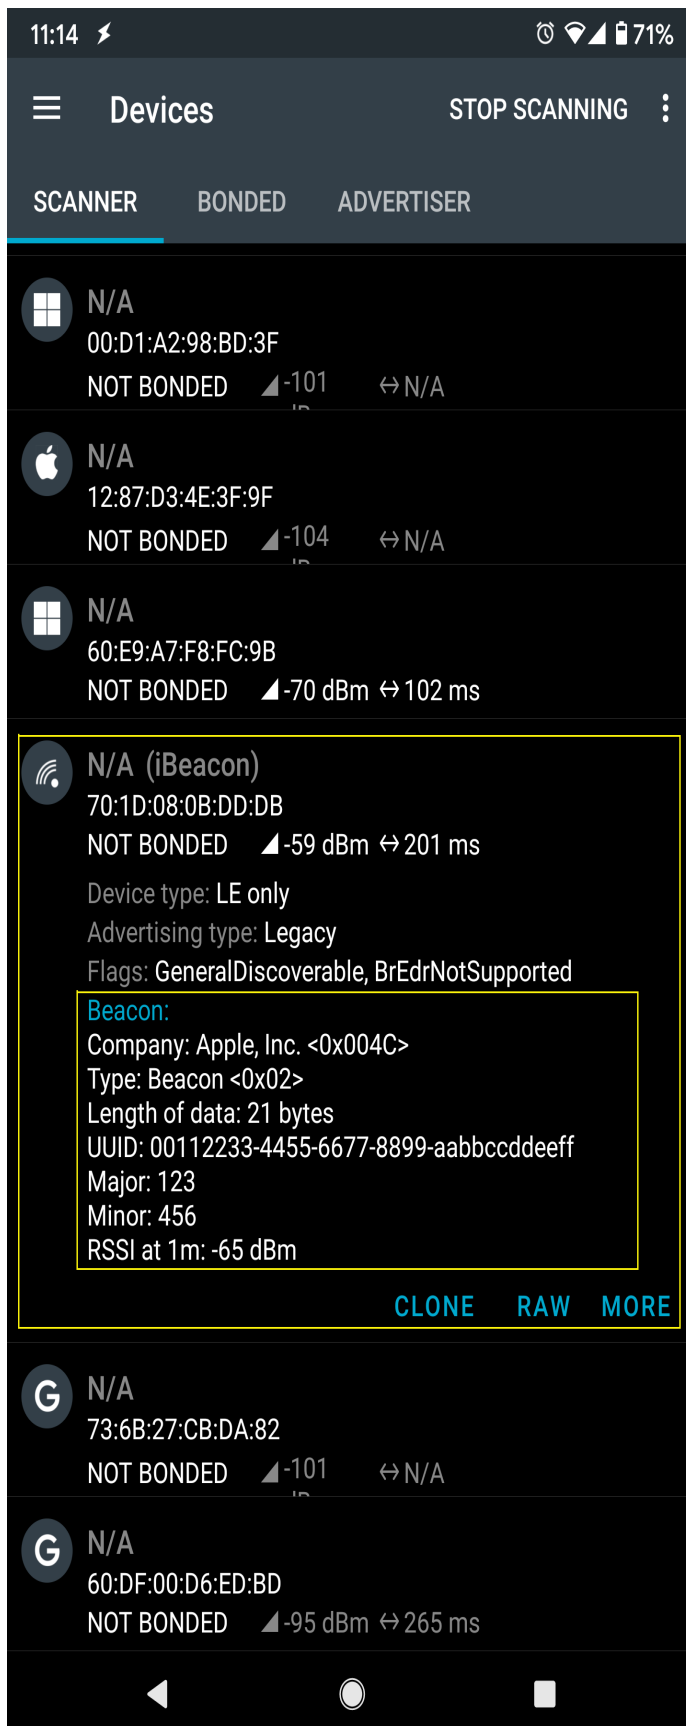

If you happen to be in an environment with multiple BLE beacons, you can tap the entries to expand them, and verify that the beacon data is identical to the data in the sketch.

Code Reference

`setRssi()` is used to set the received signal strength indicator (rssi) data field for a beacon. The specification states that this should be the received signal strength from the beacon at a 1 meter distance. With no method to measure this, it is set to -65dBm as an estimate.

`setMajor()` and `setMinor()` are used to set the two data fields. The purpose of these data are left for the manufacturer of the beacon to define, and can be used in any way.

`setUUID()` is used to give the beacon a universally unique identifier (UUID). This is a 128-bit number usually expressed as a hexadecimal string. It is used to identify each unique beacon, and can be randomly generated for free online.

The BLEBeacon library includes both `iBeacon` and `AltBeacon` classes, replace line 6 `iBeacon` with `altBeacon` to create an `AltBeacon` instead. The data fields are mostly the same, with only minor changes, please look at the header files for more details.

`BLE.init()` is used to allocate memory and prepare Ameba for starting the Bluetooth stack.

`BLE.configAdvert()` is used to configure the Bluetooth advertisement settings, to which we pass the beacon data and set the device as non-connectable.

`BLE.beginPeripheral()` starts Ameba in Bluetooth peripheral mode, after which it will begin to advertise with the beacon data provided.

BLE –BLE Scan

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Android / iOS mobile phone


Example

Introduction

This example configures the Ameba as a Bluetooth central device, uses the scan functionality to scan for other Bluetooth devices, and prints out the results to the serial monitor.


Procedure

Open the example, “Files” -> “Examples” -> “AmebaBLE” -> “BLEScan”

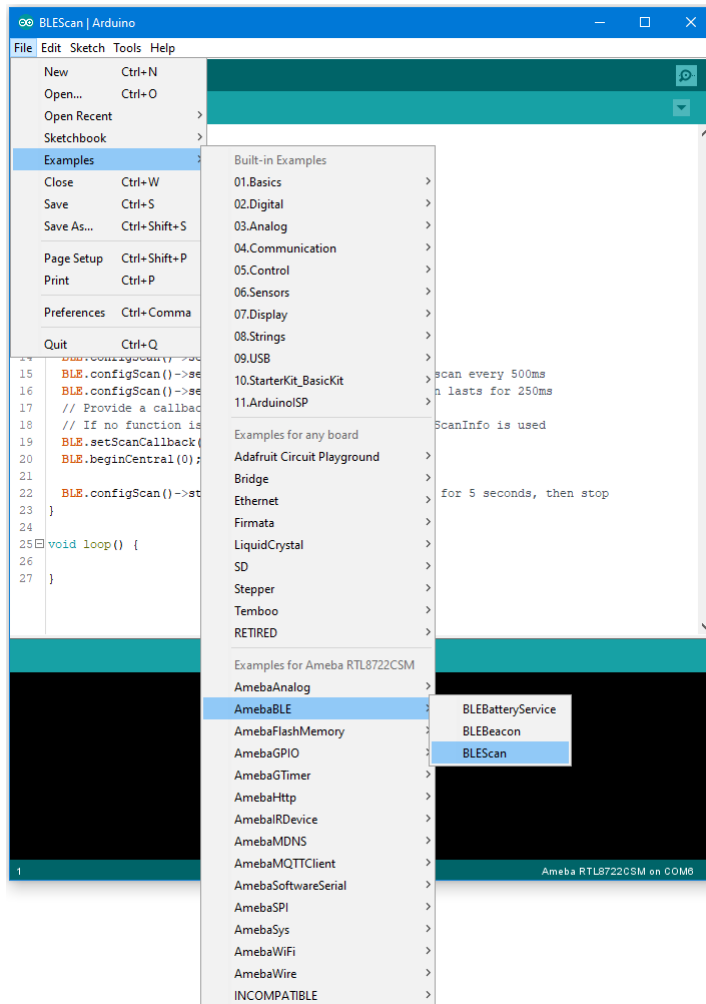

Upload the code and press the reset button on Ameba once the upload is finished.

Open the Arduino serial monitor, and you should see the scan results of nearby Bluetooth devices formatted and printed out.

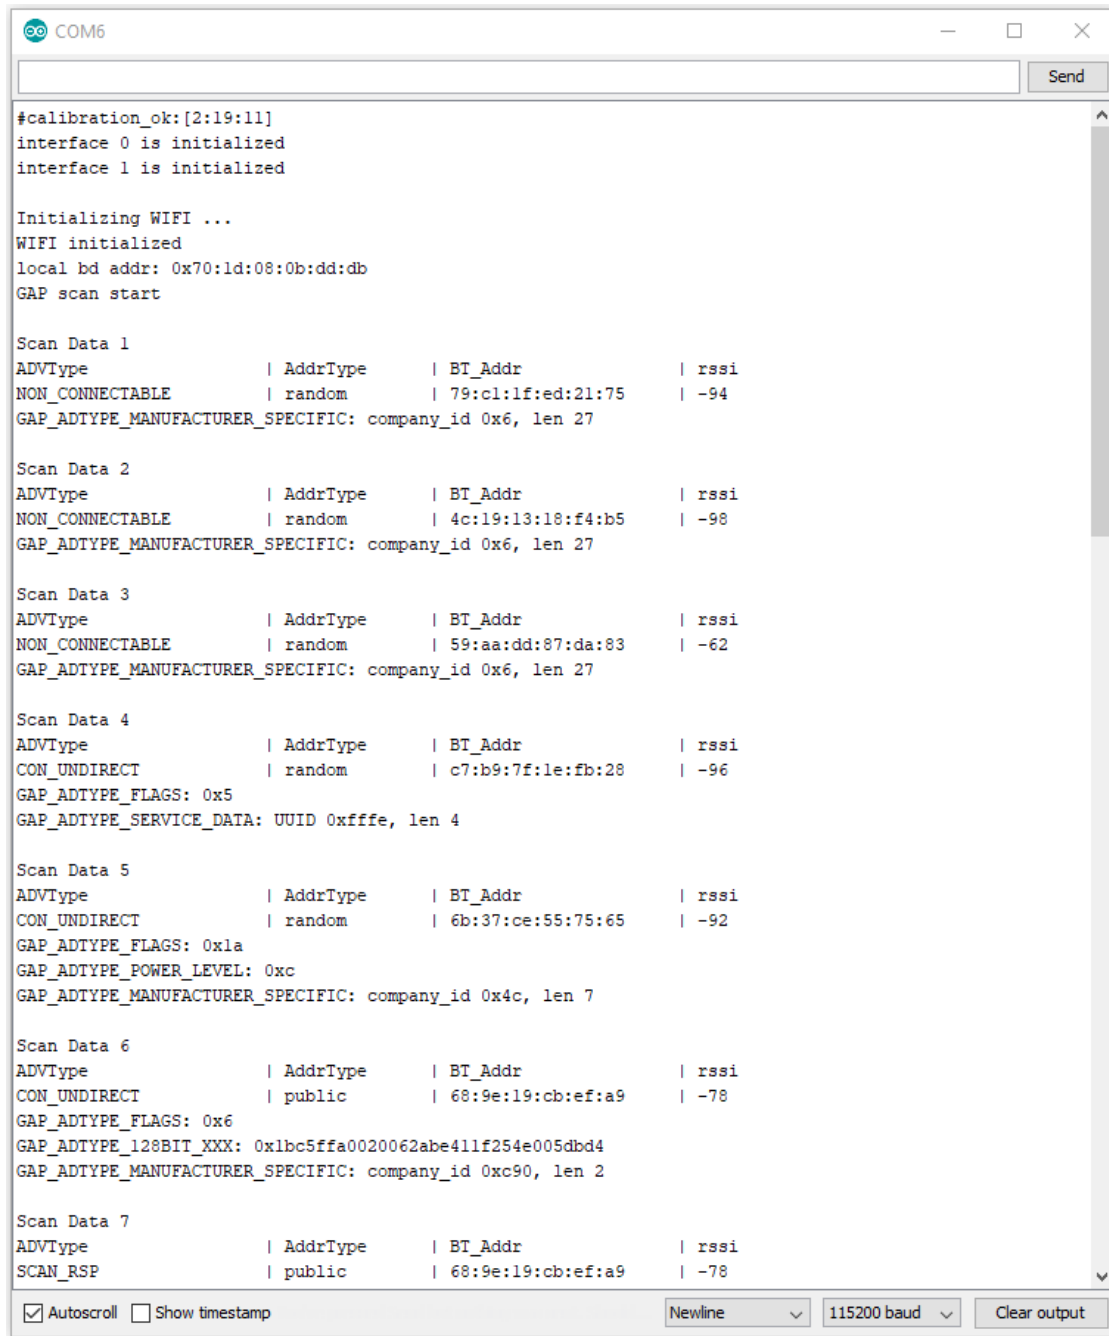

```

COM6
#calibration_ok:[2:19:11]
interface 0 is initialized
interface 1 is initialized

Initializing WIFI ...
WIFI initialized
local bd addr: 0x70:1d:08:0b:dd:db
GAP scan start

Scan Data 1
ADVType          | AddrType      | BT_Addr        | rssi
NON_CONNECTABLE  | random        | 79:c1:1f:ed:21:75 | -94
GAP_ADTYPE_MANUFACTURER_SPECIFIC: company_id 0x6, len 27

Scan Data 2
ADVType          | AddrType      | BT_Addr        | rssi
NON_CONNECTABLE  | random        | 4c:19:13:18:f4:b5 | -98
GAP_ADTYPE_MANUFACTURER_SPECIFIC: company_id 0x6, len 27

Scan Data 3
ADVType          | AddrType      | BT_Addr        | rssi
NON_CONNECTABLE  | random        | 59:aa:dd:87:da:83 | -62
GAP_ADTYPE_MANUFACTURER_SPECIFIC: company_id 0x6, len 27

Scan Data 4
ADVType          | AddrType      | BT_Addr        | rssi
CON_UNDIRECT     | random        | c7:b9:7f:1e:fb:28 | -96
GAP_ADTYPE_FLAGS: 0x5
GAP_ADTYPE_SERVICE_DATA: UUID 0xfffe, len 4

Scan Data 5
ADVType          | AddrType      | BT_Addr        | rssi
CON_UNDIRECT     | random        | 6b:37:ce:55:75:65 | -92
GAP_ADTYPE_FLAGS: 0x1a
GAP_ADTYPE_POWER_LEVEL: 0xc
GAP_ADTYPE_MANUFACTURER_SPECIFIC: company_id 0x4c, len 7

Scan Data 6
ADVType          | AddrType      | BT_Addr        | rssi
CON_UNDIRECT     | public        | 68:9e:19:cb:ef:a9 | -78
GAP_ADTYPE_FLAGS: 0x6
GAP_ADTYPE_128BIT_XXX: 0x1bc5ffa0020062abe411f254e005dbd4
GAP_ADTYPE_MANUFACTURER_SPECIFIC: company_id 0xc90, len 2

Scan Data 7
ADVType          | AddrType      | BT_Addr        | rssi
SCAN_RSP         | public        | 68:9e:19:cb:ef:a9 | -78

☒ Autoscroll ☐ Show timestamp
Newline 115200 baud Clear output

```

If you have the Bluetooth app nRF Connect installed, you can also use it to send out Bluetooth advertisements for the Ameba to pick up.

Code Reference

`setScanMode(GAP_SCAN_MODE_ACTIVE)` is used to set the scan mode. Active scanning will request for an additional scan response data packet from a device when it is found. Passive scanning will only look at the advertisement data, and not request for additional data.

`setScanInterval()` and `setScanWindow()` are used to set the frequency and duration of scans in milliseconds. A scan will start every interval duration, and each scan will last for the scan window duration. The scan window duration should be lesser or equal to the scan interval. Set a short interval to discover devices rapidly, set a long interval to conserve power.

`setScanCallback(scanFunction)` is used to register a function to be called when scan results are received. This can be used to set a user function for additional processing of scan data, such as looking for a specific device. If no function is registered, the scan results are formatted and printed to the serial monitor by default.

`beginCentral(0)` is used to start the Bluetooth stack in Central mode. The argument 0 is used to indicate that no clients will be operating in central mode.

`startScan(5000)` is used to start the scanning process for a specified duration of 5000 milliseconds. The scan will repeat according to the set scan interval and scan window values. After 5000 milliseconds, the scan process will stop, and will be ready to be started again.

BLE –Battery Client

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1

Example

Introduction


BLE connections use a server client model. The server contains the data of interest, while the client connects to the server to read the data. Commonly, a Bluetooth peripheral device acts as a server, while a Bluetooth central device acts as a client. Servers can contain many services, with each service containing a some set of data. Clients can send requests to read or write some data and can also subscribe to notifications so that the server can send data updates to a client.

In this example, a basic battery client is set up on the Ameba Bluetooth stack. The client connects to another Ameba board running the corresponding BLE battery service to read the battery level data.

Procedure

On the first Ameba board, upload the `BLEBatteryService` example code and let it run.

For the second Ameba board, open the example “Files” -> “Examples” -> “AmebaBLE” -> “BLEBatteryClient” .

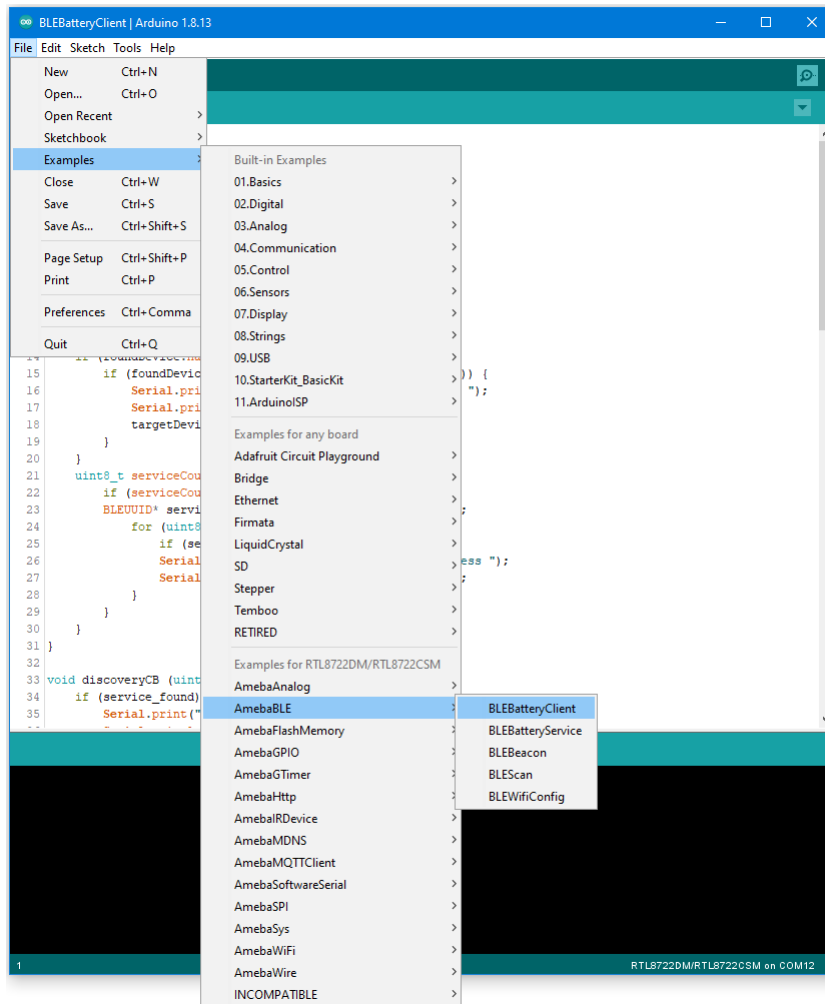

Upload the code and press the reset button on Ameba once the upload is finished.

Open the serial monitor and observe the log messages as the Ameba board with the battery client scans, connects, and reads data from the Ameba board with the battery service.

```

COM9
[2:19:11]
interface 0 is initialized
interface 1 is initialized

Initializing WIFI ...
WIFI initialized
[BLE Device] Local BT addr: 70:1d:08:0b:fe:d2
[BLE Device] GAP scan start
Found Ameba BLE Device at address 70:1d:08:0b:DD:DB
Found Battery Service at address 70:1d:08:0b:DD:DB
[BLE Device] GAP scan stop
[BLE Device] Connected conn_id 0
BLE connected to device at 0
Battery service found on connection id: 0
Battery level read callback for connection id: 0 Battery level: 90
Notifications Enabled
Notification received for connection id: 0 Battery level: 9
Notification received for connection id: 0 Battery level: 10
Notification received for connection id: 0 Battery level: 11
Notification received for connection id: 0 Battery level: 12
Notification received for connection id: 0 Battery level: 13
Battery level read callback for connection id: 0 Battery level: 90
Notification received for connection id: 0 Battery level: 14
Notification received for connection id: 0 Battery level: 15
Notification received for connection id: 0 Battery level: 16
Notification received for connection id: 0 Battery level: 17
Notification received for connection id: 0 Battery level: 18
Notifications Disabled
Autoscroll Show timestamp Newline 115200 baud Clear output

```

Highlighted in yellow, the Ameba board with the battery client first scans for advertising BLE devices with the advertised device name “AMEBA_BLE_DEV” and the advertised service UUID of 0x180F representing the battery service.

After finding the target device, the Ameba board with the battery client forms a BLE connection and searches for a battery service on the connected device, highlighted in blue.

With the client connected to the service, the battery client begins to read data using both regular data reads and notifications, highlighted in green.

Code Reference

BLEClient is used to create a client object to discover services and characteristics on the connected device.

- `setNotifyCallback()` is used to register a function that will be called when a battery level notification is received.
- `BLE.configClient()` is used to configure the Bluetooth stack for client operation.
- `addClient(connID)` creates a new BLEClient object that corresponds to the connected device.

BLE –WiFi Configuration Service

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Android / iOS mobile phone

Example

Introduction

In this example, a WiFi configuration service is set up on the Ameba Bluetooth stack. A mobile phone with the configuration app connects to the Ameba device using BLE and configures the Ameba to connect to the correct WiFi access point.


Procedure

Ensure that the Realtek WiFi configuration app is installed on your mobile phone, it is available at:

–Google Play Store: <https://play.google.com/store/apps/details?id=com.rtk.btconfig>


–Apple App Store: <https://apps.apple.com/sg/app/easy-wifi-config/id1194919510>

Open the example, “Files” -> “Examples” -> “AmebaBLE” -> “BLEWifiConfigService” .

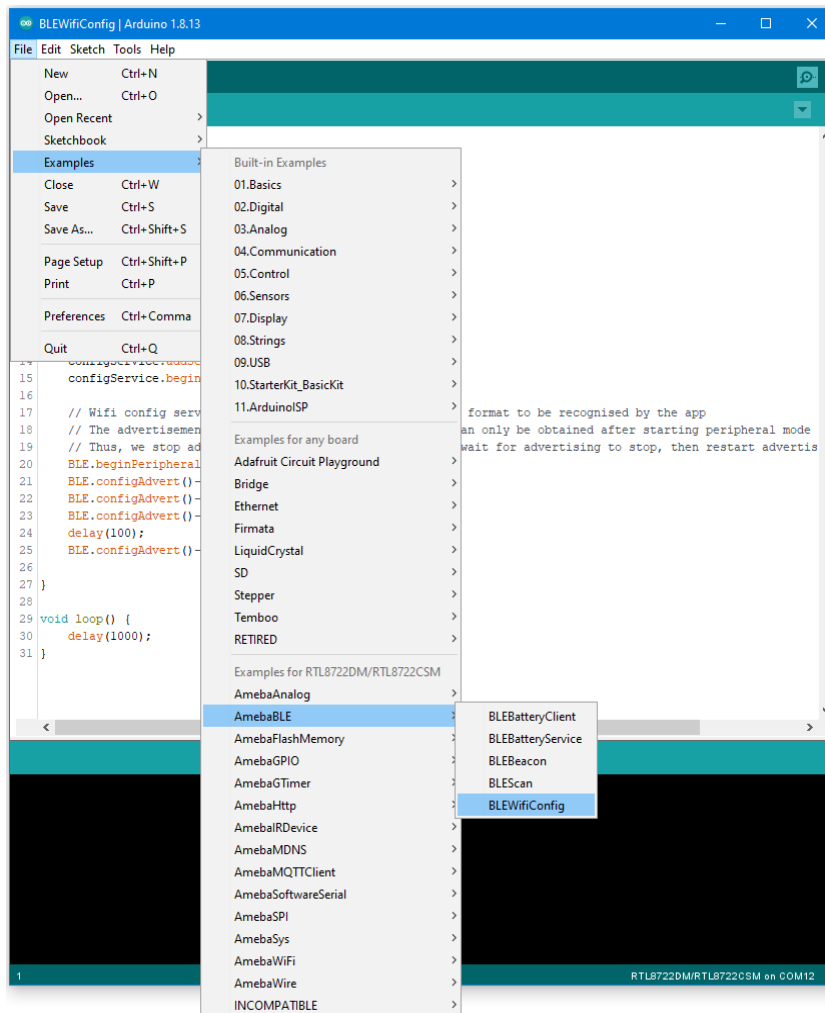


Upload the code and press the reset button on Ameba once the upload is finished.


On your mobile phone, open the Realtek WiFiConfig app and tap the round button to scan for Ameba boards.

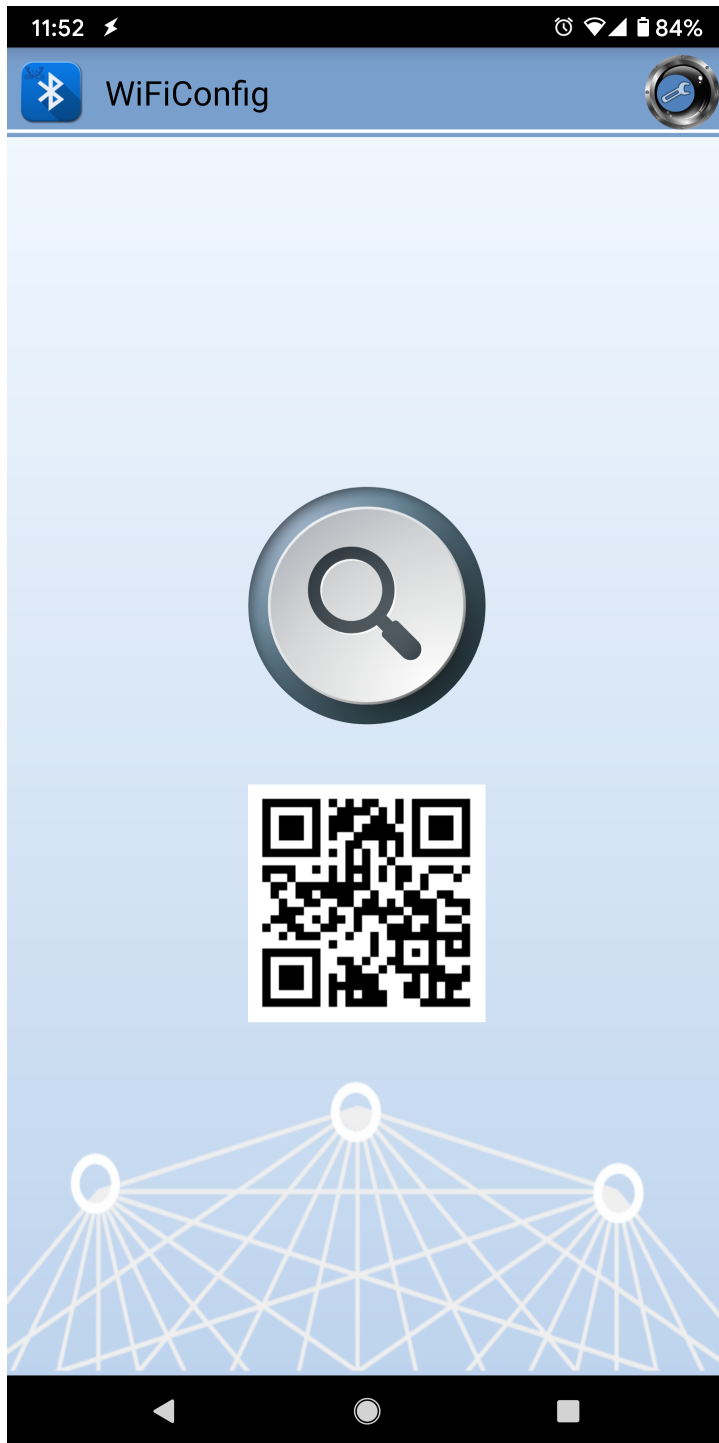


Select the correct Ameba board from the scan results. The app will connect to the Ameba board and ask the board to scan for WiFi networks and send the scan results back to the app using BLE.



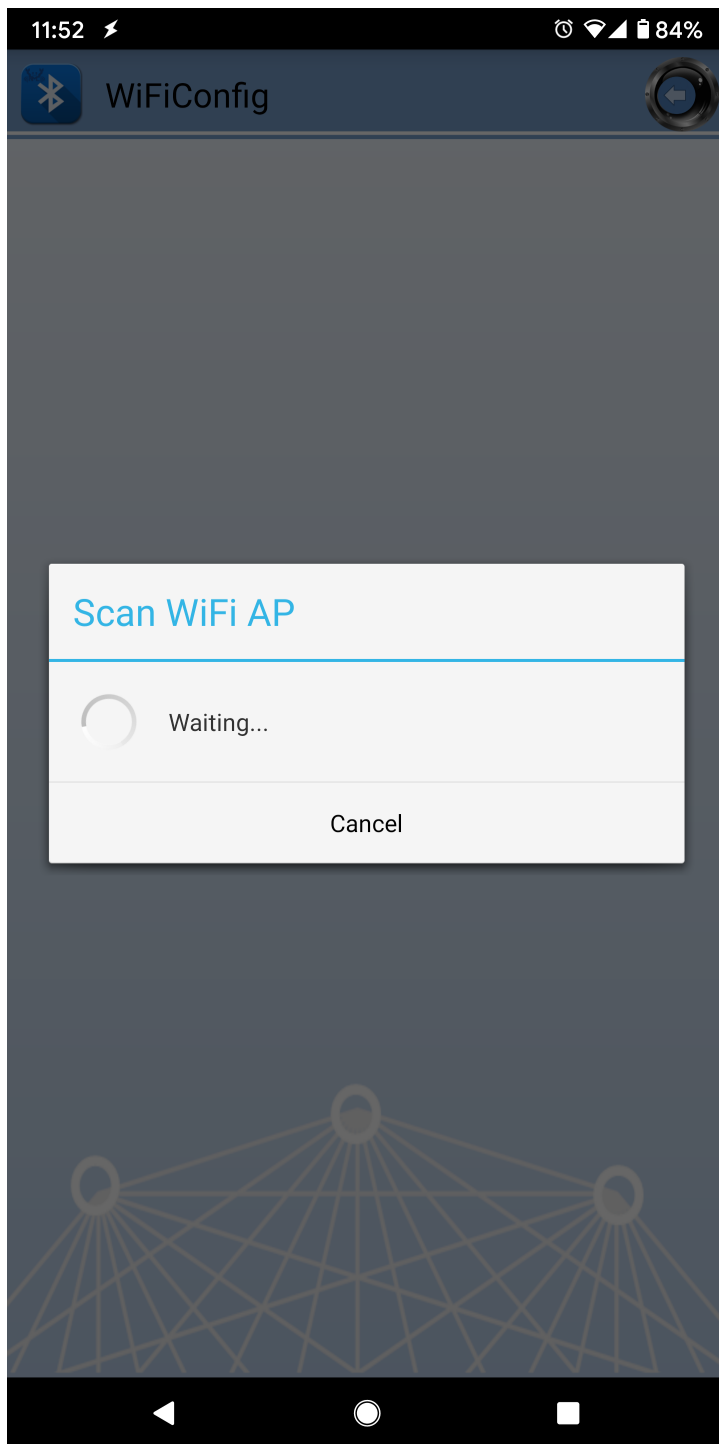


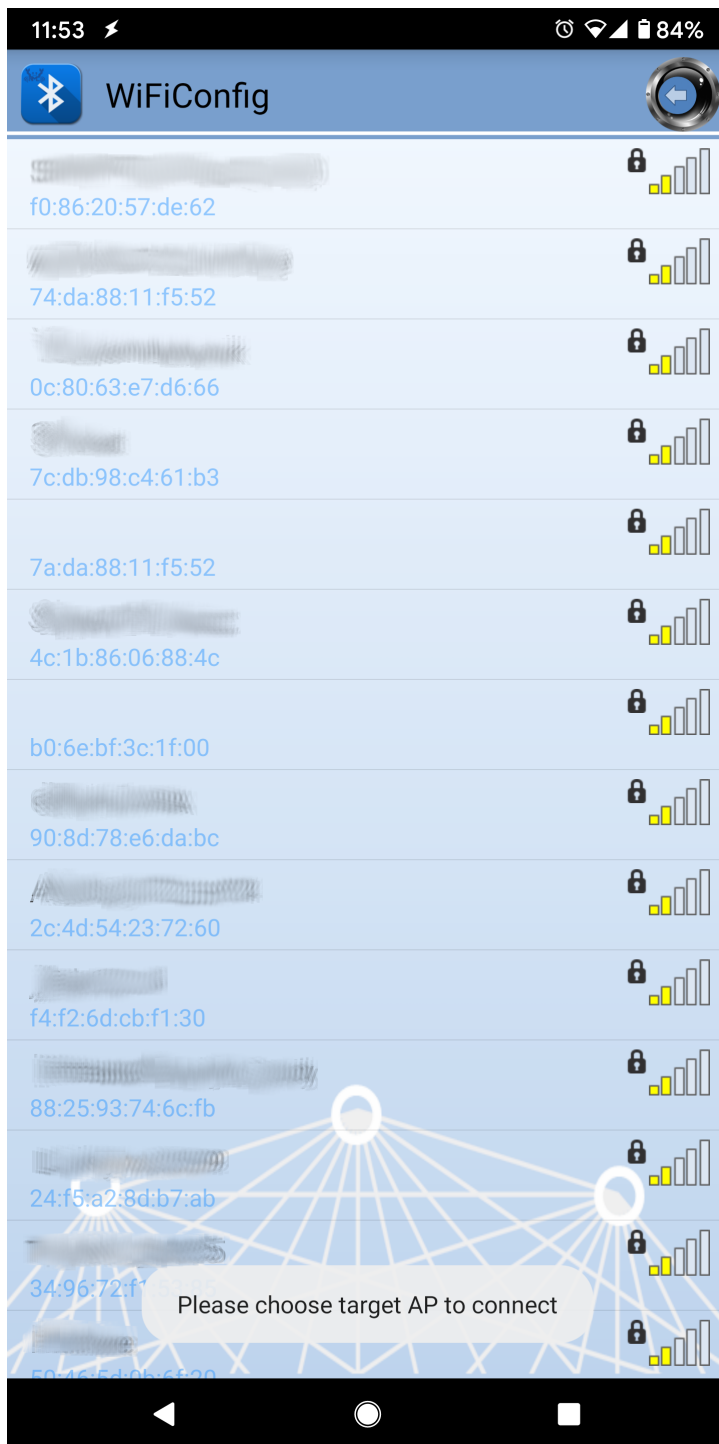

If your phone is currently connected to a WiFi network, the app will ask for the WiFi password to connect the Ameba board to the same WiFi network. Tap “Select AP” to choose another WiFi network, or enter the password and tap continue to connect Ameba to the selected WiFi network.

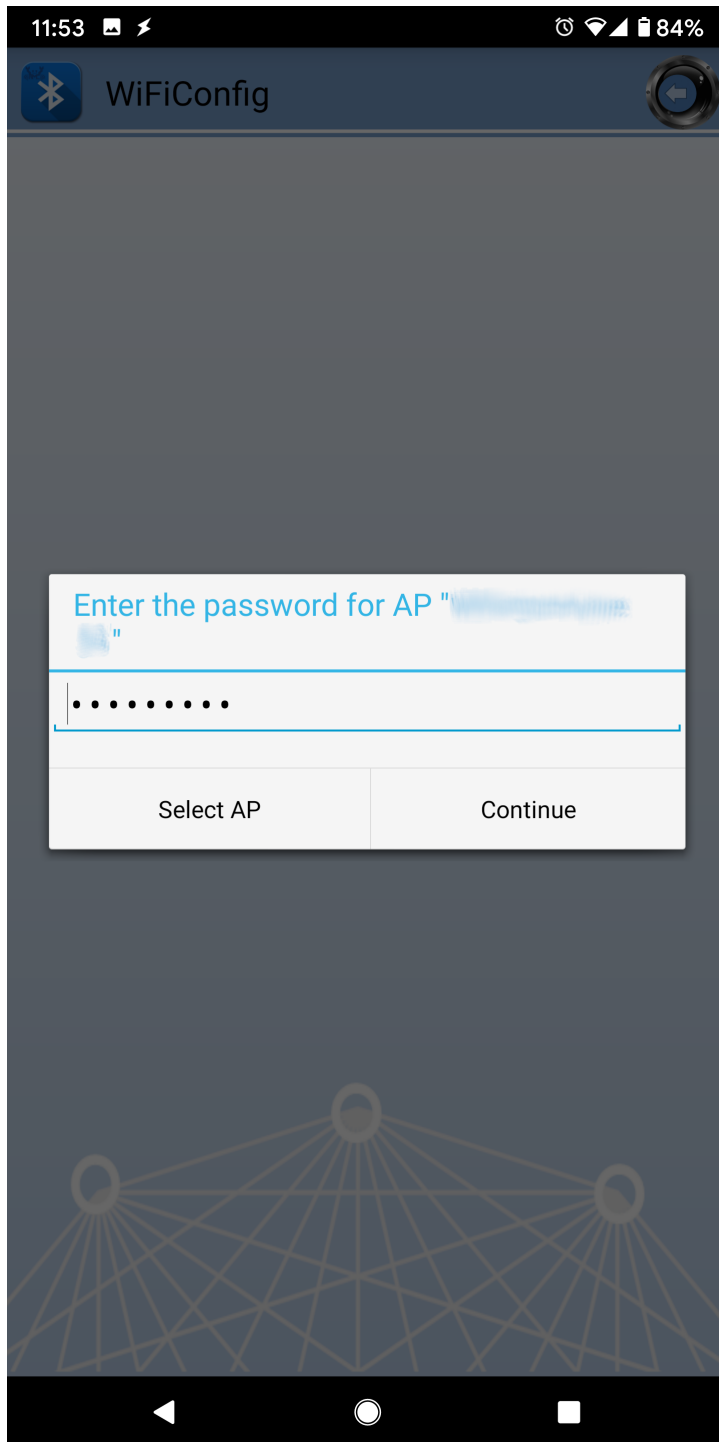

After the Ameba board connects to the WiFi network, the following message will be shown. Tap “Try another AP” to connect to another WiFi network or tap “Confirm” to keep the current WiFi network and disconnect BLE from the Ameba board.

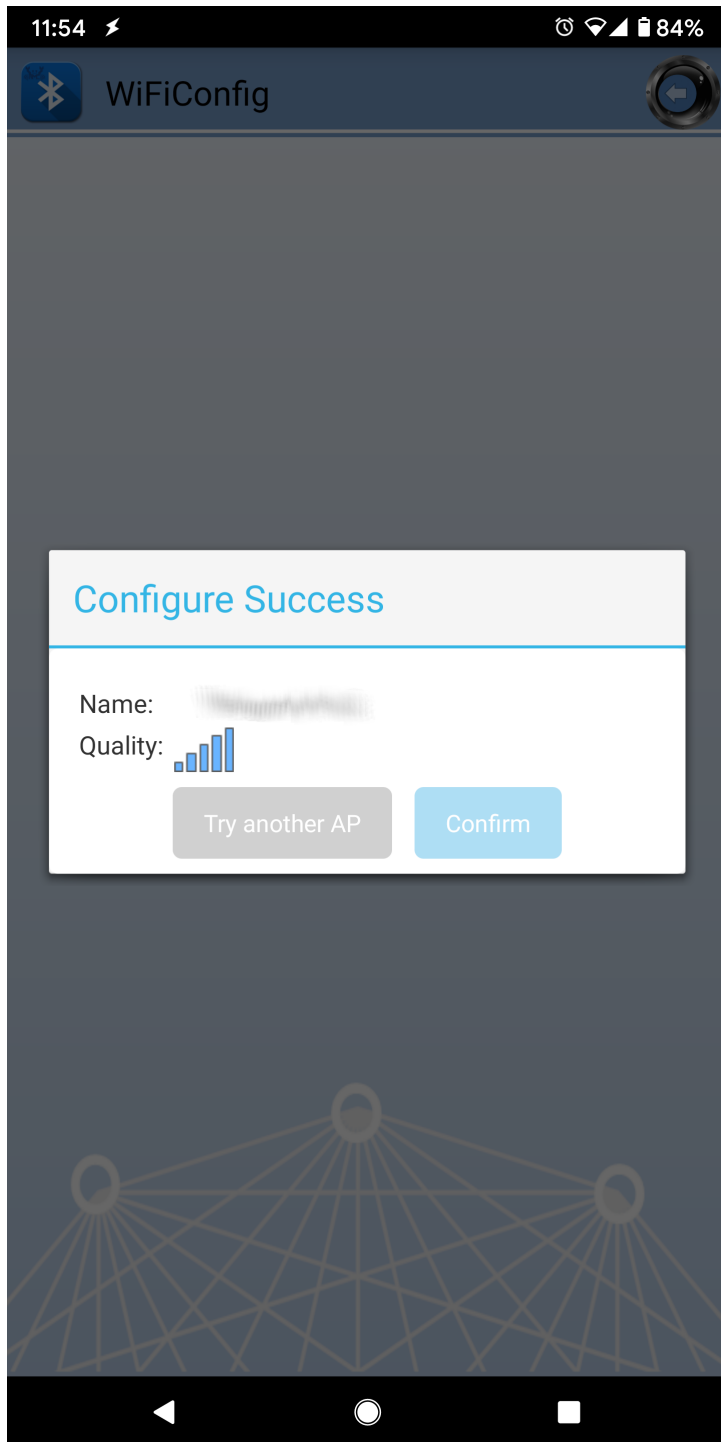

Code Reference

BLEWifiConfigService is used to create an instance of the WiFi configuration service to run on the Bluetooth device.

`BLE.configAdvert() -> setAdvType(configService.advData())` is used to set the correct advertisement data necessary for the phone app to find the Ameba Bluetooth device.

BLE –BLE UART Client

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 2

Example

Introduction


In this example, two RTL8722 boards are connected using BLE. One board runs a BLE UART service, while the other connects to the service using a client and both boards are able to communicate with text messages over the UART service.

Procedure

On the first board, upload the BLE UART service example code. Refer to the example guide for detailed instructions.


For the second board, open the example, “Files” -> “Examples” -> “AmebaBLE” -> “BLEUartClient”

.

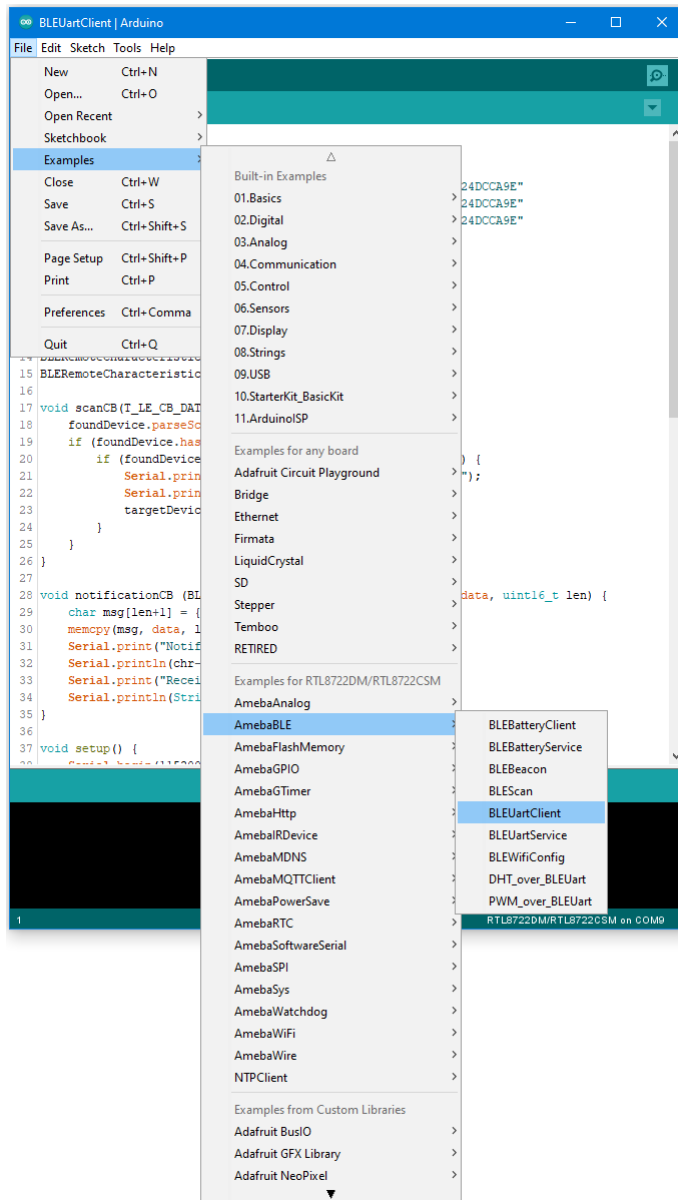

Upload the code and press the reset button on Ameba once the upload is finished.

Reset the UART service board first, wait for the BLE advertisement process to begin, and reset the UART client board. The client board should scan, discover, and connect to the service board. After connecting, the client board will verify that the correct UART service exists on the service board, before enabling notifications on the TX characteristic. Any message typed in the serial terminal will be sent to the other board using the UART service.

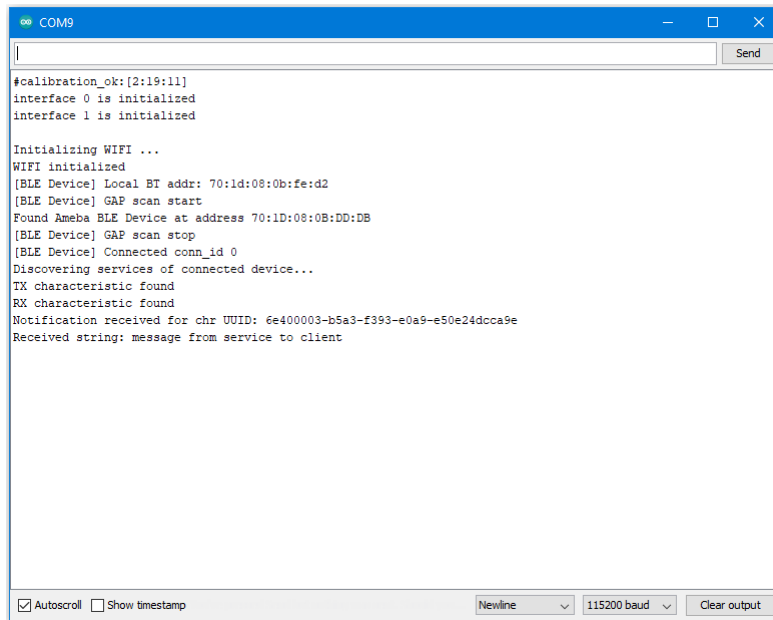

```
#calibration_ok:[2:19:11]
interface 0 is initialized
interface 1 is initialized

Initializing WIFI ...
WIFI initialized
[BLE Device] Local BT addr: 70:1d:08:0b:fe:d2
[BLE Device] GAP scan start
Found Ameba BLE Device at address 70:1D:08:0B:DD:DB
[BLE Device] GAP scan stop
[BLE Device] Connected conn_id 0
Discovering services of connected device...
TX characteristic found
RX characteristic found
Notification received for chr UUID: 6e400003-b5a3-f393-e0a9-e50e24dcca9e
Received string: message from service to client
```

Code Reference

The `BLEClient` class is used to discover the services that exist on a connected BLE device. The discovery process will create `BLERemoteService`, `BLERemoteCharacteristic` and `BLERemoteDescriptor` objects corresponding to the services, characteristics and descriptors that exist on the connected device. These objects can then be used to read and write data to the connected device.

BLE –BLE UART Service

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Android / iOS smartphone

Example

Introduction

With BLE, application data is sent and received using the GATT system. GATT uses services, characteristics, and attributes to organise data and control how the data can be read from and written to. The Bluetooth SIG specification for BLE includes several predefined services for common applications, but users are free to implement custom services and characteristics to best fit their data structure and application needs

In this example, the `BLEService` and `BLECharacteristic` classes are used to implement a custom service for transmitting ASCII characters similar to regular UART. This custom service is the Nordic UART Service, which is supported in several smartphone apps.

Procedure

Ensure that a compatible BLE UART app is installed on your smartphone, it is available at:

–Google Play Store:


<https://play.google.com/store/apps/details?id=com.adafruit.bluefruit.le.connect>

https://play.google.com/store/apps/details?id=de.kai_morich.serial_bluetooth_terminal

–Apple App Store:


<https://apps.apple.com/us/app/bluefruit-connect/id830125974>


Open the example, “Files” -> “Examples” -> “AmebaBLE” -> “BLEUartService” .

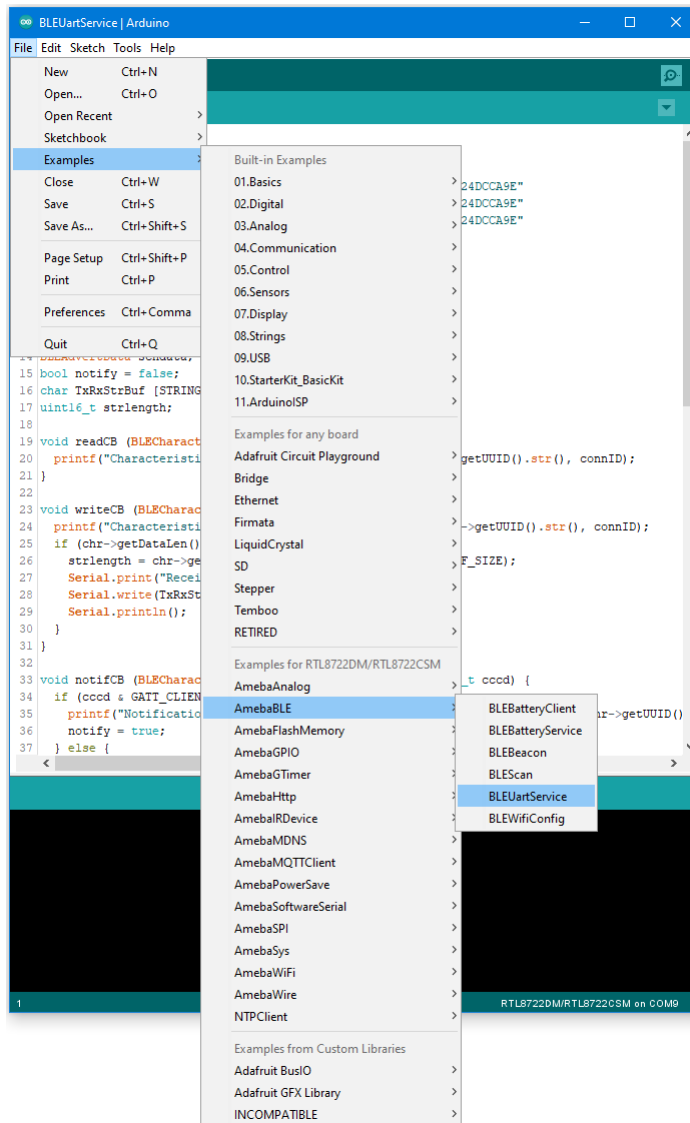

Upload the code and press the reset button on Ameba once the upload is finished.

Open the app on your smartphone, scan and connect to the Ameba board shown as “AMEBA_BLE_DEV” and choose the UART function in the app. Note that the BLE UART service on the Ameba board will only work with the UART and Plotter functions in the Bluefruit Connect app, other functions (Pin I/O, Image Transfer) require other BLE services that are not included in this example.

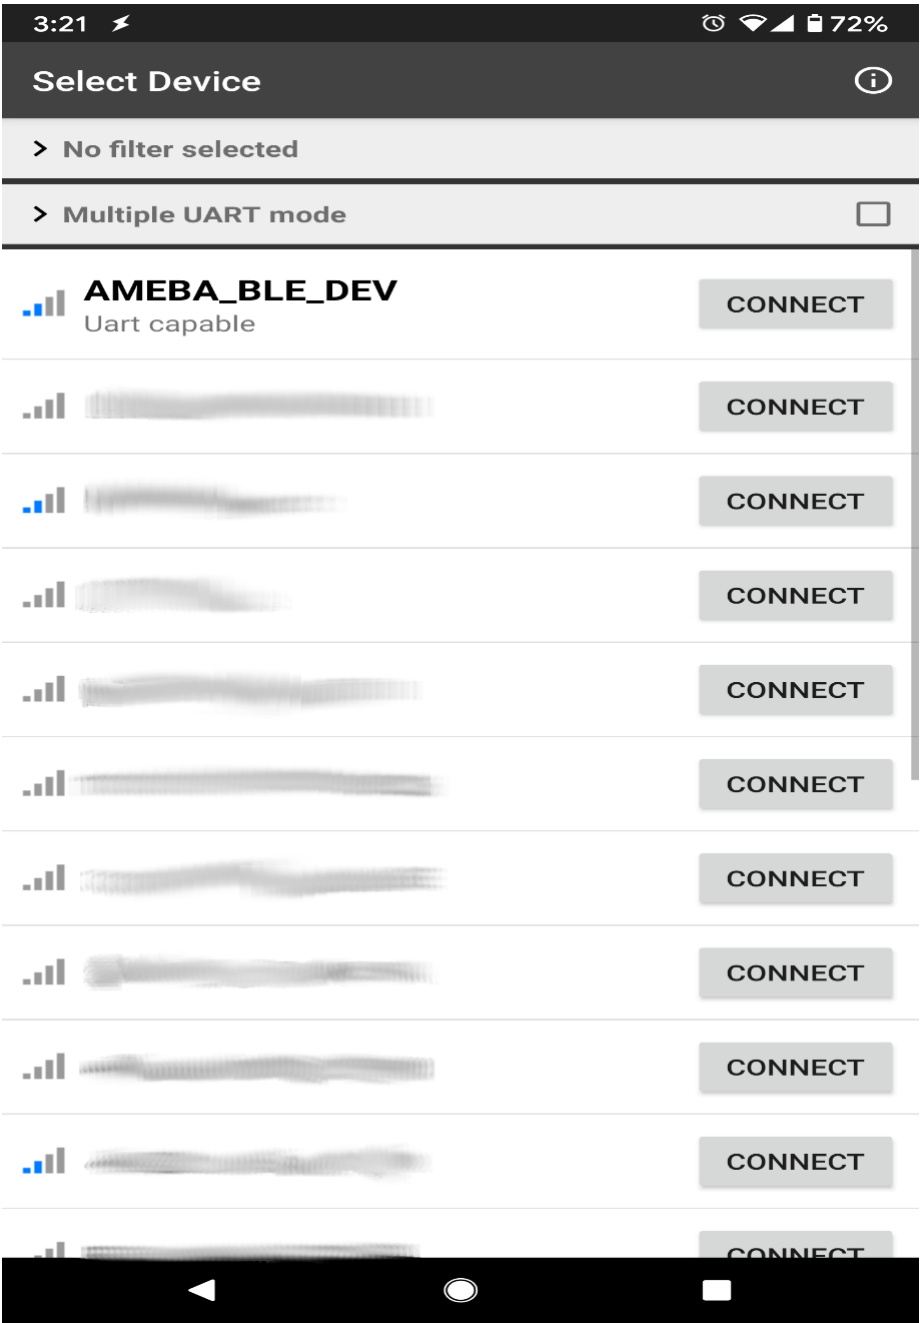

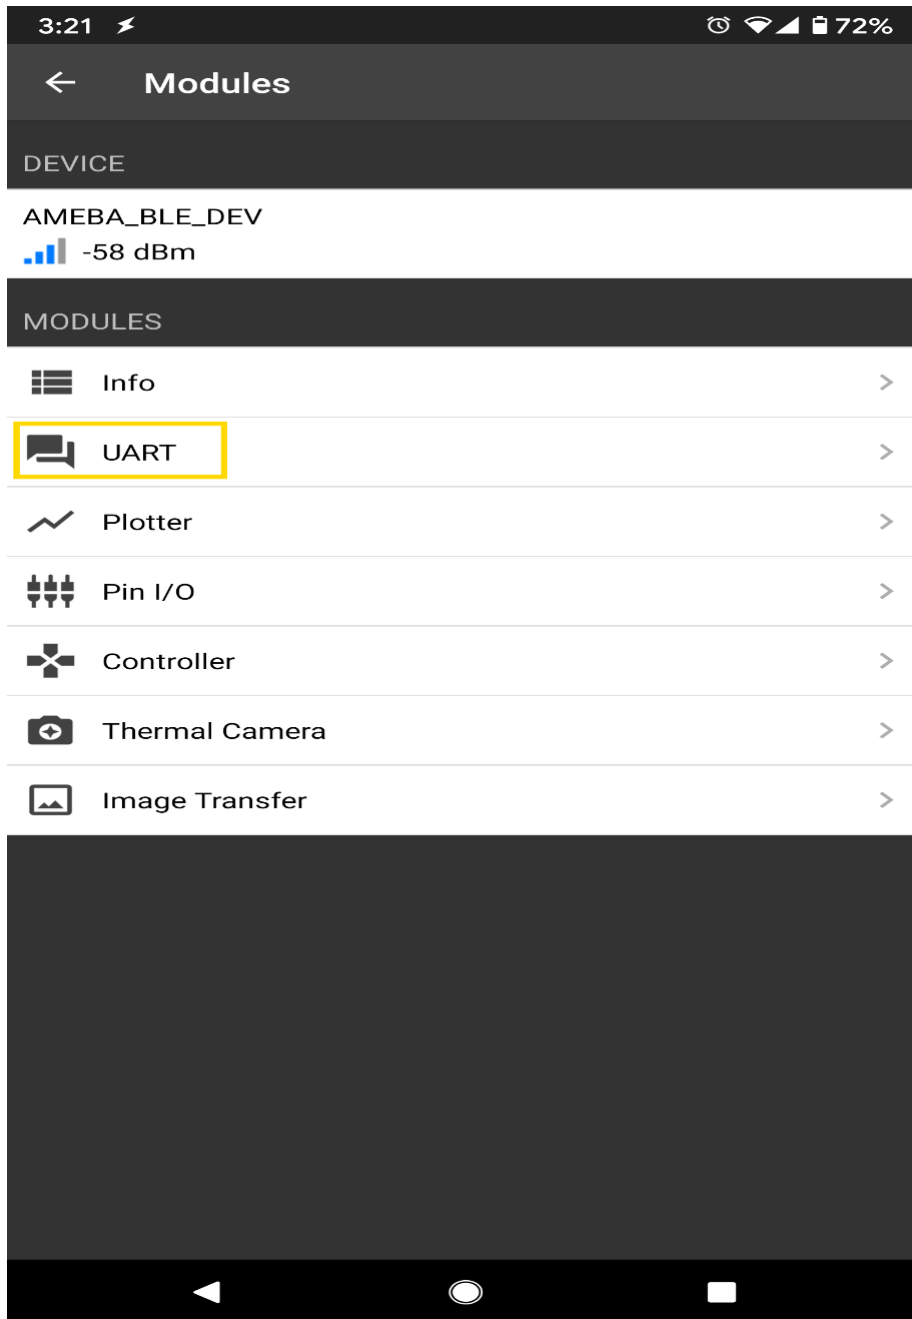



In the UART terminal section of the app, enter a message and click send. You should see the message appear in the Arduino serial monitor.

In the Arduino serial monitor, enter a message and click send. The message will appear in the smartphone app.



message from app to Ameba
message from Ameba to smartphone app

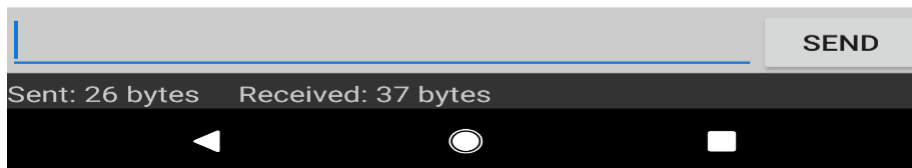

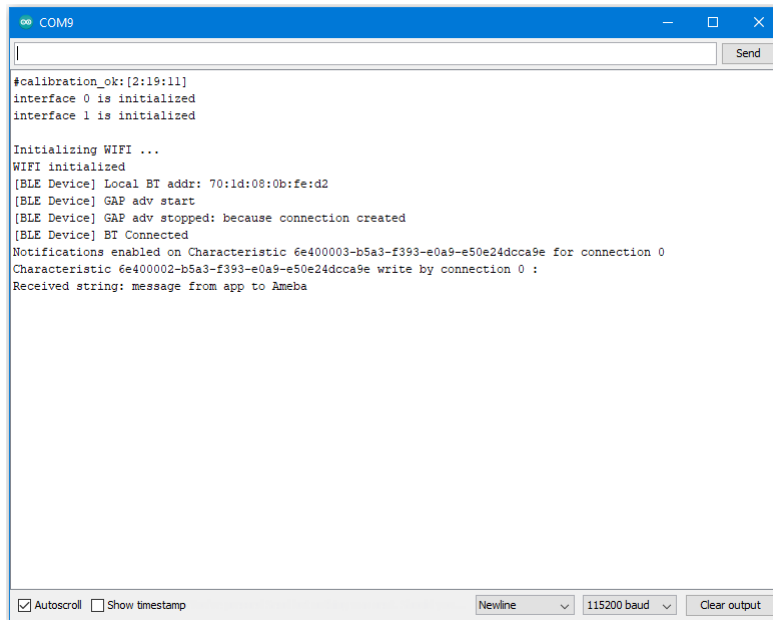

```
#calibration_ok:[2:19:11]
interface 0 is initialized
interface 1 is initialized

Initializing WIFI ...
WIFI initialized
[BLE Device] Local BT addr: 70:1d:08:0b:ferd2
[BLE Device] GAP adv start
[BLE Device] GAP adv stopped: because connection created
[BLE Device] BT Connected
Notifications enabled on Characteristic 6e400003-b5a3-f393-e0a9-e50e24dcca9e for connection 0
Characteristic 6e400002-b5a3-f393-e0a9-e50e24dcca9e write by connection 0 :
Received string: message from app to Ameba
```

Code Reference

The `BLECharacteristic` class is used to create two characteristics, one for receive (Rx) and one for transmit (Tx), and added to a service created with the `BLEService` class.

The required read/write/notify properties are set for each characteristic using the `set__Property()` methods, and callback functions are registered using the `set__Callback()` methods. The required buffer size is also set for each characteristic so that it has enough memory to store a complete string.

When data is written to the receive characteristic, the registered callback function is called, which prints out the received data as a string to the serial monitor.

When data is received on the serial port, it is copied into the transmit characteristic buffer, and the `notify()` method is used to inform the connected device of the new data.

BLE –DHT over BLE UART

Materials

- AmebaD [RTL8722DM/ RTL8722CSM/ RTL8722DM MINI] x 1
- DHT11 or DHT22 or DHT21
- Android / iOS smartphone

Example


Introduction

In this example, the data obtained from a DHT temperature and humidity sensor are transmitted over a BLE UART service to a smartphone. Refer to the other examples for detailed explanations of using the DHT sensor and the BLE UART service.


Procedure

Connect the DHT sensor to the Ameba board following the diagram.

RTL8722DM / RTL8722CSM:

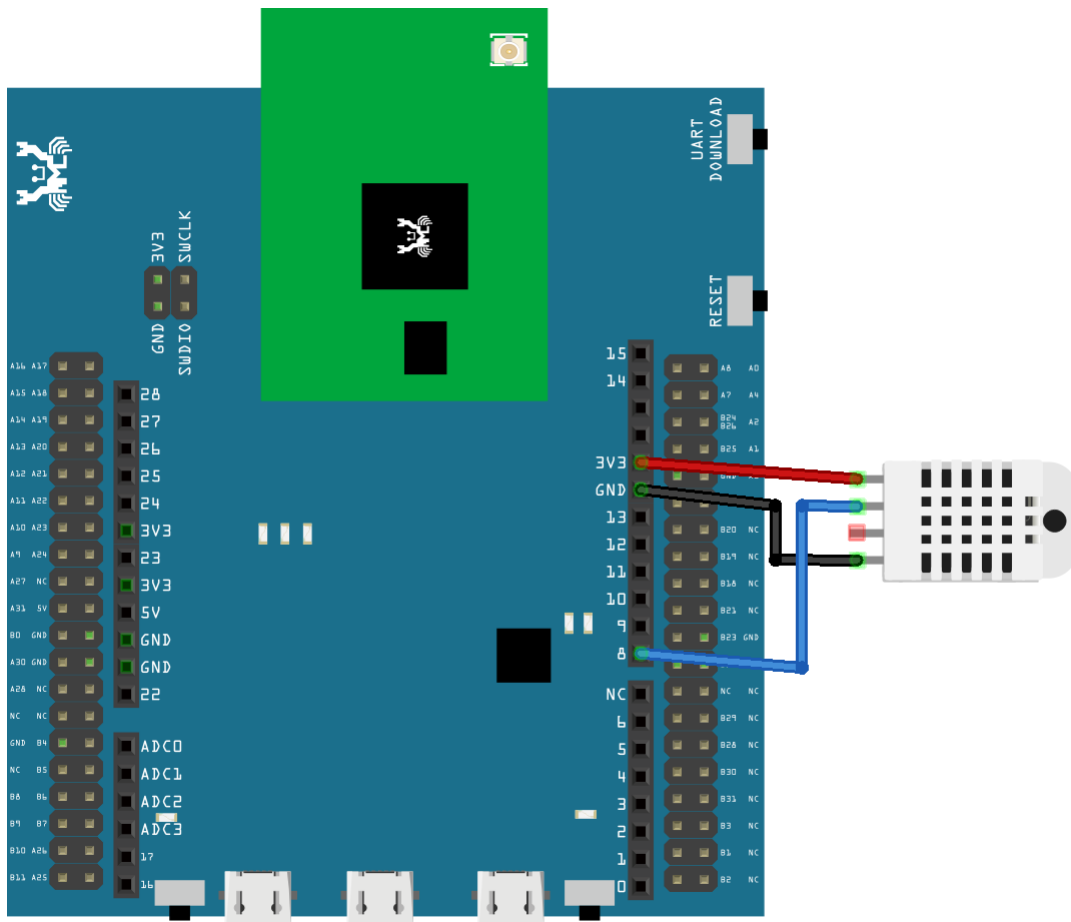

RTL8722DM MINI:

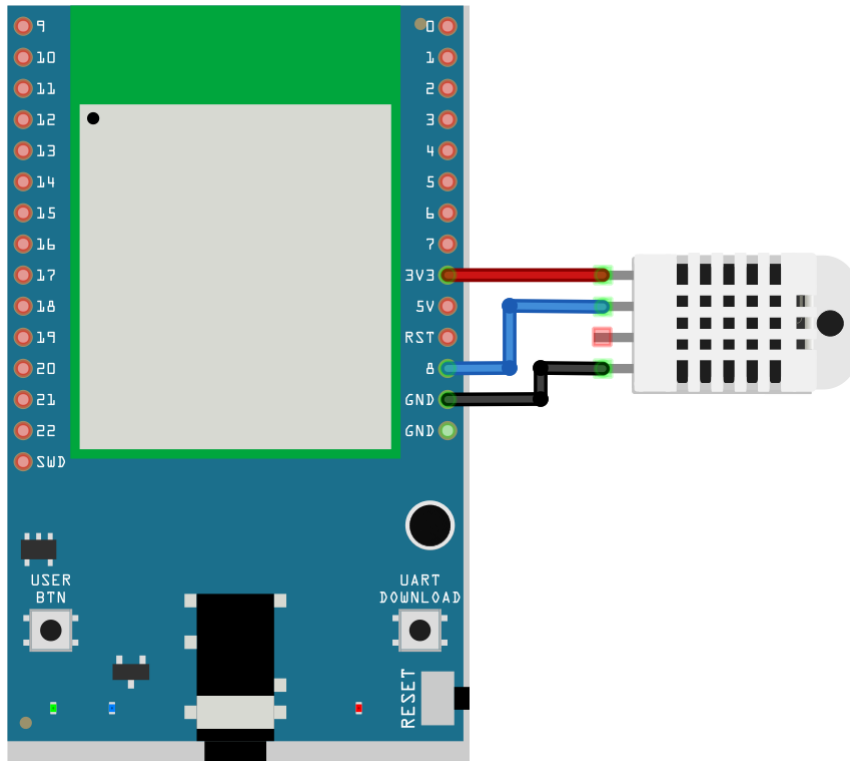

Ensure that a compatible BLE UART app is installed on your smartphone, it is available at:

- Google Play Store:

<https://play.google.com/store/apps/details?id=com.adafruit.bluefruit.le.connecta>>https://play.google.com/store/apps/details?id=de.kai_morich.serial_bluetooth_terminal

- Apple App Store:

<https://apps.apple.com/us/app/bluefruit-connect/id830125974>

Open the example, “Files” -> “Examples” -> “AmebaBLE” -> “DHT_over_BLEUart” .


```


1 |
2 #include "BLEDevice.h"
3 #include "DHT.h"
4
5 #define UART_SERVICE_UUID "6E400001-B5A3-F393-E0A9-E50E24DCCA9E"
6 #define CHARACTERISTIC_UUID_RX "6E400002-B5A3-F393-E0A9-E50E24DCCA9E"
7 #define CHARACTERISTIC_UUID_TX "6E400003-B5A3-F393-E0A9-E50E24DCCA9E"
8
9 #define STRING_BUF_SIZE 100
10
11 // The digital pin we're connected to.
12 #define DHTPIN 8
13
14 // Uncomment whatever type you're using!
15 #define DHTTYPE DHT11 // DHT 11
16 // #define DHTTYPE DHT22 // DHT 22 (AM2302), AM2321
17 // #define DHTTYPE DHT21 // DHT 21 (AM2301)
18
19 DHT dht(DHTPIN, DHTTYPE);
20
21 BLEService UartService(UART_SERVICE_UUID);
22 BLECharacteristic Rx(CHARACTERISTIC_UUID_RX);
23 BLECharacteristic Tx(CHARACTERISTIC_UUID_TX);
24 BLEAdvertData advdata;
25 BLEAdvertData scndata;
26 bool notify = false;
27 char TxRxStrBuf [STRING_BUF_SIZE] = {0};
28 uint16_t strlength;
29
30 void writeCB (BLECharacteristic* chr, uint8_t connID) {
31     printf("Characteristic %s write by connection %d :\n", chr->getUUID().str(), connID);
32     if (chr->getLen() > 0) {
33         strlength = chr->getData((uint8_t*)TxRxStrBuf, STRING_BUF_SIZE);
34         Serial.print("Received string: ");
35         Serial.write(TxRxStrBuf, strlength);
36         Serial.println();
37     }
38 }
39
40 void notifyCB (BLECharacteristic* chr, uint8_t connID, uint16_t cccid) {
41     if (cccid & GATT_CLIENT_CHAR_CONFIG_NOTIFY) {
42         printf("Notifications enabled on Characteristic %s for connection %d :\n", chr->getUUID().str(), connID);
43     }
44 }

```



Upload the code and press the reset button on Ameba once the upload is finished.

Open the app on your smartphone, scan and connect to the Ameba board shown as “AMEBA_BLE_DEV” and choose the UART function in the app.

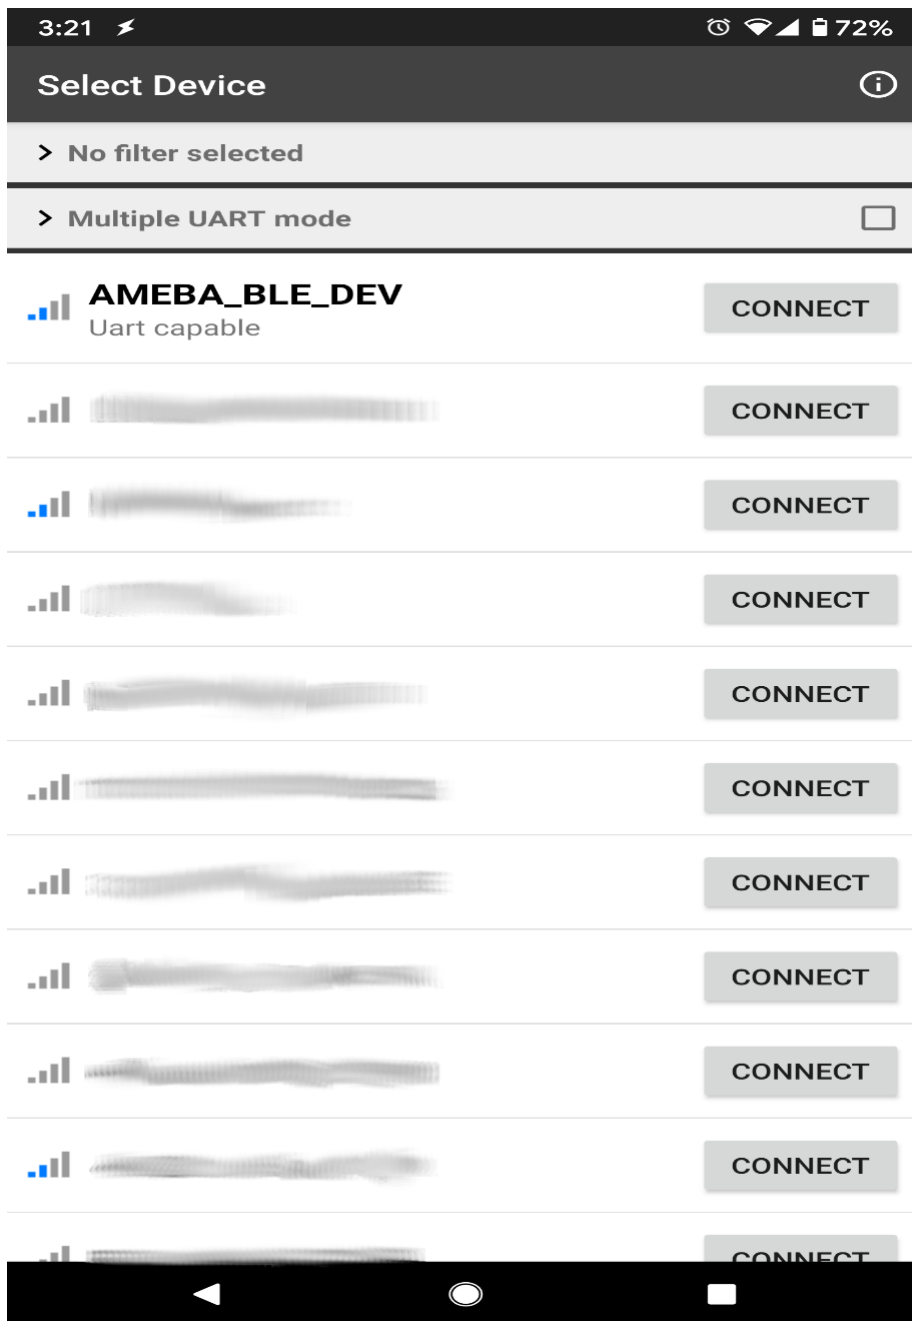

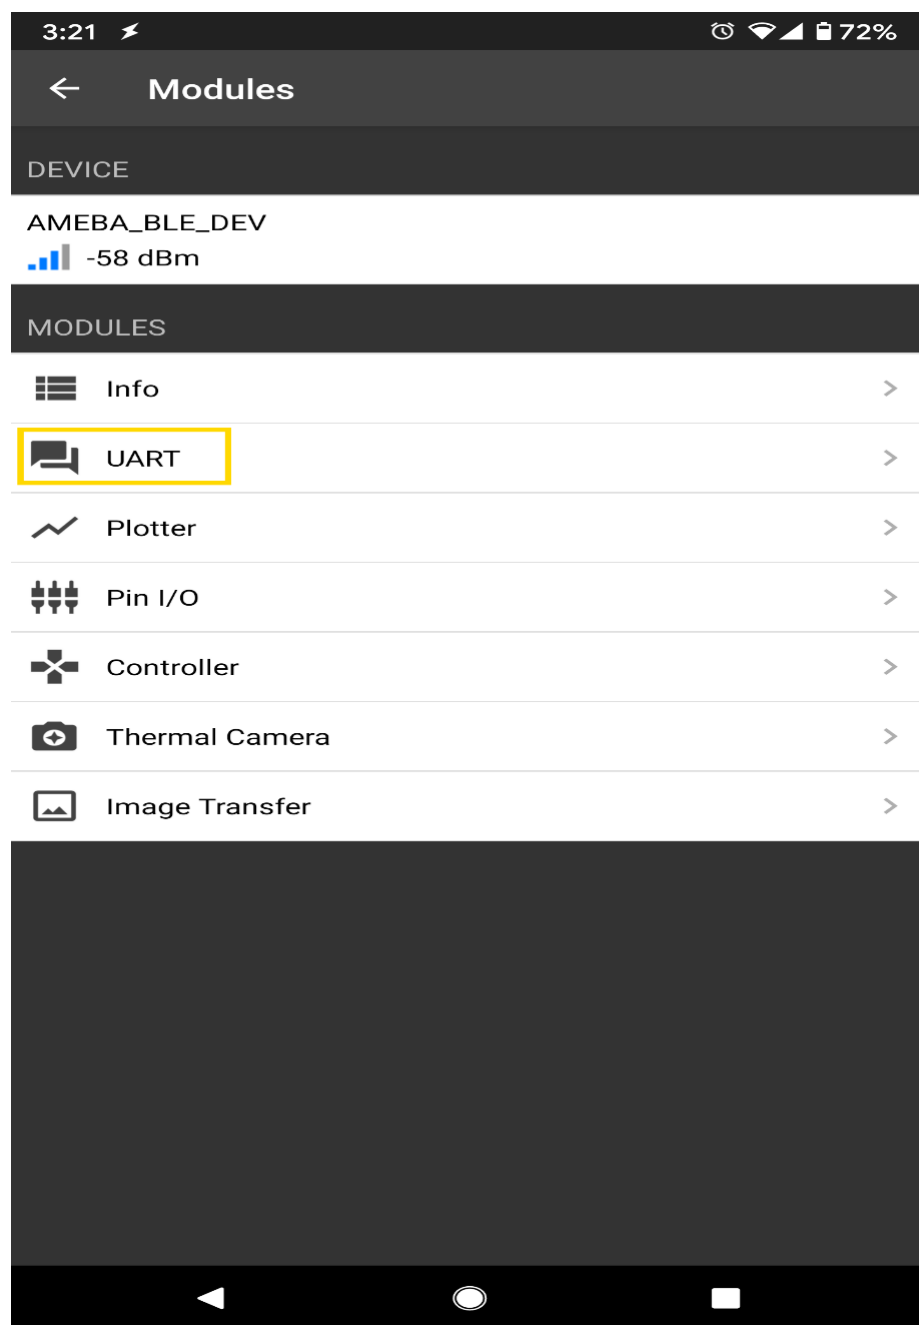

After starting the UART function, notifications should be received every 5 seconds containing the measured temperature and humidity.

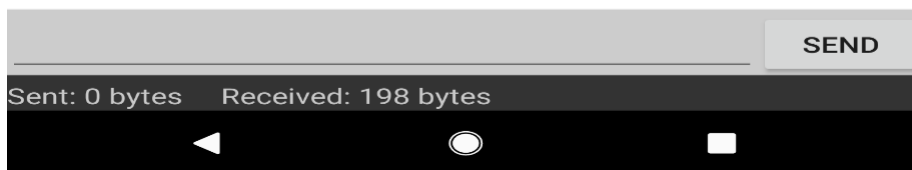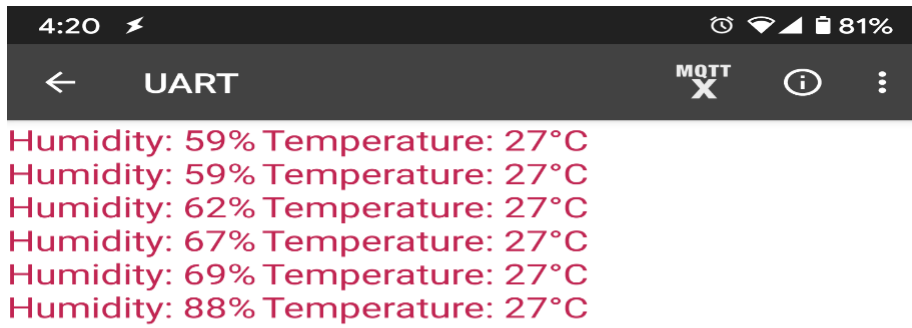

BLE –PWM over BLE UART

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- RGB LED

- Android / iOS smartphone

Example


Introduction


In this example, a smartphone app is used to transmit commands over BLE UART to control the PWM outputs and change the color of a RGB LED. Refer to the other example guides for detailed explanations of the BLE UART service.

Procedure

Connect the RGB LED to the RTL8722 board following the diagram, the common LED pin may need to connect to 3.3V or GND depending on the type of LED (common anode / common cathode).

RTL8722DM / RTL8722CSM:

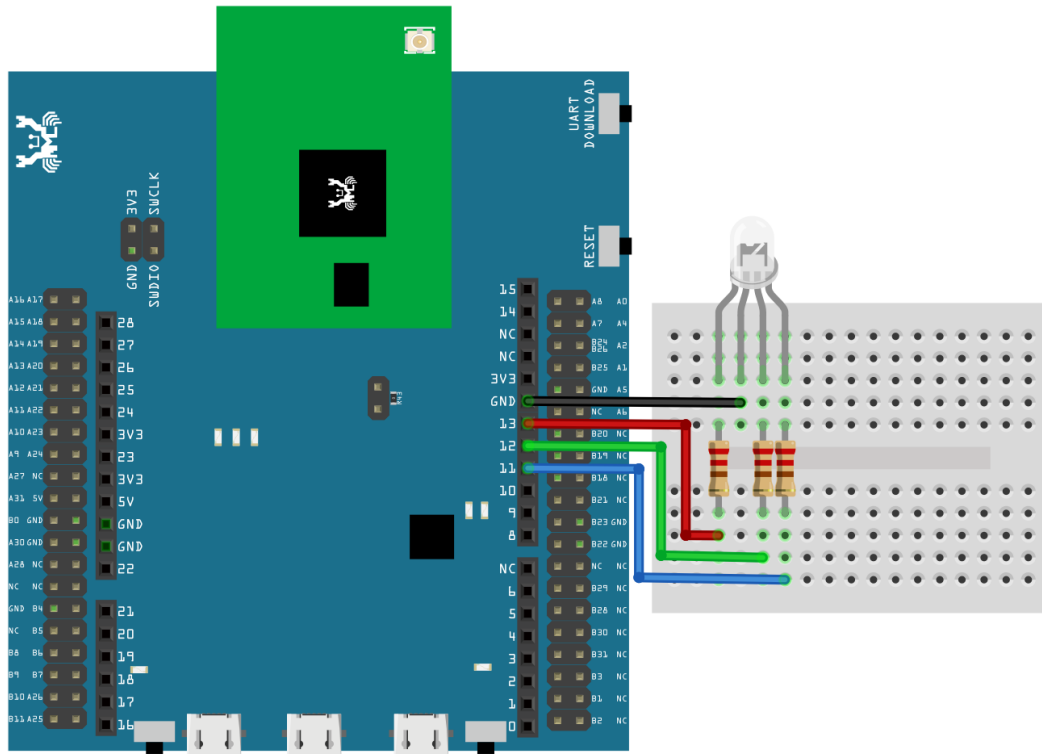

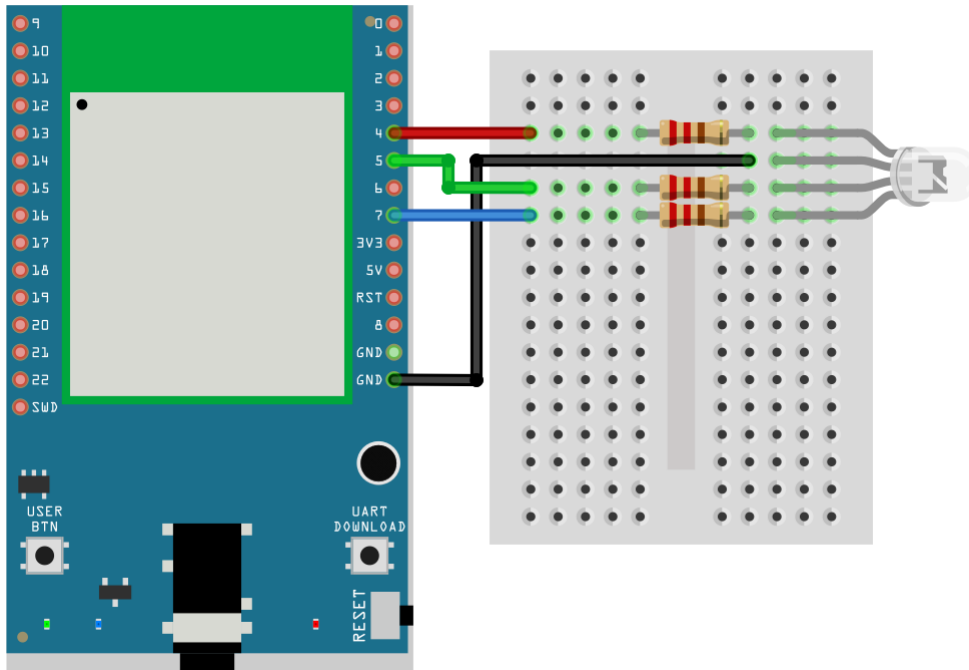

Ensure that the required app is installed on your smartphone, it is available at:

–Google Play Store:


<https://play.google.com/store/apps/details?id=com.adafruit.bluefruit.le.connect>

–Apple App Store:


<https://apps.apple.com/us/app/bluefruit-connect/id830125974>


Open the example, “Files” -> “Examples” -> “AmebaBLE” -> “PWM_over_BLEUart” .


Upload the code and press the reset button on Ameba once the upload is finished.

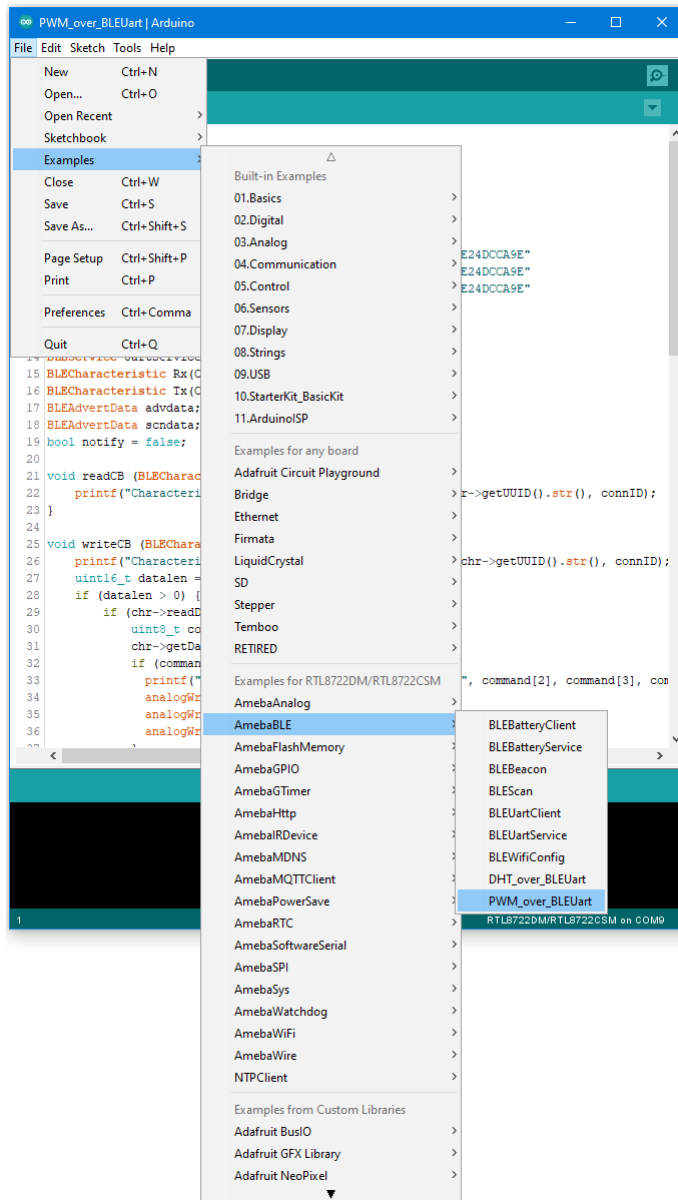


Open the app on your smartphone, scan and connect to the board shown as “AMEBA_BLE_DEV” and choose the controller -> color picker function in the app.

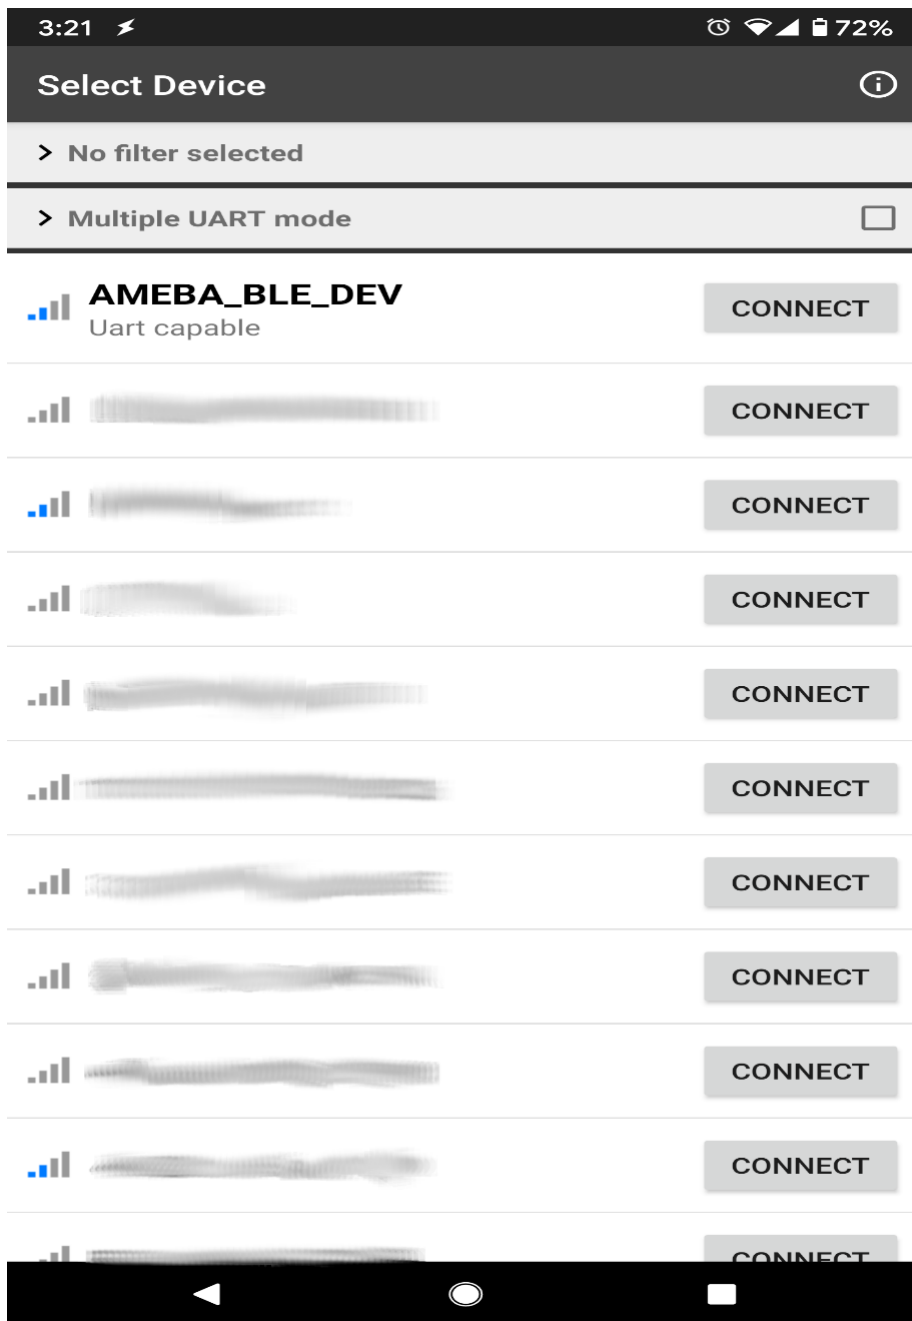

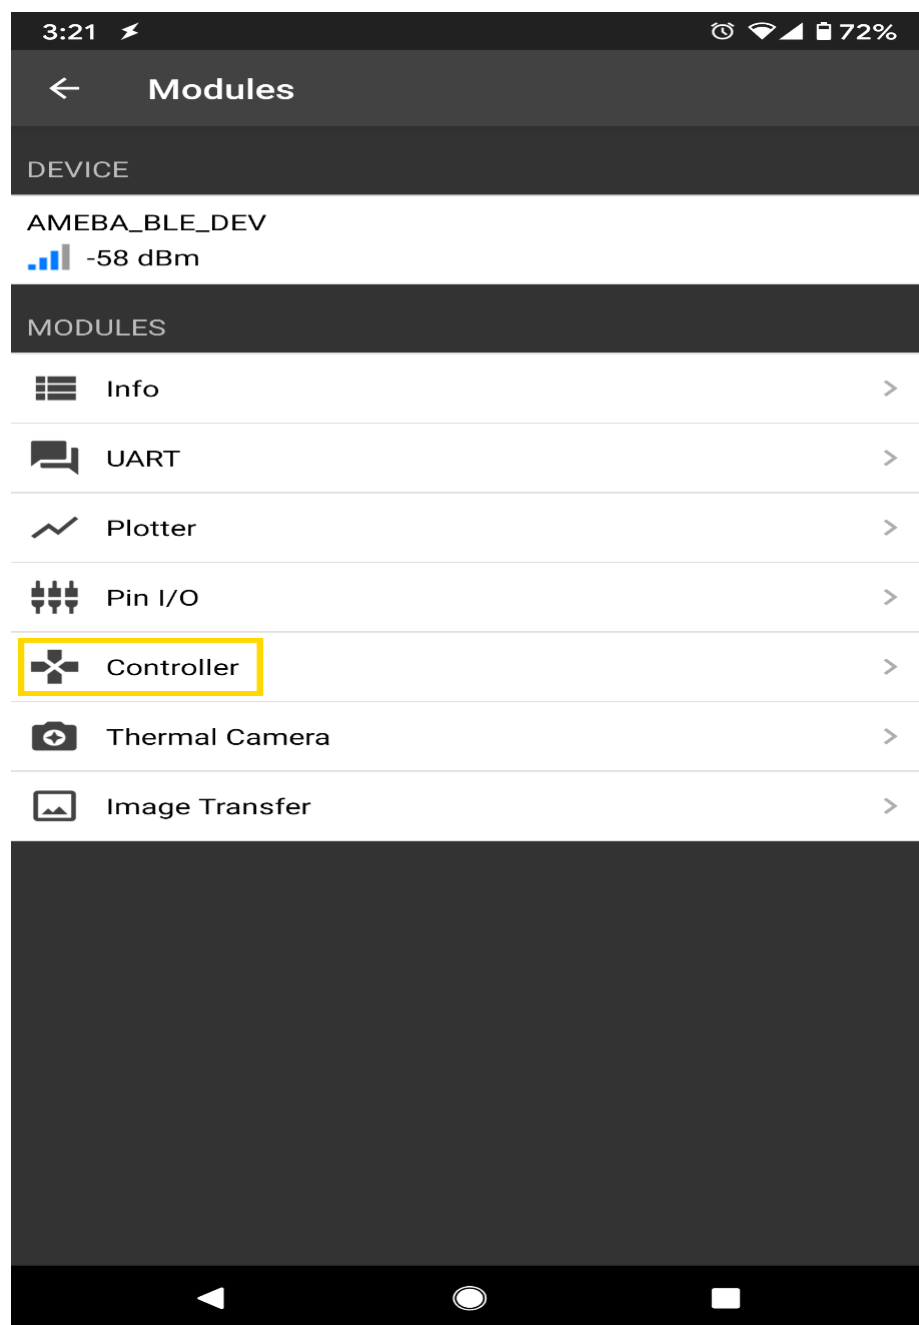

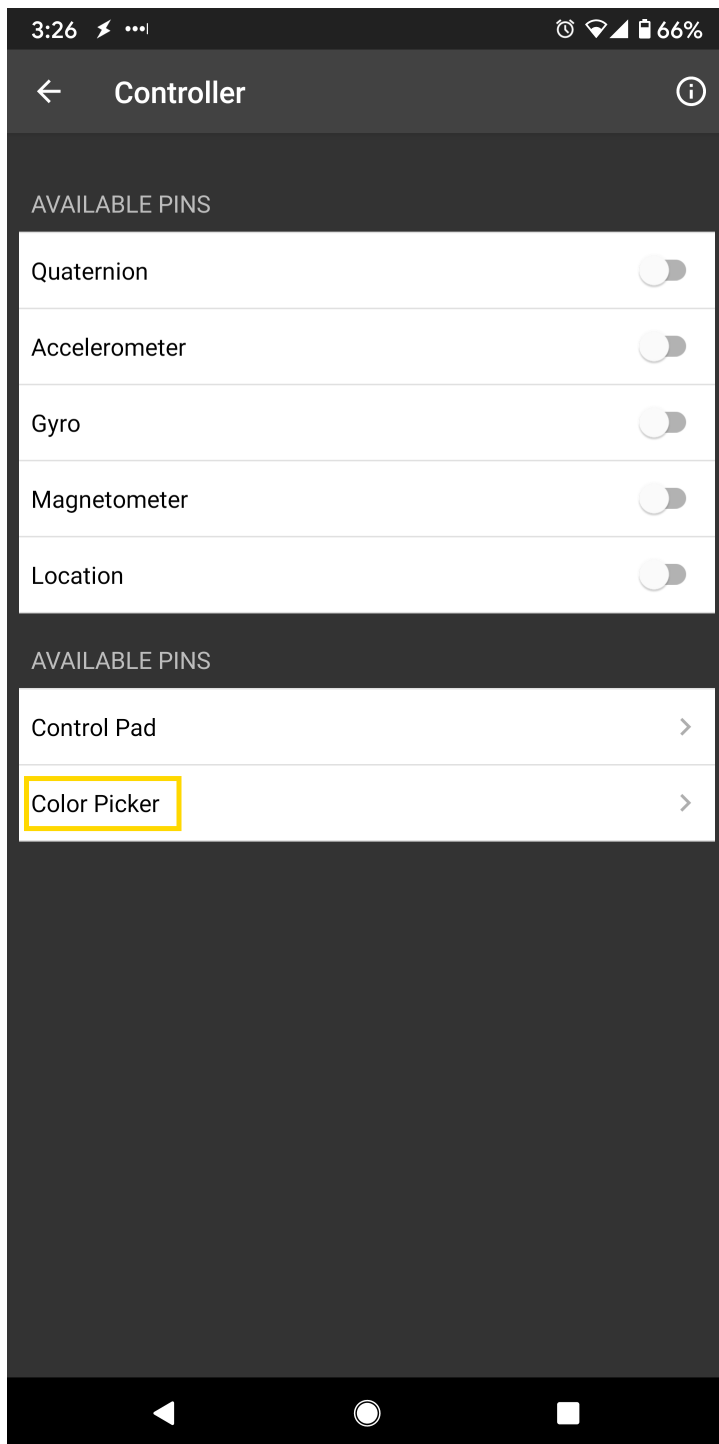

Using the color selection wheel, saturation, and brightness sliders, choose a desired color and click select to send the RGB values to the board. You should see the RGB LED change to the matching color.

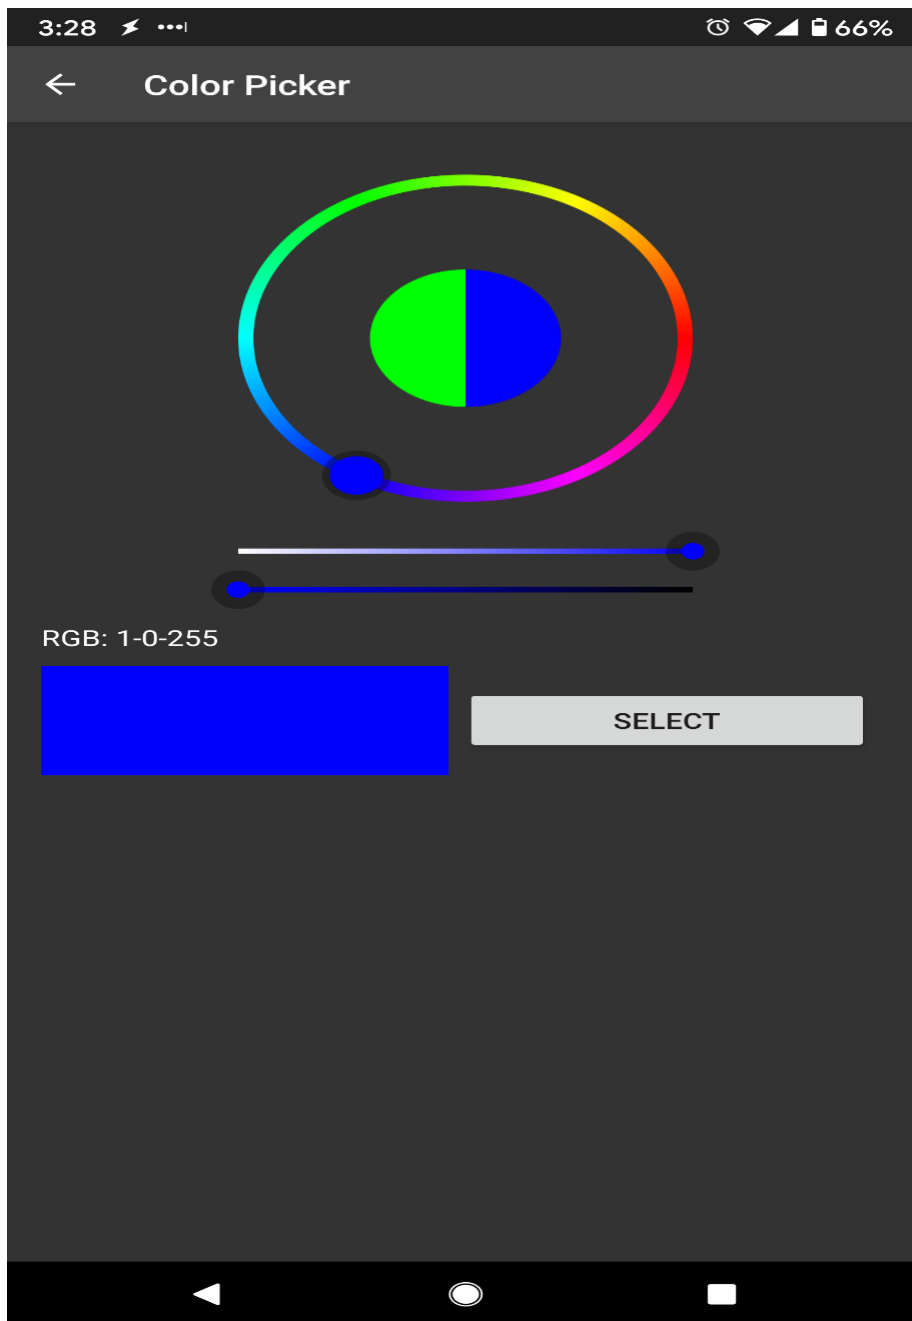

Code Reference

The RGB values are sent as three consecutive bytes prefixed by “!C” characters. The “!” exclamation mark is used to indicate that the following data is a command, and the “C” character is used to indicate that the data is RGB values. The received UART message is checked in the callback function for “!C” first, otherwise it is treated as a regular message and printed to the serial terminal.

BLE - HID Gamepad

Materials

- AmebaD [RTL8722DM/RTL8722CSM/RTL8722DM MINI] x 1
- BLE capable host device [Windows / Linux / MacOS / Android]


Example

Introduction

In this example, the RTL8722 board emulates a HID gamepad connected using BLE.

Procedure

Open the example, “Files” -> “Examples” -> “AmebaBLE” -> BLEHIDGamepad.

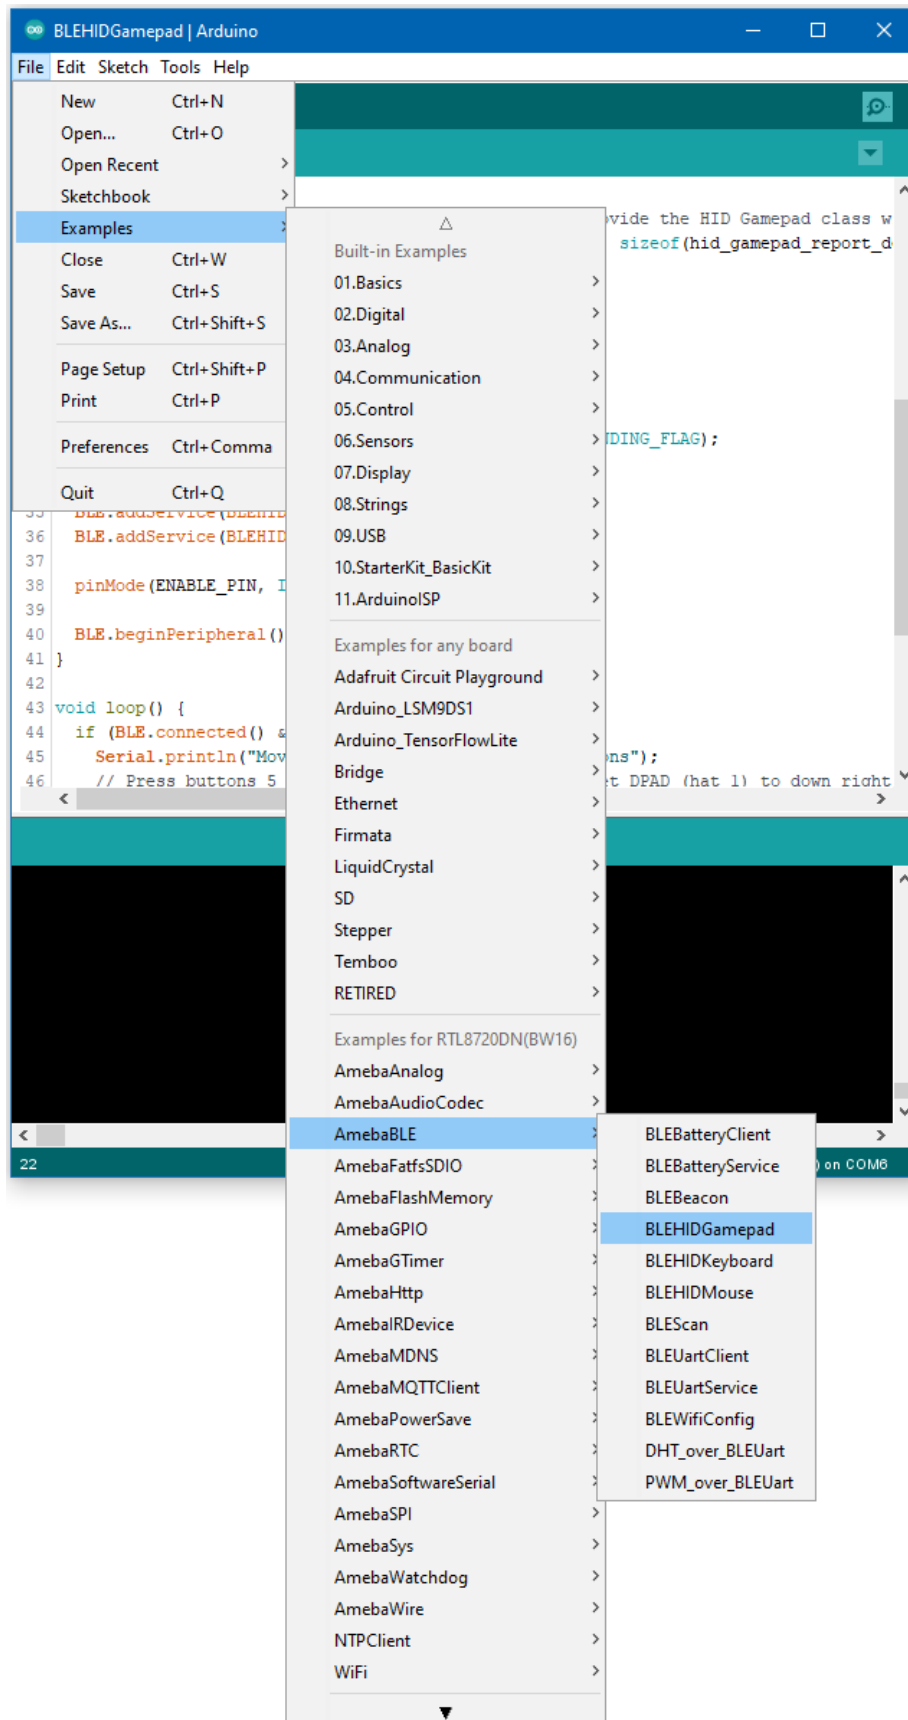


Upload the code and press the reset button once the upload is finished.


Immediately after reset, the board will begin BLE advertising as “AMEBA_BLE_HID” . On your host device, go to the Bluetooth settings menu, scan, and connect to the board.

You should ensure that the connection process is completed before proceeding.

On Windows, ensure that any driver installation is finished, and the board shows up in the Bluetooth menu under the “Mouse, keyboard & pen” category.

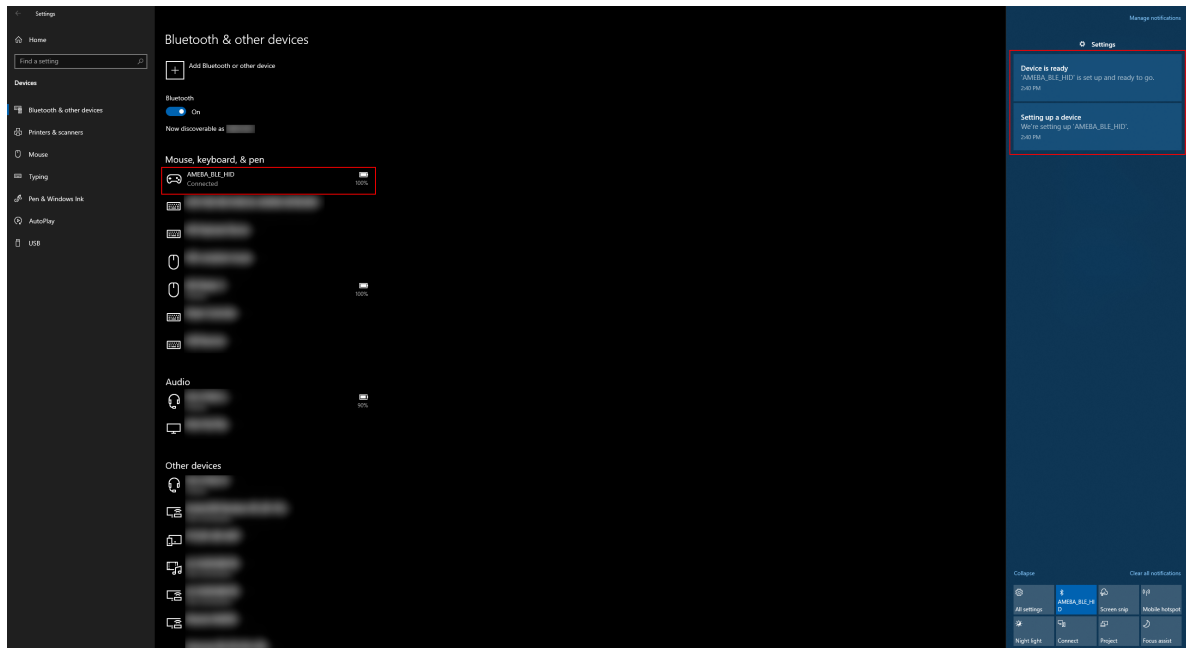


On Android, ensure that “Input device” is enabled for the board.

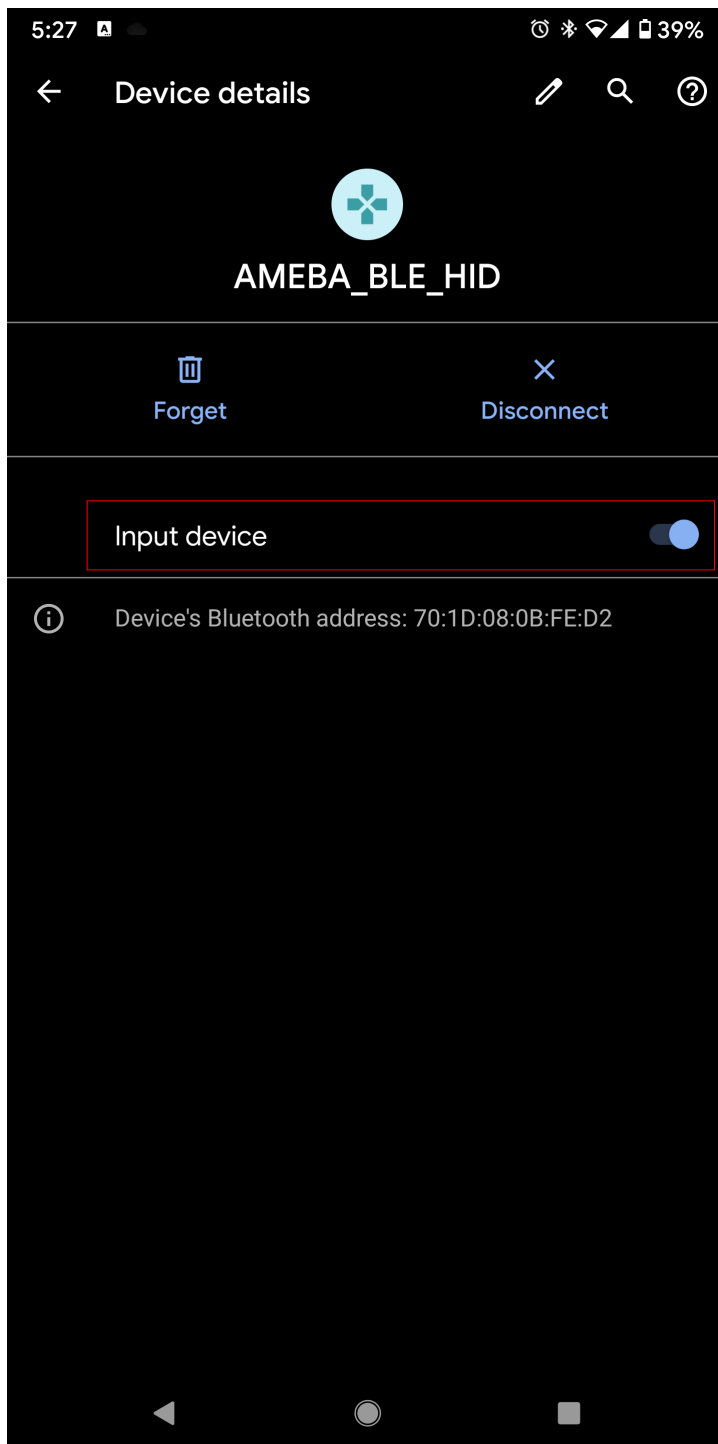



After the Bluetooth connection process is completed, the board is ready to send gamepad input to the host device. Connect digital pin 8 to 3.3V to start sending input, and connect to GND to stop.

To view the input, open a browser window and go to [Gamepad Tester](#). The connected gamepad device should show up here, and some of the buttons and axes should show changing values.

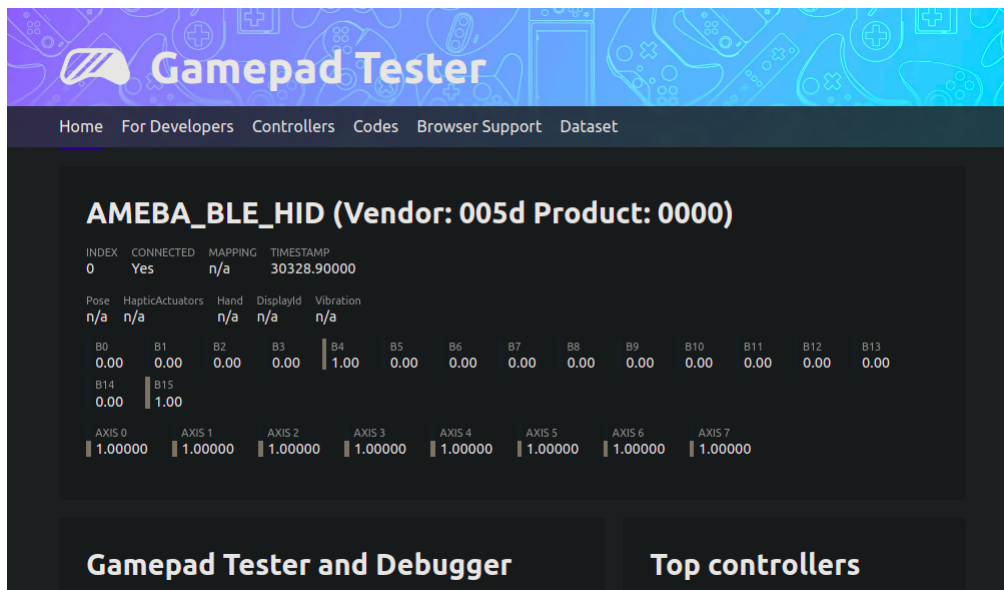


On Windows, gamepad input can also be viewed by going to “Control Panel” -> “Devices and Printers” -> “AMEBA_BLE_HID” -> “Game Controller Settings” -> “Properties”. The buttons and axes should also show changing values here.

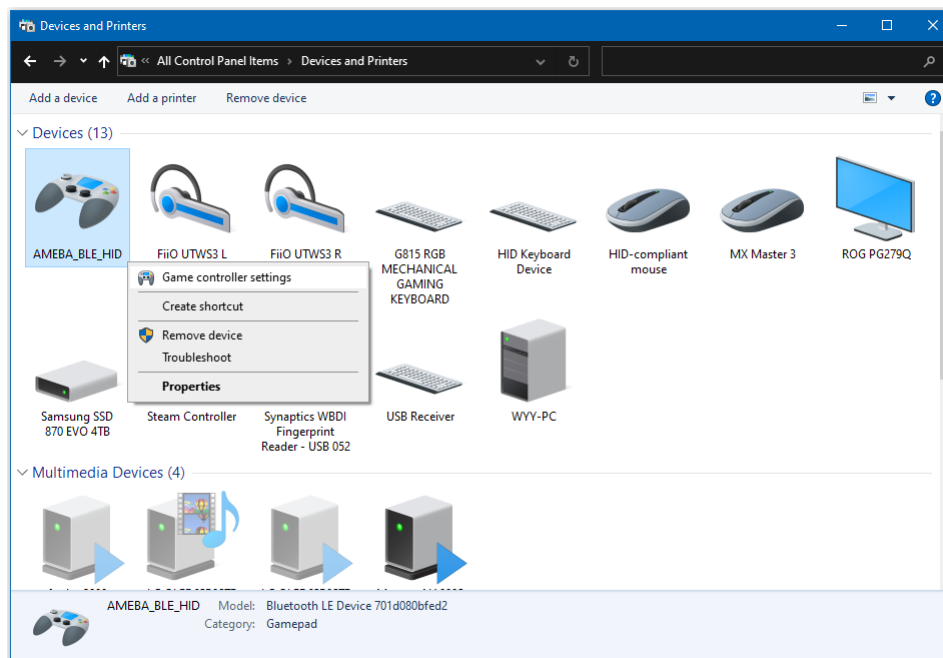

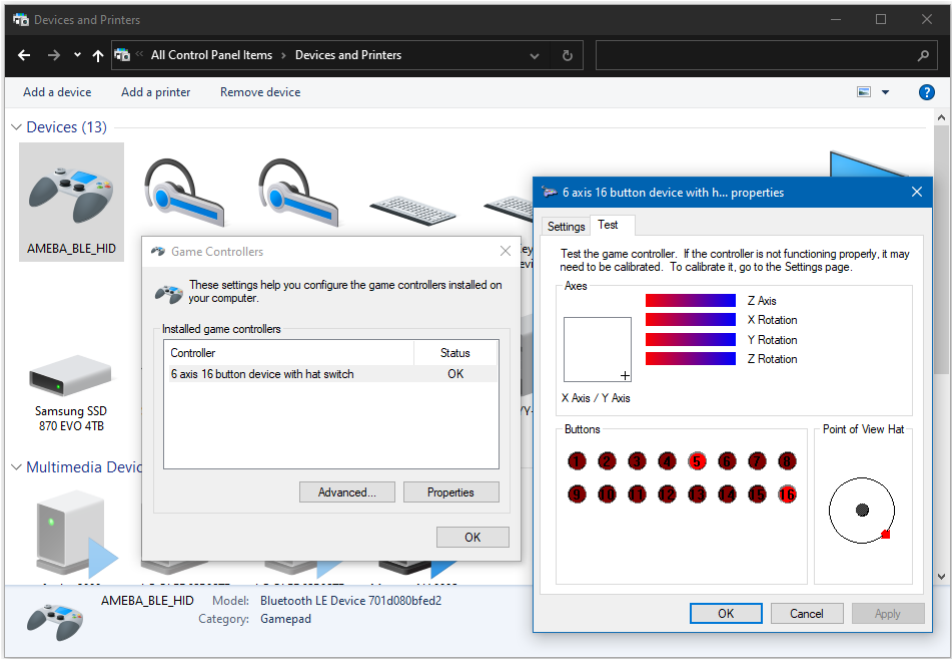

On Android, gamepad testing apps such as [Andriod Gamepad Tester](#) can also be used to view the gamepad input.

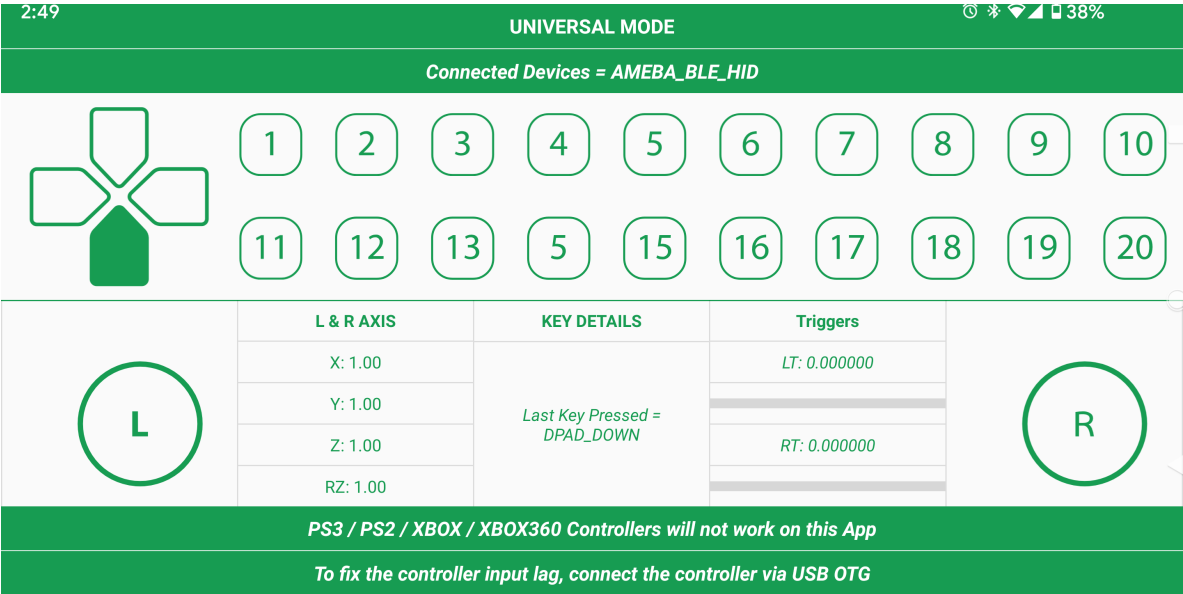

Code Reference

By default, the board emulates a gamepad with an 8-direction hat switch (d-pad), 6 analog axes and 16 buttons. How the inputs are interpreted is dependent on the host device, and the button ordering may differ between devices. Also, some axes or buttons may be disabled or missing on certain host devices.

BLE - HID Keyboard

Materials

- AmebaD [RTL8722DM/RTL8722CSM/RTL8722DM MINI] x 1
- BLE capable host device [Windows / Linux / MacOS / Android]


Example

Introduction

In this example, the RTL8722 board emulates a HID keyboard connected using BLE.

Procedure

Open the example, “Files” -> “Examples” -> “AmebaBLE” -> BLEHIDKeyboard.

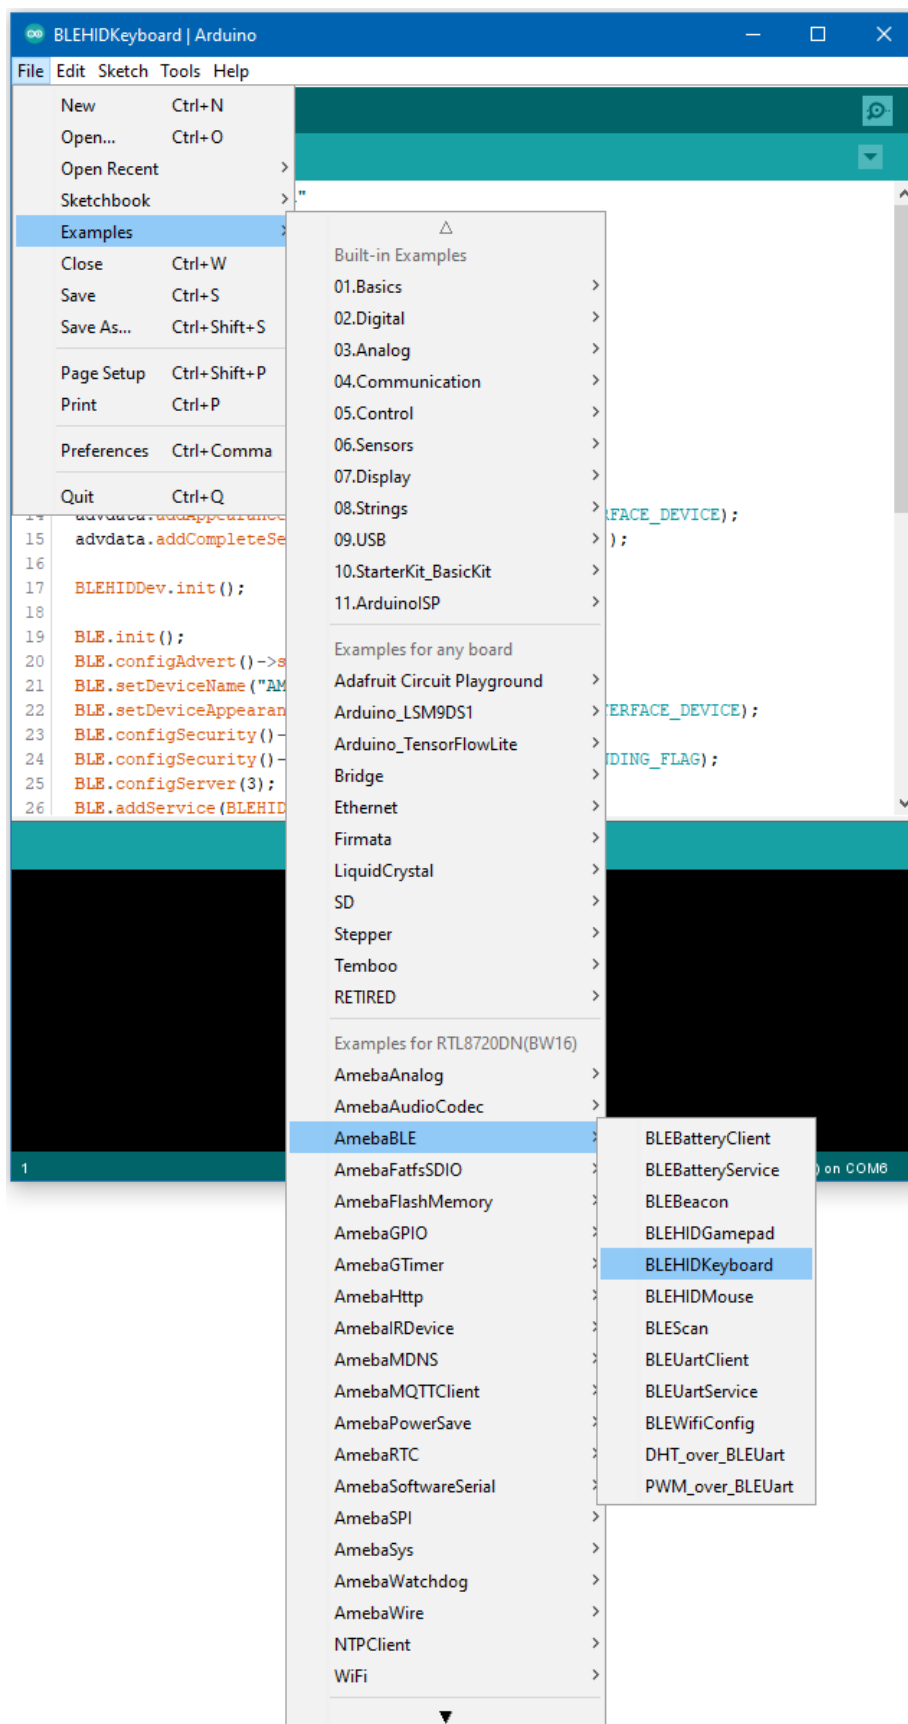


Upload the code and press the reset button once the upload is finished.


Immediately after reset, the board will begin BLE advertising as “AMEBA_BLE_HID” . On your host device, go to the Bluetooth settings menu, scan, and connect to the board.

You should ensure that the connection process is completed before proceeding.

On Windows, ensure that any driver installation is finished, and the board shows up in the Bluetooth menu under the “Mouse, keyboard & pen” category.

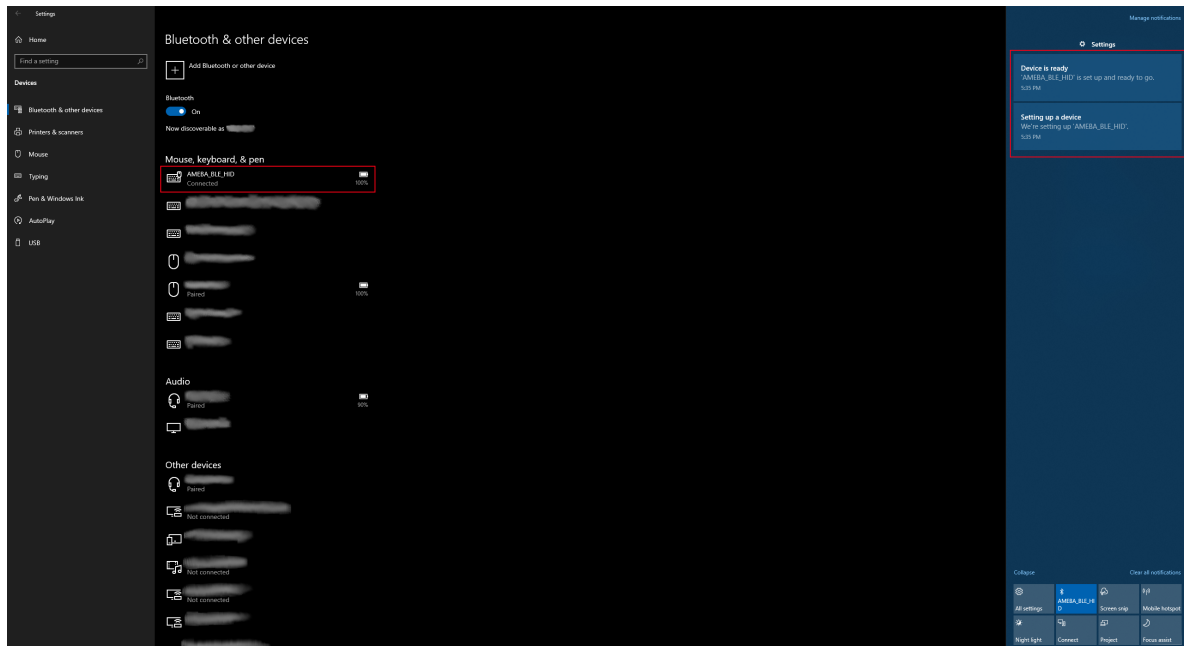


On Android, ensure that “Input device” is enabled for the board.

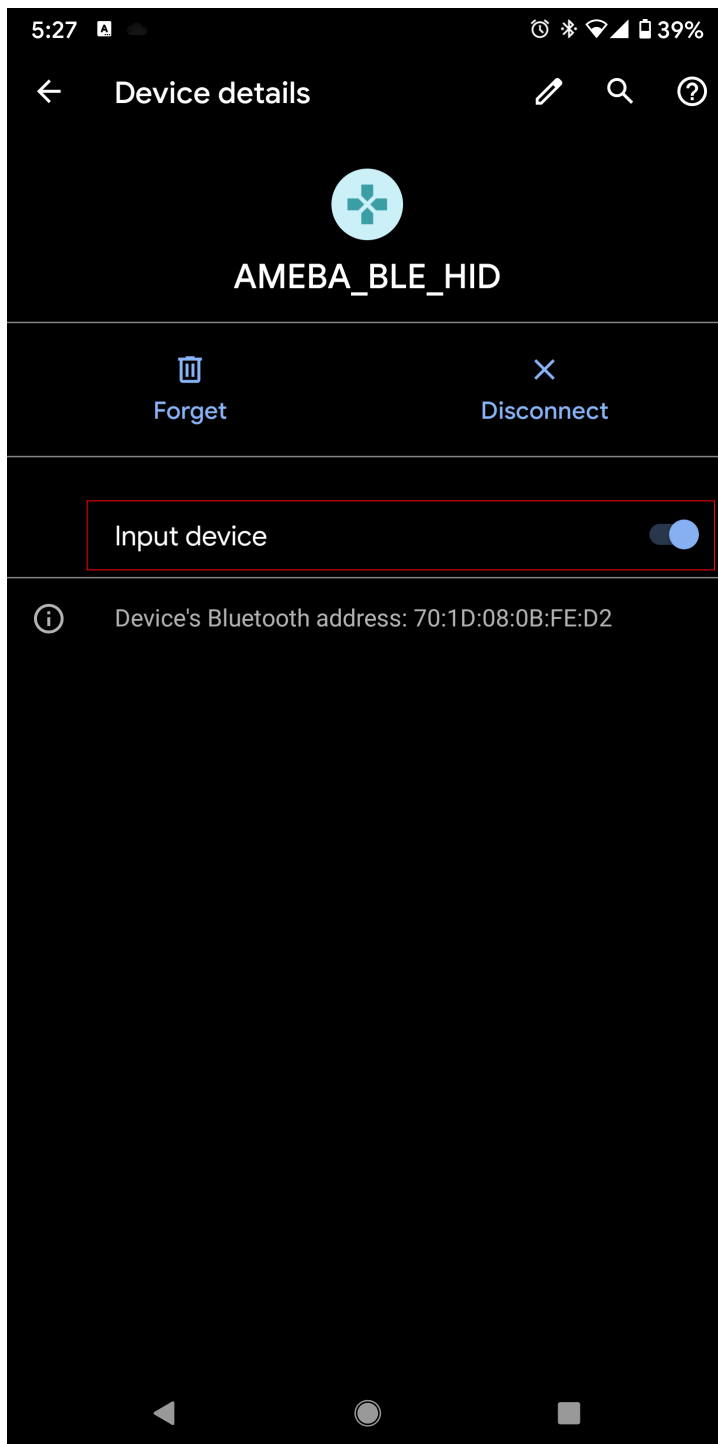

After the Bluetooth connection process is completed, the board is ready to send mouse input to the host device. Connect digital pin 8 to 3.3V to start sending input, and connect to GND to stop.

You should see the text "Hello World !" typed out and deleted repeatedly.

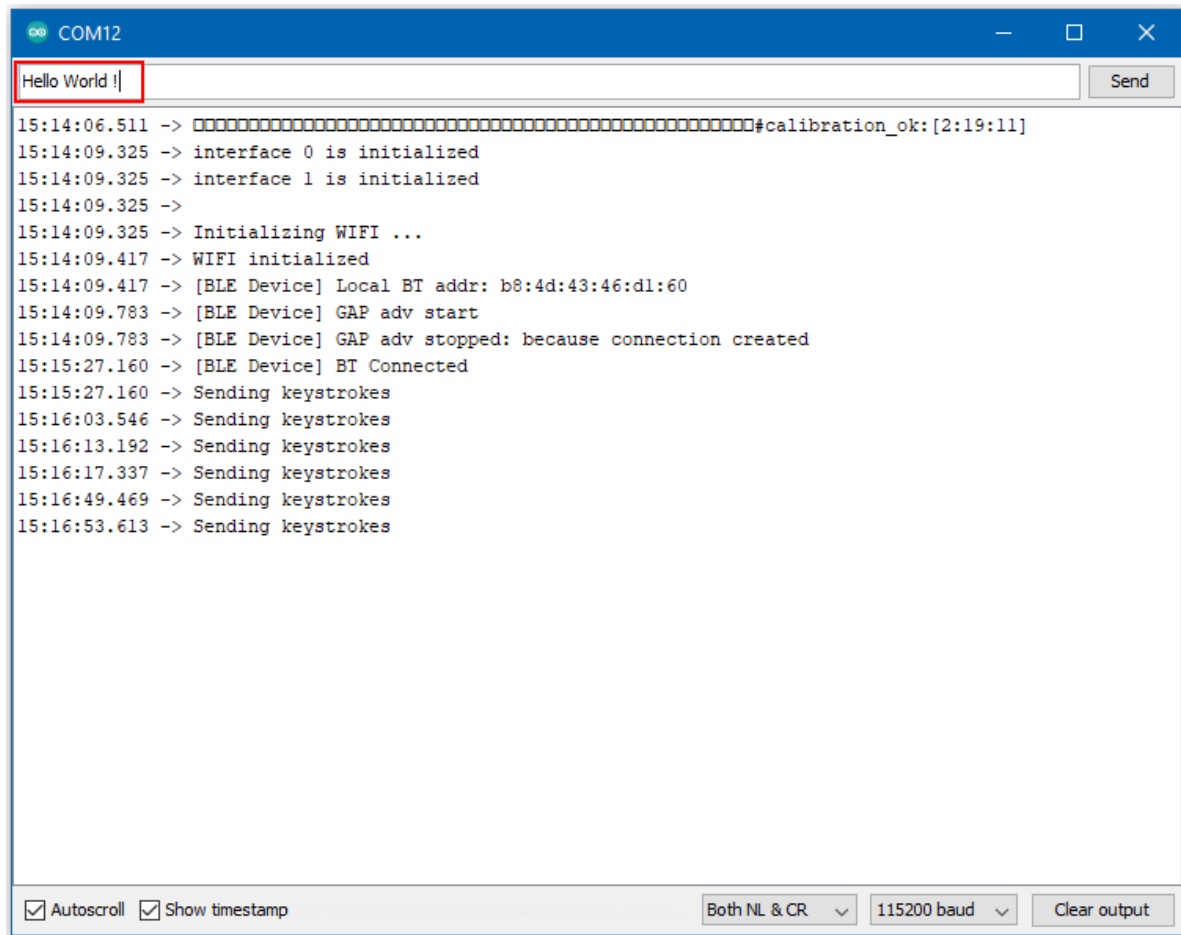

```
COM12
Hello World !
Send

15:14:06.511 -> #####calibration_ok:[2:19:11]
15:14:09.325 -> interface 0 is initialized
15:14:09.325 -> interface 1 is initialized
15:14:09.325 ->
15:14:09.325 -> Initializing WIFI ...
15:14:09.417 -> WIFI initialized
15:14:09.417 -> [BLE Device] Local BT addr: b8:4d:43:46:d1:60
15:14:09.783 -> [BLE Device] GAP adv start
15:14:09.783 -> [BLE Device] GAP adv stopped: because connection created
15:15:27.160 -> [BLE Device] BT Connected
15:15:27.160 -> Sending keystrokes
15:16:03.546 -> Sending keystrokes
15:16:13.192 -> Sending keystrokes
15:16:17.337 -> Sending keystrokes
15:16:49.469 -> Sending keystrokes
15:16:53.613 -> Sending keystrokes

☒ Autoscroll ☒ Show timestamp
Both NL & CR 115200 baud Clear output
```

BLE - HID Mouse

Materials

- AmebaD [RTL8722DM/RTL8722CSM/RTL8722DM MINI] x 1
- BLE capable host device [Windows / Linux / MacOS / Android]


Example

Introduction

In this example, the RTL8722 board emulates a HID mouse connected using BLE.

Procedure

Open the example, “Files” -> “Examples” -> “AmebaBLE” -> “BLEHIDMouse” .

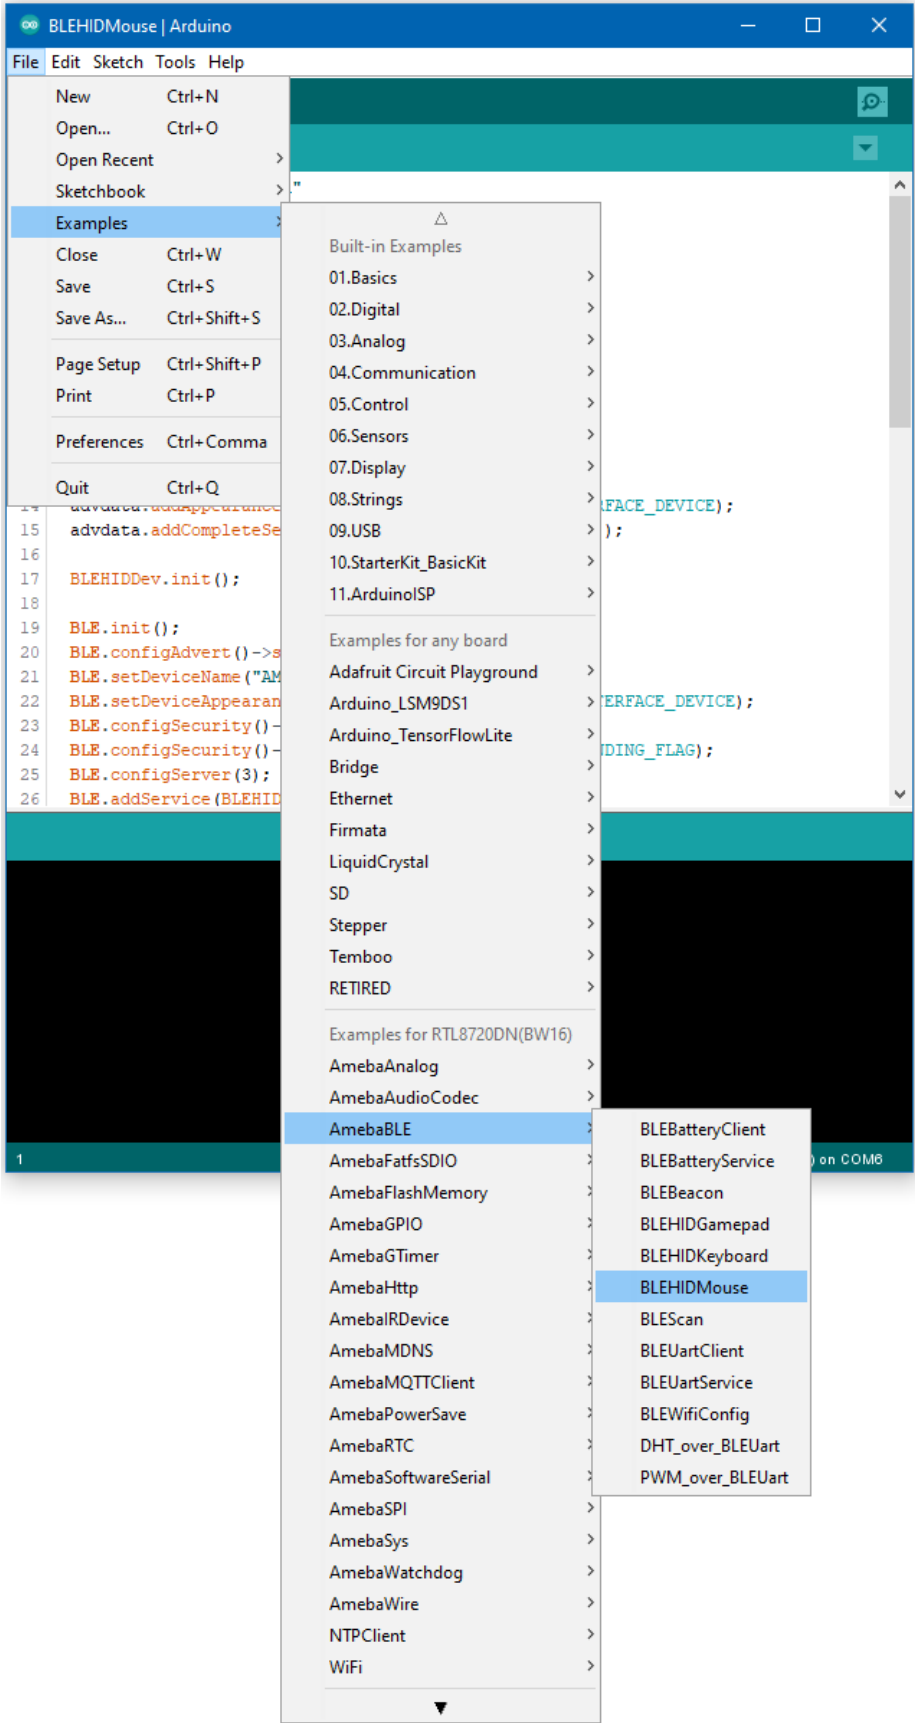


Upload the code and press the reset button once the upload is finished.


Immediately after reset, the board will begin BLE advertising as “AMEBA_BLE_HID” . On your host device, go to the Bluetooth settings menu, scan, and connect to the board.

You should ensure that the connection process is completed before proceeding.

On Windows, ensure that any driver installation is finished, and the board shows up in the Bluetooth menu under the “Mouse, keyboard & pen” category.

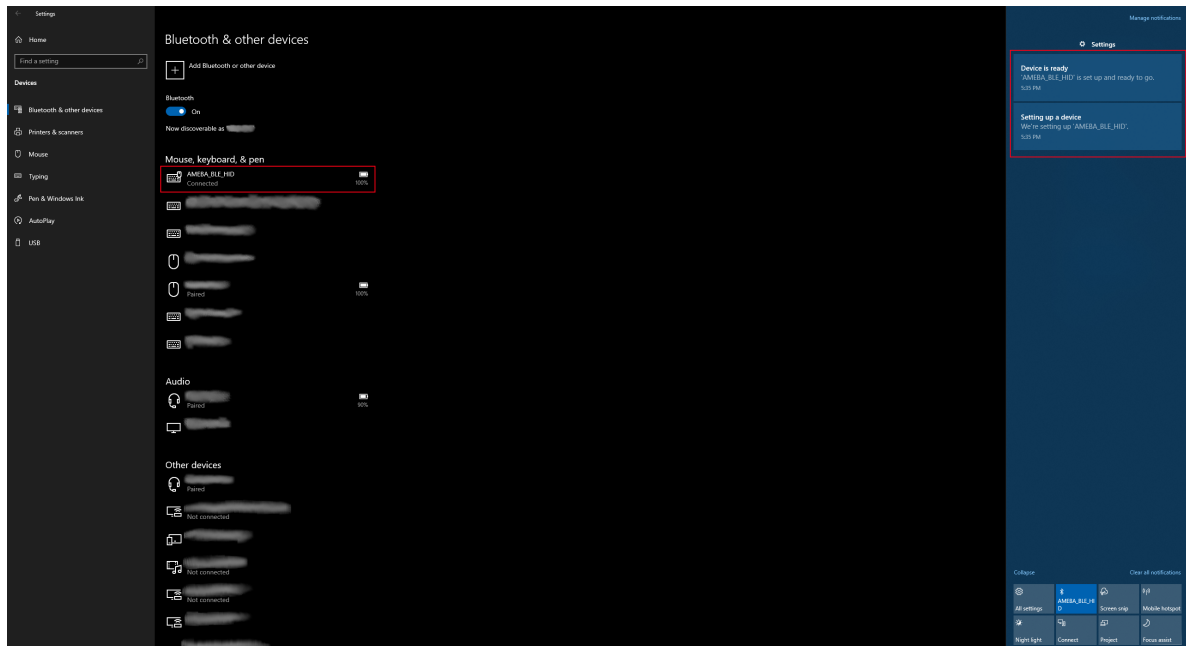

On Android, ensure that “Input device” is enabled for the board.

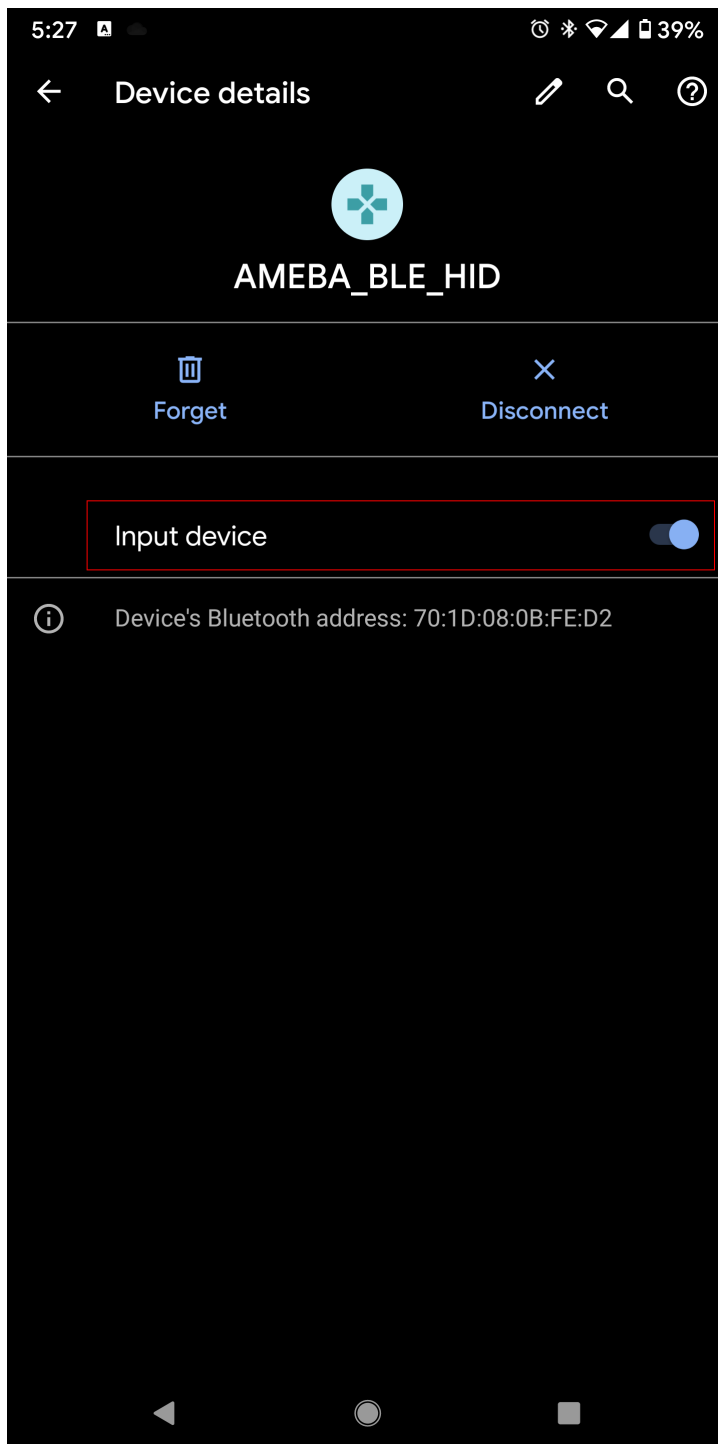

After the Bluetooth connection process is completed, the board is ready to send mouse input to the host device. Connect digital pin 8 to 3.3V to start sending input, and connect to GND to stop.

You should see the mouse cursor move around four points in a square, performing right and left clicks, and scrolling up and down.

Code Reference

How the mouse input is interpreted is dependent on the host system. Some systems, such as mobile operating systems, may not support all mouse button input functions.

Approximate UDP Receive Delay

Materials


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Windows computer connected to same network

Example


This example uses Ameba to receive UDP packets from a computer and calculates the UDP receive delay.

Ameba Preparation

Open the “CalculateUdpReceiveDelay” example in “File” -> “Examples” -> “AmebaWiFi” -> “UDP_Calculation” -> “CalculateUdpReceiveDelay” .

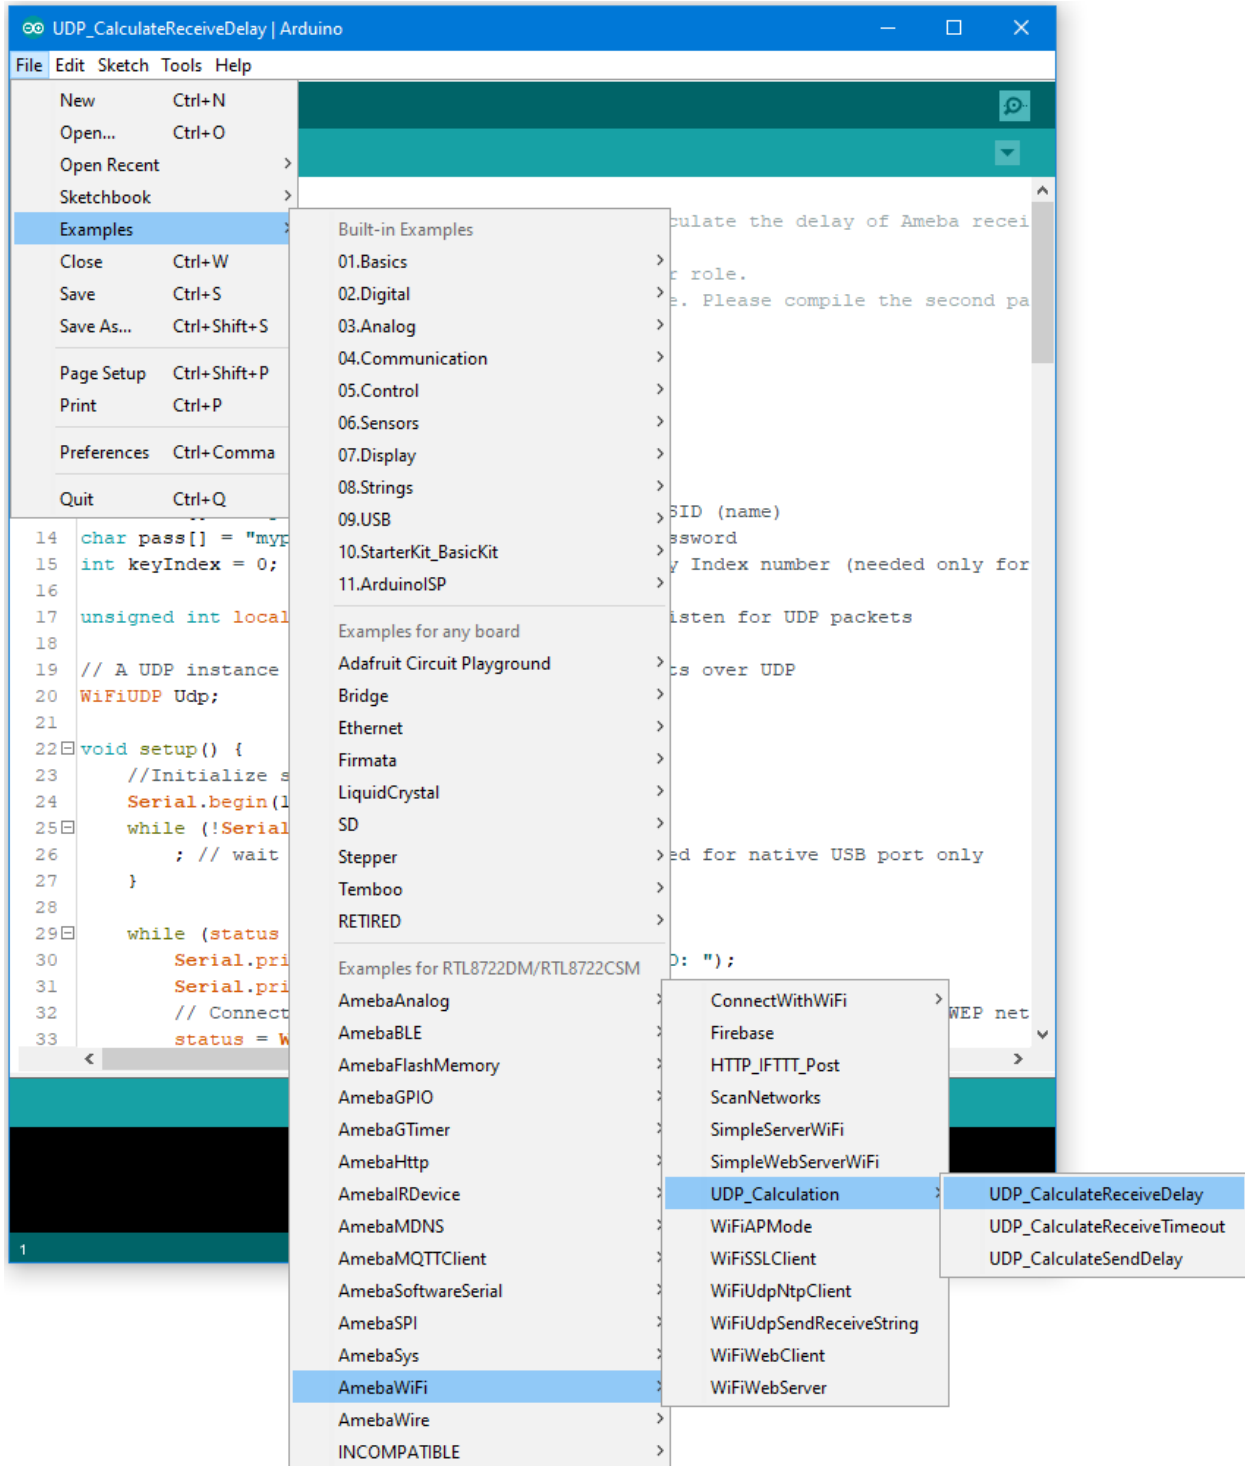

In the sample code, modify the highlighted section to enter the information required (ssid, password, key index) to connect to your WiFi network.

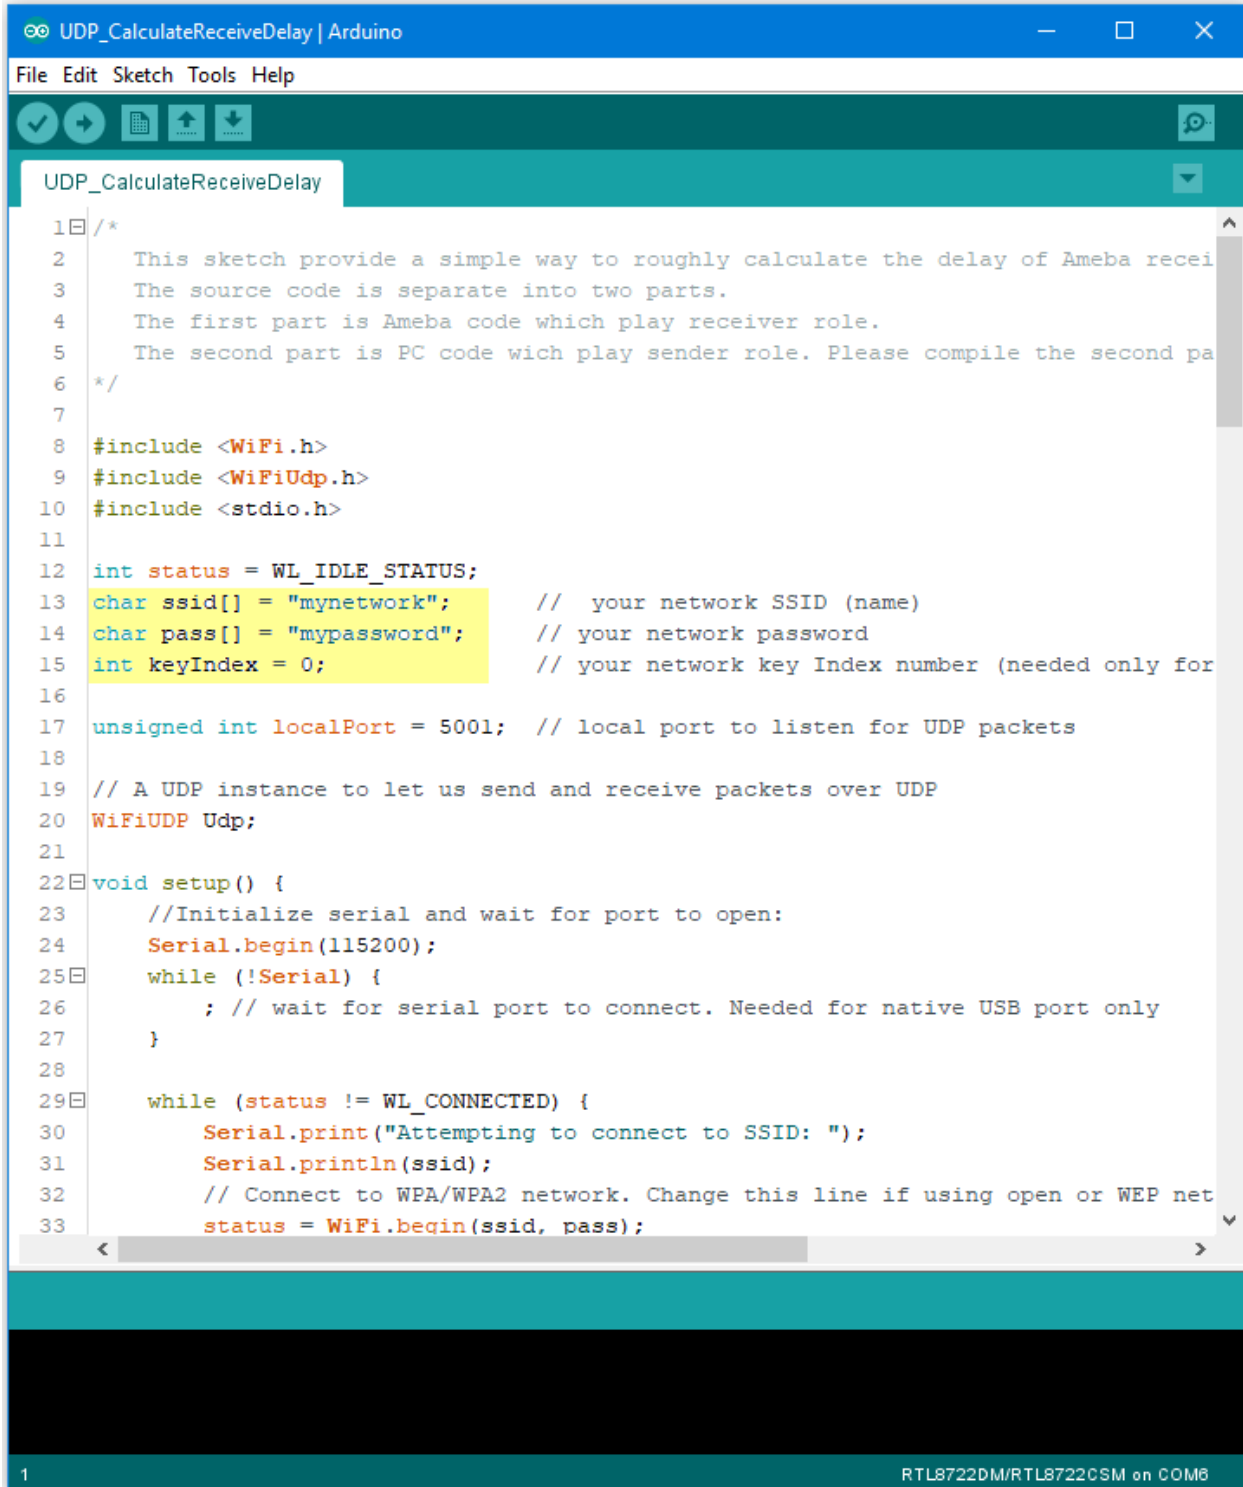

```


1  /*
2   This sketch provide a simple way to roughly calculate the delay of Ameba recei
3   The source code is separate into two parts.
4   The first part is Ameba code which play receiver role.
5   The second part is PC code wich play sender role. Please compile the second pa
6  */
7
8  #include <WiFi.h>
9  #include <WiFiUdp.h>
10 #include <stdio.h>
11
12 int status = WL_IDLE_STATUS;
13 char ssid[] = "mynetwork"; // your network SSID (name)
14 char pass[] = "mypassword"; // your network password
15 int keyIndex = 0; // your network key Index number (needed only for
16
17 unsigned int localPort = 5001; // local port to listen for UDP packets
18
19 // A UDP instance to let us send and receive packets over UDP
20 WiFiUDP Udp;
21
22 void setup() {
23     //Initialize serial and wait for port to open:
24     Serial.begin(115200);
25     while (!Serial) {
26         ; // wait for serial port to connect. Needed for native USB port only
27     }
28
29     while (status != WL_CONNECTED) {
30         Serial.print("Attempting to connect to SSID: ");
31         Serial.println(ssid);
32         // Connect to WPA/WPA2 network. Change this line if using open or WEP net
33         status = WiFi.begin(ssid, pass);

```

1

RTL8722DM/RTL8722CSM on COM8

Upload the code and press the reset button on Ameba once the upload is finished. Open the serial monitor in Arduino IDE and take note of the IP address assigned to Ameba.

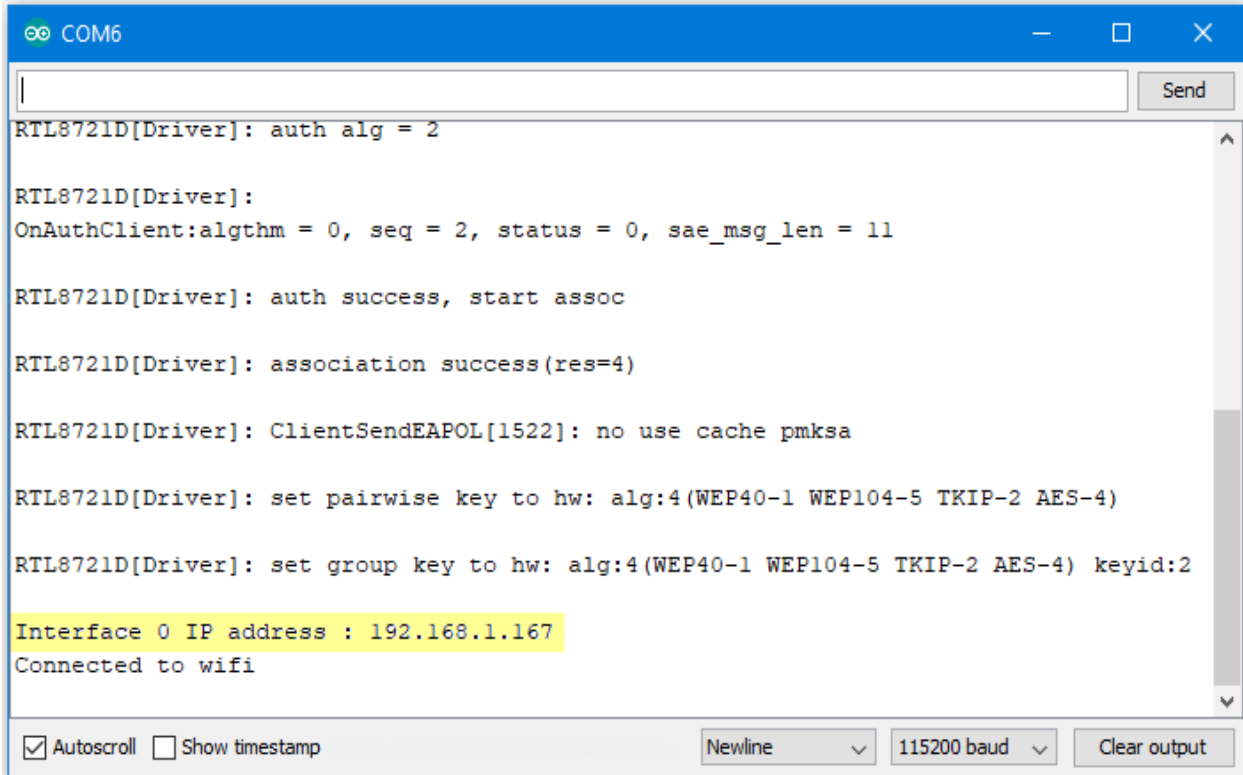

```
COM6
|
Send
RTL8721D[Driver]: auth alg = 2
RTL8721D[Driver]:
OnAuthClient:alghm = 0, seq = 2, status = 0, sae_msg_len = 11
RTL8721D[Driver]: auth success, start assoc
RTL8721D[Driver]: association success(res=4)
RTL8721D[Driver]: ClientSendEAPOL[1522]: no use cache pmksa
RTL8721D[Driver]: set pairwise key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4)
RTL8721D[Driver]: set group key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4) keyid:2
Interface 0 IP address : 192.168.1.167
Connected to wifi
☒ Autoscroll ☐ Show timestamp Newline 115200 baud Clear output
```

Computer Preparation

On the computer, Cygwin will be required to compile the code to send the UDP packets. Cygwin can be downloaded from <https://www.cygwin.com/>

Follow the instructions there to install it. Next, from the “CalculateUdpReceiveDelay” Arduino example, copy the code from the bottom between “#if 0” and “#endif” , into a new text file, change the hostname to the IP address assigned to Ameba, and rename the file to “UdpReceiveDelay.cpp” .

```

1  #include <stdio.h>
2  #include <stdlib.h>
3  #include <string.h>
4  #include <sys/socket.h>
5  #include <netinet/in.h>
6  #include <arpa/inet.h>
7  #include <sys/time.h>
8  #include <unistd.h>
9
10 #define BUFSIZE 1024
11
12 char *hostname = "172.25.24.243";
13 int portno = 5001;
14
15 long base_current_time = 0;
16 long get_current_time_with_ms (void)
17 {
18     struct timeval tv;
19
20     gettimeofday(&tv, NULL);
21
22     long millisecondsSinceEpoch =
23         (long)(tv.tv_sec) * 1000 +
24         (long)(tv.tv_usec) / 1000;
25
26     if (base_current_time == 0) {
27         base_current_time = millisecondsSinceEpoch;
28         return 0;
29     } else {
30         return millisecondsSinceEpoch - base_current_time;
31     }
32 }

```

length: 1,666 lines: 67 Ln: 12 Col: 1 Sel: 0|0 Windows (CR LF) UTF-8 INS

Next, open a Cygwin terminal, change the working directory to the location of “UdpReceiveDelay.cpp”, and use the command “g++ UdpReceiveDelay.cpp -o UdpDelay” to compile the code. A file named “UdpDelay.exe” will be created in the same directory.

Running the Example

Reset the Ameba, wait for the WiFi to connect, and check that the IP address remains the same. On the computer, run the UdpDelay.exe file, and the computer will begin to send packets to Ameba. Once 10000 packets have been received, Ameba will calculate the average delay and print out the result to the serial monitor. It may take up to a few minutes for 10000 packets to be sent.

```

COM6
Send

RTL8721D[Driver]: association success(res=4)

RTL8721D[Driver]: ClientSendEAPOL[1522]: no use cache pmksa

RTL8721D[Driver]: set pairwise key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4)

RTL8721D[Driver]: set group key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4) keyid:2

Interface 0 IP address : 192.168.1.167
Connected to wifi
data count: 10000      average delay: 95.47 ms
data count: 20000     average delay: 198.96 ms
data count: 30000     average delay: 272.98 ms

☒ Autoscroll ☐ Show timestamp Newline 115200 baud Clear output

```

Approximate UDP Receive Timeout

Materials


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Windows computer connected to same network

Example


This example uses Ameba to receive UDP packets from a computer and calculates the allowed UDP receive timeout setting.

Ameba Preparation

Open the “CalculateUdpReceiveTimeout” example in “File” -> “Examples” -> “AmebaWiFi” -> “UDP_Calculation ” -> “CalculateUdpReceiveTimeout” .

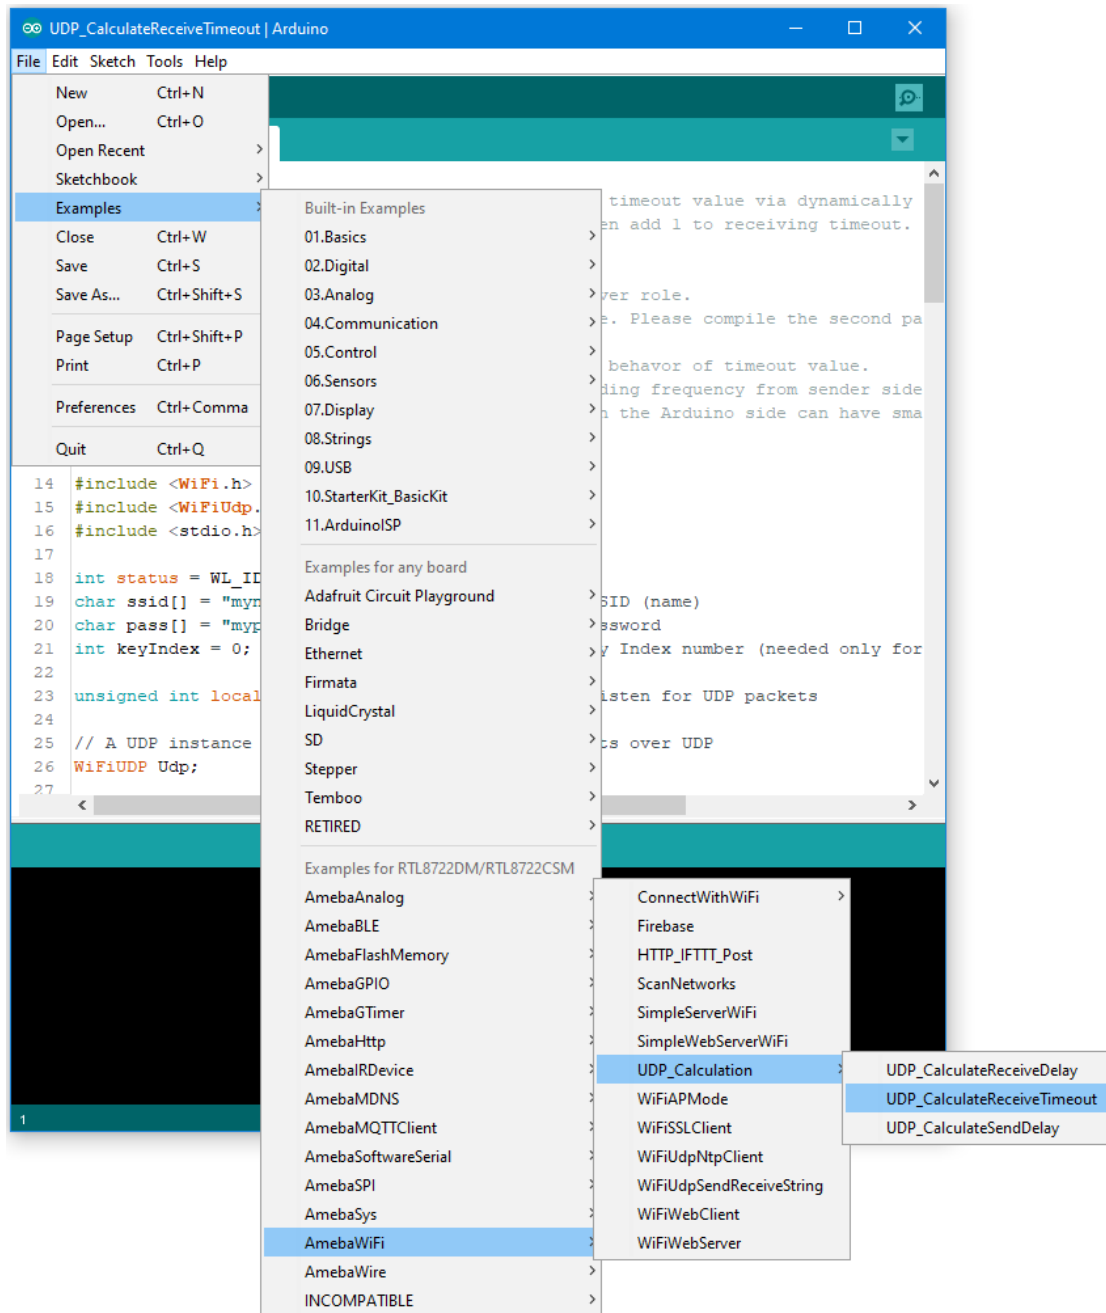

In the sample code, modify the highlighted section to enter the information required (ssid, password, key index) to connect to your WiFi network.

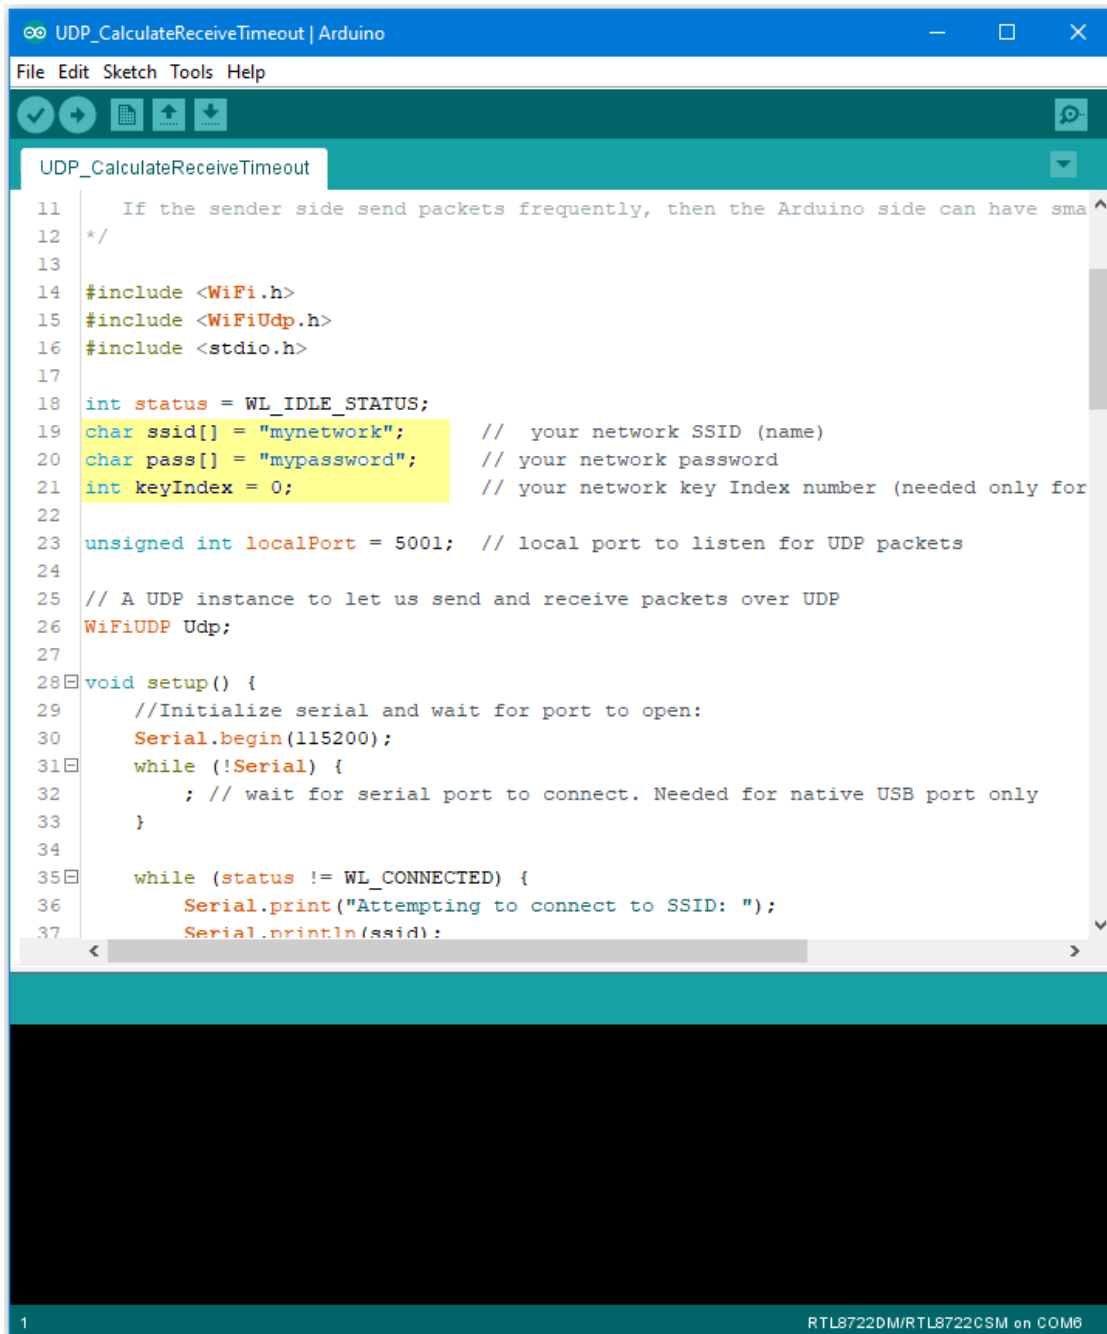


```

11  // If the sender side send packets frequently, then the Arduino side can have sma
12  */
13
14  #include <WiFi.h>
15  #include <WiFiUdp.h>
16  #include <stdio.h>
17
18  int status = WL_IDLE_STATUS;
19  char ssid[] = "mynetwork"; // your network SSID (name)
20  char pass[] = "mypassword"; // your network password
21  int keyIndex = 0; // your network key Index number (needed only for
22
23  unsigned int localPort = 5001; // local port to listen for UDP packets
24
25  // A UDP instance to let us send and receive packets over UDP
26  WiFiUDP Udp;
27
28  void setup() {
29    //Initialize serial and wait for port to open:
30    Serial.begin(115200);
31    while (!Serial) {
32      ; // wait for serial port to connect. Needed for native USB port only
33    }
34
35    while (status != WL_CONNECTED) {
36      Serial.print("Attempting to connect to SSID: ");
37      Serial.println(ssid);

```

Upload the code and press the reset button on Ameba once the upload is finished.

Open the serial monitor in Arduino IDE and take note of the IP address assigned to Ameba.

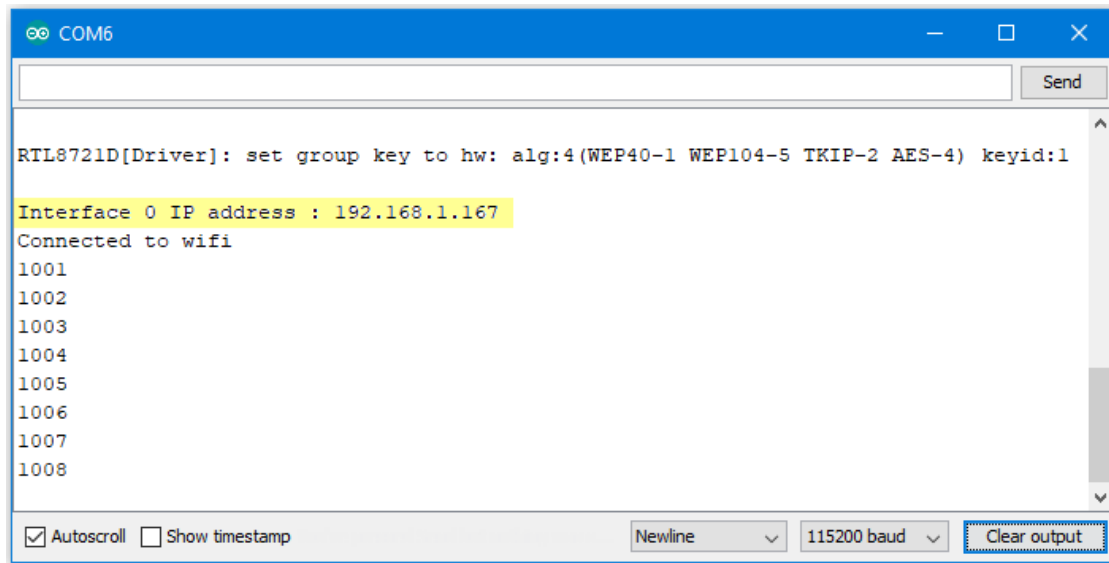

```
COM6

RTL8721D[Driver]: set group key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4) keyid:1
Interface 0 IP address : 192.168.1.167
Connected to wifi
1001
1002
1003
1004
1005
1006
1007
1008

☒ Autoscroll ☐ Show timestamp Newline 115200 baud Clear output
```

Computer Preparation

On the computer, Cygwin will be required to compile the code to send the UDP packets. Cygwin can be downloaded from <https://www.cygwin.com/>

Follow the instructions there to install it. Next, from the “CalculateUdpReceiveTimeout” Arduino example, copy the code from the bottom between “#if 0” and “#endif” , into a new text file, change the hostname to the IP address assigned to Ameba, and rename the file to “UdpReceiveTimeout.cpp” .

```

1  #include <stdio.h>
2  #include <stdlib.h>
3  #include <string.h>
4  #include <sys/socket.h>
5  #include <netinet/in.h>
6  #include <arpa/inet.h>
7  #include <unistd.h>
8
9  #define BUFSIZE 16
10
11 char *hostname = "192.168.1.213";
12 int portno = 5001;
13
14 int main(int argc, char **argv) {
15     int sockfd, n;
16     struct sockaddr_in serveraddr;
17     int serverlen = sizeof(serveraddr);
18     char buf[BUFSIZE];
19     int counter = 0;
20
21     /* socket: create the socket */
22     sockfd = socket(AF_INET, SOCK_DGRAM, 0);
23     if (sockfd < 0) {
24         printf("ERROR opening socket\r\n");
25         return -1;
26     }
27
28     /* build the server's Internet address */
29     memset(&serveraddr, 0, sizeof(serveraddr));
30     serveraddr.sin_family = AF_INET;
31     serveraddr.sin_addr.s_addr = inet_addr(hostname);
32     serveraddr.sin_port = htons(portno);

```

length: 1,246 lines: 49 Ln: 11 Col: 5 Sel: 0|0 Windows (CR LF) UTF-8 INS

Next, open a Cygwin terminal, change the working directory to the location of “UdpReceiveTimeout.cpp”, and use the command “g++ UdpReceiveTimeout.cpp -o UdpTimeout” to compile the code. A file named “UdpTimeout.exe” will be created in the same directory.

Running the Example

Reset the Ameba, wait for the WiFi to connect, and check that the IP address remains the same. On the computer, run the UdpTimeout.exe file, and the computer will begin to send packets continuously to Ameba.

The timeout value is set to 1000ms initially. For each packet received successfully, Ameba decreases the timeout value. The next packet must be received within the timeout period, otherwise Ameba registers a failed packet and increases the timeout value. Open the serial monitor and observe the timeout value converge to a minimum value.

Approximate UDP Sending Delay

Materials


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Windows computer connected to same network

Example

This example uses Ameba to send UDP packets to a computer and calculates the UDP sending delay.


Ameba Preparation

Open the “CalculateUdpSendDelay” example in “File” -> “Examples” -> “AmebaWiFi” -> “UDP_Calculation” -> “CalculateUdpSendDelay”.

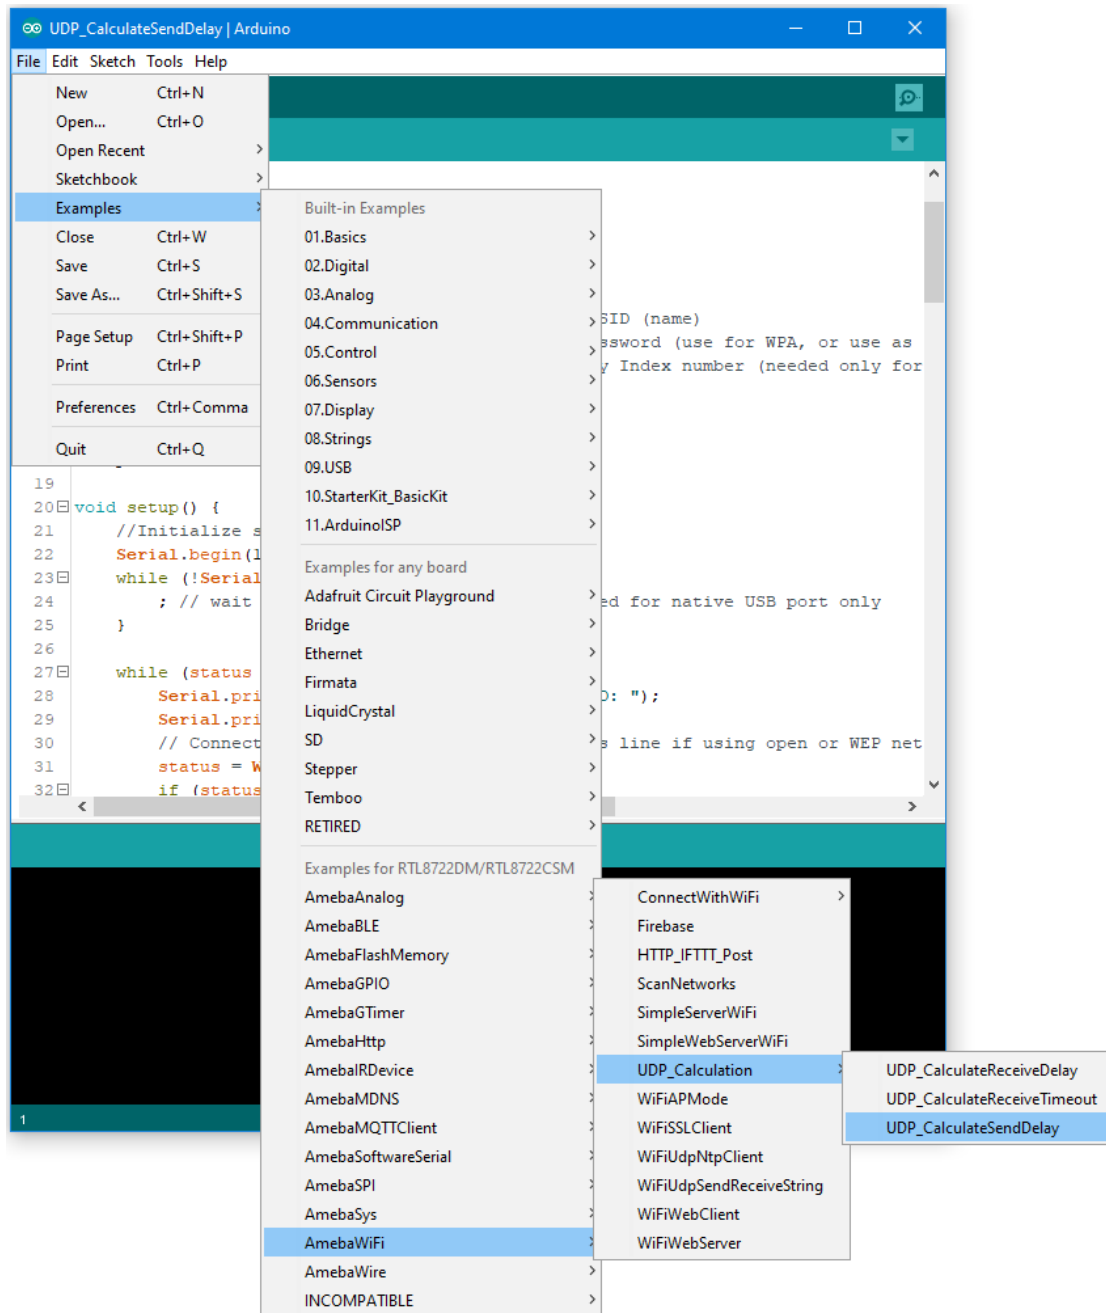

In the sample code, modify the highlighted section to enter the information required (ssid, password, key index) to connect to your WiFi network.

The server variable also needs to be changed to match the IP address of your computer. You can find the IP address using the “ipconfig” command in a terminal window.

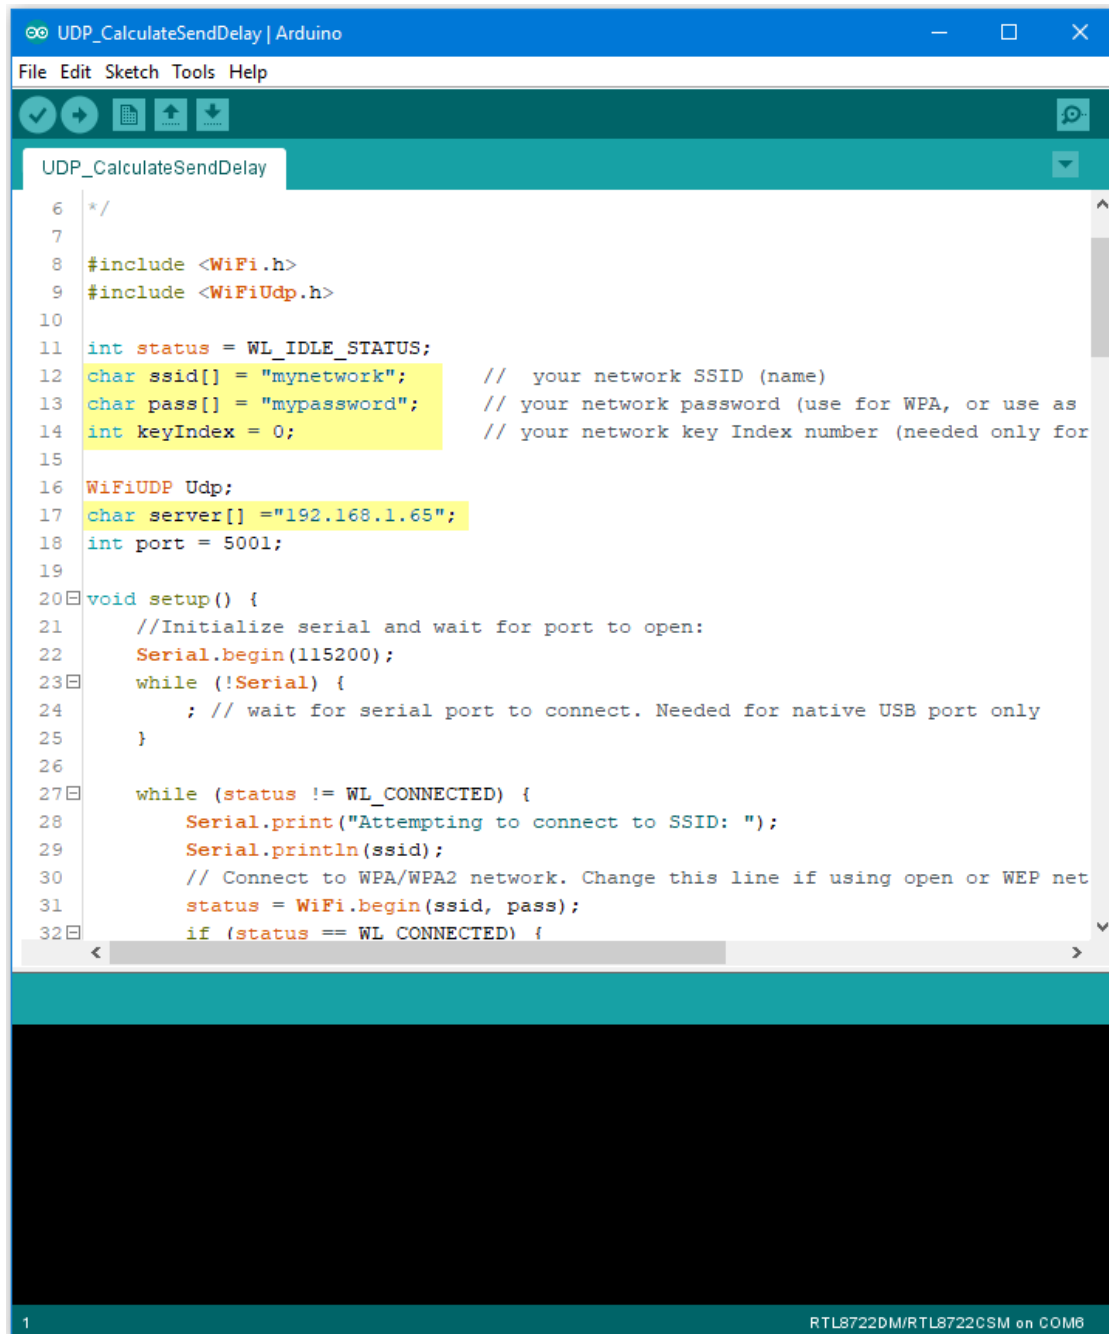

```

UDP_CalculateSendDelay | Arduino
File Edit Sketch Tools Help

UDP_CalculateSendDelay
6  */
7
8  #include <WiFi.h>
9  #include <WiFiUdp.h>
10
11 int status = WL_IDLE_STATUS;
12 char ssid[] = "mynetwork"; // your network SSID (name)
13 char pass[] = "mypassword"; // your network password (use for WPA, or use as
14 int keyIndex = 0; // your network key Index number (needed only for
15
16 WiFiUDP Udp;
17 char server[] = "192.168.1.65";
18 int port = 5001;
19
20 void setup() {
21     //Initialize serial and wait for port to open:
22     Serial.begin(115200);
23     while (!Serial) {
24         ; // wait for serial port to connect. Needed for native USB port only
25     }
26
27     while (status != WL_CONNECTED) {
28         Serial.print("Attempting to connect to SSID: ");
29         Serial.println(ssid);
30         // Connect to WPA/WPA2 network. Change this line if using open or WEP net
31         status = WiFi.begin(ssid, pass);
32         if (status == WL_CONNECTED) {

```

1 RTL8722DM/RTL8722CSM on COM8

Computer Preparation

On the computer, Cygwin will be required to compile the code to send the UDP packets. Cygwin can be downloaded from <https://www.cygwin.com/>

Follow the instructions there to install it. Next, from the “CalculateUdpSendDelay” Arduino example, copy the code from the bottom between “#if 0” and “#endif”, into a new text file and rename the file to “UdpSendDelay.cpp”.

```

1  #include <stdio.h>
2  #include <stdlib.h>
3  #include <string.h>
4  #include <sys/socket.h>
5  #include <arpa/inet.h>
6  #include <sys/time.h>
7
8  #define BUFSIZE 1024
9  #define PORT 5001
10
11 long get_current_time_with_ms (void)
12 {
13     struct timeval tv;
14
15     gettimeofday(&tv, NULL);
16
17     long millisecondsSinceEpoch =
18         (long) (tv.tv_sec) * 1000 +
19         (long) (tv.tv_usec) / 1000;
20
21     return millisecondsSinceEpoch;
22 }
23
24 long early_diff = 0;
25
26 long ameba_epoch = 0;
27 long sys_epoch = 0;
28
29 long datacount = 0;
30 long total_shift = 0;
31
32 void process_data(char *buf) {

```

length: 2,706 lines: 110 Ln: 110 Col: 2 Sel: 0|0 Windows (CR LF) UTF-8 INS

Next, open a Cygwin terminal, change the working directory to the location of “UdpSendDelay.cpp”, and use the command “g++ UdpSendDelay.cpp -o UdpDelay” to compile the code. A file named “UdpDelay.exe” will be created in the same directory.


Running the Example

First, on the computer, run the UdpDelay.exe file, and the computer will begin to listen for packets from Ameba.

Next, compile and upload the code from the Arduino IDE to Ameba and press the reset button when the upload is complete.

The Ameba will begin to send UDP packets to the computer. Once 10000 packets have been received, the computer will calculate the average delay and print out the result.

It will take some time for 10000 packets to be sent.

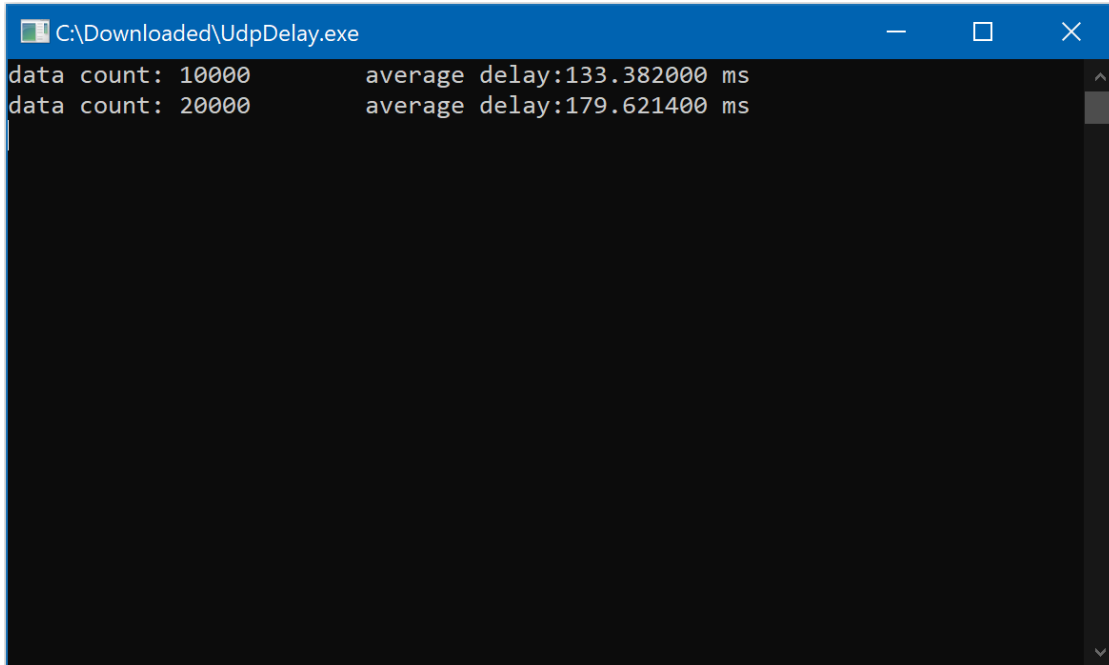

```
C:\Downloaded\UdpDelay.exe
data count: 10000 average delay:133.382000 ms
data count: 20000 average delay:179.621400 ms
```


Google Cloud IoT

Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1

Google Cloud IoT Configuration

1. Select or create a Cloud Platform project In the Google Cloud Console, select an existing project or create a new project. You will need a **Project ID** to use with

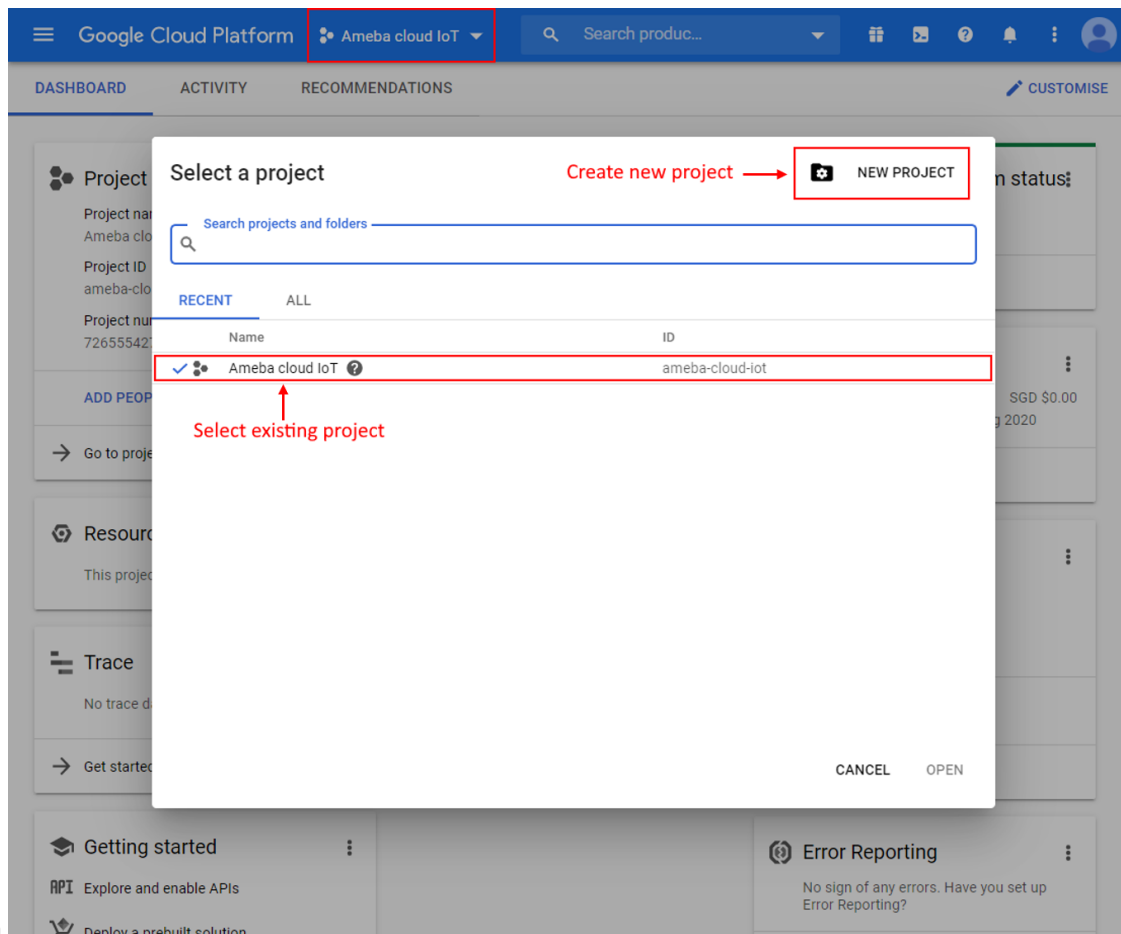


Ameba.


If

creating a new project, enter a project name, and take note of the **Project ID** generated.

2.

Enable billing for your project Billing needs to be enabled for your project to use Google Cloud Platform features. Follow the guide in Google cloud documentation to enable billing. <https://cloud.google.com/billing/docs/how-to/modify-project> 3. Enable the Cloud IoT Core API In Google Cloud console, click on the top left menu button and search for IoT

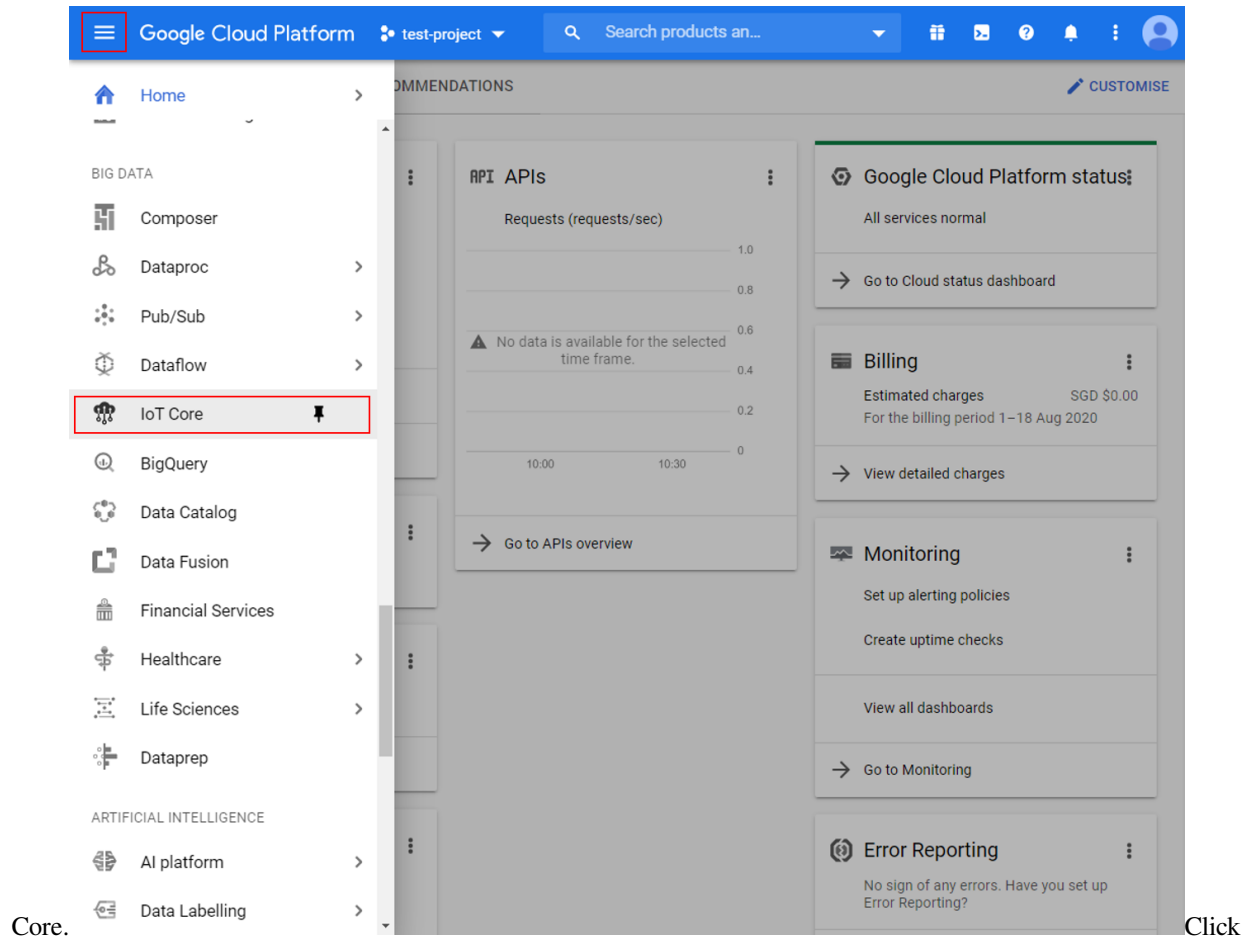

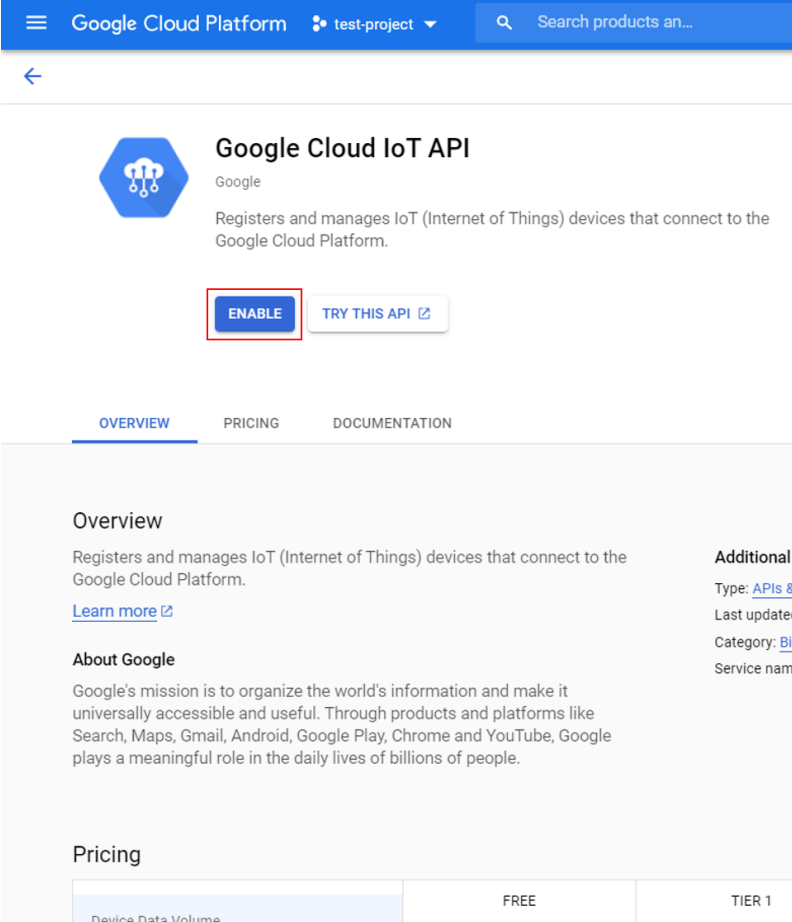

Google Cloud Platform test-project Search products an...

Google Cloud IoT API

Google

Registers and manages IoT (Internet of Things) devices that connect to the Google Cloud Platform.

ENABLE TRY THIS API

OVERVIEW PRICING DOCUMENTATION

Overview

Registers and manages IoT (Internet of Things) devices that connect to the Google Cloud Platform.

[Learn more](#)

About Google

Google's mission is to organize the world's information and make it universally accessible and useful. Through products and platforms like Search, Maps, Gmail, Android, Google Play, Chrome and YouTube, Google plays a meaningful role in the daily lives of billions of people.

Pricing

Device Data Volume	FREE	TIER 1

Additional

Type: [APIs & Services](#)


Last updated: [2019-08-01](#)


Category: [APIs & Services](#)

Service name: [google-cloud-iot](#)


enable to activate Google Cloud IoT API for your project.

Create a Cloud Pub/Sub topic In Google Cloud console, click on the top left menu button and search for

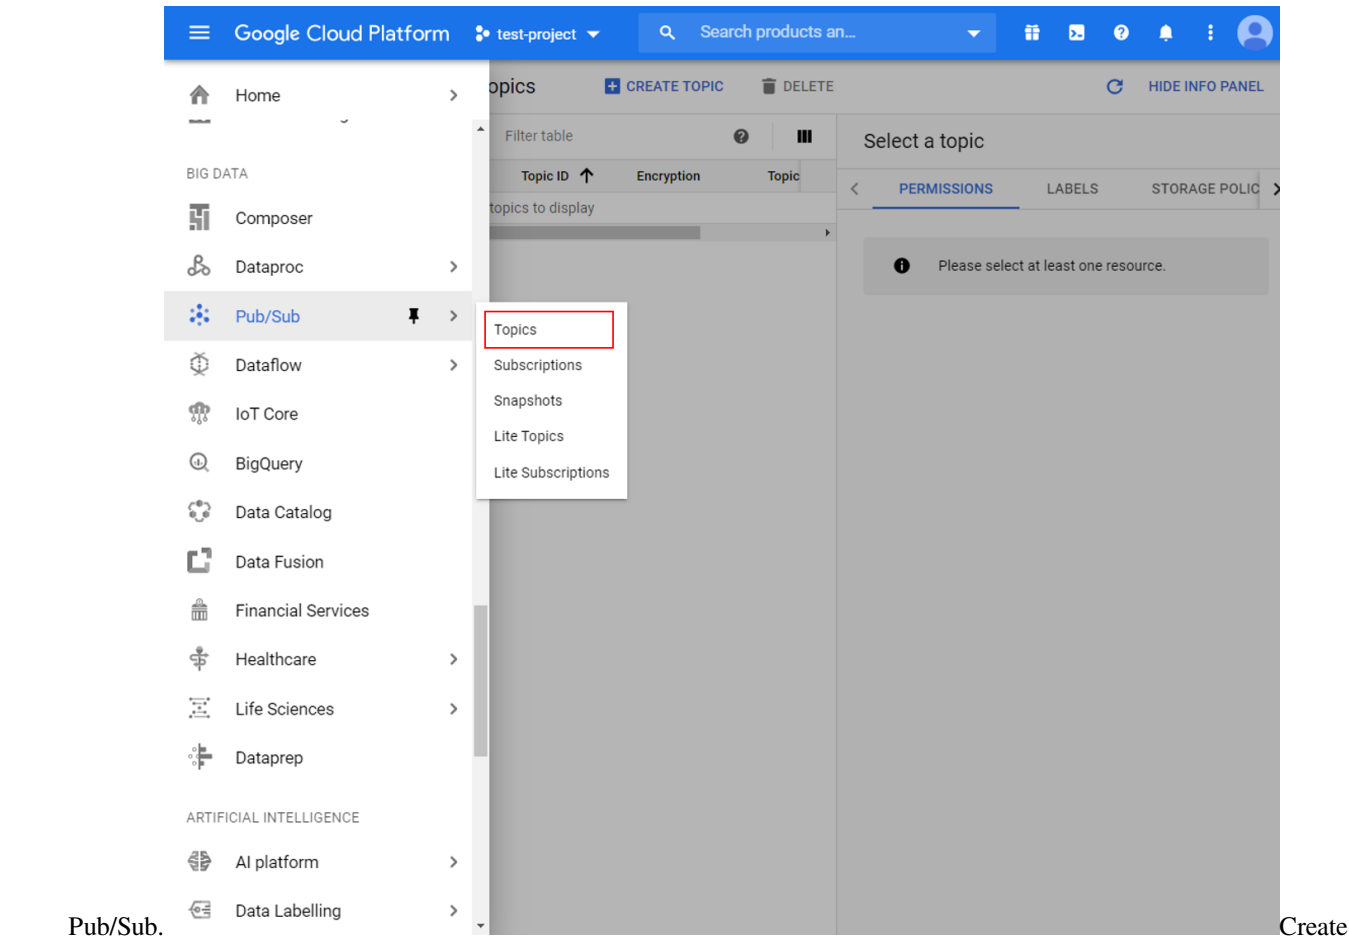


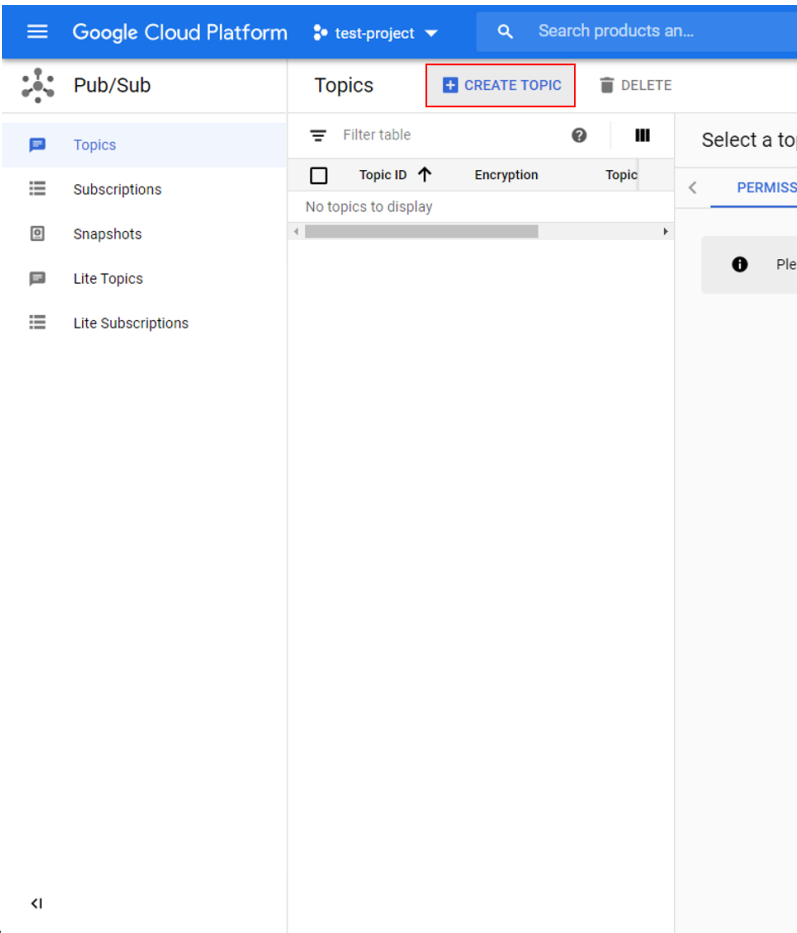

a new topic for your project and give it a suitable topic ID.
the topic is created, go to the permissions tab of the info panel, and add “cloud-iot@system.gserviceaccount.com” with the role of “Pub/Sub Publisher” .

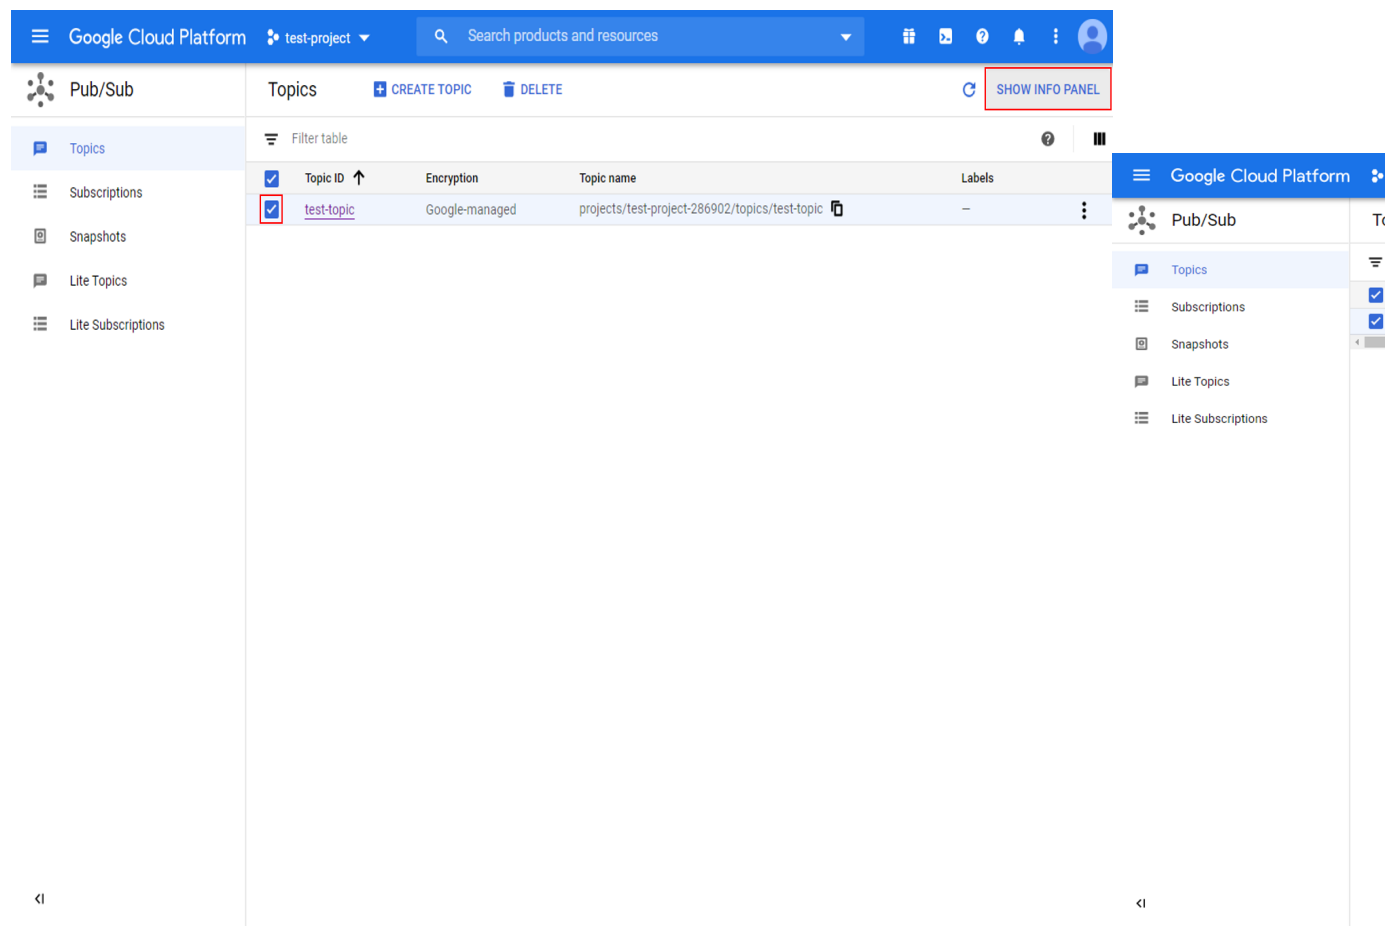


a device registry Go back to the IoT Core settings page and create a new reg-

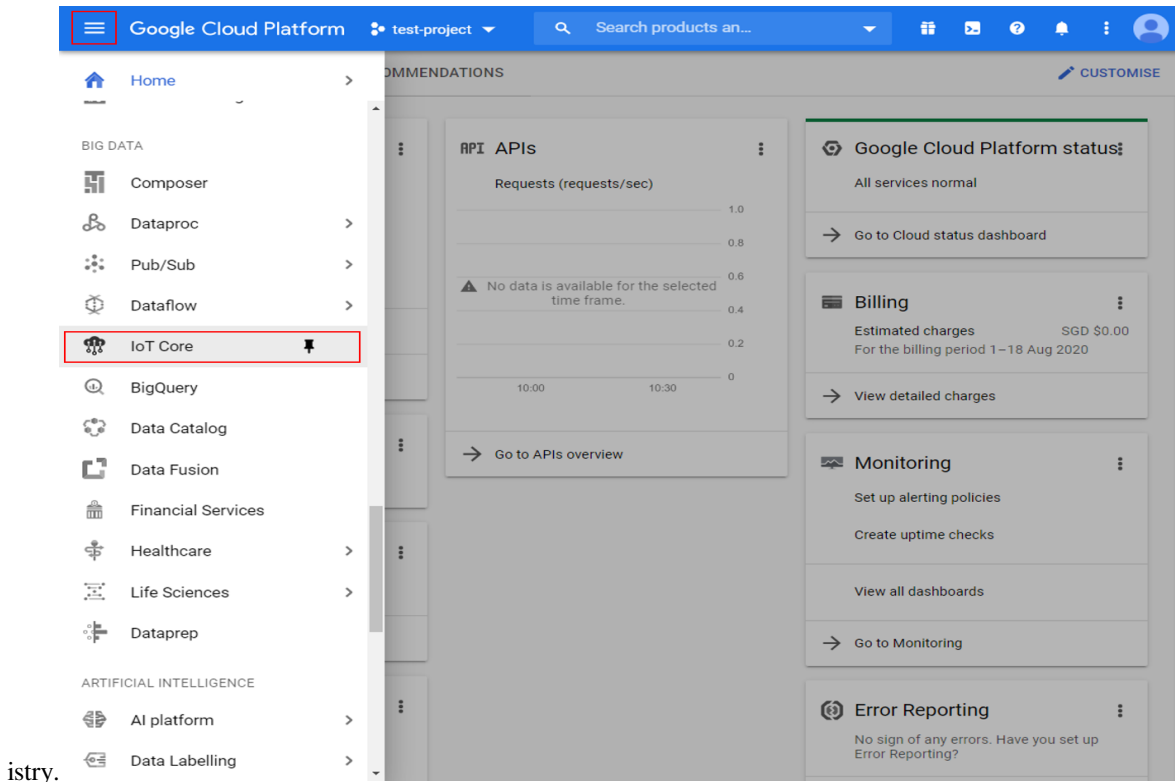

istry.

a suitable **Registry ID** and in which to store data. Remember the ****Registry ID** and **Region** for use with Ameba later. For the Pub/Sub topic, select the topic created in the previous

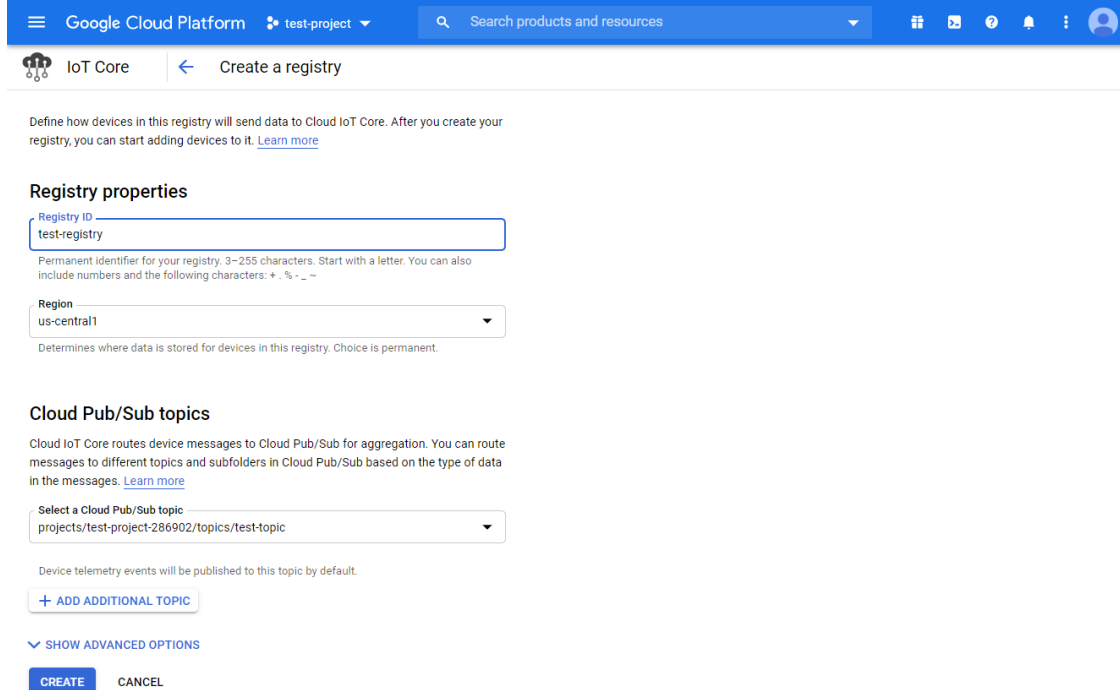


step. 6.

Create a public/private key pair Using Openssl in a terminal in Windows/Linux/MacOs, run the following commands to generate a private and public key pair. Two files will be created by these commands,

“ec_private.pem” containing the private key, and “ec_public.pem” containing the public key.

```
$ openssl ecparam -genkey -name prime256v1 -noout -out ec_private.pem
$ openssl ec -in ec_private.pem -pubout -out ec_public.pem
```

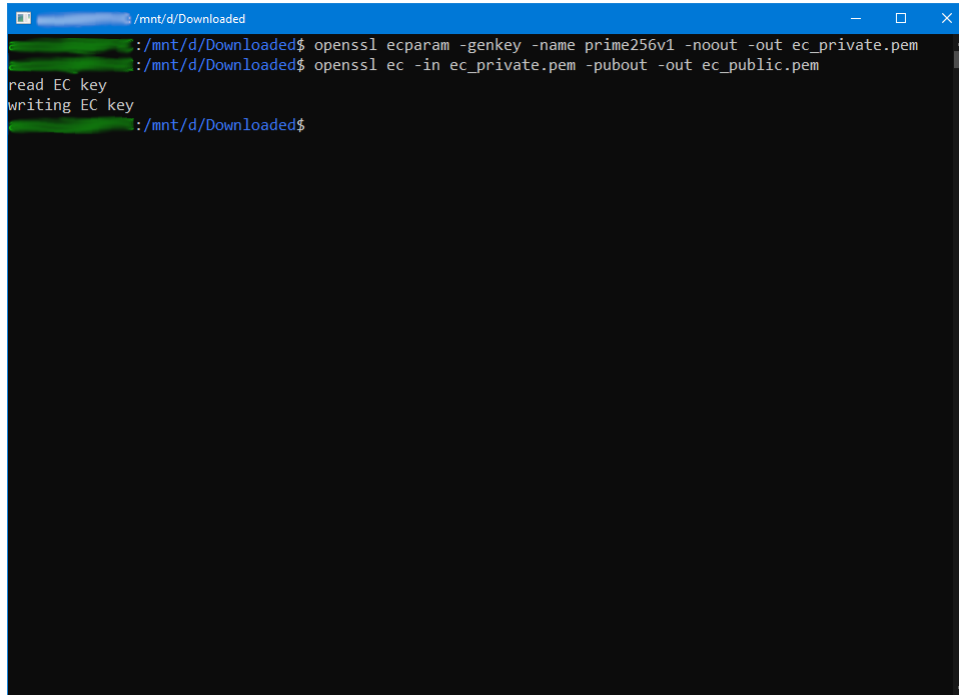A screenshot of a terminal window with a blue title bar. The terminal shows the execution of two OpenSSL commands. The first command generates a private key, and the second command generates a public key from the private key. The output of the second command is highlighted in green. The terminal prompt is `:/mnt/d/Downloaded$`.

```
:/mnt/d/Downloaded$ openssl ecparam -genkey -name prime256v1 -noout -out ec_private.pem
:/mnt/d/Downloaded$ openssl ec -in ec_private.pem -pubout -out ec_public.pem
read EC key
writing EC key
:/mnt/d/Downloaded$
```

Run the next command to extract out the private key, and remember the highlighted string of hexadecimal numbers for use with Ameba later.


```
$ openssl ec -in ec_private.pem -noout -text
```

```


/mnt/d/Downloaded$ openssl ec -in ec_private.pem -noout -text
read EC key
Private-Key: (256 bit)
priv:
    f9:93:86:98:66:b0:f0:34:79:c5:fe:c9:82:50:0d:
    76:f2:ad:c6:2e:23:b9:af:02:c0:1c:d4:11:65:81:
    0a:fb
pub:
    04:29:8f:09:db:9c:d6:e2:b2:05:b8:11:c0:b5:f7:
    90:2a:7c:42:42:3e:db:ec:2d:05:88:b3:8b:14:09:
    9e:de:2d:ec:1b:da:7f:ae:6a:8d:31:55:e1:22:0c:
    d8:94:63:a2:4a:79:09:6f:57:68:76:61:72:9e:e3:
    22:23:93:fd:a6
ASN1 OID: prime256v1
NIST CURVE: P-256
/mnt/d/Downloaded$

```

7. Create a device Go back to the IoT Core settings page and create a new device.

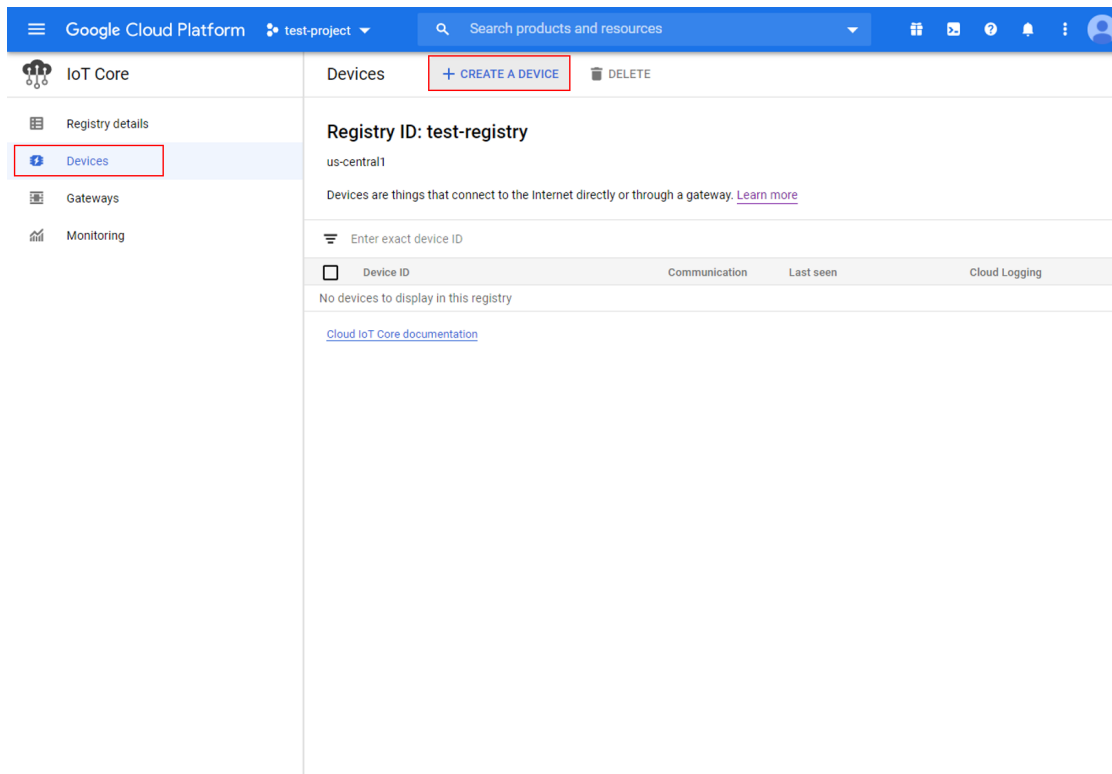

Give the device a suitable **Device ID** and remember it for use with Ameba

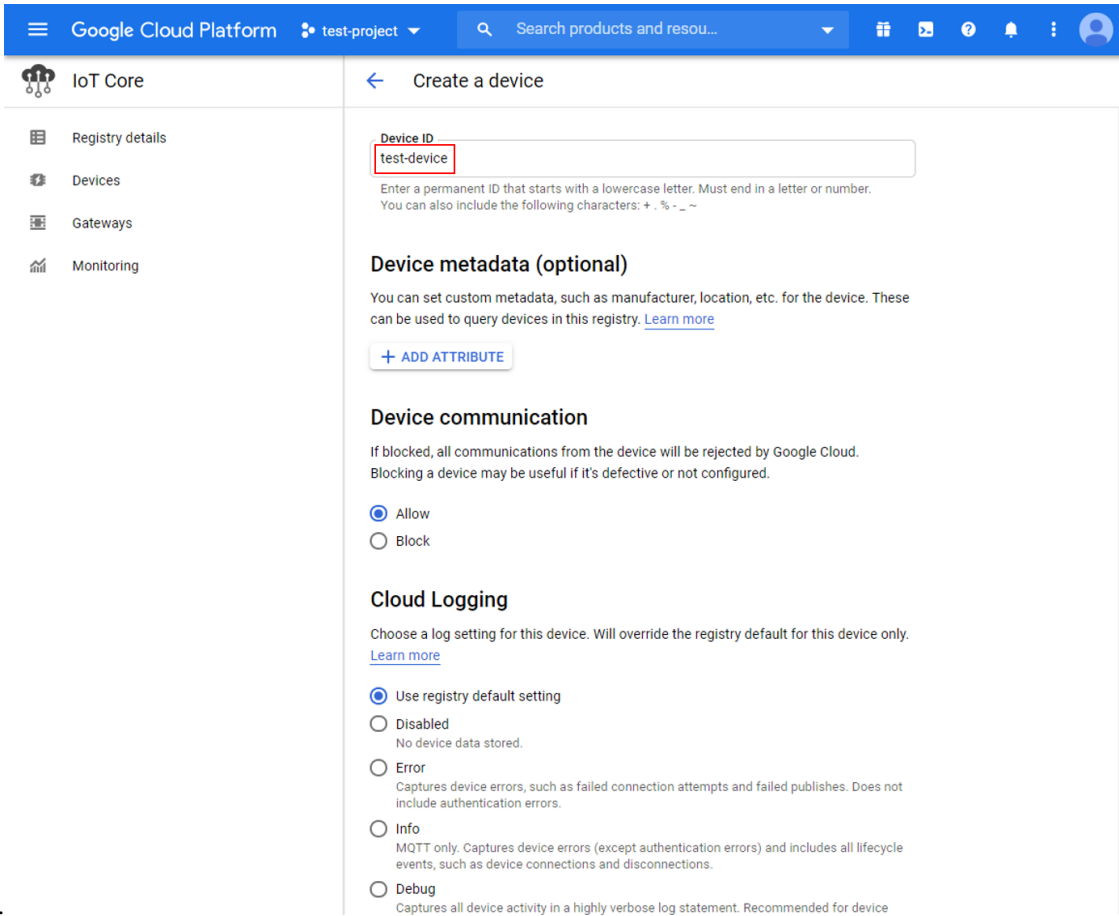

later. In the authentication section of the additional options, upload the previously generated “ec_public.pem” public

Google Cloud Platform test-project Search products and resou...

IoT Core

- Registry details
- Devices
- Gateways
- Monitoring

Create a device

No device data stored.

☐ Error
Captures device errors, such as failed connection attempts and failed publishes. Does not include authentication errors.

☐ Info
MQTT only. Captures device errors (except authentication errors) and includes all lifecycle events, such as device connections and disconnections.

☐ Debug
Captures all device activity in a highly verbose log statement. Recommended for device troubleshooting.

Authentication (optional)

Specify the public key that will be used to authenticate this device. You can leave the key empty, but devices will not be able to connect to Google Cloud without a key. [Learn more](#)

Input method

☐ Enter manually

☒ Upload

Public key format
ES256

Public key value
ec_public.pem [BROWSE](#)

File content must be in PEM format

Public key expiry date (optional)

☐ Expires on:

Date HKT

^ COMMUNICATION, CLOUD LOGGING, AUTHENTICATION

key.

8.

Create a Cloud Pub/Sub subscription To observe messages sent by Ameba, create a subscription in

Google Cloud Platform

test-project

Search products and resou...

Pub/Sub

Topics

Subscriptions

Snapshots

Lite Topics

Lite Subscriptions

Subscriptions

CREATE SUBSCRIPTION

DELETE

SHOW INFO PANEL

Filter table

Subscription ID

Delivery type

Topic name

Subscription name

Acknowledge deac

No subscriptions to display

Pub/Sub.

Choose

a suitable subscription ID and select the previously created topic.

Example

Open the example in “File” -> “Examples” -> “AmebaMQTTClient” -> “Google_Cloud_IoT”.

Google Cloud Platform test-project Search products and resou...

Pub/Sub

- Topics
- Subscriptions**
- Snapshots
- Lite Topics
- Lite Subscriptions

Create subscription

A subscription directs messages on a topic to subscribers. Messages are delivered to subscribers immediately, or subscribers can pull messages as needed.

Subscription ID *
test-subscription

Subscription name: projects/test-project-286902/subscriptions/test-subscription

Select a Cloud Pub/Sub topic *

Type to filter

test-project-286902

projects/test-project-286902/topics/test-topic

SWITCH PROJECT CREATE A TOPIC ENTER TOPIC NAME

☒ Expire after this many days of inactivity (up to 365)

31 Days

A subscription is inactive if there is no subscriber activity such as open pulls or successful pushes.

☐ Never expire

The subscription will never expire, no matter the activity.


Acknowledgement deadline ⓘ

Deadline time is from 10 seconds to 600 seconds

10 Seconds

Subscription filter BETA

If a filter syntax is provided, subscribers will only receive messages that match the filter. [Learn more](#)

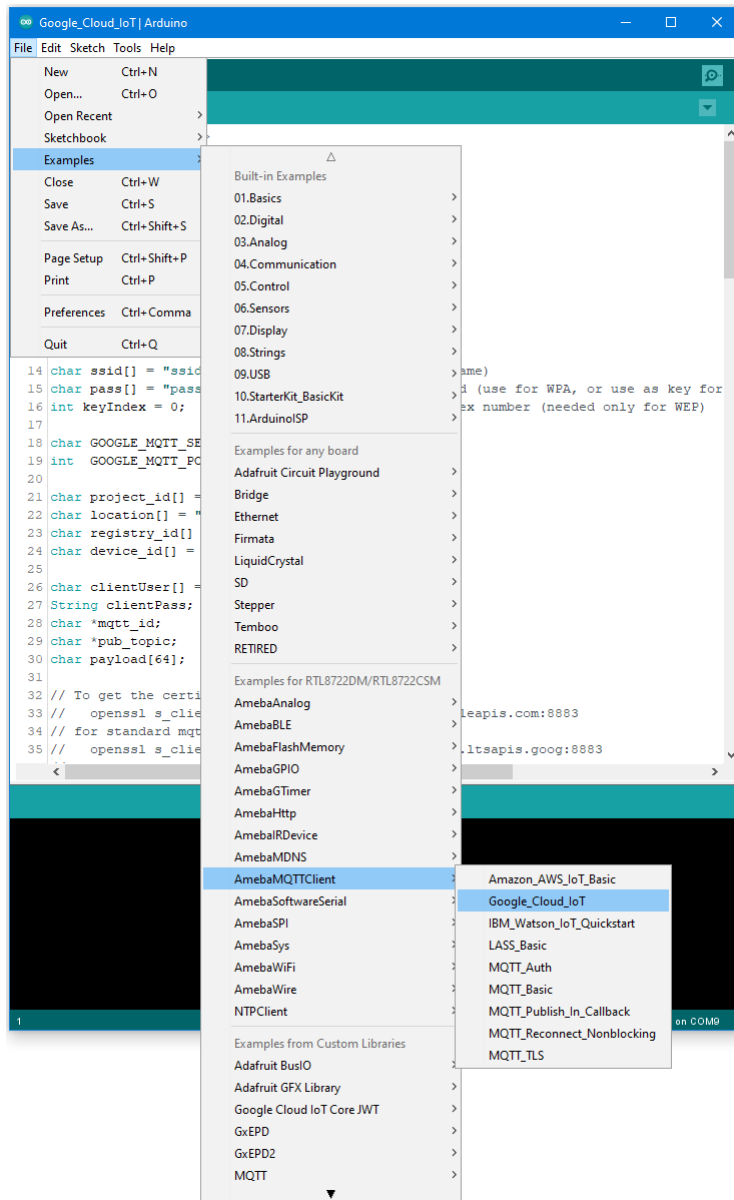

Enter the required information in the highlighted sections below.

```

Google_Cloud_IoT
File Edit Sketch Tools Help

9 WiFiSSLClient wifiClient;
10 PubSubClient client(wifiClient);
11 WiFiUDP udpClient;
12 NTPClient timeClient(udpClient);
13
14 char ssid[] = "ssid";           // your network SSID (name)
15 char pass[] = "pass";          // your network password (use for WPA, or use as key for
16 int keyIndex = 0;              // your network key Index number (needed only for WEP)
17
18 char GOOGLE_MQTT_SERVER[] = "mqtt.googleapis.com";
19 int  GOOGLE_MQTT_PORT = 8883;
20
21 char project_id[] = "project-id";
22 char location[] = "us-central1";
23 char registry_id[] = "my-registry";
24 char device_id[] = "ameba-device";
25
26 char clientUser[] = "unused";
27 String clientPass;
28 char *mqtt_id;
29 char *pub_topic;
30 char payload[64];
31 NN_DIGIT priv_key[9];
32
33 // To get the private key run (where private-key.pem is the ec private key
34 // used to create the certificate uploaded to google cloud iot):
35 // openssl ec -in <private-key.pem> -noout -text
36 // and copy priv: part.
37 // The key length should be exactly the same as the key length below (32 pairs
38 // of hex digits). If it's bigger and it starts with "00:" delete the "00:". If
39 // it's smaller add "00:" to the start. If it's too big or too small something
40 // is probably wrong with your key.
41 char *private_key_str =
42 "57:e1:c0:3b:e5:cd:2f:42:fb:14:4f:a9:1e:3f:0a:"
43 "65:22:4c:f0:ac:0f:a0:82:e1:73:71:ae:76:70:48:"
44 "68:fe";
45
1
RTL8722DM/RTL8722CSM on COM9

```

In the yellow section, enter the SSID and password required to connect to your WiFi network. In the green section, enter the Project ID, server Region, Registry ID and Device ID previously configured in Google Cloud console. In the blue section, enter the hexadecimal string previously extracted from the private key. Upload the code and press the reset button on Ameba once the upload is finished. Open the serial monitor and observe as Ameba connects and sends messages to Google Cloud IoT.

```
COM9
Send

RTL8721D[Driver]: auth success, start assoc
RTL8721D[Driver]: association success(res=1)
RTL8721D[Driver]: ClientSendEAPOL[1527]: no use cache pmksa
RTL8721D[Driver]: set pairwise key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4)
RTL8721D[Driver]: set group key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4) keyid:2

Interface 0 IP address : 192.168.137.222Connected to wifi
Ready for Publishing
client connecting...
Ready for Publishing
client connecting...
Publishing the payload "This is Ameba's 0 message!!" with len: 27
client publish successfully!!! ret = 1
Publishing the payload "This is Ameba's 1 message!!" with len: 27
client publish successfully!!! ret = 1
Publishing the payload "This is Ameba's 2 message!!" with len: 27
client publish successfully!!! ret = 1
Publishing the payload "This is Ameba's 3 message!!" with len: 27
client publish successfully!!! ret = 1
Publishing the payload "This is Ameba's 4 message!!" with len: 27
client publish successfully!!! ret = 1
Publishing the payload "This is Ameba's 5 message!!" with len: 27
client publish successfully!!! ret = 1
Publishing the payload "This is Ameba's 6 message!!" with len: 27
Autoscroll Show timestamp Newline 115200 baud Clear output
```

In Google Cloud console, go to Pub/Sub

subscriptions, select the previously created subscription, and click view messages. Here you can view the messages sent by

Google Cloud Platform test-project Search products and resources

Pub/Sub test-subscripti... EDIT VIEW MESSAGES CREATE SNAPSHOT SHOW INFO PANEL

Topics Subscriptions Snapshots Lite Topics Lite Subscriptions

Subscription details

Subscription name projects/test-project-286902/subscriptions/test-subscription

Topic name projects/test-project-286902/topics/test-topic

1 hour 6 hours 1 day 7 days 30 days RESET ZOOM

Unacked message count

Oldest unacked message age

Delivery type Pull

Subscription expiry ? Subscription expires in 31 days if there is no activity.

Acknowledgement deadline ? 10 Seconds

Subscription filter ? -

Message retention duration 7 Days

Retained acknowledged messages 100

Ameba.

Code Reference

In `setup()`, we set up RootCA which is required to form a TLS connection with Google's servers.

```
wifiClient.setRootCA((unsigned char*)rootCABuff);
```

In `loop()`, each loop checks the Internet status and re-connect to it when the environment has a problem.

```
if (WiFi.status() != WL_CONNECTED) {
    while (WiFi.begin(ssid, pass) != WL_CONNECTED)
    {
        delay(1000);
    }
    Serial.println("Connected to wifi");
}
```

To publish messages, `mqtt_id`, `clientPass` and `pub_topic` are required. `mqtt_id` is generated by printing the project ID, server location, registry ID and device ID in the required format:

```
mqtt_id = (char *)malloc(strlen("projects/") + strlen(project_id) + strlen("/locations/us-central1/registries/") + strlen(registry_id) + strlen("/devices/") + strlen(device_id) + 1);
sprintf(mqtt_id, "projects/%s/locations/us-central1/registries/%s/devices/%s", project_id, registry_id, device_id);
```

`clientPass` is generated using a JSON web token (JWT) generator function, which requires the project ID and current time, and signs it with the private key:

```
clientPass = CreateJwt(project_id, timeClient.getEpochTime(), priv_key);
```

`pub_topic` is generated by printing the project ID and topic in the required format:

```
pub_topic = (char *)malloc(strlen("/devices/") + strlen(device_id) + strlen("/events") + 1);
sprintf(pub_topic, "/devices/%s/events", device_id);
```

MQTT Server setting:

```
client.setServer(GOOGLE_MQTT_SERVER, GOOGLE_MQTT_PORT);
client.setPublishQos(MQTTQOS1);
client.waitForAck(true);
```

Connect to google cloud and publish messages:

```
if (client.connect(mqtt_id, clientUser, clientPass.c_str())){
    // ...
}
```

(下页继续)

(续上页)

```
    for(int i = 0; i < count; i++){
        // ...
        sprintf(payload, "This is Ameba's %d message!!", i);
        ret = client.publish(pub_topic, payload);
        // ...
    }
    // ...
    client.disconnect();
}
free(mqtt_id);
free(pub_topic);
```

IPv6 –Ameba as IPv6 Server/Client over TCP

Materials

- AmebaD [RTL8722DM/RTL8722CSM/RTL8722DM MINI] / [RTL8720DN(BW16)] x 2


Example

Introduction


This example shows how Ameba can communicate on the local network using Internet Protocol version 6 over TCP. Note that this example only works after you have set up the server and then configure the client accordingly.

Procedure

Step 1. IPv6TCPServer Open the example, “Files” -> “Examples” -> “AmebaWiFi” -> “IPv6TCPServer” .

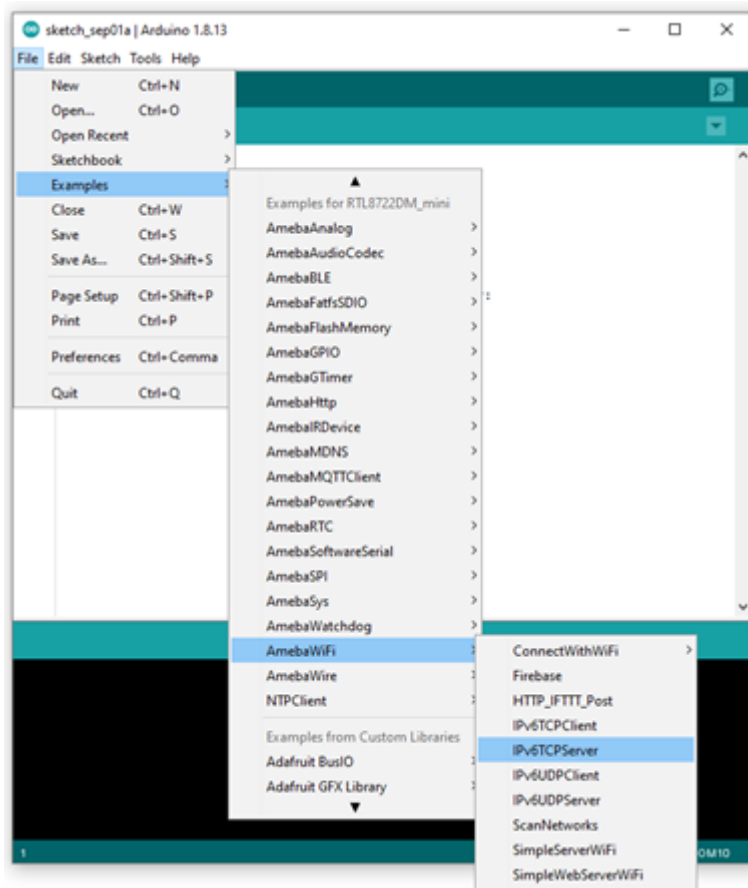


In the sample code, modify the highlighted section to enter the information required (ssid, password) to connect to your WiFi network.

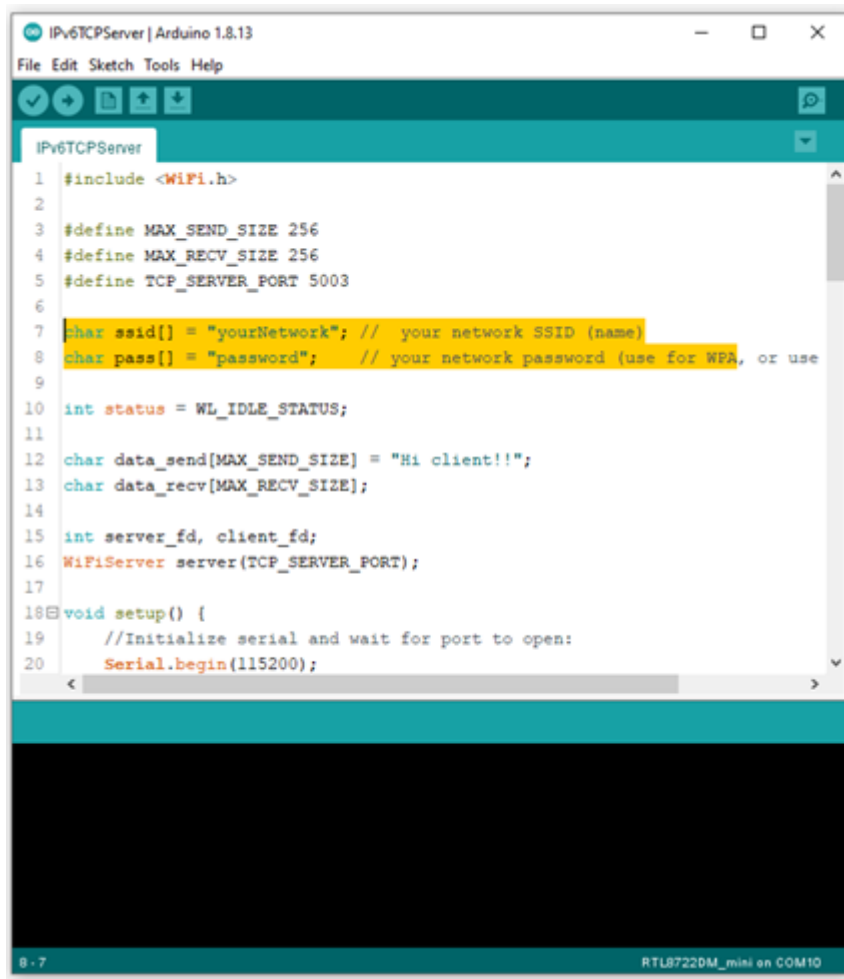

```
1 #include <WiFi.h>
2
3 #define MAX_SEND_SIZE 256
4 #define MAX_RECV_SIZE 256
5 #define TCP_SERVER_PORT 5003
6
7 char ssid[] = "yourNetwork"; // your network SSID (name)
8 char pass[] = "password"; // your network password (use for WPA, or use
9
10 int status = WL_IDLE_STATUS;
11
12 char data_send[MAX_SEND_SIZE] = "Hi client!!";
13 char data_recv[MAX_RECV_SIZE];
14
15 int server_fd, client_fd;
16 WiFiServer server(TCP_SERVER_PORT);
17
18 void setup() {
19     //Initialize serial and wait for port to open:
20     Serial.begin(115200);
```


Next, upload the code and press the reset button on Ameba once the upload is finished. Open Serial Monitor and copy the IPv6 address of the Server (the highlighted area) for later use,

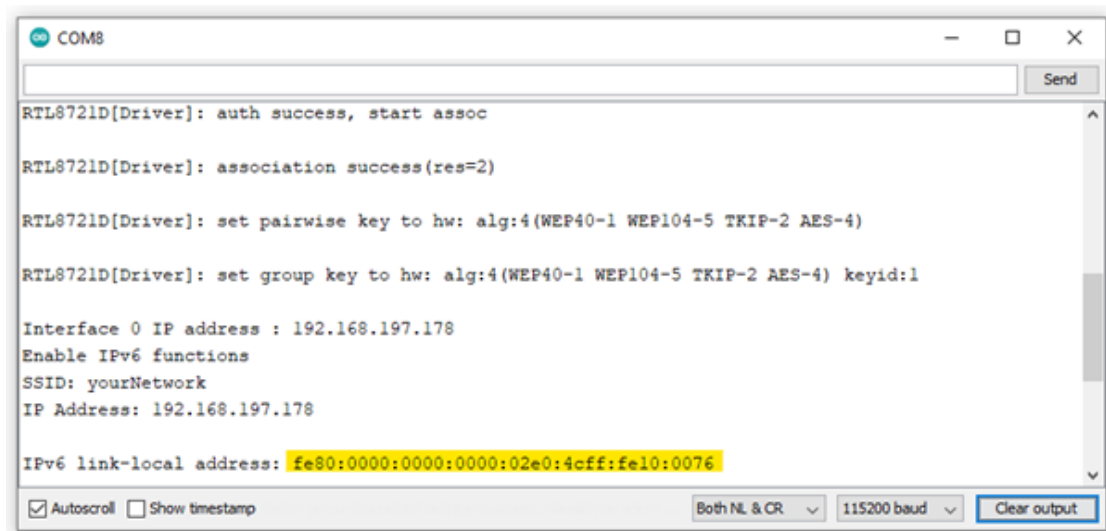


```
COM8
RTL8721D[Driver]: auth success, start assoc
RTL8721D[Driver]: association success(res=2)
RTL8721D[Driver]: set pairwise key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4)
RTL8721D[Driver]: set group key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4) keyid:1
Interface 0 IP address : 192.168.197.178
Enable IPv6 functions
SSID: yourNetwork
IP Address: 192.168.197.178
IPv6 link-local address: fe80:0000:0000:0000:02e0:4cff:fe10:0076
```

Step 2. IPv6TCPClient Now take the second Ameba D and open another example, “Files” -> “Examples” ->

“AmebaWiFi” -> “IPv6TCPClient”.

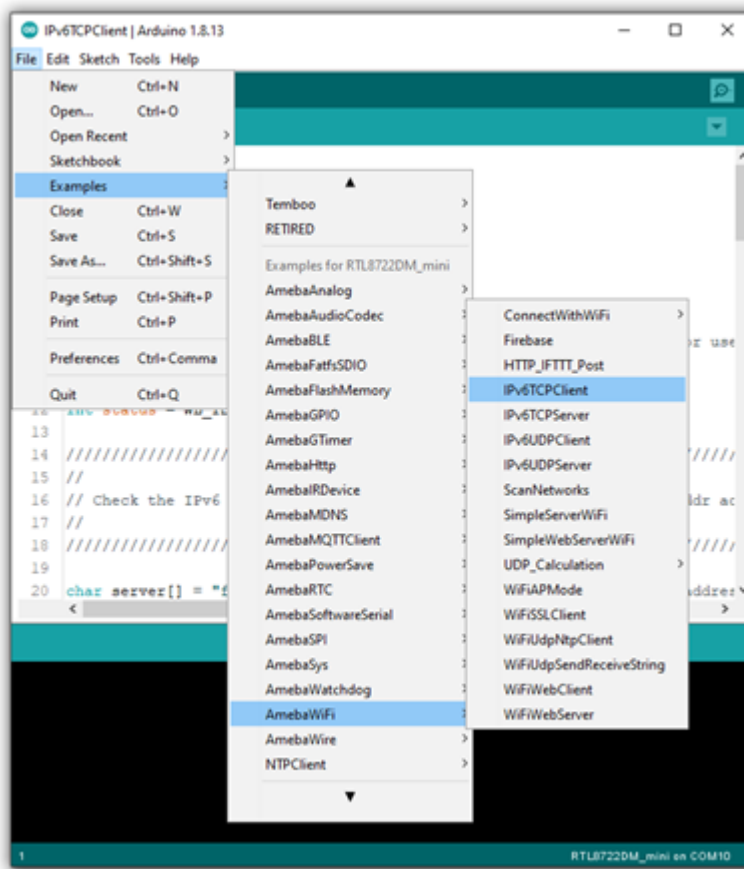

In the sample code, modify the highlighted section to enter the information required (ssid, password) to connect to your WiFi network.

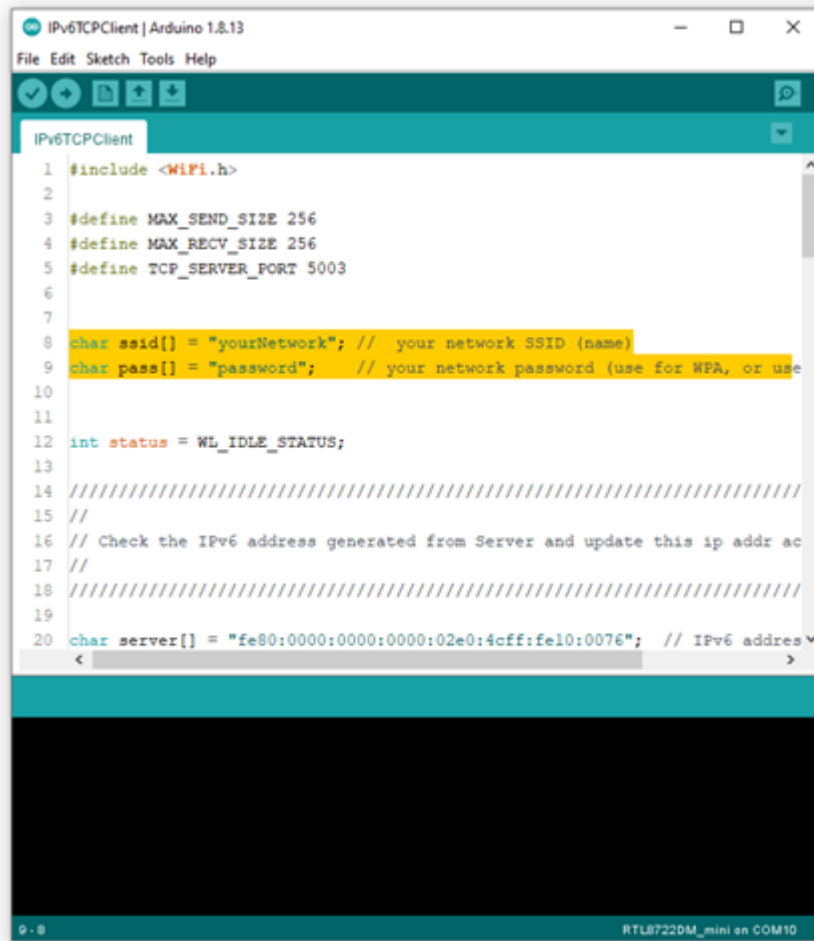

```
1 #include <WiFi.h>
2
3 #define MAX_SEND_SIZE 256
4 #define MAX_RECV_SIZE 256
5 #define TCP_SERVER_PORT 5003
6
7
8 char ssid[] = "yourNetwork"; // your network SSID (name)
9 char pass[] = "password"; // your network password (use for WPA, or use
10
11
12 int status = WL_IDLE_STATUS;
13
14 ///////////////////////////////////////////////////
15 //
16 // Check the IPv6 address generated from Server and update this ip addr ac
17 //
18 ///////////////////////////////////////////////////
19
20 char server[] = "fe80:0000:0000:0000:02e0:4cff:fe10:0076"; // IPv6 address
21
```

From the previous step, we have obtained the Server' s IPv6 address, now we copy the server' s IPv6 address to "IPv6TCPCClient" example in the highlighted area below,

```

1 #include <WiFi.h>
2
3 #define MAX_SEND_SIZE 256
4 #define MAX_RECV_SIZE 256
5 #define TCP_SERVER_PORT 5003
6
7
8 char ssid[] = "yourNetwork"; // your network SSID (name)
9 char pass[] = "password";    // your network password (use for WPA, or use as key for WEP)
10
11
12 int status = WL_IDLE_STATUS;
13
14 ////////////////////////////////////////////////////////////////////////////////////////////////////////////////////
15 //
16 // Check the IPv6 address generated from Server and update this ip addr accordingly !! //
17 //
18 ////////////////////////////////////////////////////////////////////////////////////////////////////////////////////
19
20 char server[] = "fe80:0000:0000:0000:02e0:4cff:fe10:0074"; // IPv6 address of server board
21 char data_recv[MAX_RECV_SIZE];
22 char data_send[MAX_SEND_SIZE] = "Hi Server!!";
23

```

Image tool closed!
Upload Image done.

20 RTL8722DM/RTL8722C5M en COM10

Next, upload the code and press the reset button on Ameba once the upload is finished.

Open Serial Monitor on the port to the second Ameba D, you should see server and client are sending text message to each other at the same time.

```

[SERVER] Receive data: Hi Server!!

[SERVER] Send data successfully

[SERVER] Receive data: Hi Server!!

[SERVER] Send data successfully

[SERVER] Receive data: Hi Server!!


[SERVER] Send data successfully

[SERVER] Receive data: Hi Server!!

[SERVER] Send data successfully

```

☐ Autoscroll ☐ Show timestamp Both NL & CR 115200 baud Clear output

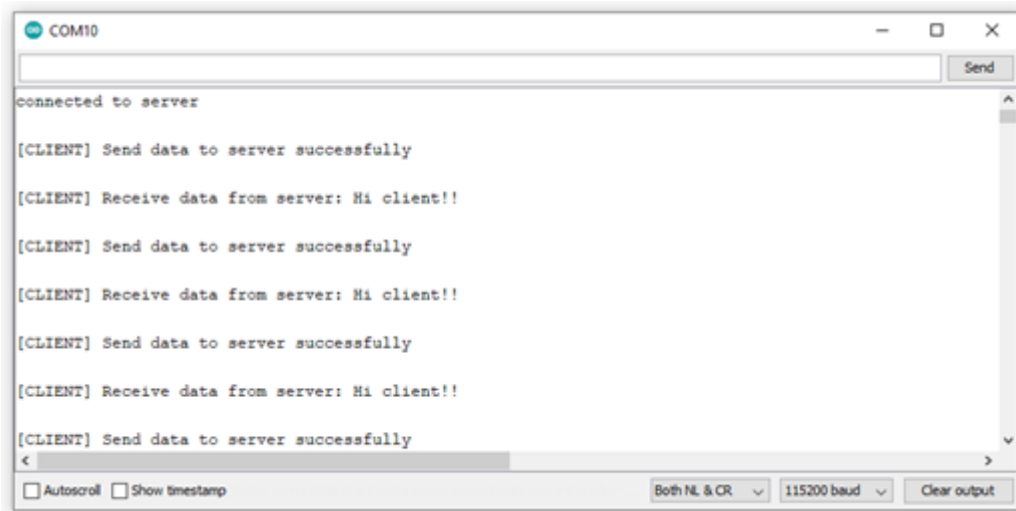

IPv6 –Ameba as IPv6 Server/Client over UDP


Materials

- AmebaD [RTL8722DM/RTL8722CSM/RTL8722DM MINI] / [RTL8720DN(BW16)] x 2


Example

Introduction

This example shows how Ameba can communicate on the local network using Internet Protocol version 6 over UDP. Note that this example only works after you have set up the server and then configure the client accordingly.

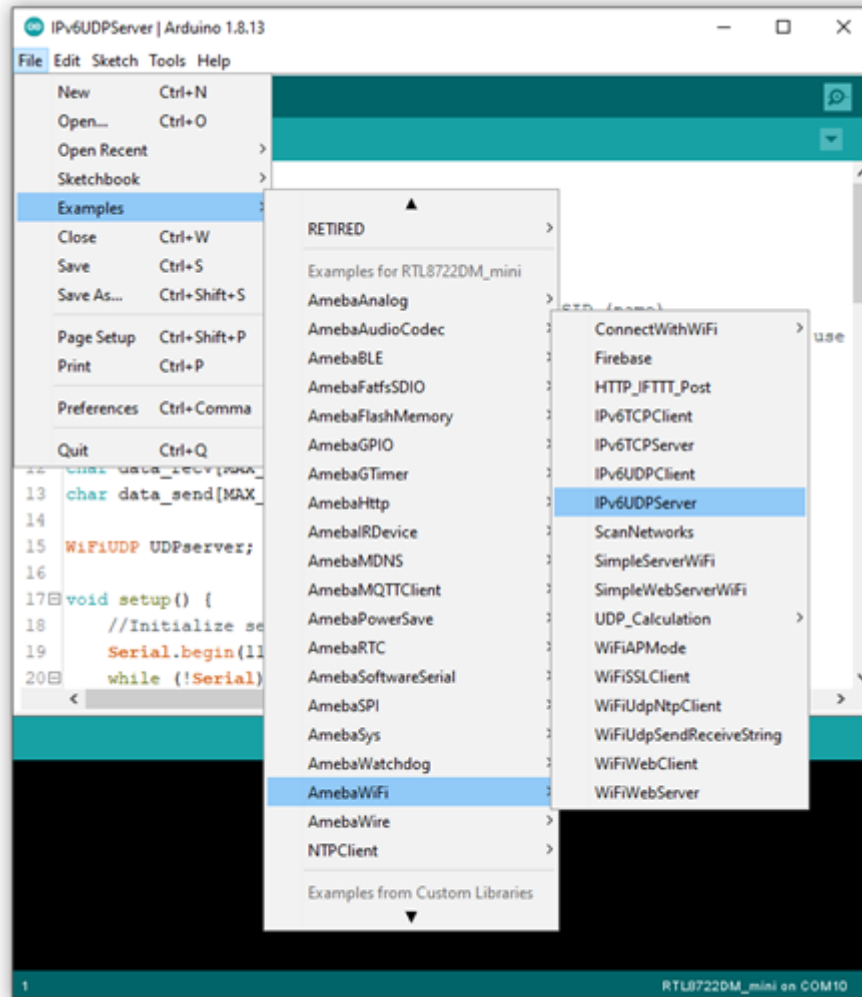


In the sample code, modify the highlighted section to enter the information required (ssid, password) to connect to your WiFi network.

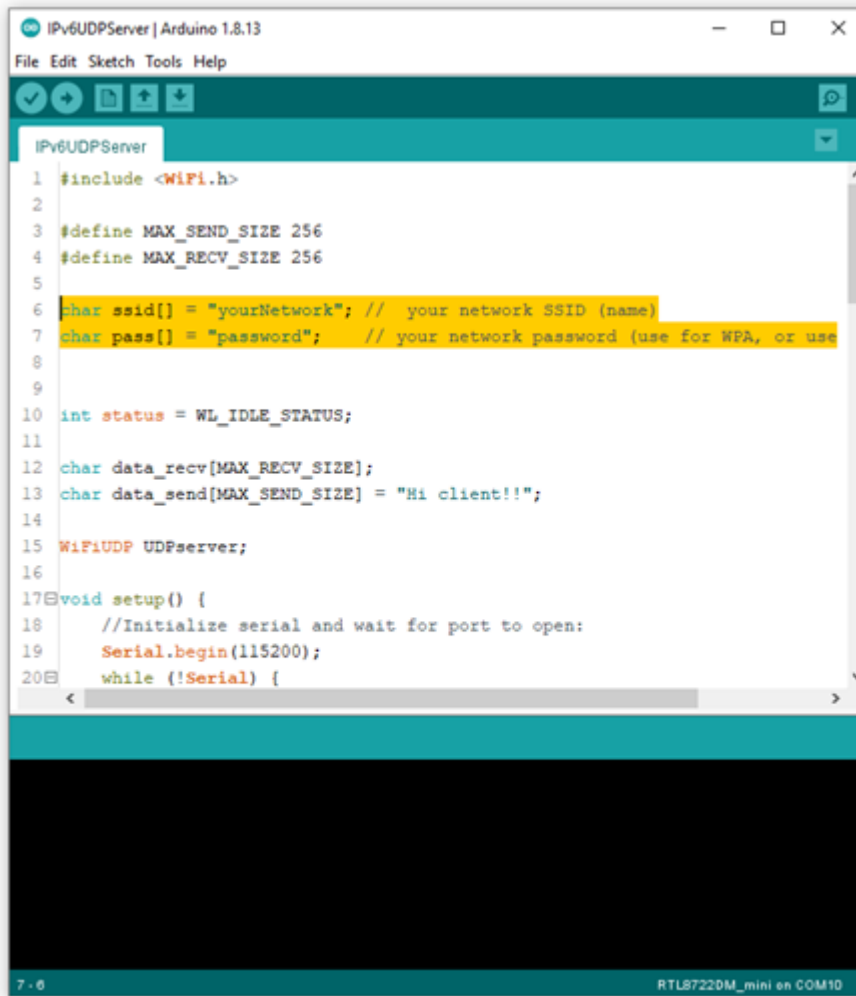

```
1 #include <WiFi.h>
2
3 #define MAX_SEND_SIZE 256
4 #define MAX_RECV_SIZE 256
5
6 char ssid[] = "yourNetwork"; // your network SSID (name)
7 char pass[] = "password"; // your network password (use for WPA, or use
8
9
10 int status = WL_IDLE_STATUS;
11
12 char data_recv[MAX_RECV_SIZE];
13 char data_send[MAX_SEND_SIZE] = "Hi client!!";
14
15 WiFiUDP UDPServer;
16
17 void setup() {
18   //Initialize serial and wait for port to open:
19   Serial.begin(115200);
20   while (!Serial) {
```

Next, upload the code and press the reset button on Ameba once the upload is finished. Open Serial Monitor and copy the IPv6 address of the Server (the highlighted area) for later use,

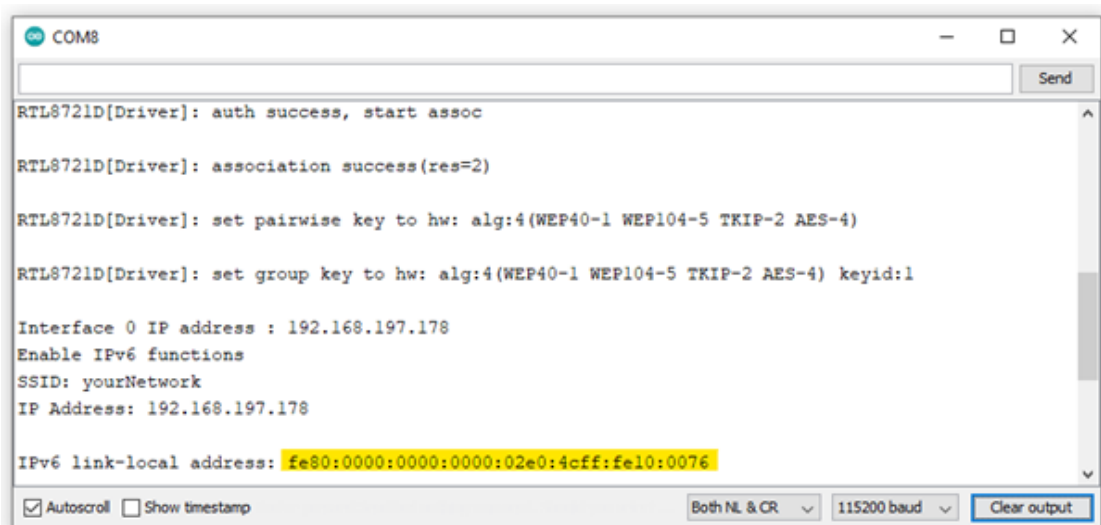


```
RTL8721D[Driver]: auth success, start assoc
RTL8721D[Driver]: association success(res=2)
RTL8721D[Driver]: set pairwise key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4)
RTL8721D[Driver]: set group key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4) keyid:1


Interface 0 IP address : 192.168.197.178
Enable IPv6 functions
SSID: yourNetwork
IP Address: 192.168.197.178

IPv6 link-local address: fe80:0000:0000:0000:02e0:4c00:fe10:0076
```

Step 2. IPv6UDPCliEnt Now take the second Ameba D and open another example, “Files” -> “Examples” -> “AmebaWiFi” -> “IPv6UDPCliEnt” .

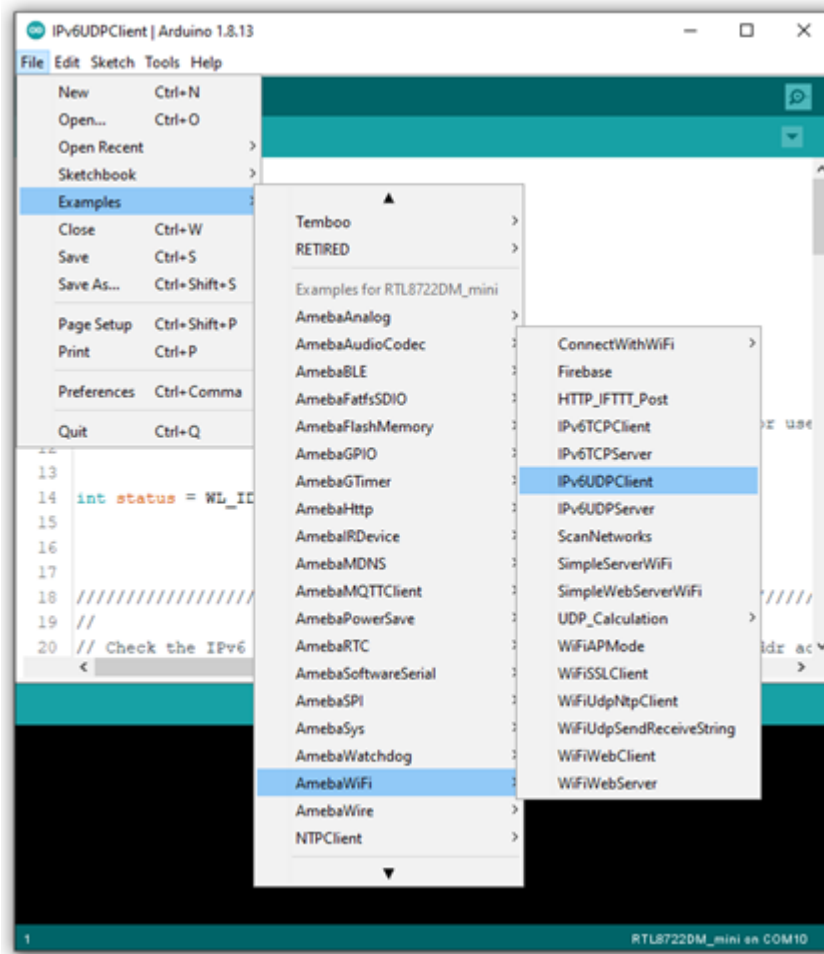


In the sample code, modify the highlighted section to enter the information required (ssid, password) to connect to your WiFi network.

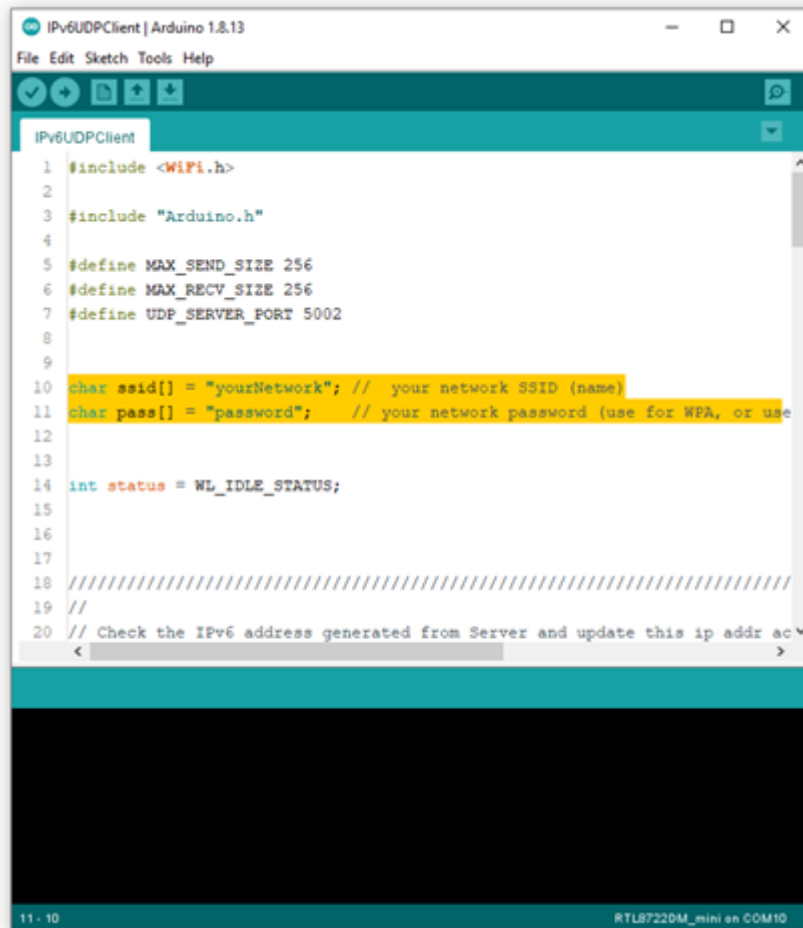

```
1 #include <WiFi.h>
2
3 #include "Arduino.h"
4
5 #define MAX_SEND_SIZE 256
6 #define MAX_RECV_SIZE 256
7 #define UDP_SERVER_PORT 5002
8
9
10 char ssid[] = "yourNetwork"; // your network SSID (name)
11 char pass[] = "password"; // your network password (use for WPA, or use
12
13
14 int status = WL_IDLE_STATUS;
15
16
17
18 ///////////////////////////////////////////////////
19 //
20 // Check the IPv6 address generated from Server and update this ip addr ac
21 < >
```

From the previous step, we have obtained the Server' s IPv6 address, now we copy the server' s IPv6 address to "IPv6UDPClient" example in the highlighted area below,

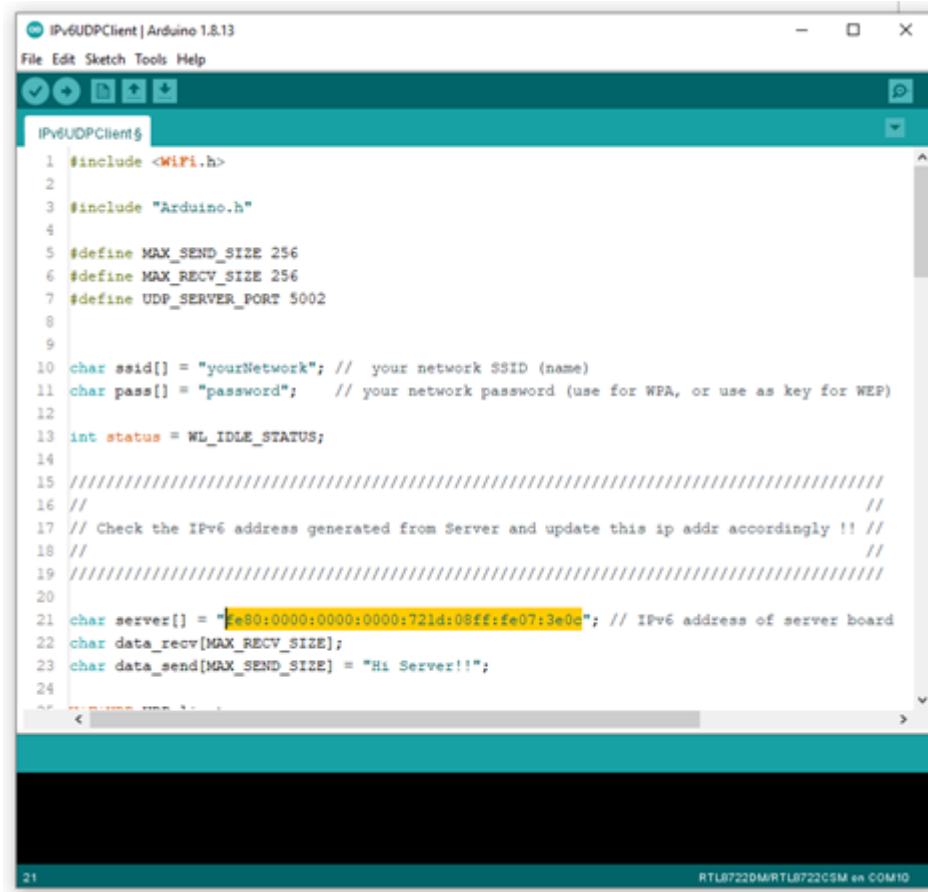


```

1  #include <WiFi.h>
2
3  #include "Arduino.h"
4
5  #define MAX_SEND_SIZE 256
6  #define MAX_RECV_SIZE 256
7  #define UDP_SERVER_PORT 5002
8
9
10 char ssid[] = "yourNetwork"; // your network SSID (name)
11 char pass[] = "password"; // your network password (use for WPA, or use as key for WEP)
12
13 int status = WL_IDLE_STATUS;
14
15 ////////////////////////////////////////////////////////////////////////////////////////////////////////////////////
16 //
17 // Check the IPv6 address generated from Server and update this ip addr accordingly !! //
18 //
19 ////////////////////////////////////////////////////////////////////////////////////////////////////////////////////
20
21 char server[] = "fe80:0000:0000:0000:721d:08ff:fe07:3e0d"; // IPv6 address of server board
22 char data_recv[MAX_RECV_SIZE];
23 char data_send[MAX_SEND_SIZE] = "Hi Server!!";
24
25

```

Next, upload the code and press the reset button on Ameba once the upload is finished.


Open Serial Monitor on the port to the second Ameba D, you should see server and client are sending text message to each other at the same time.

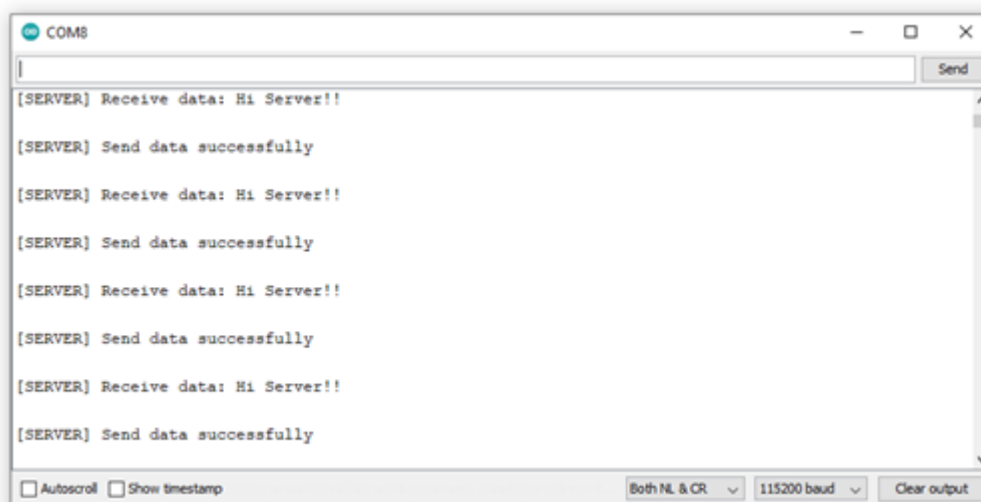

```



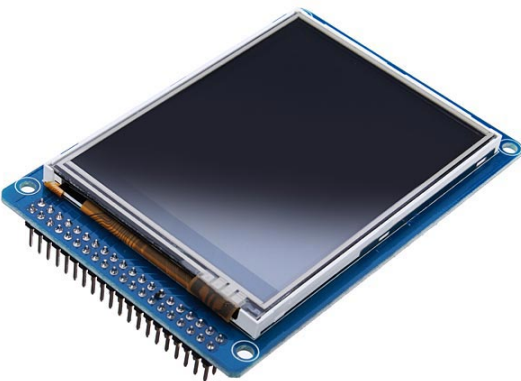



[SERVER] Receive data: Hi Server!!
[SERVER] Send data successfully
[SERVER] Receive data: Hi Server!!
[SERVER] Send data successfully
[SERVER] Receive data: Hi Server!!
[SERVER] Send data successfully
[SERVER] Receive data: Hi Server!!
[SERVER] Send data successfully
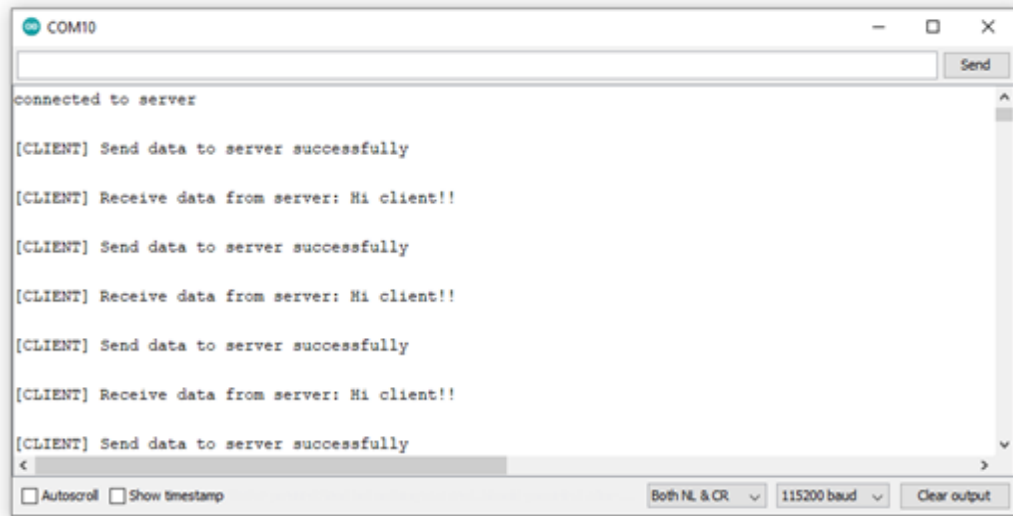
```



Components Used

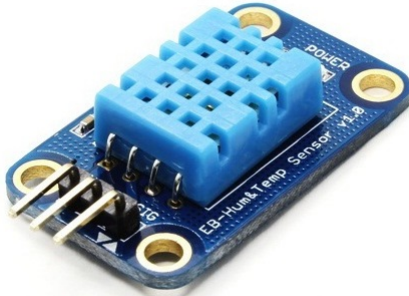表 5: Components used in Examples

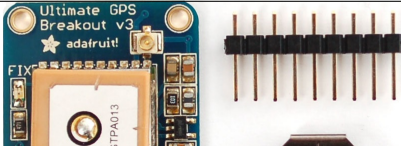	
DHT11_DHT22 Humidity & temperature sensor	HC_SR04 Distance measurement function
	
ILI9341 TFT LCD TFT LCD display with SPI interface	PMS3003/5003 Air quality sensor that detects concentration of micro particulate matters
	

Peripheral Examples

GPIO - Measure The Distance By Ultrasound Module


Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- HC-SR04 Ultrasonic x 1
- Dropping resistor or Level converter

Example

HC-SR04 is a module that uses ultrasound to measure the distance. It looks like a pair of eyes in its appearance, therefore it's often installed onto robot-vehicle or mechanical bugs to be their eyes.

The way it works is that first we “toggle high” the TRIG pin (that is to pull high then pull low). The HC-SR04 would send eight 40kHz sound wave signal and pull high the ECHO pin. When the sound wave returns back, it pull low the ECHO pin.

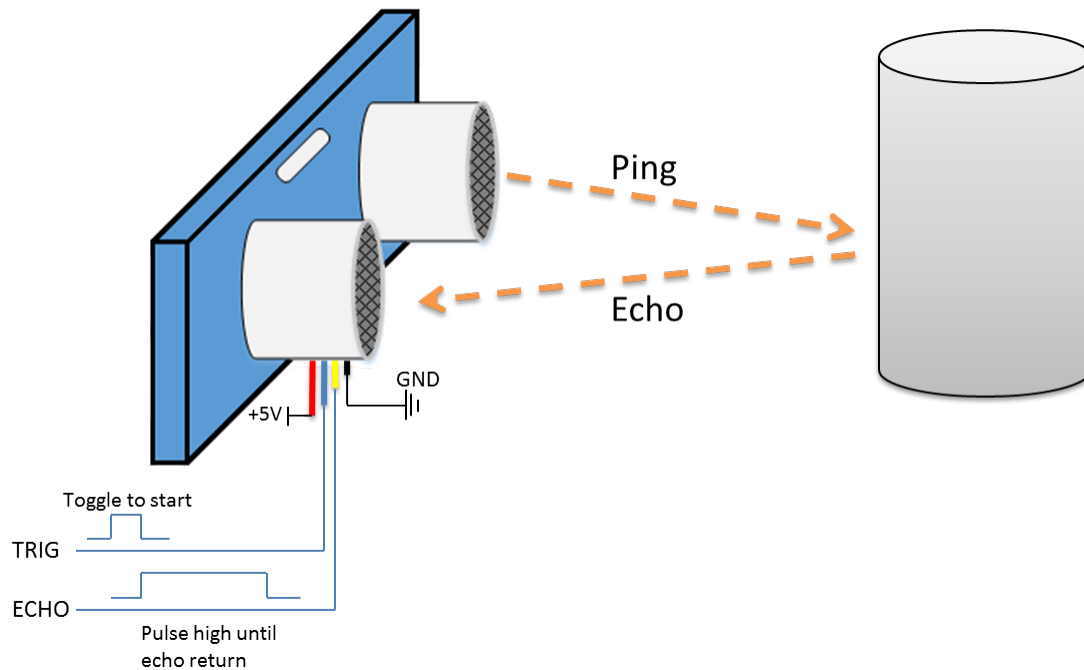


Assume the velocity of sound is 340 m/s, the time it takes for the sound to advance 1 cm in the air is $340 \times 100 \times 10^{-6} =$

29 us.


The sound wave actually travels twice the distance between HC-SR04 and the object, therefore the distance can be calculated by $(\text{time}/29) / 2 = \text{time} / 58$.

The working voltage of HC-SR04 is 5V. When we pull high the ECHO pin to 5V, the voltage might cause damage to the GPIO pin of Ameba. To avoid this situation, we need to drop the voltage as follows:

RTL8722DM / RTL8722CSM Wiring Diagram:

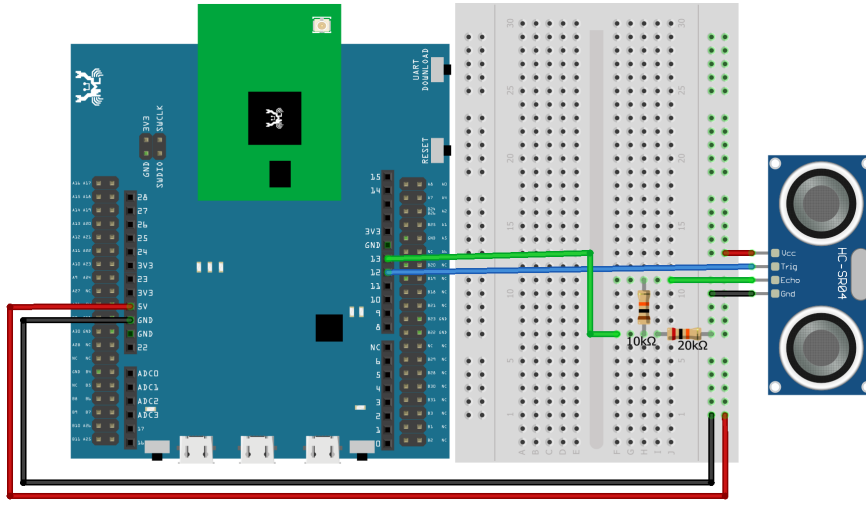

RTL8722DM MINI Wiring Diagram:

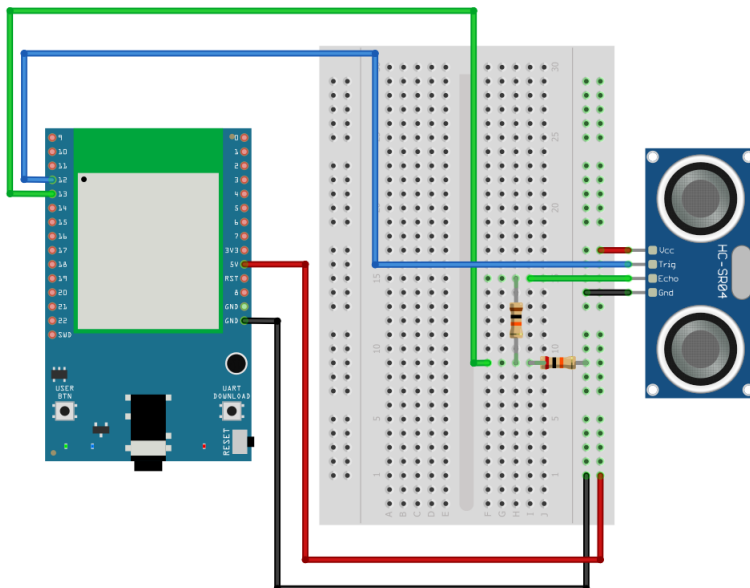


We pick the resistors with resistance 1:2, in the example we use 10kΩ and 20kΩ.


If you do not have resistors in hand, you can use level converter instead. The TXB0108 8 channel level converter is a

suitable example:


RTL8722DM / RTL8722CSM Wiring Diagram:

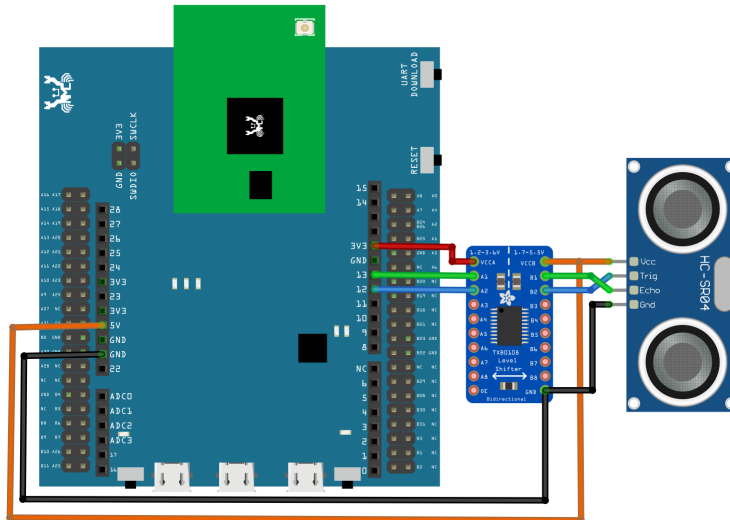


RTL8722DM MINI Wiring Diagram:

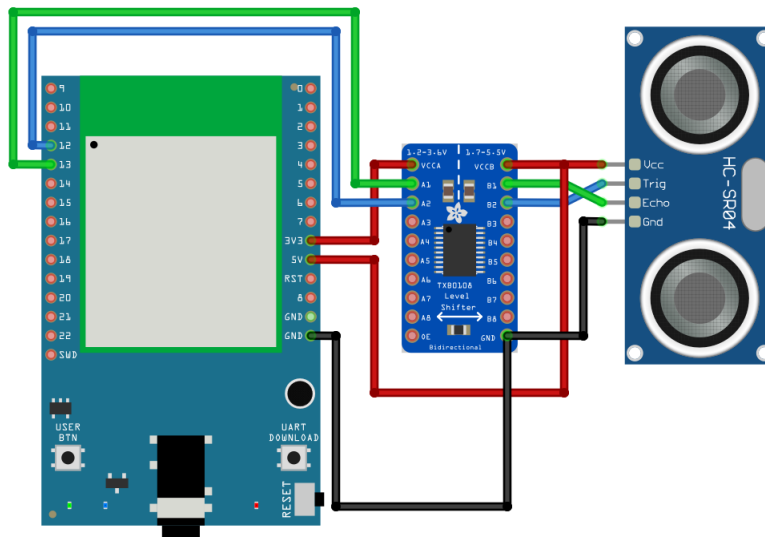

Next, open the sample code in “File” -> “Examples” -> “AmebaGPIO” -> “HCSR04_Ultrasonic”

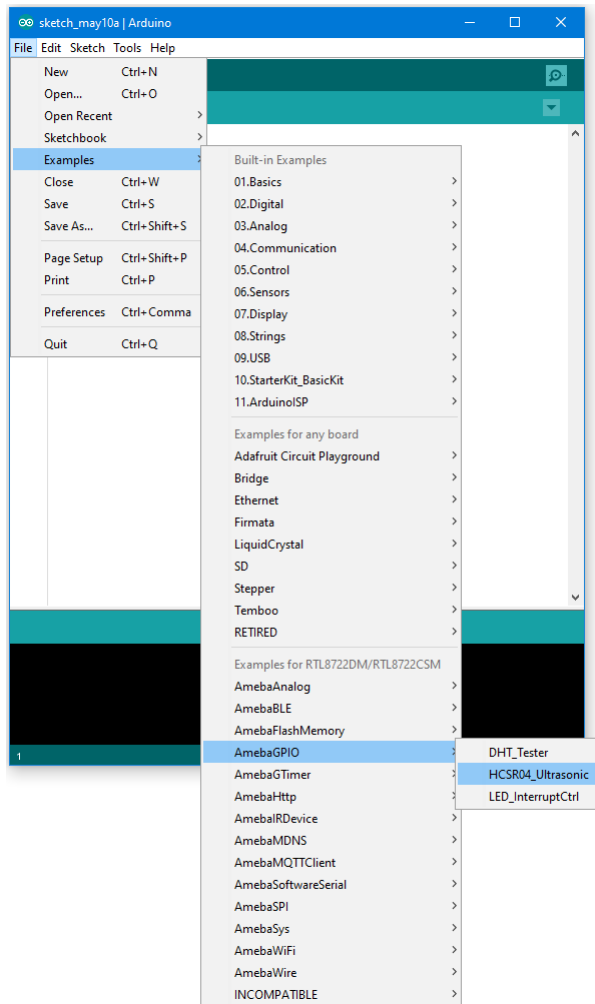

Compile and upload to Ameba, then press the reset button. Open the Serial Monitor, the calculated result is output to serial monitor every 2 seconds.

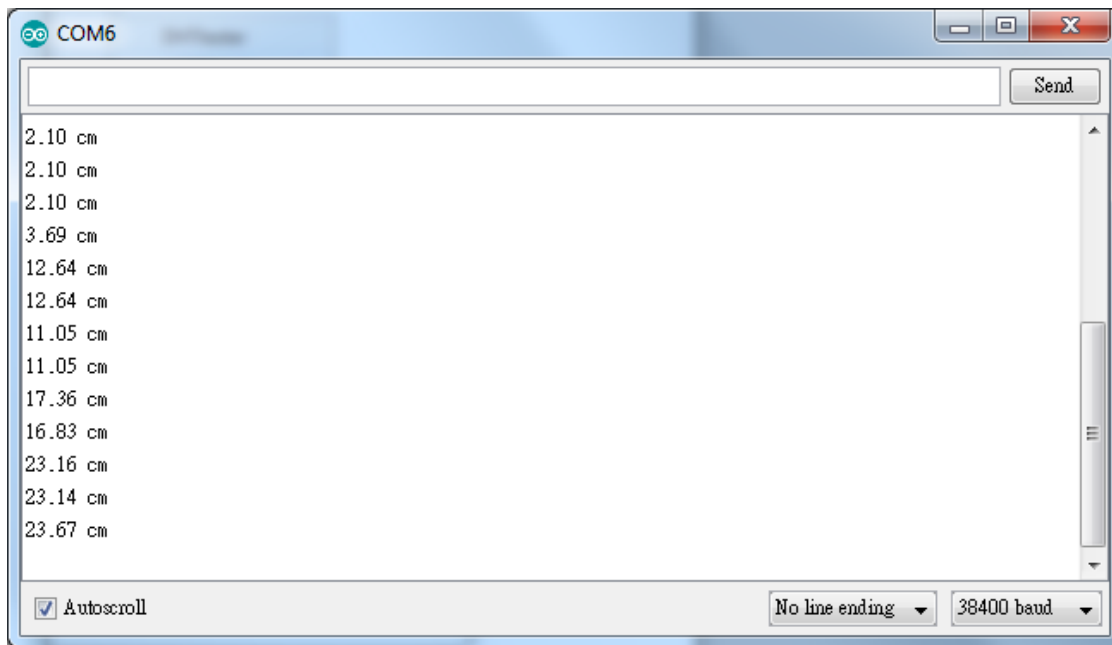

Note that the HCSR04 module uses the reflection of sound wave to calculate the distance, thus the result can be affected by the surface material of the object (e.g., harsh surface tends to cause scattering of sound wave, and soft surface may cause the sound wave to be absorbed).

Code Reference

Before the measurement starts, we need to pull high the TRIG pin for 10us and then pull low. By doing this, we are telling the HC-SR04 that we are about to start the measurement:

```
digitalWrite(trigger_pin, HIGH);  
delayMicroseconds(10);  
digitalWrite(trigger_pin, LOW);
```

Next, use pulseIn to measure the time when the ECHO pin is pulled high.

```
duration = pulseIn (echo_pin, HIGH);
```

Finally, use the formula to calculate the distance.

```
distance = duration / 58;
```


GPIO - Measuring The Temperature And Humidity

Preparation


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- DHT11 or DHT22 or DHT21

Example


DHT11 is a temperature and humidity sensor which operates at voltage 3.3V~5V. At room temperature, the measurable range of the humidity is 20% ~ 90%RH with $\pm 5\%$ RH precision, the measurable range of the temperature is 0 ~ 50°C with $\pm 2^\circ\text{C}$ precision.

Another choice of temperature and humidity sensor is DHT22 sensor, which has better precision. Its measurable range of the humidity is 0%~100%RH with $\pm 5\%$ RH precision, the measurable range of the temperature is -40~125 °C with $\pm 0.2^\circ\text{C}$ precision.

There are 4 pins on the sensor:

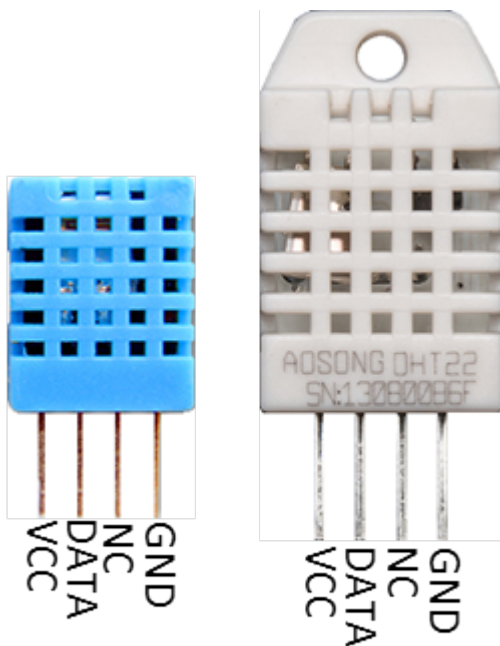


Since one of the 4 pins has no function, there are temperature/humidity sensors with only 3 pins on the market:

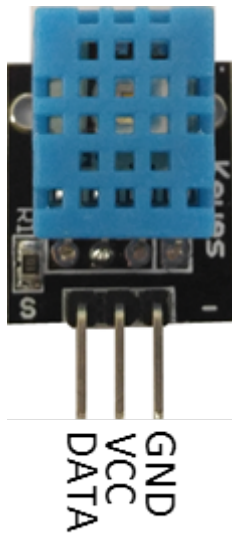


DHT is normally in the sleeping mode. To get the temperature/humidity data, please follow the steps:


1. Awake DHT: Ameba toggles low its DATA pin of GPIO. Now the DATA pin of GPIO serves as digital out to Ameba.
2. DHT response: DHT also toggle low its DATA pin of GPIO. Now the DATA pin of GPIO serves as digital in for Ameba.
3. DHT sends data: DHT sends out the temperature/humidity data (which has size 5 bytes) in a bit by bit manner. To represent each bit, DHT first pull low the DATA GPIO pin for a while and then pull high. If the duration of high is smaller than low, it stands for bit 0. Otherwise it stands for bit 1.

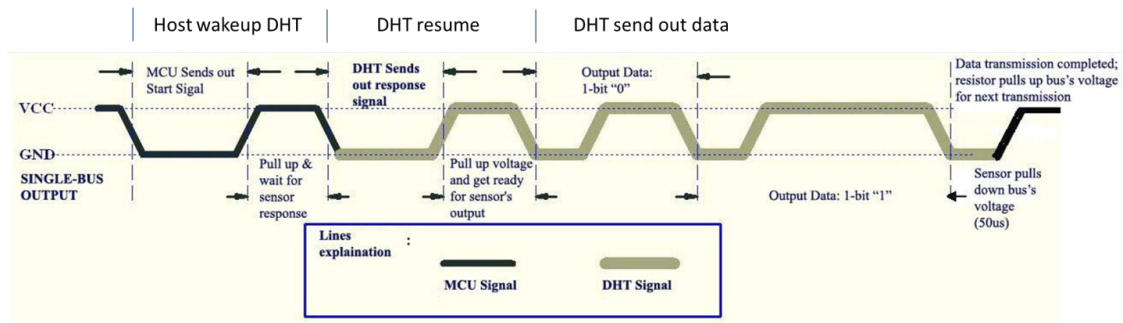

RTL8722DM / RTL8722CSM Wiring Diagram:

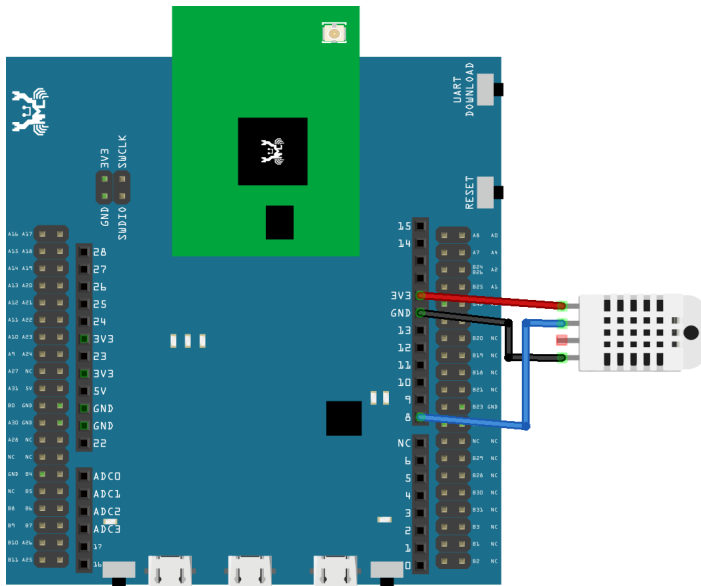

RTL8722DM MINI Wiring Diagram:

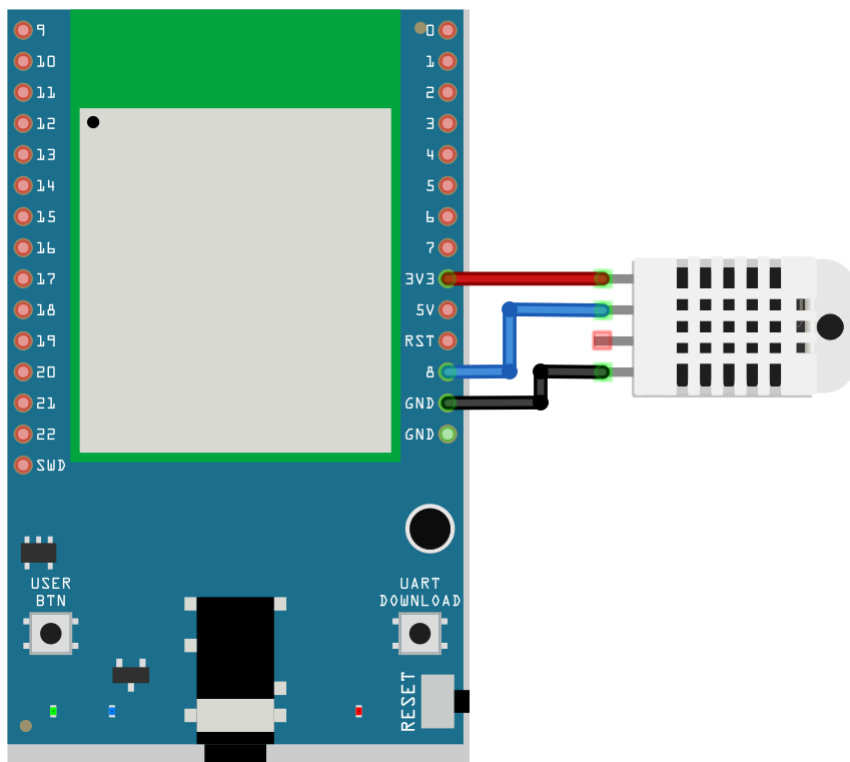

Open the sample code in “Files” -> “Examples” -> “AmebaGPIO” -> “DHT_Tester” . Compile and upload to Ameba, then press the reset button. The result would be shown on the Serial Monitor.

```

COM6
#calibration_ok:[2:19:11]
DHTxx test!
Humidity: 61.00 %      Temperature: 25.00 *C 77.00 *F  Heat index: 25.15 *C 77.27 *F
Humidity: 61.00 %      Temperature: 25.00 *C 77.00 *F  Heat index: 25.15 *C 77.27 *F
Humidity: 61.00 %      Temperature: 25.00 *C 77.00 *F  Heat index: 25.15 *C 77.27 *F
Humidity: 61.00 %      Temperature: 25.00 *C 77.00 *F  Heat index: 25.15 *C 77.27 *F
Humidity: 61.00 %      Temperature: 25.00 *C 77.00 *F  Heat index: 25.15 *C 77.27 *F
Humidity: 61.00 %      Temperature: 25.00 *C 77.00 *F  Heat index: 25.15 *C 77.27 *F
Humidity: 61.00 %      Temperature: 25.00 *C 77.00 *F  Heat index: 25.15 *C 77.27 *F
Humidity: 61.00 %      Temperature: 25.00 *C 77.00 *F  Heat index: 25.15 *C 77.27 *F
Humidity: 61.00 %      Temperature: 25.00 *C 77.00 *F  Heat index: 25.15 *C 77.27 *F
Humidity: 61.00 %      Temperature: 25.00 *C 77.00 *F  Heat index: 25.15 *C 77.27 *F
Humidity: 61.00 %      Temperature: 25.00 *C 77.00 *F  Heat index: 25.15 *C 77.27 *F
Humidity: 61.00 %      Temperature: 25.00 *C 77.00 *F  Heat index: 25.15 *C 77.27 *F
Humidity: 61.00 %      Temperature: 25.00 *C 77.00 *F  Heat index: 25.15 *C 77.27 *F
Humidity: 61.00 %      Temperature: 25.00 *C 77.00 *F  Heat index: 25.15 *C 77.27 *F
Humidity: 61.00 %      Temperature: 25.00 *C 77.00 *F  Heat index: 25.15 *C 77.27 *F
Humidity: 91.00 %      Temperature: 25.00 *C 77.00 *F  Heat index: 25.93 *C 78.68 *F
Humidity: 91.00 %      Temperature: 27.00 *C 80.60 *F  Heat index: 31.27 *C 88.28 *F
Humidity: 91.00 %      Temperature: 27.00 *C 80.60 *F  Heat index: 31.27 *C 88.28 *F
Humidity: 91.00 %      Temperature: 27.00 *C 80.60 *F  Heat index: 31.27 *C 88.28 *F
Humidity: 92.00 %      Temperature: 28.00 *C 82.40 *F  Heat index: 34.46 *C 94.03 *F

```

☒ Autoscroll ☐ Show timestamp Newline 115200 baud Clear output

Code Reference

Use `dht.readHumidity()` read the humidity value, and use `dht.readTemperature()` to read the temperature value.

Every time we read the temperature/humidity data, Ameba uses the buffered temperature/humidity data unless it found the data has expired (i.e., has not been updated for over 2 seconds). If the data is expired, Ameba issues a request to DHT to read the latest data.

GPIO - Use GPIO Interrupt To Control LED

Preparation


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- LED x 1
- Button x 1

Example


In this example, we use a button to trigger interrupt and control the LED. When we press and release the button, the LED dims, press and release the button again, and the LED lights. Note that in the Arduino example “Button and LED”, LED only lights when the button is pressed and hold, when we release the button, the LED dims.

Open the example, “Files” -> “Examples” -> “AmebaGPIO” -> “LED_InterruptCtrl”

RTL8722DM / RTL8722CSM Wiring Diagram:

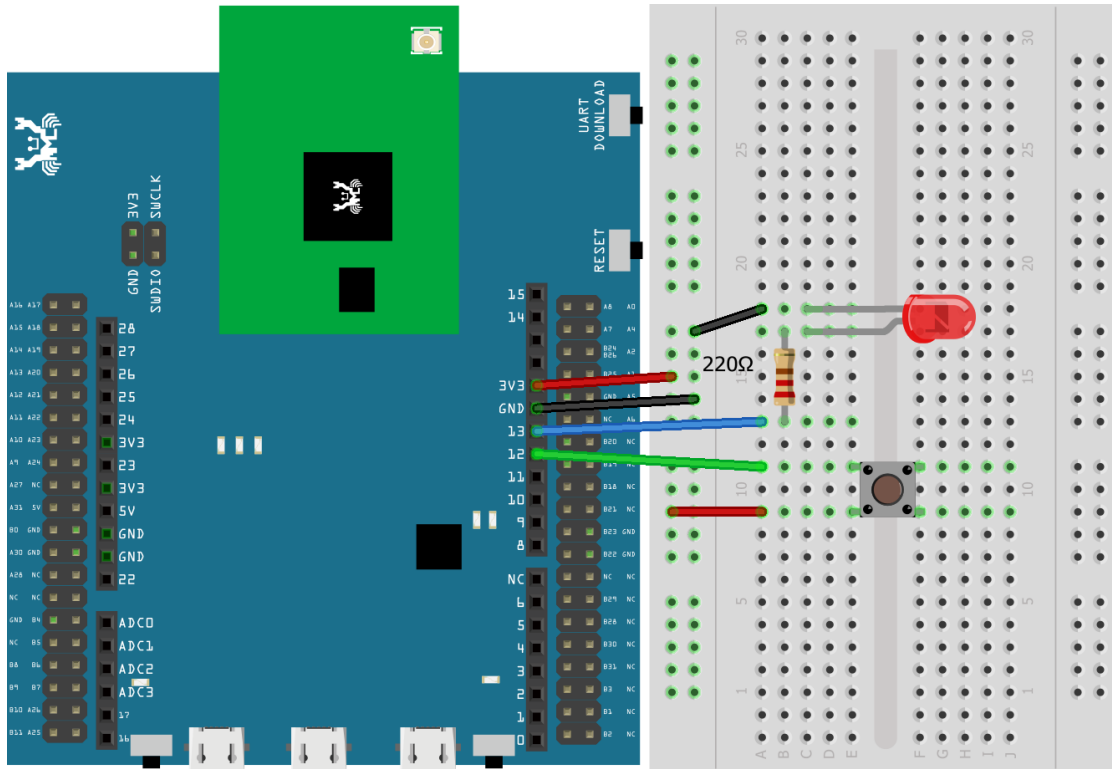

RTL8722DM MINI Wiring Diagram:

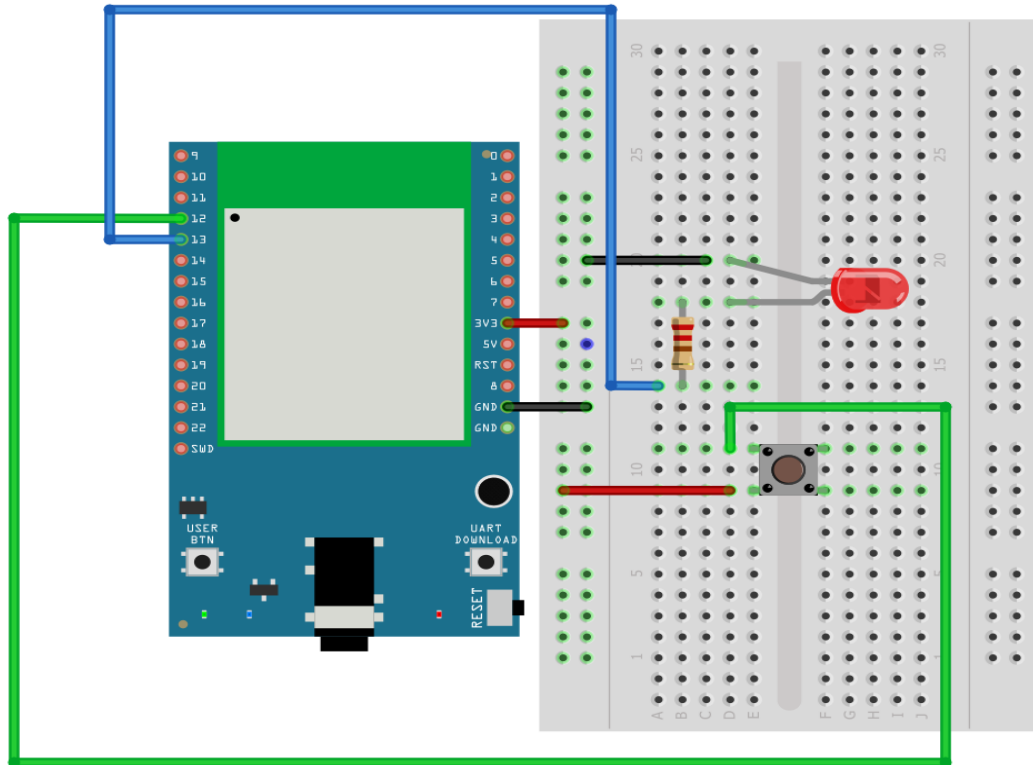

Compile and upload the program, press reset.

The LED lights at first. Press and release the button, then the LED should dim. Press again, then the LED should light.

Code Reference

In

```
setup()
```

we set Pin 12 to

```
INPUT_IRQ_RISE
```

, this means that an interrupt occurs when the voltage of this pin changes from GND to 3V3. Therefore, we connect the other side of the button to 3V3, so as to trigger interrupt event when the button is pressed.

```
pinMode(button, INPUT_IRQ_RISE);
```

On the other hand, we can set pin 12 to

```
INPUT_IRQ_FALL
```

, this means that an interrupt occurs when the voltage of this pin changes from 3V3 to GND. In this case, the other side of the button is connected to GND. Next, we need to specify the function to be executed to handle the interrupt:

```
digitalSetIrqHandler(button, button_handler);
```

The second parameter is a function pointer, with prototype:

```
void button_handler(uint32_t id, uint32_t event)
```

In this handler, every time we press and release the button, we trigger an interrupt, and change the status of the LED.

PWM –Play Music


Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Buzzer x 1

Example

A sound is composed of volume, tone and timbre. Volume is determined by the amplitude of the sound wave. Tone is determined by the frequency of the sound wave. Timbre is determined by the waveform of the sound wave.


In this example, we use PWM to control the buzzer to emit sound with desired tone. As PWM outputs square wave, if we wish to emit tone C4 (frequency=262Hz), we have to make PWM to output square wave with wavelength $1/262 = 3.8\text{ms}$:

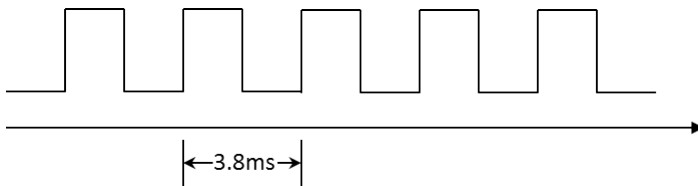


We use PWM to output sound wave with different frequency, so as to play music by the buzzer.

Connect the buzzer to the PWM output pin shown in the following diagrams.

RTL8722DM / RTL8722CSM Wiring Diagram:

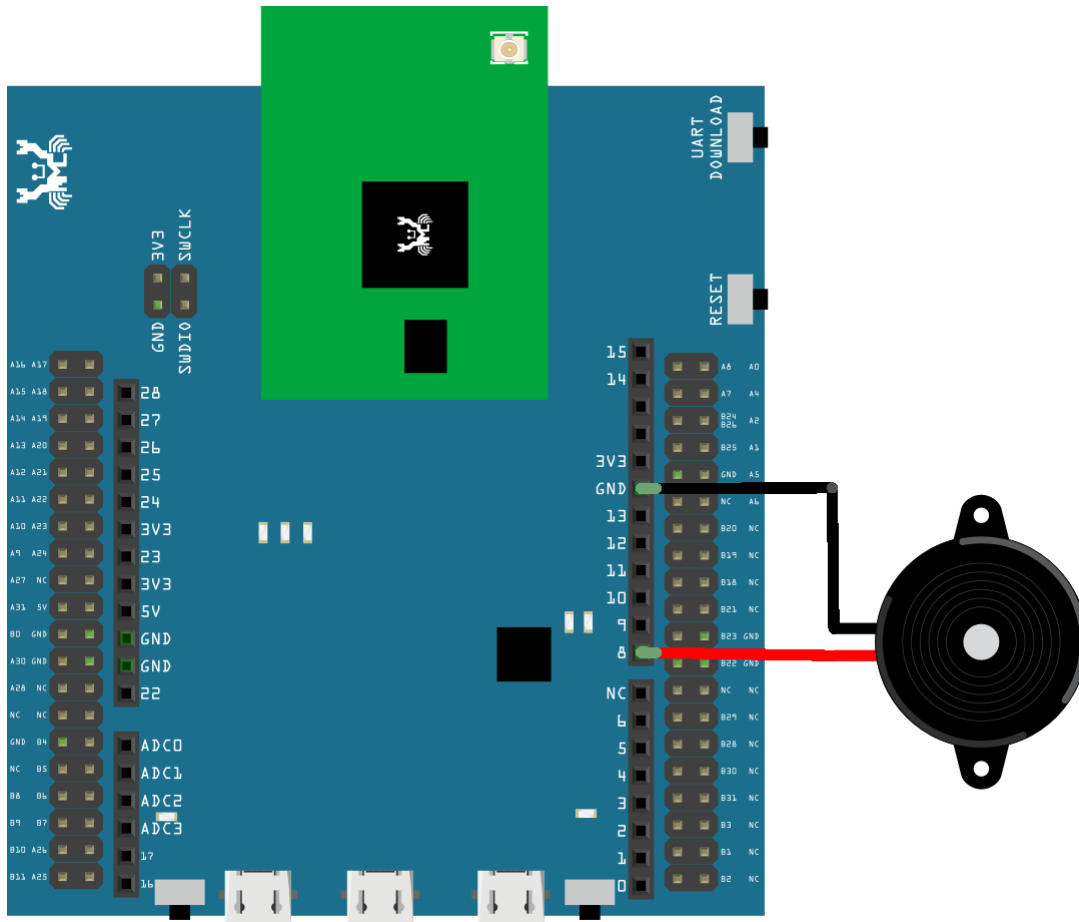

RTL8722DM MINI Wiring Diagram:

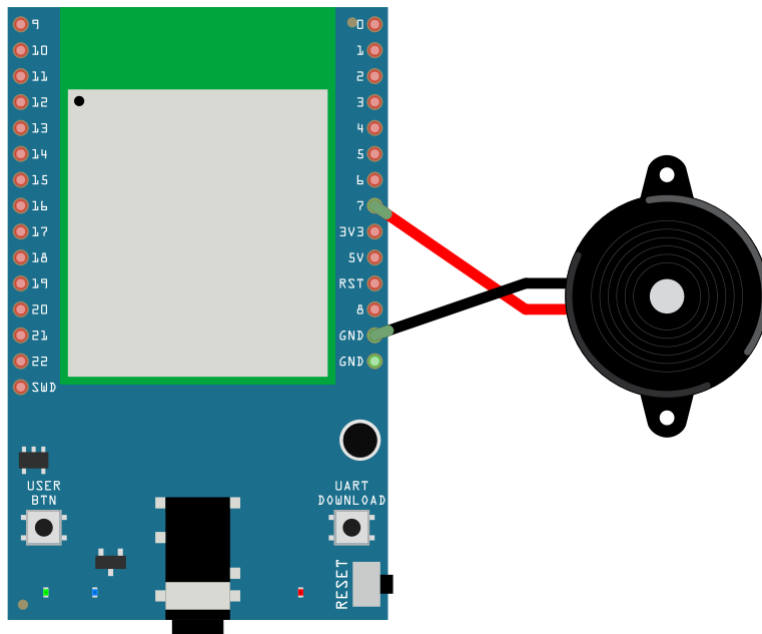

Open the example code in “Examples” -> “AmebaAnalog” -> “TonePlayMelody”

Compile and upload to Ameba, press the reset button. Then you can hear the buzzer playing music.

Code Reference

Ameba implement the tone() and noTone() API of Arduino:

<https://www.arduino.cc/en/Reference/Tone>

<https://www.arduino.cc/en/Reference/NoTone>

In the sample code, we initiate a melody array, which stores the tones to make. Another array, noteDurations, contains the length of each tone, 4 represents quarter note (equals to $3000\text{ms}/4 = 750\text{ms}$, and plus an extra 30% time pause), 8 represents eighth note.

PWM –Using A Servo

Preparation


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Servo x 1 (Ex. Tower Pro SG90)

Example


A typical servo has 3 wires, the red wire is for power, black or brown one should be connected to GND, and the other one is for signal data. We use PWM signal to control the rotation angle of the axis of the servo. The frequency of the signal is 50Hz, that is length 20ms. Each servo defines its pulse bandwidth, which is usually 1ms~2ms.

To control the rotation angle, for example if 1ms-length pulse rotates the axis to degree 0, then 1.5 ms pulse rotates the axis to 90 degrees, and 2 ms pulse rotates the axis to 180 degrees. Furthermore, a servo defines the “dead bandwidth”, which stands for the required minimum difference of the length of two consecutive pulse for the servo to work.

RTL8722DM / RTL8722CSM Wiring Diagram:

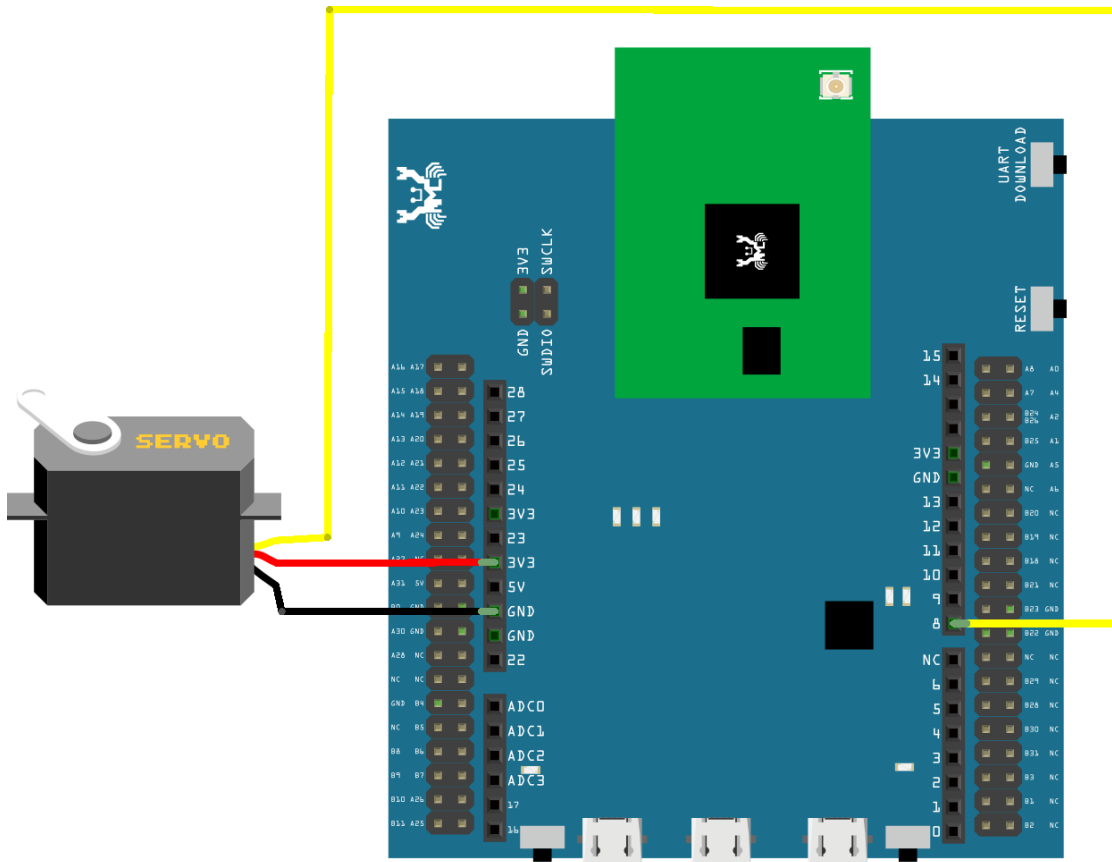

RTL8722DM MINI Wiring Diagram:

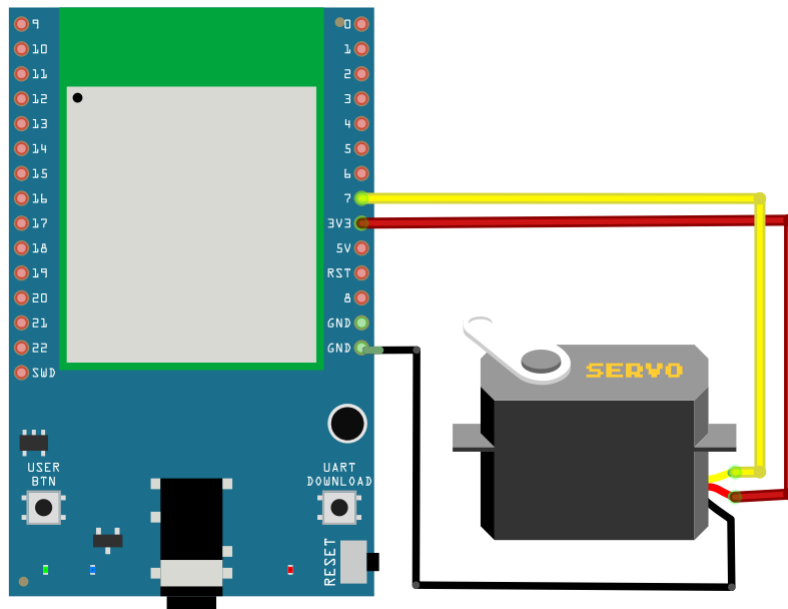

Open the example, “File” -> “Examples” -> “AmebaAnalog” -> “ServoSweep”

This example makes the servo to rotate from degree 0 to 180, and then rotate back to degree 0.

Code Reference

The Servo API of Ameba is similar to the API of Arduino. To distinguish from the original API of Arduino, we name the header file “AmebaServo.h” and the Class “AmebaServo”, the usage is identical to the Arduino API.

The default pulse bandwidth of Arduino Servo is 0.5ms~2.4ms, which is the same as Tower Pro SG90. Therefore, we set the attached pin directly:

```
myservo.attach(9);
```

Next, rotate the axis to desired position:

```
myservo.write(pos);
```

I2C - Communicate with Arduino UNO via I2C

Introduction of I2C

There are two roles in the operation of I2C, one is “master”, the other is “slave”. Only one master is allowed and can be connected to many slaves. Each slave has its unique address, which is used in the communication between master and the slave. I2C uses two pins, one is for data transmission (SDA), the other is for the clock (SCL). Master uses the SCL to inform slave of the upcoming data transmission, and the data is transmitted through SDA. The I2C example was named “Wire” in the Arduino example.

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Arduino UNO x 1

Example


In this example, we use Ameba as the I2C master writer, and use Arduino as the I2C slave receiver.

When the I2C slave receives string sent from I2C master, it prints the received string.

- Setting up Arduino Uno to be I2C Slave

First, select Arduino in the Arduino IDE in “Tools” -> “Board” -> “Arduino Uno”

Open the “Slave Receiver” example in “Examples” -> “Wire” -> “slave_receiver” :

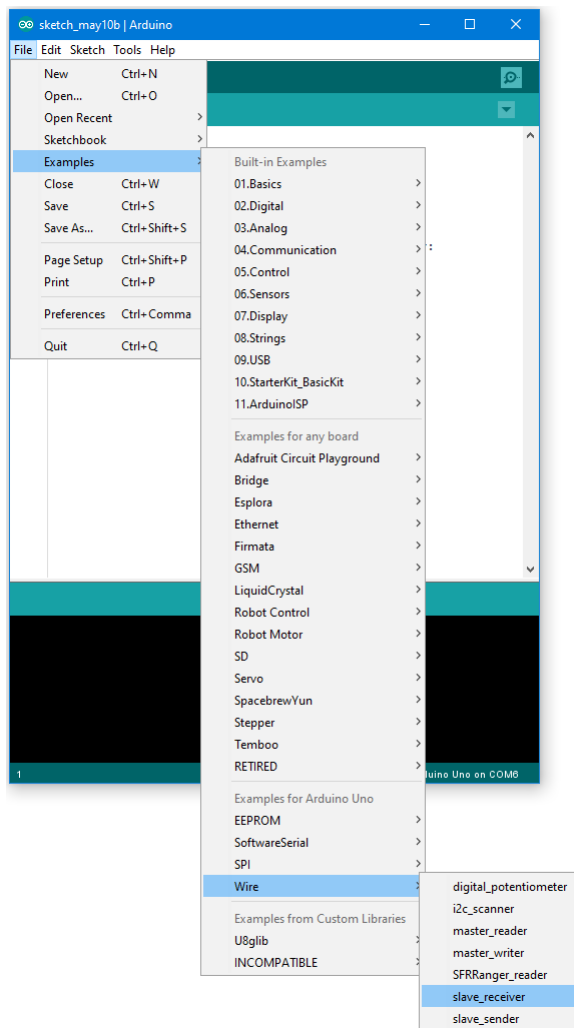


Then click “Sketch” -> “Upload” to compile and upload the example to Arduino Uno.

- Setting up Ameba to be I2C Master

Next, open another window of Arduino IDE, make sure to choose your Ameba development board in the IDE:

“Tools” -> “Board”

Then open the “Master Writer” example in “File” -> “Examples” -> “AmebaWire” -> “MasterWriter”

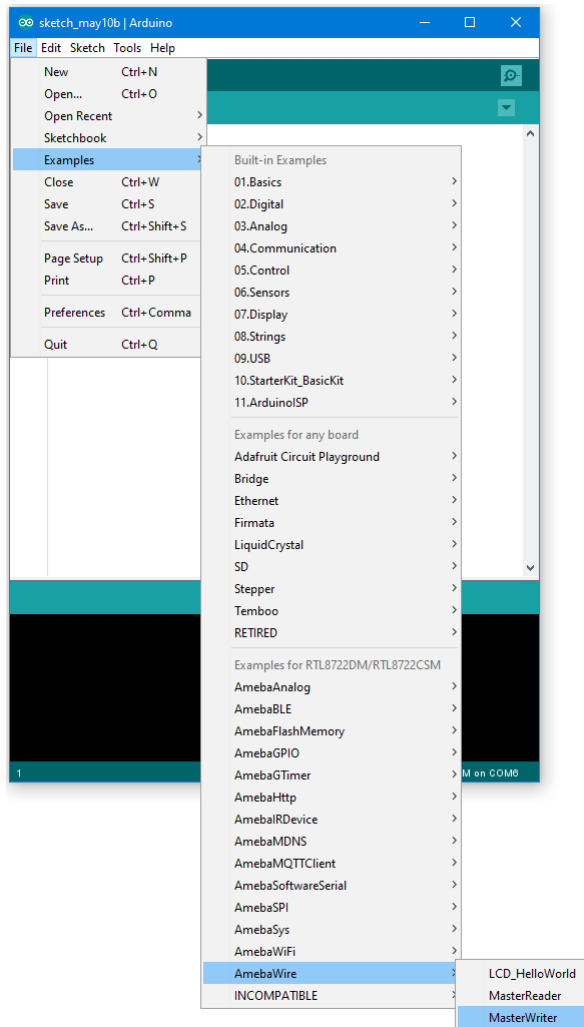


- Wiring


The Arduino example uses A4 as the I2C SDA and A5 as the I2C SCL.

Another important thing is that the GND pins of Arduino and Ameba should be connected to each other.

RTL8722DM / RTL8722CSM Wiring Diagram:

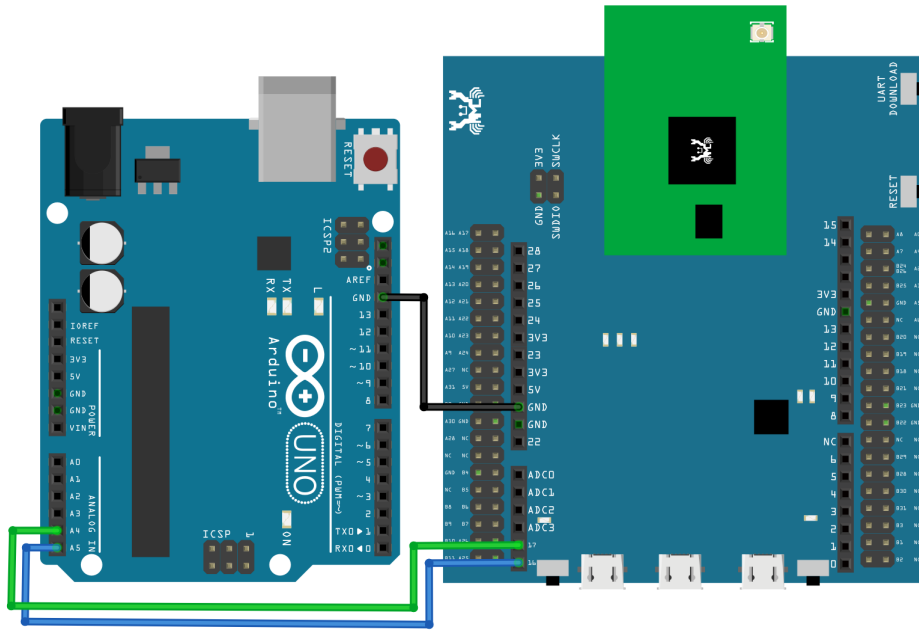

RTL8722DM MINI Wiring Diagram:

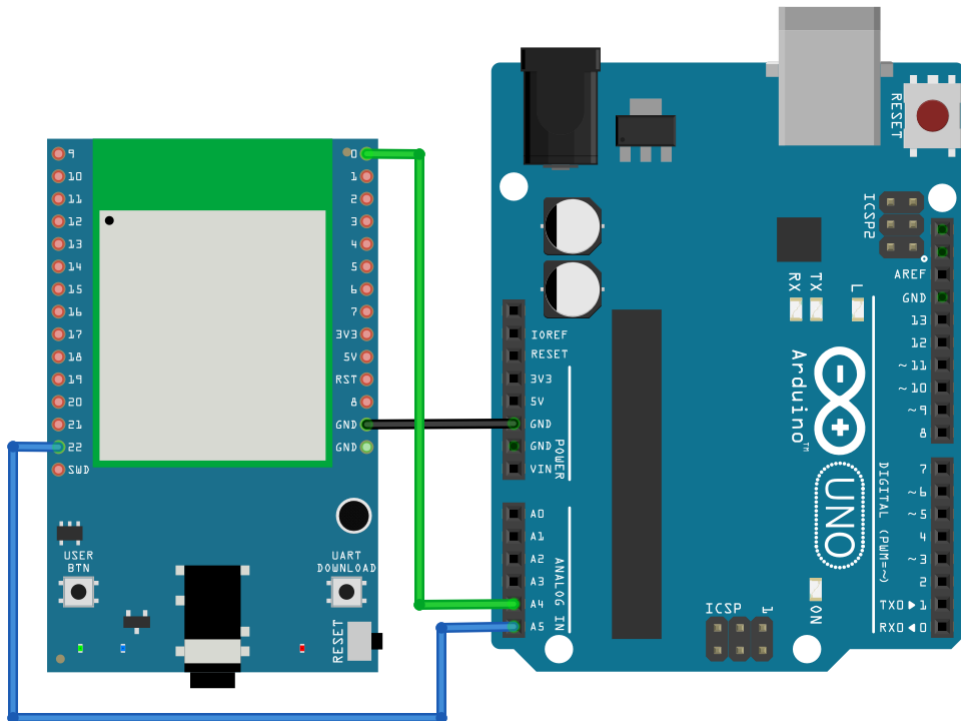


Open the Arduino IDE of the Arduino Uno and open the serial monitor (“Tools” -> “Serial Monitor”).

In the Serial Monitor, you can see the messages printed from Arduino Uno.

Next, press the reset button on Arduino Uno. Now the Arduino Uno is waiting for the connection from I2C Master.

We press the reset button on Ameba to start to send messages. Then observe the serial monitor, you can see the

messages show up every half second.

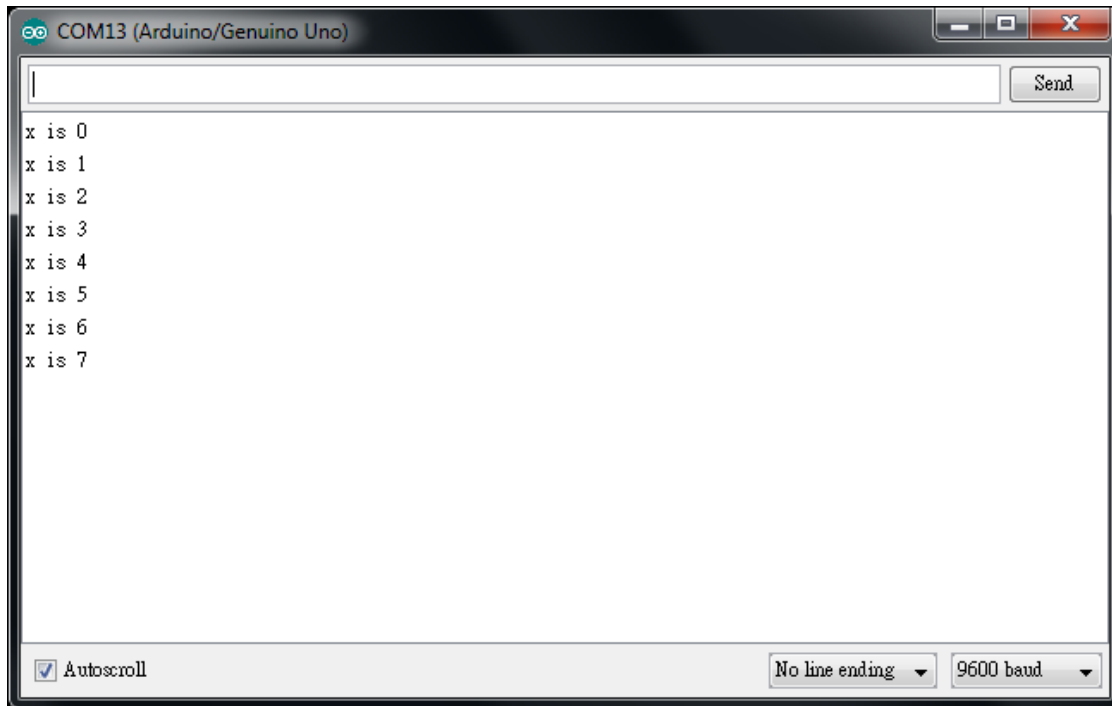

Code Reference

You can find detailed information of this example in the documentation of Arduino:

<https://www.arduino.cc/en/Tutorial/MasterWriter>

First use `Wire.begin()/Wire.begin(address)` to join the I2C bus as a master or slave, in the Master case the address is not required.

<https://www.arduino.cc/en/Reference/WireBegin>

Next, the Master uses `Wire.beginTransmission(address)` to begin a transmission to the I2C slave with the given address:

<https://www.arduino.cc/en/Reference/WireBeginTransmission>

Uses `Wire.write()` to send data, and finally use `Wire.endTransmission()` to end a transmission to a Slave and transmits the bytes that were queued:

<https://www.arduino.cc/en/Reference/WireEndTransmission>


I2C - Display Data On LCD Screen

Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- I2C 2×16 LCD


Example

Normally there are many pins on an LCD display, as shown in below figure.

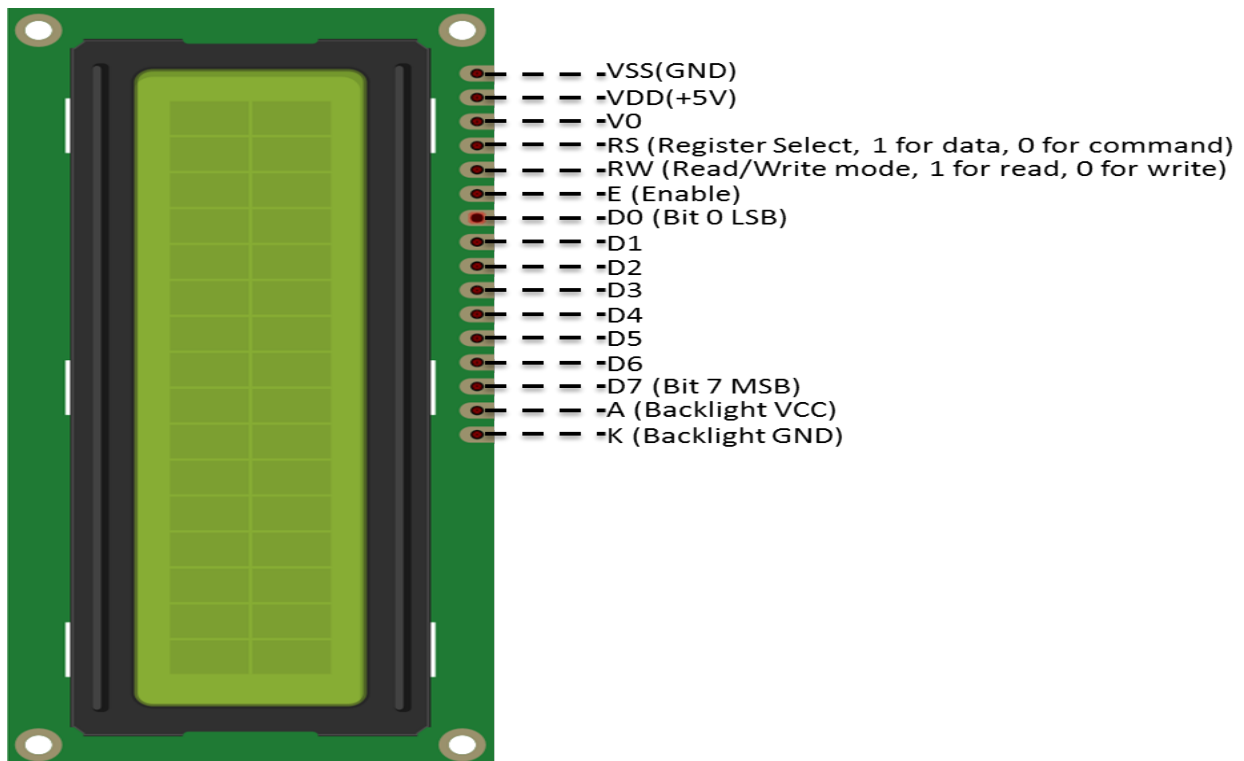


An LCD display can be equipped with an additional processing chip to process the data. The processing chip can connect to a microcontroller using the I2C interface.

RTL8722DM / RTL8722CSM Wiring Diagram:

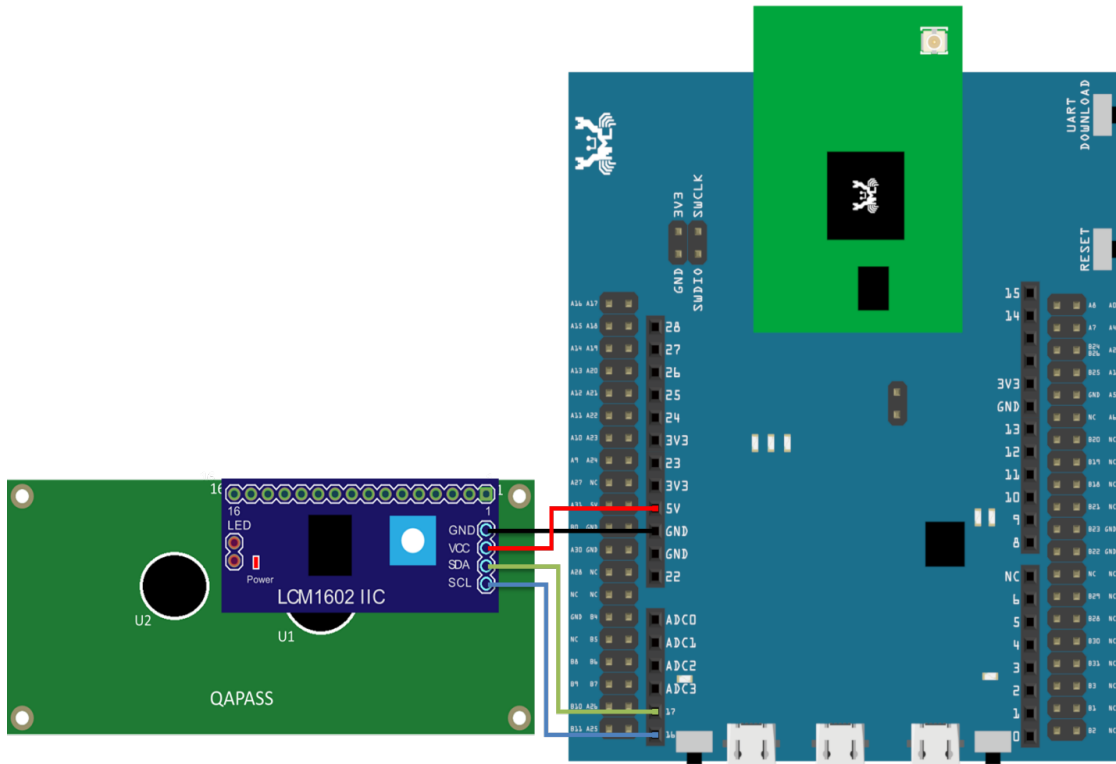

RTL8722DM MINI Wiring Diagram:

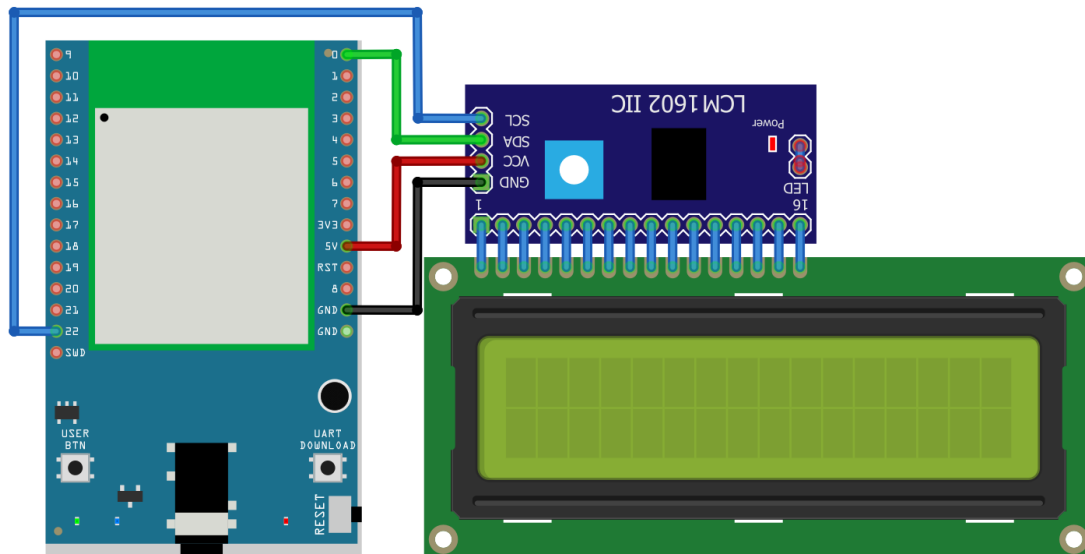


Open the example in “File” -> “Examples” -> “AmebaWire” -> “LCD_HelloWorld” .
 Compile and upload to Ameba, then press the reset button.

Then you can see “Hello World” in the first line, and “Ameba” in the second line displayed on the LCD screen.



After 8 seconds, you can input to the Serial Monitor the string you would like to display on the LCD.

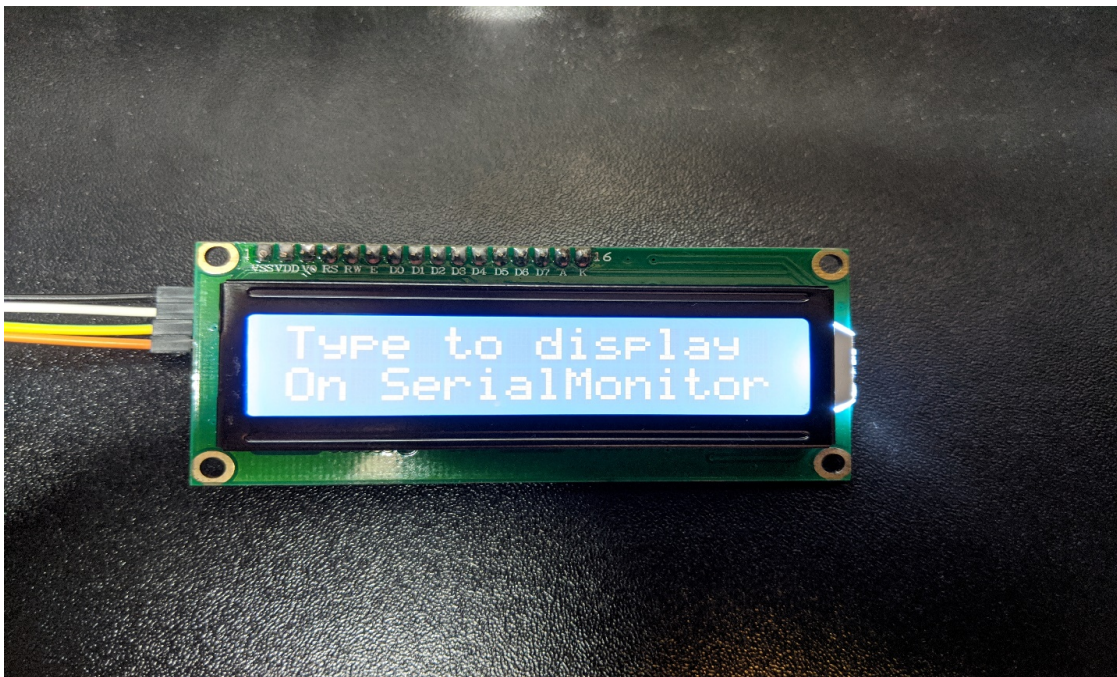

For example, we enter “123456789” and press “Send” :



Code Reference

The required settings of each model of LCD might be different, the constructor we use in this example is:

```
LiquidCrystal_I2C(uint8_t lcd_Addr, uint8_t En, uint8_t Rw, uint8_t Rs,
                  uint8_t d4, uint8_t d5, uint8_t d6, uint8_t d7,
                  uint8_t backlighPin, t_backlighPol pol);
```

And the setting parameters are as follows:

```
LiquidCrystal_I2C lcd(0x27, 2, 1, 0, 4, 5, 6, 7, 3, POSITIVE); // Set the LCD I2C_
↪address
```

The first parameter 0x27 is the address of I2C. Each of the following 8 parameters represents the meaning of each bit in a byte, i.e., En is bit 2, Rw is bit 1, Rs is bit 0, d4 is bit 4, and so forth.

Call `backlight()` to light the screen,

Call `setCursor(0, 0)` to set the position of the cursor.

LCD inherits the Print class, so we can use `lcd.print()` to output string on the screen.

I2C - Use I2C to receive data from Arduino UNO

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Arduino UNO x 1

Example


In the previous example “[I2C –Communicate with Arduino UNO via I2C](#)” , Ameba, the I2C master, transmits data to the Arduino UNO, the I2C slave.

As to this example, Ameba is the I2C master, and receives data from the Arduino UNO, which is the I2C slave.

- **Setting up Arduino Uno to be I2C Slave**

First, select Arduino in the Arduino IDE in “Tools” -> “Board” -> “Arduino Uno” :

Open “Examples” -> “Wire” -> “slave_sender”

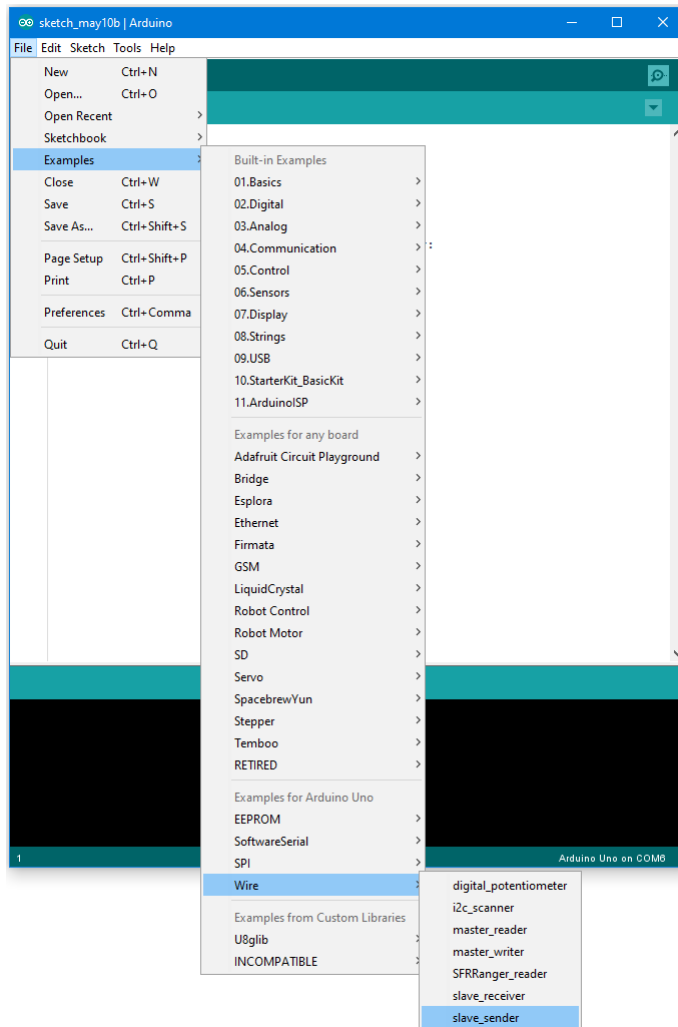


Then click “Sketch” -> “Upload” to compile and upload the example to Arduino Uno.

- **Setting up Ameba to be I2C Master**

Next, open another window of Arduino IDE, make sure to choose your Ameba development board in the IDE: “Tools” -> “Board”

Open “File” -> “Examples” -> “AmebaWire” -> “MasterReader”

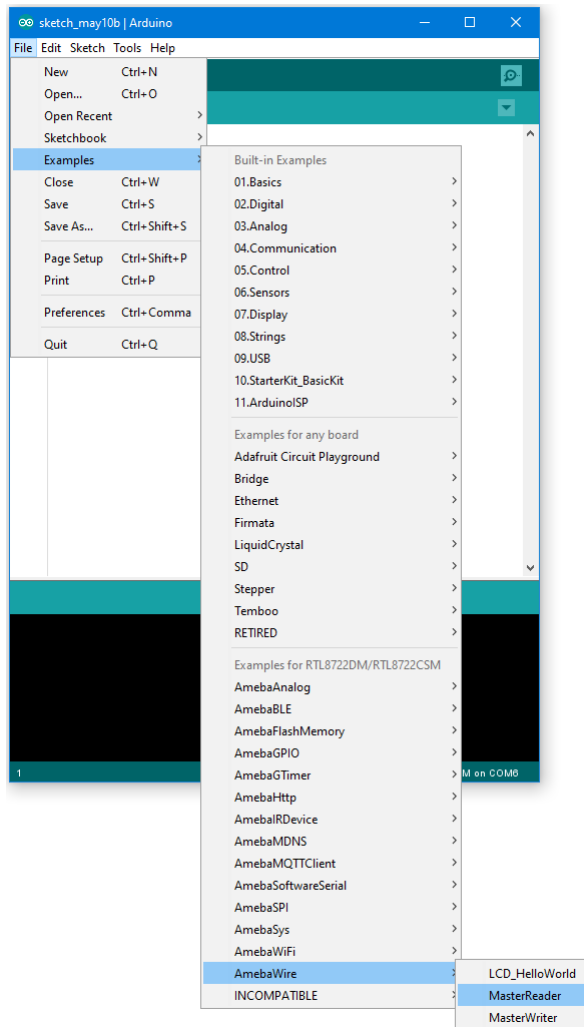


Click “Sketch” -> “Upload” to compile and upload the example to Ameba.

- **Wiring**


The Arduino example uses A4 as the I2C SDA and A5 as the I2C SCL.

Another important thing is that the GND pins of Arduino and Ameba should be connected to each other.

RTL8722DM / RTL8722CSM Wiring Diagram:

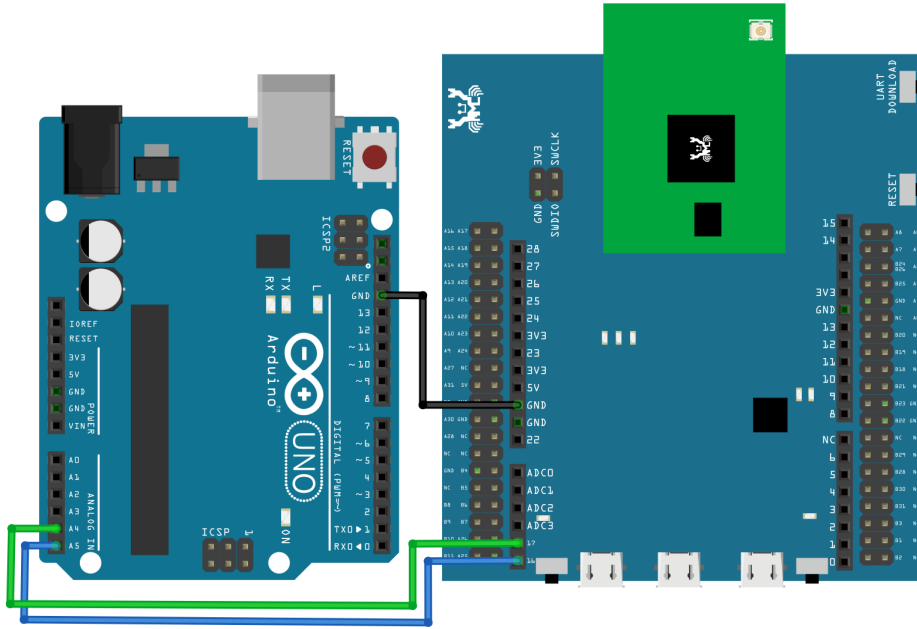


RTL8722DM MINI Wiring Diagram:

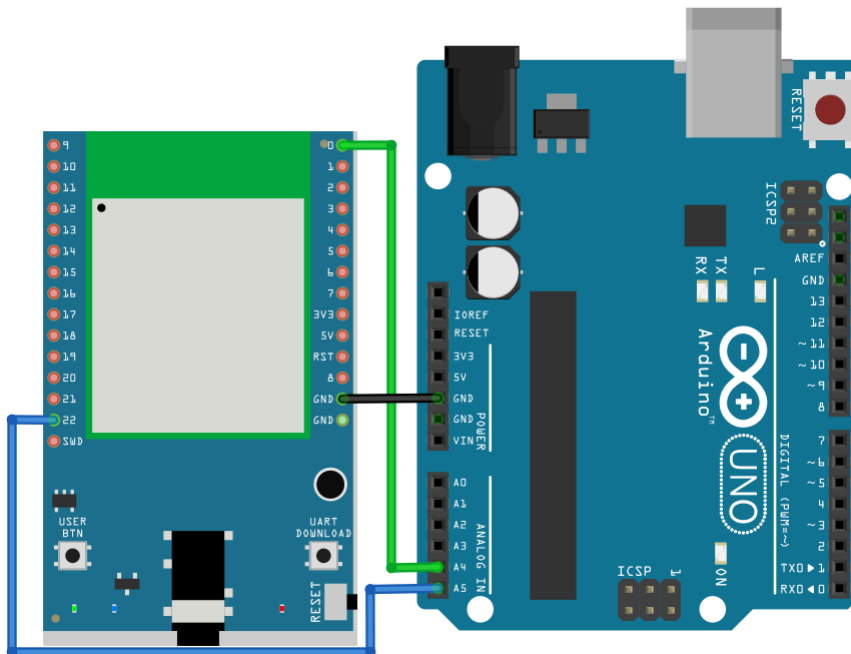

Next, we will observe the data receive by Ameba in the Serial Monitor.

(Note: If you do not know which port the Ameba development board is connected to, please find it in the Device Manager of Windows first. Ameba is connected as “mbed Serial Port”. For example, if you find mbed Serial Port (COM15) means Ameba is connected to port COM15.)

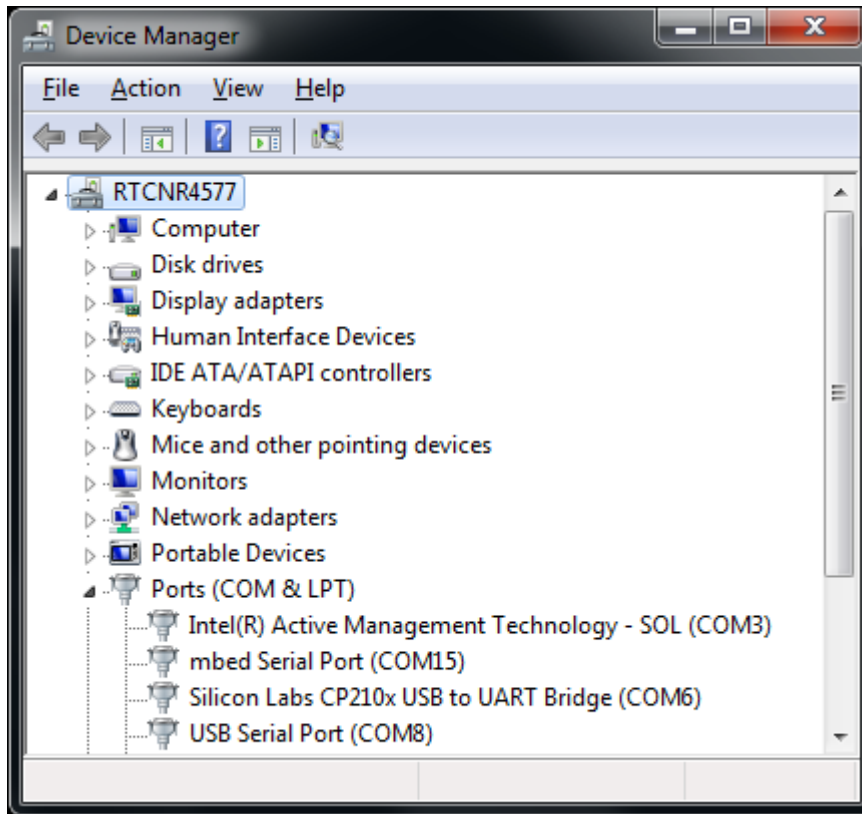


We select the port in “Tools” -> “Port” -> “COM15” (the port connected to Ameba)

Open the Arduino IDE window of the Ameba, go to “Tools” -> “Serial Monitor” to display the messages printed by Ameba.

Press the reset button on Arduino Uno, Arduino Uno now waits for connection from I2C master.

Then press the reset button on Ameba, Ameba will start to receive messages from Arduino Uno. And you can see the “hello ” message printed every half second in serial monitor.

(NOTE: If the message does not show in the Serial Monitor of Ameba, please close and open the serial monitor again.)

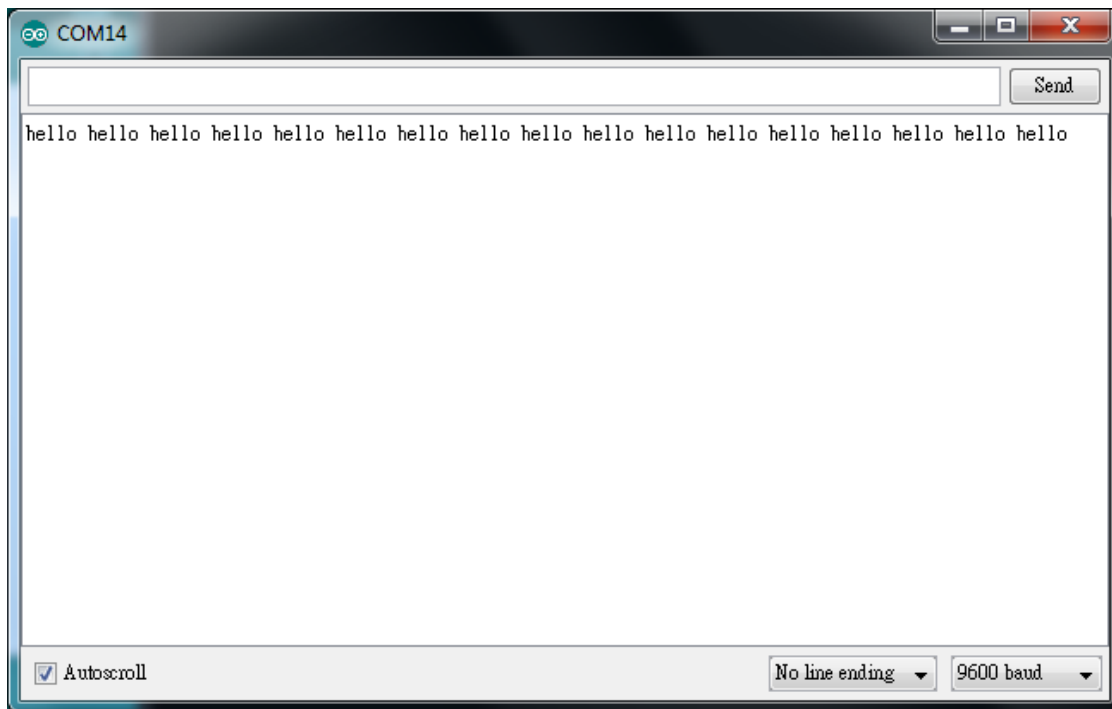

Code Reference

You can find detailed information of this example in the documentation of Arduino:

<https://www.arduino.cc/en/Tutorial/MasterReader>

First use `Wire.begin()` / `Wire.begin(address)` to join the I2C bus as a master or slave, in the Master case the address is not required.

<https://www.arduino.cc/en/Reference/WireBegin>

Next, the Master uses `Wire.requestFrom()` to specify from which Slave to request data.

<https://www.arduino.cc/en/Reference/WireRequestFrom>

UART - Communicate with the computer via UART

Introduction of UART

UART uses two wire, one for transmitting and the other one for receiving, so the data transmission is bidirectional. The communication uses a predefined frequency (baud rate) to transmit data. In Arduino, UART is called “Serial” . There is only one hardware UART on Arduino Uno and it is primarily used to read the log and messages printed by Arduino (so it is also called “Log UART”). If we use the hardware UART for other purposes, the Log UART does not have resources to function. To provide more UART connections, it is possible to use a GPIO pin to simulate the behavior of UART with a software approach, this is called Software Serial. Ameba is equipped with several hardware UART ports, but it is also compatible with the Software Serial library.

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- USB to TTL Adapter x 1

Example


In this example, we use UART to connect USB to TTL adapter to Ameba.

USB to TTL adapter sends data to Ameba, the data would be returned by Ameba, and showed on the screen.

- **Install USB to TTL Adapter**


USB to TTL adapter converts USB to serial interface. Normally, there are at least 4 pins on the adapter, that is 3V3 (or 5V), GND, TX and RX. Generally, installing the driver for the USB to TTL adapter would be required before using it. If the adapter uses the chip of FTDI, Windows will search and install the driver automatically, otherwise, you may need to install corresponding driver yourself.

Afterwards, open device manager. You can find corresponding serial port number of the USB to TTL adapter:

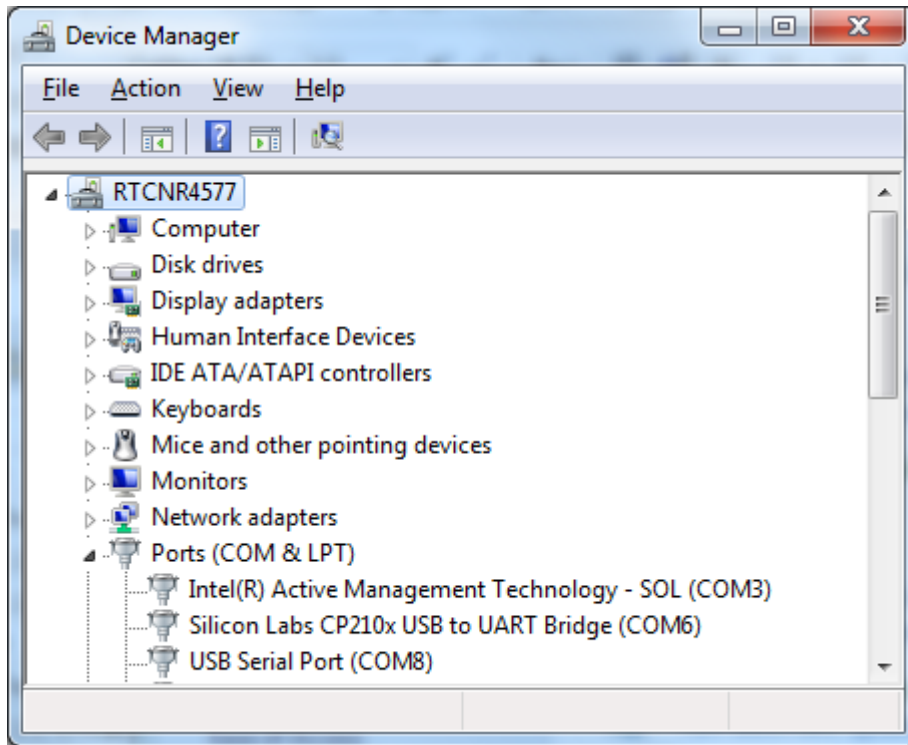


- Executing the Example

Open the “SoftwareSerialExample” example in “File” -> “Examples” -> “AmebaSoftwareSerial”
-> “SoftwareSerial_Basic” :

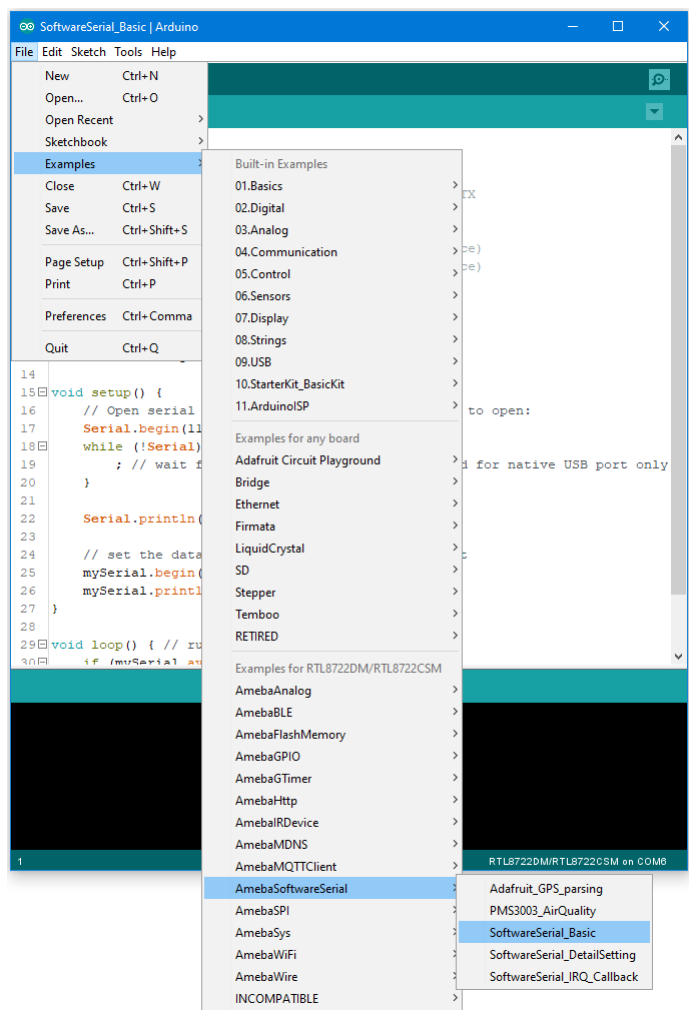


Connect the wire as the following diagrams show. The TX pin of USB to TTL adapter is connected to the RX of Ameba, and the RX pin of USB to TTL adapter is connected to the TX of Ameba.


RTL8722DM / RTL8722CSM Wiring Diagram:

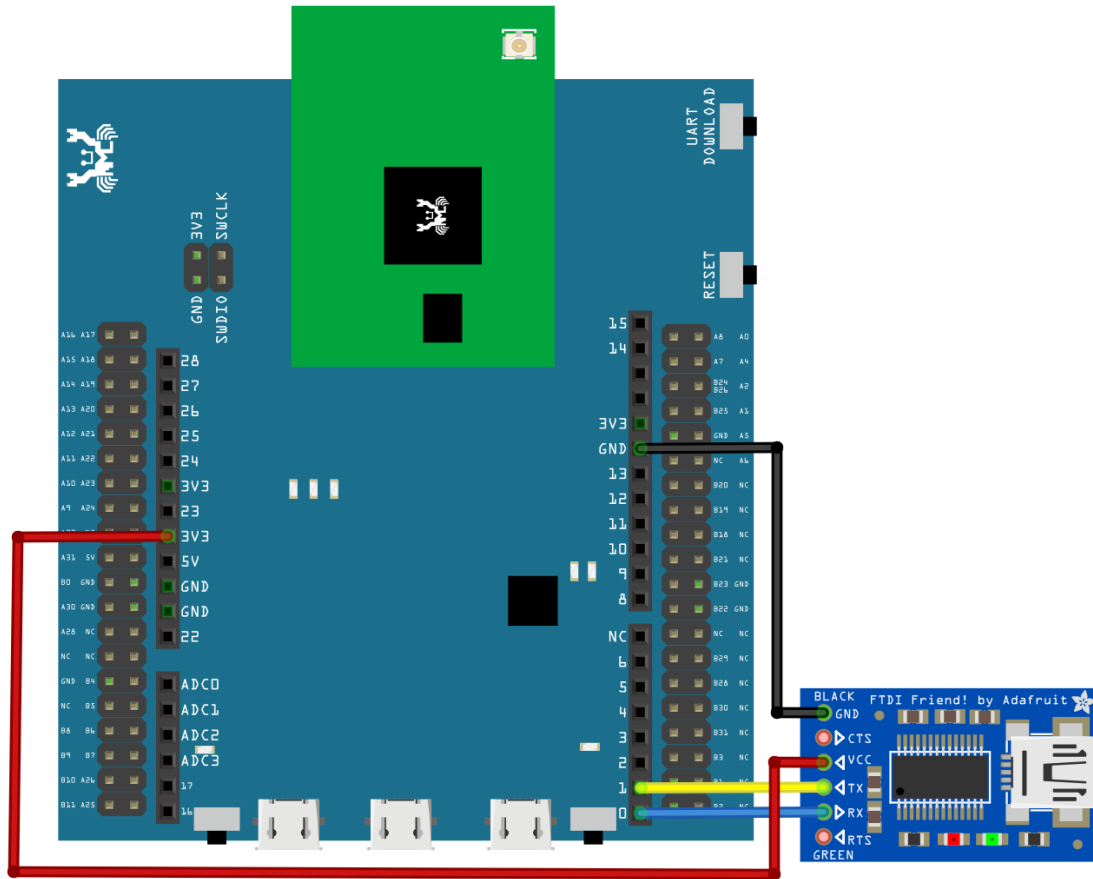


RTL8722DM MINI Wiring Diagram:

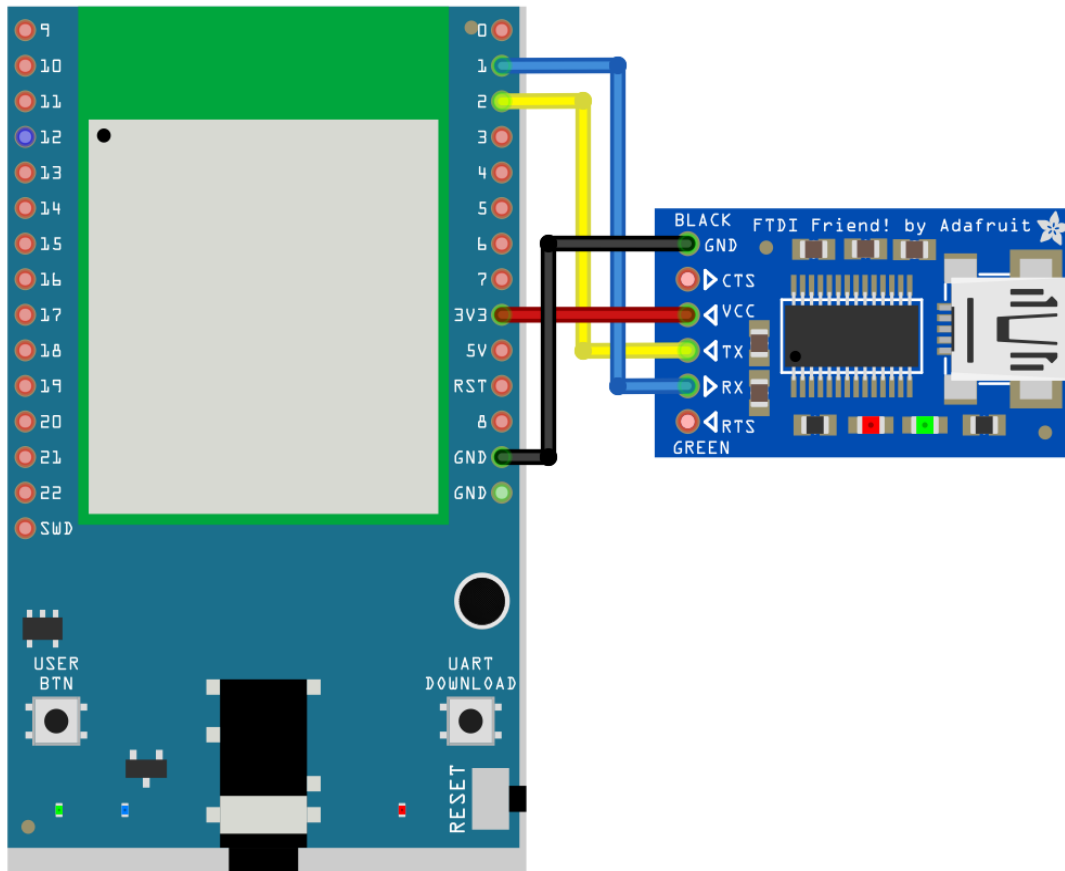


Next, open a serial port terminal, such as Putty or Tera Term. (Putty is used in this example). Open the Putty window, choose “Serial” in connection type, and specify the port number of the USB to TTL adapter (e.g. COM8). In the speed field, fill in the baud rate of this connection. Note that both sides of the connection should use the same baud rate. In this example we set baud rate 4800.

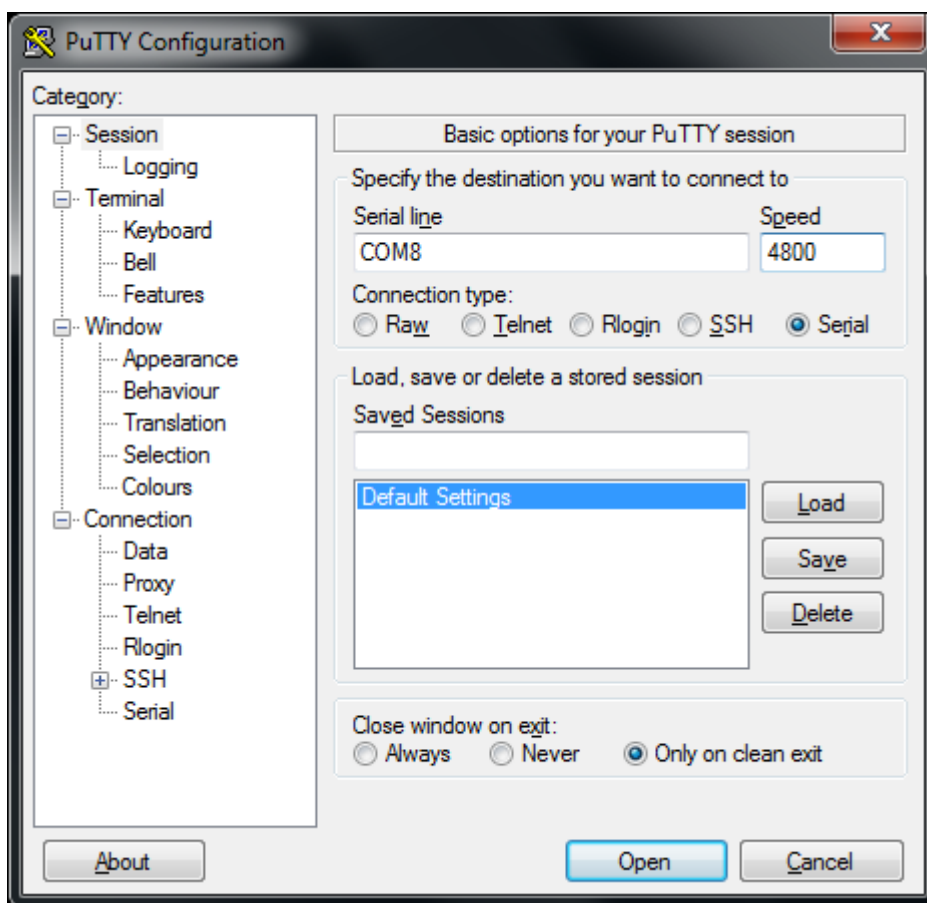

Next, select “Serial” on the left side. Set data bits to 8, stop bits to 1, parity to none, and flow control to none.

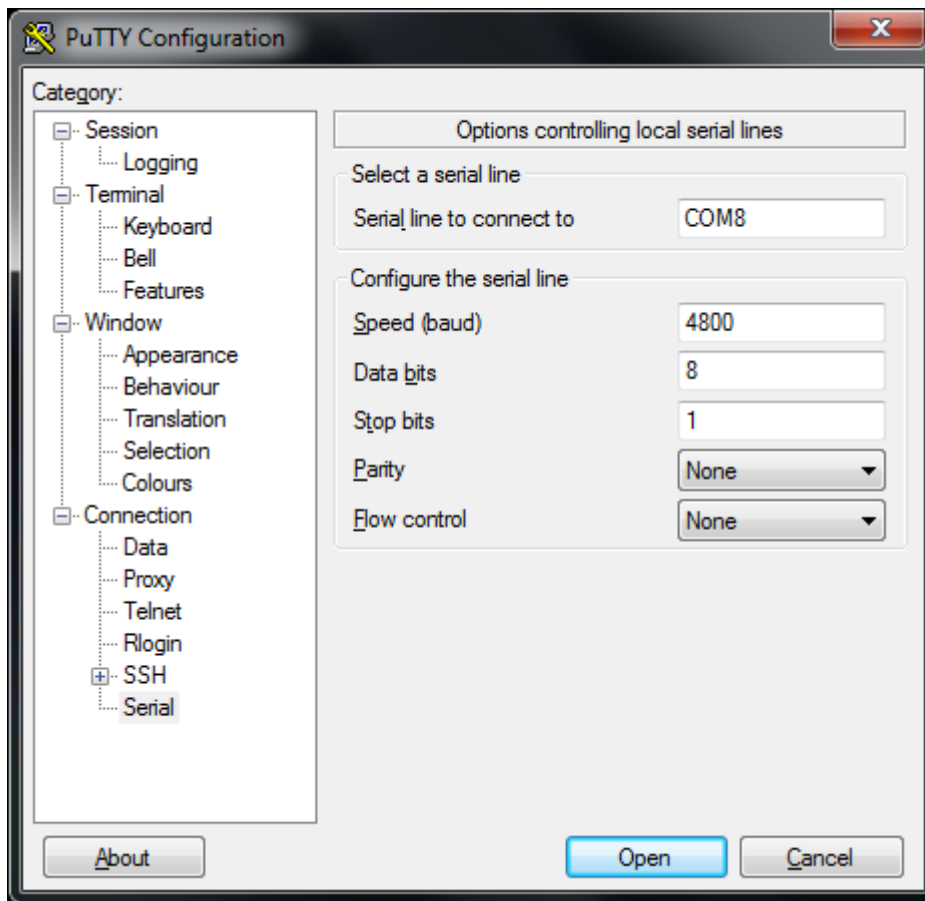

Then click Open and press the reset button on Ameba. You can see the “Hello, world?” message appears in Putty. If characters are typed into Putty, the input characters would be sent to Serial RX of Ameba by TX of USB to TTL Adapter, and returned by Serial TX of Ameba. Finally, RX of USB to TTL Adapter receives the returned characters and prints them in Putty. Therefore, if you insert “I am fine”, you will get something like this:

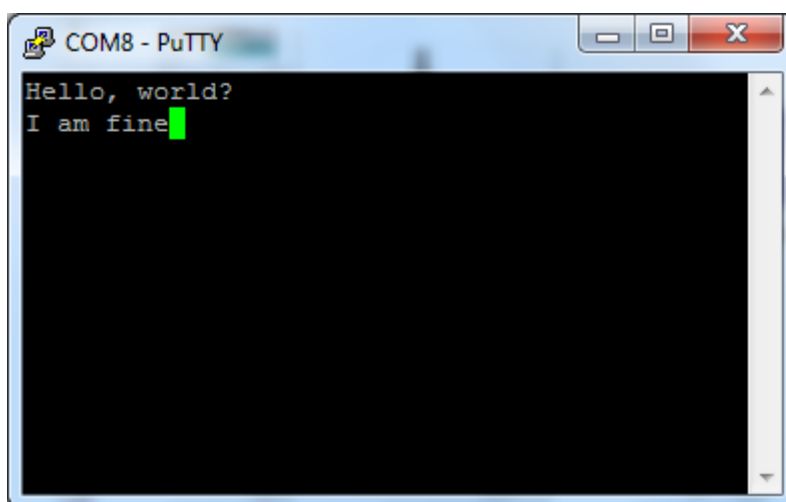

Code Reference

First, use `SoftwareSerial:begin(speed)` to set the baud rate for the serial communication:

<https://www.arduino.cc/en/Reference/SoftwareSerialBegin>

Use `write()` to send data, and use `SoftwareSerial:available()` to get the number of bytes available for reading from a software serial port:

<https://www.arduino.cc/en/Reference/SoftwareSerialAvailable>

If there are data available to read, use `read()` to read from serial port.

UART - Retrieve GPS Position


Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Adafruit Ultimate GPS Breakout x 1 (Refer to official document)


Example

In this example, we use Adafruit Ultimate GPS Breakout. Its data format is pure text, so we can connect it to USB to TTL Adapter and observe the out-

put.

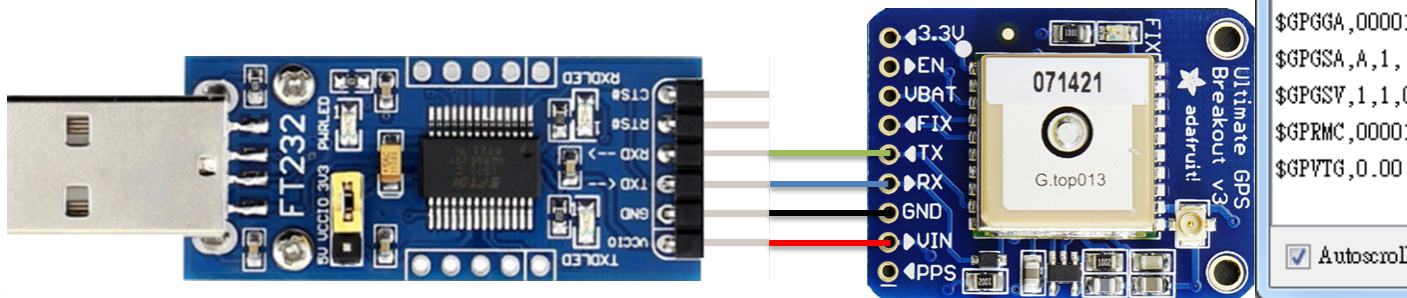

It follows the NMEA sentence format (refer to <http://aprs.gids.nl/nmea/>) The GPS signal is weak in indoor environment. The status that the GPS signal is not received is called “not fix”. Bring the GPS module outdoors, when the GPS signal is “fix”, you would get message similar to the figure below.

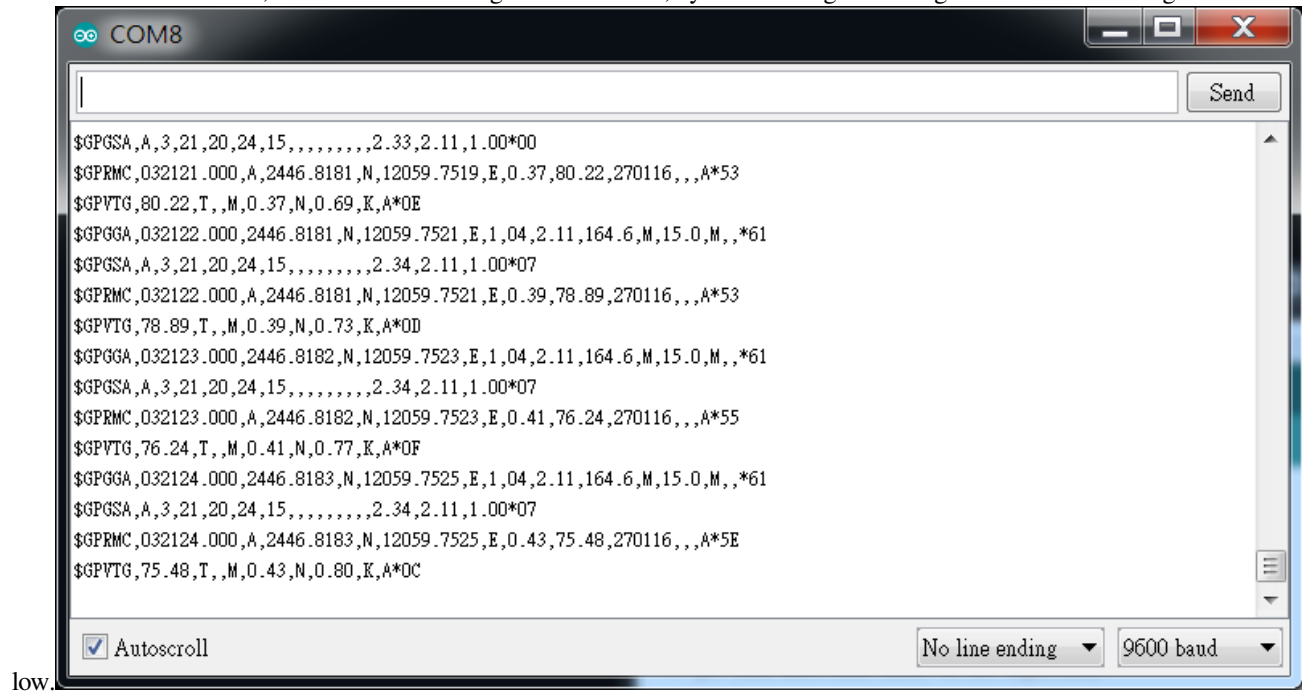

In this example we are only interested in the “\$GPRMC (Global Positioning Recommended Minimum Coordinates)” :
\$GPRMC,032122.000,A,2446.8181,N,12059.7251,E,0.39,78.89,270116,,,A*53

Each field is separated by a comma.


- First field is the GMT time (Greenwich Mean Time), that is 032122.000 in this example. The time format is HH:MM:SS.SSS, i.e., 03:21:22.000. Note that the time zone and the daylight-saving time adjustment should be handled on your own.
- Second field represents the status code
 - V: Void (Invalid)
 - A: Active, meaning the GPS signal is fix.
- The third to sixth fields represent the geolocation

In this example, 2446.8181,N represents 24 degrees 46.8181 minutes north latitude, and 12059.7251,E represents 120 degrees 59.7251 minutes east longitude.


We can search **+24 46.8181'** , **+120 59.7251'** in Google map to check whether the position is cor-



- The seventh field is relative speed(knot). 1 knot = 1.852km/hr, in this example the relative speed is 0.39 knot.
- The eighth field is the moving angle, which is calculated by its moving orbit.
- The ninth field is the date with format ddMMyy. In this example, “270116” stands for day 27, January, year 2016.
- The last field is checksum. In the example we have *53 as checksum.

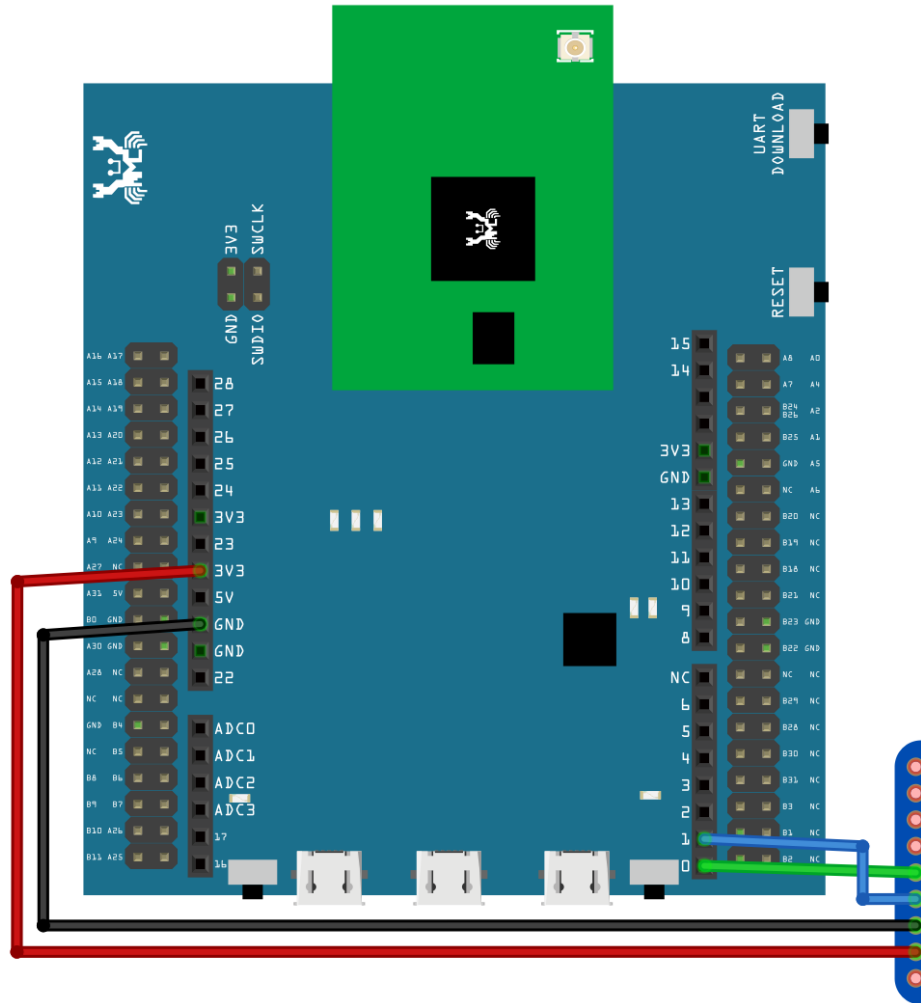

RTL8722DM/RTL8722CSM Wiring Diagram:

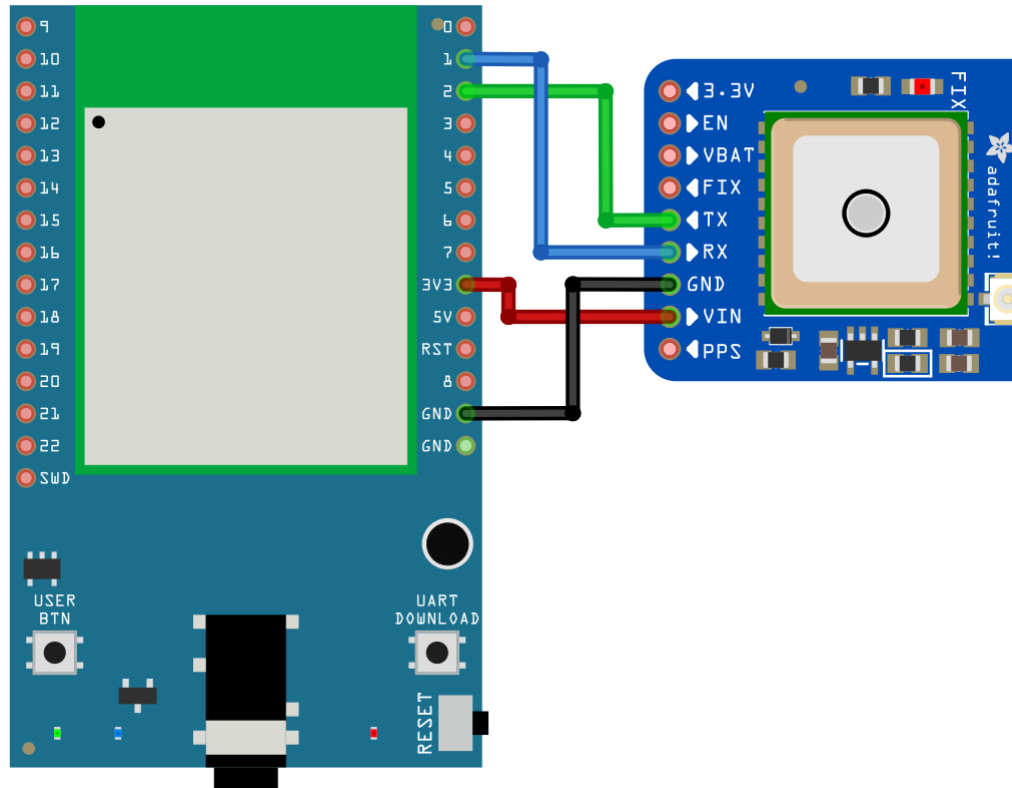


RTL8722DM MINI Wiring Diagram:

Open the example in “Files” -> “Examples” -> “AmebaSoftwareSerial” -> “Adafruit_GPS_parsing” .

Compile and upload to Ameba, then press the reset button.

The result will be output to Serial Monitor:

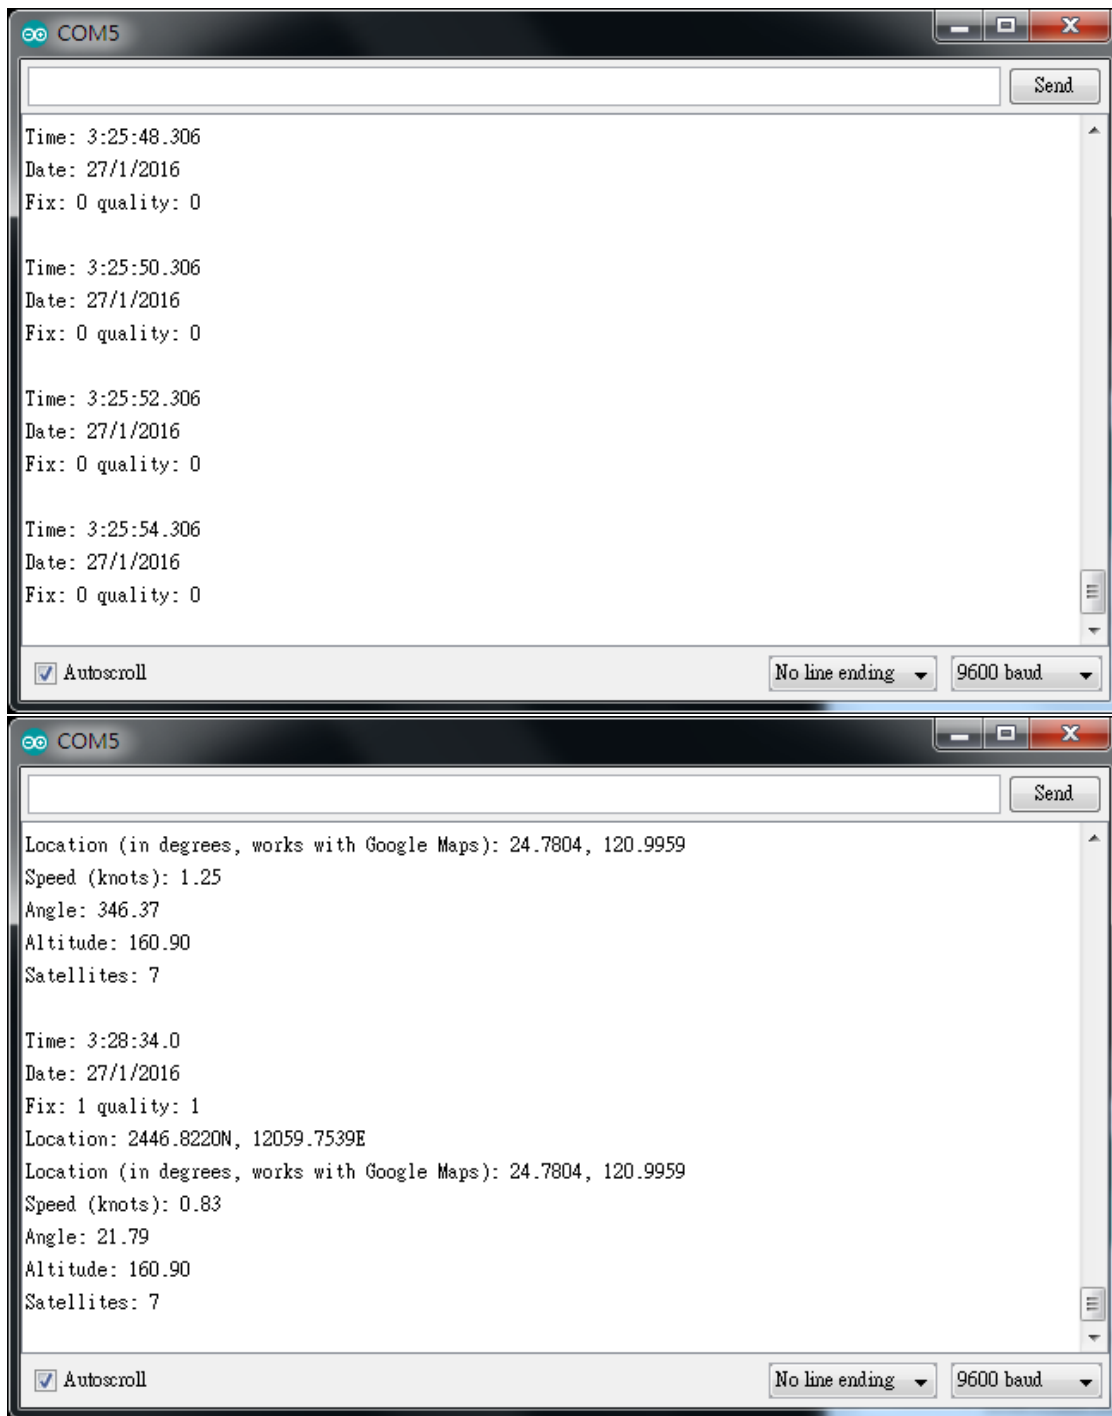

UART –Set Callback Function For UART Communications

Materials


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- USB to TTL Adapter x 1

Example


This example shows how to set a callback function for UART communication to process the UART data.

A USB to TTL adapter is required for this example. Ensure that you have the driver installed and connect it to the Ameba board as shown.


RTL8722DM / RTL8722CSM Wiring Diagram:

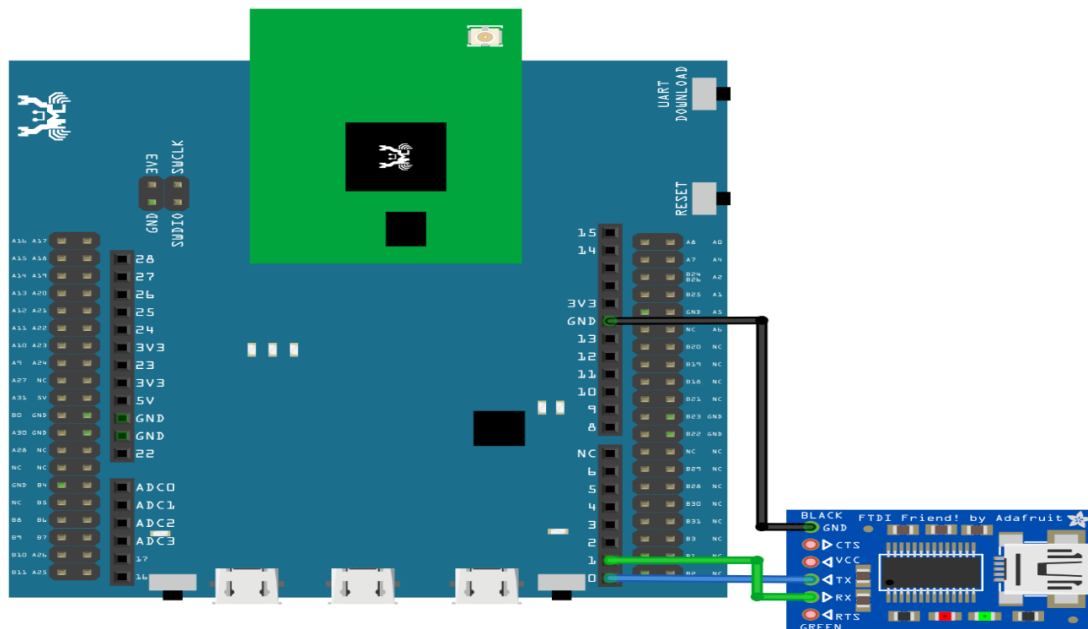

RTL8722DM MINI Wiring Diagram:

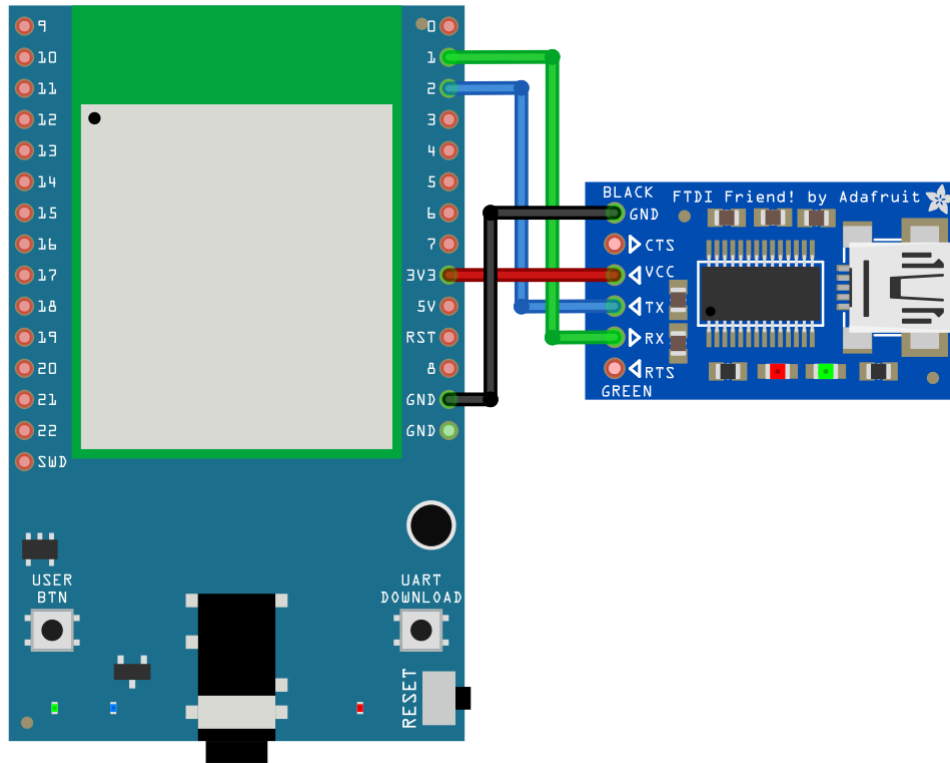


Open the example in “File” -> “Examples” -> “AmebaSoftwareSerial” -> “SoftwareSerial_Irq_Callback”

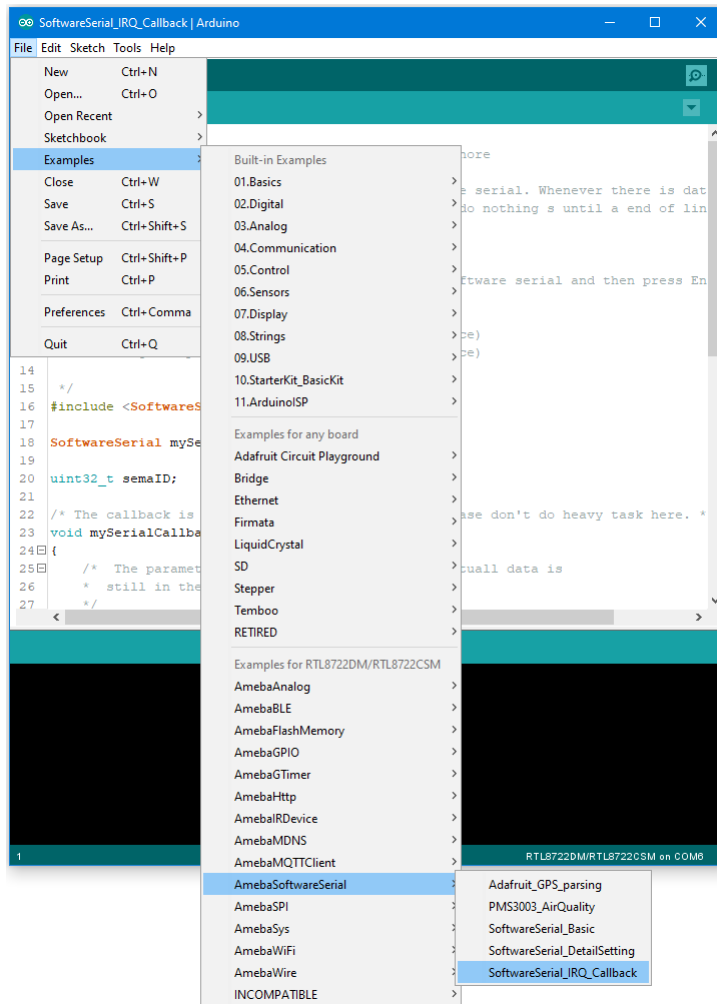


Upload the code and press the reset button on Ameba once the upload is finished.

Next, using a terminal program, such as TeraTerm or PuTTY, open a serial port and configure it according to the settings. Make sure the serial port number corresponds to the USB to TTL adapter.

- Speed: 38400
- Data: 8 bit
- Parity: none
- Stop bits: 1 bit
- Flow control: none

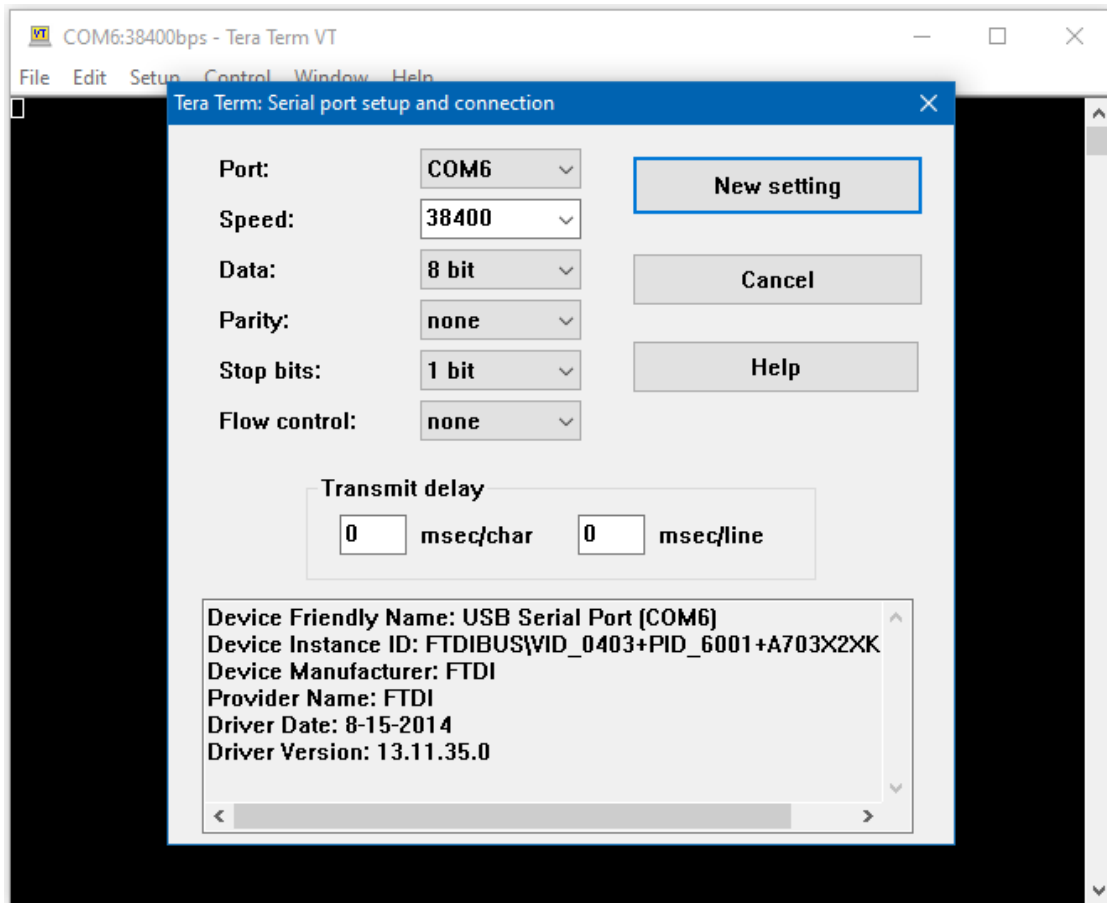

Once the serial port is open, type in the terminal and press the enter key, and you will see the corresponding output.

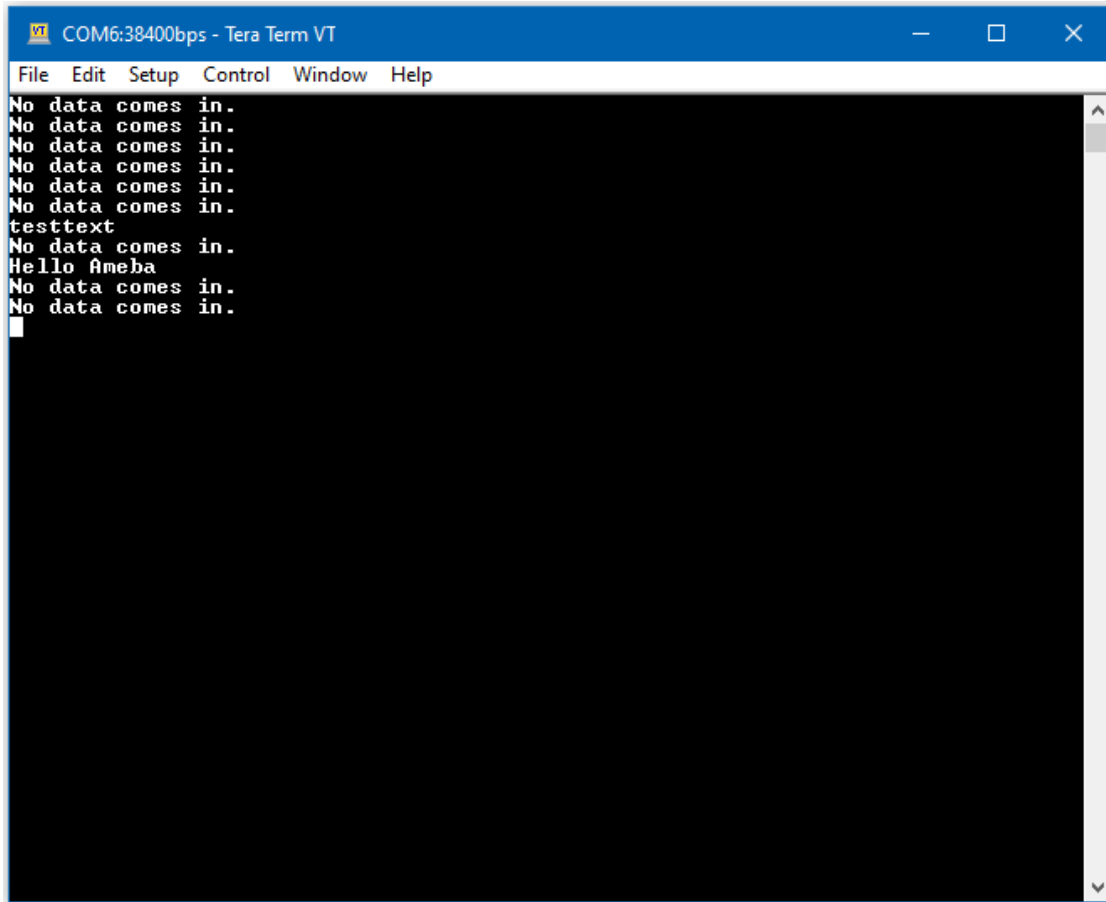A screenshot of a Tera Term VT window titled 'COM6:38400bps - Tera Term VT'. The window has a menu bar with 'File', 'Edit', 'Setup', 'Control', 'Window', and 'Help'. The main area is a black terminal with white text. The text shows a loop of 'No data comes in.' followed by 'testtext', 'Hello Ameba', and another loop of 'No data comes in.'. A cursor is visible at the end of the last line.

```
COM6:38400bps - Tera Term VT
File Edit Setup Control Window Help
No data comes in.
No data comes in.
No data comes in.
No data comes in.
No data comes in.
No data comes in.
testtext
No data comes in.
Hello Ameba
No data comes in.
No data comes in.
```

Code Reference

`mySerial.setAvailableCallback(mySerialCallback)` ; is used to set the function `mySerialCallback` as a callback function for software serial. When a new character is received, the callback function checks if the character corresponds to the enter key, and releases the semaphore if it is true, which in turn allows the main loop to print out all the previously received characters.

PM2.5 Concentration in The Air

Preparation


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- PlanTower PMS3003 or PMS5003 x 1

Example


PMS3003 (or PMS5003) is a sensor of air quality, it can detect the concentration of those 0.3 to 10 micrometer particulate matters in the air. The sensor output its data via UART.

The PMS3003 (or PMS5003) sensor detects the concentration value of PM 1.0, PM 2.5, PM 10. Take PM 2.5 for example, it stands for the fine particles with a diameter of 2.5 micrometers or less.

Open the example in “File”-> “Examples”-> “AmebaSoftwareSerial”-> “PMS3003_AirQuality”

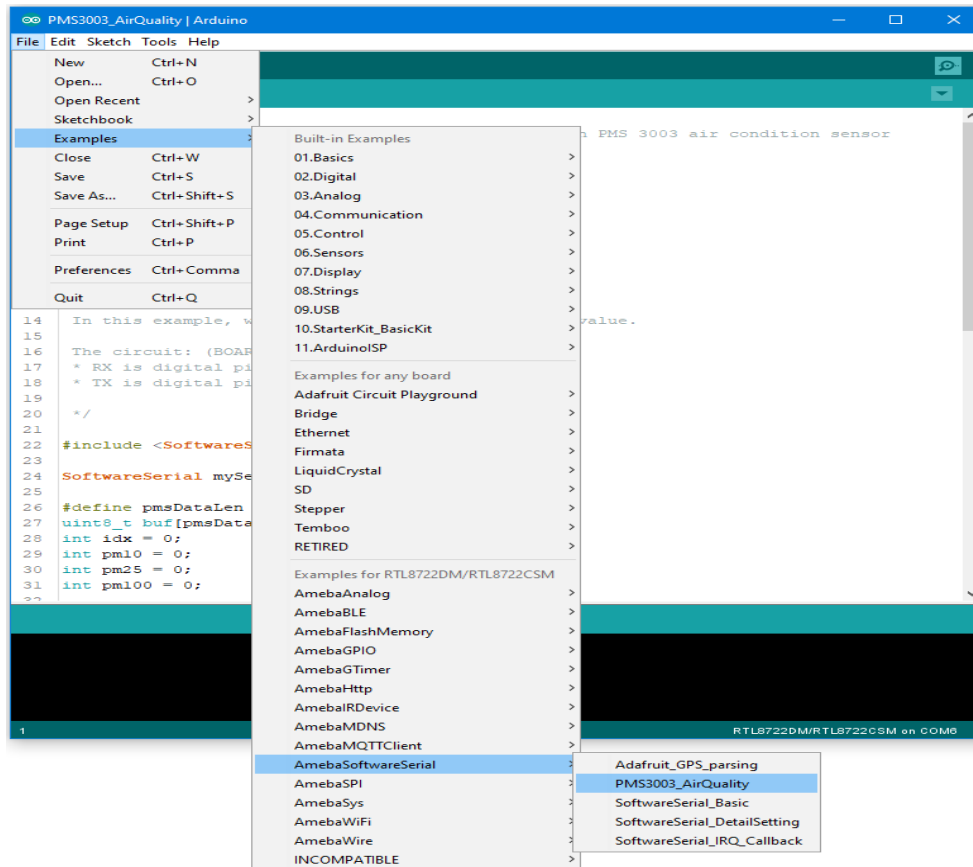

There are 8 pins in PMS3003:

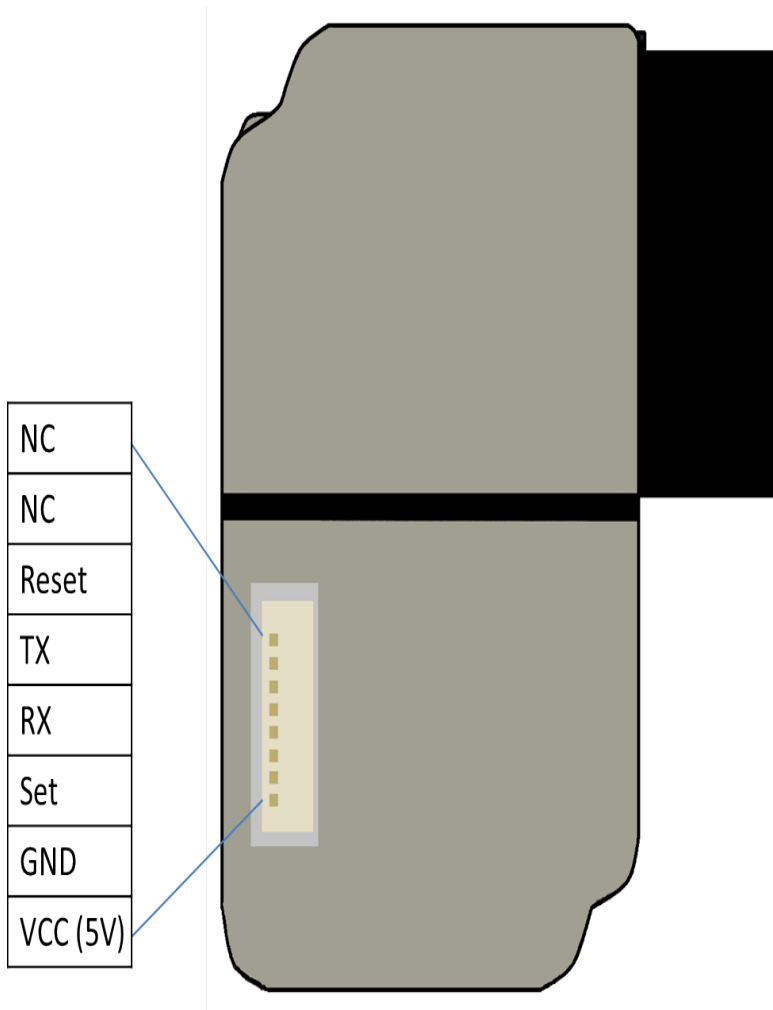


PMS3003 requires 5V power, but the working voltage of its IC is 3.3V. Therefore, the working voltage of Reset, TX, RX, Set are 3.3V as well. If the “Set” pin is pulled to high, the PMS3003 is put to operating mode. If the “Set” pin is pulled low, the PMS3003 is put to standby mode.


TX/RX pins are for UART connection. Under operating mode, PMS3003 outputs the data it reads continuously. Each data is of 32 bytes, please refer to the following article for detailed data format information:

https://www.dfrobot.com/wiki/index.php?title=PM2.5_laser_dust_sensor_SKU:SEN0177 RTL8722

RTL8722DM / RTL8722CSM Wiring Diagram:

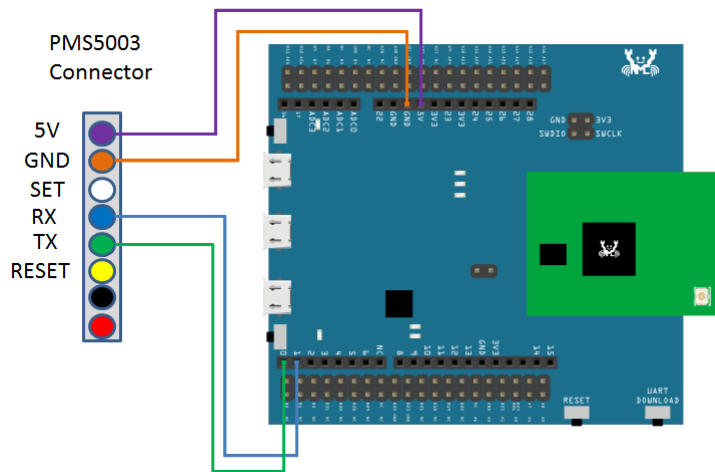


RTL8722DM MINI Wiring Diagram:

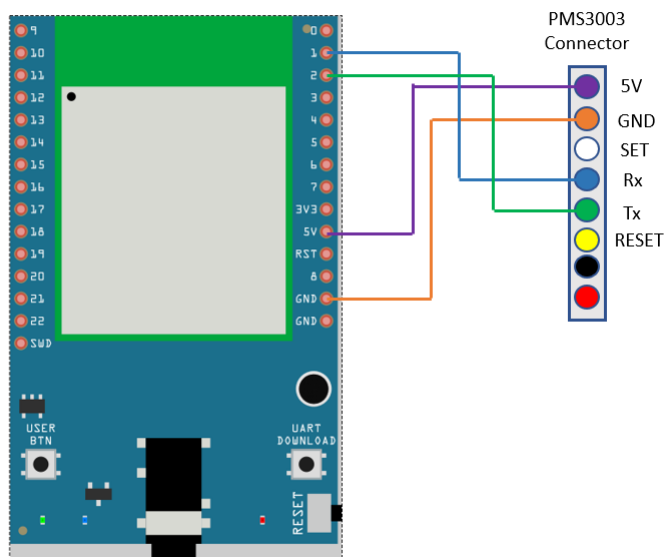

In this example, we do not use the “Set” and “Reset” pins.

Compile the code and upload it to Ameba. After pressing the Reset button, Ameba starts to output the PM 2.5 data to serial monitor.

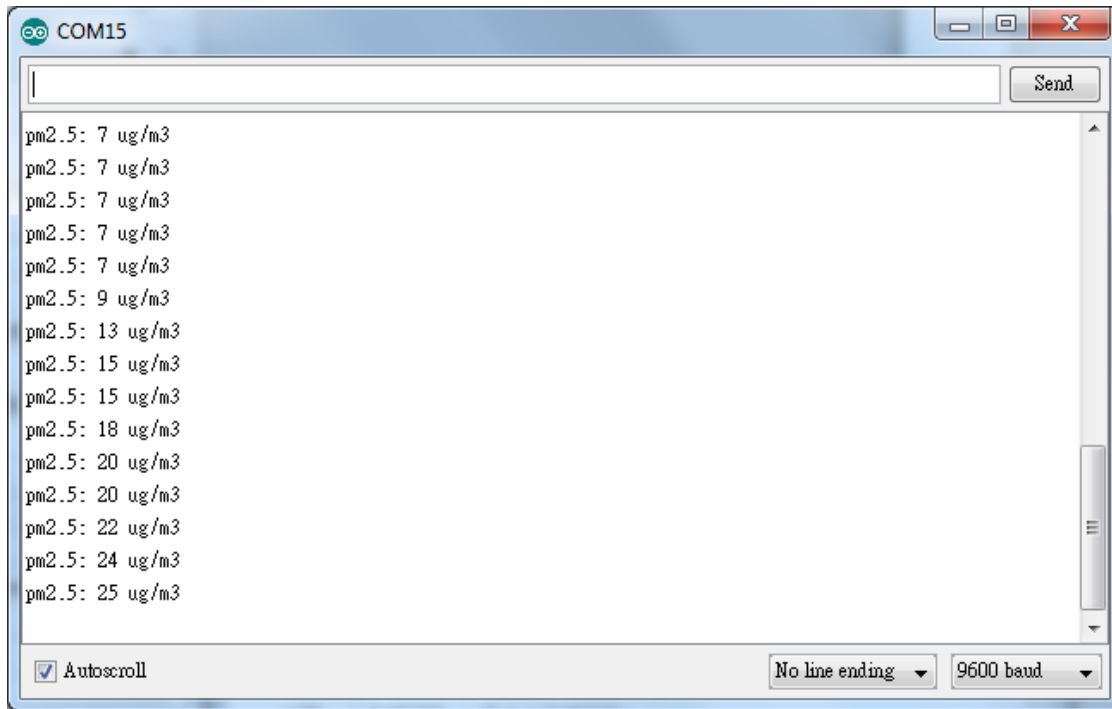

Flash Memory - Store data in FlashEEProm

Preparation


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1

Example

Ameba provides Flash Memory component for data storage and the data can be preserved when the power is off if necessary, e.g., compiled program. To avoid the memory space overlapped with the program on Ameba, the Flash API uses the tail part of the address space, with sector size 4K.


In this example, we store the value of boot times in flash memory. Every time Ameba reboots, it reads the boot times from flash, increases the value by 1, and writes it back to flash memory.

First open the example, “File” -> “Example” -> “AmebaFlashMemory” -> “FlashMemoryBasic”

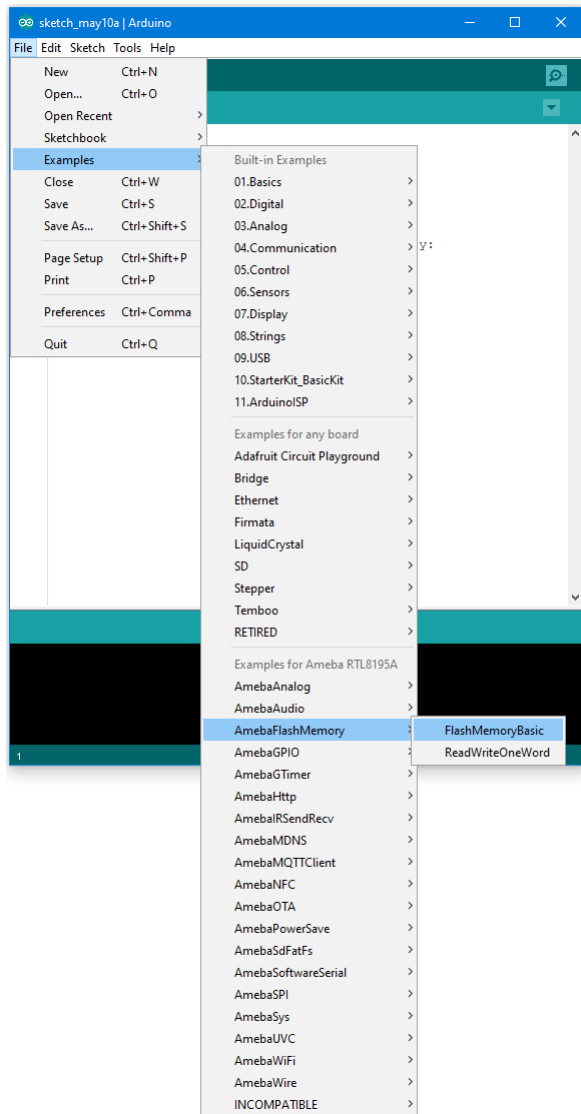

Compile and upload to Ameba, then press the reset button.

Open the Serial Monitor, press the reset button for a few times. Then you can see the boot times value increases.

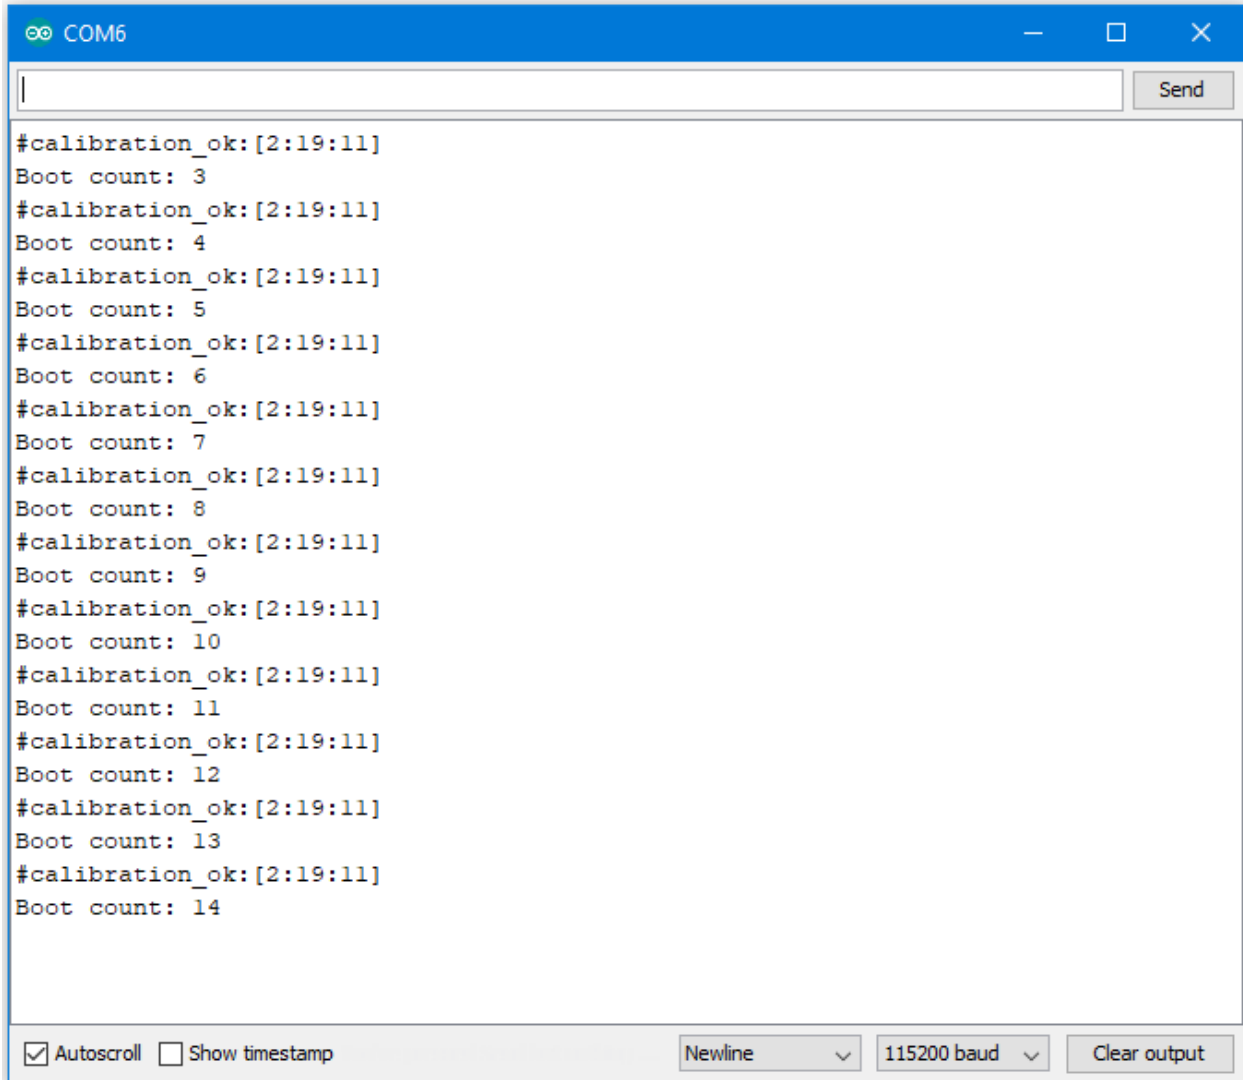

```
#calibration_ok:[2:19:11]
Boot count: 3
#calibration_ok:[2:19:11]
Boot count: 4
#calibration_ok:[2:19:11]
Boot count: 5
#calibration_ok:[2:19:11]
Boot count: 6
#calibration_ok:[2:19:11]
Boot count: 7
#calibration_ok:[2:19:11]
Boot count: 8
#calibration_ok:[2:19:11]
Boot count: 9
#calibration_ok:[2:19:11]
Boot count: 10
#calibration_ok:[2:19:11]
Boot count: 11
#calibration_ok:[2:19:11]
Boot count: 12
#calibration_ok:[2:19:11]
Boot count: 13
#calibration_ok:[2:19:11]
Boot count: 14
```

Code Reference

By default, the Flash Memory API uses address 0xFF000~0xFFFFF to store data.

There is limitation when writing to flash memory. That is, you can not directly write data to the same address you used in last write. To do that correctly, you need erase the sector first. The Flash API of Ameba uses a 4K SRAM to record the user modification and do the erase/write task together.

Use `FlashMemory.read()` to read from Flash memory.

Use `FlashMemory.buf[0] = 0x00;` to manipulate the 4K buf.

Use `FlashMemory.update()` ; to update the data in buf to Flash Memory.

Flash Memory - Use Flash Memory Larger Than 4K

Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1


Example

Flash Memory API uses memory of 4K bytes, which is normally sufficient for most application. However, larger memory can be provided by specifying a specific memory address and required size.

First, open the sample code in “File” -> “Examples” -> “AmebaFlashMemory” -> “ReadWriteOneWord”

In this example, we specify the starting address of flash memory is 0xFC000 and size is 0x4000 (The default starting address is 0xFF000 and size is 0x1000).

Then calculate correct address according to the specified offset and perform read/write operation. In the sample code we use offset 0x3F00, that is, $0xFC000 + 0x3F00 = 0xFFFF00$ in flash. We set the value to 0 at first, then increase by 1 every time Ameba reboots.

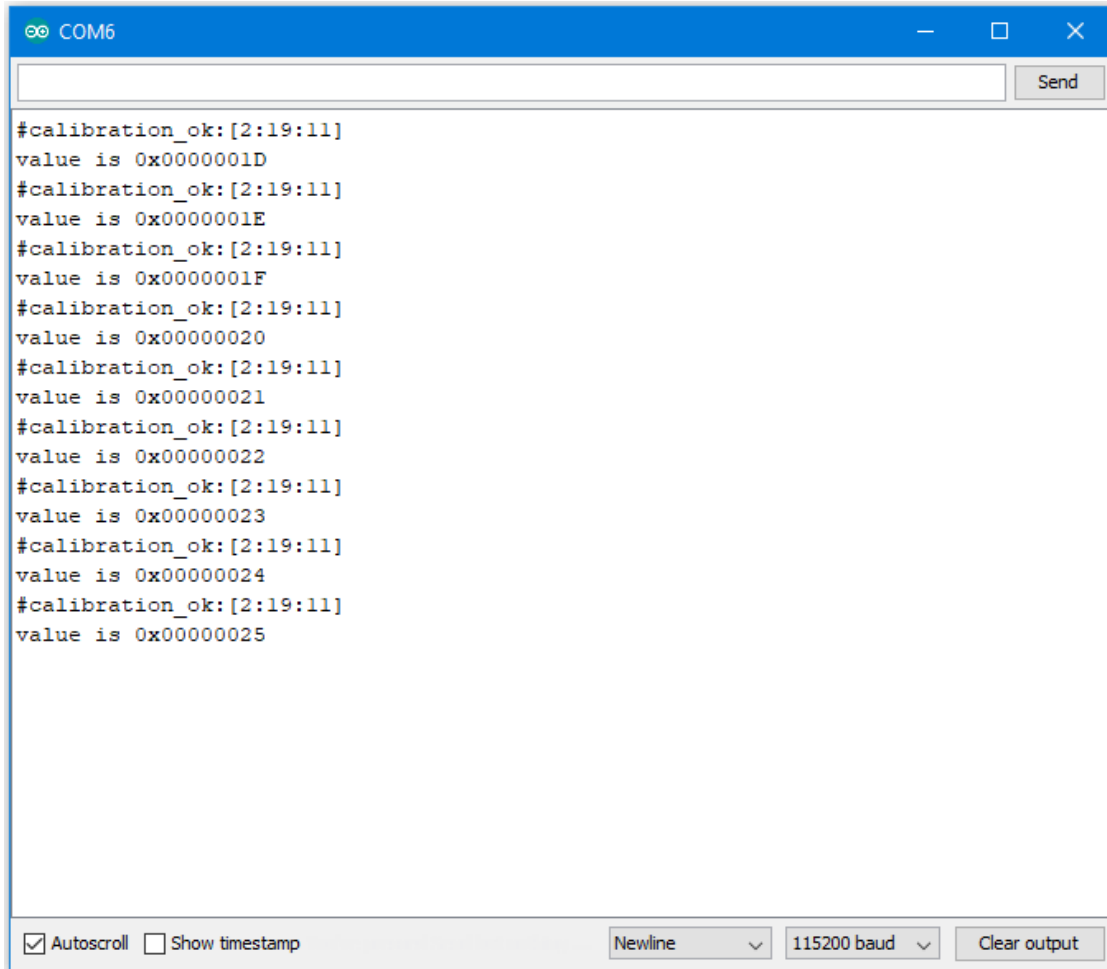

Code Reference

We can use the flash api we used in previous flash memory example, but we need to use `begin()` function to specify the desired starting address and memory size.

```
FlashMemory.begin(0xFC000, 0x4000);
```

Use `readWord()` to read the value stored in a memory address. In the example, we read the value stored in memory offset `0x3F00`, that is `0xFC000 + 0x3F00 = 0xFFFF00`. `readWord()` function reads a 32-bit value and returns it.

```
value = FlashMemory.readWord(0x3F00);
```

Use `writeWord()` to write to a memory address. The first argument is the memory offset, the second argument is the value to write to memory.

```
FlashMemory.writeWord(0x3F0C, value);
```

SPI –Print Image And Text On LCD Screen

If you are not familiar with SPI, please read [Introduction to SPI](#) first.

Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- ILI9341 TFT LCD with SPI interface x 1

Example

We have tested the following two models of ILI9341 TFT LCD with SPI interface:

- Adafruit 2.8" TFT LCD (with touch screen)
 - <https://www.adafruit.com/products/1651>
 - <https://learn.adafruit.com/adafruit-2-8-tft-touch-shield-v2?view=all>
- QVGA 2.2" TFT LCD
 - http://www.lcdwiki.com/2.2inch_SPI_Module_ILI9341_SKU:MSP2202

Common pins in ILI9341 TFT LCD with SPI interface:

- MOSI: Standard SPI Pin
- MISO: Standard SPI Pin
- SLK: Standard SPI Pin
- CS: Standard SPI Pin
- RESET: Used to reboot LCD.
- D/C: Data/Command. When it is at Low, the signal transmitted are commands, otherwise the data transmitted are data.
- LED (or BL): Adapt the screen backlight. Can be controlled by PWM or connected to VCC for 100% backlight.
- VCC: Connected to 3V or 5V, depends on its spec.
- GND: Connected to GND.


RTL8722DM / RTL8722CSM and QVGA TFT LCD Wiring Diagram:




Please note that this shield model enables the backlight by default and pin 8 is not for backlight, and the VCC should be connected to 5V.

RTL8722DM / RTL8722CSM and Adafruit 2.8'' TFT LCD touch shield Wiring Diagram:


Please note that this shield model enables the backlight by default and pin 8 is not for backlight, and the VCC should be connected to 5V.

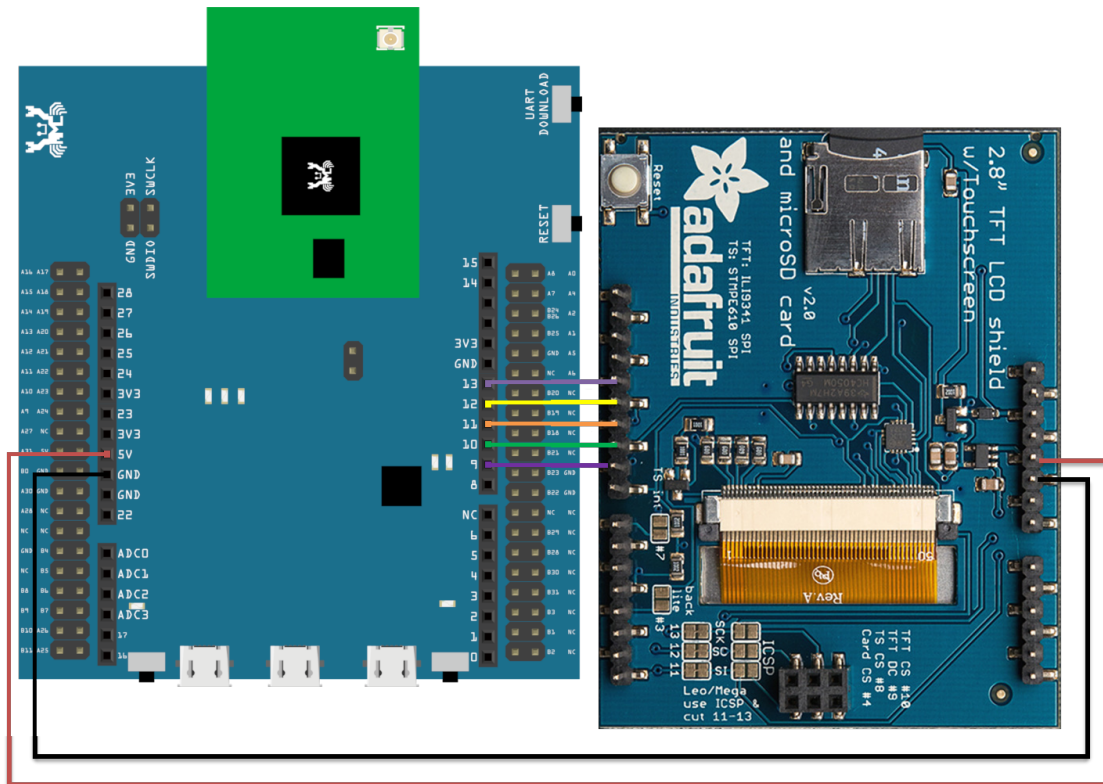

RTL8722DM MINI and Adafruit 2.8'' TFT LCD touch shield Wiring Diagram:

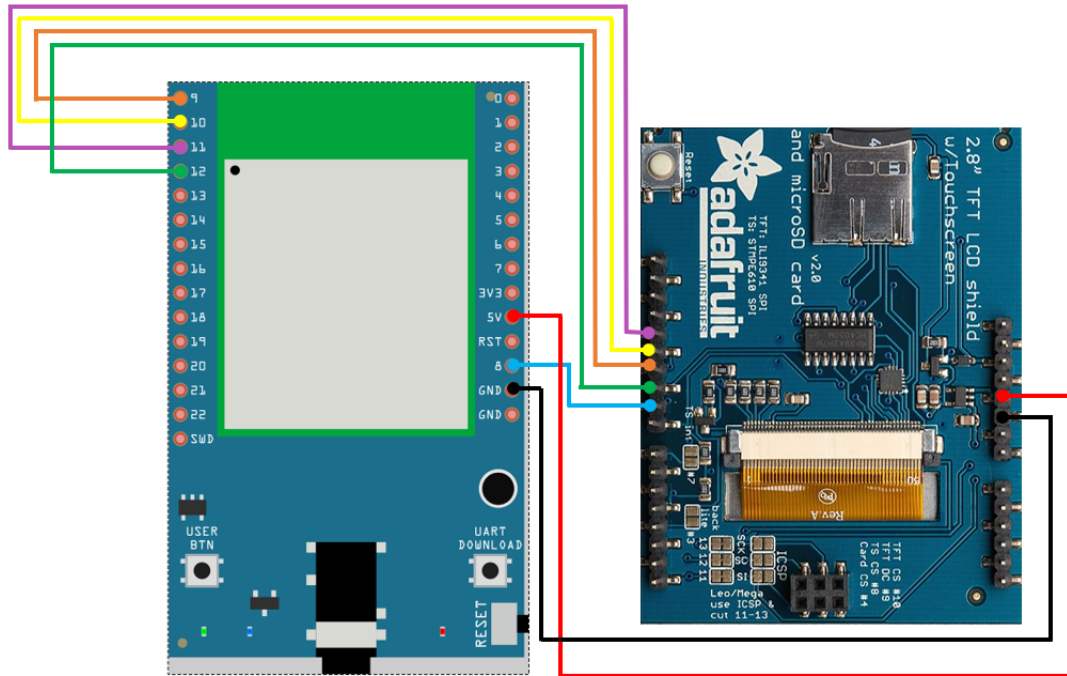


Open the example, “Files” -> “Examples” -> “AmebaSPI” -> “ILI9341_TFT_LCD_basic”

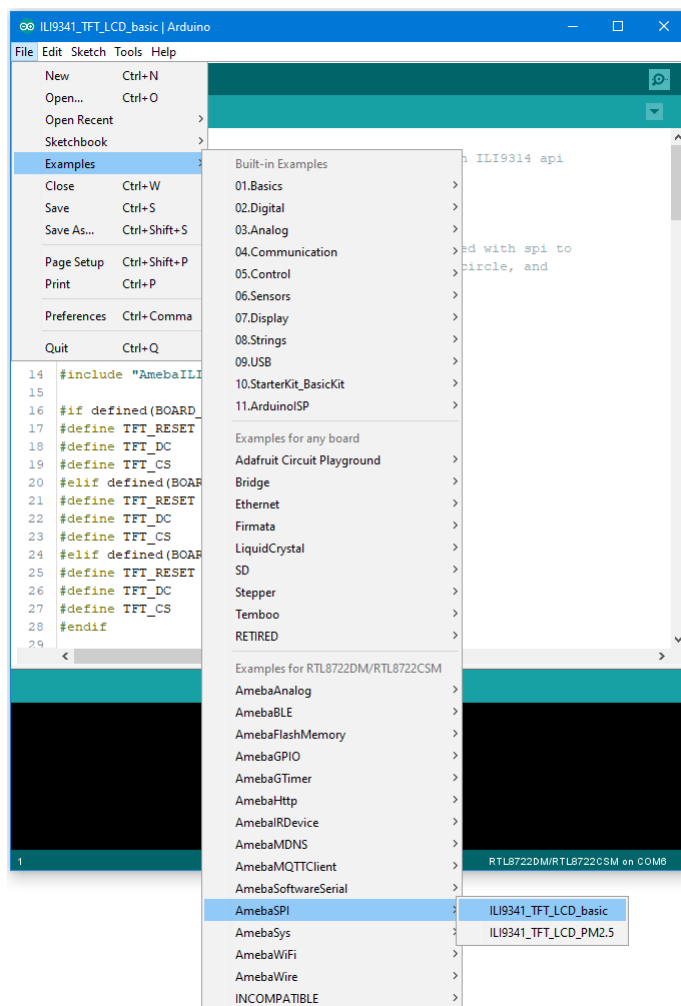

Compile and upload to Ameba, then press the reset button.

Then you can see some display tests appear on the LCD screen, such as displaying different colors, drawing vertical and horizontal lines, drawing circles, etc. ...

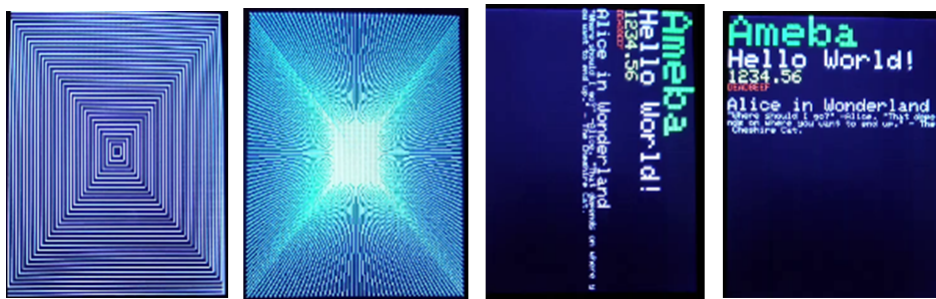

Code Reference

- **RGB 16-bit**

ILI9341 uses RGB 16-bit to display colors. Different from RGB 24-bit, it uses 5 bits for red, 6 bits for green, 5 bits for blue. For example, the RGB 24-bit representation of sky blue is 0x87CEFF, that is in binary:

- Red: 0x87 = B10000111
- Green: 0xCE = B11001110
- Blue: 0xFF = B11111111

and converted to RGB 16-bit:

- Red: B10000
- Green: B110011
- Blue: B11111


Then concatenate them, which forms B1000011001111111 = 0x867F

- **Drawing of ILI9341**

- First you must specify the range of the rectangle to draw, then pass the 2-byte RGB 16-bit color to ILI9341 corresponding to each pixel one by one, in this way ILI9341 fills each color to each pixel.
- You still must specify the drawing range even though the range covers only one pixel.
- From the rules we mentioned above, we can conclude that drawing vertical or horizontal lines are faster than diagonal lines.

- **Printing text on ILI9341**

- In our API, each character is 5×7 but each character is printed to size 6×8 (its right side and below are left blank), so as to separate from next character. For example, the character “A”

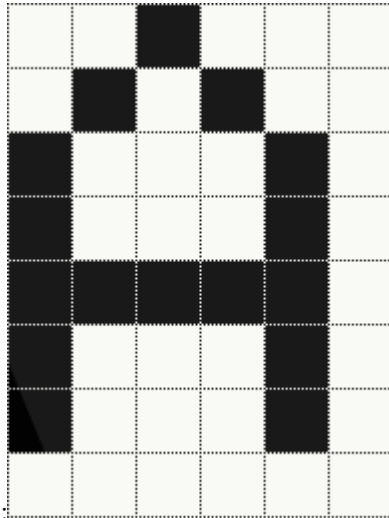

- The font size represents the dot size. For example, if the font size is 2, each dot in the character is a 2×2 rectangle

- **Screen rotation**
 - ILI9341 provides 0, 90, 180, 270 degrees screen rotation.
 - If the original width is 240 and original height is 320, when the screen rotates 90 degrees, the width becomes 320 and the height becomes 240.

SPI –Show PM2.5 Concentration On ILI9341 TFT LCD

If you are not familiar with SPI, please read [Introduction to SPI](#) first.

Preparation


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- ILI9341 TFT LCD with SPI interface x 1
- Plantower PMS3003 or PMS5003 x 1

Example


This example extends previous PM2.5 example to show the PM2.5 concentration on the LCD.

RTL8722DM / RTL8722CSM and QVGA TFT LCD Wiring Diagram:


(Note: PMS3003/PMS5003 sensor requires 5V voltage)

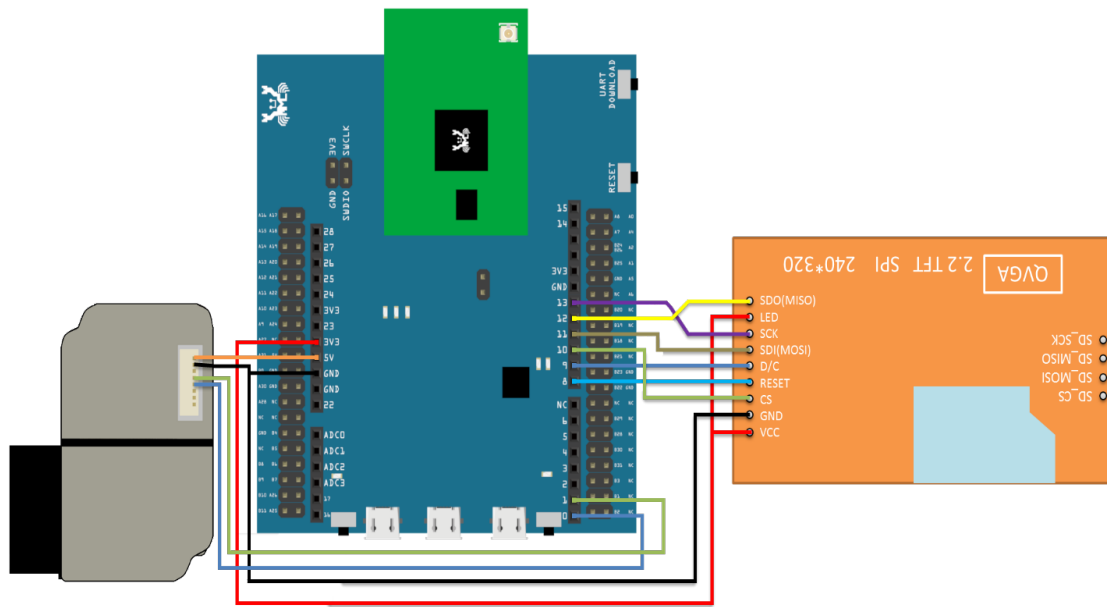


RTL8722DM MINI and QVGA TFT LCD Wiring Diagram:

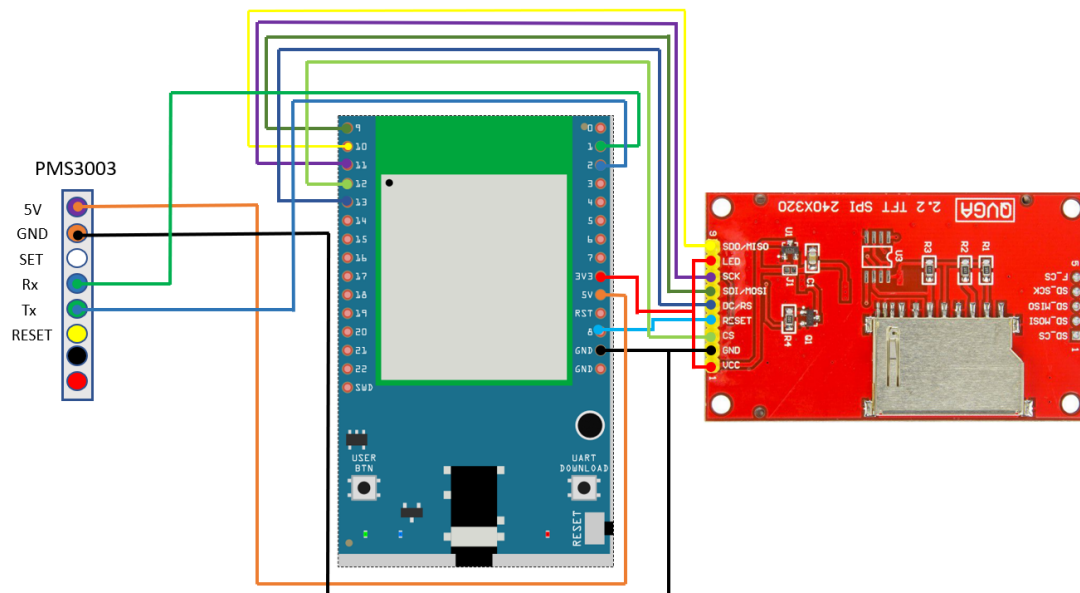


RTL8722DM / RTL8722CSM and Adafruit 2.8" TFT LCD Wiring Diagram:

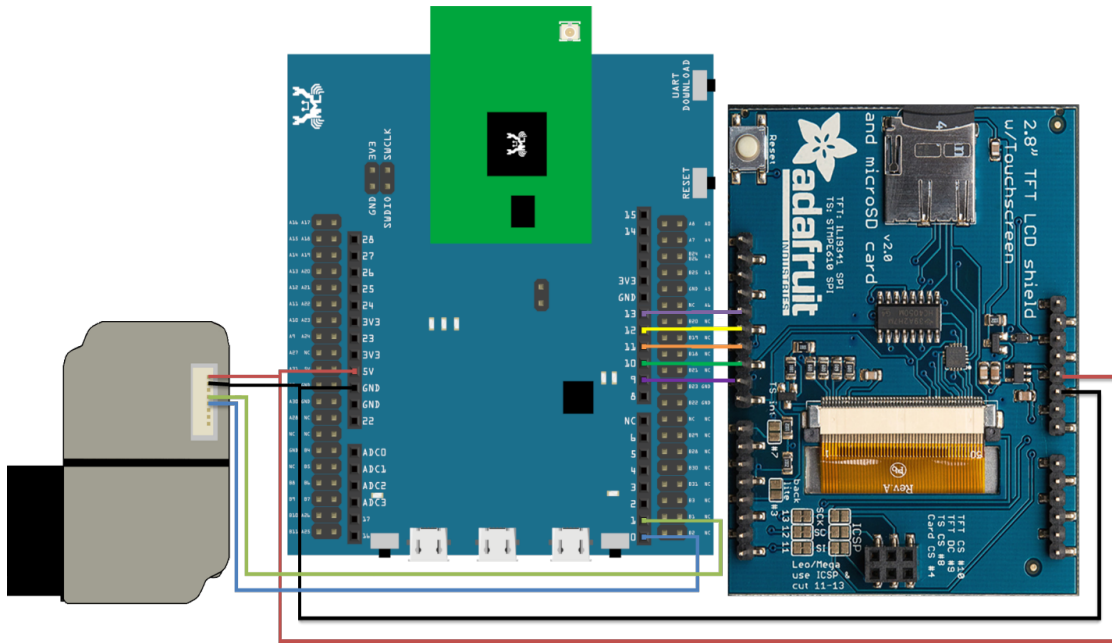

RTL8722DM MINI and Adafruit 2.8" TFT LCD Wiring Diagram:

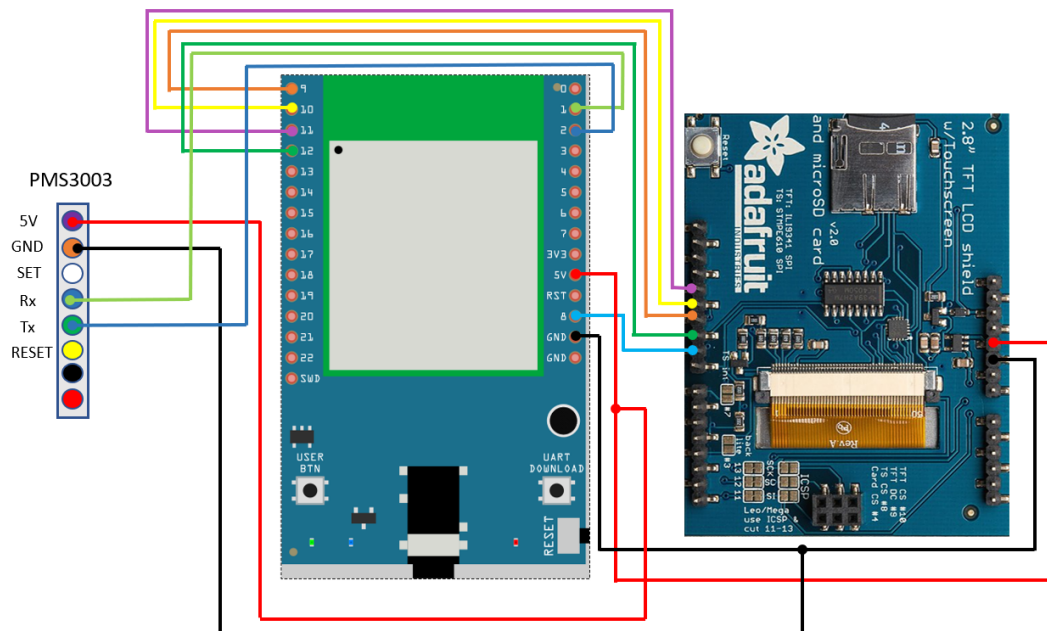


Open the example, "Files" -> "Examples" -> "AmebaSPI" -> "PM25_on_ILI9341_TFT_LCD"

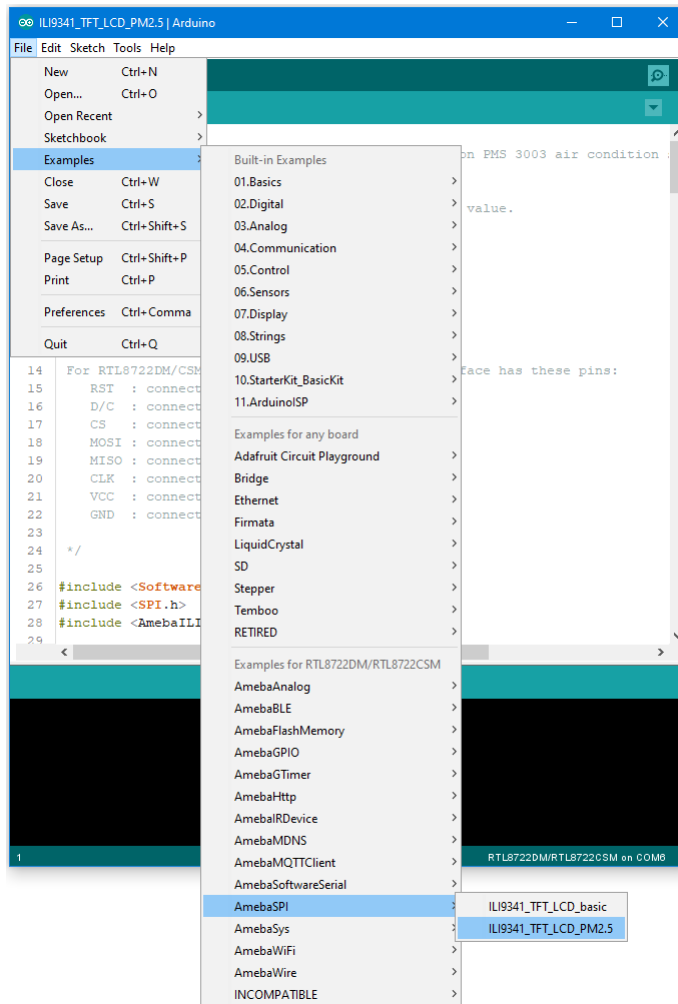

Compile and upload to Ameba, then press the reset button.

Then you can see the concentration value of PM1.0, PM2.5 and PM10 on the LCD.

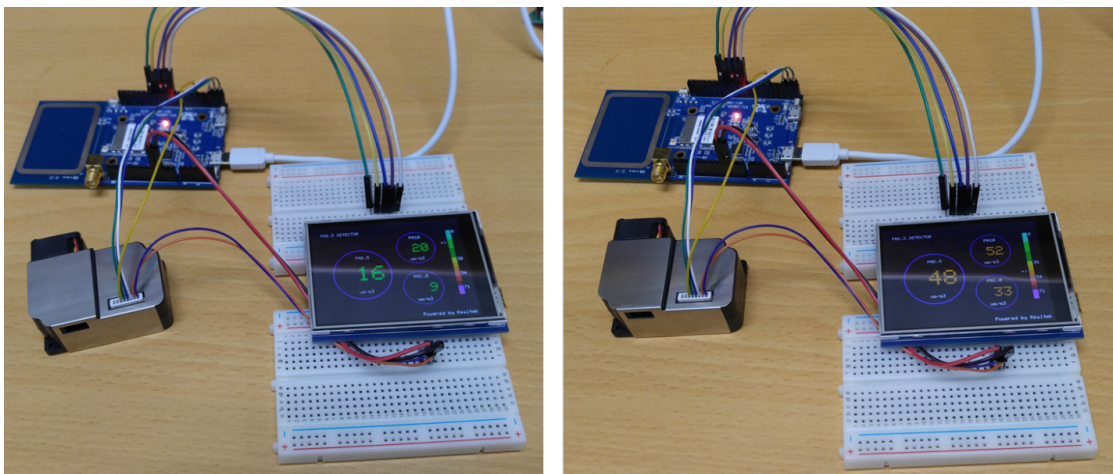

Code Reference

In this example, first rotate the screen by 90 degrees, and draw the static components such as the circles, the measuring scale, and the title text. After the concentration value is detected, it is printed inside the circle.

Timer - Using The Periodic GTimer

Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] / [RTL8720DN(BW16)] x 1

Example

Ameba provides 4 hardware GTimer for users to use. The timers' resolutions are at microseconds scale.

The timer can be set to be periodic or for single use. The periodic timers reset periodically, and the single-use timers do not.

Open the example, “File” -> “Examples” -> “AmebaGTimer” -> “TimerPeriodical” .
Compile and upload to Ameba, and press reset.

In the Serial Monitor, you can see the counter value is increased periodically.

Code Reference

The first argument of begin() is the timer id (0~3).

The second argument is the value of the timer (in microseconds). In the example, we fill in 1000000us = 1s.

The third argument specifies the function to call when the time is up. In the example, we call the “myhandler” function to increase the counter value by 1 and print the counter value to serial monitor.

```
GTimer.begin(0, 1 * 1000 * 1000, myhandler);
```

The GTimer is periodic by default, therefore “myhandler” function is called every second. When we want to stop the GTimer, use stop():

```
GTimer.stop(0);
```

Timer - Using The Single-Use GTimer

Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] / [RTL8720DN(BW16)] x 1

Example

In this example, we will use 4 One-Time GTimer, and pass user data to each timer.

Open the example “File” -> “Examples” -> “AmebaGTimer” -> “TimerOneshot” . Compile and upload to Ameba, and press reset. Then you can see the 4 timer log printed to the serial monitor in series.

Code Reference

The first argument of begin() is the Timer ID (0~3). The second argument is the value of the timer (in microseconds). In the example, we fill in 1000000us = 1s. The third argument specifies the function to call when the time is up. The fourth argument is to set whether this timer is a periodic timer, we use “false” here to begin a single-use timer. The fifth argument is the user data, we give 0 here to represent that this is timer 0.

```
GTimer.begin(0, 1 * 1000 * 1000, myhandler, false, 0);
```

Next, we set up the second timer, which has timer value 2 seconds, and user data 1. And other timers are set similarly.

```
GTimer.begin(1, 2 * 1000 * 1000, myhandler, false, 1);
```

In myhandler function, we print the user data to serial monitor. Since the 4 timers are separately set to count for 1, 2, 3, 4 seconds, from 1 second to 4 second, the user data of each timer are printed on the serial monitor in order. After 4 second, no log will be printed.

Power Save Deep Sleep Mode

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1


Example

Introduction

Ameba-D supports two low power modes which are deepsleep mode and sleep mode. Deepsleep mode turns off more power domain than sleep mode. The power consumptions of DeepSleep Mode is around 7uA to 8uA compare to normal state around 22mA. This example describes how to enter deepsleep mode and configure wakeup source.

Procedure

Open “File” -> “Examples” -> “AmebaPowerSave” -> “DeepSleepMode”

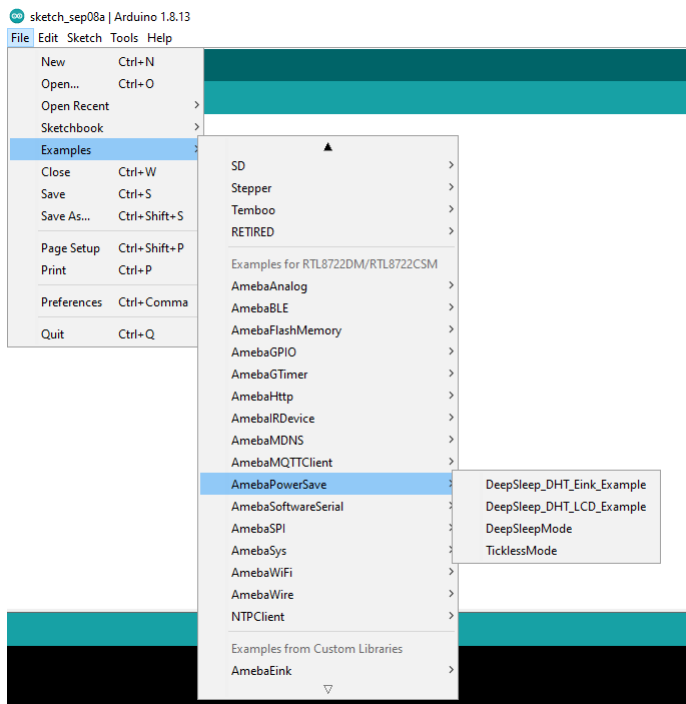

Set condition values as picture below.

DS_WAKEUP_SOURCE is used to set the wake-up source, user can chose 3 wake up sources now,


```
AON timer (SET_DS_AON_TIMER_WAKEUP);
AON pins (SET_DS_AON_WAKEPIN_WAKEUP);
RTC timer (SET_DS_RTC_WAKEUP);
```

AON timer can be set from 0 to 32760000 range (unit ms) by AON_TIMER_SLEEP_DURATION

There are 4 pins can be set as AON pins and active high for wake-up, D16, D17, D26 and D27. The AON pin can be set by SET_DS_AON_WAKEPIN_WAKEUPPIN

RTC timer wake-up system by set alarm. The alarm has 4 values, day, hour, min and sec. All 4 values can be set by

DS_RTC_ALARM_DAY, DS_RTC_ALARM_HOUR, DS_RTC_ALARM_MIN, and DS_RTC_ALARM_SEC



```

/*
 * This sketch shows how to use power save deepsleep mode
 */
#include "ameba_soc.h"
#include <PowerSave.h>


#define DEEPSLEEP_MODE          11
#define SET_DS_AON_TIMER_WAKEUP 0
#define SET_DS_AON_WAKEPIN_WAKEUP 1
#define SET_DS_RTC_WAKEUP      2

//SET_DS_AON_TIMER_WAKEUP:0; SET_DS_AON_WAKEPIN_WAKEUP:1; SET_DS_RTC_WAKEUP:2;
#define DS_WAKEUP_SOURCE          SET_DS_AON_WAKEPIN_WAKEUP

#define AON_TIMER_SLEEP_DURATION  5000
#define DS_RTC_ALARM_DAY          0
#define DS_RTC_ALARM_HOUR         0
#define DS_RTC_ALARM_MIN          0
#define DS_RTC_ALARM_SEC          10
#define SET_DS_AON_WAKEPIN_WAKEUPPIN 16 // D16:16 D17:17 D26:26 D27:27

```


When finished the condition values setting, system will run and switch between normal and deepsleep mode controlled by wakeup source. Serial Monitor displays the switching log.

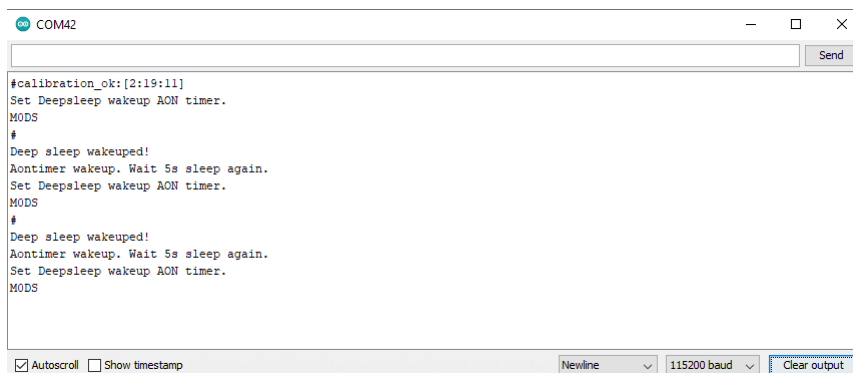

```

COM42
#calibration_ok:[2:19:11]
Set Deepsleep wakeup AON timer.
MODS
#
Deep sleep wakeupid!
Aontimer wakeup. Wait 5s sleep again.
Set Deepsleep wakeup AON timer.
MODS
#
Deep sleep wakeupid!
Aontimer wakeup. Wait 5s sleep again.
Set Deepsleep wakeup AON timer.
MODS

```

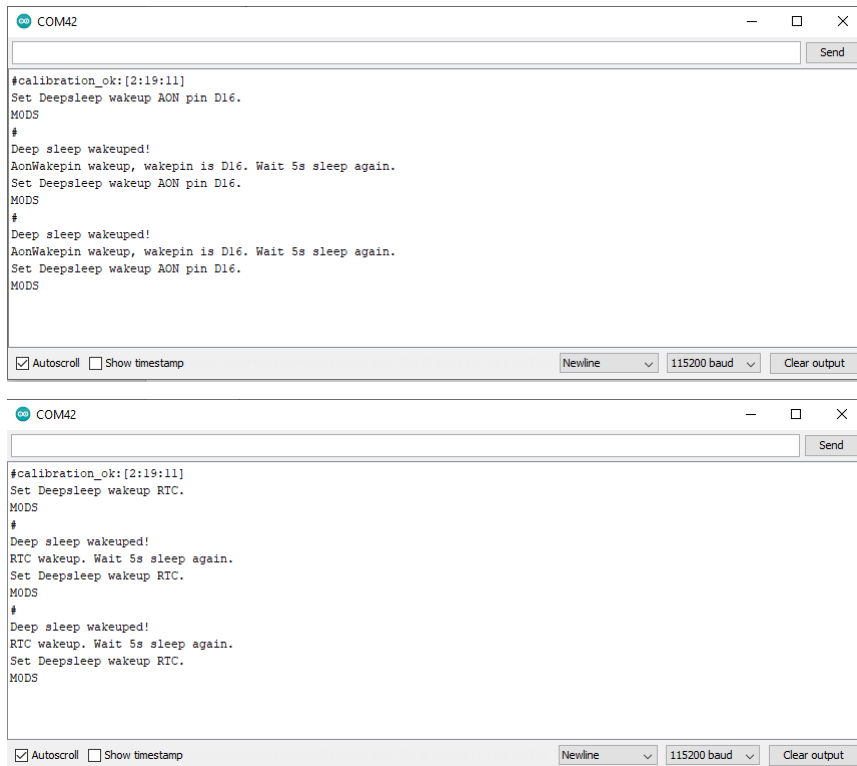

```
#calibration_ok:[2:19:11]
Set Deepsleep wakeup AON pin D16.
MODS
#
Deep sleep wakeupe!
AonWakepin wakeup, wakepin is D16. Wait 5s sleep again.
Set Deepsleep wakeup AON pin D16.
MODS
#
Deep sleep wakeupe!
AonWakepin wakeup, wakepin is D16. Wait 5s sleep again.
Set Deepsleep wakeup AON pin D16.
MODS
```

Autoscroll ☐ Show timestamp Newline 115200 baud Clear output

```
#calibration_ok:[2:19:11]
Set Deepsleep wakeup RTC.
MODS
#
Deep sleep wakeupe!
RTC wakeup. Wait 5s sleep again.
Set Deepsleep wakeup RTC.
MODS
#
Deep sleep wakeupe!
RTC wakeup. Wait 5s sleep again.
Set Deepsleep wakeup RTC.
MODS
```

Autoscroll ☐ Show timestamp Newline 115200 baud Clear output

Code Reference

Please refer to the [API Documents](#) PowerSave section for detail description of all API.

Power Save Deep Sleep DHT Eink

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- DHT11 or DHT22 or DHT21 x 1
- LCD I2C screen x 1

Example

Introduction

Ameba-D supports low power modes which are deepsleep mode. Deepsleep mode turns off most of the system power domain. The power consumptions of core module in DeepSleep Mode is around 7uA to 8uA compare to normal state around 22mA. This example gives demo of system switch between “working” and “sleep” (power save).Using DHT


sensor to read data and display on Eink screen when system is awake. After 5 seconds system auto enter DeepSleep Mode for power save. System will wake up by wakeup source.(Aon timer, Aon Pins or RTC timer).

Procedure

Download the Eink zip library, AmebaEink.zip, at

https://github.com/ambiot/ambd_arduino/tree/master/Arduino_zip_libraries. Then install the AmebaEink.zip.

Open “File” -> “Examples” -> “AmebaPowerSave” -> “DeepSleep_DHT_Eink_Example”

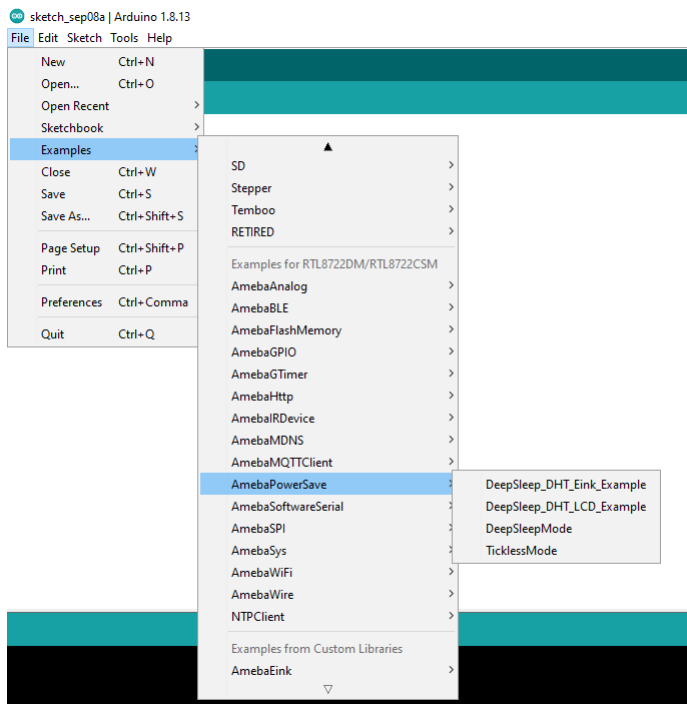

Set condition values as picture below.

DS_WAKEUP_SOURCE is used to set the wake-up source, user can chose 3 wake up sources now,

```
AON timer (SET_DS_AON_TIMER_WAKEUP);
AON pins (SET_DS_AON_WAKEPIN_WAKEUP);
RTC timer (SET_DS_RTC_WAKEUP);
```


AON timer can be set from 0 to 32760000 range (unit ms) by AON_TIMER_SLEEP_DURATION

There are 4 pins can be set as AON pins and active high for wake-up, D16, D17, D26 and D27. The AON pin can be set by SET_DS_AON_WAKEPIN_WAKEUPPIN

RTC timer wake-up system by set alarm. The alarm has 4 values, day, hour, min and sec. All 4 values can be set by DS_RTC_ALARM_DAY, DS_RTC_ALARM_HOUR, DS_RTC_ALARM_MIN, and DS_RTC_ALARM_SEC

DHTPIN is used to set DHT sensor data pin. User can choose any GPIO pins.

DHTTYPE is used to set DHT sensor type. (DHT11, DHT22 and DHT33)

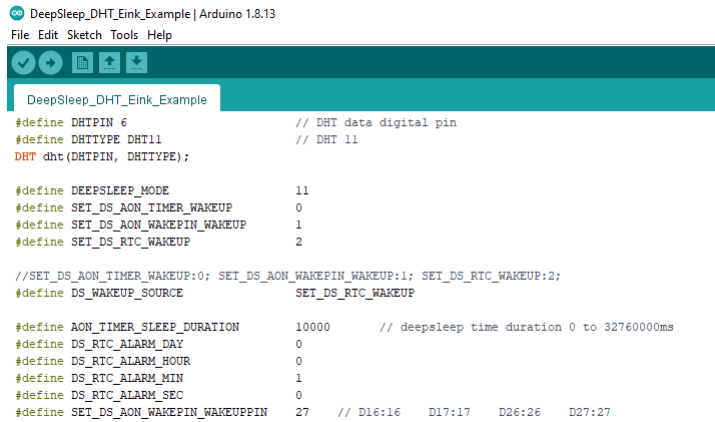

```
DeepSleep_DHT_Eink_Example | Arduino 1.8.13
File Edit Sketch Tools Help

DeepSleep_DHT_Eink_Example

#define DHTPIN 6           // DHT data digital pin
#define DHTTYPE DHT11      // DHT 11
DHT dht(DHTPIN, DHTTYPE);

#define DEEPSLEEP_MODE     11
#define SET_DS_AON_TIMER_WAKEUP 0
#define SET_DS_AON_WAKEPIN_WAKEUP 1
#define SET_DS_RTC_WAKEUP 2

//SET_DS_AON_TIMER_WAKEUP:0; SET_DS_AON_WAKEPIN_WAKEUP:1; SET_DS_RTC_WAKEUP:2;
#define DS_WAKEUP_SOURCE   SET_DS_RTC_WAKEUP

#define AON_TIMER_SLEEP_DURATION 10000 // deepsleep time duration 0 to 32760000ms
#define DS_RTC_ALARM_DAY 0
#define DS_RTC_ALARM_HOUR 0
#define DS_RTC_ALARM_MIN 1
#define DS_RTC_ALARM_SEC 0
#define SET_DS_AON_WAKEPIN_WAKEUPPIN 27 // D16:16 D17:17 D26:26 D27:27
```

When finished the condition values setting, system will run and switch between normal working mode and deepsleep mode controlled by wakeup source. Eink screen will display the temperature and humidity data measured from DHT sensor when system is awake.

Code Reference

Please refer to the [API Documents](#) PowerSave section for detail description of all API.

Power Save Deep Sleep DHT LCD

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- DHT11 or DHT22 or DHT21 x 1
- LCD I2C screen x 1


Example

Introduction

Ameba-D supports low power modes which are deepsleep mode. Deepsleep mode turns off most of the system power domain. The power consumptions of core module in DeepSleep Mode is around 7uA to 8uA compare to normal state around 22mA. This example gives demo of system switch between “working” and “sleep” (power save).Using DHT sensor to read data and display on LCD screen when system is awake. After 5 seconds system auto enter DeepSleep Mode for power save. System will wake up by wakeup source.(Aon timer, Aon Pins or RTC timer).

Procedure

Open “File” -> “Examples” -> “AmebaPowerSave” -> “DeepSleep_DHT_LCD_Example”

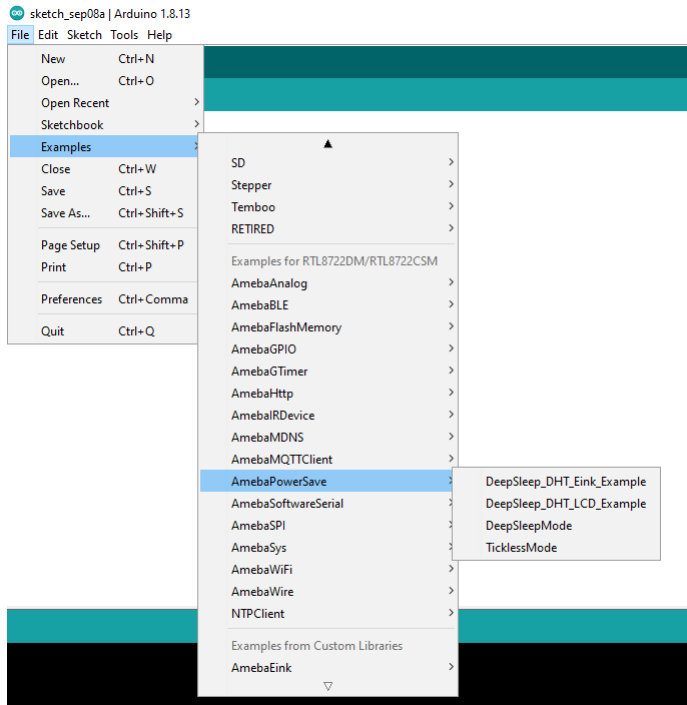

Set condition values as picture below.

DS_WAKEUP_SOURCE is used to set the wake-up source, user can chose 3 wake up sources now,

```
AON timer (SET_DS_AON_TIMER_WAKEUP);
AON pins (SET_DS_AON_WAKEPIN_WAKEUP);
RTC timer (SET_DS_RTC_WAKEUP);
```


AON timer can be set from 0 to 32760000 range (unit ms) by AON_TIMER_SLEEP_DURATION

There are 4 pins can be set as AON pins and active high for wake-up, D16, D17, D26 and D27. The AON pin can be set by SET_DS_AON_WAKEPIN_WAKEUPPIN

RTC timer wake-up system by set alarm. The alarm has 4 values, day, hour, min and sec. All 4 values can be set by DS_RTC_ALARM_DAY, DS_RTC_ALARM_HOUR, DS_RTC_ALARM_MIN, and DS_RTC_ALARM_SEC

DHTPIN is used to set DHT sensor data pin. User can choose any GPIO pins.

DHTTYPE is used to set DHT sensor type. (DHT11, DHT22 and DHT33)

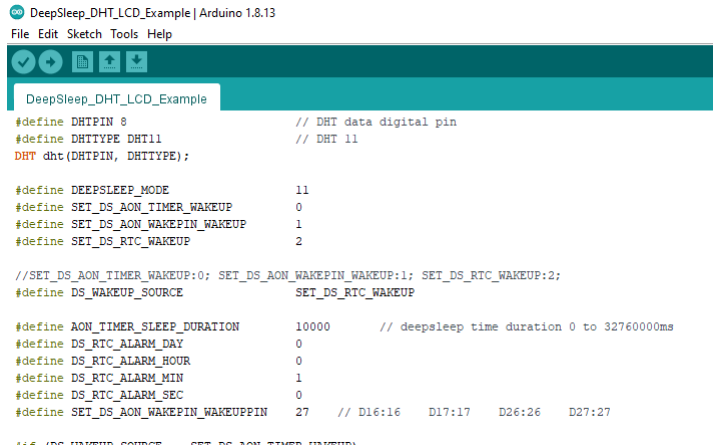

```

DeepSleep_DHT_LCD_Example | Arduino 1.8.13
File Edit Sketch Tools Help

#define DHTPIN 8 // DHT data digital pin
#define DHTTYPE DHT11 // DHT 11
DHT dht(DHTPIN, DHTTYPE);

#define DEEPSLEEP_MODE 11
#define SET_DS_AON_TIMER_WAKEUP 0
#define SET_DS_AON_WAKEPIN_WAKEUP 1
#define SET_DS_RTC_WAKEUP 2

//SET_DS_AON_TIMER_WAKEUP:0; SET_DS_AON_WAKEPIN_WAKEUP:1; SET_DS_RTC_WAKEUP:2;
#define DS_WAKEUP_SOURCE SET_DS_RTC_WAKEUP

#define AON_TIMER_SLEEP_DURATION 10000 // deepsleep time duration 0 to 32760000ms
#define DS_RTC_ALARM_DAY 0
#define DS_RTC_ALARM_HOUR 0
#define DS_RTC_ALARM_MIN 1
#define DS_RTC_ALARM_SEC 0
#define SET_DS_AON_WAKEPIN_WAKEUPPIN 27 // D16:16 D17:17 D26:26 D27:27

```

When finished the condition values setting, system will run and switch between normal working mode and deepsleep mode controlled by wakeup source. LCD screen will display the temperature and humidity data measured from DHT sensor when system is awake.

Code Reference

Please refer to the [API Documents](#) PowerSave section for detail description of all API.

Power Save Tickless Mode

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1


Example

Introduction

Ameba-D supports two low power modes which are deepsleep mode and sleep mode. The power consumptions of Tickless Sleep Mode is around 28uA to 30uA compare to normal state around 15mA. This example describes how to use freertos tickless with uart interruptable interface.

Procedure

Open “File” -> “Examples” -> “AmebaPowerSave” -> “TicklessMode”

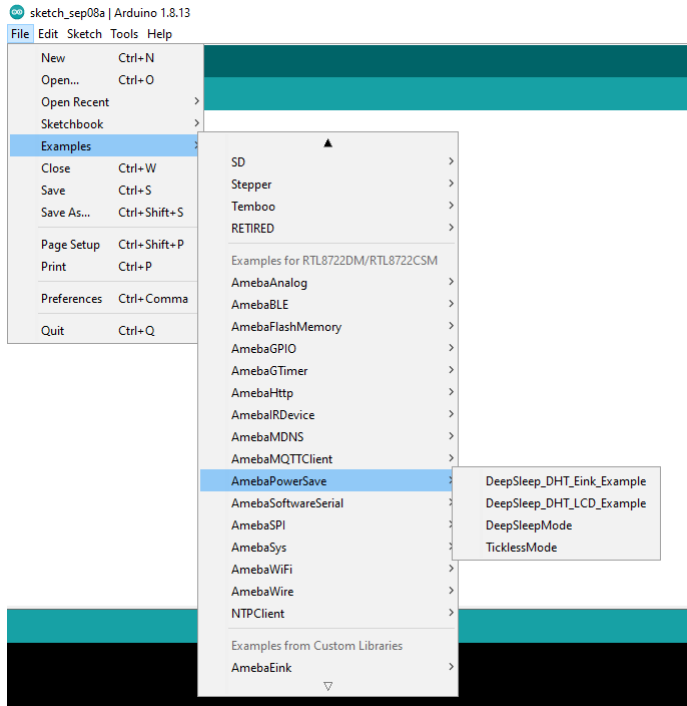

Set condition values as picture below.

DS_WAKEUP_SOURCE is used to set the wake-up source, user can chose 3 wake up sources now,

```
AON timer (SET_DS_AON_TIMER_WAKEUP);
AON pins (SET_DS_AON_WAKEPIN_WAKEUP);
RTC timer (SET_DS_RTC_WAKEUP);
```

AON timer can be set from 0 to 32760000 range (unit ms) by AON_TIMER_SLEEP_DURATION

There are 4 pins can be set as AON pins and active high for wake-up, D16, D17, D26 and D27. The AON pin can be set by SET_DS_AON_WAKEPIN_WAKEUPPIN

RTC timer wake-up system by set alarm. The alarm has 4 values, day, hour, min and sec. All 4 values can be set by DS_RTC_ALARM_DAY, DS_RTC_ALARM_HOUR, DS_RTC_ALARM_MIN, and DS_RTC_ALARM_SEC

There are 4 pins can be set as AON pins and active high for wake-up, D16, D17, D26 and D27. The AON pin can be set by SET_TL_AON_WAKEPIN_WAKEUP

TL_SYSACTIVE_TIME is for setting time duration of the system to keep alive. (unit ms)

TicklessMode | Arduino 1.8.13

File Edit Sketch Tools Help

```

TicklessMode

/*
 * This sketch shows how to use power save tickless mode
 */
#include "ameba_soc.h"
#include <PowerSave.h>

#define TICKLESS_MODE                22
#define SET_TL_UART_WAKEUP          0
#define SET_TL_RTC_WAKEUP            1
#define SET_TL_AON_WAKEPIN_WAKEUP    16 // D16:16    D17:17    D26:26    D27:27

//SET_TL_UART_WAKEUP:0; SET_TL_RTC_WAKEUP:1; SET_TL_AON_WAKEPIN_WAKEUP:16 or 17 or 26 or 27;
#define TL_WAKEUP_SOURCE              SET_TL_UART_WAKEUP

#define TL_SYSACTIVE_TIME             5000
#define TL_RTC_ALARM_DAY              0
#define TL_RTC_ALARM_HOUR             0
#define TL_RTC_ALARM_MIN              0
#define TL_RTC_ALARM_SEC              10

```

```

COM42
#calibration_ok:[2:19:11]
Set Tickless wakeup LOGUART.

System suspend. Tickless mode enabled.

Tickless mode resume. Wait 5s enter tickless again.
Set Tickless wakeup LOGUART.

System suspend. Tickless mode enabled.

Tickless mode resume. Wait 5s enter tickless again.
Set Tickless wakeup LOGUART.

System suspend. Tickless mode enabled.

Autoscroll Show timestamp Newline 115200 baud Clear output

```

```

COM42
#calibration_ok:[2:19:11]
Set Tickless wakeup RTC.

System suspend. Tickless mode enabled.

Tickless mode resume. Wait 5s enter tickless again.
Set Tickless wakeup RTC.


System suspend. Tickless mode enabled.

Tickless mode resume. Wait 5s enter tickless again.
Set Tickless wakeup RTC.

System suspend. Tickless mode enabled.

Autoscroll Show timestamp Newline 115200 baud Clear output

```
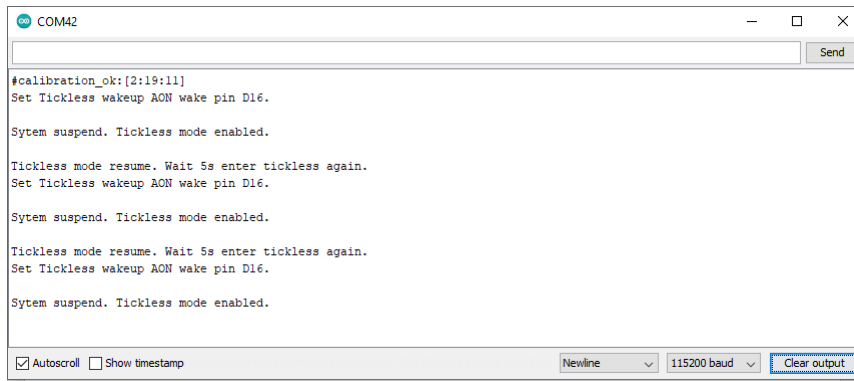
```
#calibration_ok:[2:19:11]
Set Tickless wakeup AON wake pin D16.

System suspend. Tickless mode enabled.

Tickless mode resume. Wait 5s enter tickless again.
Set Tickless wakeup AON wake pin D16.

System suspend. Tickless mode enabled.

Tickless mode resume. Wait 5s enter tickless again.
Set Tickless wakeup AON wake pin D16.

System suspend. Tickless mode enabled.
```

Code Reference

Please refer to the [API Documents](#) PowerSave section for detail description of all API.


Use NTPClient Library To Obtain Local Time

Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1

Example

In this example, we use an NTP client to sync with NTP servers using UDP and keep track of time locally. Open the example. “File” -> “Examples” -> “NTPClient” -> “Advanced”

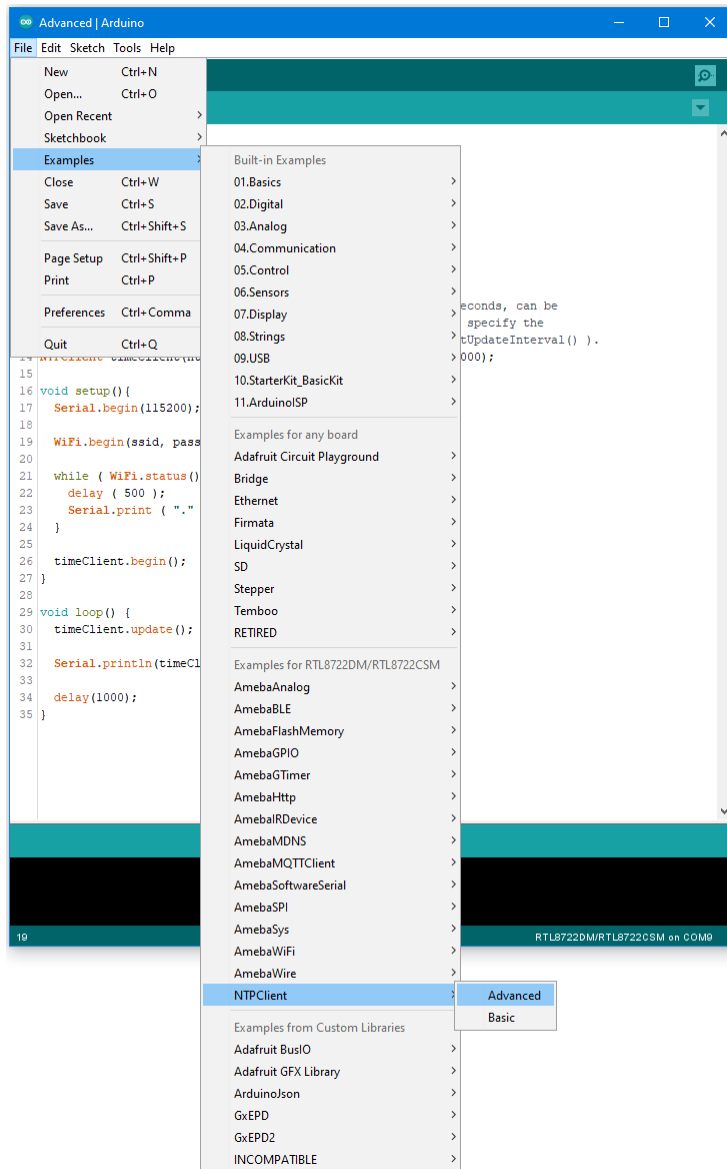


Modify the highlighted code section (ssid, password) to connect to your WiFi network.



```
1 #include <NTPClient.h>
2 #include <WiFi.h>
3 #include <WiFiUDP.h>
4
5 char ssid[] = "<SSID>";
6 char pass[] = "<PASS>";
7
8
9 WiFiUDP ntpUDP;
10
11 // You can specify the time server pool and the offset (in seconds, can be
12 // changed later with setTimeOffset() ). Additionally you can specify the
13 // update interval (in milliseconds, can be changed using setUpdateInterval() ).
14 NTPClient timeClient(ntpUDP, "europe.pool.ntp.org", 3600, 60000);
15
16 void setup() {
17   Serial.begin(115200);
18
19   WiFi.begin(ssid, pass);
20
21   while ( WiFi.status() != WL_CONNECTED ) {
22     delay ( 500 );
23     Serial.print ( "." );
24   }
25
26   timeClient.begin();
27 }
28
29 void loop() {
30   timeClient.update();
31
32   Serial.println(timeClient.getFormattedTime());
33
34   delay(1000);
35 }
```

Compile the code and upload it to Ameba. After pressing the Reset button, Ameba connects to WiFi, gets the UTC time from the NTP server, and prints out the current time with time zone offset to the serial monitor.

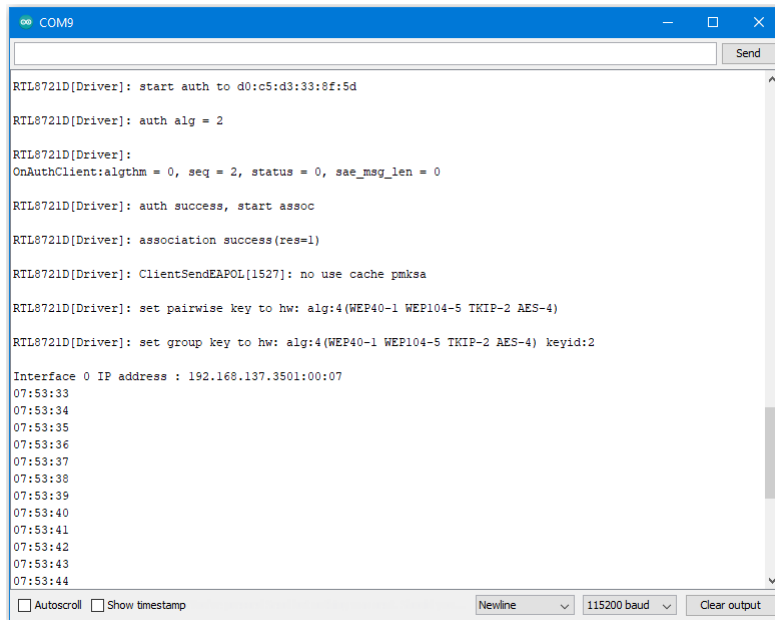

Code Reference

Configure NTP client:

The NTPClient needs to use a UDP client for communications. A WiFiUDP client is declared and passed to the NTPClient constructor, along with an NTP server address, time zone offset in seconds, and update interval in milliseconds. If detailed configuration is not needed, just passing in the UDP client is also sufficient, refer to the “NTPClient” -> “Basic” example.

```

WiFiUDP ntpUDP;
NTPClient timeClient(ntpUDP, "europe.pool.ntp.org", 3600, 60000);

```

Start NTP client:

After connecting to WiFi, the NTPClient is started using the `begin()` function, which causes the client to sync with the NTP server and get the UTC time.

```

WiFiUDP ntpUDP;
timeClient.begin();

```

Get local time:

`getFormattedTime()` is used to format the received UTC time into the local time zone. `update()` is called every loop so that the NTPClient will sync with the NTP server once every update interval.

```
timeClient.update();  
timeClient.getFormattedTime();
```

Transmit IR NEC Raw Data And Decode

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 2
- Grove –Infrared Emitter x1 (Figure 1)
- Grove –Infrared Receiver x1 (Figure 2)

Example

In this example, we use two Ameba RTL8722 modules that connecting with an infrared (IR) Emitter and an IR Receiver separately to transmit and receive IR NEC Raw data.



Figure 1: Grove –Infrared Receiver

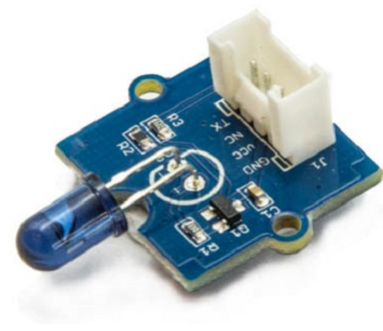


Figure 2: Grove –Infrared Emitter

On the transmission side, the transmitter will send IR NEC raw data. The raw data can be seen as consecutive durations of “marks” and “spaces” (Figure 3) in microseconds (us).

- Mark: a specific period of sending pulses
- Space: a specific period of sending nothing

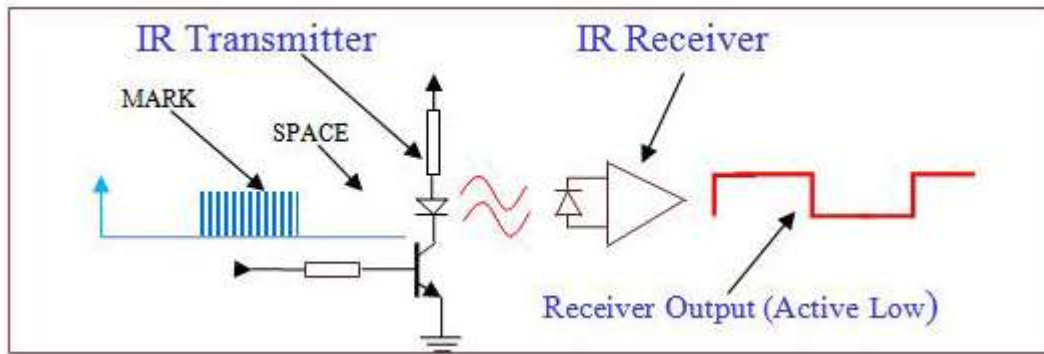


Figure 3: A typical IR transmission and reception setup implementation

For more details, please refer to SB-Projects' topic of [IR Remote Control Theory](#) to learn the theory of IR remote controls operation and a collection of IR protocol descriptions. In this example, we are going to use NEC (Now Renesas, also known as Japanese Format) as the transmission protocol.

NEC Features

- 8-bit address and 8-bit command length.
- Extended mode available, doubling the address size.
- Address and command are transmitted twice for reliability.
- Pulse distance modulation.
- The carrier frequency of 38kHz.
- Bit time of 1.125ms or 2.25ms.

Modulation

NEC protocol uses Pulse Distance Encoding of the bits for data communication (Figure 4). A logical “1” is represented by total duration of 2250us, with 560us of “marks” and (2250-560) us of “spaces” . While logical ” 0” is represented by total duration of 1120us, with 560us “marks” and (1120-560) us of “spaces” .

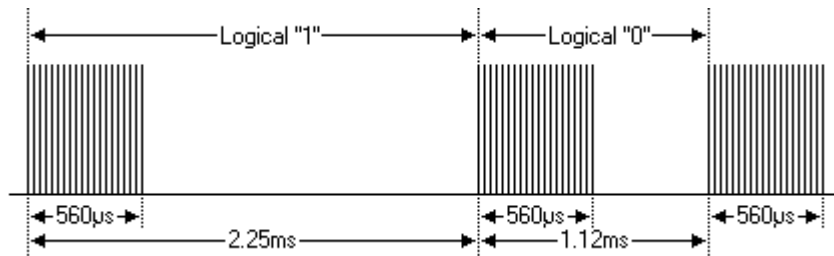


Figure 4: Modulation of NEC

Since a total number of 32-bit data together with the header and the end-bit will be transferred (Figure 5). If we separate the data in the time-frame (in us), there will be $(2 + 32) \times 2 + 1 = 69$ “marks” / “spaces” to be transmitted (Figure 6), which forms the raw NEC data we would like to transmit in our Arduino “*.ino” file. This part of the code can be modified by users. Details of how to obtain raw data code for your remote devices, you may refer to [Ken Shirriff's blog](#), where it provides multiple libraries provided online.

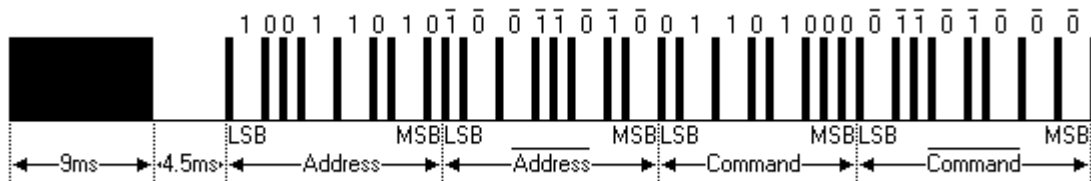


Figure 5: Sample of a Full NEC Data (in logic1 or 0)

```

9000, 4500, // starting bit
560, 560, 560, 560, 560, 1690, 560, 560, 560, 560, 560, 560, 560, 560, 560, // address
560, 1690, 560, 1690, 560, 560, 560, 1690, 560, 1690, 560, 1690, 560, 1690, 560, 1690, // ~address
560, 560, 560, 560, 560, 560, 560, 1690, 560, 560, 560, 560, 560, 560, 560, // data
560, 1690, 560, 1690, 560, 1690, 560, 560, 560, 1690, 560, 1690, 560, 1690, 560, 1690, //~data
560 // stoping bit

```

Figure 6: Sample of a Full NEC RAW Data (in us)

Figure 7 and 8 shows the pin configuration of IR Emitter and Receiver with Ameba RTL8722 board.

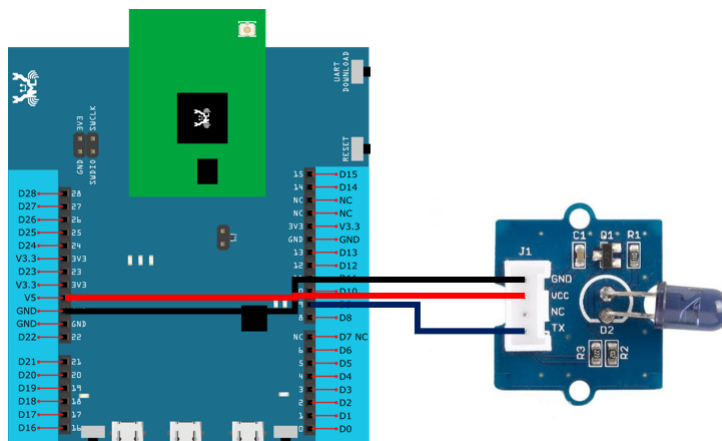


Figure 7: Pin configuration of IR Emitter and Ameba RTL8722

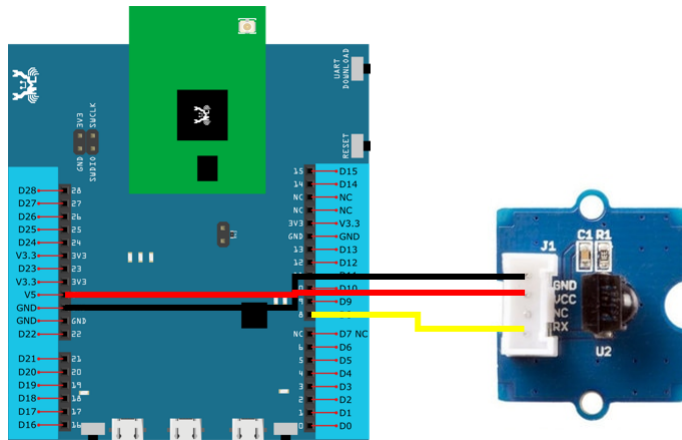


Figure 8: Pin configuration of the IR Receiver and Ameba RTL8722

Figure 9 and Figure 10 shows the pin configuration of IR Emitter and Receiver with Ameba RTL8722DM MINI.

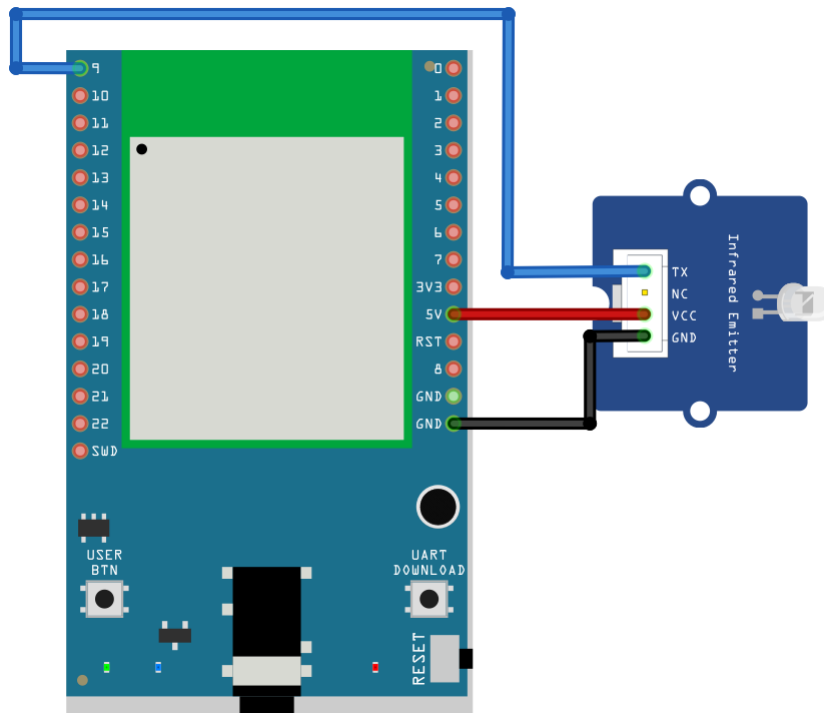


Figure 9: Pin configuration of IR Emitter and Ameba RTL8722DM MINI

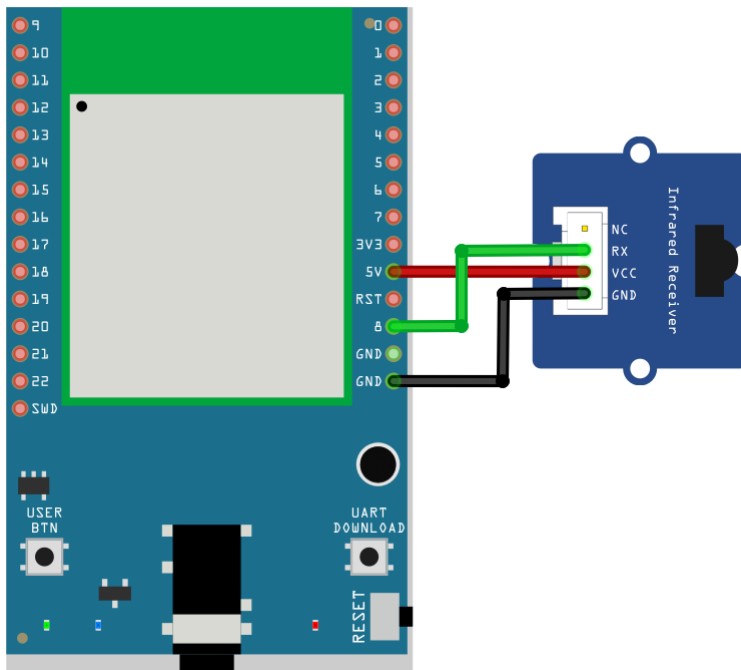


Figure 10: Pin configuration of the IR receiver and Ameba RTL8722DM MINI

After the connection is being set up correctly, we will move to the coding part for this example. First, make sure the correct Ameba development board is selected in Arduino IDE: “Tools” -> “Board” .

Open the “IRSendRAW” example in “File” -> “Examples” -> “AmebaIRDevice” -> “IRSendRAW” (Figure 11) and upload to 1st board connected with IR Emitter:

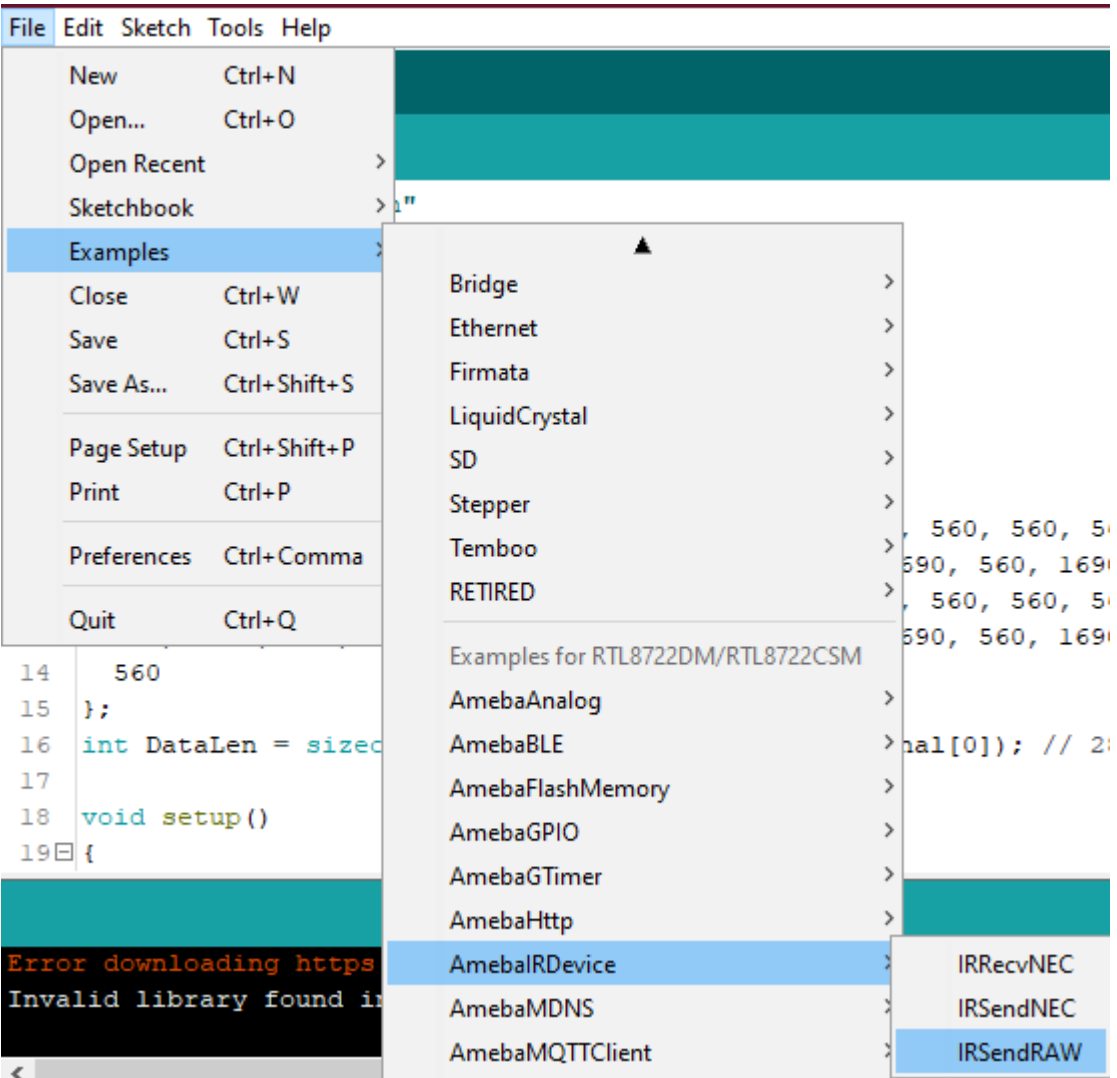


Figure 11: Example Location of IRSendRaw and IRRecvNEC

After successfully upload the sample code for IRSendRaw, you might need to upload the IRRecvNEC example for the 2nd board connected with IR Receiver from “File” -> “Examples” -> “AmebaIRDevice” -> “IRRecvNEC” .

After opening the serial monitor on the IR Receiver side and press the reset buttons on two boards, the data “48” will be received every 3 seconds (due to the delays () function, not compulsory to wait). After decoding the signal from the receiving Pin D8 and transmitting Pin D9 with Logic Analyser and Pulse View (Figure 10), the result is also shown as “48” after decoding the receiving data with IR NEC Protocol.

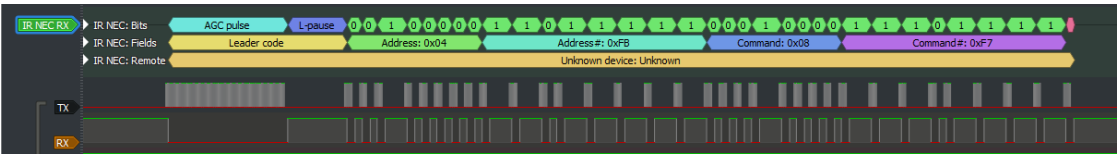


Figure 10: Pulse View results from sending and receiving pin

Code Reference

[1] Seeed Official website for Grove –Infrared Receiver

https://wiki.seeedstudio.com/Grove-Infrared_Receiver/

[2] Seed Official website for Grove –Infrared Emitter

https://wiki.seeedstudio.com/Grove-Infrared_Emitter/

[3] Ken SHirriff’ s blog on A Multi-Protocol Infrared Remote Library for the Arduino

<http://www.righ.to.com/2009/08/multi-protocol-infrared-remote-library.html>

[4] SB-Projects: IR Remote Control Project

<https://www.sbprojects.net/knowledge/ir/index.php>

E-Paper - Display Images

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Waveshare 2.9inch e-Paper HAT (D) x 1


Example

In this example, we use the Ameba RTL8722 module connects to a Waveshare 2.9inch e-Paper module to display a few QR codes. The display uses the flexible substrate as a base plate, with an interface and a reference system design.


The 2.9” active area contains 296×128 pixels and has 1-bit white/black full display capabilities. An integrated circuit contains gate buffer, source buffer, interface, timing control logic, oscillator, etc...are supplied with each panel.

You may refer to the official [2.9inch e-Paper HAT \(D\) datasheet](#) to know more information about this module.


Front view of the e-Paper Module:

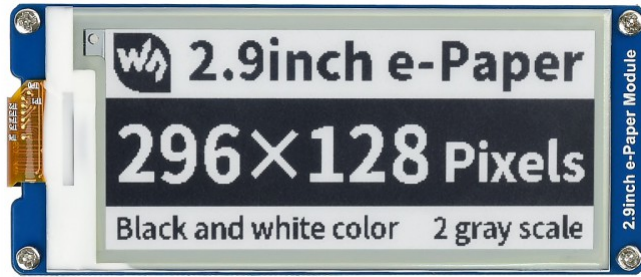

RTL8722DM / RTL8722CSM Wiring Diagram:

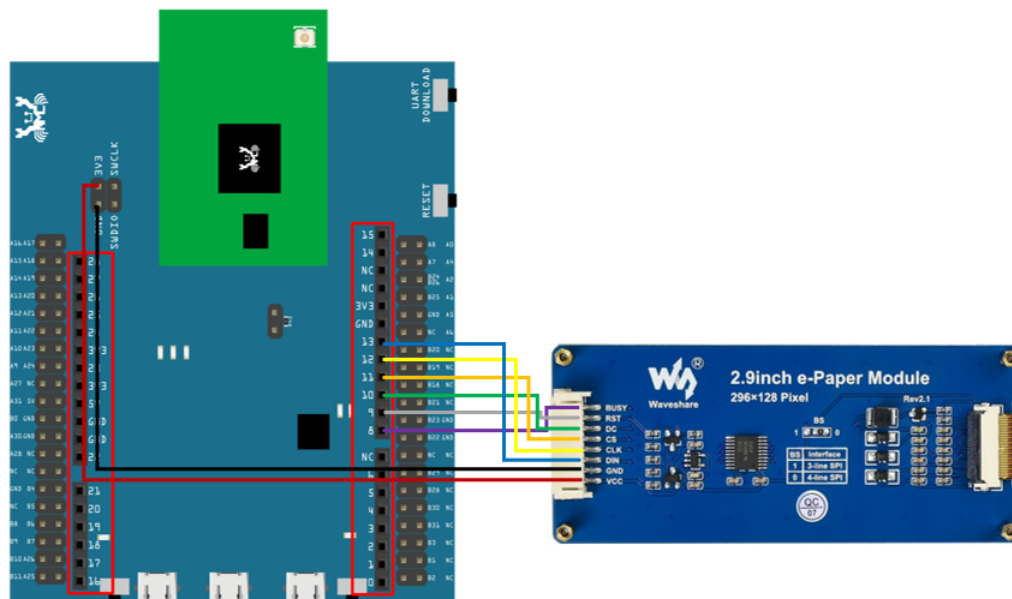


RTL8722DM MINI Wiring Diagram:

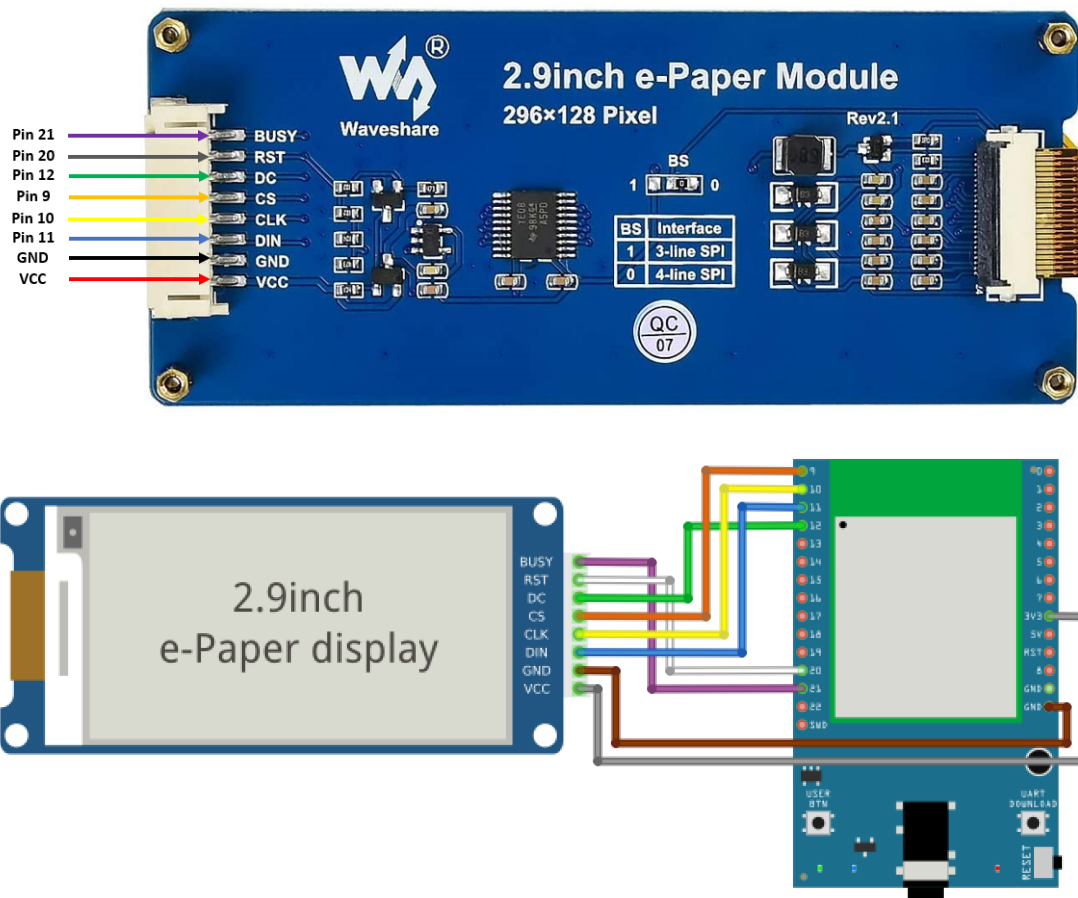

RTL8720DN(BW16) Wiring Diagram:



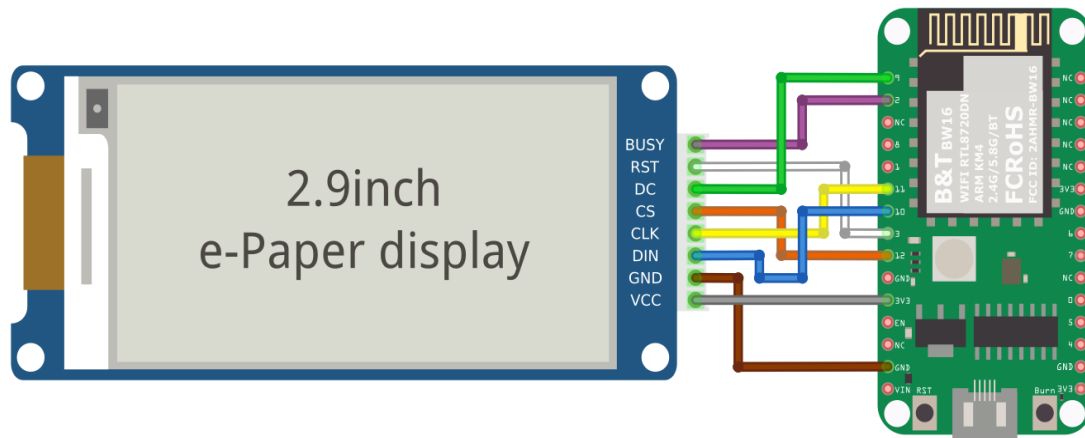

Firstly, you need to prepare a picture/photo in the format of 296×128 pixels. We can easily find a photo resizing tool online, for example, the [Online Image Resizer](#).


Following the instructions on the website, then download the generated image in JPG format.

Secondly, we use the [Image2LCD](#) tool to transfer the downloaded 296×128 image into hexadecimal codes. You can visit this [YouTube](#) link to get detailed instructions.

Download the E Ink zip library, AmebaEink.zip, at

https://github.com/ambiot/ambd_arduino/tree/master/Arduino_zip_libraries

Then install the AmebaEink.zip. Open the “DisplayQR” example in “File” → “Examples” → “AmebaEink” → “EinkDisplayImage” :

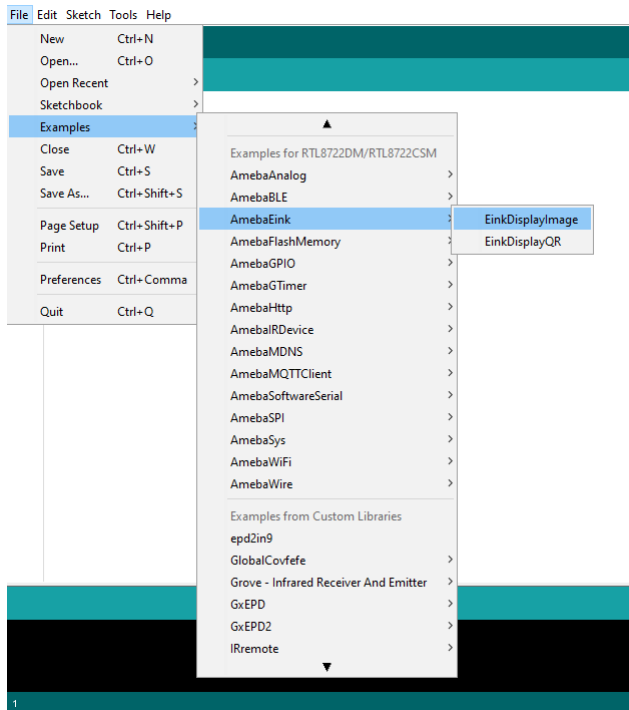

Press the reset button after uploading the sample code, you will need to wait for around 1-2 seconds for the e-Paper module to fresh its screen. Then the screen will start to display an image for 5 seconds first, then 3 different QR codes will be displayed every 5 seconds (showing in the screenshot below, you may scan the QR codes and find out more information if you wish to). Lastly, a gif which comes in form of 3 frames will be displayed for a few seconds.



Code Reference

[1] We use Good Display GDEH029A1 2.9 Inch / 296×128 Resolution / Partial Refresh Arduino Sample Code to get the e-Paper successfully Display: <http://www.good-display.com/product/201.html>

[2] Provide the link to how to generate a QR code on the E-paper module: <https://eugeniopace.org/qr-code/arduino/eink/2019/07/01/qr-code-on-arduino.html>

E-Paper - Display Text

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Waveshare 2.9inch e-Paper HAT (D) x 1


Example

In this example, we use the Ameba RTL8722 module connects to a Waveshare 2.9inch e-Paper module to display a few QR codes. The display uses the flexible substrate as a base plate, with an interface and a reference system design.

The 2.9" active area contains 296×128 pixels and has 1-bit white/black full display capabilities. An integrated circuit contains gate buffer, source buffer, interface, timing control logic, oscillator, etc... are supplied with each panel.


You may refer to the official [2.9inch e-Paper HAT \(D\) datasheet](#) to know more information about this module.

Front view of the e-Paper Module:

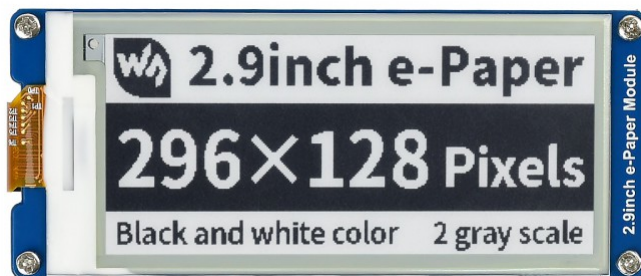


RTL8722DM / RTL8722CSM Wiring Diagram:




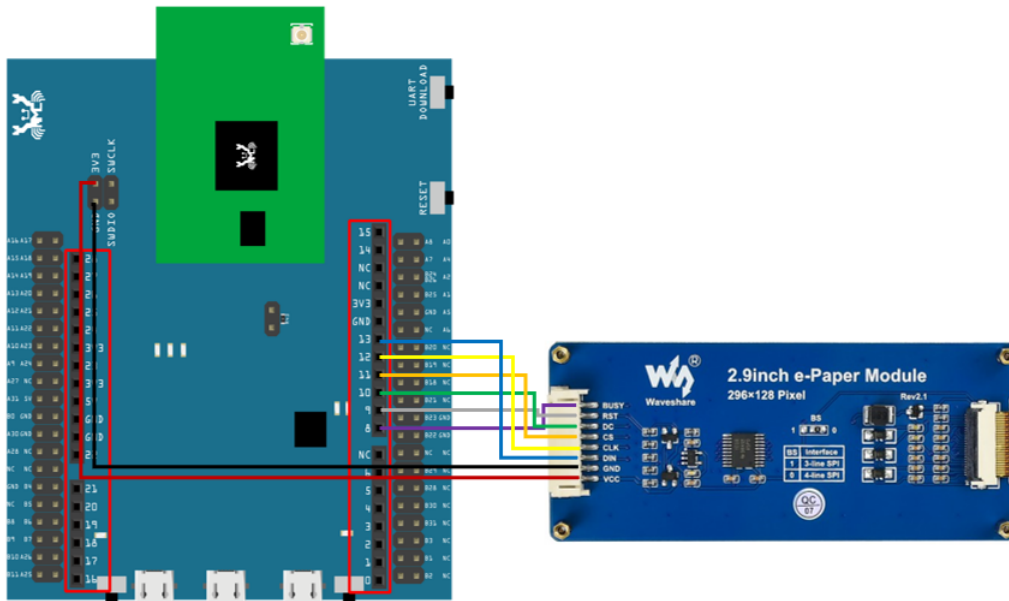

RTL8722DM MINI Wiring Diagram:

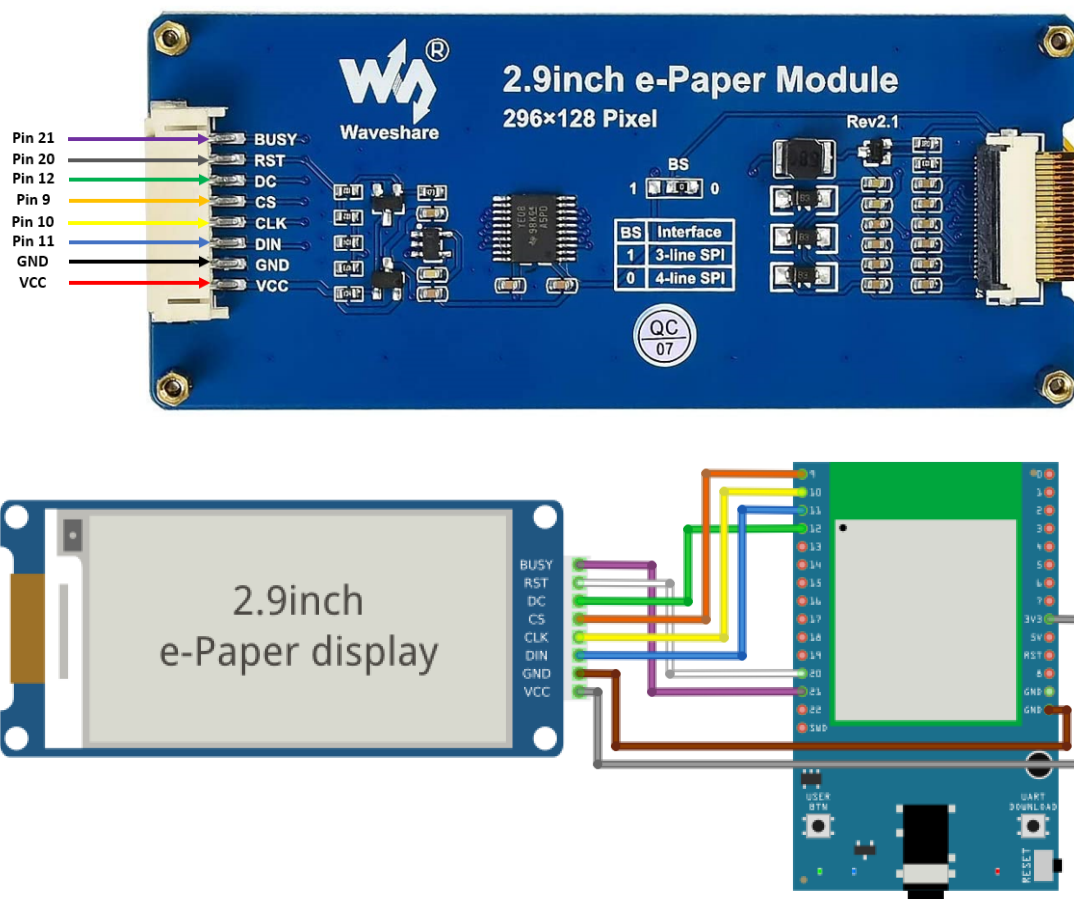


RTL8720DN(BW16) Wiring Diagram:

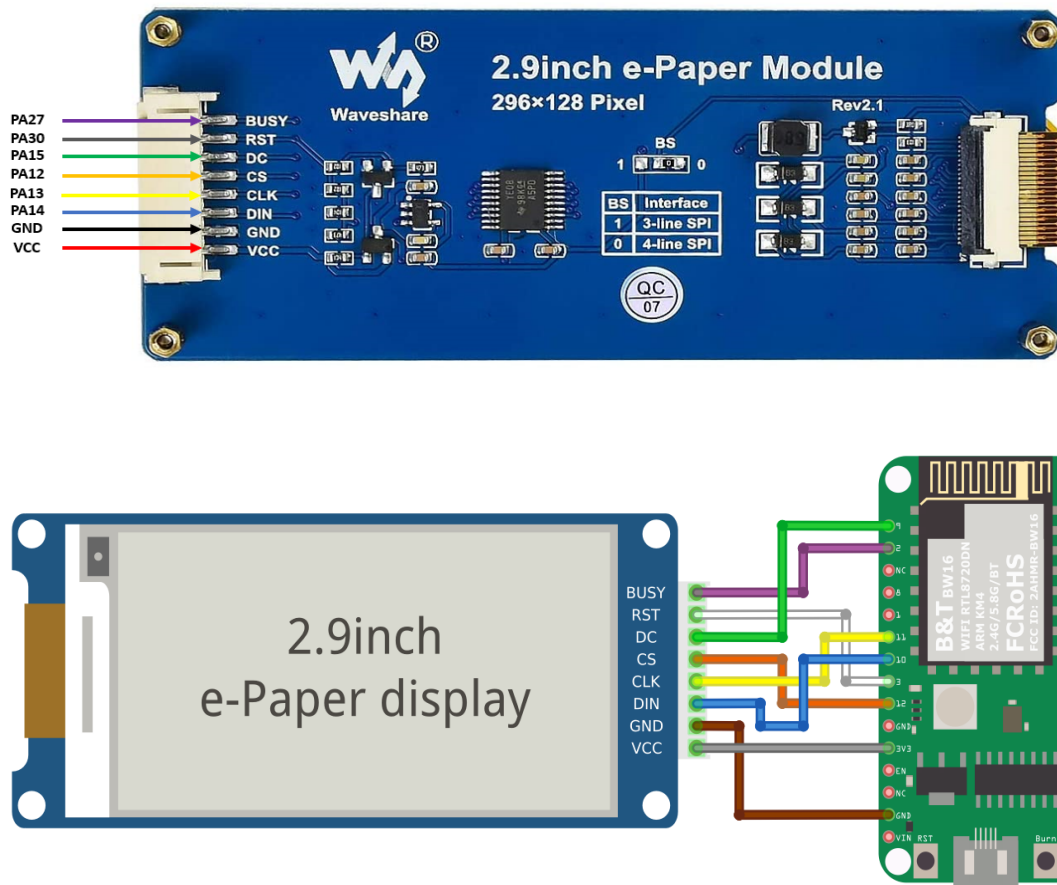


Download the E Ink zip library, AmebaEink.zip, at

https://github.com/ambiot/ambd_arduino/tree/master/Arduino_zip_libraries

Then install the AmebaEink.zip. Open the “DisplayQR” example in “File” -> “Examples” -> “AmebaEink” -> “EinkDisplayText” :

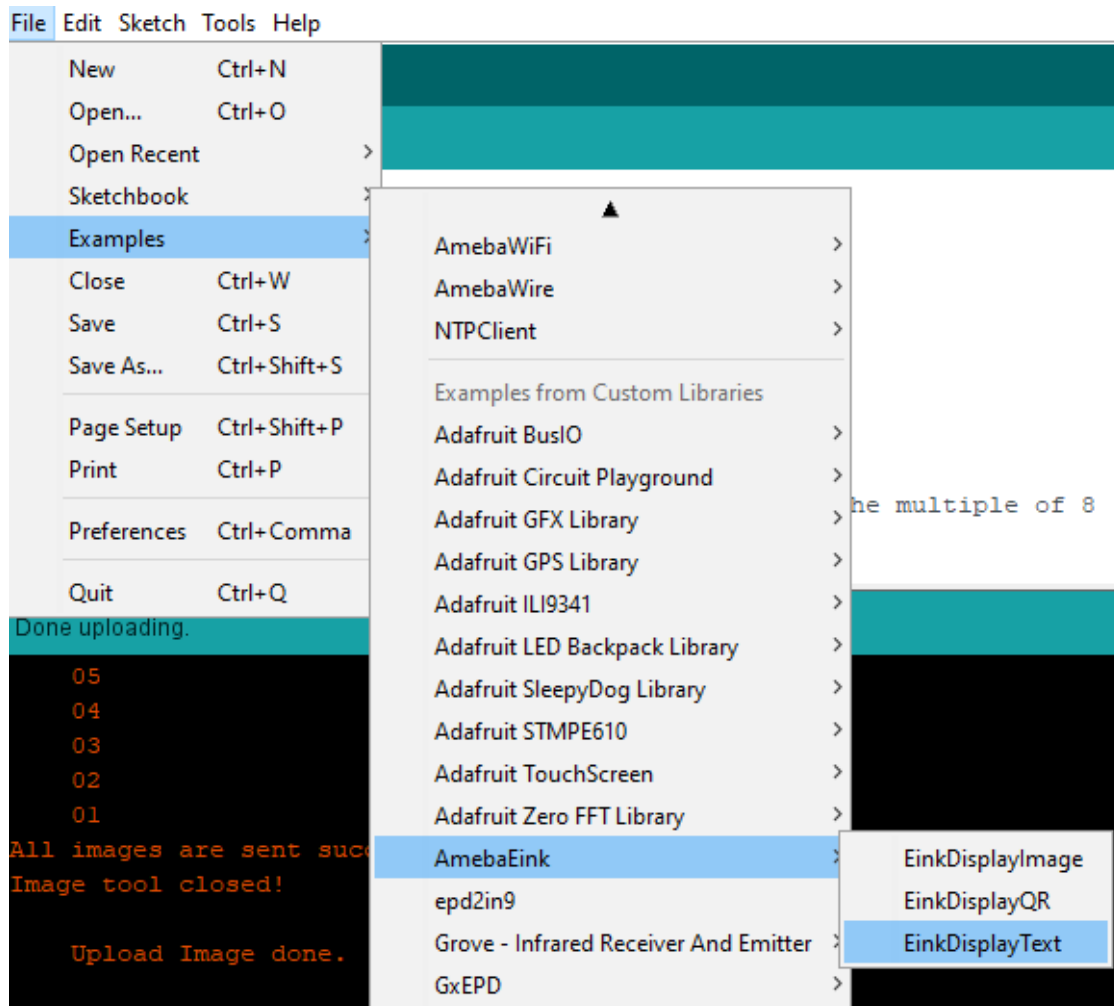

Upload the code to the board and press the Reset button after the uploading is done. You will find these texts displayed on the board:

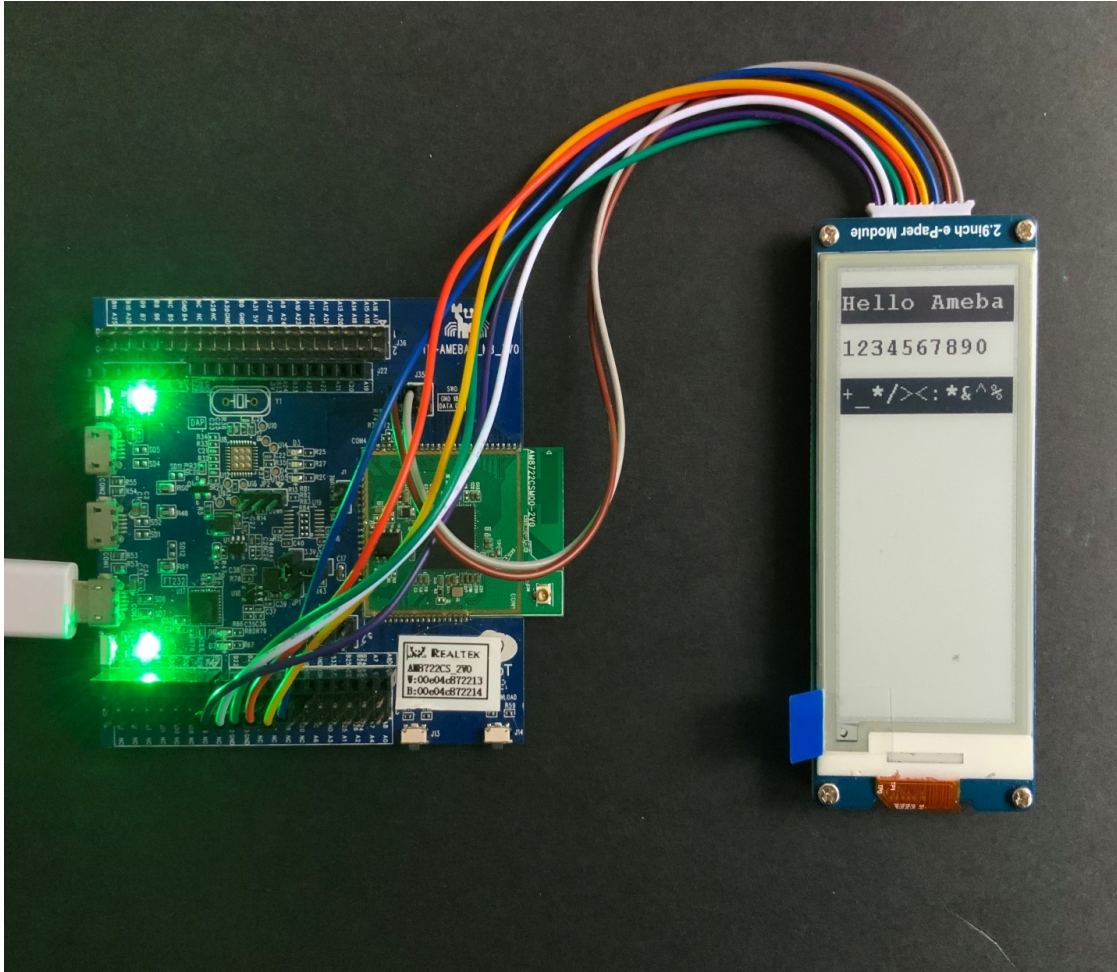

Code Reference

[1] We use Good Display GDEH029A1 2.9 Inch / 296×128 Resolution / Partial Refresh Arduino Sample Code to get the e-Paper successfully Display: <http://www.good-display.com/product/201.html>

E-Paper - Display User-generated QR Code

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Waveshare 2.9inch e-Paper HAT (D) x 1


Example

In this example, we use the Ameba RTL8722 module connects to a Waveshare 2.9inch e-Paper module to display a few QR codes. The display uses the flexible substrate as a base plate, with an interface and a reference system design.

The 2.9" active area contains 296×128 pixels and has 1-bit white/black full display capabilities. An integrated circuit contains gate buffer, source buffer, interface, timing control logic, oscillator, etc...are supplied with each panel.


You may refer to the official [2.9inch e-Paper HAT \(D\)](#) datasheet to know more information about this module.

Front view of the e-Paper Module:

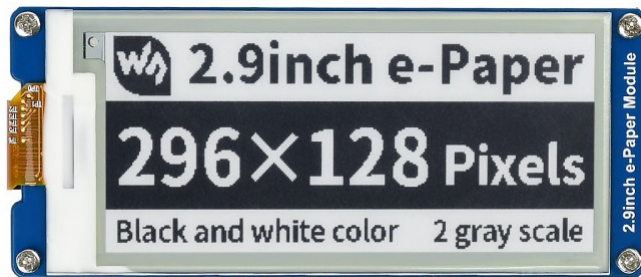


RTL8722DM / RTL8722CSM Wiring Diagram:




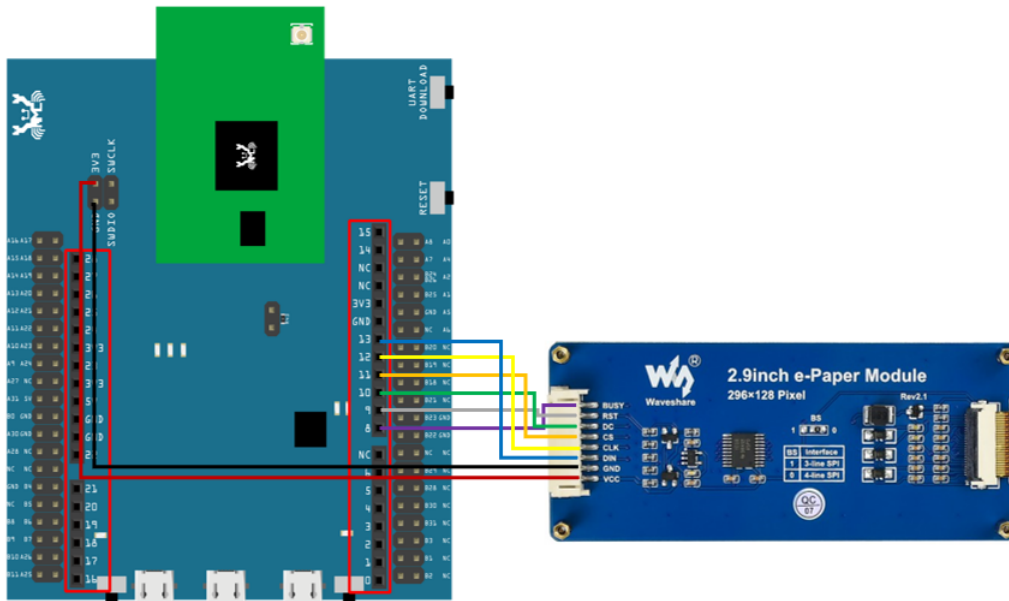

RTL8722DM MINI Wiring Diagram:

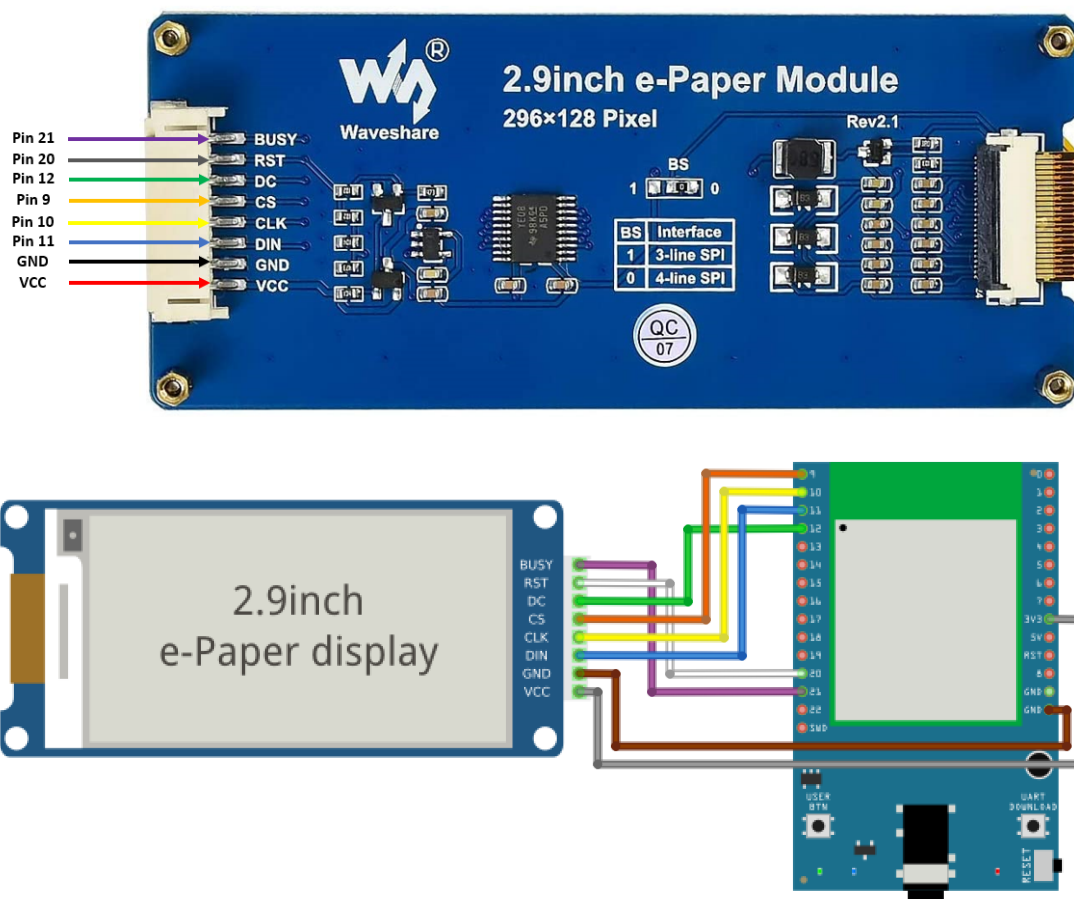


RTL8720DN(BW16) Wiring Diagram:

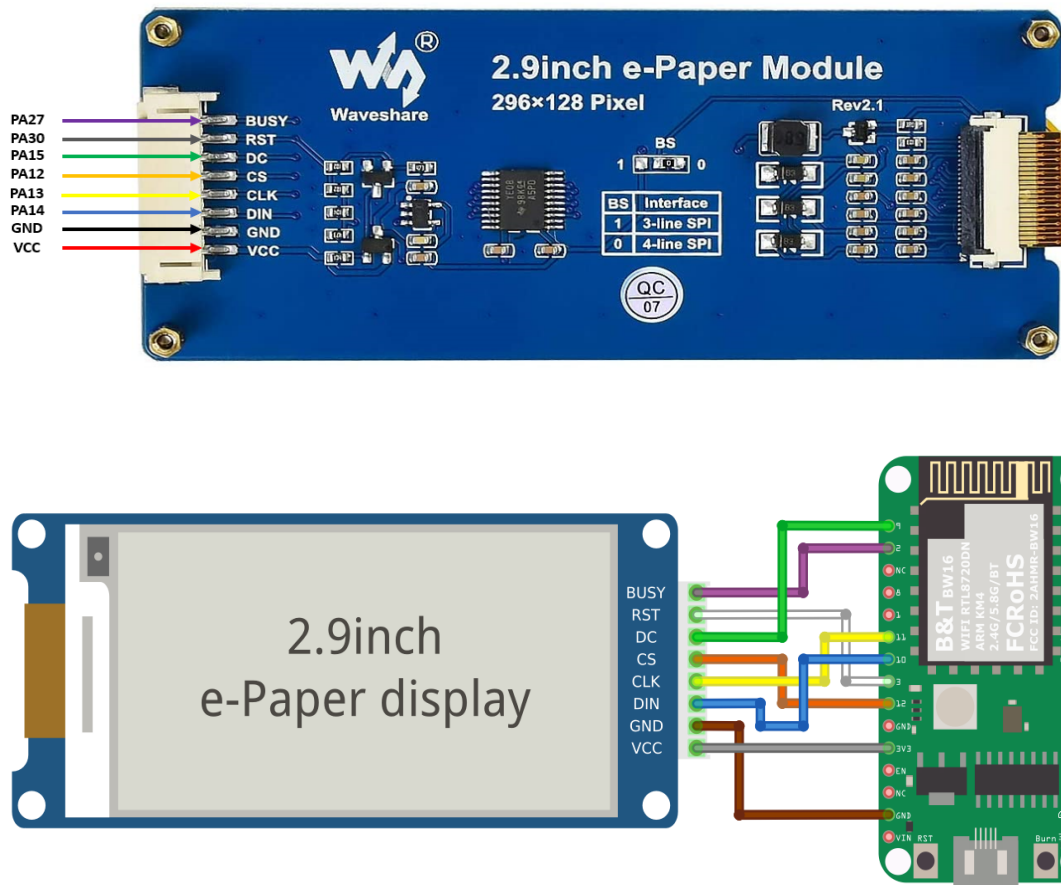

Download the Eink zip library, AmebaEink.zip, at


https://github.com/ambiot/ambd_arduino/tree/master/Arduino_zip_libraries

Then install the AmebaEink.zip. Open the “DisplayQR” example in “File” → “Examples” →

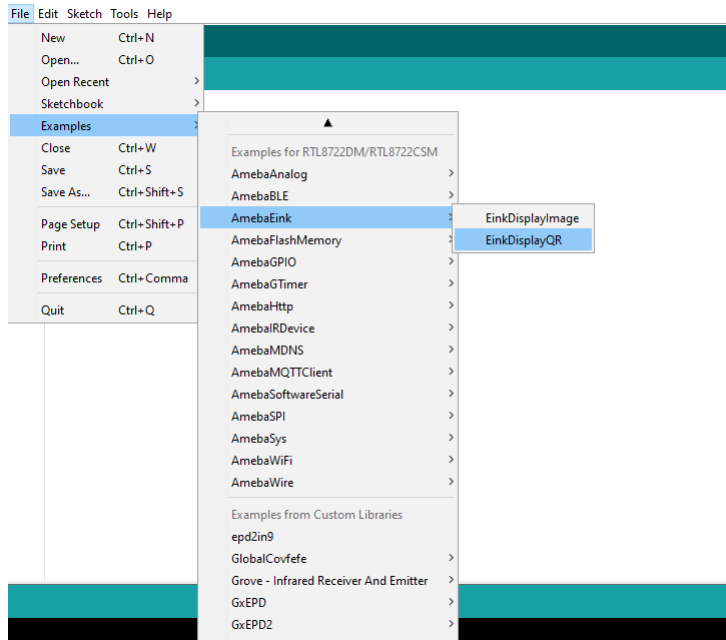

“AmebaEink” → “DisplayQR” :

Modify the URL in the loop() section as your wish, after that, verify and upload the code to the Ameba board. Upon successfully upload the sample code and press the reset button, a QR code generated based on the URL of your input will be shown on the E-Paper module. The QR code showing below leads to our Ameba IoT official website: [Ameba ARDUINO](#)

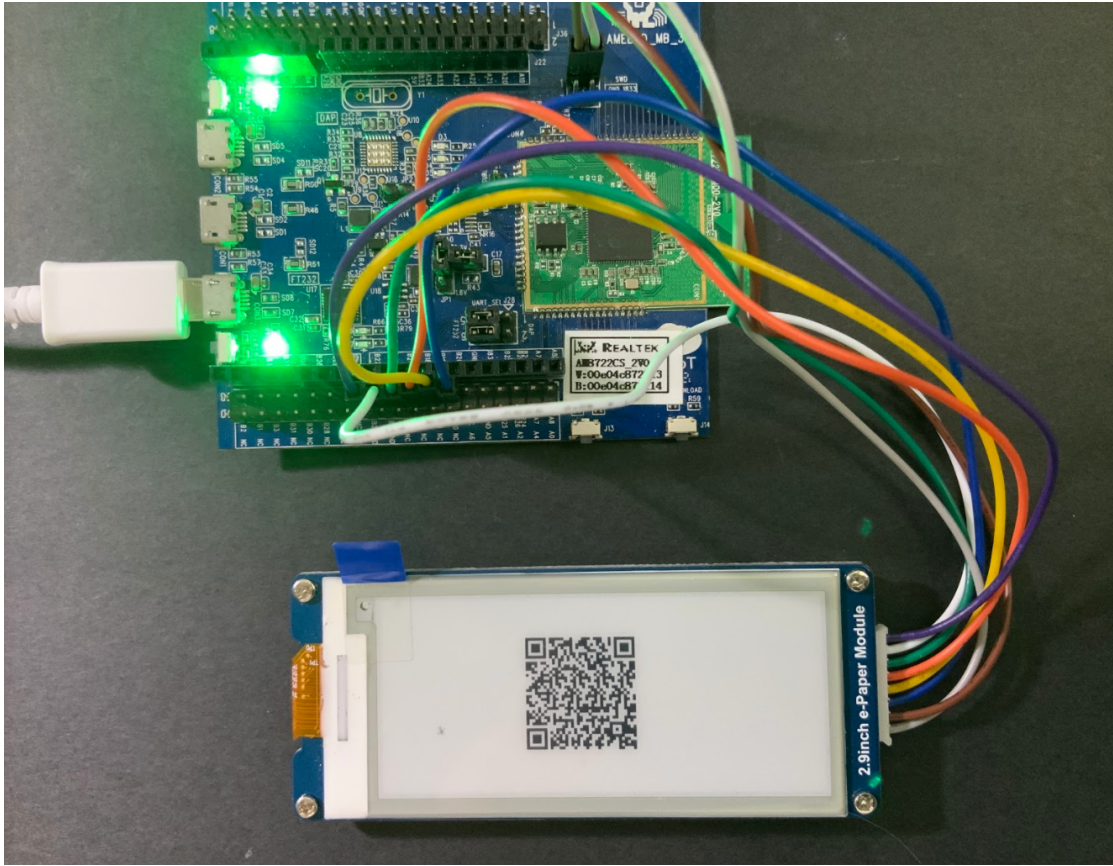

Code Reference

- [1] We use Good Display GDEH029A1 2.9 Inch / 296×128 Resolution / Partial Refresh Arduino Sample Code to get the e-Paper successfully Display: <http://www.good-display.com/product/201.html>
- [2] Provide the link to how to generate a QR code on the E-paper module: <https://eugeniopace.org/qrcode/arduino/eink/2019/07/01/qrcode-on-arduino.html>
- [3] A simple library for generating QR codes in C, optimized for processing and memory-constrained systems: <https://github.com/ricmoo/QRCode#data-capacities>

A Simple RTC Example

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1


Example

This example demonstrates how to use the RTC library methods. This function describes how to use the RTC API. The RTC function is implemented by an independent BCD timer/counter.

Select the correct Ameba development board from the Arduino IDE: "Tools" -> "Board" .

Then open the "RTC" example from:

"File" -> "Examples" -> "AmebaRTC" -> "RTC":

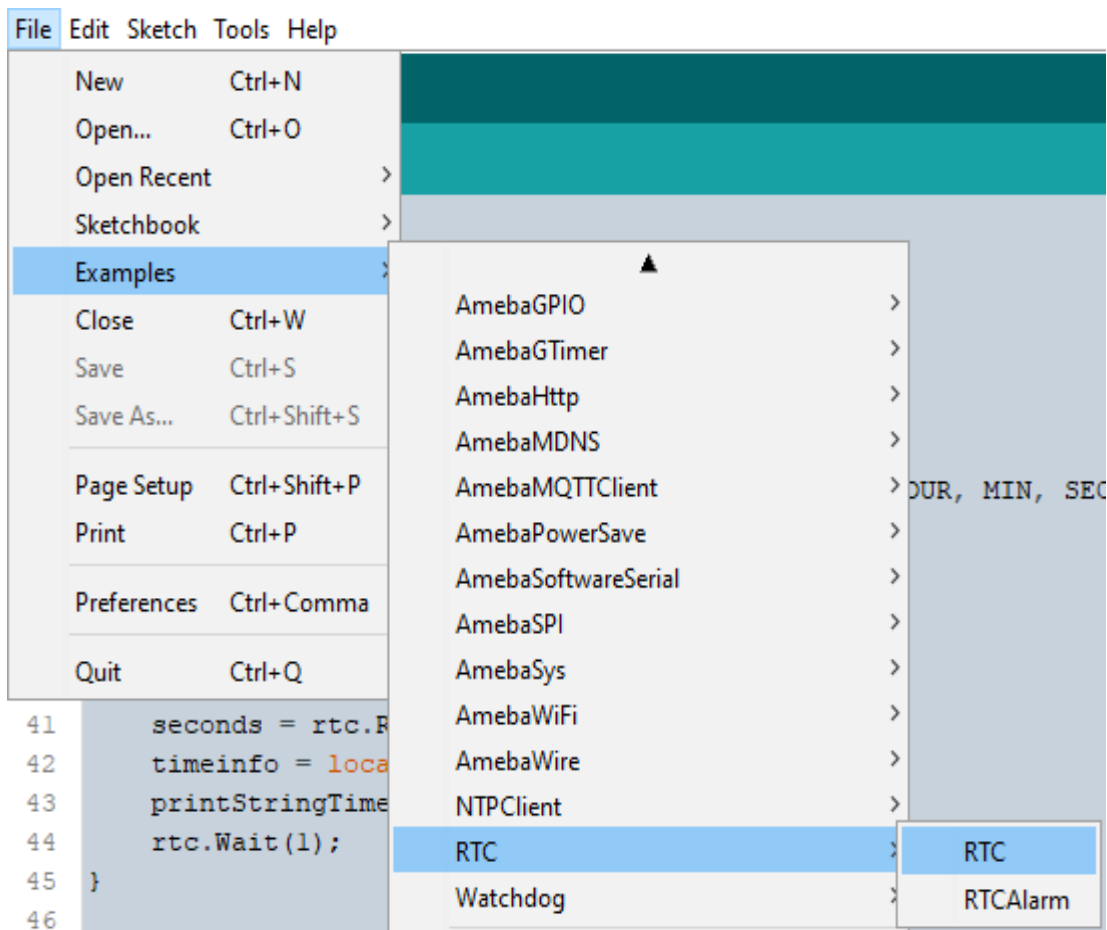

Upon successfully upload the sample code and press the reset button, this example will print out time information since the user initialized time every second in the Serial Monitor.

```
Epoch Time(in s) since January, 1, 1970:1577884473s
Time as a basic string:           Wed Jan  1 13:14:33 2020
Time as a custom formatted string: 2020-1-1 13:14:33
-----
Epoch Time(in s) since January, 1, 1970:1577884474s
Time as a basic string:           Wed Jan  1 13:14:34 2020
Time as a custom formatted string: 2020-1-1 13:14:34
-----
Epoch Time(in s) since January, 1, 1970:1577884475s
Time as a basic string:           Wed Jan  1 13:14:35 2020
Time as a custom formatted string: 2020-1-1 13:14:35
-----
Epoch Time(in s) since January, 1, 1970:1577884476s
Time as a basic string:           Wed Jan  1 13:14:36 2020
Time as a custom formatted string: 2020-1-1 13:14:36
-----
```

☐ Autoscroll ☐ Show timestamp Newline 115200 baud Clear output

Code Reference

[1] Simple RTC example from Arduino Tutorials:

<https://www.arduino.cc/en/Tutorial/SimpleRTC>

A Simple RTC Alarm

Materials


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1

Example


This example demonstrates how to use the RTC library methods to create a RTC Alarm, so that to do some tasks when an alarm is matched. In particular, the RTC time is set at 16:00:00 and an alarm at 16:00:10. When the time matches, “Alarm Match” information will be printed on the serial monitor.

First, select the correct Ameba development board from the Arduino IDE: “Tools” -> “Board” .

Then open the “RTCArm” example from: “File” -> “Examples” -> “RTC” -> “RTCArm” :

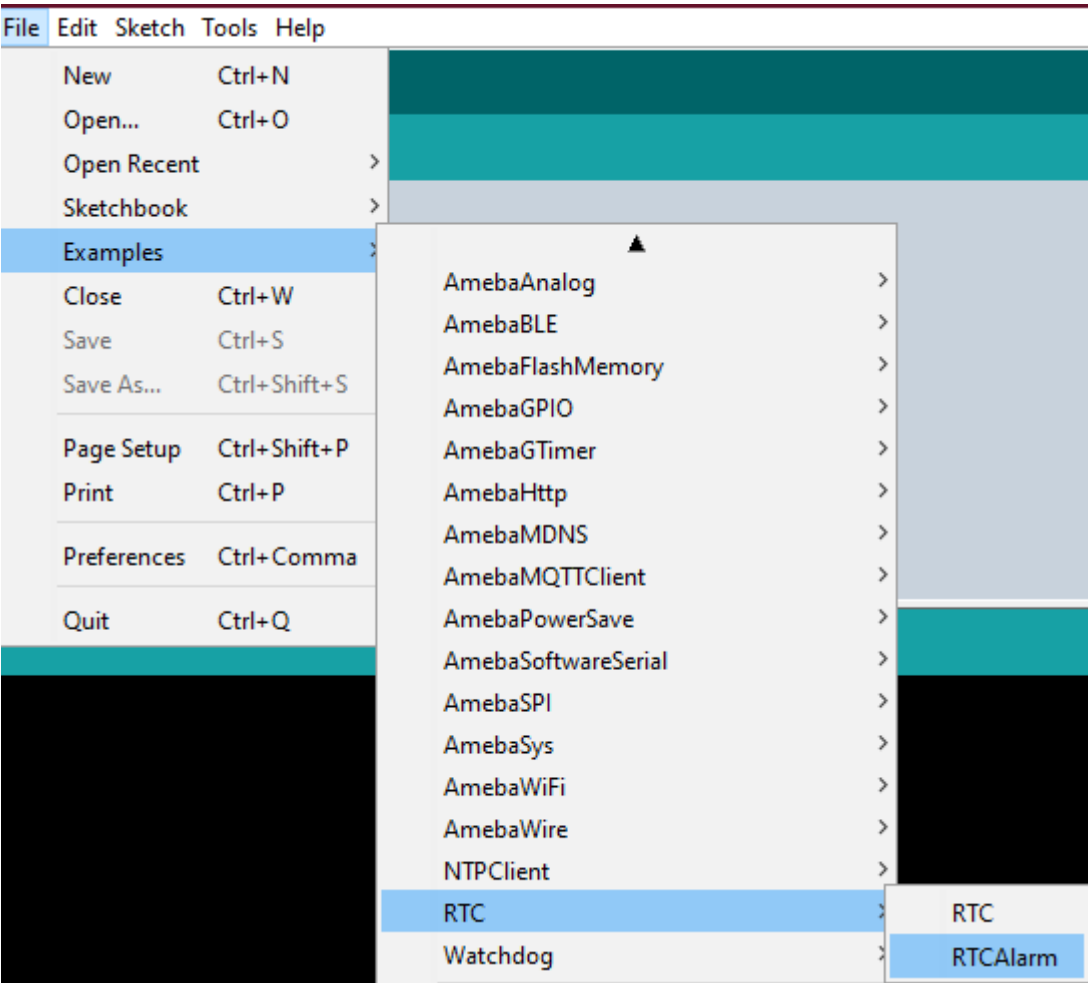

In the example, the RTC time is set at 16:00:00 and an alarm is set at 16:00:10. Upon successfully upload the sample code and press the reset button. When the alarm time (10 seconds) is reached the attached interrupt function will print the following information: “Alarm Matched!” showing in this figure below.

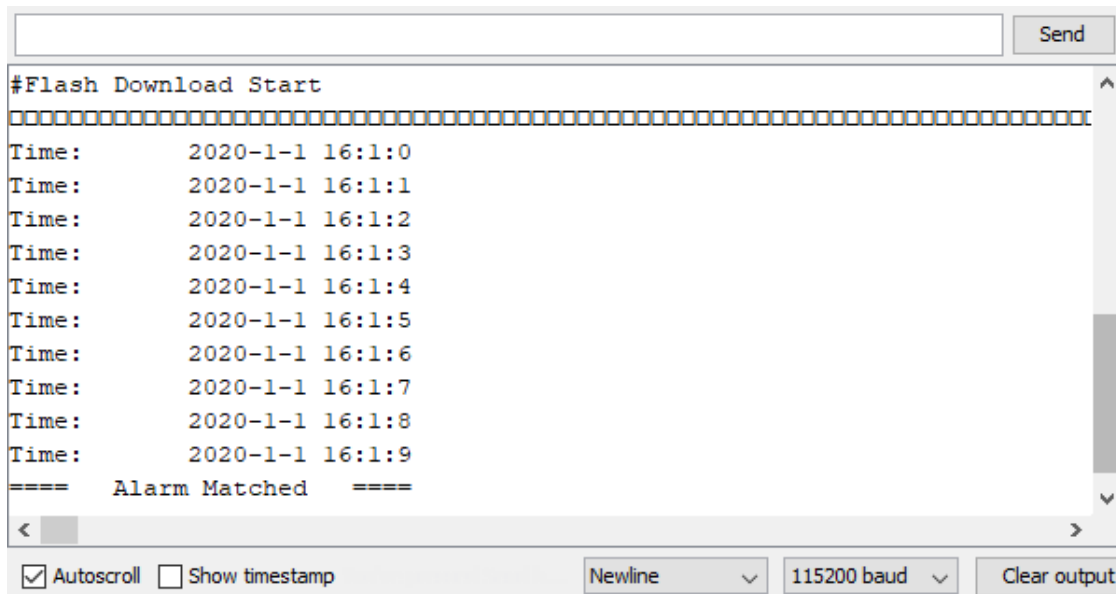

```
#Flash Download Start
=====
Time:      2020-1-1 16:1:0
Time:      2020-1-1 16:1:1
Time:      2020-1-1 16:1:2
Time:      2020-1-1 16:1:3
Time:      2020-1-1 16:1:4
Time:      2020-1-1 16:1:5
Time:      2020-1-1 16:1:6
Time:      2020-1-1 16:1:7
Time:      2020-1-1 16:1:8
Time:      2020-1-1 16:1:9
====  Alarm Matched  =====
```

Watchdog Timer Simple Example

Preparation

- AmebaD RTL8722CSM/RTL8722DM/RTL8722DM MINI Board x 1


Example

In this example, we will use this simple watchdog timer example runs on the Ameba RTL8722 module to illustrate how to use the watchdog API. Before we get into the details of the example, let's briefly go through the definition of Watchdog as well as its working principles.

Watchdog

Watchdog Timer (WDT) is a hardware timer that is used to detect the occurrence of a software fault, then automatically generates a system reset or a watchdog interrupt on the expiry of a programmed period.

In layman terms, imagine in the situation while your micro-controller is confused in an infinity loop, or any case like the micro-controller hang while performing some tasks. The normal troubleshooting method would be to press the reset button and jump out of the infinity loop. However, is it practically impossible to do press on the button all time, therefore, the watchdog timer that embedded inside the micro-controller would help with this situation.

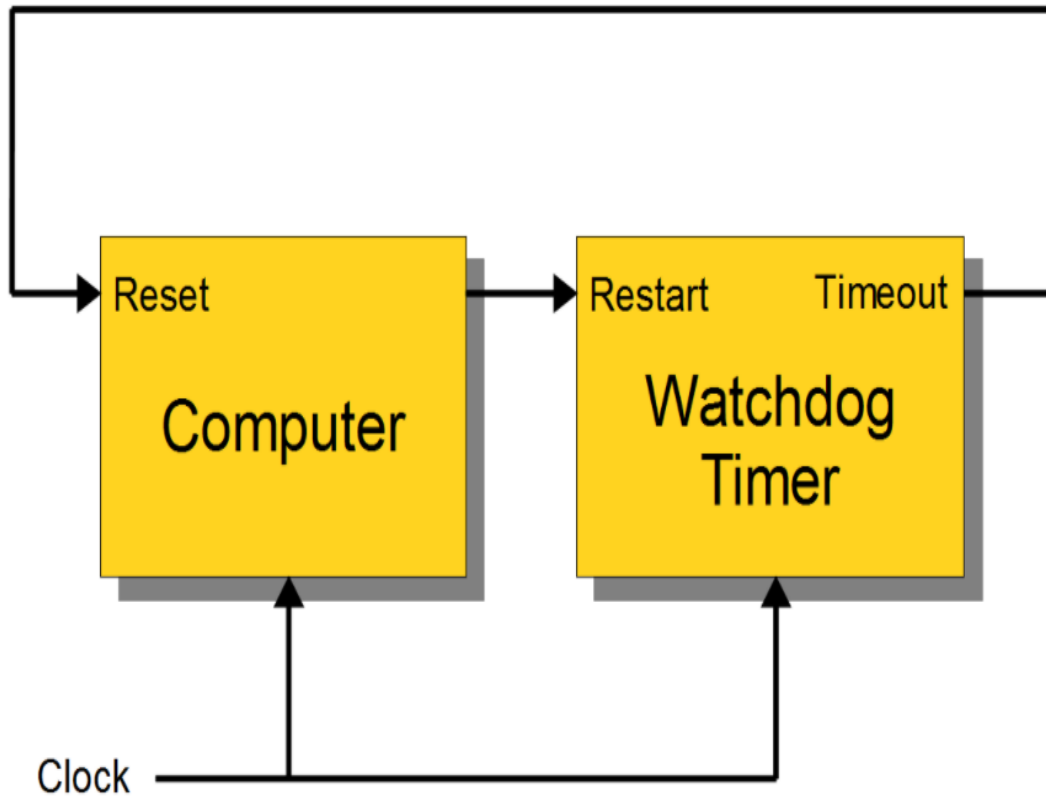

Feed the Dog

If you have a dog in your home. You need to feed that dog at a regular interval. if you can't feed one day, it will bite you! And likewise, this is the working logic behind the watchdog timer.


In our example, we created 2 tasks that contain some loop that runs repeatedly, one is called "Small_Task" and the other is called "Big_Task". We are enabling the watchdog timer is loaded with an initial value (5 seconds) greater than the total delay in the "Small_Task", but shorter than the "Big_Task".

For the successful case, the watchdog is being refreshed/feed within 5 seconds, however, for the failed case, the loop is under processing and the watchdog is not being fresh after 5 seconds, which triggers the watchdog (dog barks), an interrupt is generated to reset the processor. Likewise, the watchdog timer protects the micro-controller from the hanging case.


Then we move to the coding part for this example, for this example, you will only need the RTL8722CSM/RTL8722DM/RTL8722DM MINI Board itself.

Firstly, make sure the correct Ameba development board is selected in Arduino IDE: "Tools" -> "Board" ->

“RTL8722CSM/RTL8722DM” (or “RTL8722DM MINI”). Then open the “Watchdog Timer” example in “File” -> “Examples” -> “AmebaWatchdog” -> “Watchdog Timer” :

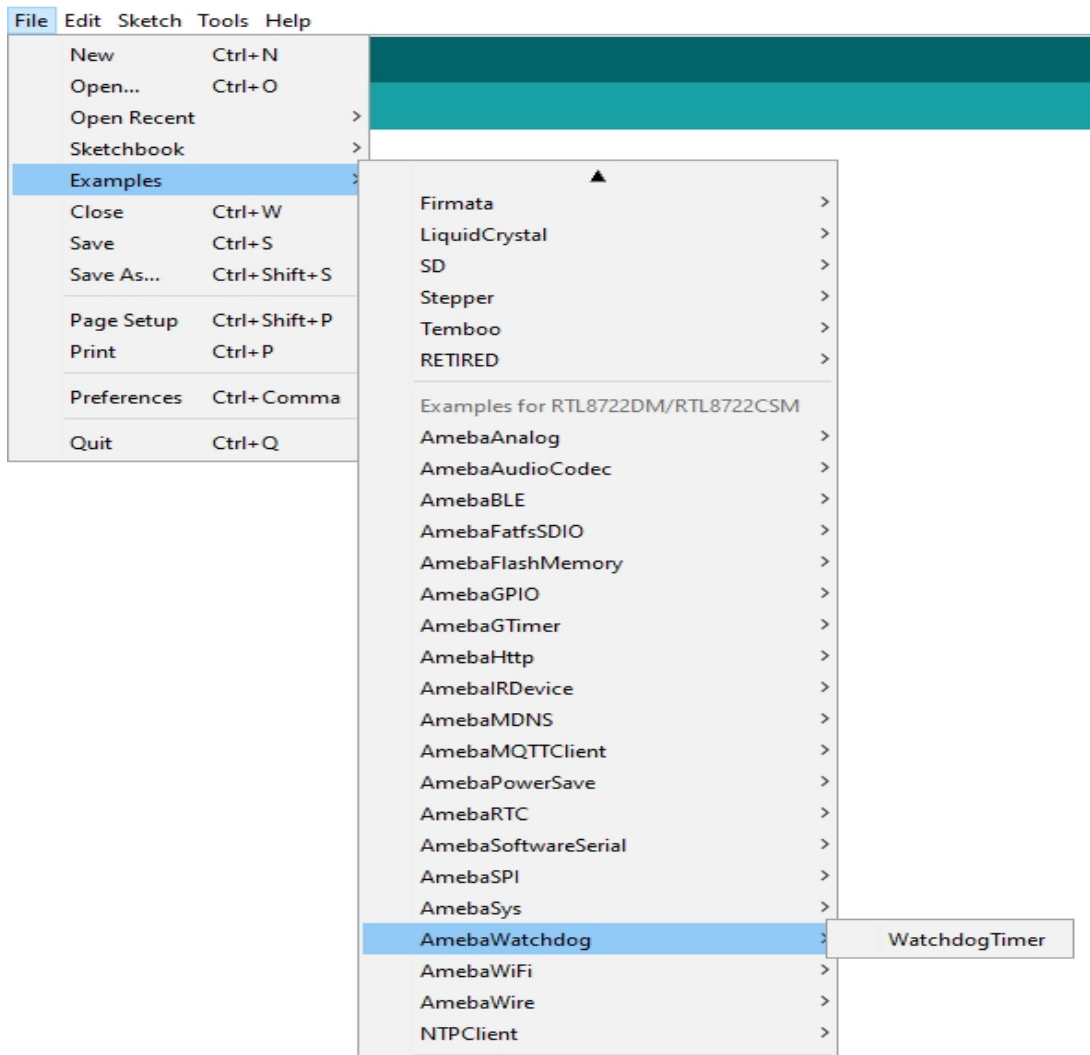

Upon successfully upload the sample code, open the serial monitor, and press the reset button. You will find that the “Small_Task” can refresh the watchdog within the 5 seconds (initialized in the watchdog timer). However, the “Big_Task” will not be able to refresh the watchdog within 5 seconds, which the watchdog “barks” then the microcontroller reset.

 COM10

```
#calibration_ok:[2:19:11]
.....doing small task.....
Small_Task finished refresh watchdog.
.....doing big task, up to 10.....
doing dummy task #1
doing dummy task #2
doing dummy task #3
doing dummy task #4
doing dummy task #5
#calibration_ok:[2:19:11]
.....doing small task.....
Small_Task finished refresh watchdog.
.....doing big task, up to 10.....
doing dummy task #1
doing dummy task #2
doing dummy task #3
doing dummy task #4
doing dummy task #5
#calibration_ok:[2:19:11]
.....doing small task.....
Small_Task finished refresh watchdog.
.....doing big task, up to 10.....
doing dummy task #1
doing dummy task #2
doing dummy task #3
doing dummy task #4
doing dummy task #5
#calibration_ok:[2:19:11]
.....doing small task.....
Small_Task finished refresh watchdog.
.....doing big task, up to 10.....
doing dummy task #1
```

 COM10

```
#calibration_ok:[2:19:11]
.....doing small task.....
Small_Task finished refresh watchdog.
.....doing big task, up to 10.....
doing dummy task #1
doing dummy task #2
doing dummy task #3
doing dummy task #4
doing dummy task #5
watchdog barks!!!
doing dummy task #6
doing dummy task #7
doing dummy task #8
doing dummy task #9
doing dummy task #10
Big_Task finished refresh watchdog.
```

Audio Codec –Basic Input Output

Materials


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Potentiometer x 1
- Analog microphone x 1 (e.g., Adafruit 1063 / 1064)
- 3.5mm TRS/TRRS breakout x 1 (e.g., Adafruit 2791 / Sparkfun 11570)

Example


Procedure

Connect the potentiometer, microphone and 3.5mm connector to the RTL8722 board following the diagram.


RTL8722DM / RTL8722CSM Wiring Diagram:

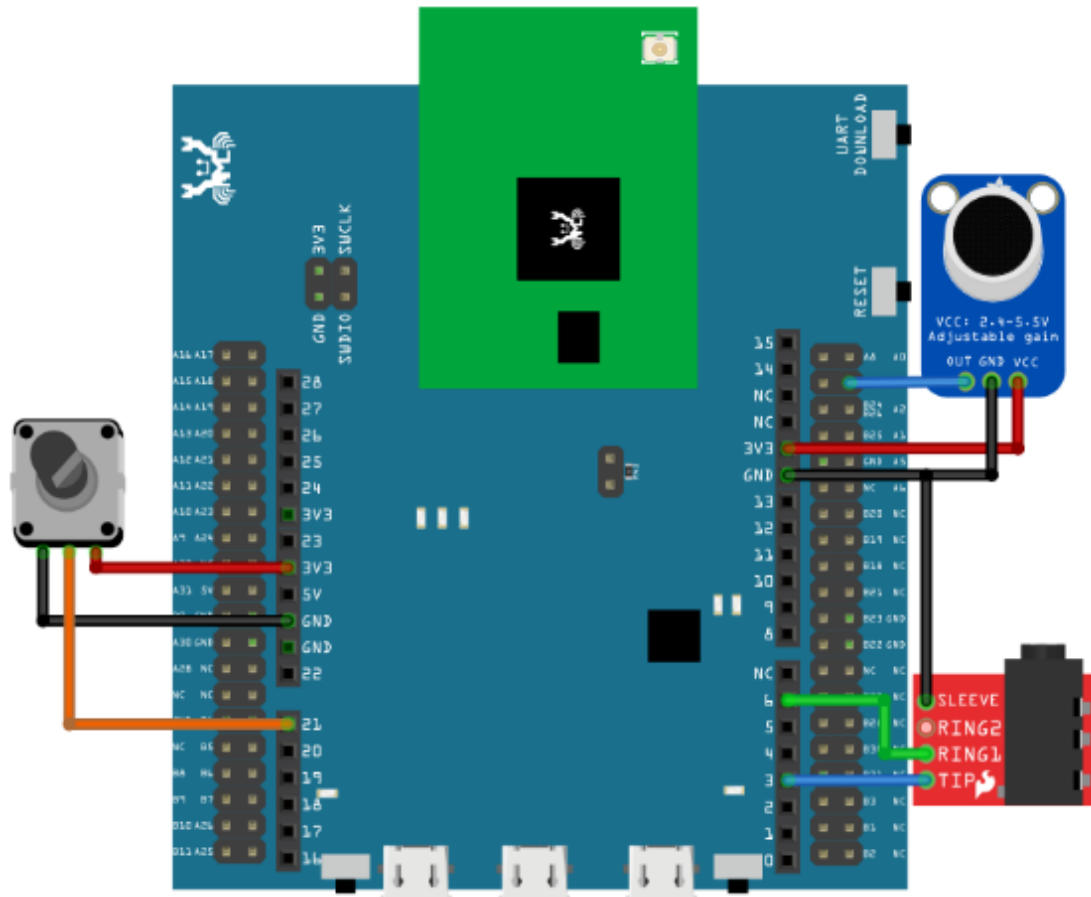

RTL8722DM MINI Wiring Diagram:

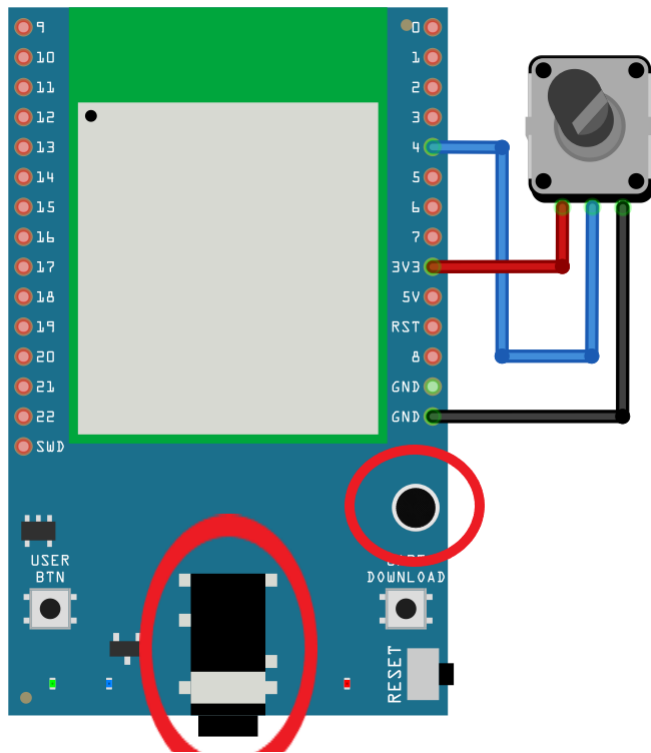

Open the example, "Files" -> "Examples" -> "AmebaAudioCodec" -> "BasicInputOutput".

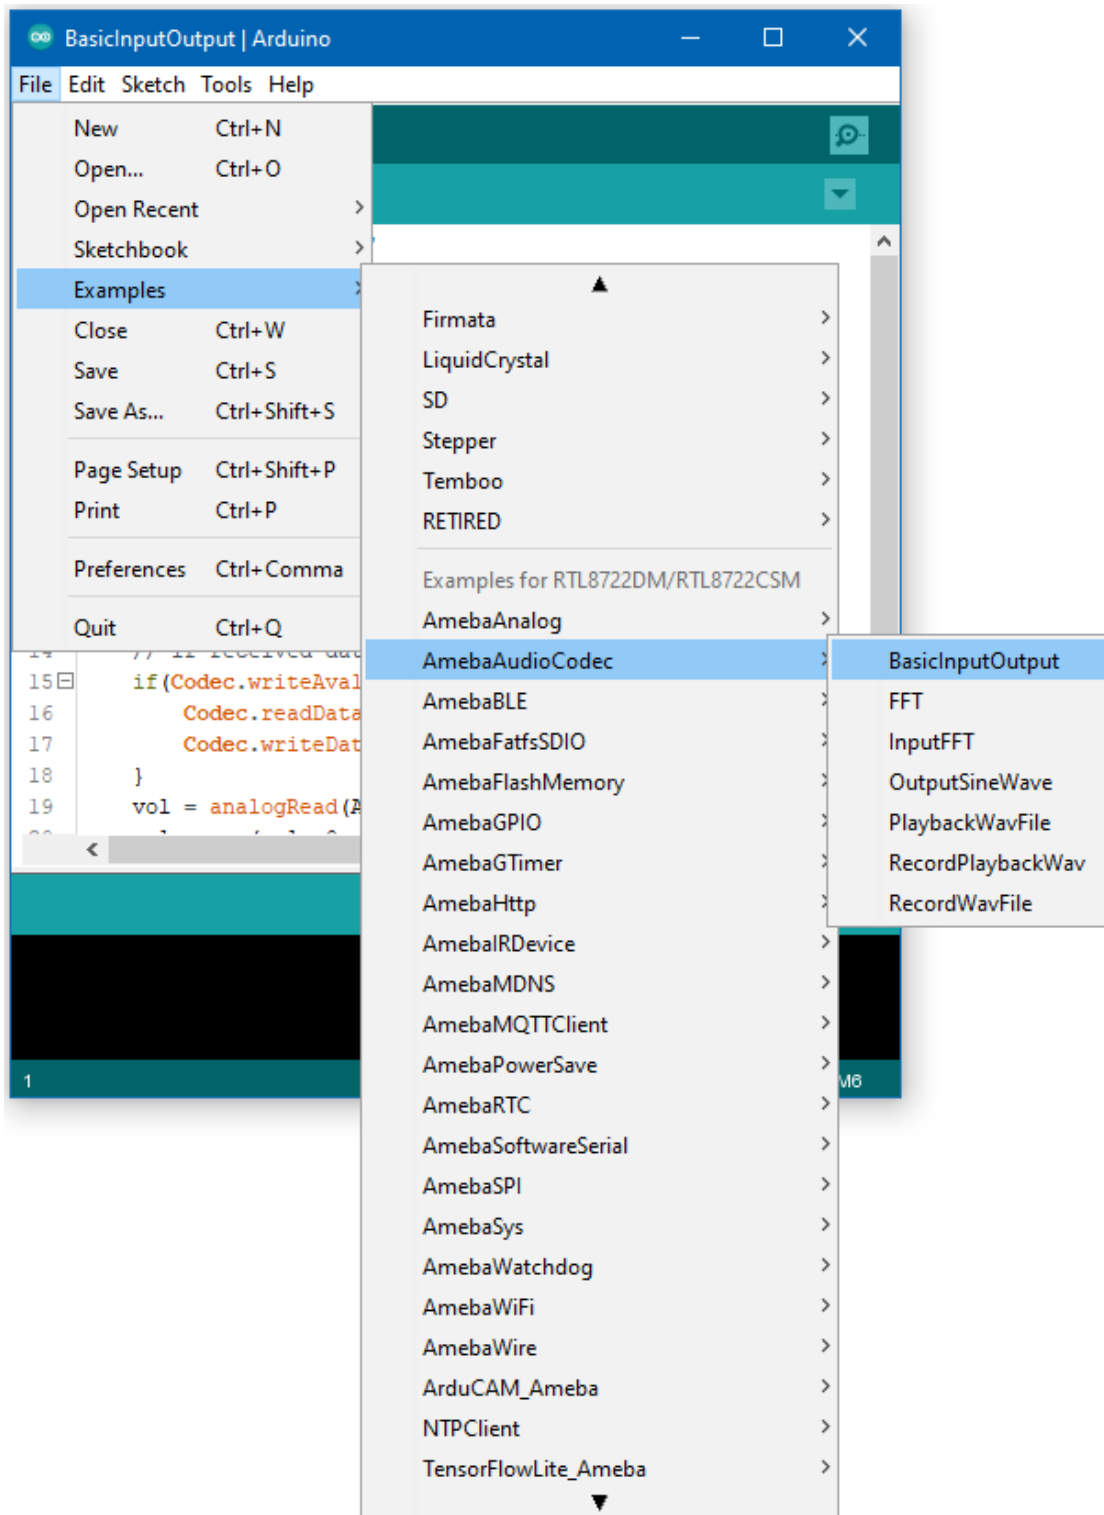

Upload the code and press the reset button on Ameba once the upload is finished.

Connect a pair of wired headphones to the 3.5mm audio jack, blow at the microphone, and you should hear the sounds picked-up by the microphone replayed in the headphones. Adjust the potentiometer and the output volume will change as well. Note: if you are using a microphone with an amplifier included, such as Adafruit 1063, the amplifier can lead to

the microphone picking up more noise.

Audio Codec - FFT

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1


Example

Introduction

This example shows how to use the AudioCodec_FFT class to calculate the fast Fourier transform of a signal to extract the frequencies present in the signal.


Procedure

Open the example, "Files" -> "Examples" -> "AmebaAudioCodec" -> "FFT" .

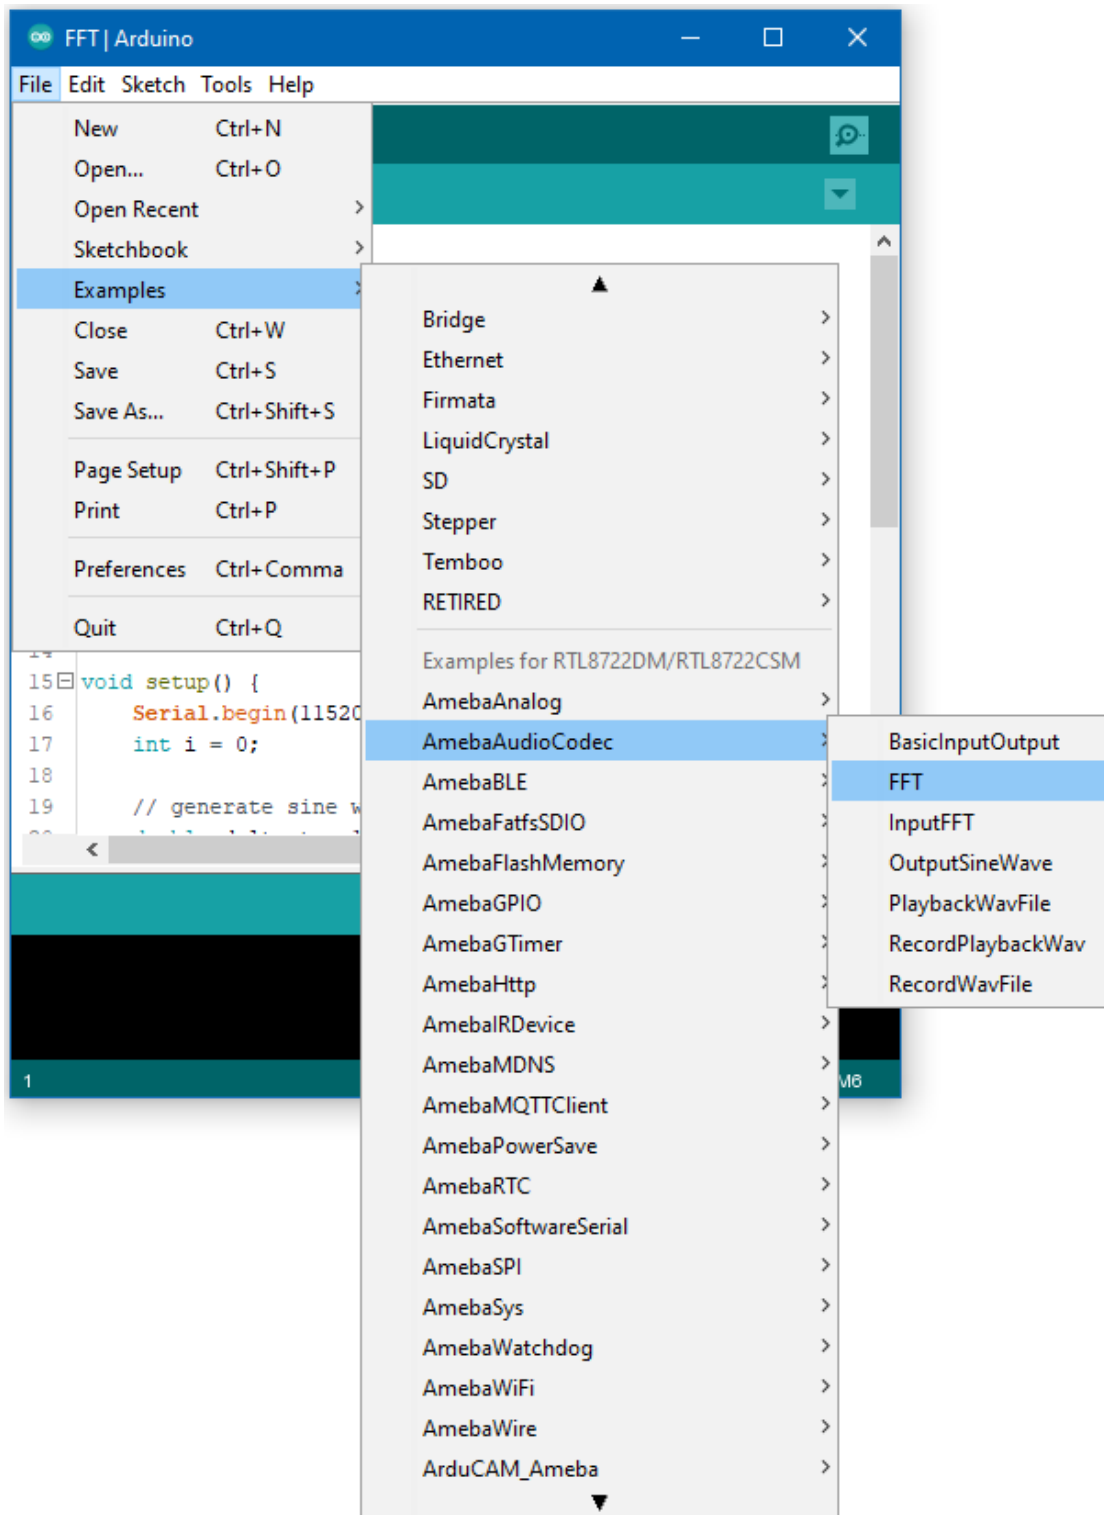

Upload the code and press the reset button on Ameba once the upload is finished.

Open the serial monitor, and the output results of the AudioCodec_FFT calculation will be displayed.

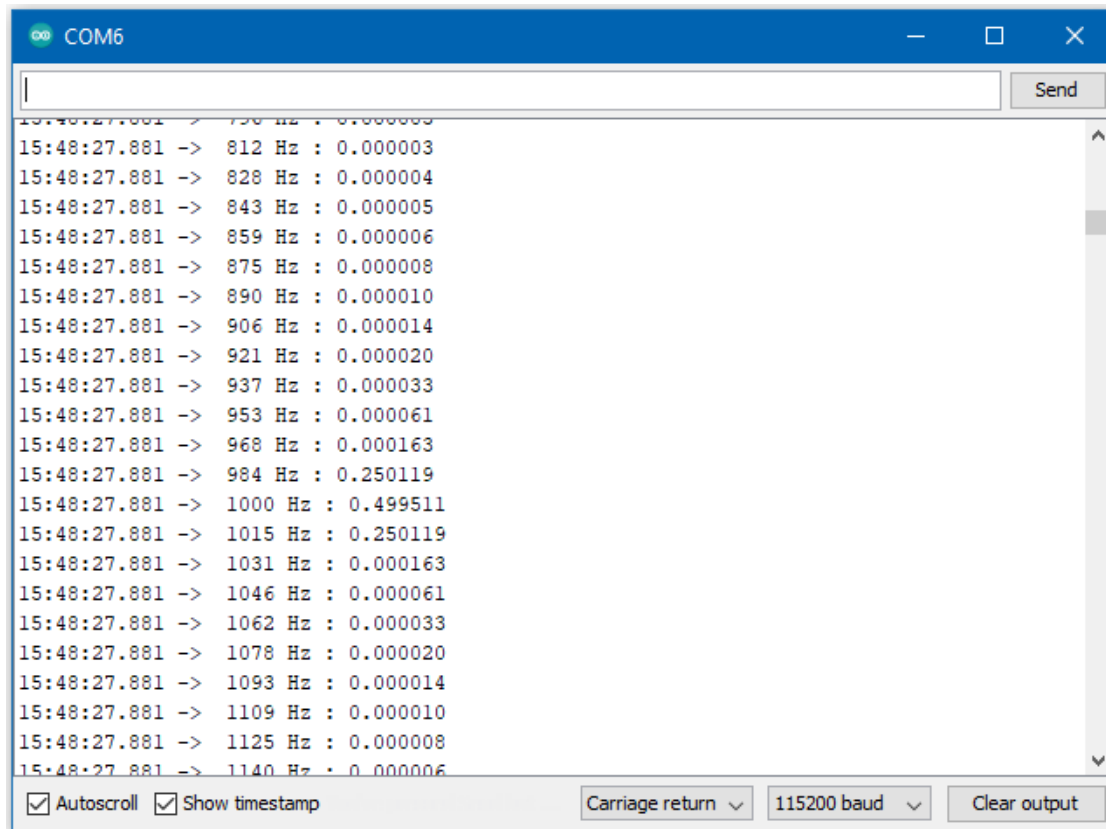

Audio Codec - Input FFT

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Analog microphone x 1 (e.g., Adafruit 1063 / 1064)


Example

Introduction

This example shows how to use the FFT class to calculate the fast Fourier transform of the audio signal recorded by the microphone.


Procedure

Connect the microphone to the RTL8722 board following the diagram.

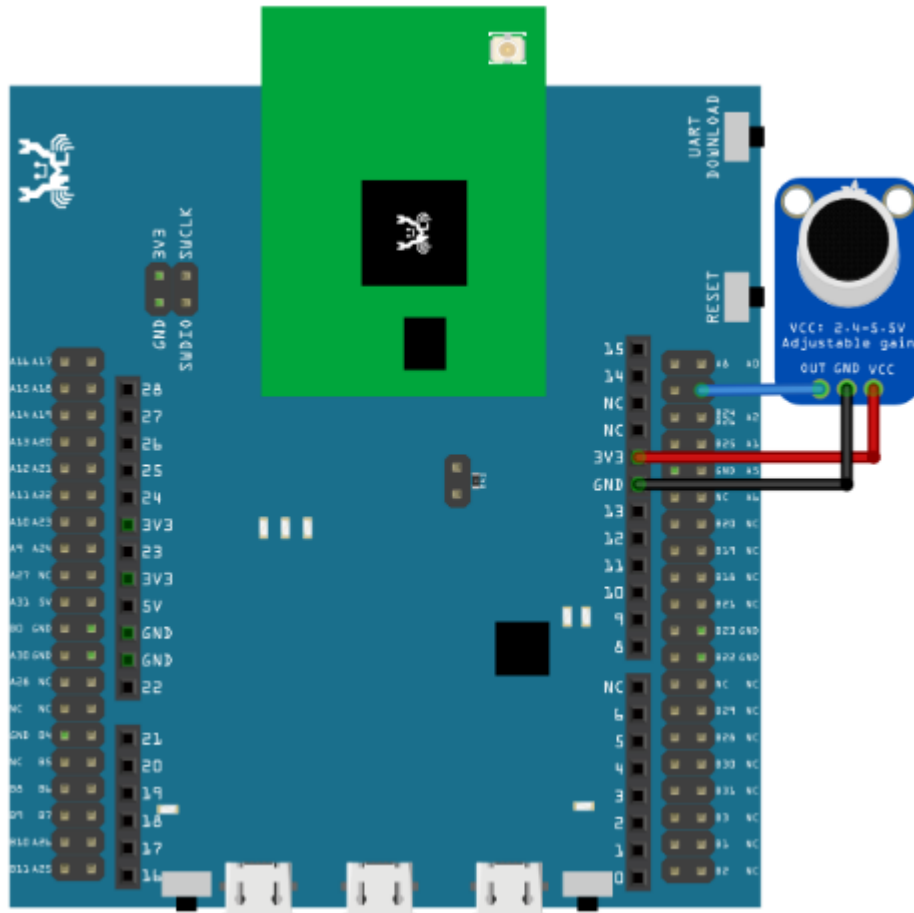RTL8722DM / RTL8722CSM Wiring Diagram:**RTL8722DM MINI Wiring Diagram:**

As RTL8722DM_MINI have a built in microphone on the board, there is no need for any external microphone.


Next, open the example, "Files" -> "Examples" -> "AmebaAudioCodec" -> "InputFFT".

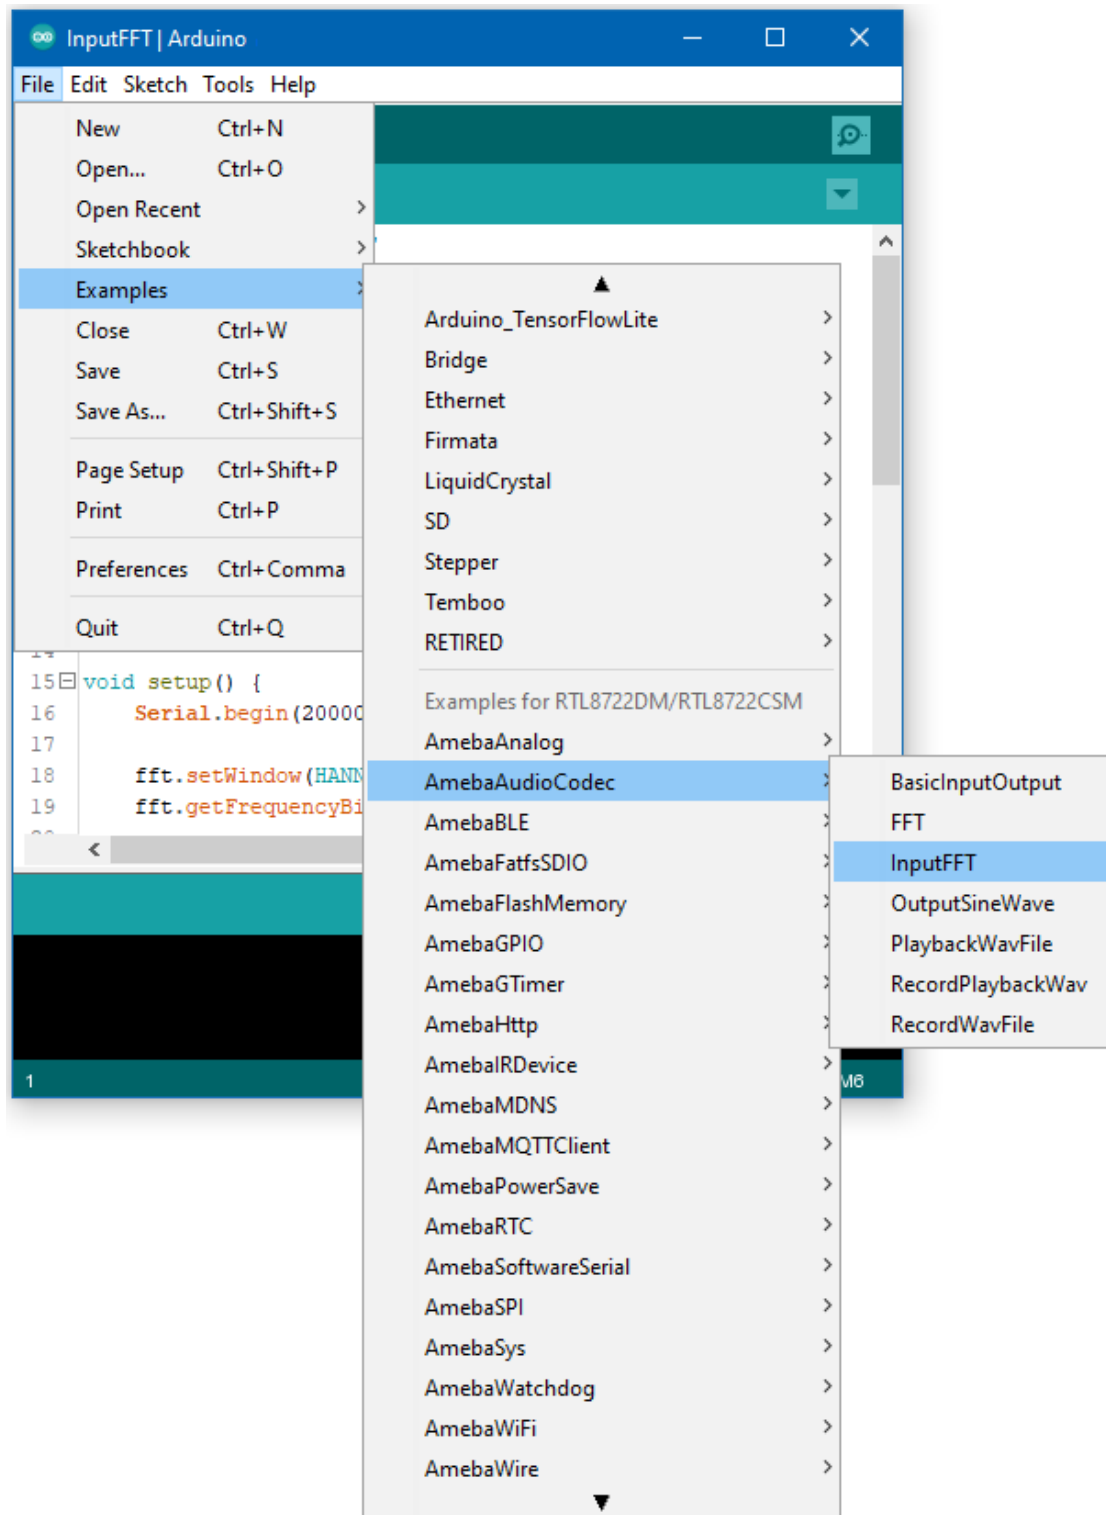

Upload the code and press the reset button on Ameba once the upload is finished.

Open the serial monitor and change the baud rate to 2000000. A stream of FFT results of audio samples will be displayed. Try playing music or use a smartphone app to generate a sine wave into the microphone, and you should be

able to see the FFT output change.

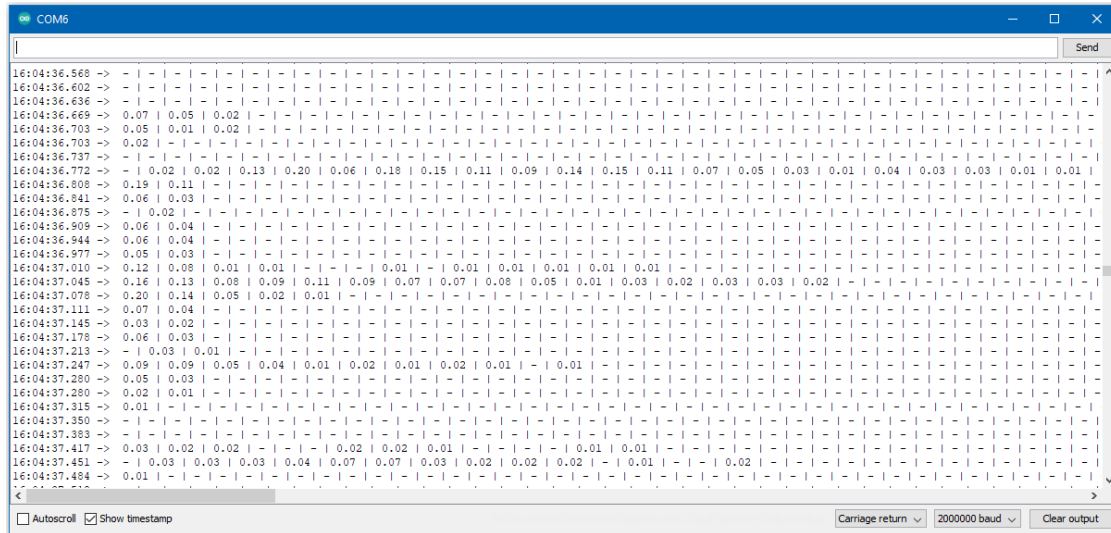

Audio Codec –Output Sine Wave

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- 3.5mm TRS/TRRS breakout x 1 (e.g., Adafruit 2791 / Sparkfun 11570)


Example

Procedure

RTL8722DM / RTL8722CSM Wiring Diagram:

Connect the 3.5mm connector to the RTL8722 board following the diagram.



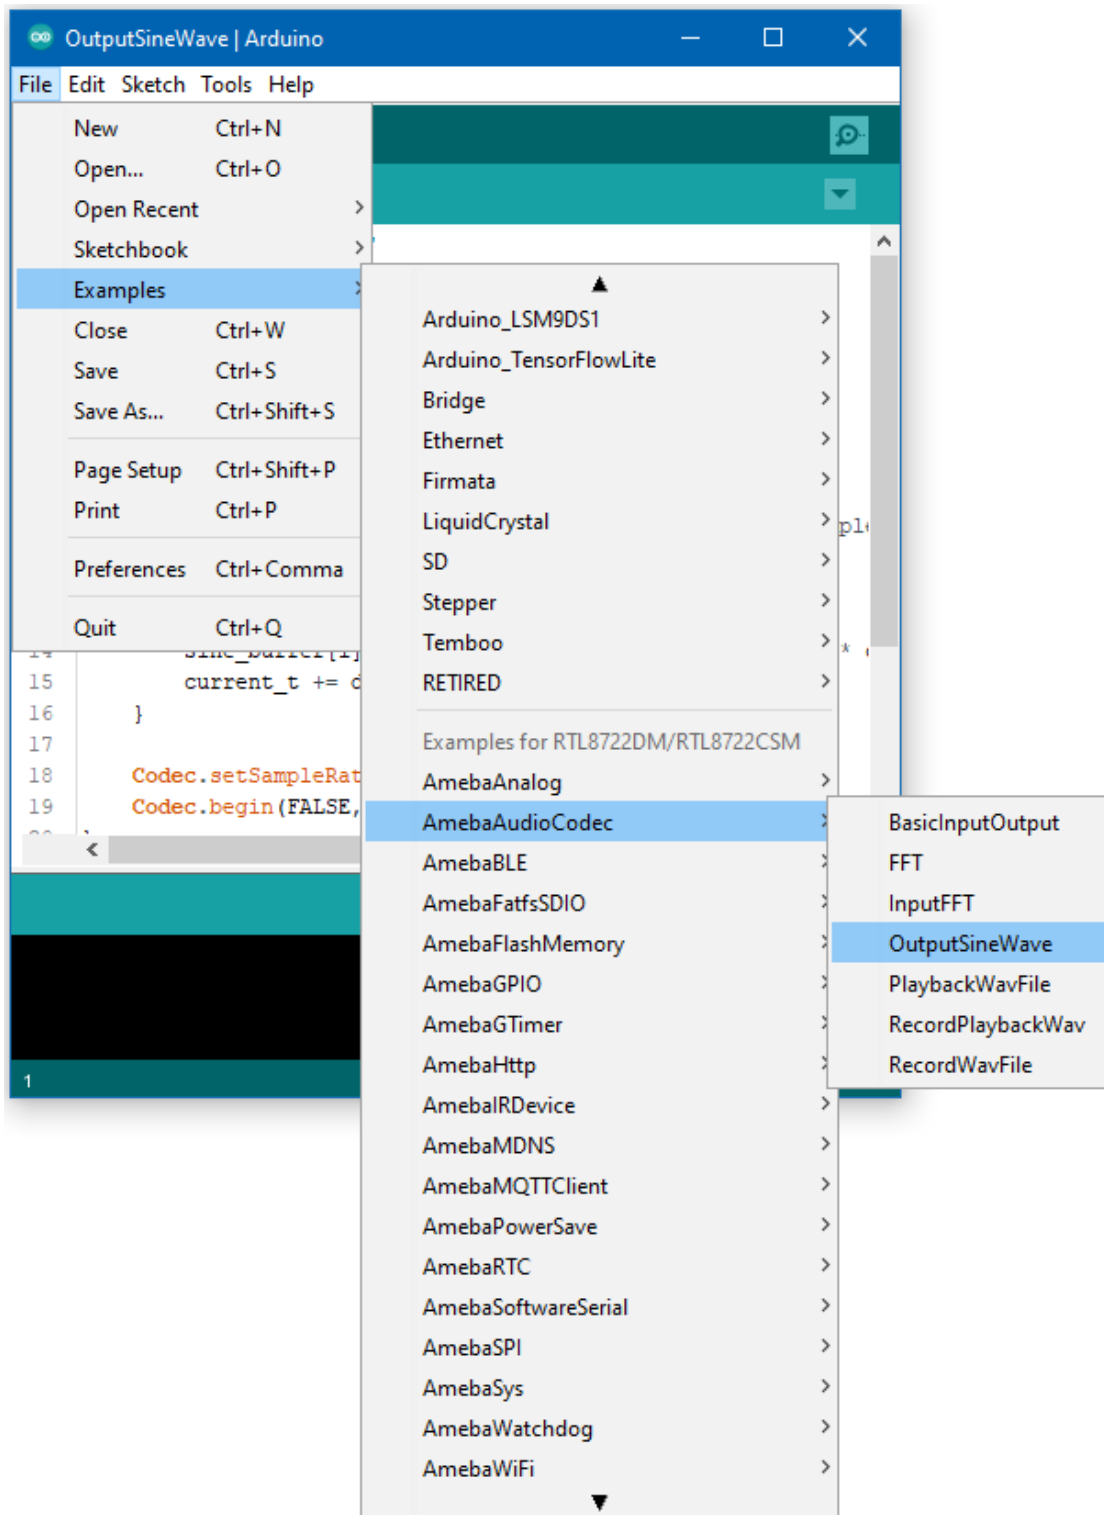

Upload the code and press the reset button on Ameba once the upload is finished.

Connect a pair of wired headphones to the 3.5mm audio jack and you should hear the generate single sinusoidal tone.

Audio Codec –Play and Record Wav Files


Materials

- AmebaD [RTL8722DM MINI] x 1
- MicroSD card

Example

Procedure

As RTL8722DM MINI have a built in microphone on the board, there is no need for any external microphone. Copy a sample wav file into the MicroSD card for demo. (In this example, the sample name is “Test_Audio_48khz_16bit_stereo.wav” .) Then insert the MicroSD card into the adapter at the back of the board.

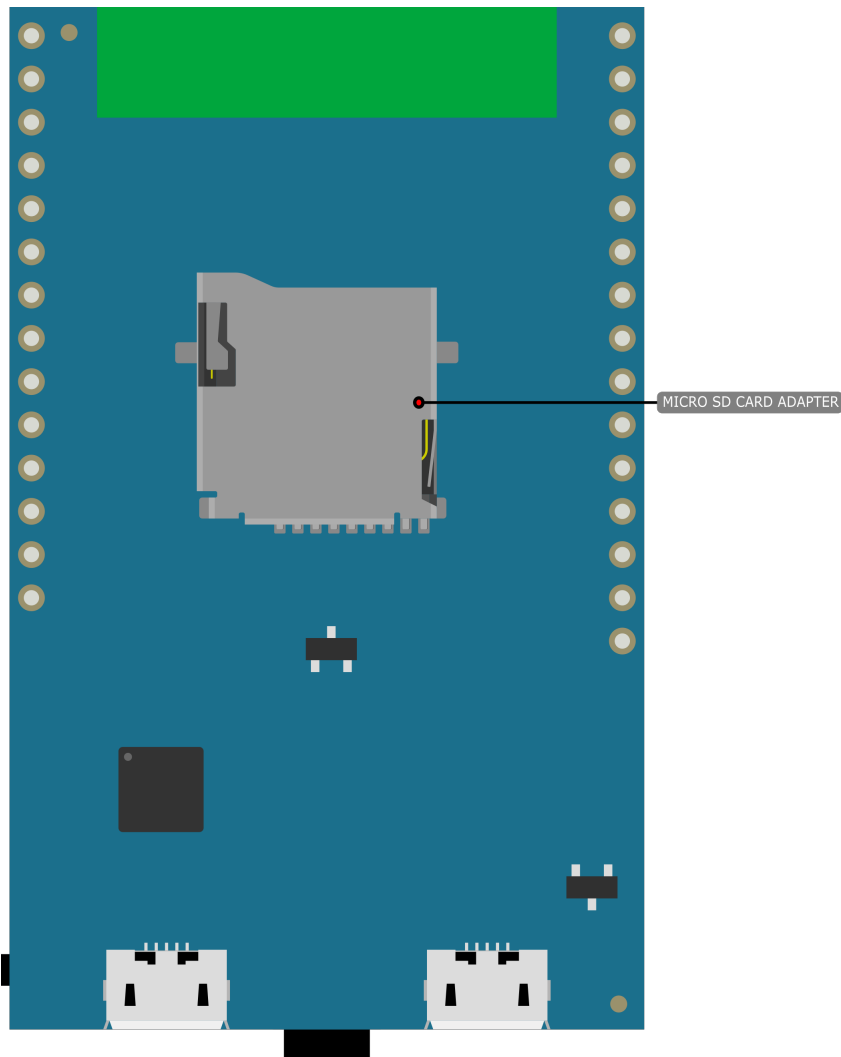

Example 01 PlaybackWavFile Open the example, “Files” -> “Examples” -> “AmebaAudioCodec” -> “PlaybackWavFile” .



The screenshot shows the Arduino IDE interface with the file "PlaybackWavFile" open. The menu bar includes "File", "Edit", "Sketch", "Tools", and "Help". The toolbar shows icons for checking, running, uploading, and downloading. The code editor contains the following C++ code:

```

#include "FatFs_SD.h"
#include "PlaybackWav.h"
#include "AudioCodec.h"

char filename[] = "Test_Audio_48khz_16bit_stereo.wav";

#define BUFFERSIZE 512
int16_t buffer[BUFFERSIZE] = {0};

FatFsSD fs;
PlaybackWav playWav;

// Callback function to feed audio codec with additional data
void writeCBFunc() {
    if(Codec.writeAvaliable()) {
        playWav.readAudioData(buffer, BUFFERSIZE);
        Codec.writeDataPage(buffer, BUFFERSIZE);
    }
}

```

Upload the code and press the reset button on Ameba once the upload is finished. Insert earphone/speaker into the onboard jack for playing the sample sound.

Example 02 RecordWavFile Open the example, “Files” -> “Examples” -> “AmebaAudioCodec” -> “RecordWavFile” .




Define a GPIO/button(Input high to active) for "RECORDBTN" . Define the "filename[]" for name of the storage wav file. In this example the name is "Test_Recording_48khz_16bit_mono.wav" .

Upload the code and press the reset button on Ameba once the upload is finished.

Input high to "RECORDBTN" , then record voice by on board mic. When input is low the record stops. The recorded voice will be stored in "Test_Recording_48khz_16bit_mono.wav" that located at MicroSD card.

Example 03 RecordPlaybackWav Open the example, "Files" -> "Examples" -> "AmebaAudioCodec" -> "RecordPlaybackWav" .

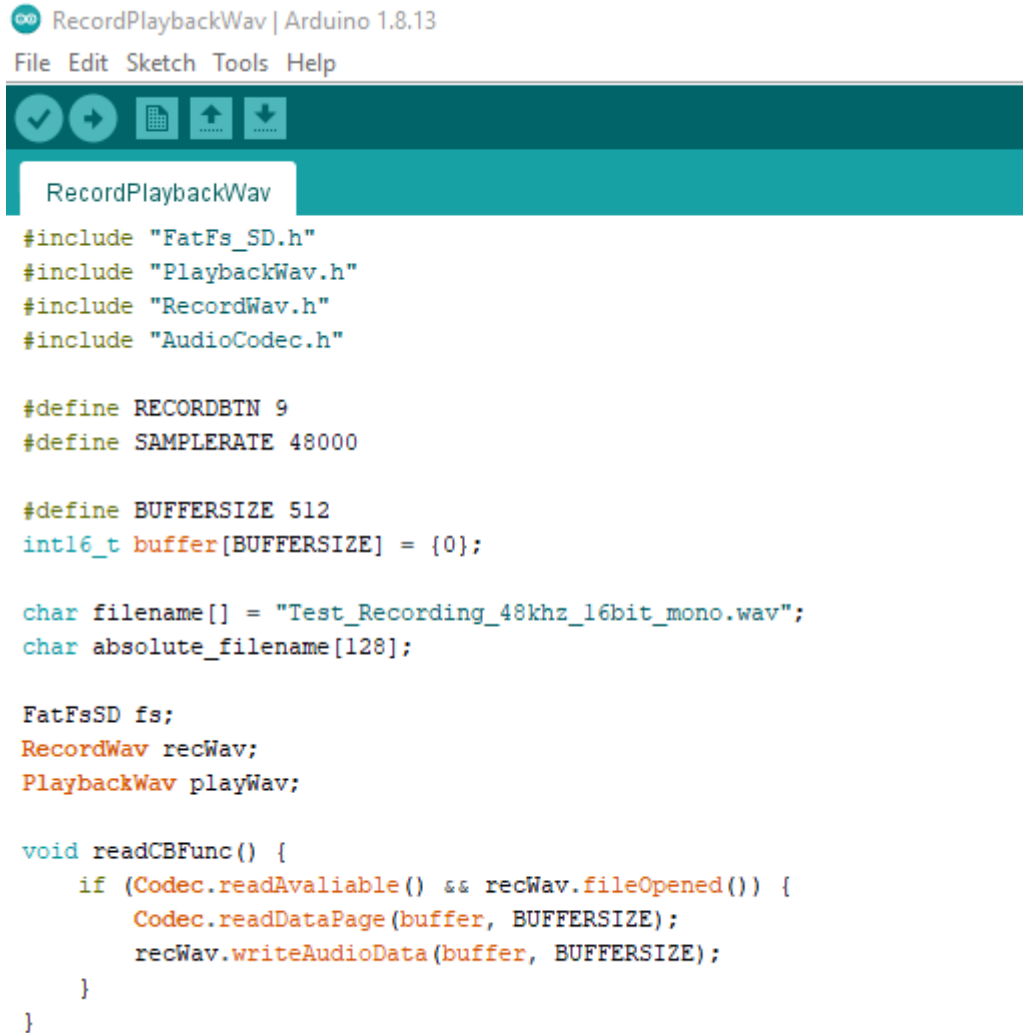

```

RecordPlaybackWav | Arduino 1.8.13
File Edit Sketch Tools Help

RecordPlaybackWav

#include "FatFs_SD.h"
#include "PlaybackWav.h"
#include "RecordWav.h"
#include "AudioCodec.h"

#define RECORDBTN 9
#define SAMPLERATE 48000

#define BUFFERSIZE 512
int16_t buffer[BUFFERSIZE] = {0};

char filename[] = "Test_Recording_48khz_16bit_mono.wav";
char absolute_filename[128];

FatFsSD fs;
RecordWav recWav;
PlaybackWav playWav;

void readCBFunc() {
    if (Codec.readAvaliable() && recWav.fileOpened()) {
        Codec.readDataPage(buffer, BUFFERSIZE);
        recWav.writeAudioData(buffer, BUFFERSIZE);
    }
}

```

This example is a combination of Example01 and Example02. You can record by Example02 then play it by jack as the method of Example01.

Define a GPIO/button(Input high to active) for “RECORDBTN” . Define the “filename[]” for name of the storage wav file. In this example the name is

“Test_Recording_48khz_16bit_mono.wav” .

Upload the code and press the reset button on Ameba once the upload is finished.

Input high to “RECORDBTN” , then record voice by on board mic. When input is low the record stops. The recorded voice will be stored in

“Test_Recording_48khz_16bit_mono.wav” that located at MicroSD card.

Insert earphone/speaker into the onboard jack for playing the sample sound.

FatfsSDIO –File system in SD card

Materials

- Ameba D [RTL8722DM MINI] x 1
- MicroSD card


Example

Procedure

Insert a MicroSD card into the onboard SD card reader of RTL8722DM MINI board.


Example 01 create_folder

Open the example, "Files" -> "Examples" -> "AmebaFatfsSDIO" -> "create_folder" .

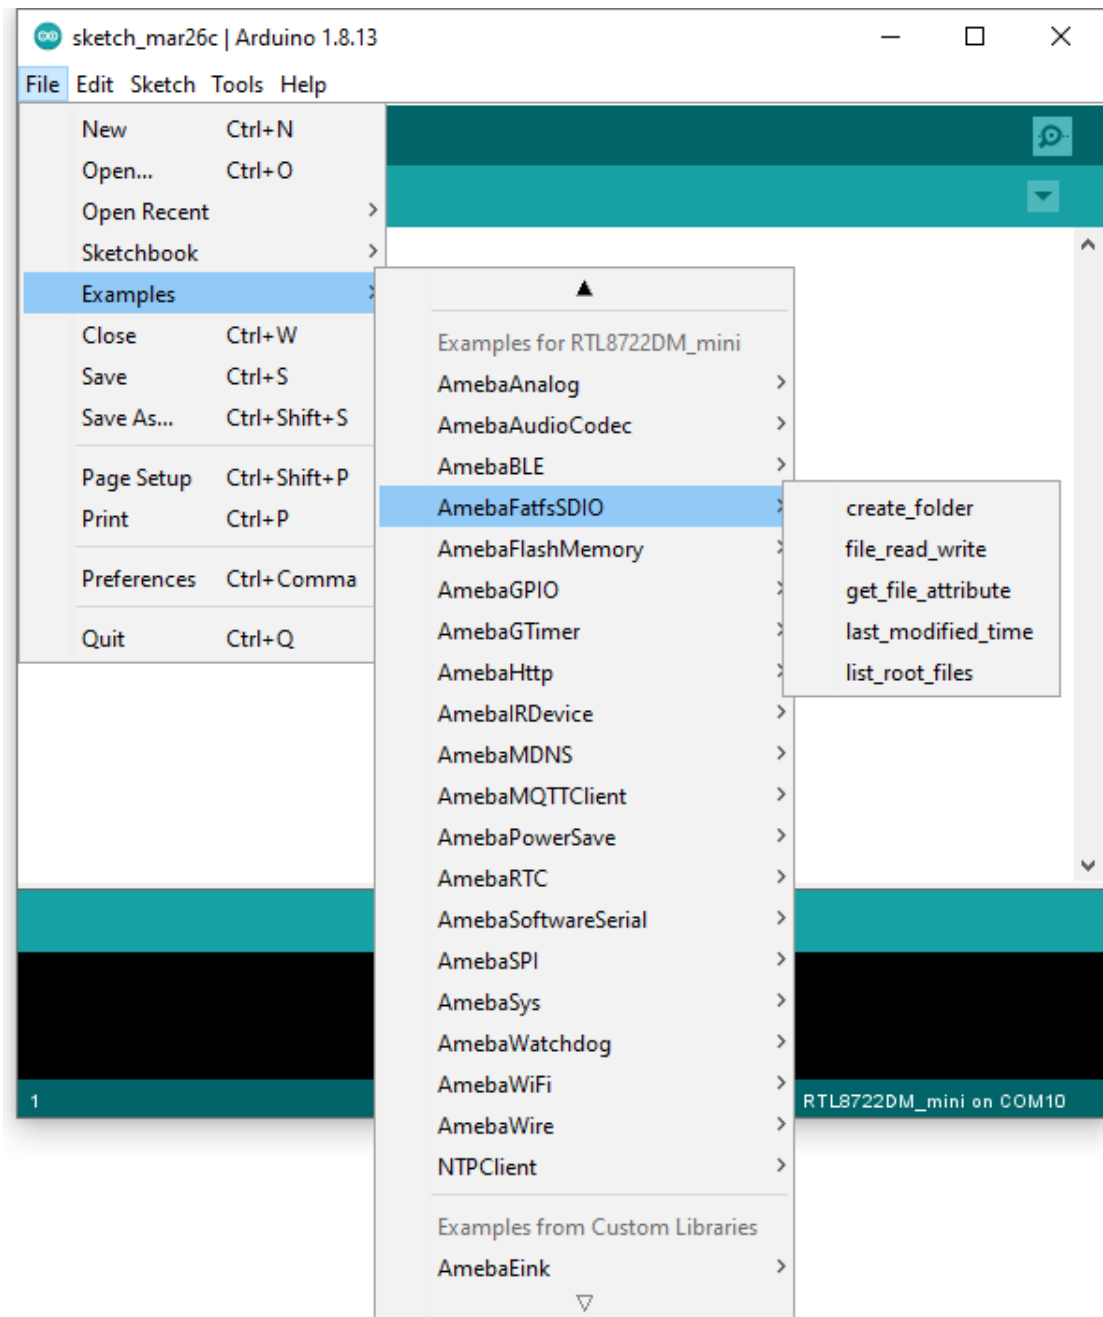

Upload the code and press the reset button on Ameba once the upload is finished.

In the sample code, we first create a folder "testdir", then text file "test.txt" with content "hello world!". Read the file and print content to serial monitor.

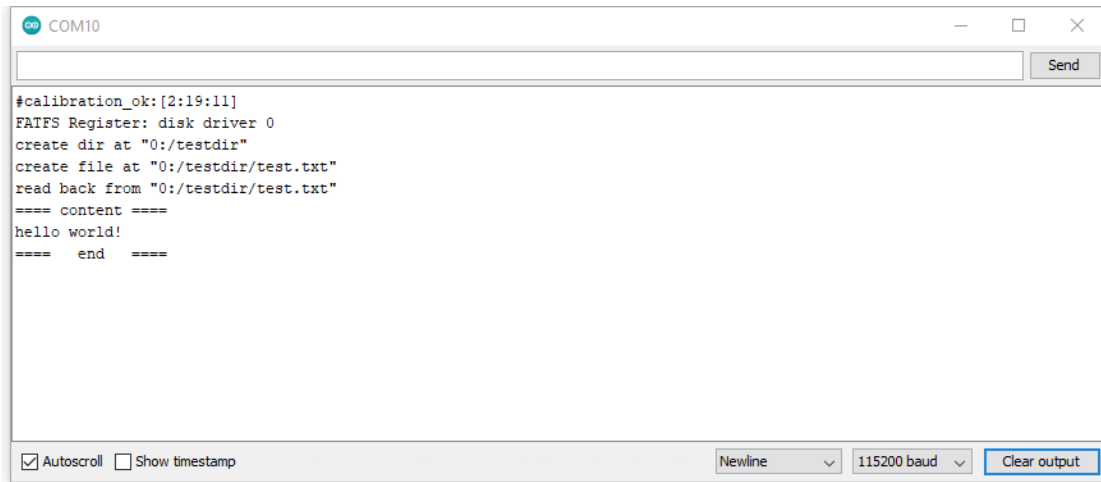

Next, insert SD card into card reader, and check whether the operations succeeded.




Example 02 file_read_write


Open the example, "Files" -> "Examples" -> "AmebaFatfsSDIO" -> "file_read_write".

Upload the code and press the reset button on Ameba once the upload is finished.

In the sample code, we create text file "test.txt" with content "hello world!". Read the file and print content to serial monitor.

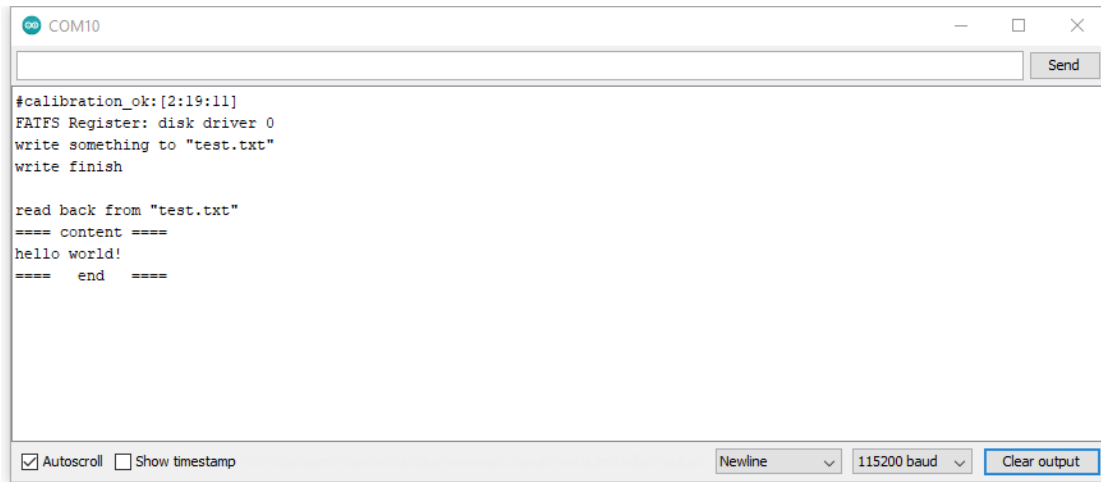

Next, insert SD card into card reader, and check whether the operations succeeded.

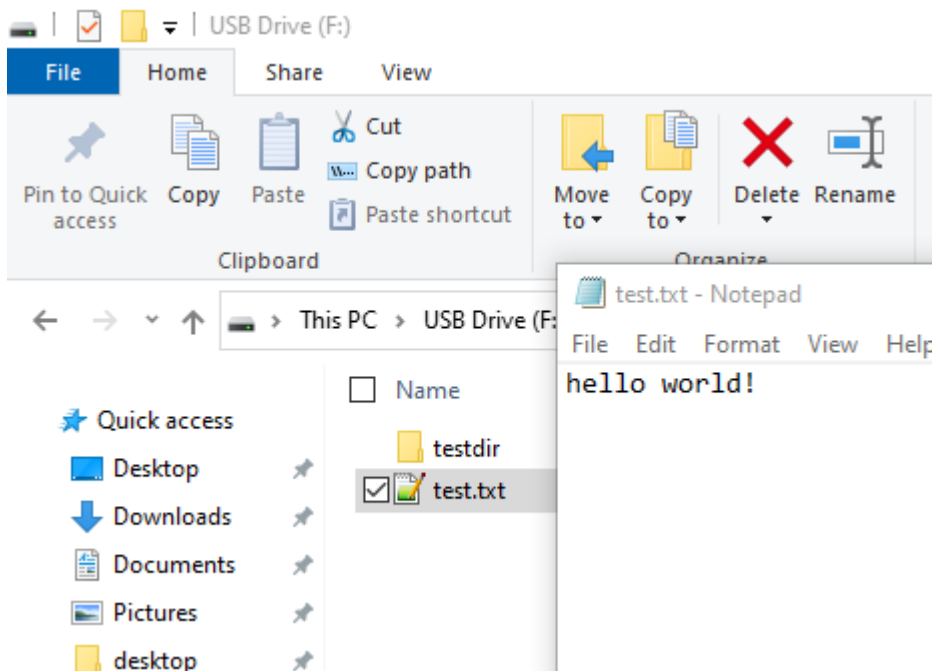


Example 03 get_file_attribute

Open the example, "Files" -> "Examples" -> "AmebaFatfsSDIO" -> "get_file_attribute"

.

Upload the code and press the reset button on Ameba once the upload is finished.

In the sample code, system will print put all file attribute to serial monitor.

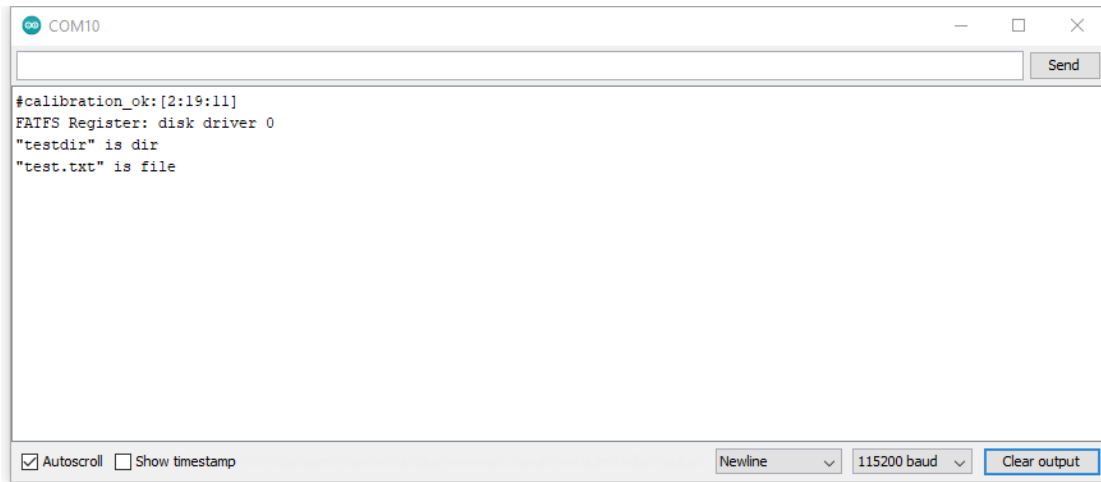


Next, insert SD card into card reader, and check whether the operations succeeded. In this case, we already know the attribute should be folder “testdir” and text file “test.txt” by refer the above pictures.

Example 04 last_modified_time


Open the example, "Files" -> "Examples" -> “AmebaFatfsSDIO” -> “last_modified_time” .

Upload the code and press the reset button on Ameba once the upload is finished.

In the sample code, system will print put the target file last modified time to serial monitor.

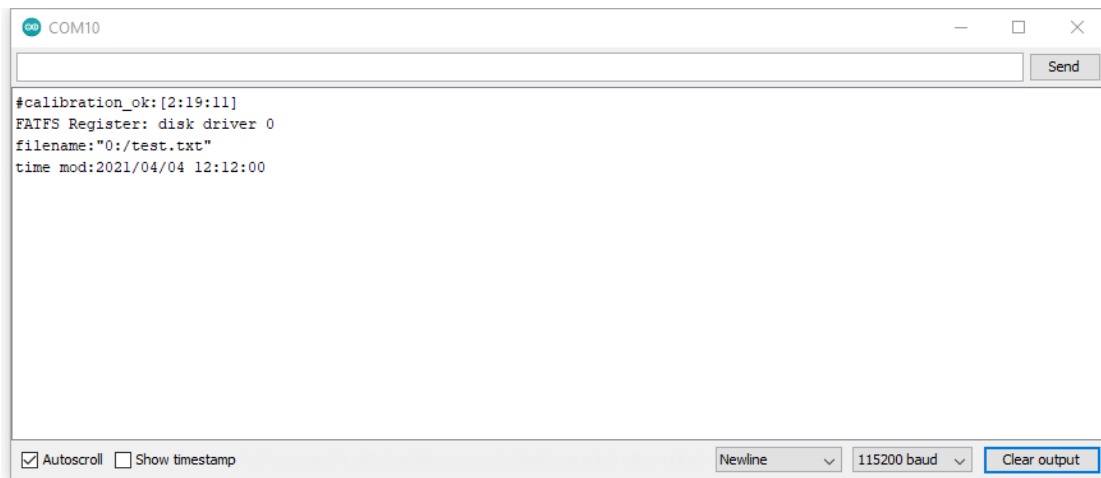

Next, insert SD card into card reader, and check whether the operations succeeded.

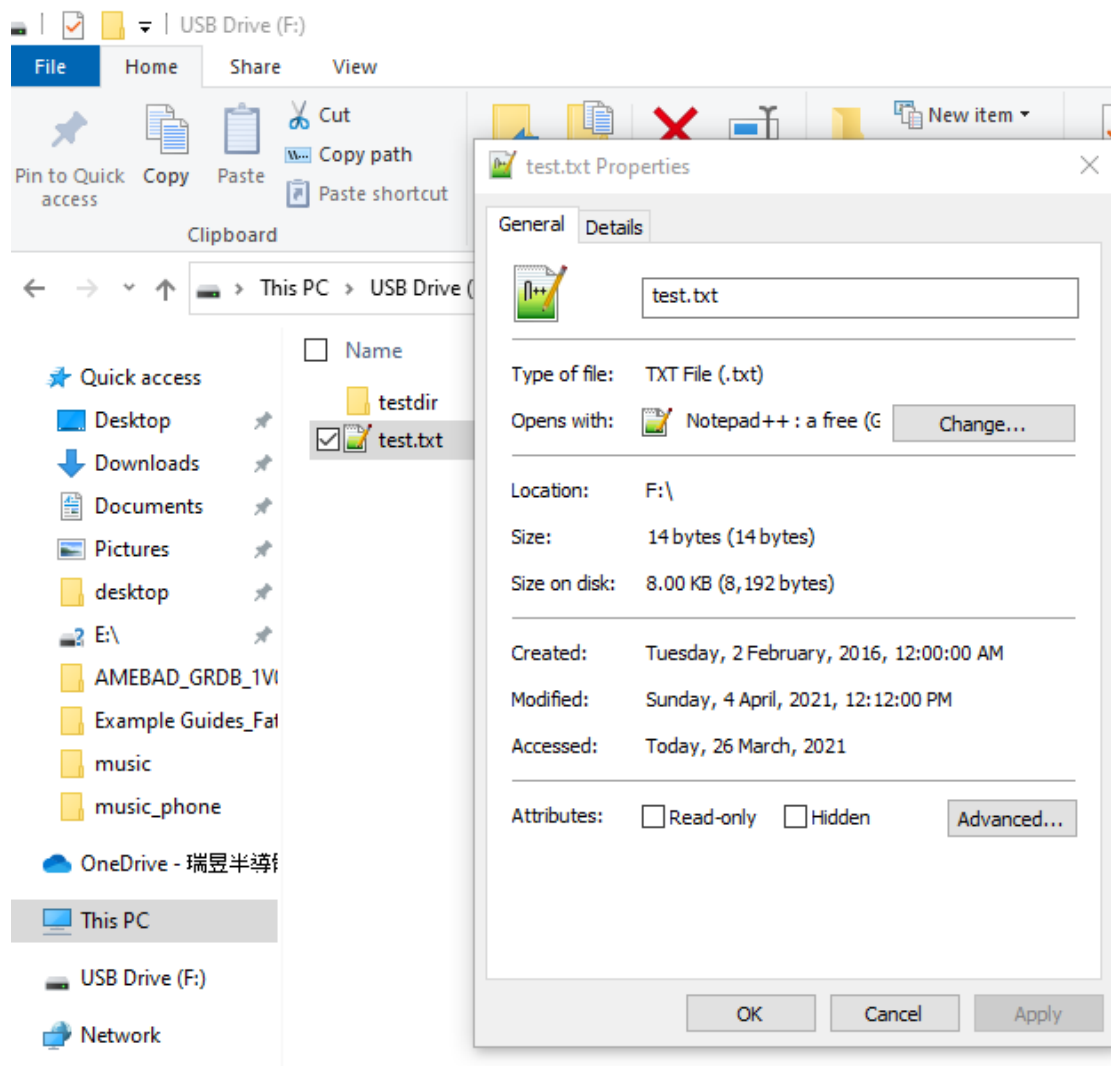


Example 05 list_root_files

Open the example, "Files" -> "Examples" -> "AmebaFatfsSDIO" -> "list_root_files".

Upload the code and press the reset button on Ameba once the upload is finished.

In the sample code, system will print put all root file to serial monitor.

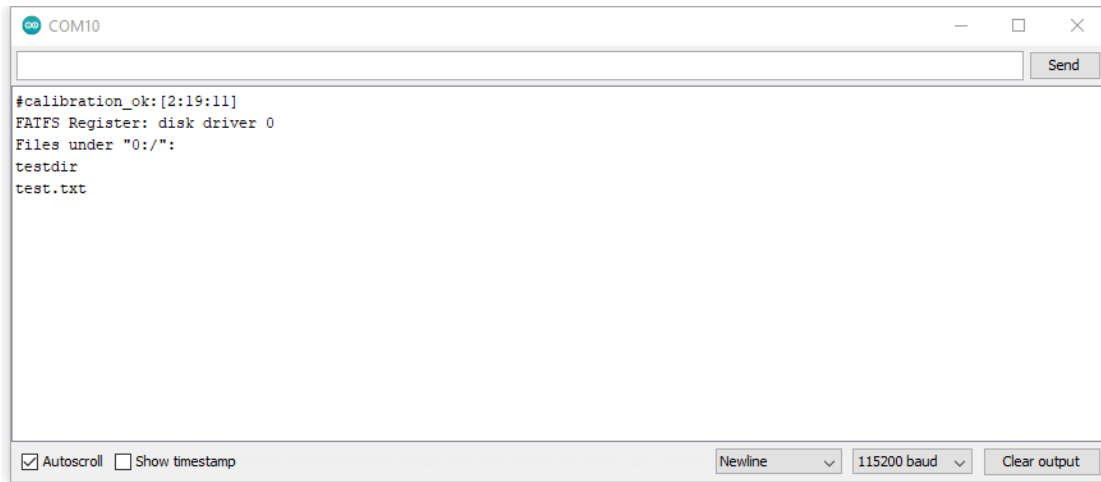

Next, insert SD card into card reader, and check whether the operations succeeded. In this case, we already know the root files folder “testdir” and text file “test.txt” by refer the above pictures.

FatfsSDIO –Read And Open HTML File From SD Card

Materials

- AmebaD [RTL8722DM MINI] x 1
- MicroSD card

Example

Insert the MicroSD card into your computer and copy the HTML file to your SD card (Note: put the file at outside and do not put it inside of any folder in the SD card). Here is a HTML sample for testing, “Web_test.html” .

SDHC (D:)		Search SDHC (D:)		
<input type="checkbox"/> Name		Date modified	Type	Size
testdir		2/2/2016 12:00 am	File folder	
ch_m.txt		9/3/2021 6:25 pm	Text Document	1 KB
ch_p.txt		9/3/2021 6:22 pm	Text Document	1 KB
freq_power.txt		9/3/2021 3:42 pm	Text Document	1 KB
test.txt		2/2/2016 12:00 am	Text Document	1 KB
vol_m.txt		9/3/2021 6:19 pm	Text Document	1 KB
vol_p.txt		9/3/2021 6:16 pm	Text Document	1 KB
<input checked="" type="checkbox"/> Web_test.html		21/9/2021 10:26 am	Chrome HTML Docu...	1 KB

Then insert the MicroSD card into the onboard SD card reader of RTL8722DM MINI board.

Open the example, “Files” -> “Examples” -> “AmebaFatfsSDIO” -> “read_html_from_SD_card”

Upload the code and press the reset button on Ameba once the upload is finished. When the connection is established, you should be able to see the message “To see this page in action, open a browser to <http://xxx.xxx.xxx.xxx>” in the serial monitor as shown in the figure:


```

COM7
14:23:18.630 ->
14:23:18.676 -> RTL8721D[Driver]:
14:23:18.676 -> OnAuthClient:algthm = 0, seq = 2, status = 0, sae_msg_len = 0
14:23:18.676 ->
14:23:18.676 -> RTL8721D[Driver]: auth success, start assoc
14:23:18.676 ->
14:23:18.722 -> RTL8721D[Driver]: association success(res=6)
14:23:18.722 ->
14:23:18.863 -> RTL8721D[Driver]: ClientSendEAPOL[1600]: no use cache pmksa
14:23:18.909 ->
14:23:18.909 -> RTL8721D[Driver]: set pairwise key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4)
14:23:18.909 ->
14:23:18.909 -> RTL8721D[Driver]: set group key to hw: alg:2(WEP40-1 WEP104-5 TKIP-2 AES-4) keyid:1
14:23:18.909 ->
14:23:19.704 -> Interface 0 IP address : 192.168.31.249
14:23:29.701 -> SSID: xiaomi_test
14:23:29.701 -> IP Address: 192.168.31.249
14:23:29.701 -> signal strength (RSSI):-55 dBm
14:23:29.701 -> To see this page in action, open a browser to http://192.168.31.249
14:23:29.701 -> FATFS Register: disk driver 0
14:23:29.701 ->

```

☒ Autoscroll ☒ Show timestamp Newline 115200 baud Clear output

Next, open the address stated in serial monitor in the browser of your laptop or cell phone under the same WiFi domain. You will see the following display in your browser:

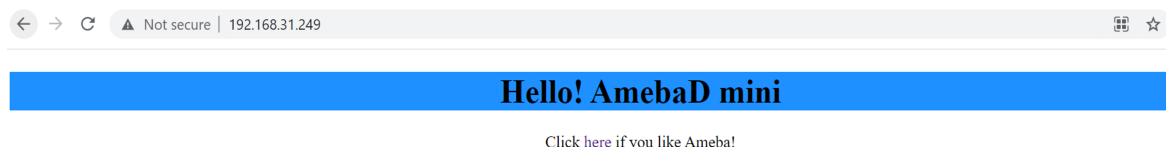

Now you have successfully read and opened the html file saved in your SD card.

TensorFlow Lite - Hello World

Materials


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- LED x 1

Example

Procedure

Download the Ameba customized version of TensorFlow Lite for Microcontrollers library at https://github.com/ambiot/ambd_arduino/tree/master/Arduino_zip_libraries. Follow the instructions at <https://www.arduino.cc/en/guide/libraries> to install it. Ensure that the patch files found at https://github.com/ambiot/ambd_arduino/tree/master/Ameba_misc/ are also installed.


Open the example, "Files" -> "Examples" -> "TensorFlowLite_Ameba" -> "hello_world".

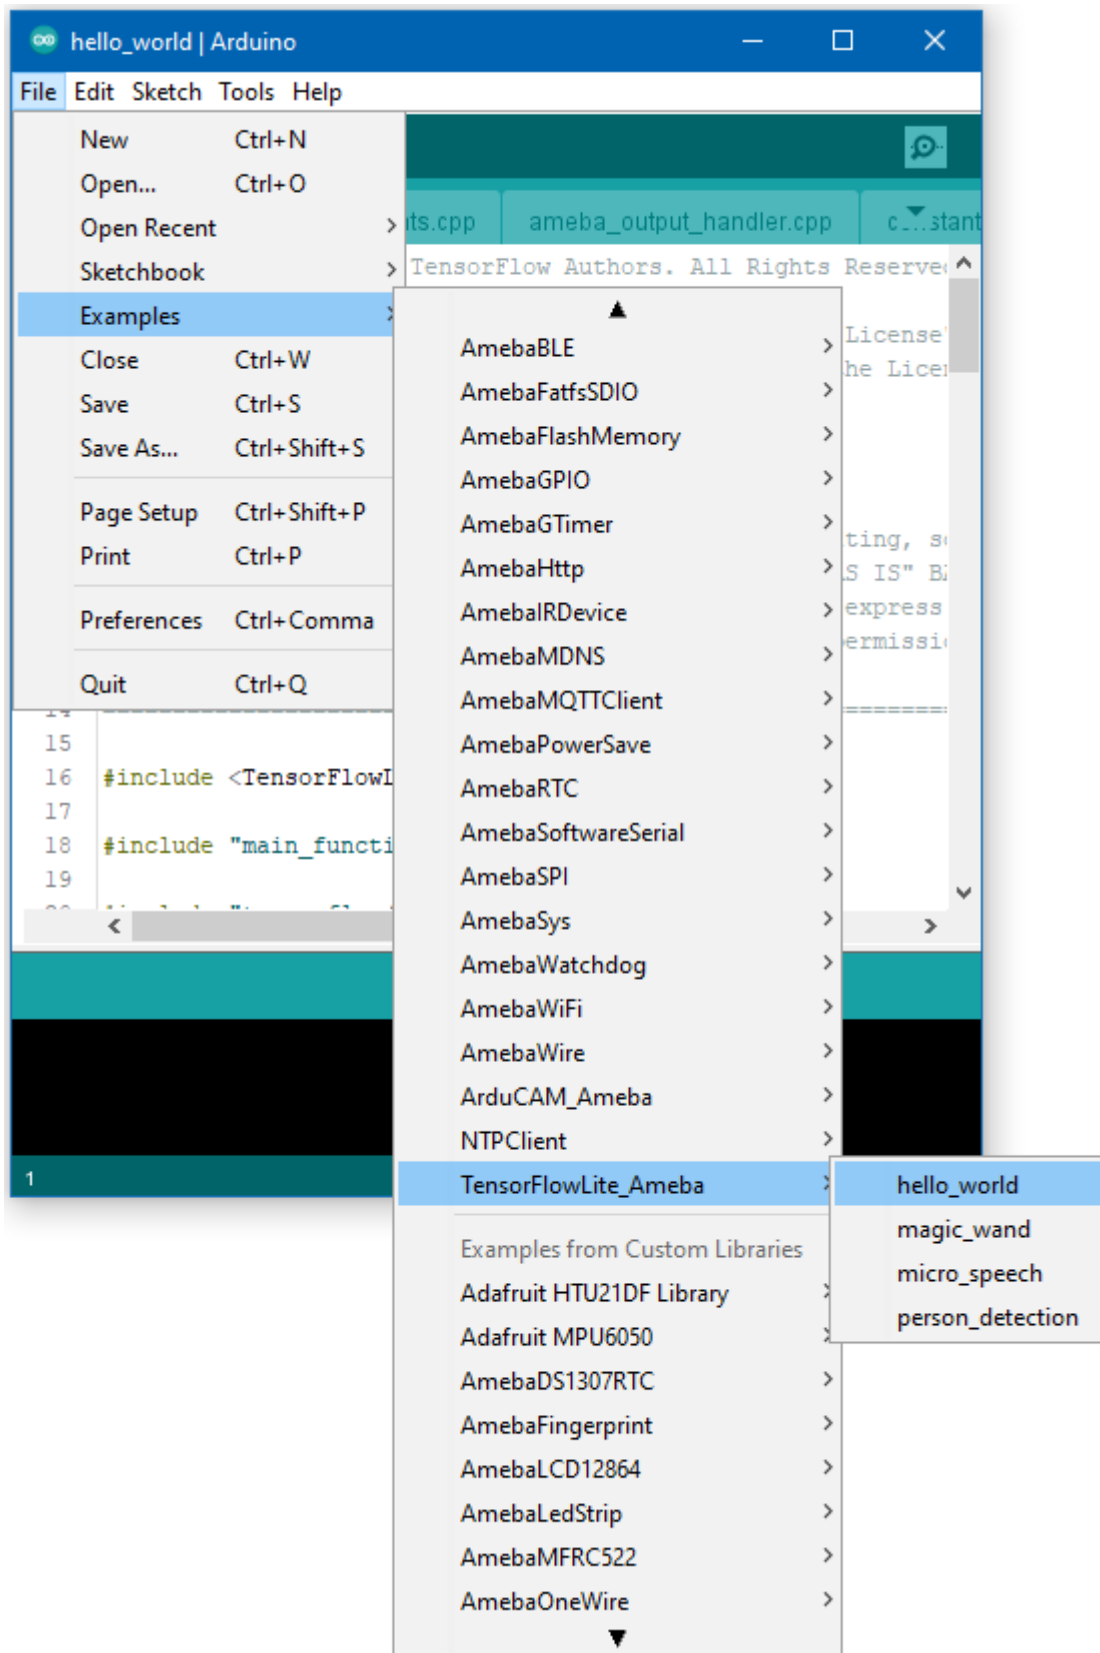

Upload the code and press the reset button on Ameba once the upload is finished.

Connect the LED to digital pin 10 and ground, ensuring that the polarity is correct. You should see the LED fade in and out rapidly.

In the Arduino serial plotter, you can see the output value of the Tensorflow model plotted as a graph, it should resemble a sine wave.

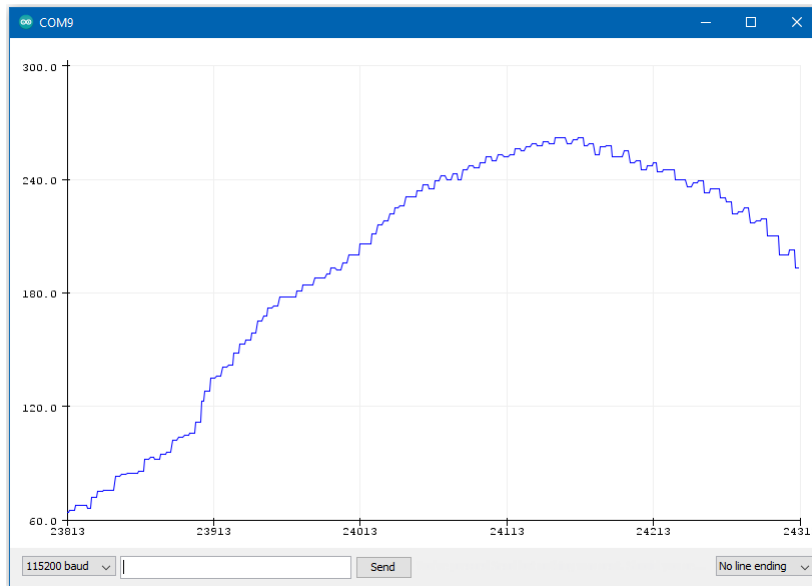

Code Reference

More information on TensorFlow Lite for Microcontrollers can be found at: <https://www.tensorflow.org/lite/microcontrollers>

TensorFlow Lite - Magic Wand

Materials


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Adafruit LSM9DS1 accelerometer
- LED x 2

Example


Procedure

RTL8722DM / RTL8722CSM Wiring Diagram:

Connect the accelerometer and LEDs to the RTL8722 board following the diagram.

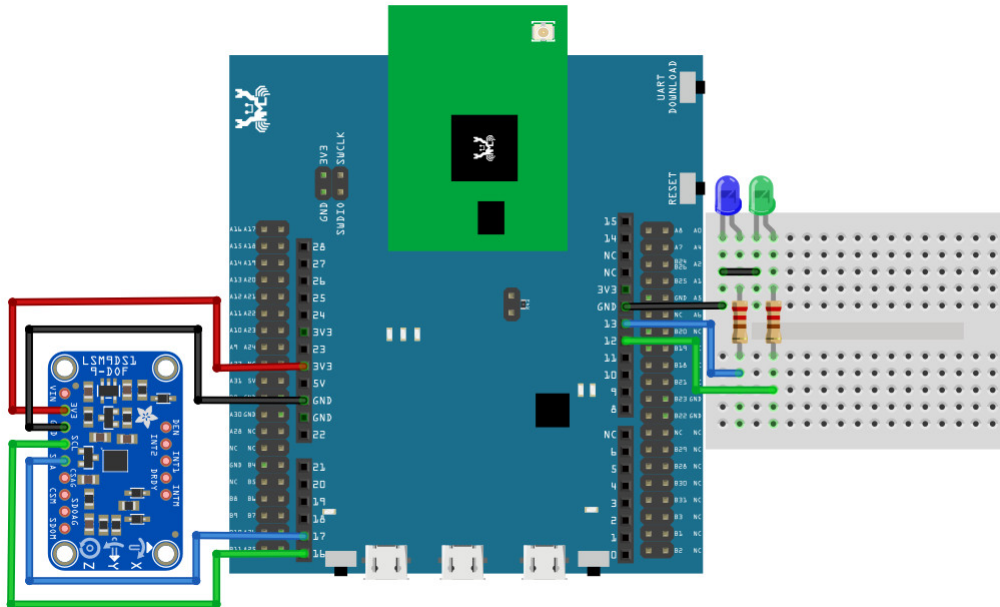**RTL8722DM MINI Wiring Diagram:**

For RTL8722DM MINI, we will use the onboard LEDs on the board itself.

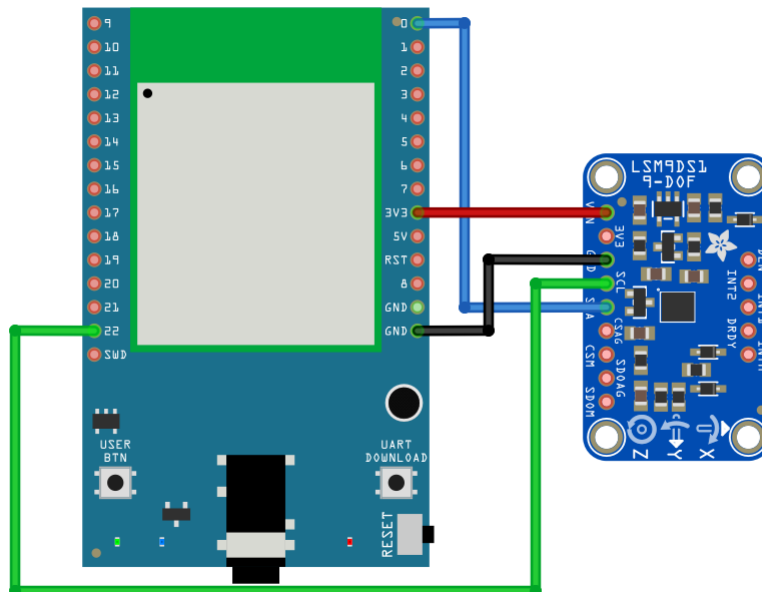


Download the Ameba customized version of TensorFlow Lite for Microcontrollers library at https://github.com/ambiot/ambd_arduino/tree/master/Arduino_zip_libraries.

Follow the instructions at <https://www.arduino.cc/en/guide/libraries> to install it.

Ensure that the patch files found at https://github.com/ambiot/ambd_arduino/tree/master/Ameba_misc/ are also installed.


In the Arduino IDE library manager, install the Arduino_LSM9DS1 library. This example has been tested with version 1.1.0 of the LSM9DS1 library.

Open the example, "Files" -> "Examples" -> "TensorFlowLite_Ameba" -> "magic_wand" .

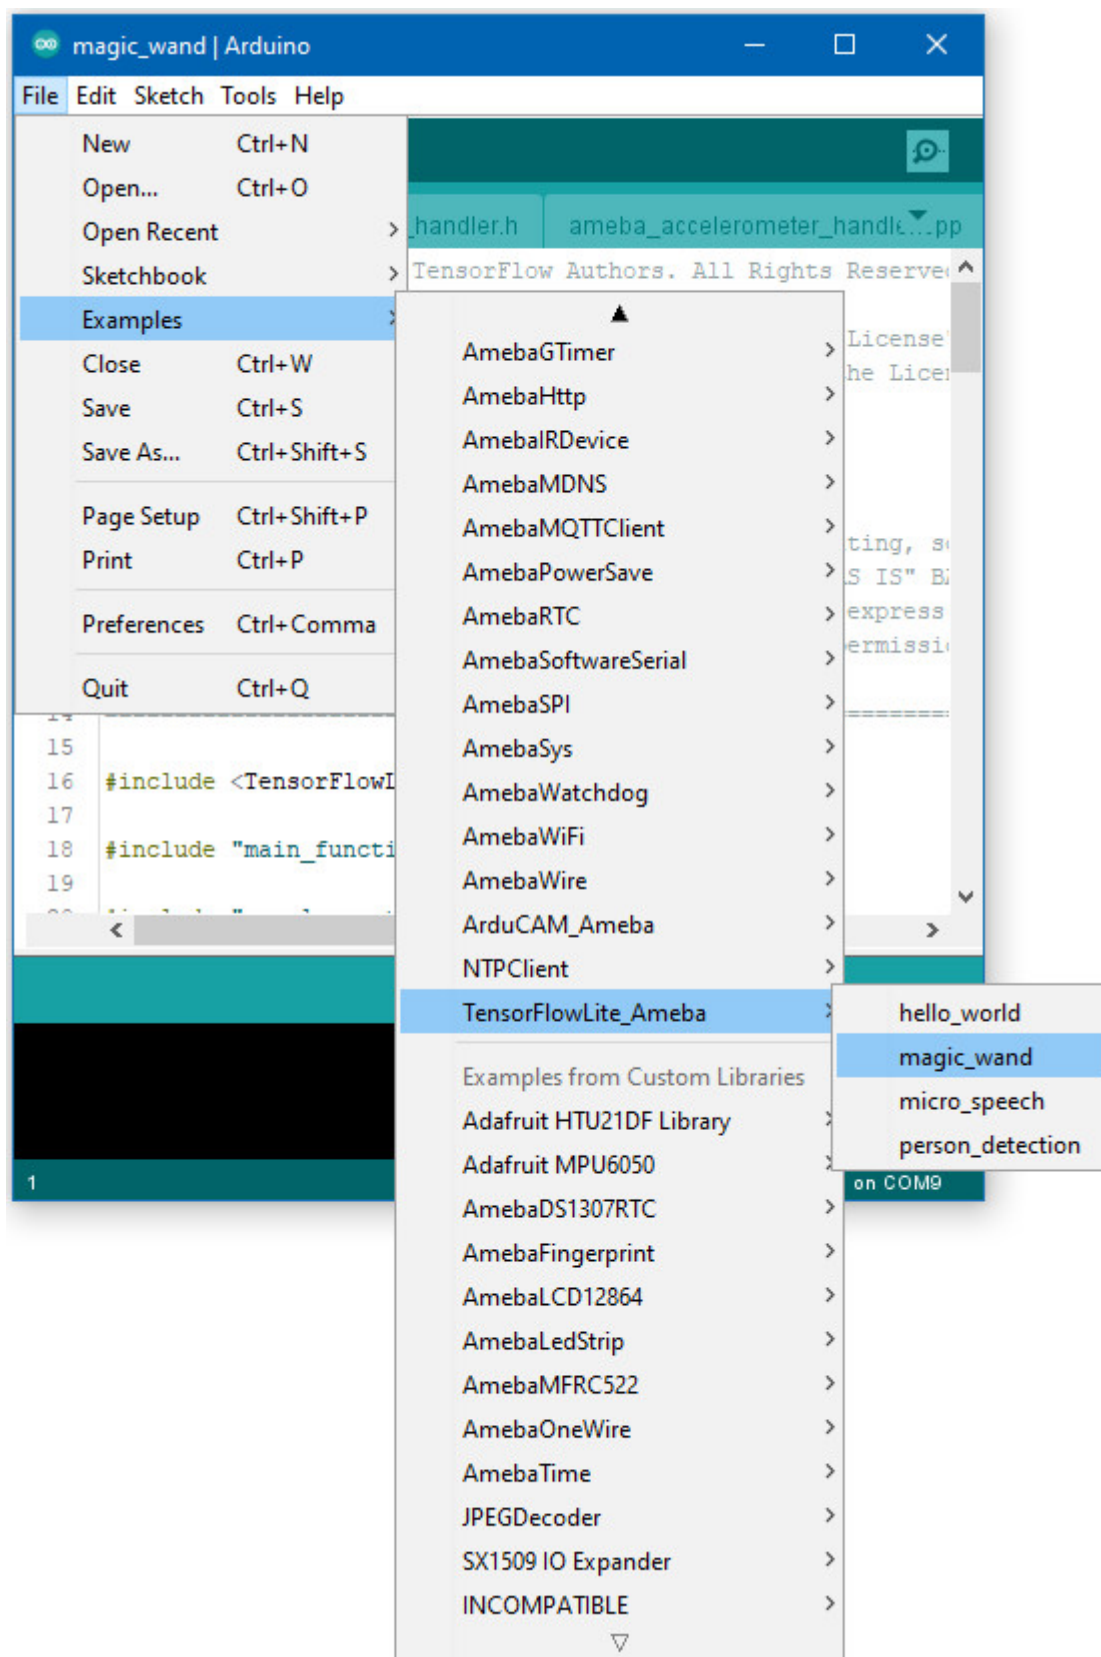


Upload the code and press the reset button on Ameba once the upload is finished.

Holding the accelerometer steady, with the positive x-axis pointing to the right and the positive z-axis pointing upwards, move it following the shapes as shown, moving it in a smooth motion over 1 to 2 seconds, avoiding any sharp movements.

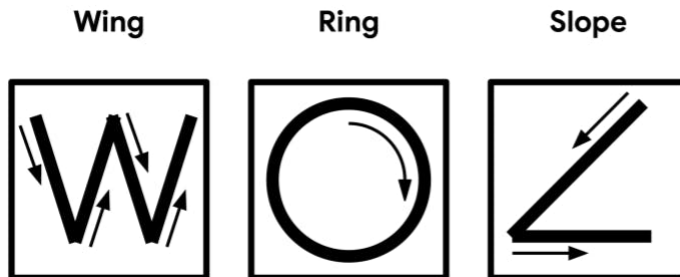

If the movement is recognised by the Tensorflow Lite model, you should see the same shape output to the Arduino serial monitor. Different LEDs will light up corresponding to different recognized gestures.

Note that the wing shape is easy to achieve, while the slope and ring shapes tend to be harder to get right.

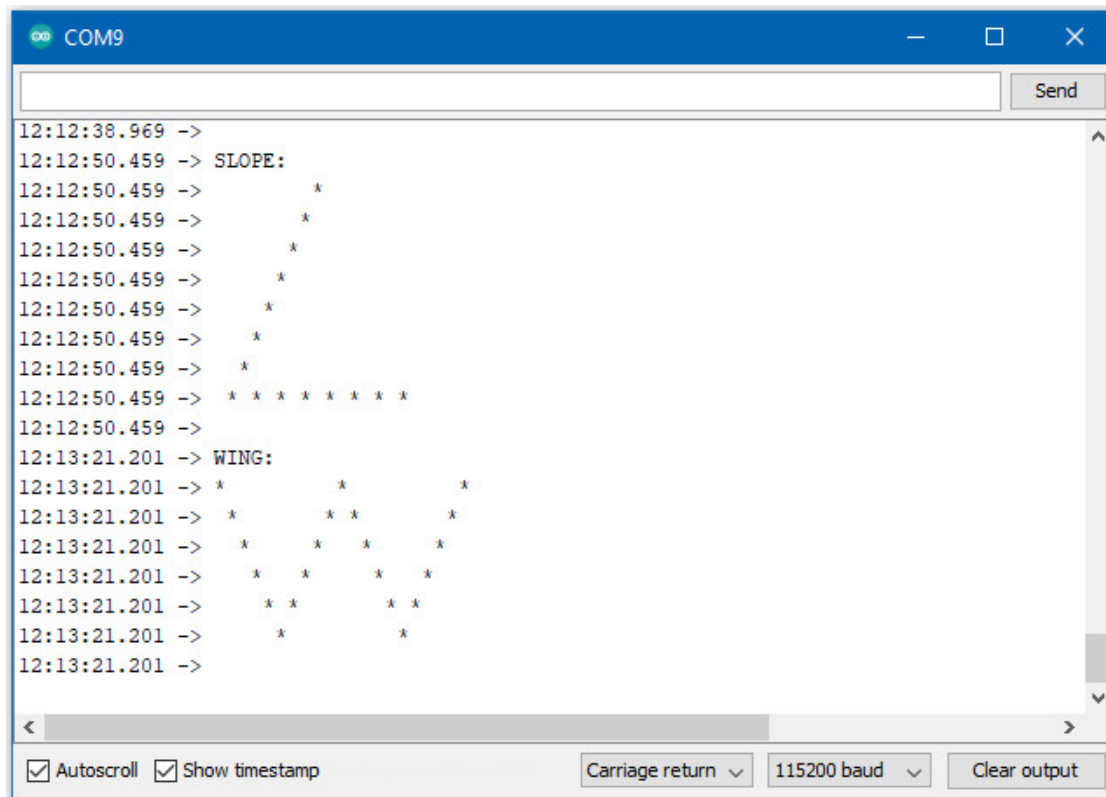

Code Reference

More information on TensorFlow Lite for Microcontrollers can be found at: <https://www.tensorflow.org/lite/microcontrollers>

TensorFlow Lite - Micro Speech

Preparation


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Adafruit PDM MEMS microphone
- LED x 4

Example

Procedure


RTL8722DM / RTL8722CSM Wiring Diagram:

Connect the microphone and LEDs to the RTL8722 board following the diagram.

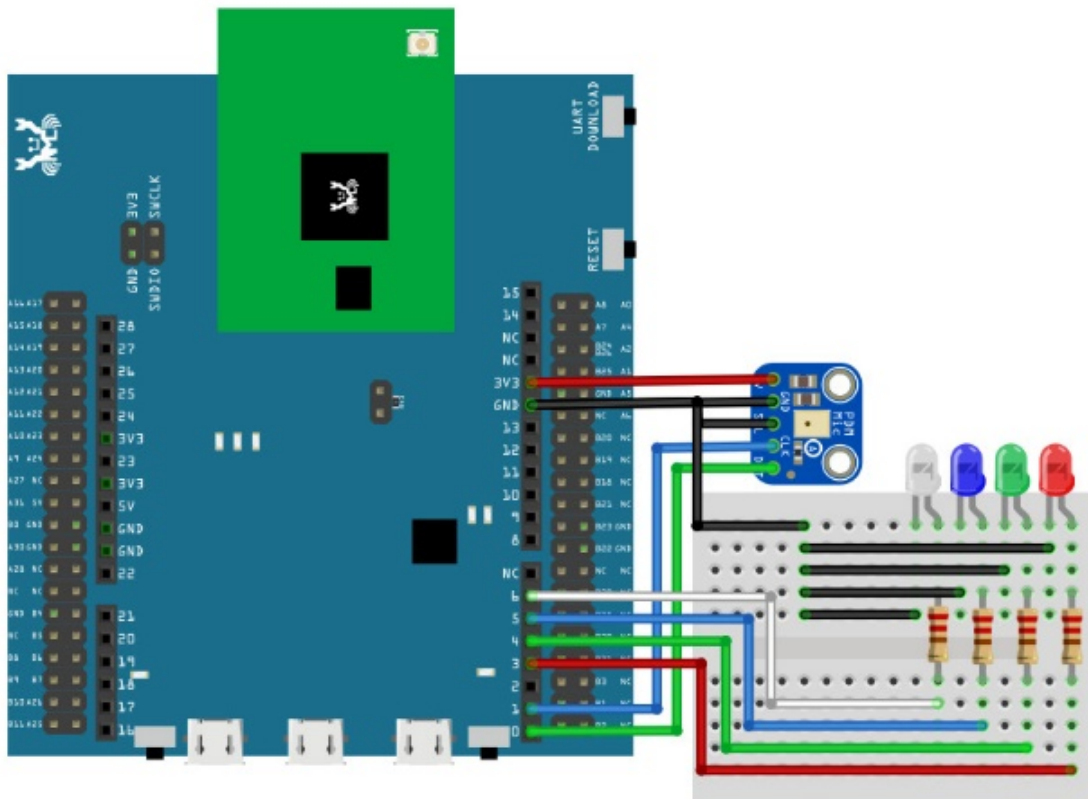

RTL8722DM MINI Wiring Diagram:

As RTL8722DM MINI have a built in microphone on the board, there is no need for any external microphone. For the LEDs, we will only connect two LEDs and then use the two onboard LEDs (Blue and Green).

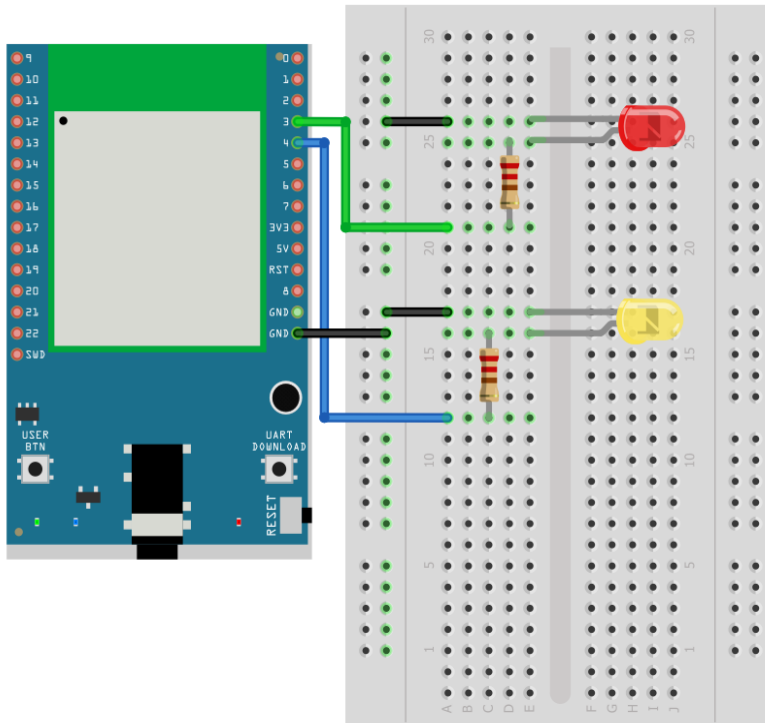

Download the Ameba customized version of TensorFlow Lite for Microcontrollers library at


https://github.com/ambiot/ambd_arduino/tree/master/Arduino_zip_libraries.

Follow the instructions at <https://www.arduino.cc/en/guide/libraries> to install it.

Ensure that the patch files found at https://github.com/ambiot/ambd_arduino/tree/master/Ameba_misc/ are also installed.

Open the example, "Files" -> "Examples" -> "TensorFlowLite_Ameba" -> "micro_speech"


.

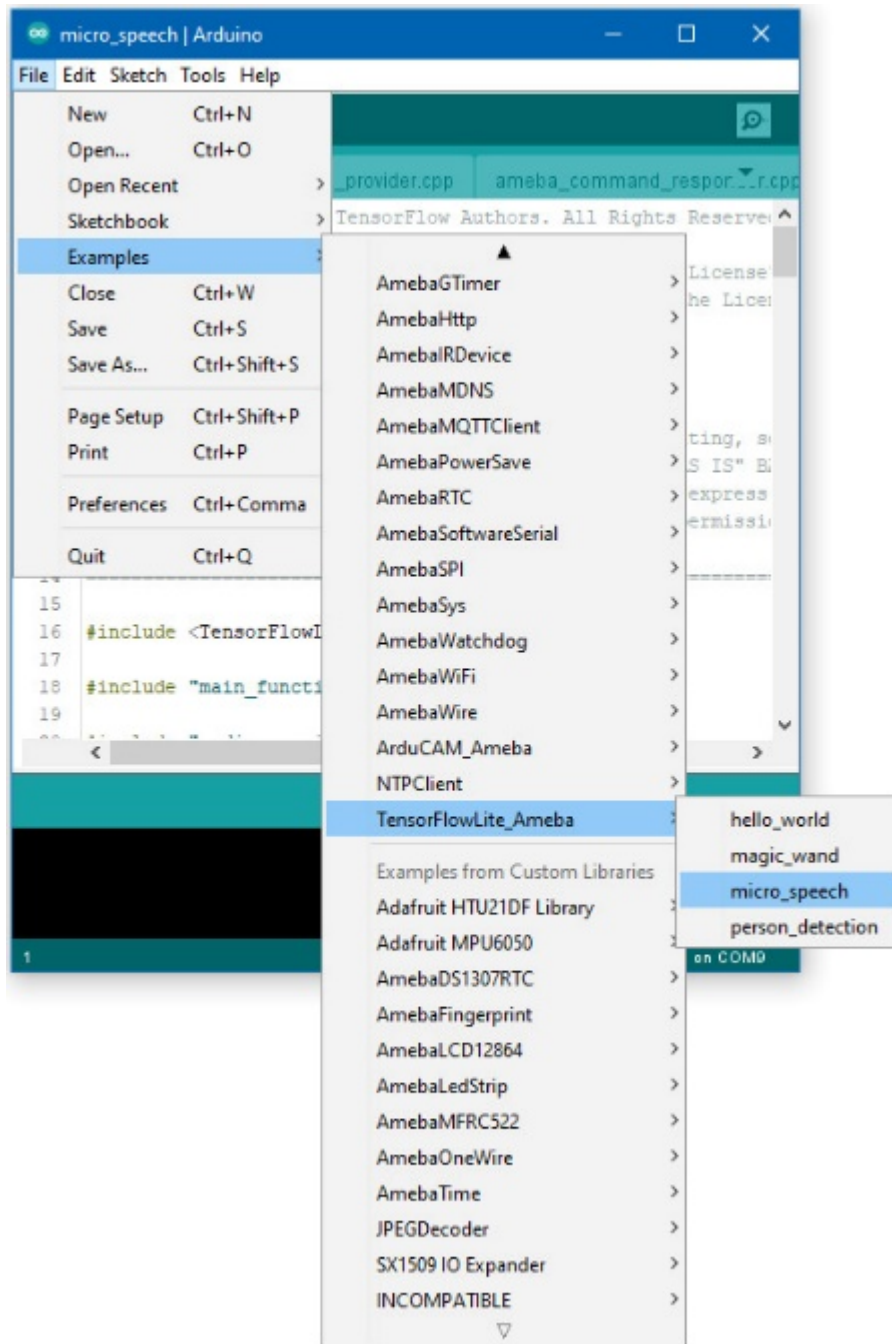

Upload the code and press the reset button on Ameba once the upload is finished.

Once it is running, you should see one of the LEDs flashing, indicating that it is processing audio. Saying the word “yes” will cause the green LED to light up. Saying the word “no” will cause the red LED to light up. If the word is not recognized, the blue LED will light up.

The inference results are also output to the Arduino serial monitor, which appear as follows:

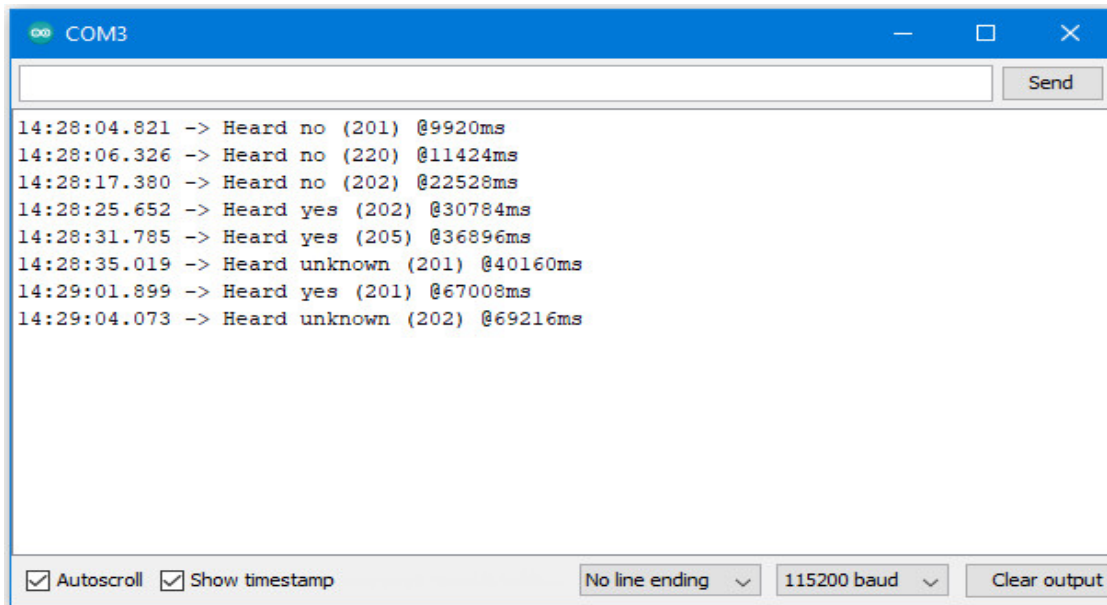

If you are having trouble in getting the words recognized, here are some tips:

- Ensure that your surroundings are quiet with minimal noise.
- Experiment with varying the distance of the microphone, starting with it at an arm's length.
- Experiment with different tones and volume when saying the words.
- Depending on how you pronounce the words, the characteristics of the microphone used, getting one keyword recognized may be easier than the other.

Code Reference

More information on TensorFlow Lite for Microcontrollers can be found at: <https://www.tensorflow.org/lite/microcontrollers>

TensorFlow Lite - Person Detection

Materials


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Arducam Mini 2MP Plus OV2640 SPI Camera Module x 1
- LED x 3

Example


Procedure

RTL8722DM / RTL8722CSM Wiring Diagram:

Connect the camera and LEDs to the RTL8722 board following the diagram.

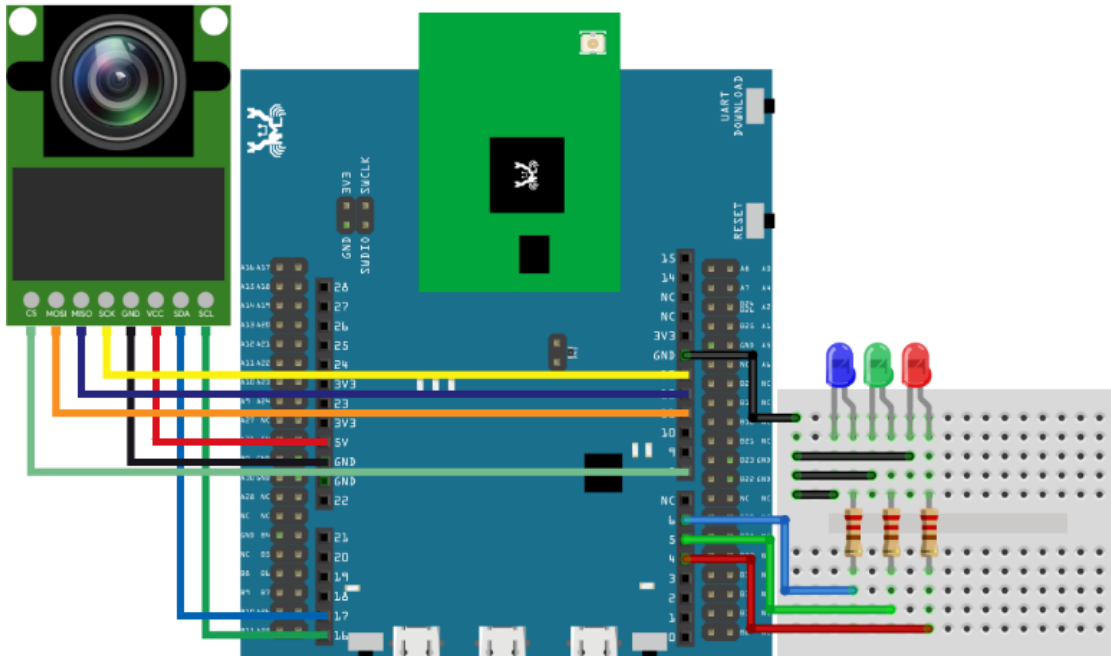

RTL8722DM MINI Wiring Diagram:

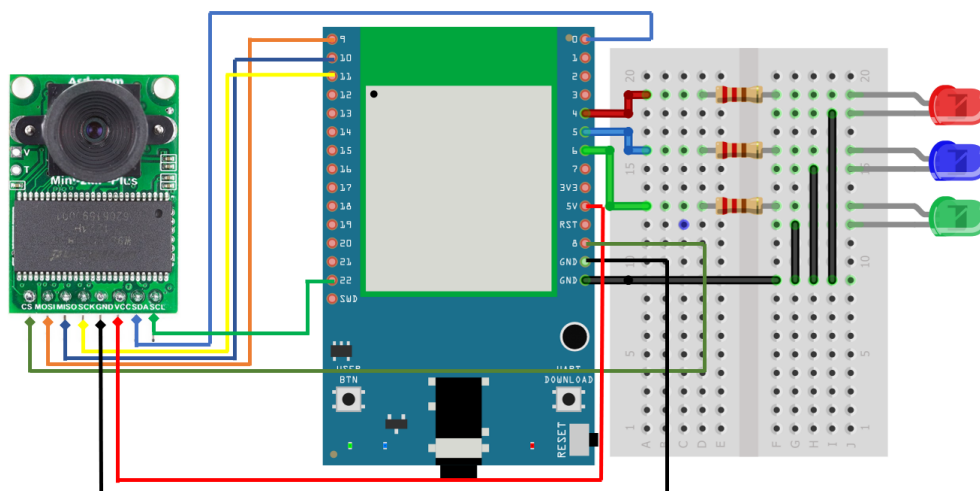

Download the Ameba customized version of TensorFlow Lite for Microcontrollers library at

https://github.com/ambiot/ambd_arduino/tree/master/Arduino_zip_libraries.

Follow the instructions at <https://www.arduino.cc/en/guide/libraries> to install it. Ensure that the patch files found at https://github.com/ambiot/ambd_arduino/tree/master/Ameba_misc/ are also installed.

You will also need to install the Ameba_ArduCAM library, found together with the TensorFlow Lite library.

In the Arduino IDE library manager, install the JPEGDecoder library. This example has been tested with version 1.8.0 of the JPEGDecoder library.


Once the library has installed, you will need to configure it to disable some optional components that are not compatible with the RTL8722DM. Open the following file:

```
Arduino/libraries/JPEGDecoder/src/User_Config.h
```

Make sure that both `#define LOAD_SD_LIBRARY` and `#define LOAD_SDFAT_LIBRARY` are commented out, as shown in this excerpt from the file:

```
//#define LOAD_SD_LIBRARY // Default SD Card library
//#define LOAD_SDFAT_LIBRARY // Use SdFat library instead, so SD Card SPI can be bit_
↪bashed
```


Open the example, "Files" -> "Examples" -> "TensorFlowLite_Ameba" -> "person_detection".

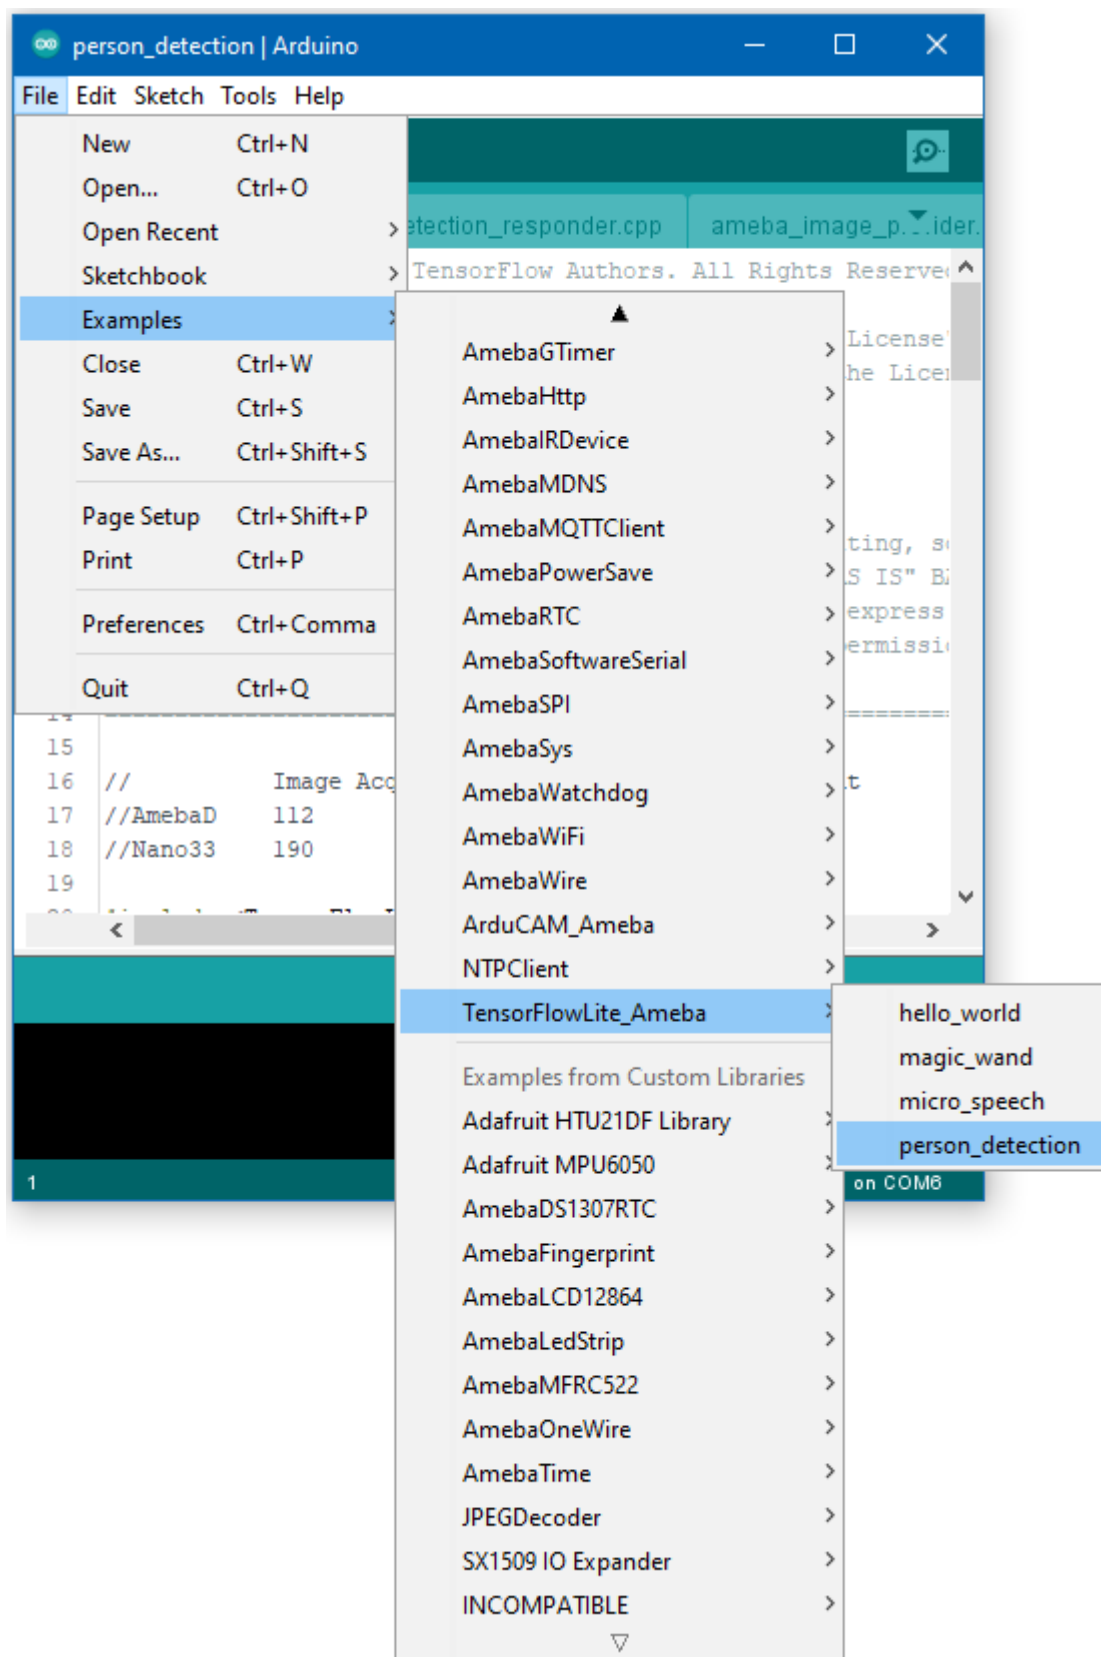

Upload the code and press the reset button on Ameba once the upload is finished.

Once it is running, you should see the blue LED flashing once every few seconds, indicating that it has finished processing an image. The red LED will light up if it determines that there is no person in the previous image captured, and the green LED will light up if it determines that there is a person.

The inference results are also output to the Arduino serial monitor, which appear as follows:

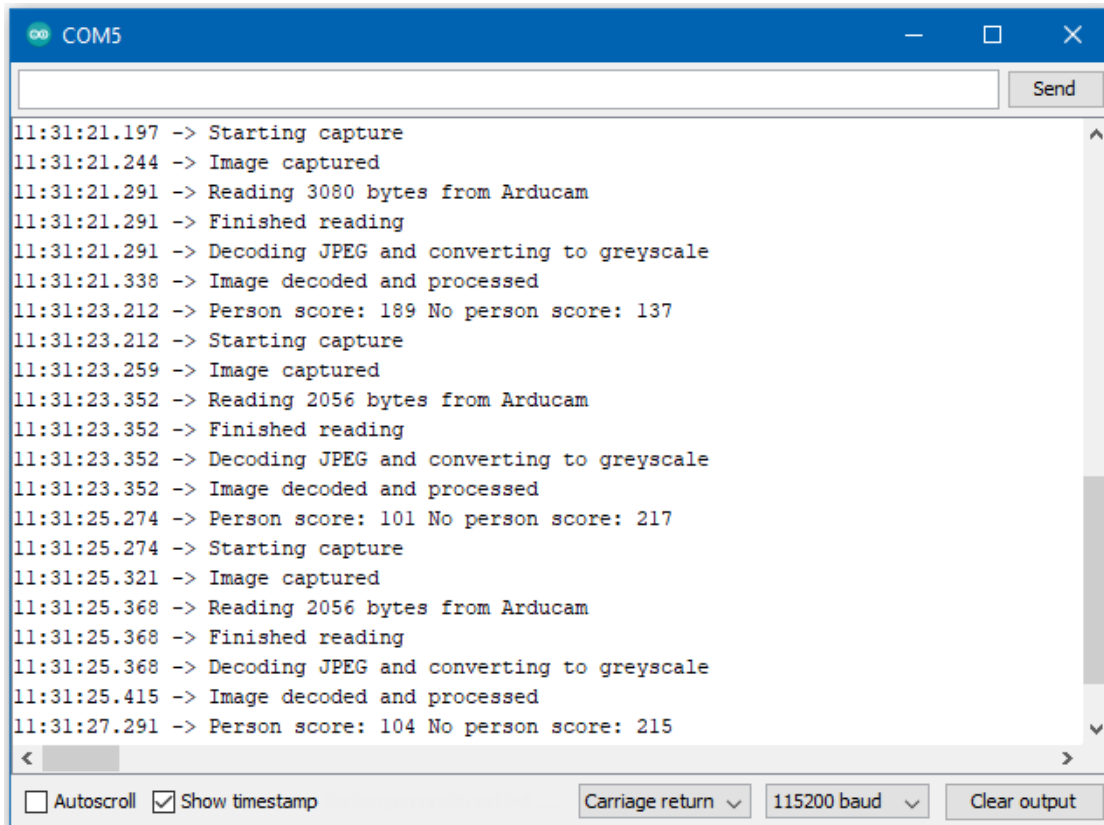

```
11:31:21.197 -> Starting capture
11:31:21.244 -> Image captured
11:31:21.291 -> Reading 3080 bytes from Arducam
11:31:21.291 -> Finished reading
11:31:21.291 -> Decoding JPEG and converting to greyscale
11:31:21.338 -> Image decoded and processed
11:31:23.212 -> Person score: 189 No person score: 137
11:31:23.212 -> Starting capture
11:31:23.259 -> Image captured
11:31:23.352 -> Reading 2056 bytes from Arducam
11:31:23.352 -> Finished reading
11:31:23.352 -> Decoding JPEG and converting to greyscale
11:31:23.352 -> Image decoded and processed
11:31:25.274 -> Person score: 101 No person score: 217
11:31:25.274 -> Starting capture
11:31:25.321 -> Image captured
11:31:25.368 -> Reading 2056 bytes from Arducam
11:31:25.368 -> Finished reading
11:31:25.368 -> Decoding JPEG and converting to greyscale
11:31:25.415 -> Image decoded and processed
11:31:27.291 -> Person score: 104 No person score: 215
```

Code Reference

More information on TensorFlow Lite for Microcontrollers can be found at: <https://www.tensorflow.org/lite/microcontrollers>

1.2.3 Download

Release History

Version 3.1.1 - 2021/12/25

- Feature:
 - Add BLE HID and examples

- BLEHIDGamepad, BLEHIDKeyboard, and BLEHIDMouse
- Update PowerSave examples
- Support RTL8722DM MINI and RTL8720DN/BW16
- Enable LwIP hostname edit
- API Updates:
 - Update API for PowerSave
 - Update ameba_d_tools 1.0.7 for all 3 platforms
 - Support RTL8720DN/BW16 and RTL8722DM MINI
 - Add more Aon wake up pins
 - Update API for IR
 - Removed requirement to define both IR TX and RX pins in IRDevice::begin
 - Removed previous limit on number of time durations IRDevice::send can accept
 - Update GPIO Int
 - Enable INPUT_IRQ_CHANGE
 - Add definition inside wiring_constants.h and wiring_digital.c, also complete the TODO part for attachInterrupt() as well
 - Update UART, for RTL8720DN/BW16 not showing log issue
 - Fix wrong attribute permissions for characteristic CCCD descriptor. Remove unused variable warnings
 - Update GTimer, for the internal timer ID validation test
 - Updated SPI connection for RTL8720DN/BW16
 - Update Google_Cloud_IoT example with new Google TLS cert
 - Update Analog Pin remove A0 and A1
 - Update Platform.txt for Windows OS with User Name having a space in between
 - Update all libs
- Misc:
 - Update AmebaEink.zip, SPI connection for RTL8720DN/BW16
 - Add Autoflash_patch folder
 - Update the Fritzing of RTL8720DN/BW16, remove A0 and A1

Version 3.1.0 - 2021/11/05

- Feature:

- Support board RTL8720DN(BW16)
- Add WiFiControlCar example
- Add Arduboy zip library
- Add WPA3 support
- Add Amebad_HMI_MQTT zip library
- Add support for IPV6 wiht 4 examples
- WLAN lib update
- Minor bug fix
- API Updates:
 - Support Microsoft Azure IoT cloud
 - Enable “strnlen” from rom
 - Add “#define yield” for compilation
 - Update PubSubClient lib
 - Update APIs for RTL8720DN(BW16) (SPI, I2C, Fatfs, Audiocodec and UART)
 - Update jtag enable functions
 - Update wifi security option
 - Remove the unused libs lib_wifi_fw.a lib_wifi_ucps_fw.a
 - Update watchdog
 - Update AudioCodec
 - Pin mapping updates
 - Remove unused marcos
 - RTL8720DN(BW16) related naming update for all examples
 - Update PowerSave
- Misc
 - Add RTL8720DN_BW16 frizting folder
 - Move RTL8720DN_BW16 frizting files to correct folder
 - Rename folder name to short the length of path
 - Add Offline_SDK_installation_tool (Windows, Linux and MacOS)
 - Update linux tools for compatibility issue
 - Update RTL8722DM MINI and RTL8720DN(BW16) Fritzting and Pinmux

- Update ameba_d_tools V1.0.6
 - Add Image_Related folder
 - Correct the core from Cortex-M4 to Cortex-M33
-

Version 3.0.11 - 2021/10/26

- Feature:
 - Add example, FatfsSDIO - Read and open HTML file from SD card
 - API Updates:
 - RTL8720DN/BW16 related compatibility update for all examples
 - Misc
 - Update RTL8722DM MINI and RTL8720DN Fritzing and Pinmux
-

Version 3.0.10 - 2021/09/22

- Feature:
 - Add AudioCodec wav examples
 - API Updates:
 - Pin mapping updates for RTL8722DM MINI
 - Remove unused marcos
 - Update platform.txt for bin files process
 - rollback for “wifi.h” update
 - Minor bug fix patch
-

Version 3.0.9 - 2021/09/13

- API Updates:
 - Pin mapping updates
 - Remove unused marcos
 - “wifi.h” related files change to “Amebawifi.h”
-

Version 3.0.8 - 2021/05/06

- Feature:
 - Add RTL8722DM_mini board
-

- Add fatfs for SD card
 - Add AudioCodec
 - Add TensorFlow lite support with examples
 - Add zip libraries for TensorFlow lite support
 - Update SDK for supporting Arduino IDE 2.0
 - Update wlan lib
 - API Updates:
 - Update zip libraries of Eink
 - ADC updates, Change calculation method to use EFUSE calibration parameters and SDK formula to improve accuracy
 - writing_analog updates, minor bug fix and support for mini board
 - SPI updates, minor bug fix and support for mini board
 - I2S updates, minor bug fix and support for mini board
 - IRDevice updates, minor bug fix
-

Version 3.0.7 - 2020/11/19

- Feature:
 - Add AmebaIRDevice example IRSendSONY
 - Update Ameba Arduino IRDevice API
 - Update Ameba Arduino SSL related API
 - Update Ameba Arduino Wlan API to support static IP function
-

Version 3.0.6 - 2020/10/28

- Feature:
 - Add Ameba RTC support
 - Add AmebaRTC example RTC and RTCArm
 - Add Ameba Watchdog support
 - Add AmebaWatchdog example WatchdogTimer
 - Update Ameba BLE support
 - Add AmebaBLE example BLEUartService, DHT_over_BLEUart
 - Update Ameba Wlan library

- Update Ameba Wlan SDK structure, add AP mode hidden SSID support
-

Version 3.0.5 - 2020/09/09

- Feature:
 - Build in tool updates V1.0.4
 - Add zip lib AmebaEink
 - Add AmebaEink example EinkDisplayImage, EinkDisplayQR, and EinkDisplayText
 - Add google cloud examples
 - Update Amazon AWS related examples
 - Add power save support
 - Add AmebaPowerSave example TicklessMode, DeepSleepMode, DeepSleep_DHT_LCD_Example, and DeepSleep_DHT_Eink_Example
-

Version 3.0.4 - 2020/07/27

- Feature:
 - Update BLE library. Add example BLEBatteryClient and BLEWifiConfig
 - Update from polarssl to mbedtls 2.4.0
-

Version 3.0.3 - 2020/07/03

- Feature:
 - Build in Image tool updates V1.0.3
 - Upload log clean up
-

Version 3.0.2 - 2020/06/30

- Feature:
 - Windows, Linux and macOS X support
 - Build in Image tool updates
-

Version 3.0.1 - 2020/05/15

- Feature:
 - Official release of AmebaD Arduino SDK
 - warning cleaning
-

- I2C lib updates
-

Version 3.0.0 - 2020/05/01

- Feature:
 - Support Boards Manager and Arduino IDE development
 - WiFi scan AP, connect to AP, TCP Server/Client, including 5G
 - Bluetooth, BLE
 - GPIO digital in/out and interrupt
 - ADC analog in/out (0 ~ 3.3V)
 - PWM getting analog results with digital means
 - SPI master and slave mode
 - UART 1 for log, 2 for customize usage
 - I2C master mode

1.2.4 Board HDK

- Layout
- Schematic

1.2.5 API Documents

RTL8722DM ARDUINO Online API Documents

Analog

Class AmebaServo

AmebaServo Class

Description

Defines a class of manipulating servo motors connected to Arduino pins.

Syntax

```
class AmebaServo
```

Members

Public Constructors	
AmebaServo::AmebaServo	Constructs an AmebaServo object.
Public Methods	
AmebaServo::attach	Attach the given pin to the next free channel.
AmebaServo::detach	Detach the servo.
AmebaServo::write	Write value, if the value is < 200 it's treated as an angle, otherwise as pulse-width in microseconds.
AmebaServo::writeMicroseconds	Write pulse width in microseconds.
AmebaServo::read	Output current pulse width as an angle between 0 and 180 degrees.
AmebaServo::readMicroseconds	Output current pulse width in microseconds for this servo.
AmebaServo::attached	Check if the servo is attached.

AmebaServo::attach

Description

Attach the given pin to the next free channel, sets pinMode (including minimum and maximum values for writes), returns channel number, or 0 if failure.

Syntax

```
uint8_t attach(int pin);

uint8_t attach(int pin, int min, int max);
```

Parameters

pin: The Arduino pin number to be attached.

min: Minimum values for writes.

max: Maximum values for writes.

Returns

The function returns channel number or 0

Example Code

Example: ServoSweep

The code demos servo motor sweeping from 0 degrees to 180 degrees then sweep back to 0 degrees in the step of 1 degree.

列表 2: ServoSweep.ino

```
1  /* Sweep
2  by BARRAGAN < http://barraganstudio.com >
3  This example code is in the public domain.
4  modified 8 Nov 2013
5  by Scott Fitzgerald
6  http://www.arduino.cc/en/Tutorial/Sweep
7  refined 2016/03/18 by Realtek
8  */
9
10 #include "AmebaServo.h"
11
12 // create servo object to control a servo
13 // 4 servo objects can be created correspond to PWM pins
14
15 AmebaServo myservo;
16
17 // variable to store the servo position
18 int pos = 0;
19
20 void setup() {
21   #if defined(BOARD_RTL8195A)
22     // attaches the servo on pin 9 to the servo object
23     myservo.attach(9);
24   #elif defined(BOARD_RTL8710)
25     // attaches the servo on pin 13 to the servo object
26     myservo.attach(13);
27   #elif defined(BOARD_RTL8721D)
28     // attaches the servo on pin 8 to the servo object
29     myservo.attach(8);
30   #else
31     // attaches the servo on pin 9 to the servo object
32     myservo.attach(9);
33   #endif
34 }
35
36 void loop() {
37   // goes from 0 degrees to 180 degrees in steps of 1 degree
38   for (pos = 0; pos <= 180; pos += 1) {
39     // tell servo to go to position in variable 'pos'
40     myservo.write(pos);
41     // waits 15ms for the servo to reach the position
42     delay(15);
```

(下页继续)

(续上页)

```

43     }
44     // goes from 180 degrees to 0 degrees
45     for (pos = 180; pos >= 0; pos -= 1) {
46         // tell servo to go to position in variable 'pos'
47         myservo.write(pos);
48         // waits 15ms for the servo to reach the position
49         delay(15);
50     }
51 }

```

Notes and Warnings

Every time must include the header file “AmebaServo.h” in front of the project to use the class function.

AmebaServo::detach**Description**

Detach the servo.

Syntax

```
void AmebaServo::detach(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Every time must include the header file “AmebaServo.h” in front of the project to use the class function.

AmebaServo::write**Description**

Write an integer value to the function, if the value is < 200, it’ s being treated as an angle, otherwise as pulse-width in microseconds.

Syntax

```
void AmebaServo::write(int value);
```

Parameters

value: The value < 200 its treated as an angle; otherwise as pulse width in microseconds.

Returns

The function returns nothing.

Example Code

Example: ServoSweep

The code demos servo motor sweeping from 0 degrees to 180 degrees then sweep back to 0 degrees in the step of 1 degree. Please refer to code in “AmebaServo:: attach” section.

Notes and Warnings

Every time must include the header file “AmebaServo.h” in front of the project to use the class function.

AmebaServo::writeMicroseconds**Description**

Write pulse width to the servo in microseconds.

Syntax

```
void AmebaServo::writeMicroseconds(int value);
```

Parameters

value: Write value the pulse width in microseconds.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Every time must include the header file “AmebaServo.h” in front of the project to use the class function.

AmebaServo::read**Description**

The function reads current pulse width and returns as an angle between 0 and 180 degrees.

Syntax

```
int AmebaServo::read(void);
```

Parameters

The function requires no input parameter.

Returns

The pulse width as an angle between 0 ~ 180 degrees.

Example Code

NA

Notes and Warnings

Every time must include the header file “AmebaServo.h” in front of the project to use the class function.

AmebaServo::readMicroseconds**Description**

The function returns a Boolean value “true” if this servo is attached, otherwise returns “false” .

Syntax

```
int AmebaServo::readMicroseconds(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns current servo pulse width in microseconds.

Example Code

NA

Notes and Warnings

Every time must include the header file “AmebaServo.h” in front of the project to use the class function.

AmebaServo::attached**Description**

It returns true if this servo is attached, otherwise false.

Syntax

```
bool AmebaServo::attached(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns a Boolean value as true or false.

Example Code

Example: ServoSweep

The code demos servo motor sweeping from 0 degrees to 180 degrees then sweep back to 0 degrees in the step of 1 degree. Please refer to code in “AmebaServo:: attach” section.

Notes and Warnings

Every time must include the header file “AmebaServo.h” in front of the project to use the class function.

AudioCodec

Class AudioCodec

Description

A class used for general control and management of the hardware audio codec functions.

Syntax

```
class AudioCodec
```

Members

Public Constructors

The public constructor should not be used as this class is intended to be a singleton class. Access member functions using the object instance named Codec.

Public Methods

AudioCodec::begin	Configure and start the audio codec for transmit and receive operation
AudioCodec::end	Stop all audio codec operation
Au- dioCodec::getBufferPageSize	Get the byte size of a single page of the audio codec buffer
AudioCodec::setSampleRate	Configure the audio codec transmit and receive sampling rate
AudioCodec::setBitDepth	Configure the audio codec transmit and receive bit depth (bits per sample)
Au- dioCodec::setChannelCount	Configure the audio codec transmit and receive channel count
Au- dioCodec::setInputMicType	Configure for analog or digital input microphone type
Au- dioCodec::setInputLRMux	Configure input left right channel multiplexing
AudioCodec::setDMicBoost	Configure boost gain for digital microphone input
AudioCodec::setAMicBoost	Configure boost gain for analog microphone input
AudioCodec::setADCGain	Configure gain of ADC used to acquire analog input
AudioCodec::muteInput	Mute input audio data stream
Au- dioCodec::setOutputVolume	Configure output audio volume
AudioCodec::muteOutput	Mute output audio
AudioCodec::writeAvaliable	Check for free buffer page available for data write
AudioCodec::writeDataPage	Write audio data to an available buffer page
AudioCodec::readAvaliable	Check for buffer page with new data available for read
AudioCodec::readDataPage	Read audio data from a ready buffer page
Au- dioCodec::setWriteCallback	Set a callback function to be notified when a free buffer page is available for write
Au- dioCodec::setReadCallback	Set a callback function to be notified when a buffer page with new data is available for read

AudioCodec::begin**Description**

Configure and start the audio codec for transmit and receive operation.

Syntax

```
void begin(bool input, bool output);
```

Parameters

input: enable audio codec data input

output: enable audio codec data output

Returns

The function returns nothing.

Example Code

Example: BasicInputOutput

Notes and Warnings

AudioCodec::end

Description

Stop all audio codec operation.

Syntax

```
void end();
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

AudioCodec::getBufferPageSize

Description

Get the byte size of a single page of the audio codec buffer.

Syntax

```
uint32_t getBufferPageSize();
```

Parameters

The function requires no input parameter.

Returns

The size of a audio codec buffer page, in number of bytes.

Example Code

NA

Notes and Warnings

The AudioCodec class includes a transmit and receive buffer to store audio sample data while transferring to and from the DAC output and ADC input. The buffer is divided into pages of fixed size, and audio data can be read and written

one page at a time. Depending on the configured bit depth (bits per audio sample) and channel count, a buffer page may contain a different number of audio samples.

AudioCodec::setSampleRate

Description

Configure the audio codec transmit and receive sampling rate.

Syntax

```
void setSampleRate(uint32_t sampleRate);
```

Parameters

sampleRate: desired audio codec sampling rate in Hz. Default value of 48000. Supported values: 8000, 16000, 32000, 44100, 48000, 88200, 96000.

Returns

The function returns nothing.

Example Code

Example: BasicInputOutput

Notes and Warnings

High sample rates above 48000Hz will require frequent buffer reads and writes to keep up with the large amount of data input and output. If there is insufficient processing time dedicated to this task, audio quality will be degraded.

AudioCodec::setBitDepth

Description

Configure the audio codec transmit and receive bit depth (bits per sample).

Syntax

```
void setBitDepth(uint8_t bitDepth);
```

Parameters

bitDepth: desired number of bits per sample. Default value of 16. Supported values: 8, 16, 24.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Setting a bit depth of 24 bits per sample will require 32 bits (4 bytes) of buffer space for storing each sample, with the most significant byte ignored.

AudioCodec::setChannelCount

Description

Configure the audio codec transmit and receive channel count.

Syntax

```
void setChannelCount(uint8_t monoStereo);
```

Parameters

monoStereo: number of channels. Default value of 1. Supported values: 1, 2.

Returns

The function returns nothing.

Example Code

Example: BasicInputOutput

Notes and Warnings

AudioCodec::setInputMicType

Description

Configure for analog or digital input microphone type.

Syntax

```
Void setInputMicType(Mic_Type micType);
```

Parameters

micType: Input microphone type. Default value ANALOGMIC. Valid values:

- ANALOGMIC –microphone with an analog output
- PDMMIC –digital microphone with a PDM output

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

For analog single-ended output, connect to PA_4 for the left channel and PA_2 for the right channel.

For digital PDM output, connect the PDM clock to PB_1 and PDM data to PB_2.

AudioCodec::setInputLRMux

Description

Configure input left right channel multiplexing.

Syntax

```
void setInputLRMux(uint32_t mux);
```

Parameters

mux: desired left right audio channel multiplexing setting. Default value RX_CH_LR. Valid values:

- RX_CH_LR
- RX_CH_RL
- RX_CH_LL
- RX_CH_RR

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

In mono channel mode, both RX_CH_LR and RX_CH_LL will result in the audio codec sampling input data from the left channel microphone. Similarly, both RX_CH_RL and RX_CH_RR will result in the audio codec sampling input data from the right channel microphone.

In stereo channel mode, RX_CH_RL will switch the positions of input data sampled from the microphones. RX_CH_RR and RX_CH_LL will result in duplicated samples from the right and left microphones respectively.** **

AudioCodec::setDMicBoost

Description

Configure boost gain for digital microphone input.

Syntax

```
void setDMicBoost(uint32_t leftBoost, uint32_t rightBoost);
```

Parameters

leftBoost: boost gain for left channel digital microphone input

rightBoost: boost gain for right channel digital microphone input

Valid boost gain values:

- 0 : 0dB
- 1 : 12dB
- 2 : 24dB

- 3 : 36dB

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

AudioCodec::setAMicBoost

Description

Configure boost gain for analog microphone input.

Syntax

```
void setAMicBoost(uint32_t leftBoost, uint32_t rightBoost);
```

Parameters

leftBoost: boost gain for left channel analog microphone input

rightBoost: boost gain for right channel analog microphone input

Valid boost gain values:

- 0 : 0dB
- 1 : 20dB
- 2 : 30dB
- 3 : 40dB

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Only use this function if additional gain is required after using setADCGain function.

AudioCodec::setADCGain

Description

Configure gain of ADC used to acquire analog input.

Syntax

```
void setADCGain(uint32_t leftGain, uint32_t rightGain);
```

Parameters

leftGain: Gain for left channel ADC

rightGain: Gain for right channel ADC

Valid value range is from 0x00 to 0x7f. Gain increases by 0.375dB for every increment in value:

- 0x00 : -17.625dB
- 0x01 : -17.25dB
- 0x2f : 0dB
- 0x30 : 0.375dB
- 0x7f : 30dB

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings**AudioCodec::muteInput****Description**

Mute input audio data stream.

Syntax

```
void muteInput(uint8_t leftMute, uint8_t rightMute);
```

Parameters

leftMute: 1 to mute left channel input, 0 to unmute

rightMute: 1 to mute right channel input, 0 to unmute

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings**AudioCodec::setOutputVolume****Description**

Configure output audio volume.

Syntax

```
void setOutputVolume(uint8_t leftVol, uint8_t rightVol);
```

Parameters

leftVol: left channel output volume

rightVol: right channel output volume

Valid value ranges from 0 to 100, corresponding to a volume of -65.625dB to 0dB.

Returns

The function returns nothing.

Example Code

Example: BasicInputOutput

Notes and Warnings

AudioCodec::muteOutput

Description

Mute output audio.

Syntax

```
void muteOutput(uint8_t leftMute, uint8_t rightMute);
```

Parameters

leftMute: 1 to mute left channel output, 0 to unmute

rightMute: 1 to mute right channel output, 0 to unmute

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

AudioCodec::writeAvaliable

Description

Check for free buffer page available for data write.

Syntax

```
bool writeAvaliable();
```

Parameters

The function requires no input parameter.

Returns

Returns true if there is a buffer page that is available for writing data into. Returns false if all buffer pages are full.

Example Code

Example: BasicInputOutput

Notes and Warnings**AudioCodec::writeDataPage****Description**

Write audio data to an available buffer page.

Syntax

```
uint32_t writeDataPage(int8_t* src, uint32_t len);  
uint32_t writeDataPage(int16_t* src, uint32_t len);
```

Parameters

src: pointer to array containing audio samples to write to audio codec.

len: number of audio samples in array.

Returns

The function returns the number of audio samples written to the audio codec.

Example Code

Example: BasicInputOutput

Notes and Warnings**AudioCodec::readAvaliable****Description**

Check for buffer page with new data available for read.

Syntax

```
bool readAvaliable();
```

Parameters

The function requires no input parameter.

Returns

Returns true if there is a buffer page with new data that is ready for reading data from. Returns false if all buffer pages are empty.

Example Code

Example: BasicInputOutput

Notes and Warnings

AudioCodec::readDataPage

Description

Read audio data from a ready buffer page.

Syntax

```
uint32_t readDataPage(int8_t* dst, uint32_t len);  
  
uint32_t readDataPage(int16_t* dst, uint32_t len);
```

Parameters

dst: pointer to array to contain audio samples read from audio codec.

len: number of audio samples to read.

Returns

The function returns the number of audio samples read from the audio codec.

Example Code

Example: BasicInputOutput

Notes and Warnings

AudioCodec::setWriteCallback

Description

Set a callback function to be notified when a free buffer page is available for write.

Syntax

```
void setWriteCallback(void (writeCB)(**void*));
```

Parameters

writeCB: function to be called when a buffer page becomes available for data write. Takes no arguments and returns nothing

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

After starting the audio codec with `AudioCodec::begin()`, the callback function will be called each time the audio codec finishes outputting the data in a buffer page.

AudioCodec::setReadCallback

Description

Set a callback function to be notified when a buffer page with new data is available for read.

Syntax

```
void setReadCallback(void (readCB)(**void*));
```

Parameters

`readCB`: function to be called when a buffer page with new data becomes available for data read. Takes no arguments and returns nothing

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

After starting the audio codec with `AudioCodec::begin()`, the callback function will be called each time the audio codec fills up a buffer page with newly acquired audio samples.

Class FFT

Description

A class used for performing FFT calculations with real-number inputs and outputs.

Syntax

```
class FFT
```

Members

Public Constructors

FFT::FFT	Create an instance of the FFT class
----------	-------------------------------------

Public Methods

FFT::setWindow	Configure the window function used in FFT calculations
FFT::calculate	Calculate FFT for an input array of values
FFT::getFrequencyBins	Get the FFT output frequency bins
FFT::getFFTSize	Get the size of FFT output for a given input size

FFT::FFT

Description

Create a FFT class object.

Syntax

```
void FFT();
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: FFT

Notes and Warnings

FFT::setWindow

Description

Configure the window function used in FFT calculations.

Syntax

```
void setWindow(FFTWindow_t window, uint16_t sampleCount);
```

Parameters

window: The window function to be used in FFT calculations. Valid values: None, Hann, Hamming.

sampleCount: Number of sample datapoints in the input.

Returns

The function returns nothing.

Example Code

Example: FFT

Notes and Warnings

The window function is used to reduce the effects of discontinuities that occur when the input signal has frequencies that do not fit an integer number of periods in the sample datapoints.

More information on FFTs and window functions can be seen at:

<https://download.ni.com/evaluation/pxi/Understanding%20FFTs%20and%20Windowing.pdf>

https://en.wikipedia.org/wiki/Window_function

FFT::Calculate

Description

Calculate FFT for an input array of values.

Syntax

```
void calculate(float* inputBuf, float* outputBuf, uint16_t sampleCount);
```

```
void calculate(int16_t* inputBuf, float* outputBuf, uint16_t sampleCount);
```

Parameters

inputBuf: pointer to an array of sampleCount size, containing input sample datapoints, in float or uint16_t format.

outputBuf: pointer to a float array of sampleCount/2 size, for containing FFT output.

sampleCount: number of sample datapoints in the input array, valid values: 16, 32, 64, 128, 256, 512, 1024, 2048.

Returns

The function returns nothing.

Example Code

Example:FFT

Notes and Warnings

Large sample counts will require a longer time for FFT calculations, but will also return a result with higher frequency resolution.

FFT::getFrequencyBins

Description

Get the FFT output frequency bins.

Syntax

```
void getFrequencyBins(uint16_t* outputBuf, uint16_t sampleCount, uint32_t sampleRate);
```

Parameters

outputBuf: pointer to a uint16_t array of sampleCount/2 size, for containing the calculated center frequency of each FFT output element.

Returns

The function returns nothing.

Example Code

Example: FFT

Notes and Warnings NA

—

FFT::getFFTSIZE

Description

Get the size of FFT output for a given input size.

Syntax

```
uint16_t getFFTSIZE(uint16_t sampleCount);
```

Parameters

sampleCount: number of input sample datapoints.

Returns

The function returns the FFT output size for the given sampleCount, which is sampleCount/2.

Example Code

NA

Notes and Warnings NA

Class PlaybackWav

Description

A class used for control and playback of .wav file format audio data.

Syntax

```
class PlaybackWav
```

Members

Public Constructors

PlaybackWav::PlaybackWav	Create an instance of the PlaybackWav class
--------------------------	---

Public Methods

PlaybackWav::openFile	Open a .wav file for playback
PlaybackWav::closeFile	Close a previously opened file
PlaybackWav::fileOpened	Check if a .wav file is already opened
PlaybackWav::getSampleRate	Get the sample rate of the .wav file
PlaybackWav::getChannelCount	Get the number of audio channels in the .wav file
PlaybackWav::getBitDepth	Get the bit depth of each sample in the .wav file
PlaybackWav::getLengthMillis	Get the playback length of the .wav file in milliseconds
PlaybackWav::getPositionMillis	Get the current playback position in milliseconds
PlaybackWav::setPositionMillis	Set the current playback position in milliseconds
PlaybackWav::millisToBytes	Convert a playback duration to equivalent number of bytes
PlaybackWav::bytesToMillis	Convert number of bytes to an equivalent playback duration
PlaybackWav::readAudioData	Read audio data from the .wav file

PlaybackWav::PlaybackWav

Description

Create a PlaybackWav class object.

Syntax

```
void PlaybackWav(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

PlaybackWav::fileOpened

Description

Check if a .wav file is already opened.

Syntax

```
bool fileOpened(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns true if a .wav file is already open, false otherwise.

Example Code

Example: RecordPlaybackWav

Notes and Warnings

NA

PlaybackWav::getSampleRate

Description

Get the sample rate of the .wav file.

Syntax

```
uint32_t getSampleRate(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns sampling rate encoded in the .wav file header.

Example Code

Example: PlaybackWavFile

Notes and Warnings

NA

PlaybackWav::getChannelCount

Description

Get the number of audio channels in the .wav file.

Syntax

```
uint16_t getChannelCount(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns channel count encoded in the .wav file header.

Example Code

Example: PlaybackWavFile

Notes and Warnings

NA

PlaybackWav::getBitDepth**Description**

Get the bit depth of each sample in the .wav file.

Syntax

```
uint16_t getBitDepth(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns bit depth encoded in the .wav file header.

Example Code

Example: PlaybackWavFile

Notes and Warnings

NA

PlaybackWav::getLengthMillis**Description**

Get the playback length of the .wav file in milliseconds.

Syntax

```
uint32_t getLengthMillis(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns the total playback length of the currently open .wav file in milliseconds.

Example Code

Example: PlaybackWavFile

Notes and Warnings

NA

PlaybackWav::getPositionMillis

Description

Get the current playback position in milliseconds.

Syntax

```
uint32_t getPositionMillis(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns the current playback position of the currently open .wav file in milliseconds.

Example Code

Example: PlaybackWavFile

Notes and Warnings

NA

PlaybackWav::setPositionMillis

Description

Set the current playback position in milliseconds.

Syntax

```
void setPositionMillis(uint32_t pos);
```

Parameters

pos: The desired playback position expressed in milliseconds.

Returns

The function returns nothing.

Example Code

Example: PlaybackWavFile

Notes and Warnings

Any changes to playback position will only take effect on the next call to PlaybackWav::readAudioData. If the desired playback position is beyond the total playback length of the file, the playback position will be set to the end of file, and no audio data will be output on subsequent data reads.

PlaybackWav::millisToBytes**Description**

Convert a playback duration to equivalent number of bytes.

Syntax

```
uint32_t millisToBytes(uint32_t ms);
```

Parameters

ms: playback duration in milliseconds.

Returns

The function returns the number of bytes that is equivalent to the input playback duration, converted using the current sample rate, number of channels and bit depth.

Example Code

NA

Notes and Warnings

NA

PlaybackWav::bytesToMillis**Description**

Convert number of bytes to an equivalent playback duration.

Syntax

```
uint32_t bytesToMillis(uint32_t bytes);
```

Parameters

bytes: playback duration in number of bytes.

Returns

The function returns the time duration in milliseconds that is equivalent to the input number of bytes, converted using the current sample rate, number of channels and bit depth.

Example Code

NA

Notes and Warnings

NA

PlaybackWav::readAudioData

Description

Read audio data from the .wav file.

Syntax

- `uint32_t readAudioData(int8_t* dst, uint32_t len);`
- `uint32_t readAudioData(int16_t* dst, uint32_t len);`

Parameters

- `dst`: pointer to array to store data read from .wav file.
- `len`: number of audio samples to read from .wav file.

Returns

The function returns number of audio samples read.

Example Code

Example: `PlaybackWavFile`

Notes and Warnings

NA

Class RecordWav**Description**

A class used for control and recording of .wav file format audio data.

Syntax

```
class RecordWav
```

Members**Public Constructors**

<code>RecordWav::RecordWav</code>	Create an instance of the <code>RecordWav</code> class
-----------------------------------	--

Public Methods

RecordWav::openFile	Open a .wav file for playback
RecordWav::closeFile	Close a previously opened file
RecordWav::fileOpened	Check if a .wav file is already opened
RecordWav::setSampleRate	Get the sample rate of the .wav file
RecordWav::setChannelCount	Set the number of audio channels in the .wav file
RecordWav::setBitDepth	Set the bit depth of each sample in the .wav file
RecordWav::getLengthMillis	Get the current record length of the .wav file in milliseconds
RecordWav::millisToBytes	Convert a playback duration to equivalent number of bytes
RecordWav::bytesToMillis	Convert number of bytes to an equivalent playback duration
RecordWav::writeAudioData	Write audio data to the .wav file

RecordWav::RecordWav**Description**

Create a RecordWav class object.

Syntax

```
void RecordWav(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: RecordWavFile

Notes and Warnings

NA

RecordWav::openFile**Description**

Open a .wav file for recording.

Syntax

```
void openFile(const char* absFilepath);
```

Parameters

absFilepath: the filepath of the .wav file to open.

Returns

The function returns nothing.

Example Code

Example: RecordWavFile

Notes and Warnings

NA

RecordWav::closeFile

Description

Close a previously opened file.

Syntax

```
void closeFile(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: RecordWavFile

Notes and Warnings

Any open .wav files should be closed after recording is complete, otherwise, loss of recorded audio data may occur.

RecordWav::fileOpened

Description

Check if a .wav file is already opened.

Syntax

```
bool fileOpened(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns true if a .wav file is already open, false otherwise.

Example Code

Example: RecordWavFile

Notes and Warnings

NA

RecordWav::setSampleRate

Description

Set the recording sample rate of the .wav file.

Syntax

```
void setSampleRate(uint32_t sampleRate);
```

Parameters

sampleRate: The desired recording sample rate.

Returns

The function returns nothing.

Example Code

Example: RecordWavFile

Notes and Warnings

NA

RecordWav::setChannelCount

Description

Set the number of recording audio channels in the .wav file.

Syntax

```
void setChannelCount(uint16_t channelCount);
```

Parameters

channelCount: number of recording audio channels.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

RecordWav::setBitDepth

Description

Set the recording bit depth of each sample in the .wav file.

Syntax

```
void setBitDepth(uint16_t bitDepth);
```

Parameters

bitDepth: number of bits per sample.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

RecordWav::getLengthMillis

Description

Get the current recorded length of the .wav file in milliseconds.

Syntax

```
uint32_t getLengthMillis(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns the current recorded length of the currently open .wav file in milliseconds.

Example Code

NA

Notes and Warnings

NA

RecordWav::millisToBytes

Description

Convert a playback duration to equivalent number of bytes.

Syntax

```
uint32_t millisToBytes(uint32_t ms);
```

Parameters

ms: playback duration in milliseconds.

Returns

The function returns the number of bytes that is equivalent to the input playback duration, converted using the current sample rate, number of channels and bit depth.

Example Code

NA

Notes and Warnings

NA

RecordWav::bytesToMillis**Description**

Convert number of bytes to an equivalent playback duration.

Syntax

```
uint32_t bytesToMillis(uint32_t bytes);
```

Parameters

bytes: playback duration in number of bytes.

Returns

The function returns the time duration in milliseconds that is equivalent to the input number of bytes, converted using the current sample rate, number of channels and bit depth.

Example Code

NA

Notes and Warnings

NA

RecordWav::writeAudioData**Description**

Write audio data to the .wav file.

Syntax

```
uint32_t writeAudioData(int8_t* src, uint32_t len); uint32_t writeAudioData(int16_t* src, uint32_t len);
```

Parameters

src: pointer to array containing data to write to .wav file. len: number of audio samples to write to .wav file.

Returns

The function returns number of audio samples written.

Example Code

Example: RecordWavFile

Notes and Warnings

NA

BLE**Class BLEAddr****BLEAddr Class****Description**

A class used for managing Bluetooth addresses.

Syntax

```
class BLEAddr
```

Members

Public Constructors	
BLEAddr::BLEAddr	Constructs a BLEAddr object
Public Methods	
BLEAddr::str	Get the Bluetooth address represented as a formatted string
BLEAddr::data	Get the Bluetooth address represented as an integer array

BLEAddr::BLEAddr**Description**

Constructs a BLEAddr object.

Syntax

```
BLEAddr::BLEAddr(void);  
BLEAddr::BLEAddr(uint8_t (&addr)[6]);  
BLEAddr::BLEAddr(const char* str);
```

Parameters

addr: An array of 6 bytes containing the desired Bluetooth address.

str: A character string representing the desired Bluetooth address.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

When expressed as a string, the Bluetooth address should be written as 6 bytes in hexadecimal format, using a colon “:” to separate the bytes is acceptable (example –00:11:22:33:EE:FF).

BLEAddr::str

Description

Get the Bluetooth address represented as a formatted string.

Syntax

```
const char* str(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns a pointer to a character string containing the hexadecimal representation of the Bluetooth address.

Example Code

Example: BLEScan

Notes and Warnings

The Bluetooth address expressed as a string will be written as 6 bytes in hexadecimal format, with a colon “:” separating the bytes (example –00:11:22:33:EE:FF).

BLEAddr::data

Description

Get the Bluetooth address represented as an integer array.

Syntax

```
uint8_t* data(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns a pointer to a 6 byte array containing the Bluetooth address.

Example Code

NA

Notes and Warnings

The Bluetooth address is stored with MSB at array index [5].

Class BLEAdvert

BLEAdvert Class

Description

A class used for managing BLE advertising settings.

Syntax

```
class BLEAdvert
```

Members

Public Constructors

No public constructor is available as this class is intended to be a singleton class. You can get a pointer to this class using `BLEDevice::configAdvert()`.

Public Methods	
<code>BLEAdvert::updateAdvertParams</code>	Update the current BLE advertisement settings to the lower Bluetooth stack
<code>BLEAdvert::startAdv</code>	Start BLE advertising
<code>BLEAdvert::stopAdv</code>	Stop BLE advertising
<code>BLEAdvert::setAdvType</code>	Set the BLE advertising type
<code>BLEAdvert::setMinInterval</code>	Set the BLE advertising minimum interval
<code>BLEAdvert::setMaxInterval</code>	Set the BLE advertising maximum interval
<code>BLEAdvert::setAdvData</code>	Set BLE advertising data
<code>BLEAdvert::setScanRspData</code>	Set BLE scan response data

BLEAdvert::updateAdvertParams

Description

Update the lower Bluetooth stack with the current advertising settings.

Syntax

```
void updateAdvertParams(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Please use the other class member functions to set the BLE advertising parameters first before using this function.

BLEAdvert::startAdv

Description

Start BLE advertising.

Syntax

```
void startAdv(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

This function is provided for flexibility in controlling and updating BLE advertising parameters. You should avoid using this function to directly start the BLE advertising process without first registering the necessary callback and handler functions. Call `BLEDevice::beginPeripheral()` to register the necessary functions and start advertising for the first time.

BLEAdvert::stopAdv

Description

Stop BLE advertising.

Syntax

```
void stopAdv(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

This function is provided for flexibility in controlling and updating BLE advertising parameters. You should avoid using this function to directly stop the BLE advertising process. Call `BLEDevice::end()` to stop advertising and free up used resources.

BLEAdvert::setAdvType

Description

Set the BLE advertising type.

Syntax

```
void setAdvType(uint8_t advType);
```

Parameters

advType: the desired advertisement type. Valid values:

- 0 = GAP_ADTYPE_ADV_IND : connectable undirected advertisement
- 1 = GAP_ADTYPE_ADV_HDC_DIRECT_IND : connectable high duty cycle directed
- 2 = GAP_ADTYPE_ADV_SCAN_IND : scannable undirected advertisement
- 3 = GAP_ADTYPE_ADV_NONCONN_IND : Non-connectable undirected advertisement
- 4 = GAP_ADTYPE_ADV_LDC_DIRECT_IND : connectable low duty cycle directed advertisement

Returns

The function returns nothing.

Example Code

Example: BLEBatteryService

Notes and Warnings

Call this function with the GAP_ADTYPE_ADV_IND argument if connection requests should be allowed, and GAP_ADTYPE_ADV_NONCONN_IND if all connection requests should be rejected.

BLEAdvert::setMinInterval

Description

Set the minimum BLE advertising interval.

Syntax

```
void setMinInterval(uint16_t minInt_ms);
```

Parameters

minInt_ms: the desired advertisement minimum interval, expressed in milliseconds. The valid values for the interval are from 20ms to 10240ms.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

BLE advertisements will repeat with an interval between the set minimum and maximum intervals. Set a shorter interval for the BLE device to be discovered rapidly and set a longer interval to conserve power.

BLEAdvert::setMaxInterval**Description**

Set the maximum BLE advertising interval.

Syntax

```
void setMaxInterval(uint16_t minInt_ms);
```

Parameters

minInt_ms: the desired advertisement maximum interval, expressed in milliseconds. The valid values for the interval are from 20ms to 10240ms.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

BLE advertisements will repeat with an interval between the set minimum and maximum intervals. Set a shorter interval for the BLE device to be discovered rapidly and set a longer interval to conserve power.

BLEAdvert::setAdvData

Description

Set BLE advertising data.

Syntax

```
void setAdvData(BLEAdvertData adData);  
void setAdvData(uint8_t* pData, uint8_t size);
```

Parameters

adData: scan response data formatted in a BLEAdvertData class object

pData: pointer to a byte array containing the required scan response data.

size: number of bytes the scan response data contains, maximum of 31 bytes.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

N/A

BLEAdvert::setScanRspData

Description

Set BLE scan response data.

Syntax

```
void setScanRspData(BLEAdvertData adData);  
void setScanRspData(uint8_t* pData, uint8_t size);
```

Parameters

adData: scan response data formatted in a BLEAdvertData class object

pData: pointer to a byte array containing the required scan response data.

size: number of bytes the scan response data contains, maximum of 31 bytes.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

N/A

Class BLEAdvertData

BLEAdvertData Class

Description

A class used for managing BLE advertising data.

Syntax

```
class BLEAdvertData
```

Members

Public Constructors	
BLEAdvertData::BLEAdvertData	Constructs a BLEAdvertData object

Public Methods	
BLEAdvertData::clear	Clear all advertising data
BLEAdvertData::addData	Add binary advertising data
BLEAdvertData::addFlags	Add flags to advertising data
BLEAdvertData::addPartialServices	Add partial services to advertising data
BLEAdvertData::addCompleteServices	Add complete services to advertising data
BLEAdvertData::addAppearance	Add device appearance to advertising data
BLEAdvertData::addShortName	Add short device name to advertising data
BLEAdvertData::addCompleteName	Add complete device name to advertising data
BLEAdvertData::parseScanInfo	Parse advertising data received from a scan
BLEAdvertData::hasFlags	Check if received data includes advertising flags
BLEAdvertData::hasUUID	Check if received data includes UUIDs
BLEAdvertData::hasName	Check if received data includes device name
BLEAdvertData::hasManufacturer	Check if received data includes manufacturer data
BLEAdvertData::getAdvType	Get advertising type of received data
BLEAdvertData::getAddrType	Get Bluetooth address type of received data
BLEAdvertData::getAddr	Get Bluetooth address of received data
BLEAdvertData::getRSSI	Get RSSI of received data
BLEAdvertData::getFlags	Get advertising flags of received data
BLEAdvertData::getServiceCount	Get number of advertised services in received data
BLEAdvertData::getServiceList	Get array of advertised services in received data
BLEAdvertData::getName	Get advertised device name in received data
BLEAdvertData::getTxPower	Get advertised transmission power in received data
BLEAdvertData::getAppearance	Get advertised device appearance in received data
BLEAdvertData::getManufacturer	Get advertised manufacturer in received data
BLEAdvertData::getManufacturerDataLength	Get length of manufacturer data in received data
BLEAdvertData::getManufacturerData	Get advertised manufacturer data in received data

BLEAdvertData::BLEAdvertData

Description

Constructs a BLEAdvertData object.

Syntax

```
BLEAdvertData::BLEAdvertData(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

This class is used for managing BLE advertising data for two primary uses. First is to assemble advertising data for broadcasting as advertising packets. Second is to process and split up the advertising data received from a scan into separate types.

BLEAdvertData::clear

Description

Clear all advertising data currently saved in class object.

Syntax

```
void clear(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEAdvertData::addData

Description

Add binary advertising data.

Syntax

```
void addData(const uint8_t* data, uint8_t size);
```

Parameters

data: pointer to array containing desired advertising data.

size: number of bytes in array.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

This function is provided for flexibility in adding BLE advertising data. Other functions should be used for adding advertising data if possible, as this function does not perform any checks on the validity of the data.

BLEAdvertData::addFlags

Description

Add flags to advertising data.

Syntax

```
uint8_t addFlags(uint8_t flags);
```

Parameters

flags: desired flags to add to advertising data. Valid values:

- GAP_ADTYPE_FLAGS_LIMITED
- GAP_ADTYPE_FLAGS_GENERAL
- GAP_ADTYPE_FLAGS_BREDR_NOT_SUPPORTED
- GAP_ADTYPE_FLAGS_SIMULTANEOUS_LE_BREDR_CONTROLLER
- GAP_ADTYPE_FLAGS_SIMULTANEOUS_LE_BREDR_HOST

Returns

Current total size of advertising data.

Example Code

Example: BLEBatteryService

Notes and Warnings

NA

BLEAdvertData::addPartialServices

Description

Add partial list of service UUIDs to advertising data.

Syntax

```
uint8_t addPartialServices(BLEUUID uuid);
```

Parameters

uuid: the desired UUID contained in BLEUUID class object.

Returns

Current total size of advertising data.

Example Code

NA

Notes and Warnings

NA

BLEAdvertData::addCompleteServices

Description

Add complete list of service UUIDs to advertising data.

Syntax

```
uint8_t addCompleteServices(BLEUUID uuid);  
uint8_t addCompleteServices(uint8_t uuidBitLength);
```

Parameters

uuid: the desired UUID contained in BLEUUID class object.

uuidBitLength: UUID bit length for which a blank entry is to be added. Valid values: 16, 32, 128.

Returns

Current total size of advertising data.

Example Code

Example: BLEBatteryService

Notes and Warnings

uuidBitLength is used when it is desired to add a blank entry to the advertisement data, used to indicate that no services with UUIDs of a certain length are available.

BLEAdvertData::addAppearance

Description

Add device appearance to advertising data.

Syntax

```
uint8_t addAppearance(uint16_t appearance);
```

Parameters

appearance: the desired device appearance.

Returns

Current total size of advertising data.

Example Code

NA

Notes and Warnings

Refer to Bluetooth specifications for a full list of device appearance values.

BLEAdvertData::addShortName**Description**

Add shortened device name to advertising data.

Syntax

```
uint8_t addShortName(const char* str);
```

Parameters

str: character string containing desired device name.

Returns

Current total size of advertising data.

Example Code

NA

Notes and Warnings

NA

BLEAdvertData::addCompleteName

Description

Add complete device name to advertising data.

Syntax

```
uint8_t addCompleteName(const char* str);
```

Parameters

str: character string containing desired device name.

Returns

Current total size of advertising data.

Example Code

Example: BLEBatteryService

Notes and Warnings

NA

BLEAdvertData::parseScanInfo

Description

Parse advertising data received from a scan.

Syntax

```
void parseScanInfo(T_LE_CB_DATA *p_data);
```

Parameters

p_data: pointer to advertising data received from a Bluetooth scan.

Returns

The function returns nothing.

Example Code

Example: BLEBatteryClient

Notes and Warnings

Advertising data fields of parsed receive data can be access using member functions starting with “has” and “get” .

BLEAdvertData::hasFlags**Description**

Check if received data includes advertising flags.

Syntax

```
bool hasFlags(void);
```

Parameters

The function requires no input parameter.

Returns

True if flags are present in received advertising data.

Example Code

NA

Notes and Warnings

NA

BLEAdvertData::hasUUID

Description

Check if received data includes service UUIDs.

Syntax

```
bool hasUUID(void);
```

Parameters

The function requires no input parameter.

Returns

True if service UUIDs are present in received advertising data.

Example Code

NA

Notes and Warnings

NA

BLEAdvertData::hasName

Description

Check if received data includes device name.

Syntax

```
bool hasName(void);
```


Parameters

The function requires no input parameter.

Returns

True if device name is present in received advertising data.

Example Code

Example: BLEBatteryClient

Notes and Warnings

NA

BLEAdvertData::hasManufacturer**Description**

Check if received data includes manufacturer specific data.

Syntax

```
bool hasManufacturer(void);
```

Parameters

The function requires no input parameter.

Returns

True if manufacturer specific data is present in received advertising data.

Example Code

NA

Notes and Warnings

NA

BLEAdvertData::getAdvType

Description

Get advertising type of received data.

Syntax

```
T_GAP_ADV_EVT_TYPE getAdvType(void);
```

Parameters

The function requires no input parameter.

Returns

Advertising type of received advertising data.

Example Code

NA

Notes and Warnings

Possible types:

- GAP_ADV_EVT_TYPE_UNDIRECTED
- GAP_ADV_EVT_TYPE_DIRECTED
- GAP_ADV_EVT_TYPE_SCANNABLE
- GAP_ADV_EVT_TYPE_NON_CONNECTABLE
- GAP_ADV_EVT_TYPE_SCAN_RSP

BLEAdvertData::getAddrType

Description

Get Bluetooth address type of received data.

Syntax

```
T_GAP_REMOTE_ADDR_TYPE getAddrType(void);
```

Parameters

The function requires no input parameter.

Returns

Bluetooth address type of received data.

Example Code

NA

Notes and Warnings

Possible types:

- GAP_REMOTE_ADDR_LE_PUBLIC
- GAP_REMOTE_ADDR_LE_RANDOM

BLEAdvertData::getRSSI**Description**

Get received signal strength indicator (RSSI) of received data.

Syntax

```
Int8_t getRSSI(void);
```

Parameters

The function requires no input parameter.

Returns

Received signal strength.

Example Code

NA

Notes and Warnings

NA

BLEAdvertData::getFlags

Description

Get advertising flags of received data.

Syntax

```
uint8_t getFlags(void);
```

Parameters

The function requires no input parameter.

Returns

Advertising flags present in received advertising data, expressed as a single byte.

Example Code

NA

Notes and Warnings

NA

BLEAdvertData::getServiceCount

Description

Get number of advertised services in received data.

Syntax

```
uint8_t getServiceCount(void);
```

Parameters

The function requires no input parameter.

Returns

Number of advertised service UUIDs in received data.

Example Code

Example: BLEBatteryClient

Notes and Warnings

NA

BLEAdvertData::getServiceList**Description**

Get list of advertised service UUIDs in received data.

Syntax

```
BLEUUID* getServiceList(void);
```

Parameters

The function requires no input parameter.

Returns

Pointer to a BLEUUID array containing all advertised service UUIDs.

Example Code

Example: BLEBatteryClient

Notes and Warnings

NA

BLEAdvertData::getName

Description

Get advertised device name in received data.

Syntax

```
String getName(void);
```

Parameters

The function requires no input parameter.

Returns

Advertised device name contained in a String class object.

Example Code

Example: BLEBatteryClient

Notes and Warnings

NA

BLEAdvertData::getTxPower

Description

Get advertised transmission power in received data.

Syntax

```
int8_t getTxPower(void);
```

Parameters

The function requires no input parameter.

Returns

Advertised transmission power.

Example Code

NA

Notes and Warnings

NA

BLEAdvertData::getAppearance**Description**

Get advertised device appearance in received data.

Syntax

```
uint16_t getAppearance(void);
```

Parameters

The function requires no input parameter.

Returns

Advertised device appearance.

Example Code

NA

Notes and Warnings

Refer to Bluetooth specifications for full list of device appearance values.

BLEAdvertData::getManufacturer

Description

Get advertised manufacturer in received data.

Syntax

```
uint16_t getManufacturer(void);
```

Parameters

The function requires no input parameter.

Returns

Advertised manufacturer.

Example Code

NA

Notes and Warnings

Refer to Bluetooth specifications for full list of manufacturer codes.

BLEAdvertData::getManufacturerDataLength

Description

Get length of manufacturer data in received data.

Syntax

```
uint8_t getManufacturerDataLength(void);
```

Parameters

The function requires no input parameter.

Returns

Number of bytes of manufacturer data present in received advertising data.

Example Code

NA

Notes and Warnings

NA

BLEAdvertData::getManufacturerData**Description**

Get manufacturer data in received data.

Syntax

```
uint8_t* getManufacturerData(void);
```

Parameters

The function requires no input parameter.

Returns

Pointer to array containing manufacturer data.

Example Code

NA

Notes and Warnings

NA

Class BLEBeacon

iBeacon Class

Description

A class used for managing iBeacon BLE advertising data.

Syntax

```
class iBeacon
```

Members

Public Constructors	
iBeacon::iBeacon	Create an instance of iBeacon advertising data
Public Methods	
iBeacon::getManufacturerId	Get current manufacturer ID value
iBeacon::getUUID	Get current UUID value
iBeacon::getMajor	Get current Major value
iBeacon::getMinor	Get current Minor value
iBeacon::getRSSI	Get current RSSI value
iBeacon::setManufacturerId	Set manufacturer ID value
iBeacon::setUUID	Set UUID value
iBeacon::setMajor	Set Major value
iBeacon::setMinor	Set Minor value
iBeacon::setRSSI	Set RSSI value
iBeacon::getAdvData	Get current advertising data
iBeacon::getScanRsp	Get current scan response data

altBeacon Class

Description

A class used for managing altBeacon BLE advertising data.

Syntax

```
class altBeacon
```

Members

Public Constructors	
altBeacon::altBeacon	Create an instance of altBeacon advertising data
Public Methods	
altBeacon::getManufacturerId	Get current manufacturer ID value
altBeacon::getUUID	Get current UUID value
altBeacon::getMajor	Get current Major value
altBeacon::getMinor	Get current Minor value
altBeacon::getRSSI	Get current RSSI value
altBeacon::getRSVD	Get current Reserved value
altBeacon::setManufacturerId	Set manufacturer ID value
altBeacon::setUUID	Set UUID value
altBeacon::setMajor	Set Major value
altBeacon::setMinor	Set Minor value
altBeacon::setRSSI	Set RSSI value
altBeacon::setRSVD	Set Reserved value
altBeacon::getAdvData	Get current advertising data
altBeacon::getScanRsp	Get current scan response data

iBeacon::iBeacon

Description

Create an iBeacon object.

Syntax

```
void iBeacon(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Include “BLEBeacon.h” to use this class function.

altBeacon::altBeacon

Description

Create an altBeacon object.

Syntax

```
void altBeacon(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Include “BLEBeacon.h” to use this class function.

iBeacon::getManufacturerId

altBeacon::getManufacturerId

Description

Get current Manufacturer ID value.

Syntax

```
uint16_t getManufacturerId(void);
```

Parameters

The function requires no input parameter.

Returns

A 16-bit unsigned integer containing the current Company ID.

Example Code

NA

Notes and Warnings

Refer to <https://www.bluetooth.com/specifications/assigned-numbers/company-identifiers/> for the full list of assigned Bluetooth company identifiers.

iBeacon::getUUID**altBeacon::getUUID****Description**

Get the current UUID value.

Syntax

```
void getUUID(uint8_t* UUID);
```

Parameters

UUID: pointer to a 16 element uint8_t array, current UUID will be copied into the array.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

UUID is a 128-bit number used to uniquely identify a beacon. It is commonly expressed as a 32-character hexadecimal string. UUIDs can be generated at <https://www.uuidgenerator.net/>.

iBeacon::getMajor

altBeacon::getMajor

Description

Get current Major value.

Syntax

```
uint16_t getMajor(void);
```

Parameters

The function requires no input parameter.

Returns

A 16-bit unsigned integer containing the current Major value.

Example Code

NA

Notes and Warnings

Major and Minor are values used for customizing beacons. These can be set to any value. Refer to <https://developer.apple.com/ibeacon/> or <https://altbeacon.org/> for more information.

iBeacon::getMinor

altBeacon::getMinor

Description

Get current Minor value.

Syntax

```
uint16_t getMinor(void);
```

Parameters

The function requires no input parameter.

Returns

A 16-bit unsigned integer containing the current Minor value.

Example Code

NA

Notes and Warnings

Major and Minor are values used for customizing beacons. These can be set to any value. Refer to <https://developer.apple.com/ibeacon/> or <https://altbeacon.org/> for more information.

iBeacon::getRSSI**altBeacon::getRSSI****Description**

Get the current RSSI value.

Syntax

```
int8_t getRSSI(void);
```

Parameters

The function requires no input parameter.

Returns

An 8-bit signed integer containing the currently set RSSI value.

Example Code

NA

Notes and Warnings

The beacon RSSI value is the received signal strength at 1 meter. This can be used to estimate the distance to the beacon. Refer to <https://developer.apple.com/ibeacon/> or <https://altbeacon.org/> for more information.

iBeacon::setManufacturerId

altBeacon::setManufacturerId

Description

Set Manufacturer ID value.

Syntax

```
void setManufacturerId(uint16_t id);
```

Parameters

id: desired Manufacturer ID

Returns

The function returns nothing.

Example Code

Example: BLEBeacon

Notes and Warnings

Refer to <https://www.bluetooth.com/specifications/assigned-numbers/company-identifiers/> for the full list of assigned Bluetooth company identifiers.

iBeacon::setUUID**altBeacon::setUUID****Description**

Set UUID value.

Syntax

```
void setUUID(uint8_t* UUID);  
void setUUID(const char* UUID);
```

Parameters

uint8_t* UUID: pointer to a 16 element uint8_t array containing the desired UUID

const char* UUID: desired UUID expressed as a character string

Returns

The function returns nothing.

Example Code

Example: BLEBeacon

Notes and Warnings

UUID is a 128-bit number used to uniquely identify a beacon. It is commonly expressed as a 32-character hexadecimal string. UUIDs can be generated at <https://www.uuidgenerator.net/>.

iBeacon::setMajor**altBeacon::setMajor****Description**

Set Major value.

Syntax

```
void setMajor(uint16_t major);
```

Parameters

major: desired Major value

Returns

The function returns nothing.

Example Code

Example: BLEBeacon

Notes and Warnings

Major and Minor are values used for customizing beacons. These can be set to any value. Refer to <https://developer.apple.com/ibeacon/> or <https://altbeacon.org/> for more information.

iBeacon::setMinor

altBeacon::setMinor

Description

Set Minor value.

Syntax

```
void setMinor(uint16_t minor);
```

Parameters

minor: desired Minor value

Returns

The function returns nothing.

Example Code

Example: BLEBeacon

Notes and Warnings

Major and Minor are values used for customizing beacons. These can be set to any value. Refer to <https://developer.apple.com/ibeacon/> or <https://altbeacon.org/> for more information.

iBeacon::setRSSI

altBeacon::setRSSI

Description

Set RSSI value.

Syntax

```
void setRSSI(int8_t RSSI);
```

Parameters

RSSI: desired RSSI value

Returns

The function returns nothing.

Example Code

Example: BLEBeacon

Notes and Warnings

The beacon RSSI value is the received signal strength at 1 meter. This can be used to estimate the distance to the beacon. Refer to <https://developer.apple.com/ibeacon/> or <https://altbeacon.org/> for more information.

iBeacon::getAdvData

altBeacon::getAdvData

Description

Get current beacon advertising data.

Syntax

```
uint8_t* getAdvData(void);
```

Parameters

The function requires no input parameter.

Returns

A uint8_t pointer to the structure containing beacon advertising data.

Example Code

NA

Notes and Warnings

Avoid changing the beacon data through the returned pointer, use the member functions instead.

iBeacon::getScanRsp

altBeacon::getScanRsp

Description

Get current beacon advertising scan response data.

Syntax

```
uint8_t* getScanRsp(void);
```

Parameters

The function requires no input parameter.

Returns

A uint8_t pointer to the structure containing beacon advertising scan response data.

Example Code

NA

Notes and Warnings

Avoid changing the beacon data through the returned pointer, use the member functions instead.

altBeacon::getRSVD

Description

Get current Reserved value.

Syntax

```
uint8_t getRSVD(void);
```

Parameters

The function requires no input parameter.

Returns

An 8-bit unsigned integer containing the current Reserved value.

Example Code

NA

Notes and Warnings

Reserved for use by the manufacturer to implement special features. The interpretation of this value is to be defined by the manufacturer and is to be evaluated based on the MFG ID value. Refer to <https://altbeacon.org/> for more information.

altBeacon::setRSVD

Description

Set Reserved value.

Syntax

```
void setRSVD(uint8_t rsvd);
```

Parameters

rsvd: desired Reserved value

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Reserved for use by the manufacturer to implement special features. The interpretation of this value is to be defined by the manufacturer and is to be evaluated based on the MFG ID value. Refer to <https://altbeacon.org/> for more information.

Class BLECharacteristic

BLECharacteristic Class

Description

A class used for creating and managing BLE GATT characteristics.

Syntax

```
class BLECharacteristic
```

Members

Public Constructors	
BLEC haracteristic::BLECharacteristic	Constructs a BLECharacteristic object
Public Methods	
BLECharacteristic::setUUID	Set the characteristic UUID
BLECharacteristic::getUUID	Get the characteristic UUID
BLECharacteristic::setBufferLen	Set the size of the internal data buffer
BLECharacteristic::getBufferLen	Get the current size of the internal data buffer
BLECharacteristic::setReadProperty	Get the current size of the internal data bufferSet the characteristic r
BLECharacteristic::setWriteProperty	Set the characteristic write property
BLEC haracteristic::setNotifyProperty	Set the characteristic notify property
BLECha racteristic::setIndicateProperty	Set the characteristic indicate property
BLECharacteristic::setProperties	Set the characteristic properties
BLECharacteristic::getProperties	Get the characteristic properties
BLECharacteristic::readString	Read the characteristic data buffer as a String object
BLECharacteristic::readData8	Read the characteristic data buffer as an unsigned 8-bit integer
BLECharacteristic::readData16	Read the characteristic data buffer as an unsigned 16-bit integer
BLECharacteristic::readData32	Read the characteristic data buffer as an unsigned 32-bit integer
BLECharacteristic::writeString	Write data to the characteristic data buffer as a String object or char
BLECharacteristic::writeData8	Write data to the characteristic data buffer as an unsigned 8-bit integ
BLECharacteristic::writeData16	Write data to the characteristic data buffer as an unsigned 16-bit inte
BLECharacteristic::writeData32	Write data to the characteristic data buffer as an unsigned 16-bit inte
BLECharacteristic::setData	Write data to the characteristic data buffer
BLECharacteristic::getData	Read data from the characteristic data buffer
BLECharacteristic::getDataBuff	Get a pointer to the characteristic data buffer
BLECharacteristic::getDataLen	Get the number of bytes of data in the characteristic data buffer
BLECharacteristic::notify	Send a notification to a connected device
BLECharacteristic::indicate	Send an indication to a connected device
BLEC haracteristic::setUserDescriptor	Add a user description descriptor to characteristic
BLECha racteristic::setFormatDescriptor	Add a data format descriptor to characteristic
BLECharacteristic::Add a data format descriptor to characteristic	Set a user function as a read callback
BLECharacteristic::setWriteCallback	Set a user function as a write callback
BLECharacteristic::setCCCDCallback	Set a user function as a CCCD write callback

BLECharacteristic::BLECharacteristic**Description**

Constructs a BLECharacteristic object.

Syntax

```
BLECharacteristic::BLECharacteristic(BLEUUID uuid);  
BLECharacteristic::BLECharacteristic(const char* uuid);
```

Parameters

uuid: characteristic UUID, expressed as a BLEUUID class object or a character array

Returns

The function returns nothing.

Example Code

Example: BLEUartService

Notes and Warnings

NA

BLECharacteristic::setUUID

Description

Set the characteristic UUID.

Syntax

```
void setUUID(BLEUUID uuid);
```

Parameters

uuid: the new characteristic UUID, expressed with a BLEUUID class object

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLECharacteristic::getUUID**Description**

Get the characteristic UUID.

Syntax

```
BLEUUID getUUID();
```

Parameters

The function requires no input parameter.

Returns

The function returns the characteristic UUID in a BLEUUID class object.

Example Code

NA

Notes and Warnings

NA

BLECharacteristic::setBufferLen**Description**

Set the size of the internal data buffer of the characteristic.

Syntax

```
void setBufferLen(uint16_t max_len);
```

Parameters

max_len: number of bytes to resize the internal buffer to

Returns

The function returns nothing.

Example Code

Example: BLEUartService

Notes and Warnings

Characteristic data buffer has a default size of 20 bytes and can be increased up to 230 bytes.

BLECharacteristic::getBufferLen

Description

Get the size of the characteristic internal buffer.

Syntax

```
uint16_t getBufferLen();
```

Parameters

The function requires no input parameter.

Returns

The function returns the currently set internal buffer size.

Example Code

NA

Notes and Warnings

NA

BLECharacteristic::setReadProperty

Description

Set the characteristic read property.

Syntax

```
void setReadProperty(bool value);
```

Parameters

value: TRUE to allow connected devices to read characteristic data

Returns

The function returns nothing.

Example Code

Example: BLEBatteryService

Notes and Warnings

NA

BLECharacteristic::setWriteProperty**Description**

Set the characteristic write property.

Syntax

```
void setWriteProperty(bool value);
```

Parameters

value: TRUE to allow connected devices to write characteristic data

Returns

The function returns nothing.

Example Code

Example: BLEUartService

Notes and Warnings

NA

BLECharacteristic::setNotifyProperty

Description

Set the characteristic notify property.

Syntax

```
void setNotifyProperty(bool value);
```

Parameters

value: TRUE to allow connected devices to enable receiving characteristic data notifications.

Returns

The function returns nothing.

Example Code

Example: BLEUartService

Notes and Warnings

Enabling this property will add a CCCD descriptor to the characteristic.

BLECharacteristic::setIndicateProperty

Description

Set the characteristic indicate property.

Syntax

```
void setIndicateProperty(bool value);
```

Parameters

value: TRUE to allow connected devices to enable receiving characteristic data indications.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Enabling this property will add a CCCD descriptor to the characteristic.

BLECharacteristic::setProperties**Description**

Set the characteristic properties.

Syntax

```
void setProperties(uint8_t value);
```

Parameters

value: desired characteristic properties

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLECharacteristic::getProperties

Description

Get the currently set characteristic properties.

Syntax

```
uint8_t getProperties();
```

Parameters

The function requires no input parameter.

Returns

The function returns the currently set characteristic properties expressed as an unsigned 8-bit integer.

Example Code

NA

Notes and Warnings

NA

BLECharacteristic::readString

Description

Read the data in the characteristic internal buffer, expressed as a String class object.

Syntax

```
String readString();
```

Parameters

The function requires no input parameter.

Returns

The function returns the data in the characteristic internal buffer expressed as a String class object.

Example Code

Example: BLEUartService

Notes and Warnings

Non-ASCII data may result in unexpected characters in the string.

BLECharacteristic::readData8**Description**

Read the data in the characteristic internal buffer, expressed as an unsigned 8-bit integer.

Syntax

```
uint8_t readData8();
```

Parameters

The function requires no input parameter.

Returns

The function returns the data in the characteristic internal buffer expressed as a uint8_t value.

Example Code

NA

Notes and Warnings

NA

BLECharacteristic::readData16**Description**

Read the data in the characteristic internal buffer, expressed as an unsigned 16-bit integer.

Syntax

```
uint16_t readData16();
```

Parameters

The function requires no input parameter.

Returns

The function returns the data in the characteristic internal buffer expressed as a uint16_t value.

Example Code

NA

Notes and Warnings

NA

BLECharacteristic::readData32

Description

Read the data in the characteristic internal buffer, expressed as an unsigned 32-bit integer.

Syntax

```
uint32_t readData32();
```

Parameters

The function requires no input parameter.

Returns

The function returns the data in the characteristic internal buffer expressed as a uint32_t value.

Example Code

NA

Notes and Warnings

NA

BLECharacteristic::readData32

Description

Write data to the characteristic data buffer as a String object or character array.

Syntax

```
bool writeString(String str);  
bool writeString(const char* str);
```

Parameters

str: the data to write to the characteristic buffer, expressed as a String class object or a char array.

Returns

The function returns TRUE if write data is successful.

Example Code

Example: BLEUartService

Notes and Warnings

NA

BLECharacteristic::writeData8

Description

Write data to the characteristic data buffer as an unsigned 8-bit integer.

Syntax

```
bool writeData8(uint8_t num);
```

Parameters

num: the data to write to the characteristic buffer expressed as an unsigned 8-bit integer.

Returns

The function returns TRUE if write data is successful.

Example Code

Example: BLEBatteryService

Notes and Warnings

NA

BLECharacteristic::writeData16

Description

Write data to the characteristic data buffer as an unsigned 16-bit integer.

Syntax

```
bool writeData16(uint16_t num);
```

Parameters

num: the data to write to the characteristic buffer expressed as an unsigned 16-bit integer.

Returns

The function returns TRUE if write data is successful.

Example Code

NA

Notes and Warnings

NA

BLECharacteristic::writeData32

Description

Write data to the characteristic data buffer as a 32-bit integer.

Syntax

```
bool writeData32(uint32_t num);
```

```
bool writeData32(int num);
```

Parameters

num: the data to write to the characteristic buffer expressed as a 32-bit integer.

Returns

The function returns TRUE if write data is successful.

Example Code

NA

Notes and Warnings

NA

BLECharacteristic::setData

Description

Write data to the characteristic data buffer.

Syntax

```
bool setData(uint8_t* data, uint16_t datalen);
```

Parameters

data: pointer to byte array containing desired data

datalen: number of bytes of data to write

Returns

The function returns TRUE if write data is successful.

Example Code

NA

Notes and Warnings

NA

BLECharacteristic::getData

Description

Read data from the characteristic data buffer.

Syntax

```
uint16_t getData(uint8_t* data, uint16_t datalen);
```

Parameters

data: pointer to byte array to save data read from buffer

datalen: number of bytes of data to read

Returns

The function returns the number of bytes read.

Example Code

NA

Notes and Warnings

If the data buffer contains less data than requested, it will only read the available number of bytes of data.

BLECharacteristic::getDataBuff**Description**

Get a pointer to the characteristic data buffer.

Syntax

```
uint8_t* getDataBuff();
```

Parameters

The function requires no input parameter.

Returns

The function returns a pointer to the uint8_t array used as the characteristic internal buffer.

Example Code

NA

Notes and Warnings

NA

BLECharacteristic::getDataLen**Description**

Get the number of bytes of data in the characteristic data buffer.

Syntax

```
uint16_t getDataLen
```

Parameters

The function requires no input parameter.

Returns

The function returns the number of bytes of data in the internal buffer.

Example Code

NA

Notes and Warnings

NA

BLECharacteristic::notify

Description

Send a notification to a connected device.

Syntax

```
void notify(uint8_t conn_id);
```

Parameters

conn_id: the connection ID for the device to send a notification to.

Returns

The function returns nothing.

Example Code

Example: BLEUartService

Notes and Warnings

NA

BLECharacteristic::indicate

Description

Send an indication to a connected device.

Syntax

```
void indicate(uint8_t conn_id);
```

Parameters

conn_id: the connection ID for the device to send an indication to.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLECharacteristic::setUserDescriptor**Description**

Add a user description descriptor attribute (UUID 0x2901) to the characteristic.

Syntax

```
void setUserDescriptor(const char* description);
```

Parameters

description: the desired user description string expressed in a char array.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLECharacteristic::setFormatDescriptor

Description

Add a data format descriptor attribute (UUID 0x2904) to the characteristic.

Syntax

```
void setFormatDescriptor(uint8_t format, uint8_t exponent, uint16_t unit, uint16_t description);
```

Parameters

format: refer to <https://www.bluetooth.com/specifications/assigned-numbers/format-types/> for the valid values and associated format types.

exponent: base-10 exponent to be applied to characteristic data value.

unit: refer to <https://btprodspecificationrefs.blob.core.windows.net/assigned-values/16-bit%20UUID%20Numbers%20Document.pdf> for the valid values and associated units.

descriptor: refer to <https://www.bluetooth.com/specifications/assigned-numbers/gatt-namespace-descriptors/> for the valid values and associated descriptors.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLECharacteristic::setReadCallback

Description

Set a user function to be called when the characteristic data is read by a connected device.

Syntax

```
void setReadCallback(void (*fCallback) (BLECharacteristic* chr, uint8_t conn_id));
```

Parameters

fCallback: A user callback function that returns void and takes two arguments.

chr: pointer to BLECharacteristic object containing data read

conn_id: connection ID of connected device that read characteristic data

Returns

The function returns nothing.

Example Code

Example: BLEBatteryService

Notes and Warnings

NA

BLECharacteristic::setWriteCallback**Description**

Set a user function to be called when the characteristic data is written by a connected device.

Syntax

```
void setWriteCallback(void (*fCallback) (BLECharacteristic* chr, uint8_t conn_id));
```

Parameters

fCallback: A user callback function that returns void and takes two arguments.

chr: pointer to BLECharacteristic object containing written data.

conn_id: connection ID of connected device that wrote characteristic data.

Returns

The function returns nothing.

Example Code

Example: BLEUartService

Notes and Warnings

NA

BLECharacteristic::setCCCDCallback

Description

Set a user function to be called when a connected device modifies the characteristic CCCD to enable or disable notifications or indications.

Syntax

```
void setCCCDCallback(void (*fCallback) (BLECharacteristic* chr, uint8_t conn_id, uint16_t ccc_bits));
```

Parameters

fCallback: A user callback function that returns void and takes two arguments.

chr: pointer to BLECharacteristic object containing written data.

conn_id: connection ID of connected device that wrote characteristic data.

ccc_bits: the new CCCD data bits after modification by the connected device

Returns

The function returns nothing.

Example Code

Example: BLEUartService

Notes and Warnings

NA

Class BLEClient

BLEClient Class

Description

A class used for discovering and accessing BLE GATT services on a connected remote device.

Syntax

```
class BLEClient
```

Members

Public Constructors

No public constructor is available for this class. You can get a pointer to an instance of this class using BLEDevice::addClient().

Public Methods	
BLEClient::connected	Check if the corresponding remote device for the client is connected
BLEClient::discoverServices	Start service discovery process for connected device
BLEClient::discoveryDone	Determine if service discovery process has been completed
BLEClient::printServices	Format and print discovered services to serial port
BLEClient::getService	Get a specific service on the remote device
BLEClient::getConnId	
BLEClient::getClientId	Get corresponding client ID
BLEClient::setDisconnectCallback	Set a user function to be called when the remote device is disconnected

BLEClient::connected

Description

Check if the remote device associated with the client is still connected.

Syntax

```
bool connected();
```

Parameters

The function requires no input parameter.

Returns

The function returns TRUE if the remote device is connected.

Example Code

NA

Notes and Warnings

NA

BLEClient::discoverServices

Description

Start the service discovery process for the connected remote device.

Syntax

```
void discoverServices();
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: BLEUartClient

Notes and Warnings

NA

BLEClient::discoveryDone**Description**

Check if the service discovery process has been completed.

Syntax

```
bool discoveryDone();
```

Parameters

The function requires no input parameter.

Returns

The function returns TRUE if the service discovery process has been completed successfully, FALSE if the service discovery process failed, is still in progress, or has yet to start.

Example Code

Example: BLEUartClient

Notes and Warnings

NA

BLEClient::printServices**Description**

Print out a formatted list of discovered services to the serial port.

Syntax

```
void printServices();
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEClient::getService

Description

Get a service with the specified UUID on the remote device.

Syntax

```
BLERemoteService* getService(const char* uuid);
```

```
BLERemoteService* getService(BLEUUID uuid);
```

Parameters

uuid: the desired service UUID, expressed as a character array or a BLEUUID object.

Returns

The function returns the found service as a BLERemoteService object pointer, otherwise nullptr is returned if a service with the UUID is not found.

Example Code

Example: BLEUartClient

Notes and Warnings

NA

BLEClient::getConnId**Description**

Get the connection ID associated with the remote device.

Syntax

```
uint8_t getConnId;
```

Parameters

The function requires no input parameter.

Returns

The function returns the connection ID for the connected remote device.

Example Code

NA

Notes and Warnings

NA

BLEClient::getClientId**Description**

Get the client ID for the BLEClient object.

Syntax

```
T_CLIENT_ID getClientId();;
```

Parameters

The function requires no input parameter.

Returns

The function returns the BLEClient object's client ID.

Example Code

NA

Notes and Warnings

The client ID is used when calling internal GATT client API.

BLEClient::setDisconnectCallback

Description

Set a user function as a callback function when the remote device is disconnected.

Syntax

```
void setDisconnectCallback(void (*fCallback) (BLEClient* client));
```

Parameters

fCallback: A user callback function that returns void and takes one argument.

client: A pointer to the BLEClient object corresponding to the disconnected remote device

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

The user callback function will be called after the remote device has disconnected, before the characteristics, services and client associated with the remote device are deleted.

Class BLEConnect

BLEConnect Class

Description

A class used for managing BLE connection settings.

Syntax

```
class BLEConnect
```

Members

Public Constructors

No public constructor is available as this class is intended to be a singleton class. You can get a pointer to this class using `BLEDevice::configConnection`.

Public Methods	
<code>BLEConnect::connect</code>	Connect to a target BLE device
<code>BLEConnect::disconnect</code>	Disconnect from a target BLE device
<code>BLEConnect::setScanInterval</code>	Set the BLE scanning interval when connecting
<code>BLEConnect::setScanWindow</code>	Set the BLE scanning window when connecting
<code>BLEConnect::setConnInterval</code>	Set the BLE connection interval duration
<code>BLEConnect::setConnLatency</code>	Set the BLE connection slave latency
<code>BLEConnect::setConnTimeout</code>	Set the BLE connection timeout value
<code>BLEConnect::updateConnParams</code>	Send new BLE connection parameters to a connected device
<code>BLEConnect::getConnInfo</code>	Get connection information
<code>BLEConnect::getConnAddr</code>	Get the Bluetooth address for a certain connection
<code>BLEConnect::getConnId</code>	Get the connection ID for a certain device

BLEConnect::connect

Description

Connect to a target BLE device.

Syntax

```
bool connect(char* btAddr, T_GAP_REMOTE_ADDR_TYPE destAddrType, uint16_t scanTimeout);
```

```
bool connect(uint8_t (&btAddr)[6], T_GAP_REMOTE_ADDR_TYPE destAddrType, uint16_t scanTimeout);  
bool connect(BLEAdvertData targetDevice, uint16_t scanTimeout);  
bool connect(BLEAddr destAddr, T_GAP_REMOTE_ADDR_TYPE destAddrType, uint16_t scanTimeout);
```

Parameters

char* btAddr: target device Bluetooth address expressed as a character string.

uint8_t (&btAddr): target device Bluetooth address contained in a 6 byte array.

destAddr: target device Bluetooth address contained in BLEAddr class object.

targetDevice: advertising data packet scanned from target device.

destAddrType: Bluetooth address type of target device. Valid values:

–GAP_REMOTE_ADDR_LE_PUBLIC

–GAP_REMOTE_ADDR_LE_RANDOM

scan timeout: duration in milliseconds for which to look for target device before giving up.

Returns

True if connection successful, false if connection failed.

Example Code

Example: BLEBatteryClient

Notes and Warnings

NA

BLEConnect::disconnect

Description

Disconnect from a target BLE device.

Syntax

```
bool disconnect(uint8_t connId);
```

Parameters

connId: connection ID for target device.

Returns

True if operation successful, false if otherwise.

Example Code

NA

Notes and Warnings

NA

BLEConnect::setScanInterval**Description**

Set the BLE scan interval when searching for a target device to connect to.

Syntax

```
void setScanInterval(uint16_t scanInt_ms);
```

Parameters

scanInt_ms: scan interval in milliseconds. Value range of 3 to 10240.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEConnect::setScanWindow

Description

Set the BLE scan window when searching for a target device to connect to.

Syntax

```
void setScanWindow(uint16_t scanWindow_ms);
```

Parameters

scanWindow_ms: scan window in milliseconds. Value range of 3 to 10240.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEConnect::setConnInterval

Description

Set the BLE connection interval value.

Syntax

```
void setConnInterval(uint16_t min_ms, uint16_t max_ms);
```

Parameters

min_ms: minimum acceptable connection interval in milliseconds. Value range of 8 to 4000.

max_ms: maximum acceptable connection interval in milliseconds. Value range of 8 to 4000.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

The BLE connection interval defines the period between successive connection events between a connected central and peripheral device. Even if there is no data to exchange, a connection event is required to maintain the connection. max_ms should be larger than or equal to min_ms.

BLEConnect::setConnLatency**Description**

Set the BLE connection slave latency value.

Syntax

```
void setConnLatency(uint16_t latency);
```

Parameters

latency: Connection slave latency value. Value range of 0 to 499.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

The BLE connection slave latency defines the number of successive connection events a connected peripheral device can ignore without being considered as disconnected by the central device.

BLEConnect::setConnTimeout

Description

Set the BLE connection timeout value.

Syntax

```
void setConnTimeout(uint16_t timeout_ms);
```

Parameters

timeout_ms: connection timeout in milliseconds. Value range of 100 to 32000.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

The BLE connection timeout defines the duration after a failed connection events before a peripheral or central device considers the connection broken.

BLEConnect::updateConnParams

Description

Update a connected device with new connection parameters.

Syntax

```
void updateConnParams(uint8_t conn_id);
```

Parameters

conn_id: connection ID of target device to update connection parameters.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Update a connected device with previously set connection interval, slave latency and timeout values. The connected device may reject the new values if it is unable to conform to them.

BLEConnect::getConnInfo**Description**

Get connection information.

Syntax

```
bool getConnInfo(uint8_t connId, T_GAP_CONN_INFO *pConnInfo);
```

Parameters

connId: connection ID to get connection information from.

pConnInfo: pointer to T_GAP_CONN_INFO structure to store obtained connection information.

Returns

True if operation success, false if operation failed.

Example Code

NA

Notes and Warnings

NA

BLEConnect::getConnAddr

Description

Get the Bluetooth address for a certain connection.

Syntax

```
bool getConnAddr(uint8_t connId, uint8_t* addr, uint8_t* addrType);
```

Parameters

connId: connection ID to get address information for

addr: pointer to 6 byte array to store retrieved Bluetooth address

addrType: pointer to uint8_t variable to store retrieved Bluetooth address type

Returns

True if operation success, false if operation failed.

Example Code

NA

Notes and Warnings

NA

BLEConnect::getConnId

Description

Get the connection ID for a certain device.

Syntax

```
int8_t getConnId(char* btAddr, uint8_t addrType);
```

```
int8_t getConnId(uint8_t* btAddr, uint8_t addrType);
```

```
int8_t getConnId(BLEAdvertData targetDevice);
```


Parameters

char* btAddr: target device Bluetooth address expressed as a character string.

uint8_t* btAddr: pointer to a 6 byte array containing target device Bluetooth address.

targetDevice: advertising data packet scanned from target device.

addrType: Bluetooth address type of target device. Valid values:

–GAP_REMOTE_ADDR_LE_PUBLIC

–GAP_REMOTE_ADDR_LE_RANDOM

Returns

The function returns the requested connection ID. Returns -1 if failed to obtain connection ID.

Example Code

Example: BLEBatteryClient

Notes and Warnings

NA

Class BLEDevice**BLEDevice Class****Description**

A class used for general control and management of BLE functions.

Syntax

```
class BLEDevice
```

Members**Public Constructors**

The public constructor should not be used as this class is intended to be a singleton class. Access member functions using the object instance named BLE.

Public Methods	
BLEDevice::init	Allocate resources required for BLE functionality
BLEDevice::deinit	Free resources used by BLE functionality
BLEDevice::connected	Check if a BLE device is connected
BLEDevice::setDeviceName	Set BLE GAP device name
BLEDevice::setDeviceAppearance	Set BLE GAP device appearance
BLEDevice::configAdvert	Configure BLE advertising parameters
BLEDevice::configScan	Configure BLE scan parameters
BLEDevice::setScanCallback	Set callback function for BLE scans
BLEDevice::beginCentral	Start BLE stack in central mode
BLEDevice::beginPeripheral	Start BLE stack in peripheral mode
BLEDevice::end	Stop BLE stack
BLEDevice::configServer	Configure BLE stack for services
BLEDevice::addService	Add a service to the BLE stack
BLEDevice::configClient	Configure BLE stack for clients
BLEDevice::addClient	Add a client to the BLE stack
BLEDevice::getLocalAddr	Get local device Bluetooth address

BLEDevice::init

Description

Allocate resources required for BLE functionality.

Syntax

```
void init(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: BLEBatteryService

Notes and Warnings

Call this member function first before using any other member functions in the BLEDevice class.

BLEDevice::deinit**Description**

Free up resources used for BLE functionality.

Syntax

```
void deinit(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Call this member function last after all other BLE operations are stopped.

BLEDevice::connected**Description**

Check if a BLE device is connected.

Syntax

```
bool connected(void);
```

Parameters

The function requires no input parameter.

Returns

TRUE if another BLE device is connected, FALSE if no BLE device is connected.

Example Code

NA

Notes and Warnings

NA

BLEDevice::setDeviceName

Description

Set the BLE GAP device name.

Syntax

```
void setDeviceName(String devName);
```

Parameters

devName: desired device name contained in an Arduino String object

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

The GAP device name has a maximum length of 39 characters. Other devices can see this name after a BLE connection is established. This name is separate and different from the device name sent in a BLE advertisement, the names should be the same but are not required.

BLEDevice::setDeviceAppearance

Description

Set the BLE GAP device appearance.

Syntax

```
void setDeviceAppearance(uint16_t devAppearance);
```

Parameters

devAppearance: desired device appearance expressed as a 16-bit unsigned integer.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Refer to Bluetooth SIG assigned device appearances at <https://www.bluetooth.com/specifications/gatt/characteristics/>.

BLEDevice::configAdvert

Description

Configure BLE advertising parameters.

Syntax

```
BLEAdvert* configAdvert(void);
```

Parameters

The function requires no input parameter.

Returns

A pointer to a BLEAdvert class instance for configuring BLE advertising parameters.

Example Code

Example: BLEBatteryService

Notes and Warnings

Use this member function instead of creating a BLEAdvert class instance manually.

BLEDevice::configScan

Description

Configure BLE scanning parameters.

Syntax

```
BLEScan* configScan(void);
```

Parameters

The function requires no input parameter.

Returns

A pointer to a BLEScan class instance for configuring BLE scanning parameters.

Example Code

Example: BLEScan

```

#include "BLEDevice.h"

#include "BLEScan.h"

int dataCount = 0;

void scanFunction(T_LE_CB_DATA* p_data) {
    printf("\nScan Data %drn" , ++dataCount);
    BLE.configScan()->printScanInfo(p_data);
}

void setup() {
    BLE.init();

    BLE.configScan()->setScanMode(GAP_SCAN_MODE_ACTIVE);
    BLE.configScan()->setScanInterval(500); // Start a scan every 500ms
    BLE.configScan()->setScanWindow(250); // Each scan lasts for 250ms
    // Provide a callback function to process scan data.
    // If no function is provided, default BLEScan::printScanInfo is used
    BLE.setScanCallback(scanFunction);
    BLE.beginCentral(0);
    BLE.configScan()->startScan(5000); // Repeat scans for 5 seconds, then stop
}

void loop() {
}

```

Notes and Warnings

Use this member function instead of creating a BLEScan class instance manually.

BLEDevice::setScanCallback

Description

Set a callback function for processing BLE scan results.

Syntax

```
void setScanCallback(void (scanCB)(T_LE_CB_DATA));
```

Parameters

scanCB: a function that returns nothing and takes in a scan data pointer of type T_LE_CB_DATA*

Returns

The function returns nothing.

Example Code

Example: BLEScan

Notes and Warnings

Use this member function to set a callback function that will be called for each BLE device scan result found.

BLEDevice::beginCentral

Description

Start the BLE stack in central mode.

Syntax

```
void beginCentral(uint8_t connCount);
```

Parameters

connCount: maximum number of allowed connected devices. If no argument is provided, default to maximum allowed connected devices for specific board.

Returns

The function returns nothing.

Example Code

Example: BLEScan

The function returns nothing.

Notes and Warnings

Use this member function to start the device in BLE central mode, after other BLE parameters are set correctly.

BLEDevice::beginPeripheral

Description

Start the BLE stack in peripheral mode.

Syntax

```
void beginPeripheral(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: BLEBatteryService

Notes and Warnings

Use this member function to start the device in BLE peripheral mode, after other BLE parameters are set correctly.

BLEDevice::end

Description

Stop the BLE stack.

Syntax

```
void end(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Use this member function to stop the device operating in either BLE peripheral mode or BLE central mode.

BLEDevice::configServer

Description

Configure the BLE stack for services.

Syntax

```
void configServer(uint8_t maxServiceCount);
```

Parameters

maxServiceCount: Maximum number of services that will run on the device

Returns

The function returns nothing.

Example Code

Example: BLEBatteryService

Notes and Warnings

Use this member function before adding any service to the BLE stack.

BLEDevice::addService

Description

Add a new service to the BLE stack.

Syntax

```
void addService(BLEService& newService);
```

Parameters

newService: the service to be added, defined using a BLEService class object.

Returns

The function returns nothing.

Example Code

Example: BLEBatteryService

Notes and Warnings

N/A

BLEDevice::configClient

Description

Configure the BLE stack for clients.

Syntax

```
void configClient();
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: BLEBatteryClient

Notes and Warnings

Use this member function before adding any client to the BLE stack.

BLEDevice::addClient

Description

Add a new client to the BLE stack.

Syntax

```
BLEClient* addClient(uint8_t connId);
```

Parameters

connId: the connection ID of the connected device to create a client for.

Returns

The function returns a pointer to a BLEClient class object, corresponding to the device with the specified connection ID, which can be used to access the services and characteristics on the connected device.

Example Code

Example: BLEBatteryClient

Notes and Warnings

Only one client should be added per connected device.

The BLEClient object and any service, characteristic, descriptor associated with the connected device will be deleted when the device is disconnected.

BLEDevice::getLocalAddr

Description

Get local device Bluetooth address.

Syntax

```
void getLocalAddr(uint8_t (&addr)[GAP_BD_ADDR_LEN]);
```

Parameters

addr: 6 byte array to store local device Bluetooth address.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Local device address is only available after starting in central or peripheral mode. This function will return all zeros for the address if central or peripheral mode is not in operation.

Class BLEHIDDevice

BLEHIDDevice Class

Description

A class used for creating and managing HID over GATT Profile (HOGP) services.

Syntax

```
class BLEHIDDevice
```

Members

Public Constructors

The public constructor should not be used as this class is intended to be a singleton class. Access member functions using the object instance named BLEHIDDev.

Public Methods	
BLEHIDDevice::init	Initialize the HID Device Profile by creating the required services
BLEHIDDevice::setNumOutputReport	Configure the number of HID output reports
BLEHIDDevice::setNumInputReport	Configure the number of HID input reports
BLEHIDDevice::setReportMap	Configure the HID report map
BLEHIDDevice::inputReport	Send a HID input report
BLEHIDDevice::setOutputReportCallback	Set a user callback function for receiving HID output reports
BLEHIDDevice::bootKeyboardReport	Send a HID boot keyboard input report
BLEHIDDevice::setHidInfo	Set HID info of the HID service
BLEHIDDevice::setBattLevel	Set battery level info of the Battery service
BLEHIDDevice::setPNPInfo	Set PNP information of the Device Information service
BLEHIDDevice::setManufacturerString	Set manufacturer information of the Device Information service
BLEHIDDevice::setModelString	Set model information of the Device Information service
BLEHIDDevice::hidService	Get reference to HID service
BLEHIDDevice::devInfoService	Get reference to Device Information service
BLEHIDDevice::battService	Get reference to Battery service

BLEHIDDevice::init

Description

Initialize the HID Device profile by creating the required services.

Syntax

```
void init(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: BLEHIDGamepad

Notes and Warnings

The HID Device object should be initialized before any HID reports can be sent.

BLEHIDDevice::setNumOutputReport**Description**

Configure the number of HID output reports.

Syntax

```
void setNumOutputReport (uint8_t numOutputReports);
```

Parameters

numOutputReports: number of output reports

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

The number of output reports should be configured before BLEHIDDevice init() function is called.

BLEHIDDevice::setNumInputReport**Description**

Configure the number of HID input reports.

Syntax

```
void setNumInputReport (uint8_t numInputReports);
```

Parameters

numInputReports: number of input reports

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

The number of input reports should be configured before BLEHIDDevice init() function is called.

BLEHIDDevice::setReportMap

Description

Configure the HID report map characteristic with a HID report descriptor.

Syntax

```
void setReportMap (uint8_t* report_map, uint16_t len);
```

Parameters

report_map: pointer to HID report descriptor

len: HID report descriptor length in bytes

Returns

The function returns nothing.

Example Code

Example: BLEHIDGamepad

Notes and Warnings

The HID report map characteristic can only be configured after BLEHIDDevice init() function is called.

BLEHIDDevice::inputReport

Description

Send a HID input report.

Syntax

```
void inputReport (uint8_t reportID, uint8_t* data, uint16_t len, uint8_t conn_id);
```

Parameters

reportID: HID report ID of input report

data: pointer to HID input report data to send

len: length of HID input report data in bytes

conn_id: connection ID of device to send HID report to

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

HID input reports can only be sent after BLEHIDDevice init() function has been called.

BLEHIDDevice::setOutputReportCallback

Description

Set a user callback function for receiving HID output report data.

Syntax

```
void setOutputReportCallback (uint8_t reportID, void (*fCallback) (BLECharacteristic* chr, uint8_t conn_id));
```

Parameters

reportID: HID report ID of output report to link callback function with

chr: BLECharacteristic class object containing received HID output report data

conn_id: connection ID of device which sent HID report data

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Setting a user callback function for output reports can only occur after BLEHIDDevice init() function has been called.

BLEHIDDevice::bootKeyboardReport

Description

Send a HID boot keyboard input report.

Syntax

```
void bootKeyboardReport (uint8_t* data, uint16_t len, uint8_t conn_id);
```

Parameters

data: pointer to HID input report data to send

len: length of HID input report data in bytes

conn_id: connection ID of device to send HID report to

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

By default, the HID service Protocol Mode characteristic has boot mode disabled. To send boot keyboard input reports, the Protocol Mode characteristic needs to have boot mode enabled.

BLEHIDDevice::setHidInfo**Description**

Set data of the HID Info characteristic of the HID service.

Syntax

```
void setHidInfo (uint16_t bcd, uint8_t country, uint8_t flags);
```

Parameters

bcd: 16-bit unsigned integer representing version number of base USB HID Specification implemented by HID Device

country: 8-bit integer identifying country HID Device hardware is localized for. Most hardware is not localized (value 0x00).

flags: Bit flags indicating remote-wake capability and advertising when bonded but not connected.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

For detailed information on the characteristic, refer to Bluetooth SIG HID Service specifications.

BLEHIDDevice::setBattLevel

Description

Set battery level data of the Battery service.

Syntax

```
void setBattLevel (uint8_t level);
```

Parameters

level: battery level expressed as % of full charge

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Battery level is set to 100% by default. For detailed information refer to Bluetooth SIG Battery service specifications.

BLEHIDDevice::setPNPInfo

Description

Set PNP data of the Device Information service.

Syntax

```
void setPNPInfo (uint8_t sig, uint16_t vid, uint16_t pid, uint16_t version);
```

Parameters

sig: The Vendor ID Source field designates which organization assigned the value used in the Vendor ID field value.

vid: The Vendor ID field is intended to uniquely identify the vendor of the device.

pid: The Product ID field is intended to distinguish between different products made by the vendor.

version: The Product Version field is a numeric expression identifying the device release number in Binary-Coded Decimal.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

By default, sig and vid are configured to indicate Realtek as the vendor. For detailed information refer to Bluetooth SIG Device Information service specifications.

BLEHIDDevice::setManufacturerString

Description

Set manufacturer information of the Device Information service.

Syntax

```
void setManufacturerString (const char* manufacturer);
```

Parameters

manufacturer: pointer to character string containing manufacturer name info.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Manufacturer is set to “Realtek” by default. For detailed information refer to Bluetooth SIG Device Information service specifications.

BLEHIDDevice::setModelString

Description

Set model information of the Device Information service.

Syntax

```
void setModelString (const char* model);
```

Parameters

model: pointer to character string containing device model info.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Model is set to “Ameba_BLE_HID” by default. For detailed information refer to Bluetooth SIG Device Information service specifications.

BLEHIDDevice::hidService

Description

Get reference to HID service

Syntax

```
BLEService& hidService ();
```

Parameters

The function requires no input parameter.

Returns

The function returns a reference to the BLEService class object for the HID service.

Example Code

Example: BLEHIDMouse

Notes and Warnings

NA

BLEHIDDevice::devInfoService**Description**

Get reference to Device Information service

Syntax

```
BLEService& devInfoService ();
```

Parameters

The function requires no input parameter.

Returns

The function returns a reference to the BLEService class object for the Device Information service.

Example Code

Example: BLEHIDMouse

Notes and Warnings

NA

BLEHIDDevice::battService**Description**

Get reference to Battery service

Syntax

```
BLEService& battService ();
```

Parameters

The function requires no input parameter.

Returns

The function returns a reference to the BLEService class object for the Battery service.

Example Code

Example: BLEHIDMouse

Notes and Warnings

NA

Class BLEHIDGamepad

BLEHIDGamepad Class

Description

A class used for creating and managing a BLE HID Gamepad.

Syntax

```
class BLEHIDGamepad
```

Members

Public Constructors	
BLEHIDGame pad::BLEHIDGamepad	Constructs a BLEHIDGamepad object
Public Methods	
BLEHIDGamepad::setReportID	Set HID report ID for the HID Gamepad
BLEHIDGame pad::gamepadReport	Send a HID Gamepad report
BLEHIDGamepad::buttonPress	Send a HID Gamepad report indicating buttons pressed
BLEHIDGame pad::buttonRelease	Send a HID Gamepad report indicating buttons released
BLEHIDGamepad::buttonReleaseAll	Send a HID Gamepad report indicating no buttons pressed
BLEHIDGamepad::setHat	Send a HID Gamepad report indicating hat switch position
BLEHIDGamepad::setAxes	Send a HID Gamepad report indicating position of all axes
BLEHIDGamepad::setLeftStick	Send a HID Gamepad report indicating position of axes corresponding to left analog stick
BLEHIDGamepad::setRightStick	Send a HID Gamepad report indicating position of axes corresponding to right analog stick
BLEHIDGamepad::setTriggers	Send a HID Gamepad report indicating position of axes corresponding to triggers

BLEHIDGamepad::BLEHIDGamepad

Description

Constructs a BLE object

Syntax

```
BLEHIDGamepad::BLEHIDGamepad();
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: BLEHIDGamepad

Notes and Warnings

By default, the BLEHIDGamepad class assumes the HID report descriptor implements a gamepad device with 16 buttons, 6 16-bit axes and an 8-direction hat switch. This class will not work if a different gamepad report descriptor is implemented.

BLEHIDGamepad::setReportID

Description

Set HID report ID for the HID Gamepad.

Syntax

```
void setReportID (uint8_t reportID);
```

Parameters

reportID: The report ID for the gamepad device, corresponding to the HID report descriptor.

Returns

The function returns nothing.

Example Code

Example: BLEHIDGamepad

Notes and Warnings

HID report ID should start at 1. Some systems may consider a report ID of 0 as invalid.

BLEHIDGamepad::gamepadReport

Description

Send a HID Gamepad report.

Syntax

```
void gamepadReport (hid_gamepad_report_t* report);  
void gamepadReport (uint16_t buttons, uint8_t hat, int16_t x, int16_t y, int16_t z, int16_t Rz, int16_t Rx, int16_t Ry);
```

Parameters

report: pointer to gamepad report structure containing data on all inputs

buttons: bitmap indicating state of each button. 1 = pressed, 0 = released.

hat: position of hat switch. Valid values:

–GAMEPAD_HAT_CENTERED = 0

–GAMEPAD_HAT_UP = 1

–GAMEPAD_HAT_UP_RIGHT = 2

–GAMEPAD_HAT_RIGHT = 3

–GAMEPAD_HAT_DOWN_RIGHT = 4

–GAMEPAD_HAT_DOWN = 5

–GAMEPAD_HAT_DOWN_LEFT = 6

–GAMEPAD_HAT_LEFT = 7

–GAMEPAD_HAT_UP_LEFT = 8

x: position of x axis. Integer value from -32767 to 32767.

y: position of y axis. Integer value from -32767 to 32767.

z: position of z axis. Integer value from -32767 to 32767.

Rz: position of Rz axis. Integer value from -32767 to 32767.

Rx: position of Rx axis. Integer value from -32767 to 32767.

Ry: position of Ry axis. Integer value from -32767 to 32767.

Returns

The function returns nothing.

Example Code

Example: BLEHIDGamepad

Notes and Warnings

NA

BLEHIDGamepad::buttonPress

Description

Send a HID Gamepad report indicating buttons pressed.

Syntax

```
void buttonPress (uint16_t buttons);
```

Parameters

buttons: bitmap indicating buttons pressed. 1 = pressed.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEHIDGamepad::buttonRelease

Description

Send a HID Gamepad report indicating buttons released.

Syntax

```
void buttonRelease (uint16_t buttons);
```

Parameters

buttons: bitmap indicating buttons released. 1 = released.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEHIDGamepad::buttonReleaseAll**Description**

Send a HID Gamepad report indicating no buttons pressed.

Syntax

```
void buttonReleaseAll (void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: BLEHIDGamepad

Notes and Warnings

NA

BLEHIDGamepad::setHat

Description

Send a HID Gamepad report indicating hat switch position.

Syntax

```
void setHat (uint8_t hat);
```

Parameters

hat: position of hat switch. Valid values:

- GAMEPAD_HAT_CENTERED = 0
- GAMEPAD_HAT_UP = 1
- GAMEPAD_HAT_UP_RIGHT = 2
- GAMEPAD_HAT_RIGHT = 3
- GAMEPAD_HAT_DOWN_RIGHT = 4
- GAMEPAD_HAT_DOWN = 5
- GAMEPAD_HAT_DOWN_LEFT = 6
- GAMEPAD_HAT_LEFT = 7
- GAMEPAD_HAT_UP_LEFT = 8

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEHIDGamepad::setAxes

Description

Send a HID Gamepad report indicating position of all axes.

Syntax

```
void setAxes (int16_t x, int16_t y, int16_t z, int16_t Rz, int16_t Rx, int16_t Ry);
```

Parameters

x: position of x axis. Integer value from -32767 to 32767.

y: position of y axis. Integer value from -32767 to 32767.

z: position of z axis. Integer value from -32767 to 32767.

Rz: position of Rz axis. Integer value from -32767 to 32767.

Rx: position of Rx axis. Integer value from -32767 to 32767.

Ry: position of Ry axis. Integer value from -32767 to 32767.

Returns

The function returns nothing.

Example Code

Example: BLEHIDGamepad

Notes and Warnings

NA

BLEHIDGamepad::setLeftStick

Description

Send a HID Gamepad report indicating position of axes corresponding to left analog stick.

Syntax

```
void setLeftStick (int16_t x, int16_t y);
```

Parameters

x: position of x axis. Integer value from -32767 to 32767.

y: position of y axis. Integer value from -32767 to 32767.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEHIDGamepad::setRightStick

Description

Send a HID Gamepad report indicating position of axes corresponding to right analog stick.

Syntax

```
void setLeftStick (int16_t z, int16_t Rz);
```

Parameters

z: position of z axis. Integer value from -32767 to 32767.

Rz: position of Rz axis. Integer value from -32767 to 32767.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEHIDGamepad::setTriggers

Description

Send a HID Gamepad report indicating position of axes corresponding to triggers.

Syntax

```
void setTriggers (int16_t Rx, int16_t Ry);
```

Parameters

Rx: position of Rx axis. Integer value from -32767 to 32767.

Ry: position of Ry axis. Integer value from -32767 to 32767.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

Class BLEHIDKeyboard

BLEHIDKeyboard Class

Description

A class used for creating and managing a BLE HID Keyboard.

Syntax

```
class BLEHIDKeyboard
```

Members

Public Constructors	
BLEHIDKeyboard ard::BLEHIDKeyboard	Constructs a BLEHIDKeyboard object
Public Methods	
BLEHIDKeyboard::setReportID	Set HID report ID for the HID Keyboard and HID consumer control
BLEHIDKeyboard::consumerReport	Send a HID Consumer report
BLEHIDKeyboard::keyboardReport	Send a HID Keyboard report
BLEHIDKeyboard::consumerPress	Send a HID Consumer report indicating button pressed
BLEHIDKeyboard::consumerRelease	Send a HID Consumer report indicating button released
BLEHIDKeyboard::keypress	Send a HID Keyboard report indicating keys pressed
BLEHIDKeyboard::keyRelease	Send a HID Keyboard report indicating keys released
BLEHIDKeyboard::keyReleaseAll	Send a HID Keyboard report indicating no keys pressed
BLEHIDKeyboard::keyCharPress	Send a HID Keyboard report indicating keys pressed to output an ASCII character
BLEHIDKeyboard::keySequence	Send a HID Keyboard report indicating keys pressed to output an ASCII string

BLEHIDKeyboard::BLEHIDKeyboard

Description

Constructs a BLEHIDKeyboard object.

Syntax

```
BLEHIDKeyboard::BLEHIDKeyboard();
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: BLEHIDKeyboard

Notes and Warnings

NA

BLEHIDKeyboard::setReportID**Description**

Set HID report ID for the HID Keyboard and HID consumer control.

Syntax

```
void setReportID (uint8_t reportIDKeyboard, uint8_t reportIDConsumer);
```

Parameters

reportIDKeyboard: The report ID for the HID keyboard device, corresponding to the HID report descriptor.

reportIDConsumer: The report ID for the HID consumer control device, corresponding to the HID report descriptor.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEHIDKeyboard::consumerReport**Description**

Send a HID Consumer report.

Syntax

```
void consumerReport (uint16_t usage_code);
```

Parameters

usage_code: HID consumer control usage code for the button pressed.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEHIDKeyboard::keyboardReport

Description

Send a HID Keyboard report.

Syntax

```
void keyboardReport (void);  
void keyboardReport (uint8_t modifiers, uint8_t keycode[6]);
```

Parameters

modifiers: bitmap indicating key modifiers pressed (CTRL, ALT, SHIFT).
keycode: byte array indicating keys pressed.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEHIDKeyboard::consumerPress

Description

Send a HID Consumer report indicating button pressed.

Syntax

```
void consumerPress (uint16_t usage_code);
```

Parameters

usage_code: HID consumer control usage code for the button pressed.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEHIDKeyboard::consumerRelease

Description

Send a HID Consumer report indicating button released.

Syntax

```
void consumerRelease (void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEHIDKeyboard::keypress

Description

Send a HID Keyboard report indicating keys pressed.

Syntax

```
void keyPress (uint16_t key);
```

Parameters

key: HID keycode for key pressed, value ranges from 0x00 to 0xE7.

Returns

The function returns nothing.

Example Code

Example: BLEHIDKeyboard

Notes and Warnings

NA

BLEHIDKeyboard::keyRelease

Description

Send a HID Keyboard report indicating keys released.

Syntax

```
void keyRelease (uint16_t key);
```

Parameters

key: HID keycode for key pressed, value ranges from 0x00 to 0xE7.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEHIDKeyboard::keyReleaseAll**Description**

Send a HID Keyboard report indicating no keys pressed.

Syntax

```
void keyReleaseAll(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: BLEHIDKeyboard

Notes and Warnings

NA

BLEHIDKeyboard::keyCharPress

Description

Send a HID Keyboard report indicating keys pressed to output an ASCII character.

Syntax

```
void keyCharPress (char ch);
```

Parameters

ch: ASCII character to output.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEHIDKeyboard::keySequence

Description

Send a HID Keyboard report indicating keys pressed to output an ASCII string.

Syntax

```
void keySequence (const char* str, uint16_t delayTime);  
void keySequence (String str, uint16_t delayTime);
```

Parameters

str: pointer to character string to output

str: String object containing character string to output

delayTime: time delay between key press and release, in milliseconds. Default value of 5.

Returns

The function returns nothing.

Example Code

Example: BLEHIDKeyboard

Notes and Warnings

NA

Class BLEHIDMouse**BLEHIDMouse Class****Description**

A class used for creating and managing a BLE HID Mouse.

Syntax

```
class BLEHIDMouse
```

Members

Public Constructors	
BLE HIDMouse::BLEHIDMouse	Constructs a BLEHIDMouse object
Public Methods	
BLE HIDMouse::setReportID	Set HID report ID for the HID Mouse
BLE HIDMouse::mouseReport	Send a HID Mouse report
BL EHIDMouse::mousePress	Send a HID Mouse report indicating buttons pressed
BLEH IDMouse::mouseRelease	Send a HID Mouse report indicating buttons released
BLEHIDM ouse::mouseReleaseAll	Send a HID Mouse report indicating no buttons pressed
B LEHIDMouse::mouseMove	Send a HID Mouse report indicating mouse movement
BLE HIDMouse::mouseScroll	Send a HID Mouse report indicating mouse scroll wheel movement

BLEHIDMouse::BLEHIDMouse

Description

Constructs a BLEHIDMouse object.

Syntax

```
BLEHIDMouse::BLEHIDMouse();
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: BLEHIDMouse

Notes and Warnings

NA

BLEHIDMouse::setReportID

Description

Set HID report ID for the HID Mouse.

Syntax

```
void setReportID (uint8_t reportID);
```

Parameters

reportID: The report ID for the HID mouse device, corresponding to the HID report descriptor.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEHIDMouse::mouseReport**Description**

Send a HID Mouse report.

Syntax

```
void mouseReport (hid_mouse_report_t* report);  
void mouseReport (uint8_t buttons, int8_t x, int8_t y, int8_t scroll);
```

Parameters

report: pointer to mouse report structure containing data on mouse inputs

buttons: bitmap indicating state of each button. 1 = pressed, 0 = released.

x: mouse x-axis movement. Integer value from -127 to 127.

y: mouse y-axis movement. Integer value from -127 to 127.

scroll: mouse scroll wheel movement. Integer value from -127 to 127.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEHIDMouse::mousePress

Description

Send a HID Mouse report indicating buttons pressed.

Syntax

```
void mousePress (uint8_t buttons);
```

Parameters

buttons: bitmap indicating buttons pressed. 1 = pressed.

Returns

The function returns nothing.

Example Code

Example: BLEHIDMouse

Notes and Warnings

NA

BLEHIDMouse::mouseRelease

Description

Send a HID Mouse report indicating buttons released.

Syntax

```
void mouseRelease (uint8_t buttons);
```

Parameters

buttons: bitmap indicating buttons released. 1 = released.

Returns

The function returns nothing.

Example Code

Example: BLEHIDMouse

Notes and Warnings

NA

BLEHIDMouse::mouseReleaseAll**Description**

Send a HID Mouse report indicating no buttons pressed.

Syntax

```
void mouseReleaseAll(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEHIDMouse::mouseMove**Description**

Send a HID Mouse report indicating mouse movement.

Syntax

```
void mouseMove (int8_t x, int8_t y);
```

Parameters

x: mouse x-axis movement. Integer value from -127 to 127.

y: mouse y-axis movement. Integer value from -127 to 127.

Returns

The function returns nothing.

Example Code

Example: BLEHIDMouse

Notes and Warnings

NA

BLEHIDMouse::mouseScroll

Description

Send a HID Mouse report indicating mouse scroll wheel movement.

Syntax

```
void mouseScroll (int8_t scroll);
```

Parameters

scroll: mouse scroll wheel movement. Integer value from -127 to 127.

Returns

The function returns nothing.

Example Code

Example: BLEHIDMouse

Notes and Warnings

NA

Class BLERemoteCharacteristic

BLERemoteCharacteristic Class

Description

A class used for managing BLE GATT characteristics on connected remote devices.

Syntax

```
class BLERemoteCharacteristic
```

Members

Public Constructors
No public constructor is available for this class. You can get a pointer to an instance of this class using BLERemoteService::getCharacteristic().

Public Methods	
BLERemoteCharacteristic::getDescriptor	Get a specific descriptor on the remote device
BLERemoteCharacteristic::getUUID	Get the characteristic UUID
BLERemoteCharacteristic::setBufferLen	Set the size of the internal data buffer
BLERemoteCharacteristic::getBufferLen	Get the current size of the internal data buffer
BLERemoteCharacteristic::canRead	Determine if characteristic has read property enabled
BLERemoteCharacteristic::canWrite	Determine if characteristic has write property enabled
BLERemoteCharacteristic::canNotify	Determine if characteristic has notify property enabled
BLERemoteCharacteristic::canIndicate	Determine if characteristic has indicate property enabled
BLERemoteCharacteristic::getProperties	Get the characteristic properties
BLERemoteCharacteristic::readString	Read the characteristic data buffer as a String object
BLERemoteCharacteristic::readData8	Read the characteristic data buffer as an unsigned 8-bit integer
BLERemoteCharacteristic::readData16	Read the characteristic data buffer as an unsigned 16-bit integer
BLERemoteCharacteristic::readData32	Read the characteristic data buffer as an unsigned 32-bit integer
BLERemoteCharacteristic::writeString	Write data to the characteristic as a String object or character array
BLERemoteCharacteristic::writeData8	Write data to the characteristic as an unsigned 8-bit integer
BLERemoteCharacteristic::writeData16	Write data to the characteristic as an unsigned 16-bit integer
BLERemoteCharacteristic::writeData32	Write data to the characteristic as an unsigned 16-bit integer
BLERemoteCharacteristic::setData	Write data to the characteristic
BLERemoteCharacteristic::getData	Read data from the characteristic
BLERemoteCharacteristic::enableNotifyIndicate	Enable notification or indication for the characteristic
BLERemoteCharacteristic::disableNotifyIndicate	Disable notification and indication for the characteristic
BLERemoteCharacteristic::setNotifyCallback	Set a user function as a notification callback

BLERemoteCharacteristic::getDescriptor

Description

Get a descriptor with the specified UUID on the remote device.

Syntax

```
BLERemoteDescriptor* getDescriptor(const char* uuid);
```

```
BLERemoteDescriptor* getDescriptor(BLEUUID uuid);
```

Parameters

uuid: the desired descriptor UUID, expressed as a character array or a BLEUUID object

Returns

The function returns the found descriptor as a BLERemoteDescriptor object pointer, otherwise nullptr is returned if a descriptor with the UUID is not found.

Example Code

NA

Notes and Warnings

NA

BLERemoteCharacteristic::getUUID**Description**

Get the characteristic UUID.

Syntax

```
BLEUUID getUUID();
```

Parameters

The function requires no input parameter.

Returns

The function returns the characteristic UUID as a BLEUUID class object.

Example Code

NA

Notes and Warnings

NA

BLERemoteCharacteristic::setBufferLen

Description

Set the size of the internal data buffer of the characteristic.

Syntax

```
void setBufferLen(uint16_t max_len);
```

Parameters

max_len: number of bytes to resize the internal buffer to.

Returns

The function returns nothing.

Example Code

Example: BLEUartClient

Notes and Warnings

Characteristic data buffer has a default size of 20 bytes and can be increased up to 230 bytes.

BLERemoteCharacteristic::getBufferLen

Description

Get the size of the characteristic internal buffer.

Syntax

```
uint16_t getBufferLen();
```

Parameters

The function requires no input parameter.

Returns

The function returns the currently set internal buffer size.

Example Code

NA

Notes and Warnings

NA

BLERemoteCharacteristic::canRead**Description**

Determine if characteristic has read property enabled.

Syntax

```
bool canRead();
```

Parameters

The function requires no input parameter.

Returns

The function returns TRUE if the read property for the characteristic is enabled.

Example Code

NA

Notes and Warnings

NA

BLERemoteCharacteristic::canWrite

Description

Determine if characteristic has write property enabled.

Syntax

```
bool canWrite();
```

Parameters

The function requires no input parameter.

Returns

The function returns TRUE if the write property for the characteristic is enabled.

Example Code

NA

Notes and Warnings

NA

BLERemoteCharacteristic::canNotify

Description

Determine if characteristic has notify property enabled.

Syntax

```
bool canNotify();
```

Parameters

The function requires no input parameter.

Returns

The function returns TRUE if the notify property for the characteristic is enabled.

Example Code

NA

Notes and Warnings

NA

BLERemoteCharacteristic::canIndicate**Description**

Determine if characteristic has indicate property enabled.

Syntax

```
bool canIndicate();
```

Parameters

The function requires no input parameter.

Returns

The function returns TRUE if the indicate property for the characteristic is enabled.

Example Code

NA

Notes and Warnings

NA

BLERemoteCharacteristic::getProperties**Description**

Get the characteristic properties.

Syntax

```
uint16_t getProperties();
```

Parameters

The function requires no input parameter.

Returns

The function returns the characteristic properties.

Example Code

NA

Notes and Warnings

NA

BLERemoteCharacteristic::readString

Description

Request for characteristic data from the remote device and read the data in the buffer, expressed as a String class object.

Syntax

```
String readString();
```

Parameters

The function requires no input parameter.

Returns

The function returns the data in the characteristic buffer expressed as a String class object.

Example Code

Example: BLEUartClient

Notes and Warnings

NA

BLERemoteCharacteristic::readData8**Description**

Request for characteristic data from the remote device and read the data in the buffer, expressed as an unsigned 8-bit integer.

Syntax

```
uint8_t readData8();
```

Parameters

The function requires no input parameter.

Returns

The function returns the data in the characteristic buffer expressed as a uint8_t value.

Example Code

Example: BLEBatteryClient

Notes and Warnings

NA

BLERemoteCharacteristic::readData16**Description**

Request for characteristic data from the remote device and read the data in the buffer, expressed as an unsigned 16-bit integer.

Syntax

```
uint16_t readData16();
```

Parameters

The function requires no input parameter.

Returns

The function returns the data in the characteristic buffer expressed as a uint16_t value.

Example Code

NA

Notes and Warnings

NA

BLERemoteCharacteristic::readData32

Description

Request for characteristic data from the remote device and read the data in the buffer, expressed as an unsigned 32-bit integer.

Syntax

```
uint32_t readData32();
```

Parameters

The function requires no input parameter.

Returns

The function returns the data in the characteristic buffer expressed as a uint32_t value.

Example Code

NA

Notes and Warnings

NA

BLERemoteCharacteristic::writeString

Description

Write data to the remote device characteristic as a String object or character array.

Syntax

```
bool writeString(String str);  
bool writeString(const char* str);
```

Parameters

str: the data to write to the remote characteristic, expressed as a String class object or a char array.

Returns

The function returns TRUE if write data is successful.

Example Code

NA

Notes and Warnings

NA

BLERemoteCharacteristic::writeData8

Description

Write data to the remote device characteristic as an unsigned 8-bit integer.

Syntax

```
bool writeData8(uint8_t num);
```

Parameters

num: the data to write to the characteristic buffer expressed as an unsigned 8-bit integer.

Returns

The function returns TRUE if write data is successful.

Example Code

NA

Notes and Warnings

NA

BLERemoteCharacteristic::writeData16

Description

Write data to the remote device characteristic as an unsigned 16-bit integer.

Syntax

```
bool writeData16(uint16_t num);
```

Parameters

num: the data to write to the characteristic buffer expressed as an unsigned 16-bit integer.

Returns

The function returns TRUE if write data is successful.

Example Code

NA

Notes and Warnings

NA

BLERemoteCharacteristic::writeData32**Description**

Write data to the remote device characteristic as a 32-bit integer.

Syntax

```
bool writeData32(uint32_t num);
```

```
bool writeData32(int num);
```

Parameters

num: the data to write to the characteristic buffer expressed as a 32-bit integer.

Returns

The function returns TRUE if write data is successful.

Example Code

NA

Notes and Warnings

NA

BLERemoteCharacteristic::setData**Description**

Write data to the remote device characteristic.

Syntax

```
bool setData(uint8_t* data, uint16_t datalen);
```

Parameters

data: pointer to byte array containing desired data

datalen: number of bytes of data to write

Returns

The function returns TRUE if write data is successful.

Example Code

NA

Notes and Warnings

NA

BLERemoteCharacteristic::getData

Description

Request for characteristic data from the remote device and read the data in the buffer.

Syntax

```
uint16_t getData(uint8_t* data, uint16_t datalen);
```

Parameters

data: pointer to byte array to save data read from buffer

datalen: number of bytes of data to read

Returns

The function returns the number of bytes read.

Example Code

NA

Notes and Warnings

If the data buffer contains less data than requested, it will only read the available number of bytes of data.

BLERemoteCharacteristic::enableNotifyIndicate

Description

Enable the remote device to send notifications or indications for the characteristic.

Syntax

```
void enableNotifyIndicate(bool notify = 1);
```

Parameters

notify: TRUE to enable notifications, FALSE to enable indications.

Returns

The function returns nothing.

Example Code

Example: BLEUartClient

Notes and Warnings

NA

BLERemoteCharacteristic::disableNotifyIndicate

Description

Disable receiving notifications and indications for the characteristic from the remote device.

Syntax

```
void disableNotifyIndicate();
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLERemoteCharacteristic::setNotifyCallback

Description

Set a user function to be called when the characteristic receives a notification from the remote device.

Syntax

```
void setNotifyCallback(void (*fCallback) (BLERemoteCharacteristic* chr, uint8_t* data, uint16_t length));
```

Parameters

fCallback: A user callback function that returns void and takes three arguments.

chr: pointer to BLERemoteCharacteristic object associated with notification.

data: pointer to byte array containing notification data.

length: number of bytes of notification data in array.

Returns

The function returns nothing.

Example Code

Example: BLEUartClient

Notes and Warnings

NA

Class BLERemoteDescriptor

BLERemoteDescriptor Class

Description

A class used for managing BLE GATT descriptors on connected remote devices.

Syntax

```
class BLERemoteDescriptor
```

Members

Public Constructors

No public constructor is available for this class. You can get a pointer to an instance of this class using `BLERemoteCharacteristic::getDescriptor()`.

Public Methods	
<code>BLERemoteDescriptor::getUUID</code>	Get the descriptor UUID
<code>BLERemoteDescriptor::setBufferLen</code>	Set the size of the internal data buffer
<code>BLERemoteDescriptor::getBufferLen</code>	Get the current size of the internal data buffer
<code>BLERemoteDescriptor::readString</code>	Read the descriptor data buffer as a String object
<code>BLERemoteDescriptor::readData8</code>	Read the descriptor data buffer as an unsigned 8-bit integer
<code>BLERemoteDescriptor::readData16</code>	Read the descriptor data buffer as an unsigned 16-bit integer
<code>BLERemoteDescriptor::readData32</code>	Read the descriptor data buffer as an unsigned 32-bit integer
<code>BLERemoteDescriptor::writeString</code>	Write data to the descriptor as a String object or character array
<code>BLERemoteDescriptor::writeData8</code>	Write data to the descriptor as an unsigned 8-bit integer
<code>BLERemoteDescriptor::writeData16</code>	Write data to the descriptor as an unsigned 16-bit integer
<code>BLERemoteDescriptor::writeData32</code>	Write data to the descriptor as an unsigned 16-bit integer
<code>BLERemoteDescriptor::setData</code>	Write data to the descriptor
<code>BLERemoteDescriptor::getData</code>	Read data from the descriptor

BLERemoteDescriptor::getUUID

Description

Get the descriptor UUID.

Syntax

```
BLEUUID getUUID();
```

Parameters

The function requires no input parameter.

Returns

The function returns the descriptor UUID as a BLEUUID class object.

Example Code

NA

Notes and Warnings

NA

BLERemoteDescriptor::setBufferLen

Description

Set the size of the internal data buffer of the descriptor.

Syntax

```
void setBufferLen(uint16_t max_len);
```

Parameters

max_len: number of bytes to resize the internal buffer to.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Descriptor data buffer has a default size of 20 bytes and can be increased up to 230 bytes.

BLERemoteDescriptor::getBufferLen**Description**

Get the size of the descriptor internal buffer.

Syntax

```
uint16_t getBufferLen();
```

Parameters

The function requires no input parameter.

Returns

The function returns the currently set internal buffer size.

Example Code

NA

Notes and Warnings

NA

BLERemoteDescriptor::readString

Description

Request for descriptor data from the remote device and read the data in the buffer, expressed as a String class object.

Syntax

```
String readString();
```

Parameters

The function requires no input parameter.

Returns

The function returns the data in the descriptor buffer expressed as a String class object.

Example Code

NA

Notes and Warnings

NA

BLERemoteDescriptor::readData8

Description

Request for descriptor data from the remote device and read the data in the buffer, expressed as an unsigned 8-bit integer.

Syntax

```
uint8_t readData8();
```

Parameters

The function requires no input parameter.

Returns

The function returns the data in the descriptor buffer expressed as a uint8_t value.

Example Code

NA

Notes and Warnings

NA

BLERemoteDescriptor::readData16**Description**

Request for descriptor data from the remote device and read the data in the buffer, expressed as an unsigned 16-bit integer.

Syntax

```
uint16_t readData16();
```

Parameters

The function requires no input parameter.

Returns

The function returns the data in the descriptor buffer expressed as a uint16_t value.

Example Code

NA

Notes and Warnings

NA

BLERemoteDescriptor::readData32

Description

Request for descriptor data from the remote device and read the data in the buffer, expressed as an unsigned 32-bit integer.

Syntax

```
uint32_t readData32();
```

Parameters

The function requires no input parameter.

Returns

The function returns the data in the descriptor buffer expressed as a uint32_t value.

Example Code

NA

Notes and Warnings

NA

BLERemoteDescriptor::writeString

Description

Write data to the remote device descriptor as a String object or character array.

Syntax

```
bool writeString(String str);  
bool writeString(const char* str);
```

Parameters

str: the data to write to the remote descriptor, expressed as a String class object or a char array.

Returns

The function returns TRUE if write data is successful.

Example Code

NA

Notes and Warnings

NA

BLERemoteDescriptor::writeData8**Description**

Write data to the remote device descriptor as an unsigned 8-bit integer.

Syntax

```
bool writeData8(uint8_t num);
```

Parameters

num: the data to write to the descriptor buffer expressed as an unsigned 8-bit integer.

Returns

The function returns TRUE if write data is successful.

Example Code

NA

Notes and Warnings

NA

BLERemoteDescriptor::writeData16

Description

Write data to the remote device descriptor as an unsigned 16-bit integer.

Syntax

```
bool writeData16(uint16_t num);
```

Parameters

num: the data to write to the descriptor buffer expressed as an unsigned 16-bit integer.

Returns

The function returns TRUE if write data is successful.

Example Code

NA

Notes and Warnings

NA

BLERemoteDescriptor::writeData32

Description

Write data to the remote device descriptor as a 32-bit integer.

Syntax

```
bool writeData32(uint32_t num);
```

```
bool writeData32(int num);
```

Parameters

num: the data to write to the descriptor buffer expressed as a 32-bit integer.

Returns

The function returns TRUE if write data is successful.

Example Code

NA

Notes and Warnings

NA

BLERemoteDescriptor::setData

Description

Write data to the remote device descriptor.

Syntax

```
bool setData(uint8_t* data, uint16_t datalen);
```

Parameters

data: pointer to byte array containing desired data

datalen: number of bytes of data to write

Returns

The function returns TRUE if write data is successful.

Example Code

NA

Notes and Warnings

NA

BLERemoteDescriptor::getData

Description

Request for descriptor data from the remote device and read the data in the buffer.

Syntax

```
uint16_t getData(uint8_t* data, uint16_t datalen);
```

Parameters

data: pointer to byte array to save data read from buffer

datalen: number of bytes of data to read

Returns

The function returns the number of bytes read.

Example Code

NA

Notes and Warnings

If the data buffer contains less data than requested, it will only read the available number of bytes of data.

Class BLERemoteService

BLERemoteService Class

Description

A class used for managing BLE GATT services on connected remote devices.

Syntax

```
class BLERemoteService
```

Members

Public Constructors

No public constructor is available for this class. You can get a pointer to an instance of this class using BLE-Client::getService().

Public Methods	
BLERemoteService::getUUID	Get the service UUID
BLE RemoteService::getCharacteristic	Get a specific characteristic on the remote device

BLERemoteService::getUUID**Description**

Get the service UUID.

Syntax

```
BLEUUID getUUID();
```

Parameters

The function requires no input parameter.

Returns

The function returns the service UUID as a BLEUUID class object.

Example Code

NA

Notes and Warnings

NA

BLERemoteService::getCharacteristic**Description**

Get a characteristic with the specified UUID on the remote device.

Syntax

```
BLERemoteCharacteristic* getCharacteristic (const char* uuid);  
BLERemoteCharacteristic* getCharacteristic (BLEUUID uuid);
```

Parameters

uuid: the desired characteristic UUID, expressed as a character array or a BLEUUID object.

Returns

The function returns the found characteristic as a BLERemoteCharacteristic object pointer, otherwise nullptr is returned if a characteristic with the UUID is not found.

Example Code

Example: BLEUartClient

Notes and Warnings

NA

Class BLEScan

BLEScan Class

Description

A class used for managing BLE scanning settings.

Syntax

```
class BLEScan
```

Members

Public Constructors
No public constructor is available as this class is intended to be a singleton class. You can get a pointer to this class using BLEDevice::configScan

Public Methods	
BLEScan::updateScanParams	Update the current BLE advertisement settings to the lower Bluetooth stack
BLEScan::startScan	Start a BLE scan
BLEScan::stopScan	Stop a BLE scan
BLEScan::setScanMode	Set the BLE scanning mode
BLEScan::setScanInterval	Set the BLE scanning interval
BLEScan::setScanWindow	Set the BLE scanning window
BLEScan::setScanDuplicateFilter	Set the BLE scan duplicate filter
BLEScan::scanInProgress	Check if a scan is currently in progress
BLEScan::printScanInfo	Print out scanned information

BLEScan::updateScanParams**Description**

Update the lower Bluetooth stack with the current scan settings.

Syntax

```
void updateScanParams(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: BLEScan

Notes and Warnings

Stop any scans in progress first before using this function.

BLEScan::startScan

Description

Start BLE scanning.

Syntax

```
void startScan();  
void startScan(uint32_t scanDuration_ms);
```

Parameters

scanDuration: BLE scan will stop after scanDuration milliseconds.

Returns

The function returns nothing.

Example Code

Example: BLEScan

Notes and Warnings

Set the scan parameters first before starting a scan. BLE scans will occur continuously for the duration set with BLEDevice::setScanWindow() and will repeat with a time interval set with BLEDevice::setScanInterval(). Call this member function without an argument to start scanning until BLEDevice::stopScan() is called.

BLEScan::stopScan

Description

Stop BLE scanning.

Syntax

```
void stopScan(void);
```

Parameters

The function requires no input paramter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEScan::setScanMode**Description**

Set the BLE scan mode.

Syntax

```
void setScanMode(uint8_t scanMode);
```

Parameters

scanMode: GAP_SCAN_MODE_PASSIVE for passive scanning, GAP_SCAN_MODE_ACTIVE for active scanning

Returns

The function returns nothing.

Example Code

Example: BLEScan

Notes and Warnings

Active scanning will request for scan response packets after discovering an advertising device. Passive scanning will only capture advertising data packets.

BLEScan::setScanInterval

Description

Set the BLE scan interval.

Syntax

```
void setScanInterval(uint16_t scanInt_ms);
```

Parameters

scanInt_ms: scan interval in milliseconds. Value range of 3 to 10240.

Returns

The function returns nothing.

Example Code

Example: BLEScan

Notes and Warnings

A BLE scan will repeat with a time interval set with this member function.

BLEScan::setScanWindow

Description

Set the BLE scan window.

Syntax

```
void setScanWindow(uint16_t scanWindow_ms);
```

Parameters

scanWindow_ms: scan window in milliseconds. Value range of 3 to 10240.

Returns

The function returns nothing.

Example Code

Example: BLEScan

Notes and Warnings

A BLE scan will scan continuously for a window duration set with this member function. The scan window should be less than or equal to the scan interval.

BLEScan::setScanDuplicateFilter**Description**

Set the scan duplicate filter.

Syntax

```
void setScanDuplicateFilter(bool dupeFilter);
```

Parameters

dupeFilter: TRUE to enable duplicate filtering.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Enabling duplicate filters will ignore scan results for devices already discovered previously.

BLEScan::scanInProgress

Description

Set the scan duplicate filter.

Syntax

```
bool scanInProgress(void);
```

Parameters

The function requires no input paramter.

Returns

TRUE if BLE scanning is in progress.

Example Code

NA

Notes and Warnings

NA

BLEScan::printScanInfo

Description

Parse and print out scanned information.

Syntax

```
void printScanInfo(T_LE_CB_DATA* p_data);
```

Parameters

p_data: pointer to scan data of type T_LE_CB_DATA*

Returns

The function returns nothing.

Example Code

Example: BLEScan

Notes and Warnings

Use this member function to parse the various fields of received advertisement data packets and print the results out to the serial monitor.

Class BLEService

BLEService Class

Description

A class used for creating and managing BLE GATT services.

Syntax

```
class BLEService
```

Members

Public Constructors	
BLEService::BLEService	Constructs a BLEService object
Public Methods	
BLEService::setUUID	Set service UUID
BLEService::getUUID	Get service UUID
BLEService::addCharacteristic	Add a characteristic to service
BLEService::getCharacteristic	Get a previously added characteristic

BLEService::BLEService

Description

Constructs a BLEService object.

Syntax

```
BLEService::BLEService(BLEUUID uuid);  
BLEService::BLEService(const char* uuid);
```

Parameters

uuid: service UUID, expressed as a BLEUUID class object or a character array

Returns

The function returns nothing.

Example Code

Example: BLEUartService

Notes and Warnings

NA

BLEService::setUUID

Description

Set the service UUID.

Syntax

```
void setUUID(BLEUUID uuid);
```

Parameters

uuid: service UUID, expressed as a BLEUUID class object.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEService::getUUID

Description

Get the service UUID.

Syntax

```
BLEUUID getUUID();
```

Parameters

The function requires no input parameter.

Returns

The function returns the service UUID in a BLEUUID class object.

Example Code

NA

Notes and Warnings

NA

BLEService::addCharacteristic

Description

Add a characteristic to the service.

Syntax

```
void addCharacteristic(BLECharacteristic& newChar);
```

Parameters

newChar: the BLECharacteristic to add to the service.

Returns

The function returns nothing.

Example Code

Example: BLEUartService

Notes and Warnings

NA

BLEService::getCharacteristic

Description

Get a previously added characteristic.

Syntax

```
BLECharacteristic* getCharacteristic(uint8_t charIndex);
```

Parameters

charIndex: position index of characteristic.

Returns

The function returns a pointer to the BLECharacteristic at the requested position index.

Example Code

NA

Notes and Warnings

NA

Class BLEUUID

BLEUUID Class

Description

A class used for creating and managing UUIDs.

Syntax

```
class BLEUUID
```

Members

Public Constructors	
BLEUUID::BLEUUID	Create a UUID object
Public Methods	
BLEUUID::str	Get the character string representation of UUID
BLEUUID::data	Get the binary representation of UUID
BLEUUID::length	Get the length of UUID

BLEUUID::BLEUUID

Description

Create a UUID object from a UUID character string

Syntax

```
BLEUUID();
BLEUUID(const char* str);
BLEUUID(uint8_t* data, uint8_t length);
```

Parameters

str: UUID character string used to created object

data: pointer to byte array containing the desired UUID

length: number of bytes in array containing the desired UUID. Valid values of 2, 4 or 16

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

BLEUUID::str

Description

Get the character string representation of UUID

Syntax

```
const char* str(void);
```

Parameters

The function requires no input parameter.

Returns

Pointer to a character string representation of the UUID

Example Code

NA

Notes and Warnings

BLEUUID::data

Description

Get the binary representation of UUID

Syntax

```
const uint8_t* data(void);
```

Parameters

The function requires no input parameter.

Returns

Pointer to an unsigned 8-bit integer array containing the UUID expressed in binary form

Example Code

NA

Notes and Warnings

Returned pointer is of const uint8_t* type and will not allow changing of the data.

BLEUUID::length**Description**

Get the length of UUID

Syntax

```
uint8_t length(void);
```

Parameters

The function requires no input parameter.

Returns

Length of the UUID, in terms of bytes

Example Code

NA

Notes and Warnings

A 4-character UUID will be 16 bits / 2 bytes long.

A 32-character UUID will be 128 bits / 16 bytes long.

Class BLEWifiConfigService

BLEWifiConfigService Class

Description

A class used for managing a BLE WiFi configuration service running on the device.

Syntax

```
class BLEWifiConfigService
```

Members

Public Constructors	
BLEWifiCon figService::BLEWifiConfigService	Only one instance of this class should be created

Public Methods	
BLEWifiConfigService::begin	Start background thread to process WiFi configuration commands
BLEWifiConfigService::end	Stop background thread processing WiFi configuration commands
BLEWifiConfigService::addService	Add the service to the BLE stack
BLEWifiConfigService::advData	Get advertising data correctly formatted for WiFi configuration service

BLEWifiConfigService::BLEWifiConfigService

Description

Create an instance of the BLEWifiConfigService object.

Syntax


```
void BLEWifiConfigService ();
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: BLEWifiConfig

Notes and Warnings

Only one instance of this class / service should be created.

BLEWifiConfigService::begin**Description**

Start background thread to process WiFi configuration commands.

Syntax

```
void begin();
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: BLEWifiConfig

Notes and Warnings

NA

BLEWifiConfigService::end

Description

Stop background thread processing WiFi configuration commands.

Syntax

```
void end();
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEWifiConfigService::addService

Description

Add the WiFi configuration service to the BLE stack.

Syntax

```
void addService();
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: BLEWifiConfig

Notes and Warnings

NA

BLEWifiConfigService::advData**Description**

Get advertising data correctly formatted for WiFi configuration service.

Syntax

```
BLEAdvertData advData();
```

Parameters

The function requires no input parameter.

Returns

The function returns a BLEAdvertData object that contains the required advertising data fields for the WiFi configuration service to work.

Example Code

Example: BLEWifiConfig

Notes and Warnings

The advertisement data needs to be correctly formatted for the corresponding smartphone app to recognise the device. WiFi configuration service advertisement data requires the local BT address, and should be called only after peripheral mode is started and may also require stopping and restarting the advertising process.

EPDIF

Class EpdIF

EpdIf Class

Description

A class used to control the electronic paper display internal functions.

Syntax

```
class EpdIf
```

Members

Public Constructors

A public constructor should not be used as this class is intended to be a singleton class. Access member functions using the object instance named EpdIf.

Public Methods	
----------------	--

EpdIf::EPD_Dis_Part	Put an image buffer to the frame memory, but not updating the display
EpdIf::EPD_SetFrame	Put display data to the frame memory, usually used for setup text display functions
EpdIf::EPD_SetRAMValue_BaseMap	To read image data stored in the RAM, but not display on the screen
EpdIf::EPD_SetFrameMemory	To read image data stored in the buffer, but not display on the screen
EpdIf::EPD_UpdateDisplay	Update the display
EpdIf::EPD_ClearScreen_White	Clear the frame memory with the White color, but not updating the display
EpdIf::EPD_ClearScreen_Black	Clear the frame memory with the Black color, but not updating the display
EpdIf::EPD_Busy	Wait until the Busy pin goes to low, which is the idle state
EpdIf::EPD_Reset	Used for the Epaper module reset. Often used to awaken the module in deep sleep
EpdIf::EPD_Sleep	After this command is transmitted, the chip would enter the deep-sleep mode to save power

EpdIf:: EPD_Dis_Part**Description**

Put an image buffer to the frame memory, but not updating the display.

Syntax

```
void EPD_Dis_Part(unsigned int x_start, unsigned int y_start, const unsigned char* datas, unsigned int PART_COLUMN, unsigned int PART_LINE);
```

Parameters

x_start: starting position of the x-axis

y_start: starting position of the y-axis

datas: data to be displayed on the e-paper module

PART_COLUMN: height of the display area

PART_LINE: width of the display area

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

EpdIf:: EPD_SetFrame**Description**

Put display data to the frame memory, usually used for setup text display functions.

Syntax

```
void EPD_SetFrame(const unsigned char* image_buffer, int x, int y, int image_width, int image_height);
```

Parameters

image_buffer: the buffer which stores the data to be displayed on the e-paper module, usually used to display texts.

x: starting position of the x-axis

y: starting position of the y-axis

image_width: width of the display area

image_height: height of the display area

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

EpdIf:: EPD_SetRAMValue_BaseMap

Description

To read image data stored in the RAM, but not display on the screen.

Syntax

```
void EPD_SetRAMValue_BaseMap(const unsigned char* datas);
```

Parameters

datas: contains the black and white information that forms the image stored in RAM

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

EpdIf:: EPD_SetFrameMemory**Description**

To read image data stored in the buffer but not display on the screen.

Syntax

```
void EPD_SetFrameMemory(const unsigned char* image_buffer);
```

Parameters

image_buffer: the buffer where stores the image data in hexadecimal numbers

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

EpdIf:: EPD_UpdateDisplay**Description**

Update the ePaper display module. Always combined used with functions set the frames.

Syntax

```
void EPD_UpdateDisplay(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

There are 2 memory areas embedded in the e-paper display but once this function is called, then the next action of SetFrameMemory or ClearScreen will set the other memory area.

EpdIf:: EPD_ClearScreen_White

Description

Clear the frame memory with the White color.

Syntax

```
void EpdIf::EPD_ClearScreen_White(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

If the users want to see the actual display on the e-paper screen, the function EPD_UpdateDisplay() is required to be added behind this code.

EpdIf:: EPD_ClearScreen_Black**Description**

Clear the frame memory with the Black color.

Syntax

```
void EpdIf::EPD_ClearScreen_Black(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

If the users want to see the actual display on the e-paper screen, the function EPD_UpdateDisplay() is required to be added behind this code.

EpdIf:: EPD_Busy**Description**

Wait until the busy_pin goes to low, which is the idle state.

Syntax

```
void EpdIf::EPD_Busy(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

If the users want to see the actual display on the e-paper screen, the function EPD_UpdateDisplay() is required to be added behind this code.

EpdIf:: EPD_Reset

Description

This command will let the E-paper module reset, it is often used to awaken the module in while it' s in the deep sleep mode, you will find more details in the function EpdIf:: EPD_Sleep().

Syntax

```
void EpdIf::EPD_Reset(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

EpdIf::EPD_Sleep

Description

After this command is transmitted, the chip would enter the deep-sleep mode to save power. The deep sleep mode would return to standby by hardware reset. You can use EPD::Init() to awaken the E-paper module.

Syntax

```
void EpdIf::EPD_Sleep(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

FatfsSDCard**Class SdFatFs****Description**

Defines a class of SD FAT File system.

Syntax

```
class SdFatFs
```

Members**Public Constructors**

SdFatFs::SdFatFs Constructs a SdFatFs object

SdFatFs::~~SdFatFs Destructs a SdFatFs object

Public Methods

SdFatFs::begin	Initialize SD FAT File System
SdFatFs::end	Deinitialize SD FAT File System
SdFatFs::*getRootPath	Get the root path of the SD FAT File System
SdFatFs::readDir	List items under a specific folder
SdFatFs::mkdir	Create folder
SdFatFs::rm	Remove folder or file
SdFatFs::isDir	Check if a specific path is a directory
SdFatFs::isFile	Check if a specific path is a file
SdFatFs::getLastModTime	Get the last modified time for a file or directory
SdFatFs::setLastModTime	Set the last modified time for a file or directory
SdFatFs::status	Return the current status of SD
SdFatFs::open	Open a file

SdFatFs::begin**Description**

Initialize SD FAT File System.

Syntax

```
int SdFatFs::begin(void);
```

Parameters

The function requires no input parameter.

Returns

Returns “0” if success, else returns a negative value.

Example Code

Example: create_folder; file_read_write; get_file_attribute; last_modified_time; list_root_files.

Notes and Warnings

Include “SdFatFs.h” to use the class function.

SdFatFs::end**Description**

De-initialize SD FAT File System.

Syntax

```
int SdFatFs::end(void);
```

Parameters

The function requires no input parameter.

Returns

Returns “0” if success, else returns a negative value.

Example Code

Example: create_folder; file_read_write; get_file_attribute; last_modified_time; list_root_files.

Notes and Warnings

Include “SdFatFs.h” to use the class function.

SdFatFs::*getRootPath**Description**

Get the root path of the SD FAT File System. The logical volume character is starting from ‘0’, so the root path would like “0:” .

Syntax

```
char *SdFatFs::getRootPath(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns the root path.

Example Code

Example: create_folder; file_read_write; get_file_attribute; last_modified_time; list_root_files.

Notes and Warnings

Include “SdFatFs.h” to use the class function.

SdFatFs::readDir

Description

List items under a specific folder. List items under a specific folder and store the result in the buffer that user specified. Each item is separated by ‘0’ .

Syntax

```
int SdFatFs::readDir(char *path, char *result_buf, unsigned int bufsize);
```

Parameters

path: The absolute directory path to be listed.

result_buf: The buffer to be stored results.

bufsize: The size of result_buf. If results exceed this size, then the results larger than this size would be discarded.

Returns

Returns “0” if success, else returns a negative value.

Example Code

Example: get_file_attribute; list_root_files

Notes and Warnings

Include “SdFatFs.h” to use the class function.

SdFatFs::mkdir

Description

Create folder.

Syntax

```
int SdFatFs::mkdir(char *absolute_path);
```

Parameters

absolute_path: The absolute directory path to be created

Returns

Returns “0” if success, else returns a negative value.

Example Code

Example: create_folder

Notes and Warnings

Include “SdFatFs.h” to use the class function.

SdFatFs::rm

Description

Remove folder or file.

Syntax

```
int SdFatFs::rm(char *absolute_path);
```

Parameters

absolute_path: The absolute directory or file path to be deleted

Returns

Returns “0” if success, else returns a negative value.

Example Code

NA

Notes and Warnings

Include “SdFatFs.h” to use the class function.

SdFatFs::isDir

Description

Check if a specific path is a directory.

Syntax

```
unsigned char SdFatFs::isDir(char *absolute_path);
```

Parameters

absolute_path: The absolute path to be queried

Returns

The function returns “1” if it is a directory, else returns “0” .

Example Code

Example: get_file_attribute

Notes and Warnings

Include “SdFatFs.h” to use the class function.

SdFatFs::isFile

Description

Check if a specific path is a file.

Syntax

```
unsigned char SdFatFs::isFile(char *absolute_path);
```

Parameters

absolute_path: The absolute path to be queried

Returns

The function returns “1” if it is a directory, else returns “0” .

Example Code

Example: get_file_attribute

Notes and Warnings

Include “SdFatFs.h” to use the class function.

SdFatFs::getLastModTime**Description**

Get the last modified time for a file or directory.

Syntax

```
int SdFatFs::getLastModTime(char *absolute_path, uint16_t *year, uint16_t *month, uint16_t *date, uint16_t *hour, uint16_t *minute, uint16_t *second);
```

Parameters

absolute_path: The absolute path to be queried.

year: The value of the year.

month: The value of the month.

date: The value of the date.

hour: The value of an hour.

minute: The value of a minute.

second: field “second” contains no valid information in the current version.

Returns

The function returns “0” if success, otherwise returns a negative value for failure.

Example Code

Example: last_modified_time

Notes and Warnings

Include “SdFatFs.h” to use the class function.

SdFatFs::setLastModTime

Description

Set the last modified time for a file or directory. Ameba doesn't have built-in RTC. So we manually change file/directory last modified time.

Syntax

```
int SdFatFs::setLastModTime(char *absolute_path, uint16_t year, uint16_t month, uint16_t date, uint16_t hour,
uint16_t minute, uint16_t second);
```

Parameters

absolute_path: The absolute path to be queried.

year: The value of the year.

month: The value of the month.

date: The value of the date.

hour: The value of an hour.

minute: The value of a minute.

second: field “second” contains no valid information in the current version.

Returns

The function returns “0” if success, otherwise returns a negative value for failure.

Example Code

Example: last_modified_time

Notes and Warnings

Include “SdFatFs.h” to use the class function.

SdFatFs::open**Description**

Open a file.

Syntax

```
SdFatFile SdFatFs::open(char *absolute_path);
```

Parameters

absolute_path: The path to a file.

Returns

The file object is an instance of SdFatFile.

Example Code

Example: create_folder; file_read_write; get_file_attribute; last_modified_time; list_root_files.

Notes and Warnings

Include “SdFatFs.h” to use the class function.

SdFatFs::status

Description

Return the current status of SD.

Syntax

```
int SdFatFs::status(void);
```

Parameters

The function requires no input parameter.

Returns

Function returns “1” if ready to use, else return “0” if the status is inactivating or abnormal.

Example Code

NA.

Notes and Warnings

Include “SdFatFs.h” to use the class function.

Class SdFatFile

Description

Defines a class of SD FAT File.

Syntax

```
class SdFatFile
```

Members

Public Constructors	
SdFatFile::SdFatFile	Constructs a SdFatFile object
SdFatFile::~SdFatFile	Destructs a SdFatFile object
Public Methods	
SdFatFile::write	Write 1 byte/bytes to file
SdFatFile::read	Read 1 byte/bytes from the file
SdFatFile::peek	Read 1 byte from file without move curser
SdFatFile::available	Check if the cursor is at EOF (End-Of-File)
SdFatFile::bool	Check if file is opened
SdFatFile::seek	Change cursor to a specific position
SdFatFile::close	Close file

SdFatFile::write**Description**

Write 1 byte or bytes to the file.

Syntax

```
size_t SdFatFile::write(uint8_t c);
size_t SdFatFile::write(const uint8_t *buf, size_t size);
```

Parameters

c: The character to be written.

buf: The buffer to be written.

size: The length of buffer to be written.

Returns

The function returns the number of byte count that has been successfully written to the file.

Example Code

NA.

Notes and Warnings

Include “SdFatFile.h” to use the class function.

SdFatFile:: read

Description

Read 1 byte or bytes from the file.

Syntax

```
int SdFatFile::read(void);
```

```
int SdFatFile::read(void *buf, uint16_t nbyte);
```

Parameters

buf: The buffer to store the content.

nbyte: The buffer size. (Or can be regarded as the desired length to read).

Returns

The function returns a read character or the read size of the buffer.

Example Code

```
1. #include "FatFs_SD.h"
2.
3. char dirname[] = "testdir" ;
4. char filename[] = "test.txt" ;
5. char write_content[] = "hello world!" ;
6.
7. FatFsSD fs;
8.
9. void setup() {
10. char buf[128];
11. char absolute_filename[128];
12.
13. fs.begin();
14.
```

```
15. sprintf(absolute_filename, "%s%s", fs.getRootPath(), dirname);
16. fs.mkdir(absolute_filename);
17. printf( "create dir at \" %s\"rn" , absolute_filename);
18.
19. sprintf(absolute_filename, "%s%s/%s", fs.getRootPath(), dirname, filename);
20. SdFatFile file = fs.open(absolute_filename);
21. file.println(write_content);
22. file.close();
23. printf( "create file at \" %s\"rn" , absolute_filename);
24.
25. printf( "read back from \" %s\"rn" , absolute_filename);
26. file = fs.open(absolute_filename);
27.
28. memset(buf, 0, sizeof(buf));
29. file.read(buf, sizeof(buf));
30.
31. file.close();
32. printf( "==== content ====rn" );
33. printf( "%s" , buf);
34. printf( "==== end ====rn" );
35.
36. fs.end();
37. }
38.
39. void loop() {
40. delay(1000);
41. }
42.
```

Example: create_folder;

This example shows how to create a folder and open a file under it.

```
1. #include "FatFs_SD.h"
2.
3. char filename[] = "test.txt" ;
4. char write_content[] = "hello world!" ;
5.
6. FatFsSD fs;
7.
8. void setup() {
9.   char buf[128];
10.  char absolute_filename[128];
11.
12.  fs.begin();
13.
14.  printf( "write something to \" %s\"rn" , filename);
15.  sprintf(absolute_filename, "%s%s" , fs.getRootPath(), filename);
16.  SdFatFile file = fs.open(absolute_filename);
17.
18.  file.println(write_content);
19.
20.  file.close();
21.  printf( "write finishrn" );
22.
23.  printf( "read back from \" %s\"rn" , filename);
24.  file = fs.open(absolute_filename);
25.
26.  memset(buf, 0, sizeof(buf));
27.  file.read(buf, sizeof(buf));
28.
```



```
29. file.close();
30. printf( "==== content =====rn" );
31. printf( "%s" , buf);
32. printf( "==== end =====rn" );
33.
34. fs.end();
35. }
36.
37. void loop() {
38. delay(1000);
39. }
40.
```

Example: file_read_write;

This example shows how to open/close files and perform read/write to it.

Notes and Warnings

Include “SdFatFile.h” to use the class function.

SdFatFile:: peek

Description

Read one byte from the file without moving the curser.

Syntax

```
int SdFatFile::peek(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns the read character as an integer number.

Example Code

NA

Notes and Warnings

Include “SdFatFile.h” to use the class function.

SdFatFile:: available

Description

Check if the cursor is at EOF.

Syntax

```
int SdFatFile::available(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns “0” if the cursor is at EOF, else returns “1” .

Example Code

NA

Notes and Warnings

Include “SdFatFile.h” to use the class function.

SdFatFile:: flush

Description

It is a nop. This is an inherited function from class Stream. And it does not affect SD File.

Syntax

```
void SdFatFile::flush(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Include “SdFatFile.h” to use the class function.

SdFatFile:: seek**Description**

Change cursor to a specific position.

Syntax

```
int SdFatFile::seek(uint32_t pos);
```

Parameters

pos: The desired position.

Returns

The function returns 0 if success otherwise returns a negative value.

Example Code

NA

Notes and Warnings

Include “SdFatFile.h” in order to use the class function.

SdFatFile:: close

Description

Close file.

Syntax

```
int SdFatFile::close(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns 0 if runs successfully otherwise it returns a negative value.

Example Code

Example: last_modified_time;

The example shows how to get and set last modified time of a file.

Example: create_folder;

This example shows how to create a folder and open a file under it. The details of the code can be found in the section of SdFatFile:: read.

Example: file_read_write;

This example shows how to open/close files and perform read/write to it. The details of the code can be found in the section of SdFatFile:: read.

1. #include <FatFs_SD.h>
- 2.
3. FatFsSD fs;
- 4.
5. char filename[] = “test.txt” ;

```
6.
7. void setup() {
8.   char absolute_filename[128];
9.
10.  uint16_t year = 2021;
11.  uint16_t month = 4;
12.  uint16_t date = 4;
13.  uint16_t hour = 12;
14.  uint16_t minute = 12;
15.  uint16_t second = 12;
16.
17.  fs.begin();
18.
19.  sprintf(absolute_filename, "%s%s", fs.getRootPath(), filename);
20.  SdFatFile file = fs.open(absolute_filename);
21.  file.close();
22.
23.  fs.setLastModTime(absolute_filename, year, month, date, hour, minute, second);
24.
25.  fs.getLastModTime(absolute_filename, &year, &month, &date, &hour, &minute, &second);
26.  printf( "filename: \"%s\" \r\n" , absolute_filename);
27.  printf( "time mod: %04d/%02d/%02d %02d:%02d:%02drn" , year, month, date, hour, minute, second);
28.
29.  fs.end();
30. }
31.
32. void loop() {
33.   delay(1000);
34. }
35.
```

Notes and Warnings

Include “SdFatFile.h” in order to use the class function.

FlashMemory**Class EpdIF****FlashMemoryClass Class****Description**

Defines a class of Flash memory API

Syntax

```
class FlashMemoryClass
```

Members

Public Constructors	
FlashMemoryClass::FlashMemoryClass	Constructs a FlashMemoryClass object
FlashMemoryClass::~FlashMemoryClass	Deconstructs a FlashMemoryClass object
Public Methods	
FlashMemoryClass::begin	Initialize/Re-initialize the base address and size
FlashMemoryClass::read	Read the content to buf
FlashMemoryClass::update	Write buf back to flash memory
FlashMemoryClass::readWord	Read 4 bytes from flash memory
FlashMemoryClass::writeWord	Write 4 bytes into flash memory
FlashMemoryClass::buf_size	The buf size
FlashMemoryClass::*buf	The buf to be operated

FlashMemoryClass::FlashMemoryClass**Description**

Constructs a FlashMemoryClass object.

Syntax

FlashMemoryClass(unsigned int _base_address, unsigned int _buf_size);

Parameters

_base_address: The base address to operate.

_buf_size: The buf size for mirror a copy to reduce flash memory operation

Returns

The function returns nothing.

Example Code

Example: FleshMemory_Basic

This example demonstrates the basic use of flash memory. Since boot count is stored in flash, each time upon device boot up, the boot count will be read from the flash, add one, then write back to the flash. Ameba's flash memory can be edit in a unit of a sector which has the size of 4K bytes.

Direct read from flash memory is allowed. To write data into flash memory, each bit on flash memory can only change from '1' to '0' and it cannot change from '0' to '1'. To make sure the data are correctly written we do erase the flash memory sector before write data on it.

```
#include <FlashMemory.h>
```

```
void setup() {  
    FlashMemory.read();  
    if (FlashMemory.buf[0] == 0xFF) {  
        FlashMemory.buf[0] = 0x00;  
        FlashMemory.update();  
        Serial.println( "write count to 0" );  
    } else {  
        FlashMemory.buf[0]++;  
        FlashMemory.update();  
        Serial.print( "Boot count: ");  
        Serial.println(FlashMemory.buf[0]);  
    }  
}
```

```
}  
  
void loop() {  
  delay(1000);  
}
```

Example: ReadWriteOneWord

This example shows how to request flash memory larger than default 0x4000, and read/write one specific word (32-bit).

```
#include <FlashMemory.h>  
  
void setup() {  
  unsigned int value;  
  
  /* request flash size 0x4000 from 0xFC000 */  
  FlashMemory.begin(0xFC000, 0x4000);  
  
  /* read one word (32-bit) from 0xFC000 plus offset 0x3F00 */  
  value = FlashMemory.readWord(0x3F00);  
  printf( "value is 0x%08Xrn" , value);  
  
  if (value == 0xFFFFFFFF) {  
    value = 0;  
  } else {  
    value++;  
  }  
  
  /* write one word (32-bit) to 0xFC000 plus offset 0x3F00 */  
  FlashMemory.writeWord(0x3F00, value);  
}  
  
void loop() {  
  // put your main code here, to run repeatedly:  
}
```

Notes and Warnings

Include “FlashMemory.h” to use the class function.

FlashMemoryClass::begin

Description

Initialize/Re-initialize the base address and size. The base address shell aligns with the size of 0x1000. And the size shell is multiple of 0x1000.

Syntax

```
void begin(unsigned int _base_address, unsigned int _buf_size);
```

Parameters

_base_address: The base address

_buf_size: The desired work size

Returns

The function returns nothing.

Example Code

Example: FleshMemory_Basic

This example demonstrates the basic use of flash memory. Since boot count is stored in flash, each time upon device boot up, the boot count will be read from the flash, add one, then write back to the flash. Ameba's flash memory can be edit in a unit of a sector which has the size of 4K bytes.

Example: ReadWriteOneWord

This example shows how to request flash memory larger than default 0x4000, and read/write one specific word (32-bit). Details of the example codes can be found in the previous section of "FlashMemoryClass:: FlashMemoryClass" .

Notes and Warnings

Include "FlashMemory.h" to use the class function.

FlashMemoryClass::read

Description

Read the content to buf. Read flash memory into the buf. The size would be 0x1000.

Syntax

```
void read(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: FleshMemory_Basic

This example demonstrates the basic use of flash memory. Since boot count is stored in flash, each time upon device boot up, the boot count will be read from the flash, add one, then write back to the flash. Ameba's flash memory can be edit in a unit of a sector which has the size of 4K bytes.

Details of the example codes can be found in the previous section of “FlashMemoryClass:: FlashMemoryClass” .

Notes and Warnings

Include “FlashMemory.h” to use the class function.

FlashMemoryClass::update

Description

Write buf back to flash memory. Write flash memory with the content of the buffer. The size is 0x1000.

Syntax

```
void update(bool erase = true);
```

Parameters

erase: By default, it is true and erases flash memory before writing to it

Returns

The function returns nothing.

Example Code

Example: `FleshMemory_Basic`

This example demonstrates the basic use of flash memory. Since boot count is stored in flash, each time upon device boot up, the boot count will be read from the flash, add one, then write back to the flash. Ameba's flash memory can be edit in a unit of a sector which has the size of 4K bytes.

Details of the example codes can be found in the previous section of `"FlashMemoryClass:: FlashMemoryClass"` .

Notes and Warnings

Include `"FlashMemory.h"` to use the class function.

FlashMemoryClass::readWord

Description

Read 4 bytes from flash memory. Read 4 byte from specific offset based on base address.

Syntax

```
unsigned int readWord(unsigned int offset);
```

Parameters

offset: The offset according to the base address

Returns

The read data with a size of 4 bytes

Example Code

Example: `ReadWriteOneWord`

This example shows how to request flash memory larger than default 0x4000, and read/write one specific word (32-bit).

Details of the example codes can be found in the previous section of `"FlashMemoryClass:: FlashMemoryClass"` .

Notes and Warnings

Include `"FlashMemory.h"` to use the class function.

FlashMemoryClass::writeWord

Description

Write 4 bytes into flash memory. It will try to write 4 bytes first. If the read data differ from the write data, then we buffer the sector of flash memory, erase it, and write correct data back to it.

Syntax

```
void writeWord(unsigned int offset, unsigned int data);
```

Parameters

offset: The offset according to the base address

data: The data to be written

Returns

The function returns nothing.

Example Code

Example: ReadWriteOneWord

This example shows how to request flash memory larger than default 0x4000, and read/write one specific word (32-bit).

Details of the example codes can be found in the previous section of “FlashMemoryClass:: FlashMemoryClass” .

Notes and Warnings

Include “FlashMemory.h” to use the class function.

FlashMemoryClass::buf_size

Description

The buf size (It can be regarded as work size).

Syntax

```
unsigned int buf_size;
```

Example Code

Example: FlashMemory_Basic

This example demonstrates the basic use of flash memory. Since boot count is stored in flash, each time upon device boot up, the boot count will be read from the flash, add one, then write back to the flash. Ameba's flash memory can be edit in a unit of a sector which has the size of 4K bytes.

Details of the example codes can be found in the previous section of “FlashMemoryClass:: FlashMemoryClass” .

Notes and Warnings

Include “FlashMemory.h” to use the class function.

FlashMemoryClass::*buf

Description

The buf to be operated. Modify buf won't change the content of the buf. It needs an update to write back to flash memory.

Syntax

```
unsigned char *buf;
```

Example Code

NA

Notes and Warnings

Include “FlashMemory.h” to use the class function.

GPIO

Class DHT

DHT Class

Description

Defines a class of using DHT temperature & humidity sensors

Syntax

```
class DHT
```

Members

Public Constructors	
DHT::DHT	Constructs a DHT object
Public Methods	
DHT::begin	Initialize the DHT sensor
DHT::readTemperature	Read temperature(Fahrenheit or Celcius) from the DHT sensor
DHT::convertCtoF	Convert a value from Celcius to Fahrenheit
DHT::convertFtoC	Convert a value from Fahrenheit to Celcius
DHT::readHumidity	Read humidity(%) from the DHT sensor
DHT::computeHeatIndex	Compute the HeatIndex from the readings (Using both Rothfusz and Steadman' s equations)
DHT::read	Check if the sensor is readable

DHT::DHT

Description

Constructs a DHT object.

Syntax

```
DHT::DHT(uint8_t pin, uint8_t type, uint8_t count)
```

Parameters

pin: The Arduino digital PIN connected

type: The DHT sensor type(DHT11, DHT22, or DHT21)

count: The count is now ignored as the DHT reading algorithm adjusts itself based on the speed of the processor

Returns

The function returns nothing.

Example Code

Example:DHTTester

The code demos basic testing for various DHT humidity & temperature sensors.

Notes and Warnings

Every time must include the header file “DHT.h” in front of the project to use the class function.

```
// Example testing sketch for various DHT humidity/temperature sensors
// Written by ladyada, public domain

#include "DHT.h"

// The digital pin we're connected to.

#define DHTPIN 8

// Uncomment whatever type you're using!

#define DHTTYPE DHT11 // DHT 11

// #define DHTTYPE DHT22 // DHT 22 (AM2302), AM2321
// #define DHTTYPE DHT21 // DHT 21 (AM2301)

// Connect pin 1 (on the left) of the sensor to +5V

// NOTE: If using a board with 3.3V logic like an Arduino Due connect pin 1
// to 3.3V instead of 5V!

// Connect pin 2 of the sensor to whatever your DHTPIN is

// Connect pin 4 (on the right) of the sensor to GROUND

// Connect a 10K resistor from pin 2 (data) to pin 1 (power) of the sensor

// Initialize DHT sensor.

// Note that older versions of this library took an optional third parameter to
// tweak the timings for faster processors. This parameter is no longer needed
```

```
// as the current DHT reading algorithm adjusts itself to work on faster procs.
DHT dht(DHTPIN, DHTTYPE);

void setup() {
  Serial.begin(115200);
  Serial.println( "DHTxx test!" );
  dht.begin();
}

void loop() {
  // Wait a few seconds between measurements.
  delay(2000);

  // Reading temperature or humidity takes about 250 milliseconds!
  // Sensor readings may also be up to 2 seconds 'old' (its a very slow sensor)

  float h = dht.readHumidity();

  // Read temperature as Celsius (the default)
  float t = dht.readTemperature();

  // Read temperature as Fahrenheit (isFahrenheit = true)
  float f = dht.readTemperature(true);

  // Check if any reads failed and exit early (to try again).
  if (isnan(h) || isnan(t) || isnan(f)) {
    Serial.println( "Failed to read from DHT sensor!" );
    return;
  }

  // Compute heat index in Fahrenheit (the default)
  float hif = dht.computeHeatIndex(f, h);

  // Compute heat index in Celsius (isFahreheit = false)
  float hic = dht.computeHeatIndex(t, h, false);

  Serial.print( "Humidity:  ");
  Serial.print(h);
  Serial.print(" %t" );

  Serial.print( "Temperature:  ");
```



```
Serial.print(t);  
Serial.print(" *C ");  
Serial.print(f);  
Serial.print(" *Ft" );  
Serial.print( "Heat index: " );  
Serial.print(hic);  
Serial.print(" *C ");  
Serial.print(hif);  
Serial.println(" *F" );  
}
```

DHT::begin

Description

Initialize the DHT sensor.

Syntax

```
void DHT::begin(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: DHTTester

The code demos basic testing for various DHT humidity & temperature sensors. Please refer to code in the “DHT: DHT” section.

Notes and Warnings

Every time must include the header file “DHT.h” in front of the project to use the class function.

DHT::readTemperature

Description

Read temperature(Fahrenheit or Celcius) from the DHT sensor.

Syntax

```
float DHT::readTemperature(bool S, bool force);
```

Parameters

S: Temperature scale, True is Fahrenheit and False is Celcius

force: Index of checking sensor readability, default is False

Returns

The function returns the current temperature as a float value.

Example Code

Example: DHTTester

The code demos basic testing for various DHT humidity & temperature sensors. Please refer to code in the “DHT: DHT” section.

Notes and Warnings

Every time must include the header file “DHT.h” in front of the project to use the class function.

DHT::convertCtoF

Description

Convert a value from Celcius to Fahrenheit.

Syntax

```
float DHT::convertCtoF(float c);
```

Parameters

c: The value in Celcius

Returns

The function returns the temperature in Fahrenheit as a float number.

Example Code

Example: DHTTester

The code demos basic testing for various DHT humidity & temperature sensors. Please refer to code in the “DHT: DHT” section.

Notes and Warnings

Every time must include the header file “DHT.h” in front of the project to use the class function.

DHT::convertFtoC**Description**

Convert a value from Fahrenheit to Celcius.

Syntax

```
float DHT::convertFtoC(float f);
```

Parameters

f: The value in Fahrenheit

Returns

The function returns the temperature in Celcius as a float number.

Example Code

Example: DHTTester

The code demos basic testing for various DHT humidity & temperature sensors. Please refer to code in the “DHT: DHT” section.

Notes and Warnings

Every time must include the header file “DHT.h” in front of the project to use the class function.

DHT::computeHeatIndex

Description

Compute the HeatIndex from the readings (Using both Rothfusz and Steadman’ s equations). More details refer to http://www.wpc.ncep.noaa.gov/html/heatindex_equation.shtml .

Syntax

float DHT::computeHeatIndex(float temperature, float percentHumidity, bool isFahrenheit);

Parameters

temperature: The temperature value

percentHumidity: The humidity percent value

isFahrenheit: True, temperature value in Fahrenheit (Default); False, temperature value in Celcius

Returns

The function returns the heat index in Fahrenheit or Celsius as a float value.

Example Code

Example: DHTTester

The code demos basic testing for various DHT humidity & temperature sensors. Please refer to code in the “DHT: DHT” section.

Notes and Warnings

Every time must include the header file “DHT.h” in front of the project to use the class function.

DHT::readHumidity

Description

Reading temperature or humidity from the DHT sensor and return as a float value(%).

Syntax

```
float DHT::readHumidity(bool force);
```

Parameters

force: Ignored.

Returns

The function returns current humidity in a float number (in %).

Example Code

Example: DHTTester

The code demos basic testing for various DHT humidity & temperature sensors. Please refer to code in the “DHT: DHT” section.

Notes and Warnings

Every time must include the header file “DHT.h” in front of the project to use the class function. Reading temperature or humidity takes about 250 milliseconds! Sensor readings may also be up to 2 seconds.

DHT::read

Description

Check if the sensor is readable.

Syntax

```
boolean DHT::read(bool force);
```

Parameters

force: Index of whether checking the sensor was read less than two seconds ago or not. False, checking; True, not checking.

Returns

Return the last correct measurement of the sensor. False, low means not readable; True, high means readable.

Example Code

Example: DHTTester

The code demos basic testing for various DHT humidity & temperature sensors. Please refer to code in the “DHT: DHT” section.

Notes and Warnings

Every time must include the header file “DHT.h” in front of the project to use the class function.

Class HttpClient

InterruptLock Class

Description

Defines a class of turning off/on interrupts temporarily

Syntax

```
class InterruptLock
```

Members

Public Constructors	
InterruptLock::InterruptLock	Constructs a InterruptLock object
InterruptLock::~~ InterruptLock	Deconstructs a InterruptLock object

GTimer

Class EpdIF

GTimerClass Class

Description

GTimer is a hardware timer and this class is to operate it. The GTimer occupy same resource as PWM. Please make sure the timer is not conflict with you PWM index.

Syntax

```
class GTimerClass
```

Members

Public Constructors	
GTimerClass::GTimerClass	Constructs a GTimerClass object
Public Methods	
GTimerClass::begin	Initialize a timer and start it immediately
GTimerClass::stop	Stop a specific timer
GTimerClass::reload	Reload a specific timer
GTimerClass::read_us	Read current countdown value

GTimerClass::begin

Description

Initialize a timer and start it immediately.

Syntax

```
void GTimerClass::begin(uint32_t timerid, uint32_t duration_us, void (*handler)(uint32_t), bool periodical, uint32_t userdata);
```

Parameters

timerid: There are 5 valid GTimer with timer id 0~4.

duration_us: The duration of the timer. The time unit is microsecond and the precision is 32768Hz.

periodical: By default, the timer would keep periodically countdown and reload which means the handler would periodically be invoked.

userdate: The user data brings to the handler.

Returns

The function returns nothing.

Example Code

Example: TimerOneshot

```
/*  
  
This sketch shows how to use several hardware timers in invoke handler only once for each timer.  
  
*/  
  
#include <GTimer.h>  
  
void myhandler(uint32_t data) {  
  Serial.print( "I am timer!" );  
  Serial.println(data);  
}  
  
void setup() {  
  // Open serial communications and wait for port to open:  
  Serial.begin(115200);  
  
  while (!Serial) {  
    ; // wait for serial port to connect. Needed for native USB port only  
  }  
  
  // timerid 0, period 1s, invoke myhandler, invoke only once, user data is 0  
  GTimer.begin(0, 1 * 1000 * 1000, myhandler, false, 0);  
  
  // timerid 1, period 2s, invoke myhandler, invoke only once, user data is 1  
  GTimer.begin(1, 2 * 1000 * 1000, myhandler, false, 1);  
  
  GTimer.begin(2, 3 * 1000 * 1000, myhandler, false, 2);  
  
  GTimer.begin(3, 4 * 1000 * 1000, myhandler, false, 3);  
}
```



```
void loop() {
  delay(1000);
}
```

Example: TimerPeriodical

```
/*
```

This sketch shows how to use hardware timer and invoke interrupt handler periodically

```
*/
```

```
#include <GTimer.h>
```

```
int counter = 0;
```

```
void myhandler(uint32_t data) {
```

```
  counter++;
```

```
  Serial.print( "counter: ");
```

```
  Serial.println(counter);
```

```
  if (counter >= 10) {
```

```
    Serial.println( "stop timer" );
```

```
    GTimer.stop(0);
```

```
  }
```

```
}
```

```
void setup() {
```

```
  // Open serial communications and wait for port to open:
```

```
  Serial.begin(115200);
```

```
  while (!Serial) {
```

```
    ; // wait for serial port to connect. Needed for native USB port only
```

```
  }
```

```
  // timerid 0, period 1s, invoke myhandler
```

```
  GTimer.begin(0, (1 * 1000 * 1000), myhandler);
```

```
}
```

```
void loop() {
```

```
  delay(1000);
```

```
}
```

Notes and Warnings

Include “GTimer.h” to use the class function.

GTimerClass::stop

Description

Stop a specific timer

Syntax

```
void GTimerClass::stop(uint32_t timerid);
```

Parameters

timerid: Stop the timer with this timer id

Returns

The function returns nothing.

Example Code

Example: TimerPeriodical, please refer to GTimerClass:: begin for more details.

Notes and Warnings

Include “GTimer.h” to use the class function.

GTimerClass::reload

Description

Reload a specific timer. The GTimer is a countdown timer. Reload it would make it discard the current countdown value and restart countdown based on the duration.

Syntax

```
void GTimerClass::reload(uint32_t timerid, uint32_t duration_us);
```

Parameters

timerid: The timer to be modified

duration_us: The updated duration in unit of microseconds

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Include “GTimer.h” to use the class function.

GTimerClass::read_us**Description**

Read the current countdown value

Syntax

```
uint64_t GTimerClass::read_us(uint32_t timerid);
```

Parameters

timerid: The timer to be read

Returns

The function returns the current countdown value.

Example Code

NA

Notes and Warnings

Include “GTimer.h” to use the class function.

Http

Class HttpClient

HttpClient Class

Description

Defines a class of using HttpClient

Syntax

```
class HttpClient
```

Members

Public Constructors	
HttpClient::HttpClient	Constructs a HttpClient object
Public Methods	
HttpClient::beginRequest	Start a more complex request
HttpClient::endRequest	End a more complex request
HttpClient::get	Connect to the server and start to send a GET request
HttpClient::post	Connect to the server and start to send a POST request
HttpClient::put	Connect to the server and start to send a PUT request
HttpClient::startRequest	Connect to the server and start to send the request
HttpClient::sendHeader	Send an additional header line
HttpClient::sendBasicAuth	Send a basic authentication header
HttpClient::finishRequest	Finish sending the HTTP request
HttpClient::responseStatusCode	Get the HTTP status code contained in the response
HttpClient::readHeader	Read the next character of the response headers
HttpClient::skipResponseHeaders	Skip any response headers to get to the body
HttpClient::endOfHeadersReached	Test whether all of the response headers have been consumed
HttpClient::endOfBodyReached	Test whether the end of the body has been reached
HttpClient::contentLength	Return the length of the body

HttpClient::HttpClient

Description

Constructs a HttpClient object. If Macro “PROXY_ENABLED” is defined, currently disabled as introduces a dependency on DNS.h in Ethernet.

Syntax

```
HttpClient::HttpClient(Client& aClient, const char* aProxy = NULL, uint16_t aProxyPort = 0);
```

```
HttpClient::HttpClient(Client& aClient);
```

Parameters

aClient: The object of class WiFiClient.

aProxy: The proxy name. The default proxy name is “NULL” .

aProxyPort: The proxy port. The default value for the proxy port is 0.

Returns

The function returns nothing.

Example Code

Example: SimpleHttpExample

The example demonstrate how to download the content from URL indicated in kHostname[].

```
#include <HttpClient.h>
```

```
#include <WiFi.h>
```

```
#include <WiFiClient.h>
```

```
char ssid[] = “YourNetwork” ;// your network SSID (name)
```

```
char pass[] = “password” ;// your network password (use for WPA, or use as key for WEP)
```

```
int keyIndex = 0; // your network key Index number (needed only for WEP)
```

```
// Name of the server we want to connect to
```

```
const char kHostname[] = “www.google.com” ;
```

```
const char kPath[] = “/” ;
```

```
// Number of milliseconds to wait without receiving any data before we give up
```

```
const int kNetworkTimeout = 30*1000;

// Number of milliseconds to wait if no data is available before trying again

const int kNetworkDelay = 1000;

int status = WL_IDLE_STATUS;

void setup() {
  Serial.begin(9600);

  while ( status != WL_CONNECTED) {
    Serial.print( "Attempting to connect to SSID: ");
    Serial.println(ssid);
    status = WiFi.begin(ssid, pass);
    // wait 10 seconds for connection:
    delay(10000);
  }
  Serial.println( "Connected to wifi" );
  printWifiStatus();
}

void loop() {
  int err =0;
  WiFiClient c;
  HttpClient http(c);
  err = http.get(kHostname, kPath);
  if (err == 0)
  {
    Serial.println( "startedRequest ok" );
    err = http.responseStatusCode();
    if (err >= 0)
    {
      Serial.print( "Got status code: ");
      Serial.println(err);
      // Usually you'd check that the response code is 200 or a
```

```

// similar "success" code (200-299) before carrying on,

// but we' ll print out whatever response we get
err = http.skipResponseHeaders();

if (err >= 0)
{
    int bodyLen = http.contentLength();

    Serial.print( "Content length is: ");
    Serial.println(bodyLen);

    Serial.println();

    Serial.println( "Body returned follows:" );

    // Now we' ve got to the body, so we can print it out

    unsigned long timeoutStart = millis();

    char c;

    // Whilst we haven' t timed out & haven' t reached the end of the body

    while ( (http.connected() || http.available()) &&
((millis() - timeoutStart) < kNetworkTimeout) )
    {
        if (http.available())
        {
            c = http.read();

            // Print out this character

            Serial.print(c);

            bodyLen--;

            // We read something, reset the timeout counter

            timeoutStart = millis();

        }

        else
        {
            // We haven' t got any data, so let' s pause to allow some to arrive

            delay(kNetworkDelay);

```

```
}  
}  
}  
else  
{  
  Serial.print( "Failed to skip response headers:  ");  
  Serial.println(err);  
}  
}  
else  
{  
  Serial.print( "Getting response failed:  ");  
  Serial.println(err);  
}  
}  
else  
{  
  Serial.print( "Connect failed:  ");  
  Serial.println(err);  
}  
}  
http.stop();  
// And just stop, now that we' ve tried a download  
while(1);  
}  
void printWifiStatus() {  
  // print the SSID of the network you' re attached to:  
  Serial.print( "SSID:  ");  
  Serial.println(WiFi.SSID());  
  // print your WiFi shield' s IP address:  
  IPAddress ip = WiFi.localIP();
```



```
Serial.print( "IP Address: ");  
Serial.println(ip);  
  
// print the received signal strength:  
  
long rssi = WiFi.RSSI();  
Serial.print( "signal strength (RSSI):" );  
Serial.print(rssi);  
Serial.println(" dBm" );  
  
}
```

Notes and Warnings

Include "HttpClient.h" to use the class function.

HttpClient::beginRequest

Description

Start a more complex request. Use this when you need to send additional headers in the request, but you will also need to call endRequest() when you are finished.

Syntax

```
void HttpClient::beginRequest(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: SimpleHttpExample

The example demonstrates how to download the content from the URL indicated in kHostname[]. Details of the code can be found in the previous section of HttpClient: HttpClient.

Notes and Warnings

Include “HttpClient.h” to use the class function.

HttpClient::endRequest

Description

End a more complex request. Use this when you need to have sent additional headers in the request, but you will also need to call beginRequest() at the start.

Syntax

```
void HttpClient::endRequest(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: SimpleHttpExample

The example demonstrates how to download the content from the URL indicated in kHostname[]. Details of the code can be found in the previous section of HttpClient:: HttpClient.

Notes and Warnings

Include “HttpClient.h” to use the class function.

HttpClient::get

Description

Connect to the server and start to send a “GET” request. If the input parameter contains “aServerAddress” , the connection will not perform a DNS lookup and just purely connect to the given IP address.

Syntax

```

int HttpClient::get(const char* aServerName, uint16_t aServerPort, const char* aURLPath, const char* aUserAgent =
NULL);
int HttpClient::get(const char* aServerName, const char* aURLPath, const char* aUserAgent = NULL);
int HttpClient::get(const IPAddress& aServerAddress, const char* aServerName, uint16_t aServerPort, const char*
aURLPath, const char* aUserAgent = NULL);
int HttpClient::get(const IPAddress& aServerAddress, const char* aServerName, const char* aURLPath, const char*
aUserAgent = NULL);

```

Parameters

aServerName: The name of the server being connected to. If aServerName is “NULL” , the “Host” header line will not be sent.

aServerPort: The port on which server connected.

aURLPath: The URL to request.

aUserAgent: User-Agent string to be sent. If aUserAgent indicated as “NULL” , the default user-agent kUserAgent will be sent.

aServerAddress: IP address of the server to connect to.

Returns

Return 0 if successful, otherwise indicates an error occurs.

Example Code

Example: SimpleHttpExample

The example demonstrates how to download the content from the URL indicated in kHostname[]. Details of the code can be found in the previous section of HttpClient:: HttpClient.

Notes and Warnings

Include “HttpClient.h” to use the class function.

HttpClient::post

Description

Connect to the server and start to send a “POST” request. If the input parameter has “aServerAddress” , connects doesn’t perform a DNS lookup and just connects to the given IP address.

Syntax

```
int HttpClient::post(const char* aServerName, uint16_t aServerPort, const char* aURLPath, const char* aUserAgent = NULL);  
int HttpClient::post(const char* aServerName, const char* aURLPath, const char* aUserAgent = NULL);  
int HttpClient::post(const IPAddress& aServerAddress, const char* aServerName, uint16_t aServerPort, const char* aURLPath, const char* aUserAgent = NULL);  
int HttpClient::post(const IPAddress& aServerAddress, const char* aServerName, const char* aURLPath, const char* aUserAgent = NULL);
```

Parameters

aServerName: Name of the server being connected to. If NULL, the “Host” header line won’t be sent.

aServerPort: Port to connect to on the server.

aURLPath: Url to request.

aUserAgent: User-Agent string to be sent. If aUserAgent indicated as “NULL” , the default user-agent kUserAgent will be sent.

aServerAddress: IP address of the server to connect to.

Returns

Return 0 if successful, otherwise indicates an error occurs.

Example Code

Example: SimpleHttpExample

The example demonstrates how to download the content from the URL indicated in kHostname[]. Details of the code can be found in the previous section of HttpClient:: HttpClient.

Notes and Warnings

Include “HttpClient.h” to use the class function.

HttpClient::put**Description**

Connect to the server and start to send a PUT request. If the input parameter has “aServerAddress” , connects doesn’t perform a DNS lookup and just connects to the given IP address.

Syntax

```
int HttpClient::put(const char* aServerName, uint16_t aServerPort, const char* aURLPath, const char* aUserAgent =
NULL);
int HttpClient::put(const char* aServerName, const char* aURLPath, const char* aUserAgent = NULL);
int HttpClient::put(const IPAddress& aServerAddress, const char* aServerName, uint16_t aServerPort, const char*
aURLPath, const char* aUserAgent = NULL);
int HttpClient::put(const IPAddress& aServerAddress, const char* aServerName, const char* aURLPath, const char*
aUserAgent = NULL);
```

Parameters

aServerName: Name of the server being connected to. If NULL, the “Host” header line won’t be sent.

aServerPort: Port to connect to on the server.

aURLPath: Url to request.

aUserAgent: User-Agent string to be sent. If aUserAgent indicated as “NULL” , the default user-agent kUserAgent will be sent.

aServerAddress: IP address of the server to connect to.

Returns

Return 0 if successful, otherwise indicates an error occurs.

Example Code

Example: SimpleHttpExample

The example demonstrates how to download the content from the URL indicated in kHostname[]. Details of the code can be found in the previous section of HttpClient:: HttpClient.

Notes and Warnings

Include “HttpClient.h” to use the class function.

HttpClient::startRequest**Description**

Connect to the server and start to send the request.

Syntax

```
int HttpClient::startRequest(const char* aServerName, uint16_t aServerPort, const char* aURLPath, const char* aHttpMethod, const char* aUserAgent);
```

```
int HttpClient::startRequest(const IPAddress& aServerAddress, const char* aServerName, uint16_t aServerPort, const char* aURLPath, const char* aHttpMethod, const char* aUserAgent);
```

Parameters

aServerAddress: IP address of the server to connect to.

aServerName: Name of the server being connected to. If NULL, the “Host” header line won’t be sent.

aServerPort: Port to connect to on the server.

aURLPath: Url to request.

aHttpMethod: Type of HTTP request to make, e.g. “GET” , “POST” , etc.

aUserAgent: User-Agent string to send. If NULL the default user-agent kUserAgent will be sent.

Returns

Return 0 if successful, else error.

Example Code

Example: SimpleHttpExample

The example demonstrates how to download the content from the URL indicated in kHostname[]. Details of the code can be found in the previous section of HttpClient:: HttpClient.

Notes and Warnings

Include “HttpClient.h” to use the class function.

HttpClient::sendHeader

Description

The function sends an additional header line.

The function void HttpClient:: sendHeader(const char* aHeader);can only be called in between the calls to startRequest and finishRequest.

The other 2 functions void HttpClient::sendHeader(const char* aHeaderName, const char* aHeaderValue); and void HttpClient::sendHeader(const char* aHeaderName, const int aHeaderValue); are alternate form the previous one, which takes the header name and content as separately (as strings or integer). For example, to send an XXXXXX header, user might call sendHeader(“XXXXXX” , “Something”) or sendHeader(“XXXXXX” , 123).And the call will add the “: ” in the log to separate different header in the case of multiple headers.

Syntax

```
void HttpClient::sendHeader(const char* aHeader);  
void HttpClient::sendHeader(const char* aHeaderName, const char* aHeaderValue);  
void HttpClient::sendHeader(const char* aHeaderName, const int aHeaderValue);
```

Parameters

aHeader: Header line to send, in its entirety (but without the trailing CRLF. E.g. “Authorization: Basic YQDDCAIGES” .

aHeaderName: Type of header being sent.

aHeaderValue: Value for that header.

Returns

The function returns nothing.

Example Code

Example: SimpleHttpExample

The example demonstrates how to download the content from the URL indicated in kHostname[]. Details of the code can be found in the previous section of HttpClient:: HttpClient.

Notes and Warnings

Include “HttpClient.h” to use the class function.

HttpClient::sendBasicAuth**Description**

The function sends a basic authentication header which will encode the given username and password, and send them in a suitable header line for doing Basic Authentication.

Syntax

```
void HttpClient::sendBasicAuth(const char* aUser, const char* aPassword);
```

Parameters

aUser: Username for the authorization.

aPassword: Password for the user aUser.

Returns

The function returns nothing.

Example Code

Example: SimpleHttpExample

The example demonstrates how to download the content from the URL indicated in kHostname[]. Details of the code can be found in the previous section of HttpClient:: HttpClient.

Notes and Warnings

Include “HttpClient.h” to use the class function.

HttpClient::finishRequest

Description

Finish sending the HTTP request. The function sends a blank line to signify the end of the request.

Syntax

```
void HttpClient::finishRequest(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: SimpleHttpExample

The example demonstrates how to download the content from the URL indicated in kHostname[]. Details of the code can be found in the previous section of HttpClient:: HttpClient.

Notes and Warnings

Include “HttpClient.h” to use the class function.

HttpClient::responseStatusCode

Description

Get the HTTP status code contained in the response. For example, “200” for successful requests, “404” for file not found, etc.

Syntax

```
int HttpClient::responseStatusCode(void);
```

Parameters

The function requires no input parameter.

Returns

Return 0 if successful, else error.

Example Code

Example: SimpleHttpExample

The example demonstrates how to download the content from the URL indicated in kHostname[]. Details of the code can be found in the previous section of HttpClient:: HttpClient.

Notes and Warnings

Include “HttpClient.h” to use the class function.

HttpClient::readHeader

Description

The function reads the next character of the response headers. This functions the same as read() but to be used when reading through the headers which are slightly less efficient. The user might check whether the end of the headers has been reached by calling endOfHeadersReached(), although after that point this will still return data as read() would.

Syntax

```
int HttpClient::readHeader(void);
```

Parameters

The function requires no input parameter.

Returns

Return the next character of the response headers.

Example Code

Example: SimpleHttpExample

The example demonstrates how to download the content from the URL indicated in kHostname[]. Details of the code can be found in the previous section of HttpClient: HttpClient.

Notes and Warnings

Include “HttpClient.h” to use the class function.

HttpClient::skipResponseHeaders

Description

Skip any response headers to get to the body. Use this if you don't want to do any special processing of the headers returned in the response. You can also use it after you've found all of the headers you're interested in, and just want to get on with processing the body.

Syntax

```
int HttpClient::skipResponseHeaders(void);
```

Parameters

The function requires no input parameter.

Returns

Return 0 if successful, else error.

Example Code

Example: SimpleHttpExample

The example demonstrates how to download the content from the URL indicated in kHostname[]. Details of the code can be found in the previous section of HttpClient:: HttpClient.

Notes and Warnings

Include “HttpClient.h” to use the class function.

HttpClient::endOfHeadersReached

Description

Test whether all of the response headers have been consumed.

Syntax

```
bool HttpClient::endOfHeadersReached(void);
```

Parameters

The function requires no input parameter.

Returns

Return true if we are now processing the response body, else false.

Example Code

Example: SimpleHttpExample

The example demonstrates how to download the content from the URL indicated in kHostname[]. Details of the code can be found in the previous section of HttpClient:: HttpClient.

Notes and Warnings

Include “HttpClient.h” to use the class function.

HttpClient::endOfBodyReached

Description

Test whether the end of the body has been reached. It only works if the Content-Length header was returned by the server.

Syntax

```
bool HttpClient::endOfBodyReached(void);
```

Parameters

The function requires no input parameter.

Returns

Return true if we are now at the end of the body, else false.

Example Code

Example: SimpleHttpExample

The example demonstrates how to download the content from the URL indicated in kHostname[]. Details of the code can be found in the previous section of HttpClient:: HttpClient.

Notes and Warnings

Include “HttpClient.h” to use the class function.

HttpClient::contentLength

Description

The function returns the length of the body.

Syntax

```
int HttpClient::contentLength(void);
```

Parameters

The function requires no input parameter.

Returns

Return Length of the body, in bytes, or kNoContentLengthHeader if no Content-Length header was returned by the server.

Example Code

Example: SimpleHttpExample

The example demonstrates how to download the content from the URL indicated in kHostname[]. Details of the code can be found in the previous section of HttpClient:: HttpClient.

Notes and Warnings

Include “HttpClient.h” to use the class function.

IRDevice

Class HttpClient

IRDevice Class

Description

A class used for managing, sending, and receiving data using IR.

Syntax

```
class IRDevice
```

Members

Public Constructors	
A public constructor should not be used as this class is intended to be a singleton class. Access member functions using the object instance named IR.	

Public Methods	
IRDevice::getFreq	Get the current IR modulation frequency
IRDevice::begin	Allocate resources and start the IR device with a custom frequency
IRDevice::end	Stop the IR device operations and free up resources
IRDevice::send	Send IR raw data
IRDevice::beginNEC	Allocate resources and start the IR device with a frequency suitable for the NEC protocol
IRDevice::sendNEC	Send data using the NEC protocol
IRDevice::recvNEC	Receive data using the NEC protocol

IRDevice::getFreq

Description

Get the current IR modulation frequency.

Syntax

```
uint32_t getFreq(void);
```

Parameters

The function requires no input parameter.

Returns

Currently set IR modulation frequency in Hertz.

Example Code

NA

Notes and Warnings

NA

IRDevice::begin

Description

Allocate resources and start the IR device with a custom frequency.

Syntax

```
void begin(uint8_t receivePin, uint8_t transmitPin, uint32_t irMode, uint32_t freq);
```

Parameters

receivePin: pin on which IR sensor is connected. Hardware IR receiver is available at pins 3, 8, 17.

transmitPin: pin on which IR LED is connected. Hardware IR transmitter is available at pins 6, 9, 16.

irMode: transmit or receive mode. Valid values: IR_MODE_TX, IR_MODE_RX

freq: IR modulation frequency in Hertz

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

IR device can only operate in either transmit or receive mode.

IRDevice::end**Description**

Stop the IR device operations and free up resources.

Syntax

```
void end(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

IRDevice::send

Description

Send IR raw data.

Syntax

```
void send(const unsigned int buf[ ], uint16_t len);
```

Parameters

buf[] : IR raw signals (in us) in an array form.

len: total length of the IR raw signal array.

Returns

The function returns nothing.

Example Code

```
#include "IRDevice.h"
```

```
// User defined txPin, rxPin and carrier frequency
```

```
#define IR_RX_PIN 8
```

```
#define IR_TX_PIN 9
```

```
#define CARRIER_FREQ 38000
```

```
unsigned int irRawSignal[] = {
```



```

9000, 4500, // starting bit

560, 560, 560, 560, 560, 1690, 560, 560, 560, 560, 560, 560, 560, 560, 560, // address 00100000 : 4

560, 1690, 560, 1690, 560, 560, 560, 1690, 560, 1690, 560, 1690, 560, 1690, 560, 1690, // ~ address 11011111

560, 560, 560, 560, 560, 560, 560, 1690, 560, 560, 560, 560, 560, 560, 560, 560, // data 00010000 : 8

560, 1690, 560, 1690, 560, 1690, 560, 560, 560, 1690, 560, 1690, 560, 1690, 560, 1690, //~ data 11101111

560 // stoping bit

};

int DataLen = sizeof(irRawSignal) / sizeof(irRawSignal[0]); // 284/ 4 = 71

void setup()
{
  Serial.begin(115200);

  IR.begin(IR_RX_PIN, IR_TX_PIN, IR_MODE_TX, CARRIER_FREQ);
}

void loop()
{
  IR.send(irRawSignal, DataLen);

  Serial.println( "Finished Sending NEC Raw Data..." );

  delay(3000);
}

```

Notes and Warnings

IR Raw Data array contains information in the form of consecutive microseconds (us). For more details, please refer to: <http://www.righ.to.com/2009/08/multi-protocol-infrared-remote-library.html>.

IRDevice::beginNEC

Description

Allocate resources and start the IR device with a frequency suitable for the NEC protocol.

Syntax

```
void beginNEC(uint8_t receivePin, uint8_t transmitPin, uint32_t irMode);
```

Parameters

receivePin: pin on which IR sensor is connected. Hardware IR receiver is available at pins 3, 8, 17.

transmitPin: pin on which IR LED is connected. Hardware IR transmitter is available at pins 6, 9, 16.

irMode: transmit or receive mode. Valid values: IR_MODE_TX, IR_MODE_RX

Returns

The function returns nothing.

Example Code

Example: IRRecvNEC

```
#include "IRDevice.h"

uint8_t adr = 0;

uint8_t cmd = 0;

void setup() {
  //Initialize serial and wait for port to open:
  Serial.begin(115200);

  while (!Serial) {
    ; // wait for serial port to connect. Needed for native USB port only
  }

  IR.beginNEC(8, 9, IR_MODE_RX); // configure for NEC IR protocol
}

void loop() {
  if (IR.recvNEC(adr, cmd, 1000)) {
    Serial.print( "Received ");
    Serial.print(adr);
    Serial.print(cmd);
    Serial.println();
  } else {
```

```
Serial.println( "Received nothing, timed out" );  
}  
//IR.end();  
}
```

Notes and Warnings

IR device can only operate in either transmit or receive mode. Refer to <https://techdocs.altium.com/display/FPGA/NEC+Infrared+Transmission+Protocol> for the NEC protocol.

IRDevice::sendNEC

Description

Send data using the NEC protocol.

Syntax

```
void sendNEC(uint8_t adr, uint8_t cmd);
```

Parameters

adr: 8-bit address to transmit

cmd: 8-bit command to transmit

Returns

The function returns nothing.

Example Code

Example: IRSendNEC

```
#include "IRDevice.h"
```

```
uint8_t adr = 0;
```

```
uint8_t cmd = 0;
```

```
void setup() {
```

```
//Initialize serial and wait for port to open:
Serial.begin(115200);
while (!Serial) {
; // wait for serial port to connect. Needed for native USB port only
}
IR.beginNEC(8, 9, IR_MODE_TX); // configure for NEC IR protocol
}
void loop() {
if (cmd++ >=255) {
adr++;
}
IR.sendNEC(adr, cmd);
Serial.print( "Sent ");
Serial.print(adr);
Serial.print(cmd);
Serial.println();
//IR.end(); // Call this method to stop IR device and free up the pins for other uses
}
```

Notes and Warnings

IR device can only operate in either transmit or receive mode. Refer to <https://techdocs.altium.com/display/FPGA/NEC+Infrared+Transmission+Protocol> for the NEC protocol.

IRDevice::recvNEC

Description

Receive data using the NEC protocol.

Syntax

```
void recvNEC(uint8_t& adr, uint8_t& cmd uint32_t timeout);
```

Parameters

adr: variable to store received NEC address

cmd: variable to store received NEC command

timeout: time duration to wait for an incoming transmission

Returns

The function returns “1” if data has been received, returns “0” if no data has been received.

Example Code

Example: IRRecvNEC

Details of the code can be found in the previous section of IRDevice::beginNEC.

Notes and Warnings

IR device can only operate in either transmit or receive mode. Refer to <https://techdocs.altium.com/display/FPGA/NEC+Infrared+Transmission+Protocol> for the NEC protocol.

MDNS**Class HttpClient****MDNSClass Class****Description**

A class used for registering and removing MDNS service records.

Syntax

```
class MDNSClass
```

Members

Public Constructors	
The public constructor should not be used as this class is intended to be a singleton class. Access member functions using the object instance named MDNS.	

Public Methods	
MDNSClass::begin	Start MDNS operations
MDNSClass::end	Stop MDNS operations
MDNSClass::registerService	Add a service record
MDNSClass::deregisterService	Remove service record
MDNSClass::updateService	Update service record

MDNSClass::begin

Description

Start MDNS operations to begin responding to MDNS queries.

Syntax

```
void begin(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: mDNS_On_Arduino_IDE

This example shows how to register Ameba as a service that can be recognized by Arduino IDE. If both of the PC runs Arduino IDE and the Ameba board are connecting to the same local network. Then you can find Ameba in “Tools” -> “Port” -> “Arduino at 192.168.1.238 (Ameba RTL8195A), which means the Arduino IDE find Ameba via mDNS.

```
#include <WiFi.h>
```

```
#include <AmebaMDNS.h>
```

```
char ssid[] = “yourNetwork” ;// your network SSID (name)
```

```
char pass[] = “secretPassword” ;// your network password
```

```
MDNSService service( “MyAmeba” , “_arduino._tcp” , “local” , 5000);
```

```
void setup() {
```

```

printf( "Try to connect to %srn" , ssid);

while (WiFi.begin(ssid, pass) != WL_CONNECTED) {

printf( "Failed. Wait 1s and retry...rn" );

delay(1000);

}

printf( "Connected to %srn" , ssid);

service.addTxtRecord( "board" , strlen( "ameba_rtl8195a" ), "ameba_rtl8195a" );

service.addTxtRecord( "auth_upload" , strlen( "no" ), "no" );

service.addTxtRecord( "tcp_check" , strlen( "no" ), "no" );

service.addTxtRecord( "ssh_upload" , strlen( "no" ), "no" );

printf( "Start mDNS servicern" );

MDNS.begin();

printf( "register mDNS servicern" );

MDNS.registerService(service);

}

void loop() {

// put your main code here, to run repeatedly:

delay(1000);

}

```

Notes and Warnings

Include "AmebaMDNS.h" to use the class function.

MDNSClass::end

Description

Stop MDNS operations and stop responding to MDNS queries.

Syntax

```
void end(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Include “AmebaMDNS.h” to use the class function.

MDNSClass::registerService

Description

Add a service record to be included in MDNS responses.

Syntax

```
void register service(MDNSService service);
```

Parameters

service: MDNSService class object with required MDNS service data

Returns

The function returns nothing.

Example Code

Example: mDNS_On_Arduino_IDE

Details of the code can be found in the previous section of MDNSClass:: begin.

Notes and Warnings

Include “AmebaMDNS.h” to use the class function.

MDNSClass::deregisterService

Description

Remove a service record from MDNS responses.

Syntax

```
void deregisterService(MDNSService service);
```

Parameters

service: MDNSService class object to be removed

Returns

The function returns nothing.

Example Code

Example: mDNS_On_Arduino_IDE

Details of the code can be found in the previous section of MDNSClass:: begin.

Notes and Warnings

Include “AmebaMDNS.h” to use the class function.

MDNSClass::updateService

Description

Update a service record.

Syntax

```
void updateService(MDNSService service, unsigned int ttl);
```

Parameters

service: MDNSService class object to be updated

ttl: time-to-live(TTL) for service

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Include “AmebaMDNS.h” to use the class function.

Class HttpClient**MDNSService Class****Description**

A class used for creating MDNS service records.

Syntax

```
class MDNSService
```

Members

Public Constructors	
MDNSService::MDNSService	Create a MDNS service record
Public Methods	
MDNSService::addTxtRecord	Add text to MDNS service record

MDNSService::MDNSService**Description**

Create a MDNS service record.

Syntax

```
MDNSService(char* name, char* service_type, char* domain, unsigned short port, int bufsize);
```

Parameters

name: device name

service_type: MDNS service type

domain: host domain

port: network port

bufsize: size of buffer for MDNS text record

Returns

The function returns nothing.

Example Code

Example: mDNS_On_Arduino_IDE

Notes and Warnings

Include “AmebaMDNS.h” to use the class function.

MDNSService::addTxtRecord**Description**

Add text to MDNS service record.

Syntax

```
int addTextRecord(char* key, int value_len, char* value);
```

Parameters

key: record type expressed as character string

value_len: length of value string

value: record value expressed as character string

Returns

0 if add record successful

Example Code

Example: mDNS_On_Arduino_IDE

Notes and Warnings

Include “AmebaMDNS.h” to use the class function.

MQTTClient

Class PMUClass

PubSubClient Class

Description

Defines a class of MQTT implementation for Ameba.

Syntax

```
class PubSubClient
```

Members

Public Constructors	
PubSubClient::PubSubClient	Constructs a PubSubClient object
Public Methods	
PubSubClient::setServer	Set MQTT server address and port
PubSubClient::setCallback	Set callback function
PubSubClient::setClient	Set WiFi client
PubSubClient::setStream	Set data stream
PubSubClient::connect	Attempt to connect to server
PubSubClient::disconnect	Disconnect from current session
PubSubClient::publish	Publish a message to server
PubSubClient::publish_P	Same as above
PubSubClient::subscribe	Subscribe to a topic
PubSubClient::unsubscribe	Unsubscribe to a topic
PubSubClient::loop	Keep MQTT session alive and process any queuing tasks
PubSubClient::connected	Check if client still connected
PubSubClient::state	Return connection state

PubSubClient::PubSubClient

Description

Constructs a PubSubClient object and, if applicable, sets server address, port, callback function, data stream and wifi client.

Syntax

```

PubSubClient::PubSubClient();
PubSubClient::PubSubClient(Client& client);
PubSubClient::PubSubClient(IPAddress, uint16_t, Client& client);
PubSubClient::PubSubClient(IPAddress, uint16_t, Client& client, Stream&);
PubSubClient::PubSubClient(IPAddress, uint16_t, MQTT_CALLBACK_SIGNATURE, Client& client);
PubSubClient::PubSubClient(IPAddress, uint16_t, MQTT_CALLBACK_SIGNATURE, Client& client, Stream&);
PubSubClient::PubSubClient(uint8_t *, uint16_t, Client& client);
PubSubClient::PubSubClient(uint8_t *, uint16_t, Client& client, Stream&);
PubSubClient::PubSubClient(uint8_t *, uint16_t, MQTT_CALLBACK_SIGNATURE, Client& client);
PubSubClient::PubSubClient(uint8_t *, uint16_t, MQTT_CALLBACK_SIGNATURE, Client& client, Stream&);
PubSubClient::PubSubClient(const char*, uint16_t, Client& client);
PubSubClient::PubSubClient(const char*, uint16_t, Client& client, Stream&);
PubSubClient::PubSubClient(const char*, uint16_t, MQTT_CALLBACK_SIGNATURE, Client& client);

```

```
PubSubClient::PubSubClient(const char*, uint16_t, MQTT_CALLBACK_SIGNATURE, Client& client, Stream&);
```

Parameters

client: the network client to use, for example WiFiClient

IPAddress: MQTT server address

port: port for MQTT, usually 1883 for unencrypted connection

MQTT_CALLBACK_SIGNATURE: callback function for MQTT

Stream: a stream to write received messages to

Returns

The function returns nothing.

Example Code

Example: MQTT_Basic

```
#include <WiFi.h>

#include <PubSubClient.h>

// Update these with values suitable for your network.

char ssid[] = "yourNetwork" ; // your network SSID (name)
char pass[] = "secretPassword" ; // your network password
int status = WL_IDLE_STATUS; // the Wifi radio's status

char mqttServer[] = "test.mosquitto.org" ;
char clientId[] = "amebaClient" ;
char publishTopic[] = "outTopic" ;
char publishPayload[] = "hello world" ;
char subscribeTopic[] = "inTopic" ;

void callback(char* topic, byte* payload, unsigned int length) {
  Serial.print( "Message arrived [ ");
  Serial.print(topic);
  Serial.print(" ] ");

  for (int i=0;i<length;i++) {
```

```
Serial.print((char)payload[i]);  
}  
Serial.println();  
}  
WiFiClient wifiClient;  
PubSubClient client(wifiClient);  
void reconnect() {  
  // Loop until we' re reconnected  
  while (!client.connected()) {  
    Serial.print( "Attempting MQTT connection..." );  
    // Attempt to connect  
    if (client.connect(clientId)) {  
      Serial.println( "connected" );  
      // Once connected, publish an announcement...  
      client.publish(publishTopic, publishPayload);  
      // ...and resubscribe  
      client.subscribe(subscribeTopic);  
    } else {  
      Serial.print( "failed, rc=" );  
      Serial.print(client.state());  
      Serial.println(" try again in 5 seconds" );  
      // Wait 5 seconds before retrying  
      delay(5000);  
    }  
  }  
}  
void setup()  
{  
  Serial.begin(38400);  
  while (status != WL_CONNECTED) {
```

```
Serial.print( "Attempting to connect to SSID: ");

Serial.println(ssid);

// Connect to WPA/WPA2 network. Change this line if using open or WEP network:

status = WiFi.begin(ssid, pass);

// wait 10 seconds for connection:

delay(10000);

}

client.setServer(mqttServer, 1883);

client.setCallback(callback);

// Allow the hardware to sort itself out

delay(1500);

}

void loop()

{

if (!client.connected()) {

reconnect();

}

client.loop();

}
```

Notes and Warnings

PubSubClient::PubSubClient(Client& client) would suffice for normal MQTT connection

PubSubClient::setServer

Description

Sets the server details.

Syntax

PubSubClient& PubSubClient::setServer(uint8_t * ip, uint16_t port)

PubSubClient& PubSubClient::setServer(IPAddress ip, uint16_t port)

PubSubClient& PubSubClient::setServer(const char * domain, uint16_t port)

Parameters

ip: the address of the server

port: the port to connect to, default 1883

domain: the address of the server

Returns

The client instance, allowing the function to be chained

Example Code

Example: MQTT_Basic

Notes and Warnings

NA

PubSubClient::setCallback

Description

Sets the message callback function.

Syntax

PubSubClient& PubSubClient::setCallback(MQTT_CALLBACK_SIGNATURE)

Parameters

MQTT_CALLBACK_SIGNATURE: a pointer to a message callback function called when a message arrives for a subscription created by this client.

Returns

The client instance, allowing the function to be chained.

Example Code

Example: MQTT_Basic

Notes and Warnings

NA

PubSubClient::setClient

Description

Sets the network client instance to use.

Syntax

```
PubSubClient& PubSubClient::setClient(Client& client)
```

Parameters

client: the network client to use, for example WiFiClient

Returns

The client instance, allowing the function to be chained

Example Code

NA

Notes and Warnings

NA

PubSubClient::setStream

Description

Sets the stream to write received messages to.

Syntax

```
PubSubClient& PubSubClient::setStream(Stream& stream)
```

Parameters

stream: a stream to write received messages to

Returns

The client instance, allowing the function to be chained.

Example Code

NA

Notes and Warnings

NA

PubSubClient::connect**Description**

Connects the client to the server.

Syntax

```
boolean PubSubClient::connect(const char *id)
```

```
boolean PubSubClient::connect(const char *id, const char *user, const char *pass)
```

```
boolean PubSubClient::connect(const char *id, const char* willTopic, uint8_t willQos, boolean willRetain, const char* willMessage)
```

```
boolean PubSubClient::connect(const char *id, const char *user, const char *pass, const char* willTopic, uint8_t willQos, boolean willRetain, const char* willMessage)
```

Parameters

id: Client ID, a unique string identifier

user: Username for authentication, default NULL

pass: Password for authentication, default NULL

willTopic: the topic to be used by the will message

willQoS: the quality of service to be used by the will message

willRetain: whether the will should be published with the retain flag

willMessage: the payload of the will message

Returns

True –connection succeeded
False –connection failed

Example Code

Example: MQTT_Basic

Notes and Warnings

Client ID is required and should always be unique else connection might be rejected by the server.

PubSubClient::disconnect

Description

Disconnect the client

Syntax

```
void PubSubClient::disconnect(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

PubSubClient::publish

Description

Publishes a message to the specified topic.

Syntax

```
boolean PubSubClient::publish(const char* topic, const char* payload)
```

```
boolean PubSubClient::publish(const char* topic, const char* payload, boolean retained)
```

```
boolean PubSubClient::publish(const char* topic, const uint8_t* payload, unsigned int plength)
```

```
boolean PubSubClient::publish(const char* topic, const uint8_t* payload, unsigned int plength, boolean retained)
```

Parameters

topic: the topic to publish to

payload: the message to publish

plength: the length of the payload. Required if payload is a byte[]

retained: whether the message should be retained

–false –not retained

–true –retained

Returns

False –publish failed, either connection lost or message too large

True –publish succeeded

Example Code

Example: MQTT_Basic

Notes and Warnings

Default max packet size is 128 bytes.

PubSubClient::publish_P**Description**

Publishes a message stored in PROGMEM to the specified topic.

Syntax

boolean PubSubClient::publish_P(const char* topic, const uint8_t* payload, unsigned int plength, boolean retained)

Parameters

topic: the topic to publish to

payload: the message to publish

plength: the length of the payload. Required if payload is a byte[]

retained: whether the message should be retained

–false –not retained

–true –retained

Returns

False –publish failed, either connection lost or message too large

True –publish succeeded

Example Code

NA

Notes and Warnings

NA

PubSubClient::subscribe

Description

Subscribes to messages published to the specified topic.

Syntax

boolean PubSubClient::subscribe(const char* topic)

boolean PubSubClient::subscribe(const char* topic, uint8_t qos)

Parameters

topic: the topic to subscribe to

qos: the qos to subscribe at

Returns

False –sending the subscribe failed, either connection lost or message too large

True –sending the subscribe succeeded

Example Code

Example: MQTT_Basic

Notes and Warnings

NA

PubSubClient::unsubscribe**Description**

Unsubscribes from the specified topic.

Syntax

boolean PubSubClient::unsubscribe(const char* topic)

Parameters

topic: the topic to unsubscribe to

Returns

False –sending the unsubscribe failed, either connection lost or message too large

True –sending the unsubscribe succeeded

Example Code

NA

Notes and Warnings

NA

PubSubClient::loop

Description

A must method called regularly to allow the client to process incoming messages and maintain its connection to the server.

Syntax

```
boolean PubSubClient::loop(void)
```

Parameters

The function requires no input parameter.

Returns

False –the client is no longer connected

True –the client is still connected

Example Code

Example: MQTT_Basic

Notes and Warnings

A required method that should not be blocked for too long.

PubSubClient::connected

Description

Checks whether the client is connected to the server.

Syntax

```
boolean PubSubClient::connected(void)
```

Parameters

The function requires no input parameter.

Returns

False –the client is not connected

True –the client is connected

Example Code

Example: MQTT_Basic

Notes and Warnings

NA

PubSubClient::state

Description

Returns the current state of the client. If a connection attempt fails, this can be used to get more information about the failure.

All of the values have corresponding constants defined in PubSubClient.h.

Syntax

```
int PubSubClient::state(void)
```

Parameters

The function requires no input parameter.

Returns

-4 : MQTT_CONNECTION_TIMEOUT –the server didn't respond within the keepalive time

-3 : MQTT_CONNECTION_LOST –the network connection was broken

-2 : MQTT_CONNECT_FAILED –the network connection failed

-1 : MQTT_DISCONNECTED –the client is disconnected cleanly

0 : MQTT_CONNECTED –the client is connected

1 : MQTT_CONNECT_BAD_PROTOCOL –the server doesn't support the requested version of MQTT

2 : MQTT_CONNECT_BAD_CLIENT_ID –the server rejected the client identifier

3 : MQTT_CONNECT_UNAVAILABLE –the server was unable to accept the connection

4 : MQTT_CONNECT_BAD_CREDENTIALS –the username/password were rejected

5 : MQTT_CONNECT_UNAUTHORIZED –the client was not authorized to connect

Example Code

Example: MQTT_Basic

Notes and Warnings

NA

Readme

The Ameba MQTT related APIs and examples are works based on the [PubSubClient libraries](#) written by Nicholas O'Leary

These include,

- `PubSubClient.cpp`
- `PubSubClient.h`

These libraries are under MIT License.

NTPClient

Readme

The NTPClient library is based on the NTPClient library written by Fabrice Weinberg, which can be found at <https://github.com/arduino-libraries/NTPClient>.

These include,

- `NTPClient.cpp`
- `NTPClient.h`

These libraries are licensed under MIT License.

PowerSave

Class PMUClass

PMUClass Class

Description

Defines a class of using Power Save API

Syntax

```
class PMUClass
```

Members

Public Constructors	
PMUClass::PMUClass	Constructs a PMUClass object
Public Methods	
PMUCLASS::begin	Initialize the PMUCLASS and select sleep mode
PMUCLASS::AONTimerDuration	Set the duration of AON Timer
PMUCLASS::AONTimerCmd	Disable the AON Timer for power save usage
PMUCLASS::RTCWakeSetup	Set up RTC Timer for power save usage
PMUCLASS::enable	Enable power save deep sleep mode
PMUCLASS::AONWakeReason	Check AON wakeup source
PMUCLASS::WakePinCheck	Check AON GPIO pin wakeup source
PMUCLASS::AONWakeClear	Clear all the AON wakeup source
PMUCLASS::DsleepWakeStatusGet	Check if deepsleep mode is set
PMUCLASS::TL_sysactive_time	Tickless mode system active time
PMUCLASS::TL_wakelock	Tickless mode wake lock, select acquire of release
PMUCLASS::DS_AON_TIMER_WAKEUP	Return the Wakeup source
PMUCLASS::DS_RTC_WAKEUP	Return the Wakeup source
PMUCLASS::TL_UART_WAKEUP	Return the Wakeup source
PMUCLASS::TL_RTC_WAKEUP	Return the Wakeup source
PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA12	Return the Wakeup source
PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA13	Return the Wakeup source
PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA14	Return the Wakeup source
PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA15	Return the Wakeup source
PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA16	Return the Wakeup source
PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA17	Return the Wakeup source
PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA18	Return the Wakeup source
PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA19	Return the Wakeup source
PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA20	Return the Wakeup source
PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA21	Return the Wakeup source
PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA25	Return the Wakeup source
PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA26	Return the Wakeup source

PMUCLASS::PMUCLASS

Description

Constructs a PMUCLASS object.

Syntax

```
PMUCLASS::PMUCLASS(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::begin**Description**

Initialize the PMUCLASS and select sleep mode.

Syntax

```
void PMUClass::begin(uint32_t sleep_mode);
```

Parameters

sleep_mode: Selection value, “11” enters the DeepSleep Mode, “22” enters the Tickless Mode

Returns

The function returns nothing.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::AONTimerDuration

Description

Set the duration of AON Timer

Syntax

```
void PMUClass::AONTimerDuration(uint32_t duration_ms);
```

Parameters

duration_ms: Timer duration between 0 to 32760000ms.

Returns

The function returns nothing.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::AONTimerCmd

Description

Disable the AON timer for power save usage.

Syntax

```
void PMUClass::AONTimerCmd(void);
```

Parameters

c: The value in Celcius.

Returns

The function returns nothing.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::RTCWakeSetup**Description**

Set up the RTC timer for power save usage.

Syntax

```
void PMUClass::RTCWakeSetu(uint32_t duration_d, uint32_t duration_h, uint32_t duration_m, uint32_t duration_s);
```

Parameters

duration_d: Set alarm for number of days from 0.

duration_h: Set alarm for number of hours from 0.

duration_m: Set alarm for number of minutes from 0.

duration_s: Set alarm for number of seconds from 0.

Returns

The function returns nothing.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::enable

Description

Enable power save deep sleep mode

Syntax

```
void PMUClass::enable(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::AONWakeReason

Description

Check the AON wakeup source

Syntax

```
uint32_t PMUClass::AONWakeReason(void);
```

Parameters

The function requires no input parameter.

Returns

Returns the value of wakeup deepsleep source. “11” for AON pin, “22” for AON timer, “33” for RTC timer and “0” for none.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::WakePinCheck

Description

Check which AON GPIO pins are the wakeup source

Syntax

```
int PMUClass::WakePinCheck(void);
```

Parameters

The function requires no input parameter.

Returns

Return the pin number for indicating Arduino pin names.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::AONWakeClear

Description

Clear all AON Wakeup source.

Syntax

```
void PMUClass::AONWakeClear(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::DsleepWakeStatusGet

Description

Check if deepsleep mode is set.

Syntax

```
bool PMUClass::DsleepWakeStatusGet(void);
```

Parameters

The function requires no input parameter.

Returns

Return TRUE when enter DeepSleep Mode or FALSE for negative.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::TL_sysactive_time**Description**

Tickless mode system active time.

Syntax

```
void PMUClass::TL_sysactive_time(uint32_t duration_ms);
```

Parameters

duration_ms: Set the duration of system active time. The unit is in milliseconds.

Returns

The function returns nothing.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::TL_wakelock**Description**

Tickless mode wake lock, select acquire or release.

Syntax

```
void PMUClass::TL_wakelock(uint32_t select_lock);
```

Parameters

select_lock: Wake lock selection value, “1” for acquire or “0” for release.

Returns

The function returns nothing.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::DS_AON_TIMER_WAKEUP

Description

Return the Wakeup source for DeepSleep Mode.

Syntax

```
void PMUClass::DS_AON_TIMER_WAKEUP(void);
```

Parameters

The function requires no input parameter.

Returns

This function returns AON Timer as the wakeup source and output it on the Serial monitor.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::DS_RTC_WAKEUP

Description

Return the Wakeup source for DeepSleep Mode.

Syntax

```
void PMUClass::DS_RTC_WAKEUP(void);
```

Parameters

The function requires no input parameter.

Returns

This function returns RTC as the wakeup source and output it on the Serial monitor.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::TL_UART_WAKEUP

Description

Return the Wakeup source for Tickless Mode.

Syntax

```
void PMUClass::TL_UART_WAKEUP(void);
```

Parameters

The function requires no input parameter.

Returns

This function returns LOGUART as the wakeup source and output it on the Serial monitor.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::TL_RTC_WAKEUP

Description

Return the Wakeup source for Tickless Mode.

Syntax

```
void PMUClass::TL_RTC_WAKEUP(void);
```

Parameters

The function requires no input parameter.

Returns

This function returns RTC as the wakeup source and output it on the Serial monitor.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA12

Description

Return the Wakeup source.

Syntax

```
void PMUClass::AON_WAKEPIN_WAKEUP_GPIOA12(void);
```

Parameters

The function requires no input parameter.

Returns

This function returns AON GPIOA12 pin as the wakeup source and output it on the Serial monitor.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA13**Description**

Return the Wakeup source.

Syntax

```
void PMUClass::AON_WAKEPIN_WAKEUP_GPIOA13(void);
```

Parameters

The function requires no input parameter.

Returns

This function returns AON GPIOA13 pin as the wakeup source and output it on the Serial monitor.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA14

Description

Return the Wakeup source.

Syntax

```
void PMUClass::AON_WAKEPIN_WAKEUP_GPIOA14(void);
```

Parameters

The function requires no input parameter.

Returns

This function returns AON GPIOA14 pin as the wakeup source and output it on the Serial monitor.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA15

Description

Return the Wakeup source.

Syntax

```
void PMUClass::AON_WAKEPIN_WAKEUP_GPIOA15(void);
```

Parameters

The function requires no input parameter.

Returns

This function returns AON GPIOA15 pin as the wakeup source and output it on the Serial monitor.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA16**Description**

Return the Wakeup source.

Syntax

```
void PMUClass::AON_WAKEPIN_WAKEUP_GPIOA16(void);
```

Parameters

The function requires no input parameter.

Returns

This function returns AON GPIOA16 pin as the wakeup source and output it on the Serial monitor.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA17**Description**

Return the Wakeup source.

Syntax

```
void PMUClass::AON_WAKEPIN_WAKEUP_GPIOA17(void);
```

Parameters

The function requires no input parameter.

Returns

This function returns AON GPIOA17 pin as the wakeup source and output it on the Serial monitor.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA18

Description

Return the Wakeup source.

Syntax

```
void PMUClass::AON_WAKEPIN_WAKEUP_GPIOA18(void);
```

Parameters

The function requires no input parameter.

Returns

This function returns AON GPIOA18 pin as the wakeup source and output it on the Serial monitor.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA19

Description

Return the Wakeup source.

Syntax

```
void PMUClass::AON_WAKEPIN_WAKEUP_GPIOA19(void);
```

Parameters

The function requires no input parameter.

Returns

This function returns AON GPIOA19 pin as the wakeup source and output it on the Serial monitor.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA20

Description

Return the Wakeup source.

Syntax

```
void PMUClass::AON_WAKEPIN_WAKEUP_GPIOA20(void);
```

Parameters

The function requires no input parameter.

Returns

This function returns AON GPIOA20 pin as the wakeup source and output it on the Serial monitor.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA21

Description

Return the Wakeup source.

Syntax

```
void PMUClass::AON_WAKEPIN_WAKEUP_GPIOA21(void);
```

Parameters

The function requires no input parameter.

Returns

This function returns AON GPIOA21 pin as the wakeup source and output it on the Serial monitor.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA25

Description

Return the Wakeup source.

Syntax

```
void PMUClass::AON_WAKEPIN_WAKEUP_GPIOA25(void);
```

Parameters

The function requires no input parameter.

Returns

This function returns AON GPIOA25 pin as the wakeup source and output it on the Serial monitor.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA26**Description**

Return the Wakeup source.

Syntax

```
void PMUClass::AON_WAKEPIN_WAKEUP_GPIOA26(void);
```

Parameters

The function requires no input parameter.

Returns

This function returns AON GPIOA26 pin as the wakeup source and output it on the Serial monitor.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

RTC

Class RTC

RTC Class

Description

A class used for displaying date and time and alarm configuration using RTC, the independent BCD (Binary-Coded-Decimal) timer.

Syntax

```
class RTC
```

Members

Public Constructors	
A public constructor should not be used as this class is intended to be a singleton class. Access member functions using the object instance named RTC.	

Public Methods	
RTC:: Init	Initializes the RTC device, including the Clock, the RTC registers, and other functions
RTC:: DeInit	Deinitialize the RTC device
RTC:: Write	Set the specified timestamp in seconds to RTC
RTC:: Read	Get the current timestamp in seconds from RTC
RTC:: Wait	Wait for 1 second
RTC:: SetEpoch	Convert human-readable time to epoch time

RTC::Init

Description

Initializes the RTC device, including the Clock, the RTC registers, and other functions.

Syntax

```
void RTC::Init(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: RTC

```
/*
 * This function describes how to use the RTC API.
 * The RTC function is implemented by an independent BCD timer/counter.
 * This example will print out the time information every second.
 */

#include <stdio.h>
#include <time.h>
#include "rtc.h"
#define YEAR 2020
#define MONTH 9
#define DAY 10
#define HOUR 20
#define MIN 30
#define SEC 40

/* Create an rtc object */
RTC rtc;

int32_t seconds;

struct tm *timeinfo;

void setup() {
  Serial.begin(115200);
  rtc.Init(); // initialize RTC
}
```

```
void loop() {  
  // step 1: convert user time to epoch  
  int epochTime = humanReadableToEpoch(YEAR, MONTH, DAY, HOUR, MIN, SEC);  
  // step 2: write epoch time to rtc  
  rtc.Write(epochTime);  
  while (1) {  
    seconds = rtc.Read();  
    printf( "Epoch Time (in s) since January 1, 1970 = %dsn" , seconds);  
    printf( "Time as a basic string = %s" , ctime(&seconds));  
    timeinfo = localtime(&seconds);  
    printf( "Time as a custom formatted string = %d-%d-%d %d:%d:%dn" ,  
      (timeinfo->tm_year + 1900), (timeinfo->tm_mon + 1), timeinfo->tm_mday, timeinfo->tm_hour,  
      timeinfo->tm_min, timeinfo->tm_sec);  
    Serial.println();  
    rtc.wait(1);  
  }  
}  
  
// convert human readable time to epoch time  
int humanReadableToEpoch(int year, int month, int day, int hour, int min, int sec) {  
  struct tm t;  
  time_t t_of_day;  
  t.tm_year = year - 1900; // Year - 1970  
  t.tm_mon = month - 1; // Month, where 0 = jan  
  t.tm_mday = day; // Day of the month  
  t.tm_hour = hour;  
  t.tm_min = min;  
  t.tm_sec = sec;  
  t.tm_isdst = -1; // Is DST on? 1 = yes, 0 = no, -1 = unknown  
  t_of_day = mktime(&t);  
  // printf( "seconds since the Epoch: %dn" , (long)t_of_day);  
}
```



```
return t_of_day;  
}
```

Notes and Warnings

NA

RTC::DeInit

Description

Deinitializes the RTC device.

Syntax

```
void RTC::DeInit(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: RTC

Details of the code can be found in the previous section of RTC:: Init.

Notes and Warnings

NA

RTC:: Write

Description

Set the specified timestamp in seconds to RTC. Seconds from 1970.1.1 00:00:00 (YEAR.MONTH.DAY, HOUR: MIN: SECONDS) to specified date and time which is to be set.

Syntax

```
void RTC::Write(int t);
```

Parameters

Parameters

t: Seconds from 1970.1.1 00:00:00 (YEAR.MONTH.DAY, HOUR: MIN: SECONDS) to specified date and time which is to be set.

Returns

The function returns nothing.

Example Code

Example: RTC

Details of the code can be found in the previous section of RTC:: Init.

Notes and Warnings

NA

RTC::Read

Description

Get the current timestamp in seconds from RTC. The current timestamp in seconds which is calculated from 1970.1.1 00:00:00 (YEAR.MONTH.DAY, HOUR: MIN: SECONDS).

Syntax

```
int32_t RTC::Read(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns the current timestamp in seconds which is calculated from 1970.1.1 00:00:00 (YEAR.MONTH.DAY, HOUR: MIN: SECONDS).

Example Code

Example: RTC

Details of the code can be found in the previous section of RTC:: Init.

Notes and Warnings

NA

RTC:: Wait**Description**

Send IR raw data.

Syntax

```
void RTC::wait(float s);
```

Parameters

s: unit microseconds (1 us)

Returns

The function returns nothing.

Example Code

Example: RTC

Details of the code can be found in the previous section of RTC:: Init.

Notes and Warnings

NA

RTC:: SetEpoch**Description**

Convert human-readable time to epoch time

Syntax

```
int RTC:: SetEpoch(int year, int month, int day, int hour, int min, int sec);
```

Parameters

year: user input year

month: user input month

day: user input day

hour: user input hour

min: user input minutes

sec: user input seconds

Returns

The function returns epoch time in seconds for RTC use.

Example Code

Example: RTC

Details of the code can be found in the previous section of RTC:: Init.

Notes and Warnings

NA

SoftwareSerial

Class Adafruit_GPS

Adafruit_GPS Class

Description

Defines a class to use GPS module on Ameba.

Syntax

```
class Adafruit_GPS
```

Members

Public Constructors	
Adafruit_GPS::Adafruit_GPS	Constructs an Adafruit_GPS object
Public Methods	
Adafruit_GPS::begin	Initialize serial communication
*Adafruit_GPS:: lastNMEA	Returns the last NMEA line received and unsets the received flag
Adafruit_GPS:: newNMEAreceived	Check to see if a new NMEA line has been received
Adafruit_GPS:: common_init	Initialization code used by all constructor types
Adafruit_GPS:: sendCommand	Send a command to the GPS device
Adafruit_GPS:: pause	Pause/unpause receiving new data
Adafruit_GPS:: parseHex	Read a Hex value and return the decimal equivalent
Adafruit_GPS:: read	Read one character from the GPS device
Adafruit_GPS:: parse	Parse an NMEA string
Adafruit_GPS:: wakeup	Wake the sensor up
Adafruit_GPS:: standby	Standby Mode Switches
Adafruit_GPS::waitForSentence	Wait for a specified sentence from the device
Adafruit_GPS::LOCUS_StartLogger	Start the LOCUS logger
Adafruit_GPS::LOCUS_StopLogger	Stop the LOCUS logger
Adafruit_GPS::LOCUS_ReadStatus	Read the logger status

Adafruit_GPS::Adafruit_GPS

Description

Constructs an Adafruit_GPS object and initialize serial using a SoftSerial object.

Syntax

```
Adafruit_GPS::Adafruit_GPS(SoftwareSerial *ser)
```

```
Adafruit_GPS::Adafruit_GPS(HardwareSerial *ser)
```

Parameters

ser: a Serial instance

Returns

The function returns nothing.

Example Code

Example: Adafruit_GPS_parsing

This example code from Adafruit demonstrates GPS modules using MTK3329/MTK3339 driver. This code shows how to listen to the GPS module in an interrupt which allows the program to have more ‘freedom’ –just parse when a new NMEA sentence is available! Then access data when desired.

```
#include <Adafruit_GPS.h>

#include <SoftwareSerial.h>

// If you're using a GPS module:

// Connect the GPS Power pin to 3.3V

// Connect the GPS Ground pin to ground

// Connect the GPS TX (transmit) pin to Digital 0

// Connect the GPS RX (receive) pin to Digital 1

#if defined(BOARD_RTL8195A)

SoftwareSerial mySerial(0, 1);

#elif defined(BOARD_RTL8710)

SoftwareSerial mySerial(17, 5); // RTL8710 need change GPS TX/RX to pin 17 and 5

#else

SoftwareSerial mySerial(0, 1);

#endif

Adafruit_GPS GPS(&mySerial);

// Set GPSECHO to 'false' to turn off echoing the GPS data to the Serial console

// Set to 'true' if you want to debug and listen to the raw GPS sentences.

#define GPSECHO false

void setup()

{

Serial.begin(38400);

Serial.println( "Adafruit GPS library basic test!" );

// 9600 NMEA is the default baud rate for Adafruit MTK GPS's - some use 4800

GPS.begin(9600);

// uncomment this line to turn on RMC (recommended minimum) and GGA (fix data) including altitude
```

```

GPS.sendCommand(PMTK_SET_NMEA_OUTPUT_RMCGGA);

// uncomment this line to turn on only the "minimum recommended" data
//GPS.sendCommand(PMTK_SET_NMEA_OUTPUT_RMCONLY);

// For parsing data, we don't suggest using anything but either RMC only or RMC+GGA since
// the parser doesn't care about other sentences at this time

// Set the update rate

GPS.sendCommand(PMTK_SET_NMEA_UPDATE_1HZ); // 1 Hz update rate

// For the parsing code to work nicely and have time to sort thru the data, and
// print it out we don't suggest using anything higher than 1 Hz

// Request updates on antenna status, comment out to keep quiet

GPS.sendCommand(PGCMD_ANTENNA);

delay(1000);

// Ask for firmware version

mySerial.println(PMTK_Q_RELEASE);

}

uint32_t timer = millis();

void loop() // run over and over again
{
    // in case you are not using the interrupt above, you'll
    // need to 'hand query' the GPS, not suggested :(
    // read data from the GPS in the 'main loop'

    char c = GPS.read();

    // if you want to debug, this is a good time to do it!

    if (GPSECHO)

    if (c) Serial.print(c);

    // if a sentence is received, we can check the checksum, parse it...

    if (GPS.newNMEAreceived()) {

        // a tricky thing here is if we print the NMEA sentence, or data
        // we end up not listening and catching other sentences!

        // so be very wary if using OUTPUT_ALLDATA and trying to print out data

```

```
//Serial.println(GPS.lastNMEA()); // this also sets the newNMEAreceived() flag to false
if (!GPS.parse(GPS.lastNMEA())) // this also sets the newNMEAreceived() flag to false
return; // we can fail to parse a sentence in which case we should just wait for another
}

// if millis() or timer wraps around, we'll just reset it
if (timer > millis()) timer = millis();

// approximately every 2 seconds or so, print out the current stats
if (millis() - timer > 2000) {
  timer = millis(); // reset the timer

  Serial.print(" nTime: ");
  Serial.print(GPS.hour, DEC); Serial.print( ':' );
  Serial.print(GPS.minute, DEC); Serial.print( ':' );
  Serial.print(GPS.seconds, DEC); Serial.print( '.' );
  Serial.println(GPS.milliseconds);

  Serial.print( "Date: ");
  Serial.print(GPS.day, DEC); Serial.print( '/' );
  Serial.print(GPS.month, DEC); Serial.print( "/20" );
  Serial.println(GPS.year, DEC);

  Serial.print( "Fix: "); Serial.print((int)GPS.fix);
  Serial.print(" quality: "); Serial.println((int)GPS.fixquality);
  if (GPS.fix) {
    Serial.print( "Location: ");
    Serial.print(GPS.latitude, 4); Serial.print(GPS.lat);
    Serial.print(" ", " ");
    Serial.print(GPS.longitude, 4); Serial.println(GPS.lon);
    Serial.print( "Location (in degrees, works with Google Maps): ");
    Serial.print(GPS.latitudeDegrees, 4);
    Serial.print(" ", " ");
    Serial.println(GPS.longitudeDegrees, 4);
    Serial.print( "Speed (knots): "); Serial.println(GPS.speed);
```



```
Serial.print( "Angle: "); Serial.println(GPS.angle);  
Serial.print( "Altitude: "); Serial.println(GPS.altitude);  
Serial.print( "Satellites: "); Serial.println((int)GPS.satellites);  
}  
}  
}
```

Notes and Warnings

IMPORTANT: SoftSerial is using hardware serial so pin mapping cannot be altered.

Adafruit_GPS::begin

Description

Initialize serial communication

Syntax

```
void Adafruit_GPS::begin(uint16_t baud)
```

Parameters

baud: serial baud rate

Returns

The function returns nothing.

Example Code

Example: Adafruit_GPS_parsing

The details of the code can be found in the previous section of Adafruit_GPS:: Adafruit_GPS.

Notes and Warnings

NA

***Adafruit_GPS::lastNMEA**

Description

Returns the last NMEA line received and unsets the received flag

Syntax

```
char *Adafruit_GPS::lastNMEA(void)
```

Parameters

The function requires no input parameter.

Returns

Pointer to the last line string

Example Code

Example: Adafruit_GPS_parsing

The details of the code can be found in the previous section of Adafruit_GPS:: Adafruit_GPS.

Notes and Warnings

NA

Adafruit_GPS::newNMEAreceived

Description

Check to see if a new NMEA line has been received

Syntax

```
boolean Adafruit_GPS::newNMEAreceived(void)
```

Parameters

The function requires no input parameter.

Returns

True if received, false if not

Example Code

Example: Adafruit_GPS_parsing

The details of the code can be found in the previous section of Adafruit_GPS:: Adafruit_GPS.

Notes and Warnings

NA

Adafruit_GPS::common_init**Description**

Initialization code used by all constructor types

Syntax

```
void Adafruit_GPS::common_init(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

Adafruit_GPS::sendCommand

Description

Send a command to the GPS device

Syntax

```
void Adafruit_GPS::sendCommand(const char *str)
```

Parameters

str: Pointer to a string holding the command to send

Returns

The function returns nothing.

Example Code

Example: Adafruit_GPS_parsing

The details of the code can be found in the previous section of Adafruit_GPS:: Adafruit_GPS.

Notes and Warnings

NA

Adafruit_GPS::pause

Description

Pause/unpause receiving new data

Syntax

```
void Adafruit_GPS::pause(boolean p)
```

Parameters

p: True = pause, false = unpause

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

Adafruit_GPS::parseHex**Description**

Read a Hex value and return the decimal equivalent

Syntax

```
uint8_t Adafruit_GPS::parseHex(char c)
```

Parameters

c: Hex value

Returns

The decimal equivalent of the Hex value

Example Code

NA

Notes and Warnings

NA

Adafruit_GPS::read

Description

Read one character from the GPS device

Syntax

```
char Adafruit_GPS::read(void)
```

Parameters

The function requires no input parameter.

Returns

The character that we received, or 0 if nothing was available

Example Code

Example: Adafruit_GPS_parsing

The details of the code can be found in the previous section of Adafruit_GPS:: Adafruit_GPS.

Notes and Warnings

NA

Adafruit_GPS::parse

Description

Parse an NMEA string

Syntax

```
boolean Adafruit_GPS::parse(char *nmea)
```

Parameters

nmea: an NMEA string

Returns

True if we parsed it, false if it has invalid data

Example Code

Example: Adafruit_GPS_parsing

Notes and Warnings

NA

Adafruit_GPS::wakeup

Description

Wake the sensor up

Syntax

boolean Adafruit_GPS::wakeup(void)

Parameters

The function requires no input parameter.

Returns

True if woken up, false if not in standby or failed to wake

Example Code

NA

Notes and Warnings

NA

Adafruit_GPS::standby

Description

Standby Mode Switches

Syntax

```
boolean Adafruit_GPS::standby(void)
```

Parameters

The function requires no input parameter.

Returns

False if already in standby, true if it entered standby

Example Code

NA

Notes and Warnings

NA

Adafruit_GPS::waitForSentence

Description

Wait for a specified sentence from the device

Syntax

```
boolean Adafruit_GPS::waitForSentence(const char *wait4me, uint8_t max)
```

Parameters

wait4me: Pointer to a string holding the desired response

max: How long to wait, default is MAXWAITSENTENCE

Returns

True if we got what we wanted, false otherwise

Example Code

NA

Notes and Warnings

NA

Adafruit_GPS::LOCUS_StartLogger

Description

Start the LOCUS logger

Syntax

boolean Adafruit_GPS::LOCUS_StartLogger(void)

Parameters

The function requires no input parameter.

Returns

True on success, false if it failed

Example Code

NA

Notes and Warnings

NA

Adafruit_GPS::LOCUS_StopLogger

Description

Stop the LOCUS logger

Syntax

```
boolean Adafruit_GPS::LOCUS_StopLogger(void)
```

Parameters

The function requires no input parameter.

Returns

True on success, false if it failed

Example Code

NA

Notes and Warnings

NA

Adafruit_GPS::LOCUS_ReadStatus

Description

Read the logger status

Syntax

```
boolean Adafruit_GPS::LOCUS_ReadStatus(void)
```

Parameters

The function requires no input parameter.

Returns

True if we read the data, false if there was no response

Example Code

NA

Notes and Warnings

NA

Class HttpClient**PMS3003 Class****Description**

Defines a class to work with PMS3003 air quality sensor on Ameba.

Syntax

```
class PMS3003
```

Members

Public Constructors	
PMS3003::PMS3003	Constructs a PMS3003 object
Public Methods	
PMS3003::begin	Initialize hardware UART
PMS3003::end	Free allocated space thus stopping UART
PMS3003::get_pm1p0_cf1	Get PM1.0 under correction factor = 1
PMS3003:: get_pm2p5_cf1	Get PM2.5 under correction factor = 1
PMS3003:: get_pm10_cf1	Get PM10 under correction factor = 1
PMS3003:: get_pm1p0_air	Get PM1.0 air quality
PMS3003:: get_pm2p5_air	Get PM2.5 air quality
PMS3003:: get_pm10_air	Get PM10 air quality
PMS3003:update_cache	Updates the cache memory
PMS3003::pms3003_handle_interrupt	Set up the serial event handler

PMS3003::PMS3003**Description**

Constructs a PMS3003 object and initialize the pin mapping.

Syntax

```
PMS3003::PMS3003(int _rx, int _tx, int _set, int _reset)
```

Parameters

_rx: RX pin of UART

_tx: TX pin of UART

_set: Set pin

_reset: Reset pin

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

PMS3003::begin**Description**

Initialize hardware UART and allocate space for serial buffer

Syntax

```
void PMS3003::begin(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

PMS3003::end**Description**

Free serial buffer space and stop UART

Syntax

```
void PMS3003::end(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

PMS3003::get_pm1p0_cf1

Description

Get PM1.0 under correction factor = 1

Syntax

```
int PMS3003::get_pm1p0_cf1(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns the value “pm1p0_cf1” as an integer.

Example Code

NA

Notes and Warnings

NA

PMS3003::get_pm2p5_cf1

Description

Get PM2.5 under correction factor = 1

Syntax

```
int PMS3003::get_pm2p5_cf1(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns the value of “pm2p5_cf1” as an integer.

Example Code

NA

Notes and Warnings

NA

PMS3003::get_pm10_cf1**Description**

Get PM10 under correction factor = 1

Syntax

```
int PMS3003::get_pm10_cf1(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns the value of “pm10_cf1” as an integer.

Example Code

NA

Notes and Warnings

NA

PMS3003::get_pm1p0_air**Description**

Get PM1.0 air quality

Syntax

```
int PMS3003::get_pm1p0_air(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns the value of “pm1p0_air” as an integer.

Example Code

NA

Notes and Warnings

NA

PMS3003::get_pm2p5_air

Description

Get PM2.5 air quality

Syntax

```
int PMS3003::get_pm2p5_air(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns the value of “pm2p5_air” as an integer.

Example Code

NA

Notes and Warnings

NA

PMS3003::get_pm10_air**Description**

Get PM10 air quality

Syntax

```
int PMS3003::get_pm10_air(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns the value of “pm10_air” as an integer.

Example Code

NA

Notes and Warnings

NA

PMS3003::pms3003_handle_interrupt**Description**

Set up the serial event handler

Syntax

```
void pms3003_handle_interrupt(uint32_t id, uint32_t event)
```

Parameters

id: device identifier

event: Serial event for handling incoming data

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

PMS3003::update_cache

Description

Serves the function of updating cache memory. One package has 32 bytes. Illustrate the formate by using below raw data: 42 4d 00 1c 00 1b 00 21 00 29 00 1a 00 21 00 29 2b fb 04 be 00 6b 00 10 00 04 00 04 67 00 04 46

42 4d : header signature

00 1c : frame length, 0x001c = 28 bytes (not include header and this field)

00 1b : PM1.0 under CF=1

00 21 : PM2.5 under CF=1

00 29 : PM10 under CF=1

00 1a : PM1.0 under air

00 21 : PM2.5 under air

00 29 : PM10 under air

2b fb : number of pariticle, diameter size 0.3 um in 0.1 liter air

04 be : number of pariticle, diameter size 0.5 um in 0.1 liter air

00 6b : number of pariticle, diameter size 1.0 um in 0.1 liter air

00 10 : number of pariticle, diameter size 2.5 um in 0.1 liter air

00 04 : number of pariticle, diameter size 5.0 um in 0.1 liter air

00 04 : number of pariticle, diameter size 10 um in 0.1 liter air

67 : serial number

00 : error code

04 46 :

checksum,0x42+0x4d+0x00+0x1c+0x00+0x1b+0x00+0x21+0x00+0x29+0x00+0x1a+0x00+0x21+0x00+0x29+
0x2b+0xfb+0x04+0xbe+0x00+0x6b+0x00+0x10+0x00+0x04+0x00+0x04+0x67+0x00 = 0x0446

Syntax

void PMS3003::update_cache(void)

Parameters

The function requires no input parameters.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

Class SoftwareSerial

SoftwareSerial Class

Description

Defines a class of software serial implementation for Ameba.

Syntax

class SoftwareSerial

Members

Public Constructors	
SoftwareSerial::SoftwareSerial	Constructs a SoftwareSerial object
Public Methods	
SoftwareSerial::begin	Sets the speed (baud rate) for the serial communication
SoftwareSerial::listen	Enables the selected software serial port to listen
SoftwareSerial::end	Same as stopListening
SoftwareSerial::stopListening	Stop listening on the port
SoftwareSerial::peek	Return a character that was received on the RX pin of the software serial port
SoftwareSerial::write	Prints data to the transmit pin of the software serial port as raw bytes
SoftwareSerial::read	Return a character that was received on the RX pin of the software serial port
SoftwareSerial::available	Get the number of bytes (characters) available for reading from a software serial port
SoftwareSerial::flush	Flush the received buffer
SoftwareSerial::setBufferSize	Set buffer size
SoftwareSerial::setAvailableCallback	Set available callback
SoftwareSerial::handle_interrupt	Private methods handles interrupt

SoftwareSerial::SoftwareSerial

Description

Constructs a SoftwareSerial object and sets RX and TX pin, and inverse logic.

Syntax

```
SoftwareSerial::SoftwareSerial(uint8_t receivePin, uint8_t transmitPin, bool inverse_logic /* = false */) 
```

Parameters

receivePin: the pin on which to receive serial data

transmitPin: the pin on which to transmit serial data

inverse_logic: is used to invert the sense of incoming bits

Returns

The function returns nothing.

Example Code

Example: SoftwareSerialExample

The example demonstrates a software serial test, it receives from serial RX and sends it to serial TX.

```

/*
The circuit: (BOARD RTL8195A)
* RX is digital pin 0 (connect to TX of other devices)
* TX is digital pin 1 (connect to RX of other devices)
*/

#include <SoftwareSerial.h>

#if defined(BOARD_RTL8195A)
SoftwareSerial mySerial(0, 1); // RX, TX
#elif defined(BOARD_RTL8710)
SoftwareSerial mySerial(17, 5); // RX, TX
#else
SoftwareSerial mySerial(0, 1); // RX, TX
#endif

void setup() {
// Open serial communications and wait for port to open:
Serial.begin(57600);

while (!Serial) {
; // wait for serial port to connect. Needed for native USB port only
}

Serial.println( "Goodnight moon!" );

// set the data rate for the SoftwareSerial port
mySerial.begin(4800);
mySerial.println( "Hello, world?" );
}

void loop() { // run over and over
if (mySerial.available()) {
mySerial.write(mySerial.read());
}
}

```

```
}
```

Notes and Warnings

Software Serial is using hardware serial thus DO NOT change the default pins

SoftwareSerial::begin

Description

Sets the speed (baud rate) for the serial communication

Syntax

```
void SoftwareSerial::begin(long speed)
```

```
void SoftwareSerial::begin(long speed, int data_bits, int parity, int stop_bits)
```

```
void SoftwareSerial::begin(long speed, int data_bits, int parity, int stop_bits, int flowctrl, int rtsPin, int ctsPin)
```

Parameters

speed: the baud rate

data_bits: number of data bits, 8 bits(default) or 7 bits

stop_bits: number of stop bits, 1 bit(default), 1.5 bits or 2 bits

flowctrl: flow control pin

rtsPin: request to send pin

ctsPin: clear to send pin

Returns

The function returns nothing.

Example Code

Example: SoftwareSerialExample

The example demonstrates a software serial test, it receives from serial RX and sends it to serial TX. Details of the code can be found in the previous section of SoftwareSerial_Basic:: SoftwareSerial.

Notes and Warnings

NA

SoftwareSerial::listen

Description

Enables the selected software serial port to listen

Syntax

```
bool SoftwareSerial::listen(void)
```

Parameters

The function requires no input parameter.

Returns

Returns true if it replaces another

Example Code

NA

Notes and Warnings

NA

SoftwareSerial::end

Description

Same as stopListening

Syntax

```
void SoftwareSerial::end(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

SoftwareSerial::isListening

Description

Tests to see if requested software serial port is actively listening

Syntax

```
bool SoftwareSerial::isListening(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns “True” if the port is listening.

Example Code

NA

Notes and Warnings

NA

SoftwareSerial::stopListening

Description

Stop listening on the port

Syntax

```
bool SoftwareSerial::stopListening(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns “True” if listening on the port is stopped.

Example Code

NA

Notes and Warnings

NA

SoftwareSerial::peek

Description

Return a character that was received on the RX pin of the software serial port

Syntax

```
int SoftwareSerial::peek(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns the character read, or returns “-1” if none is available.

Example Code

NA

Notes and Warnings

NA

SoftwareSerial::write

Description

Prints data to the transmit pin of the software serial port as raw bytes

Syntax

```
size_t SoftwareSerial::write(uint8_t b)
```

Parameters

b: byte to be written

Returns

The function returns the number of bytes written.

Example Code

Example: SoftwareSerialExample

The example demonstrates a software serial test, it receives from serial RX and sends it to serial TX. Details of the code can be found in the previous section of SoftwareSerial:: SoftwareSerial.

Notes and Warnings

NA

SoftwareSerial::read

Description

Return a character that was received on the RX pin of the software serial port

Syntax

```
int SoftwareSerial::read(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns the character read, or -1 if none is available.

Example Code

Example: SoftwareSerialExample

The example demonstrates a software serial test, it receives from serial RX and sends it to serial TX. Details of the code can be found in the previous section of SoftwareSerial:: SoftwareSerial.

Notes and Warnings

NA

SoftwareSerial::available

Description

Get the number of bytes available for reading from a software serial port

Syntax

int SoftwareSerial::available(void)

Parameters

The function requires no input parameter.

Returns

The function returns the number of bytes available to read.

Example Code

Example: SoftwareSerialExample

The example demonstrates a software serial test, it receives from serial RX and sends it to serial TX. Details of the code can be found in the previous section of SoftwareSerial:: SoftwareSerial.

Notes and Warnings

NA

SoftwareSerial::flush

Description

Flush the received buffer

Syntax

void SoftwareSerial::flush(void)

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

SoftwareSerial::setBufferSize

Description

Set buffer size

Syntax

```
void SoftwareSerial::setBufferSize(uint32_t buffer_size)
```

Parameters

buffer_size: the size of the serial buffer

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

SoftwareSerial::setAvailableCallback

Description

Set available callback

Syntax

```
void SoftwareSerial::setAvailableCallback(void (*callback)(char c))
```

Parameters

*callback: user-defined serial callback function

Returns

The function returns nothing.

Example Code

Example: SoftwareSerialIrqCallback

This example demonstrates the software serial testing using IRQ callback and semaphore. Set callback function “mySerialCallback” to software serial. Whenever there is data comes in, “mySerialCallback” is invoked. In this sketch, it does nothing until the end of the line. And then it sends a semaphore. The loop() uses a non-busy loop to wait for the semaphore. To test this sketch, you need to type something on software serial and then press Enter.

```
/*  
  
The circuit: (BOARD RTL8195A)  
  
RX is digital pin 0 (connect to TX of other devices)  
TX is digital pin 1 (connect to RX of other devices)  
  
*/  
  
#include <SoftwareSerial.h>  
  
#if defined(BOARD_RTL8195A)  
SoftwareSerial mySerial(0, 1); // RX, TX  
#elif defined(BOARD_RTL8710)  
SoftwareSerial mySerial(17, 5); // RX, TX  
#else  
SoftwareSerial mySerial(0, 1); // RX, TX  
#endif  
  
uint32_t semaID;  
  
// The callback is hooking at UART IRQ handler and please don't do heavy task here.  
  
void mySerialCallback(char c)
```

```
{  
/* The parameter c is only for peeking. The actual data is  
* still in the buffer of SoftwareSerial.  
*/  
  
if (c == 'r' || c == 'n' ) {  
  os_semaphore_release(semaID);  
}  
}  
  
void setup() {  
  // use 1 count for binary semaphore  
  semaID = os_semaphore_create(1);  
  
  // There is a token in the semaphore, clear it.  
  os_semaphore_wait(semaID, 0xFFFFFFFF);  
  
  // set the data rate for the SoftwareSerial port  
  mySerial.begin(38400);  
  
  mySerial.setAvailableCallback(mySerialCallback);  
}  
  
void loop() { // run over and over  
  // wait semaphore for 5s timeout  
  if (os_semaphore_wait(semaID, 5 * 1000)) {  
    // we got data before timeout  
    while(mySerial.available()) {  
      mySerial.print((char)mySerial.read());  
    }  
    mySerial.println();  
  } else {  
    mySerial.println( "No data comes in." );  
  }  
}
```

Notes and Warnings

NA

SoftwareSerial::handle_interrupt

Description

A private method handles the interrupt

Syntax

```
void handle_interrupt(uint32_t id, uint32_t event)
```

Parameters

id: the interrupt id

event: interrupt event

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

Readme

The Ameba Software Serial related APIs and examples are works based on libraries formerly known as `NewSoftSerial.h` by Mikal Hart (<http://arduiniana.org/libraries/newsoftserial>).

These include,

- `SoftwareSerial.cpp`
- `SoftwareSerial.h`

These libraries are under GNU Lesser General Public License.

The Ameba GPS related APIs and examples are works based on Adafruit GPS library written by Limor Fried/Ladyada for Adafruit Industries (<http://www.adafruit.com/products/746>).

These include,

- Adafruit_GPS.cpp
- Adafruit_GPS.h

These libraries are under BSD License.

SPI

Class AmebaILI9341

AmebaILI9341 Class

Description

Defines a class to use ILI9341 TFT SPI display for Ameba.

Syntax

```
class AmebaILI9341
```

Members

Public Constructors	
AmebaILI9341::AmebaILI9341	Constructs an AmebaILI9341 object
Public Methods	
AmebaILI9341::begin	Initialize SPI, pin mapping and screen configuration
AmebaILI9341::setAddress	Initialize image size and position
AmebaILI9341::writecommand	SPI transfer a command
AmebaILI9341::writedata	SPI transfer a piece of data
AmebaILI9341::setRotation	Set screen orientation
AmebaILI9341::fillScreen	Fill the screen with a color
AmebaILI9341::clr	Clear screen
AmebaILI9341::fillRectangle	Fill a rectangular space with a color
AmebaILI9341::drawPixel	Turn on a pixel on the screen
AmebaILI9341::drawChar	To print a character on the screen
AmebaILI9341::drawLine	Draw line on the screen
AmebaILI9341::drawRectangle	Draw a rectangle on the screen
AmebaILI9341::drawCircle	Draw a circle on the screen
AmebaILI9341::write	Same as drawChar
AmebaILI9341::getWidth	Return the width 240
AmebaILI9341::getHeight	Return the height 320
AmebaILI9341::setCursor	Set cursor to the desired position
AmebaILI9341::setForeground	Set foreground color
AmebaILI9341::setBackground	Set background color
AmebaILI9341::setFontSize	Set character font size
AmebaILI9341::reset	Reset pin to High or Low

AmebaILI9341::AmebaILI9341

Description

Constructs an AmebaILI9341 object and set CS, DC and RESET pins .

Syntax

```
AmebaILI9341::AmebaILI9341(int csPin, int dcPin, int resetPin)
```

Parameters

csPin: pin for Chip Select dcPin: pin for Data/Command resetPin: pin for Reset

Returns

The function returns nothing.

Example Code

Example: : PM25_ON_ILI9341_TFT_LCD

This example demonstrates how to read pm2.5 value on PMS 3003 air-condition sensor and display it on ILI9341 TFT LCD.

```
/*
```

PMS 3003 pin map is as follow:

PIN1 :VCC, connect to 5V

PIN2 :GND

PIN3 :SET, 0:Standby mode, 1:operating mode

PIN4 :RXD :Serial RX

PIN5 :TXD :Serial TX

PIN6 :RESET

PIN7 :NC

PIN8 :NC

In this example, we only use Serial to get PM 2.5 value.

The circuit:

* RX is digital pin 0 (connect to TX of PMS 3003)

* TX is digital pin 1 (connect to RX of PMS 3003)

For RTL8195A ILI9341 TFT LCD with SPI interface has these pins:

D/C : connect to pin 9

CS : connect to pin 10

MOSI : connect to pin 11

MISO : connect to pin 12

CLK : connect to pin 13

VCC : connect to 3V3

GND : connect to GND

```
*/
```

```
#include "SoftwareSerial.h"
```

```
#include "SPI.h"
```

```
#include "AmebaILI9341.h"
```

```
#if defined(BOARD_RTL8195A)
```

```
SoftwareSerial mySerial(0, 1); // RX, TX
```

```
#define TFT_RESET 8

#define TFT_DC 9

#define TFT_CS 10

#elif defined(BOARD_RTL8710)

SoftwareSerial mySerial(17, 5); // RX, TX

// IMPORTANT: Due to limit pin, we do not connect TFT_RESET pin.

#define TFT_RESET 0xFFFFFFFF

#define TFT_DC 2

#define TFT_CS 10

#endif

AmebaILI9341 tft = AmebaILI9341(TFT_CS, TFT_DC, TFT_RESET);

#define ILI9341_SPI_FREQUENCY 20000000

#define pmsDataLen 32

uint8_t buf[pmsDataLen];

int idx = 0;

int pm10 = 0;

int last_pm25 = 0;

int pm25 = 0;

int pm100 = 0;

uint16_t pm25color[] = {

    0x9FF3,

    0x37E0,

    0x3660,

    0xFFE0,

    0xFE60,

    0xFCC0,

    0xFB2C,

    0xF800,

    0x9800,

    0xC99F
```

```
};

void setup() {
  Serial.begin(57600);

  mySerial.begin(9600); // PMS 3003 UART has baud rate 9600

  SPI.setDefaultFrequency(ILI9341_SPI_FREQUENCY);

  tft.begin();

  drawPictureFrames();
}

void loop() { // run over and over
  uint8_t c;

  idx = 0;

  memset(buf, 0, pmsDataLen);

  while (true) {
    while (c != 0x42) {
      while (!mySerial.available());

      c = mySerial.read();
    }

    while (!mySerial.available());

    c = mySerial.read();

    if (c == 0x4d) {
      // now we got a correct header

      buf[idx++] = 0x42;

      buf[idx++] = 0x4d;

      break;
    }
  }

  while (idx != pmsDataLen) {
    while (!mySerial.available());

    buf[idx++] = mySerial.read();
  }
}
```

```
pm10 = ( buf[10] << 8 ) | buf[11];
last_pm25 = pm25;
pm25 = ( buf[12] << 8 ) | buf[13];
pm100 = ( buf[14] << 8 ) | buf[15];
updateValueToTftScreen();
}

void drawPictureFrames() {
tft.setRotation(1);

tft.clr();

tft.setFontSize(1);

// Upper title
tft.setFontSize(1);
tft.setCursor(20,20);
tft.print( "PM2.5 DETECTOR" );

// PM 2.5 Circle Frame
tft.drawCircle(100,130,60, ILI9341_BLUE);
tft.drawCircle(100,130,61, ILI9341_BLUE);
tft.setFontSize(1);
tft.setCursor(90,85);
tft.print( "PM2.5" );
tft.setFontSize(1);
tft.setCursor(90,170);
tft.print( "um/m3" );

// PM 10 Circle Frame
tft.drawCircle(220,70,40, ILI9341_BLUE);
tft.setFontSize(1);
tft.setCursor(210,40);
tft.print( "PM10" );
tft.setFontSize(1);
tft.setCursor(205,95);
```

```
tft.print( "um/m3" );
// PM 1.0 Circle Frame
tft.drawCircle(220,170,40, ILI9341_BLUE);
tft.setFontSize(1);
tft.setCursor(205,140);
tft.print( "PM1.0" );
tft.setFontSize(1);
tft.setCursor(205,195);
tft.print( "um/m3" );
// right side bar, referenced from: http://taqm.epa.gov.tw/taqm/tw/
tft.fillRect(290, 30+ 0*2, 10, 12*2, pm25color[0]); // 0~11
tft.fillRect(290, 30+12*2, 10, 12*2, pm25color[1]); // 12-23
tft.fillRect(290, 30+24*2, 10, 12*2, pm25color[2]); // 24-35
tft.fillRect(290, 30+36*2, 10, 6*2, pm25color[3]); // 36-41
tft.fillRect(290, 30+42*2, 10, 6*2, pm25color[4]); // 42-47
tft.fillRect(290, 30+48*2, 10, 6*2, pm25color[5]); // 48-53
tft.fillRect(290, 30+54*2, 10, 6*2, pm25color[6]); // 54-58
tft.fillRect(290, 30+59*2, 10, 6*2, pm25color[7]); // 59-64
tft.fillRect(290, 30+65*2, 10, 6*2, pm25color[8]); // 65-70
tft.fillRect(290, 30+71*2, 10, 10*2, pm25color[9]); // >=71
tft.setCursor(302, 30);
tft.setFontSize(1);
tft.print( "0" );
tft.setCursor(302, 30+36*2);
tft.print( "36" );
tft.setCursor(302, 30+54*2);
tft.print( "54" );
tft.setCursor(302, 30+71*2);
tft.print( "71" );
// bottom right text
```

```
tft.setCursor(210,230);

tft.setFontSize(1);

tft.print( "Powered by Realtek" );

updateValueToTftScreen();

}

void updateValueToTftScreen() {

tft.setCursor(60, 111);

tft.setFontSize(5);

tft.setForeground( getPm25Color(pm25) );

if (pm25 < 10) {

tft.print(" ");

} else if (pm25 < 100) {

tft.print(" ");

}

tft.print(pm25);

tft.setCursor(195,60);

tft.setFontSize(3);

if (pm100 < 10) {

tft.print(" ");

} else if (pm100 < 100) {

tft.print(" ");

}

tft.print(pm100);

tft.setCursor(198,160);

if (pm10 < 10) {

tft.print(" ");

} else if (pm10 < 100) {

tft.print(" ");

}

tft.print(pm10);
```



```
tft.setFontSize(1);

tft.setForeground(ILI9341_WHITE);

if (last_pm25 > 80) {
tft.fillRect(275, 80*2+30-3, 12, 8, ILI9341_BLACK);
} else {
tft.fillRect(275, last_pm25*2+30-3, 12, 8, ILI9341_BLACK);
}

if (pm25 > 80) {
tft.setCursor(275, 80*2+30-3);
} else {
tft.setCursor(275, pm25*2+30-3);
}

tft.print( "=>" );
}

uint16_t getPm25Color(int v) {
if (v < 12) {
return pm25color[0];
} else if (v < 24) {
return pm25color[1];
} else if (v < 36) {
return pm25color[2];
} else if (v < 42) {
return pm25color[3];
} else if (v < 48) {
return pm25color[4];
} else if (v < 54) {
return pm25color[5];
} else if (v < 59) {
return pm25color[6];
} else if (v < 65) {
```

```
return pm25color[7];  
} else if (v < 71) {  
return pm25color[8];  
} else {  
return pm25color[9];  
}  
}
```

Notes and Warnings

NA

AmebaILI9341::begin

Description

Initialize hardware SPI, pin mapping and screen configuration

Syntax

```
void AmebaILI9341::begin(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: PM25_ON_ILI9341_TFT_LCD

Details of the code are given in the previous section of AmebaILI9341:: AmebaILI9341.

Notes and Warnings

This method is required to run first before other operations on the display.

AmebaILI9341::setAddress

Description

Initialize image size and positioning on the display

Syntax

```
void AmebaILI9341::setAddress(uint16_t x0, uint16_t y0, uint16_t x1, uint16_t y1)
```

Parameters

x0: leftmost coordinate of the image y0: top coordinate of the image x1: rightmost coordinate of the image y1: bottom coordinate of the image

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Do not use this to set the cursor, use the “setCursor” method instead.

AmebaILI9341::writecommand**Description**

Write a single-byte command to display

Syntax

```
void AmebaILI9341::writecommand(uint8_t command)
```

Parameters

command: a single byte command

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

AmebaILI9341::writedata**Description**

Write 1 byte of data to display

Syntax

```
void AmebaILI9341::writedata(uint8_t data)
```

Parameters

data: 1 byte data

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Only use this method to write 1 byte at a time.

AmebaILI9341::setRotation

Description

Setting screen orientation, “0” for no rotation, “1” for 90 degrees rotation and so on so forth.

Syntax

void AmebaILI9341::setRotation(uint8_t m)/span> **Parameters**

m: one of the 4 rotation modes -> “0” for no rotation, “1” for 90⁰, “2” for 180⁰, “3” for 270⁰

Returns

The function returns nothing.

Example Code

Example: PM25_ON_ILI9341_TFT_LCD

Details of the code are given in the previous section of AmebaILI9341:: AmebaILI9341.

Notes and Warnings

if m=4, it’ s equivalent to mode 0, and m=5 for mode 1, m=6 for mode 2 so on so forth.

AmebaILI9341::fillScreen

Description

Fill the entire screen with one color

Syntax

void AmebaILI9341::fillScreen(uint16_t color)

Parameters

color: a 16-bit color reference defined in AmebaILI9341.h

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Refer to AmebaILI9341.h for available colors.

AmebaILI9341::clr**Description**

Fill the entire screen with a certain background-color

Syntax

```
void AmebaILI9341::clr(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: PM25_ON_ILI9341_TFT_LCD

Details of the code are given in the previous section of AmebaILI9341:: AmebaILI9341

Notes and Warnings

background-color can be set by calling setBackground method.

AmebaILI9341::fillRectangle**Description**

Fill a rectangular space with a color on the screen

Syntax

```
void AmebaILI9341::fillRectangle(int16_t x, int16_t y, int16_t w, int16_t h, uint16_t color)
```

Parameters

x: leftmost coordinate of the image y: top coordinate of the image w: width of the image h: height of the image color: the color of the image

Returns

The function returns nothing.

Example Code

Example: PM25_ON_ILI9341_TFT_LCD

Details of the code are given in the previous section of AmebaILI9341:: AmebaILI9341.

Notes and Warnings

NA

AmebaILI9341::drawPixel

Description

Turn on a pixel on the screen

Syntax

```
void AmebaILI9341::drawPixel(int16_t x, int16_t y, uint16_t color)
```

Parameters

x: leftmost coordinate of the image y: top coordinate of the image color: the color of the image

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

AmebaILI9341::drawChar

Description

Draw character on the screen

Syntax

```
void AmebaILI9341::drawChar(unsigned char c) void AmebaILI9341::drawChar(int16_t x, int16_t y, unsigned char c, uint16_t _fontcolor, uint16_t _background, uint8_t _fontsize)
```

Parameters

x: leftmost coordinate of the image y: top coordinate of the image c: a character _fontcolor: font color _background: background color _fontsize: font size

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

In the actual example, the Print method is used to print a string of character on the screen instead of using this method.

AmebaILI9341::drawLine

Description

Draw a straight line on the screen

Syntax

```
void AmebaILI9341::drawLine(int16_t x0, int16_t y0, int16_t x1, int16_t y1) void AmebaILI9341::drawLine(int16_t x0, int16_t y0, int16_t x1, int16_t y1, uint16_t color)
```

Parameters

x0: leftmost coordinate of the image y0: top coordinate of the image x1: leftmost coordinate of the image y1: top coordinate of the image color: the color of the image

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

AmebaILI9341::drawRectangle**Description**

Draw a rectangular shape on the screen

Syntax

```
void AmebaILI9341::drawRectangle(int16_t x, int16_t y, int16_t w, int16_t h) void AmebaILI9341::drawRectangle(int16_t x, int16_t y, int16_t w, int16_t h, uint16_t color)
```

Parameters

x: leftmost coordinate of the image y: top coordinate of the image w: width of the image h: height of the image color: the color of the image

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

AmebaILI9341::drawCircle**Description**

Draw a circular shape on the screen

Syntax

```
void AmebaILI9341::drawCircle(int16_t x0, int16_t y0, int16_t r) void AmebaILI9341::drawCircle(int16_t x0, int16_t y0, int16_t r, uint16_t color)
```

Parameters

x0: leftmost coordinate of the image y0: top coordinate of the image r: radius of the image color: the color of the image

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Include “AmebaServo.h” to use the class function.

AmebaILI9341::write

Description

Same as drawChar, write a character on the screen

Syntax

```
size_t AmebaILI9341::write(uint8_t c)
```

Parameters

c: a character to be written on the screen

Returns

Number of bytes written

Example Code

NA

Notes and Warnings

This an inherited method from Print class and is seldom used.

AmebaILI9341::getWidth

Description

Get the width of the image

Syntax

```
int16_t AmebaILI9341::getWidth(void)
```

Parameters

The function requires no input parameter.

Returns

Width of the image

Example Code

NA

Notes and Warnings

NA

AmebaILI9341::getHeight**Description**

Get the height of the image

Syntax

```
int16_t AmebaILI9341::getHeight(void)
```

Parameters

The function requires no input parameter.

Returns

Height of the image

Example Code

NA

Notes and Warnings

NA

AmebaILI9341::setCursor**Description**

Set the cursor to a specific position on the screen

Syntax

```
void AmebaILI9341::setCursor(int16_t x, int16_t y)
```

Parameters

x: coordinate on the x-axis y: coordinate on the y-axis

Returns

The function returns nothing.

Example Code

Example: PM25_ON_ILI9341_TFT_LCD

Details of the code are given in the previous section of AmebaILI9341:: AmebaILI9341.

Notes and Warnings

NA

AmebaILI9341::setForeground

Description

Set foreground color

Syntax

```
void AmebaILI9341::setForeground(uint16_t color)
```

Parameters

color: one of the colors available in AmebaILI9341.h

Returns

The function returns nothing.

Example Code

Example: PM25_ON_ILI9341_TFT_LCD

Details of the code are given in the previous section of AmebaILI9341:: AmebaILI9341.

Notes and Warnings

NA

AmebaILI9341::setBackground

Description

Set background color

Syntax

```
void AmebaILI9341::setBackground(uint16_t _background)
```

Parameters

_background: one of the colors available in AmebaILI9341.h

Returns

The function returns nothing.

Example Code

Example: PM25_ON_ILI9341_TFT_LCD

Details of the code are given in the previous section of AmebaILI9341:: AmebaILI9341.

Notes and Warnings

NA

AmebaILI9341::setFontSize

Description

Set the font size of the characters printed on the screen.

Syntax

```
void AmebaILI9341::setFontSize(uint8_t size)
```

Parameters

size: font size, default 1 for smallest, 5 for largest font size

Returns

The function returns nothing.

Example Code

Example: PM25_ON_ILI9341_TFT_LCD

Details of the code are given in the previous section of AmebaILI9341:: AmebaILI9341.

Notes and Warnings

NA

AmebaILI9341::reset**Description**

Reset the pin to High or Low

Syntax

```
void AmebaILI9341::reset(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

Class SPISettings_SPIClass

SPISettings Class

Description

Defines a class to set SPI parameters.

Syntax

```
class SPISettings
```

Members

Public Constructors	
SPISettings::SPISettings	Create a SPISettings object and set SPI clock speed, bit order and data mode

SPISettings::SPISettings

Description

Construct an object and configure SPI parameters —clock speed, bit order and data model to the preferred default value.

Syntax

```
SPISettings YourObject(uint32_t clock, BitOrder bitOrder, uint8_t dataMode);
```

Parameters

clock: SPI clock speed, default is 4000000

bitOrder: order of bit stream, MSB first or LSB first, default is MSBFIRST

dataMode: There are 4 modes -> SPI_MODE0~3, default is SPI_MODE0

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

This class seldom used alone, it is always used with beginTransaction() as a parameter in SPIClass.

SPIClass Class**Description**

Defines a class of SPI implementation for Ameba.

Syntax

```
class SPIClass
```

Members

Public Constructors	
SPIClass::SPIClass	Constructs an SPI object
Public Methods	
SPIClass::transfer	Transfer data through SPI
SPIClass::transfer16	Transfer a 16-bits data through SPI
SPIClass::beginTransaction	Set slave select pin and SPI initial settings
SPIClass::endTransaction	Stop SPI transaction
SPIClass::begin	Associate each SPI pin to Ameba pin using ameba HAL APIs
SPIClass::end	Stop SPI master mode
SPIClass::setBitOrder	Set MSB first or LSB first
SPIClass::setDataMode	Set to one of the four data modes
SPIClass::setClockDivider	Set to correct clock speed (no effect on Ameba)
SPIClass::setDefaultFrequency	Set default SPI frequency

SPIClass::SPIClass**Description**

Construct an SPI object, create a pointer to the object, and attach “MOSI, MISO, CLK, and SS” to each pin on Ameba.

Syntax

```
SPIClass(void *pSpiObj, int mosi, int miso, int clk, int ss);
```

Parameters

pSpiObj: SPI pointer to the object

mosi: master out slave in

miso: master in slave out

clk: clock

ss: slave select

Returns

The function returns nothing.

Example Code

```
SPIClass SPI((void *)&spi_obj0), 11, 12, 13, 10);
```

Notes and Warnings

2 SPI objects are created in the library for 2 different hardware SPI on Ameba (if applicable), use “SPI” for first hardware SPI and “SPI1” for the second.

SPIClass::transfer**Description**

Calling HAL API to send data in the buffer to the slave

Syntax

```
byte SPIClass::transfer (byte _pin, uint8_t _data, SPITransferMode _mode);
```

```
byte SPIClass::transfer (uint8_t _data, SPITransferMode _mode);
```

```
void SPIClass::transfer (byte _pin, void *_buf, size_t _count, SPITransferMode _mode);
```

```
void SPIClass::transfer (void *_buf, size_t _count, SPITransferMode _mode);
```

Parameters

_pin: Slave select pin

_data: Actual data being sent over

_mode: SPI transfer mode

_count: number of bytes of data

_buf: data buffer

Returns

Void or “0” in case of error, “d” in case success

Example Code

NA

Notes and Warnings

NA

SPIClass::transfer16

Description

Same as “transfer” method above except data being of 16-bits.

Syntax

```
uint16_t SPIClass::transfer16(byte _pin, uint16_t _data, SPITransferMode _mode)
```

```
uint16_t SPIClass::transfer16(uint16_t _data, SPITransferMode _mode)
```

Parameters

_pin: Slave select pin

_data: Actual data being sent over

_mode: SPI transfer mode

Returns

The data being transferred

Example Code

NA

Notes and Warnings

NA

SPIClass::beginTransaction

Description

Set slave select pin and initialize SPI with default settings using SPISettings class.

Syntax

```
void SPIClass::beginTransaction(uint8_t pin, SPISettings settings)
```

```
void SPIClass::beginTransaction(SPISettings settings)
```

Parameters

pin: slave select pin

settings: an object of SPISettings class

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Refer to SPISettings class for details of the initial settings.

SPIClass::endTransaction

Description

Set slave select pin to 1 and stop SPI transaction.

Syntax

```
void SPIClass::endTransaction(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

SPIClass::begin**Description**

Calling HAL APIs to initialize SPI pins to physical Ameba pins and set SPI format and frequency

Syntax

```
void SPIClass::begin(void)
```

```
void SPIClass::begin(int ss)
```

Parameters

void or ss: slave select

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

This is a required method to use SPI on Ameba.

SPIClass::end

Description

Free hardware SPI from any activity.

Syntax

```
void SPIClass::end(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

SPIClass::setBitOrder

Description

A specific method to set bit order to either MSB first or LSB first and set slave select pin.

Syntax

```
void SPIClass::setBitOrder(uint8_t _pin, BitOrder _bitOrder)
void SPIClass::setBitOrder(BitOrder _order)
```

Parameters

_pin: slave select
_bitOrder: bit order -> either MSB first or LSB first
_order: same as above

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

SPIClass::setDataMode**Description**

A specific method to set data mode to one of the 4 modes (default: SPI_MODE0) and set slave select pin.

Syntax

```
void SPIClass::setDataMode(uint8_t _pin, uint8_t _mode)
void SPIClass::setDataMode(uint8_t _mode)
```

Parameters

_pin: slave select
_mode: one of the 4 modes (default: SPI_MODE0)

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

SPIClass::setClockDivider

Description

A specific method to set to divider in order to get correct clock speed

Syntax

```
void SPIClass::setClockDivider(uint8_t _pin, uint8_t _divider)
```

```
void SPIClass::setClockDivider(uint8_t _div)
```

Parameters

_pin: slave select

_divider: clock divider

_div: same as above

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

This function does not affect the Ameba board.

SPIClass::setDefaultFrequency

Description

A specific method to set default SPI frequency

Syntax

```
void SPIClass::setDefaultFrequency(int _frequency)
```

Parameters

`_frequency`: the default SPI frequency

Returns

The function returns nothing.

Example Code

Example: PM25_on_ILI9341_TFT_LCD

Details of the code are given in the previous section of AmebaILI9341:: AmebaILI9341.

Notes and Warnings

Take note that `defaultFrequency = _frequency`.

Readme

The Ameba SPI related APIs and examples are works based on SPI Master library for arduino written by Cristian Maglie <c.maglie@arduino.cc> and Paul Stoffregen <paul@pjrc.com> (Transaction API).

These include,

SPI.cpp

SPI.h

These libraries are under GNU Lesser General Public License, version 2.1.

Sys

Wiring_OS_API

Wiring OS API

Description

A wrapper to CMSIS (Cortex Microcontroller Software Interface Standard) OS API which serve as a RTOS to create multi-threaded application with real-time behaviour.

Syntax

NA

Members

Public Methods	
os_thread_create_arduino	Create a thread and add it to Active Threads and set it to state READY
os_thread_get_id_arduino	Return the thread ID of the current running thread
os_thread_terminate_arduino	Terminate execution of a thread and remove it from Active Threads
os_thread_yield_arduino	Pass control to next thread that is in state READY
os_thread_set_priority_arduino	Change priority of an active thread
os_thread_get_priority_arduino	Get current priority of an active thread
os_signal_set_arduino	Set the specified Signal Flags of an active thread
os_signal_clear_arduino	Clear the specified Signal Flags of an active thread
os_signal_wait_arduino	Wait for one or more Signal Flags to become signaled for the current RUNNING thread
os_timer_create_arduino	Create a timer
os_timer_start_arduino	Start or restart a timer
os_timer_stop_arduino	Stop the timer
os_timer_delete_arduino	Delete a timer that was created by os_timer_create
os_semaphore_create_arduino	Create and Initialize a Semaphore object used for managing resources
os_semaphore_wait_arduino	Wait until a Semaphore token becomes available
os_semaphore_release_arduino	Release a Semaphore token
os_semaphore_delete_arduino	Delete a Semaphore that was created by os_semaphore_create
os_get_free_heap_size_arduino	Return the available heap memory space when called

os_thread_create_arduino

Description

Create a thread and add it to Active Threads and set it to state READY.

Syntax

```
uint32_t os_thread_create_arduino (void (*task)(const void *argument), void *argument, int priority, uint32_t stack_size);
```

Parameters

task: task Function pointer which is the thread body. It should not run into the end of function unless os_thread_terminate is invoked

argument: the data pointer which brings to task

priority: The underlying os is FreeRTOS. It executes tasks with highest priority which are not in idle state.

stack_size: The stack_size is used as memory heap only for this task.

Returns

The thread id which is used in thread operation and signalling.

Example Code

NA

Notes and Warnings

NA

os_thread_get_id_arduino**Description**

Return the thread ID of the current running thread

Syntax

```
uint32_t os_thread_get_id_arduino (void);
```

Parameters

The function requires no input parameter.

Returns

Current thread id which calls `os_thread_get_id`.

Example Code

NA

Notes and Warnings

NA

`os_thread_terminate_arduino`

Description

Terminate execution of a thread and remove it from Active Threads

Syntax

```
uint32_t os_thread_terminate_arduino (uint32_t thread_id);
```

Parameters

`thread_id`: Terminate the thread with specific `thread_id`

Returns

`os_status` code

Example Code

NA

Notes and Warnings

Thread should not ended without terminate first.

os_thread_yield_arduino

Description

Pass control to next thread that is in state READY

Syntax

```
uint32_t os_thread_yield_arduino (void);
```

Parameters

The function requires no input parameter.

Returns

os_status code

Example Code

NA

Notes and Warnings

By default, the minimal execution unit is 1 millisecond. In a scenario that if a thread with smaller want to handout execution right to a thread with higher priority immediately without waiting for the ending of current 1 millisecond, then invoke os_thread_yield can transfer exection right to OS' s idle task and check which is the next execution thread.

os_thread_set_priority_arduino

Description

Change priority of an active thread

Syntax

```
uint32_t os_thread_set_priority_arduino (uint32_t thread_id, int priority);
```

Parameters

thread_id: The target thread with the thread id to be changed
priority: The updated priority

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

os_thread_get_priority_arduino

Description

Get current priority of an active thread

Syntax

```
uint32_t os_thread_get_priority_arduino (uint32_t thread_id);
```

Parameters

thread_id: The target thread with the thread id to be searched

Returns

os_priority

Example Code

NA

Notes and Warnings

NA

os_signal_set_arduino

Description

Set the specified Signal Flags of an active thread

Syntax

```
int32_t os_signal_set_arduino (uint32_t thread_id, int32_t signals);
```

Parameters

thread_id: Send signal to a thread with the thread id

signals: the signals to be send

Returns

os_status code

Example Code

NA

Notes and Warnings

NA

os_signal_clear_arduino

Description

Clear the specified Signal Flags of an active thread

Syntax

```
int32_t os_signal_clear_arduino (uint32_t thread_id, int32_t signals);
```

Parameters

thread_id: Clear signal to a thread with the thread id

signals: The signals to be clear

Returns

os_status code

Example Code

NA

Notes and Warnings

NA

os_signal_wait_arduino

Description

Wait for one or more Signal Flags to become signaled for the current RUNNING thread

Syntax

```
os_event_t os_signal_wait_arduino (int32_t signals, uint32_t millisec);
```

Parameters

signals: the signals to be wait

millisec: the timeout value if no signal comes in. Fill in 0xFFFFFFFF for infinite wait

Returns

os_status code

Example Code

NA

Notes and Warnings

NA

os_timer_create_arduino**Description**

Create a timer

Syntax

```
uint32_t os_timer_create_arduino (void (*callback)(void const *argument), uint8_t isPeriodic, void *argument);
```

Parameters

callback: The function to be invoke when timer timeout

isPeriodic: OS_TIMER_ONCE or OS_TIMER_PERIODIC

argument: The argument that is bring into callback function

Returns

timer id

Example Code

NA

Notes and Warnings

NA

os_timer_start_arduino**Description**

Start or restart a timer

Syntax

```
uint32_t os_timer_start_arduino (uint32_t timer_id, uint32_t millisec);
```

Parameters

timer_id: The timer id obtained from by os_timer_create

millisec: The delays after timer starts

Returns

os_status code

Example Code

NA

Notes and Warnings

NA

os_timer_stop_arduino

Description

Stop the timer

Syntax

```
uint32_t os_timer_stop_arduino (uint32_t timer_id);
```

Parameters

timer_id: The timer id obtained from by os_timer_create

Returns

os_status code

Example Code

NA

Notes and Warnings

NA

os_timer_delete_arduino

Description

Delete a timer that was created by os_timer_create

Syntax

```
uint32_t os_timer_delete_arduino (uint32_t timer_id);
```

Parameters

timer_id: The timer id obtained from by os_timer_create

Returns

os_status code

Example Code

NA

Notes and Warnings

NA

os_semaphore_create_arduino

Description

Create and Initialize a Semaphore object used for managing resources

Syntax

```
uint32_t os_semaphore_create_arduino (int32_t count);
```

Parameters

count: The number of available resources

Returns

semaphore ID

Example Code

NA

Notes and Warnings

NA

os_semaphore_wait_arduino

Description

Wait until a Semaphore token becomes available

Syntax

```
int32_t os_semaphore_wait_arduino (uint32_t semaphore_id, uint32_t millisec);
```

Parameters

semaphore_id: semaphore id obtained from os_semaphore_create

millisec: timeout value

Returns

os_status code

Example Code

NA

Notes and Warnings

NA

os_semaphore_release_arduino

Description

Release a Semaphore token

Syntax

```
uint32_t os_semaphore_release_arduino (uint32_t semaphore_id);
```

Parameters

semaphore_id: semaphore id obtained from os_semaphore_create

Returns

os_status code

Example Code

NA

Notes and Warnings

NA

os_semaphore_delete_arduino

Description

Delete a Semaphore that was created by os_semaphore_create

Syntax

```
uint32_t os_semaphore_delete_arduino (uint32_t semaphore_id);
```

Parameters

semaphore_id: semaphore id obtained from os_semaphore_create

Returns

os_status code

Example Code

NA

Notes and Warnings

NA

os_get_free_heap_size_arduino

Description

Return the available heap memory space when called

Syntax

```
size_t os_get_free_heap_size_arduino(void);
```

Parameters

The function requires no input parameter.

Returns

current free heap size

Example Code

Example: MemInfo

Notes and Warnings

NA

WDT**Class WDT****WDT Class****Description**

A class used for initializing, starting, stopping watchdog timer.

Syntax

```
class WDT
```

Members

Public Constructors	
A public constructor should not be used as this class is intended to be a singleton class. Access member functions using the object instance named WDT.	

Public Methods	
WDT:: InitWatchdog	Initializes the watchdog, include time setting, and mode register
WDT:: StartWatchdog	Start the watchdog counting
WDT:: StopWatchdog	Stop the watchdog counting
WDT:: RefreshWatchdog	Refresh the watchdog counting to prevent WDT timeout
WDT:: InitWatchdogIRQ	Switch the watchdog timer to interrupt mode and register a watchdog timer timeout interrupt handler

WDT:: InitWatchdog**Description**

Initializes the watchdog, include time setting, and mode register.

Syntax

```
void InitWatchdog(uint32_t timeout_ms);
```

Parameters

timeout_ms: the watch-dog timer timeout value in millisecond (ms). The default action after watchdog timer timeout is to reset the whole system.

Returns

The function returns nothing.

Example Code

Example: WatchdogTimer

```
/*  
 * This example describes how to use watchdog api.  
 * In this example, watchdog is setup to 5s timeout.  
 * Watchdog won't bark if we refresh it before timeout in smallTask.  
 * The timer is also reloaded after refresh.  
 * Otherwise, while running bigTask, watchdog will restart system in default or call callback function if registered.  
 */  
  
#include "wdt.h"  
  
#define RUN_CALLBACK_IF_WATCHDOG_BARKS (0)  
  
WDT wdt;  
  
void setup() {  
  Serial.begin(115200);  
  
  wdt.InitWatchdog(5000); // setup 5s watchdog  
  
  #if RUN_CALLBACK_IF_WATCHDOG_BARKS  
  
    wdt.InitWatchdogIRQ(my_watchdog_irq_handler, 0);  
  
  #else  
  
    // system would restart in default when watchdog barks  
  
  #endif
```

```

wdt.StartWatchdog(); // enable watchdog timer

successfulTask();

failedTask();

while (1)
;
}

void loop() {
}

void successfulTask(void) {
Serial.println(" ... doing small task ... ");

for (int i = 0; i < 50000000; i++) // dummy task

asm(" nop" );

Serial.println( "refresh watchdogrn" );

wdt.RefreshWatchdog();

}

/*

* Doing this task will lead to failed refresh the
* watchdog timer within the time limits of 5 seconds
*/

void failedTask(void) {
Serial.println(" ... doing big task ... ");

for (int i = 0; i < 10; i++) {

Serial.print( "doing dummy task #" );

Serial.println(i, DEC);

for (int j = 0; j < 50000000; j++) // dummy task

asm(" nop" );

}

Serial.println( "refresh watchdogrn" );

wdt.RefreshWatchdog();

}

```

```
void my_watchdog_irq_handler(uint32_t id) {  
    printf( "watchdog barks!!!rn" );  
    WDG_Cmd(DISABLE);  
}
```

Notes and Warnings

NA

WDT:: StartWatchdog

Description

Start the watchdog counting.

Syntax

```
void StartWatchdog(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: WatchdogTimer

You may refer to the code in previous section of WDT::InitWatchdog.

Notes and Warnings

NA

WDT:: StopWatchdog

Description

Stop the watchdog counting.

Syntax

```
void StopWatchdog(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: WatchdogTimer

You may refer to the code in previous section of WDT::InitWatchdog.

Notes and Warnings

NA

WDT:: RefreshWatchdog**Description**

Refresh the watchdog counting to prevent WDT timeout.

Syntax

```
void RefreshWatchdog(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: WatchdogTimer

You may refer to the code in previous section of WDT::InitWatchdog.

Notes and Warnings

NA

WDT:: InitWatchdogIRQ

Description

Switch the watchdog timer to interrupt mode and register a watchdog timer timeout interrupt handler. The interrupt handler will be called when the watchdog timer is timeout.

Syntax

```
void WDT::InitWatchdogIRQ(wdt_irq_handler handler, uint32_t id)
```

Parameters

handler: the callback function for WDT timeout interrupt.

id: the parameter for the callback function

Returns

The function returns nothing.

Example Code

Example: WatchdogTimer

You may refer to the code in previous section of WDT::InitWatchdog.

Notes and Warnings

NA

WiFi

Class WiFi

WiFiClass Class

Description

Defines a class of WiFi and network implementation for Ameba.

Syntax

```
class WiFiClass
```

Members

Public Constructors	
WiFiClass::WiFiClass	Constructs a WiFiClass object and initializes the WiFi libraries and network settings
Public Methods	
WiFiClass::firmwareVersion	Get firmware version
WiFiClass:: begin	Start Wifi connection for OPEN networks
WiFiClass:: config	Configure network IP settings
WiFiClass:: setDNS	Set the DNS server IP address to use
WiFiClass:: disconnect	Disconnect from the network
WiFiClass:: macAddress	Get the interface MAC address
WiFiClass:: localIP	Get the interface IP address
WiFiClass:: subnetMask	Get the interface subnet mask address
WiFiClass:: gatewayIP	Get the gateway IP address
WiFiClass:: SSID	Return the current SSID associated with the network
WiFiClass:: BSSID	Return the current BSSID associated with the network
WiFiClass:: RSSI	Return the current RSSI (Received Signal Strength in dBm) associated with the network
WiFiClass:: encryption-Type	Return the Encryption Type associated with the network
WiFiClass:: scanNetworks	Start scan WiFi networks available
WiFiClass:: SSID	Return the SSID discovered during the network scan
WiFiClass:: encryption-Type	Return the encryption type of the networks discovered during the scanNetworks
WiFiClass:: encryption-TypeEx	Return the security type and encryption type of the networks discovered during the scanNetworks
WiFiClass:: RSSI	Return the RSSI of the networks discovered during the scanNetworks
WiFiClass:: status	Return Connection status
WiFiClass:: hostByName	Resolve the given hostname to an IP address
WiFiClass:: apbegin	Start AP mode
WiFiClass:: disablePower-Save	Disable power-saving mode

WiFiClass::WiFiClass**Description**

Constructs a WiFiClass object and initializes the WiFi libraries and network settings.

Syntax

```
WiFiClass::WiFiClass()
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

An instance of WiFiClass is created as WiFi inside WiFi.h and is extern for direct use.

WiFiClass::firmwareVersion**Description**

Get firmware version

Syntax

```
char* WiFiClass::firmwareVersion()
```

Parameters

The function requires no input parameter.

Returns

WiFi firmware version

Example Code

Example: ConnectWithWPA

This example demos how to connect to an unencrypted WiFi network, and prints the MAC address of the Wifi shield, the IP address obtained, and other network details.

```
#include <WiFi.h>
```

```
// char ssid[] = "yourNetwork" ; // your network SSID (name)

// char pass[] = "secretPassword" ; // your network password

char ssid[] = "SINGTEL-D45F" ; // your network SSID (name)

char pass[] = "mooxuteeth" ; // your network key

int status = WL_IDLE_STATUS; // the Wifi radio's status

void setup() {

//Initialize serial and wait for port to open:

Serial.begin(9600);

while (!Serial) {

; // wait for serial port to connect. Needed for native USB port only

}

// check for the presence of the shield:

if (WiFi.status() == WL_NO_SHIELD) {

Serial.println( "WiFi shield not present" );

// don't continue:

while (true);

}

String fv = WiFi.firmwareVersion();

if (fv != "1.1.0" ) {

Serial.println( "Please upgrade the firmware" );

}

// attempt to connect to Wifi network:

while (status != WL_CONNECTED) {

Serial.print( "Attempting to connect to WPA SSID: ");

Serial.println(ssid);

// Connect to WPA/WPA2 network:

status = WiFi.begin(ssid, pass);

// wait 10 seconds for connection:

delay(10000);

}
```

```
// you' re connected now, so print out the data:
Serial.print( "You' re connected to the network" );
printCurrentNet();
printWifiData();
}

void loop() {

// check the network connection once every 10 seconds:
delay(10000);

printCurrentNet();

}

void printWifiData() {

// print your WiFi shield' s IP address:
IPAddress ip = WiFi.localIP();
Serial.print( "IP Address: ");
Serial.println(ip);
Serial.println(ip);

// print your MAC address:
byte mac[6];
WiFi.macAddress(mac);
Serial.print( "MAC address: ");
Serial.print(mac[0], HEX);
Serial.print( ":" );
Serial.print(mac[1], HEX);
Serial.print( ":" );
Serial.print(mac[2], HEX);
Serial.print( ":" );
Serial.print(mac[3], HEX);
Serial.print( ":" );
Serial.print(mac[4], HEX);
Serial.print( ":" );
```

```
Serial.println(mac[5], HEX);

}

void printCurrentNet() {

// print the SSID of the network you' re attached to:

Serial.print( "SSID: ");

Serial.println(WiFi.SSID());

// print the MAC address of the router you' re attached to:

byte bssid[6];

WiFi.BSSID(bssid);

Serial.print( "BSSID: ");

Serial.print(bssid[5], HEX);

Serial.print( ":" );

Serial.print(bssid[4], HEX);

Serial.print( ":" );

Serial.print(bssid[3], HEX);

Serial.print( ":" );

Serial.print(bssid[2], HEX);

Serial.print( ":" );

Serial.print(bssid[1], HEX);

Serial.print( ":" );

Serial.println(bssid[0], HEX);

// print the received signal strength:

long rssi = WiFi.RSSI();

Serial.print( "signal strength (RSSI):" );

Serial.println(rssi);

// print the encryption type:

byte encryption = WiFi.encryptionType();

Serial.print( "Encryption Type:" );

Serial.println(encryption, HEX);

Serial.println();
```

```
}
```

Notes and Warnings

NA

WiFiClass::begin

Description

Start Wifi connection for OPEN networks

Syntax

```
int WiFiClass::begin(char* ssid)
int WiFiClass::begin(char* ssid, uint8_t key_idx, const char *key)
int WiFiClass::begin(char* ssid, const char *passphrase)
```

Parameters

ssid: Pointer to the SSID string

key_idx: The key index to set. Valid values are 0-3.

key: Key input buffer.

passphrase: Passphrase. Valid characters in a passphrase must be between ASCII 32-126 (decimal).

Returns

WiFi status

Example Code

Example: ConnectWithWPA

This example demos how to connect to an unencrypted WiFi network, and prints the MAC address of the Wifi shield, the IP address obtained, and other network details. The details of the code can be found in the previous section of `WiFiClass::firmwareVersion`.

Notes and Warnings

NA

WiFiClass::config

Description

Configure network settings for the WiFi network

Syntax

```
void WiFiClass::config(IPAddress local_ip)
void WiFiClass::config(IPAddress local_ip, IPAddress dns_server)
void WiFiClass::config(IPAddress local_ip, IPAddress dns_server, IPAddress gateway)
void WiFiClass::config(IPAddress local_ip, IPAddress dns_server, IPAddress gateway, IPAddress subnet)
```

Parameters

local_ip: Local device IP address to use on the network
dns_server: IP address of the DNS server to use
gateway: IP address of the gateway device on the network
subnet: Subnet mask for the network, expressed as a IP address

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

This will disable the DHCP client when connecting to a network, and will require the network accepts a static IP. The configured IP addresses will also apply to AP mode, but the DHCP server will not be disabled in AP mode.

WiFiClass::setDNS

Description

Configure the IP address of the DNS server to use

Syntax


```
void WiFiClass::setDNS(IPAddress dns_server1)
void WiFiClass::setDNS(IPAddress dns_server1, IPAddress dns_server2)
```

Parameters

dns_server1: IP address of DNS server to use

dns_server2: IP address of DNS server to use

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

WiFiClass::disconnect**Description**

Disconnect from the network

Syntax

```
int WiFiClass::disconnect()
```

Parameters

The function requires no input parameter.

Returns

The function returns one value of wl_status_t enum as an integer.

Example Code

NA

Notes and Warnings

NA

WiFiClass::macAddress

Description

Get the interface MAC address

Syntax

```
uint8_t* WiFiClass::macAddress(uint8_t* mac)
```

Parameters

mac: an array to store MAC address

Returns

The function returns a pointer to uint8_t array with length WL_MAC_ADDR_LENGTH.

Example Code

Example: ConnectWithWPA

This example demos how to connect to an unencrypted WiFi network, and prints the MAC address of the Wifi shield, the IP address obtained, and other network details. The details of the code can be found in the previous section of `WiFiClass::firmwareVersion`.

Notes and Warnings

NA

WiFiClass::localIP

Description

Get the interface IP address

Syntax

IPAddress WiFiClass::localIP()

Parameters

The function requires no input parameter.

Returns

Ip address value

Example Code

Example: ConnectWithWPA

This example demos how to connect to an unencrypted WiFi network, and prints the MAC address of the Wifi shield, the IP address obtained, and other network details. The details of the code can be found in the previous section of WiFiClass:: firmwareVersion.

Notes and Warnings

NA

WiFiClass::subnetMask

Description

Get the interface subnet mask address

Syntax

IPAddress WiFiClass::subnetMask()

Parameters

The function requires no input parameter.

Returns

subnet mask address value

Example Code

Example: ConnectNoEncryption

This example demonstrates how to connect to an unencrypted WiFi network and prints the MAC address of the WiFi shield, the IP address obtained, and other network details.

```
#include <WiFi.h>

char ssid[] = "SINGTEL-D45F_5G" ;// the name of your network
int status = WL_IDLE_STATUS; // the Wifi radio's status

void setup() {
  //Initialize serial and wait for port to open:
  Serial.begin(9600);

  while (!Serial) {
    ; // wait for serial port to connect. Needed for native USB port only
  }

  // check for the presence of the shield:
  if (WiFi.status() == WL_NO_SHIELD) {
    Serial.println( "WiFi shield not present" );
    // don't continue:
    while (true);
  }

  String fv = WiFi.firmwareVersion();
  if (fv != "1.1.0" ) {
    Serial.println( "Please upgrade the firmware" );
  }

  // attempt to connect to Wifi network:

  while (status != WL_CONNECTED) {
    Serial.print( "Attempting to connect to open SSID: ");
    Serial.println(ssid);
    status = WiFi.begin(ssid);

    // wait 10 seconds for connection:
    delay(10000);
  }
```

```
// you' re connected now, so print out the data:
Serial.print( "You' re connected to the network" );
printCurrentNet();
printWifiData();
}

void loop() {

// check the network connection once every 10 seconds:
delay(10000);

printCurrentNet();

}

void printWifiData() {

// print your WiFi shield' s IP address:
IPAddress ip = WiFi.localIP();
Serial.print( "IP Address: ");
Serial.println(ip);
Serial.println(ip);

// print your MAC address:
byte mac[6];
WiFi.macAddress(mac);
Serial.print( "MAC address: ");
Serial.print(mac[0], HEX);
Serial.print( ":" );
Serial.print(mac[1], HEX);
Serial.print( ":" );
Serial.print(mac[2], HEX);
Serial.print( ":" );
Serial.print(mac[3], HEX);
Serial.print( ":" );
Serial.print(mac[4], HEX);
Serial.print( ":" );
```

```
Serial.println(mac[5], HEX);

// print your subnet mask:

IPAddress subnet = WiFi.subnetMask();

Serial.print( "NetMask:  ");

Serial.println(subnet);

// print your gateway address:

IPAddress gateway = WiFi.gatewayIP();

Serial.print( "Gateway:  ");

Serial.println(gateway);

}

void printCurrentNet() {

// print the SSID of the network you' re attached to:

Serial.print( "SSID:  ");

Serial.println(WiFi.SSID());

// print the MAC address of the router you' re attached to:

byte bssid[6];

WiFi.BSSID(bssid);

Serial.print( "BSSID:  ");

Serial.print(bssid[5], HEX);

Serial.print( ":" );

Serial.print(bssid[4], HEX);

Serial.print( ":" );

Serial.print(bssid[3], HEX);

Serial.print( ":" );

Serial.print(bssid[2], HEX);

Serial.print( ":" );

Serial.print(bssid[1], HEX);

Serial.print( ":" );

Serial.println(bssid[0], HEX);

// print the received signal strength:
```

```
long rssi = WiFi.RSSI();  
Serial.print( "signal strength (RSSI):" );  
Serial.println(rssi);  
  
// print the encryption type:  
byte encryption = WiFi.encryptionType();  
Serial.print( "Encryption Type:" );  
Serial.println(encryption, HEX);  
}
```

Notes and Warnings

NA

WiFiClass::gatewayIP

Description

Get the gateway IP address

Syntax

```
IPAddress WiFiClass::gatewayIP()
```

Parameters

The function requires no input parameter.

Returns

The function returns the value of the gateway IP address.

Example Code

Example: ConnectNoEncryption

This example demonstrates how to connect to an unencrypted WiFi network and prints the MAC address of the WiFi shield, the IP address obtained, and other network details. Details of the code can be found in the section of WiFiClass::subnetMask.

Notes and Warnings

NA

WiFiClass::SSID

Description

Return the current SSID associated with the network

Syntax

```
char* WiFiClass::SSID()
```

Parameters

The function requires no input parameter.

Returns

The function returns current SSID associate with the network.

Example Code

Example: ConnectWithWPA

This example demos how to connect to an unencrypted WiFi network, and prints the MAC address of the Wifi shield, the IP address obtained, and other network details. The details of the code can be found in the previous section of WiFiClass:: firmwareVersion.

Notes and Warnings

NA

WiFiClass::BSSID

Description

Return the current BSSID associated with the network

Syntax


```
uint8_t* WiFiClass::BSSID(uint8_t* bssid)
```

Parameters

bssid: an array to store bssid

Returns

pointer to uint8_t array with length WL_MAC_ADDR_LENGTH

Example Code

Example: ConnectWithWPA

This example demos how to connect to an unencrypted WiFi network, and prints the MAC address of the Wifi shield, the IP address obtained, and other network details. The details of the code can be found in the previous section of `WiFiClass::firmwareVersion`.

Notes and Warnings

NA

WiFiClass::RSSI**Description**

Return the current RSSI (Received Signal Strength in dBm) associated with the network

Syntax

```
int32_t WiFiClass::RSSI()
```

Parameters

The function requires no input parameter.

Returns

The function returns a signed-value signal strength

Example Code

Example: ConnectWithWPA

This example demos how to connect to an unencrypted WiFi network, and prints the MAC address of the Wifi shield, the IP address obtained, and other network details. The details of the code can be found in the previous section of `WiFiClass::firmwareVersion`.

Notes and Warnings

NA

WiFiClass::encryptionType

Description

Return the Encryption Type associated with the network

Syntax

```
uint8_t WiFiClass::encryptionType()
```

Parameters

The function requires no input parameter.

Returns

The function returns one unsigned integer value of `wl_enc_type` enum.

Example Code

Example: ConnectWithWPA

Notes and Warnings

NA

WiFiClass::scanNetworks

Description

Start scan WiFi networks available

Syntax

```
int8_t WiFiClass::scanNetworks()
```

Parameters

The function requires no input parameter.

Returns

The function returns the number of discovered networks as an integer.

Example Code

Example: ScanNetworks

This example prints the Wifi shield's MAC address, and scans for available Wifi networks using the Wifi shield. Every ten seconds, it scans again. It doesn't connect to any network, so no encryption scheme is specified.

```
#include <WiFi.h>
```

```
void setup() {
```

```
  //Initialize serial and wait for port to open:
```

```
  Serial.begin(9600);
```

```
  while (!Serial) {
```

```
    ; // wait for serial port to connect. Needed for native USB port only
```

```
  }
```

```
  // check for the presence of the shield:
```

```
  if (WiFi.status() == WL_NO_SHIELD) {
```

```
    Serial.println( "WiFi shield not present" );
```

```
    // don't continue:
```

```
    while (true);
```

```
  }
```

```
  String fv = WiFi.firmwareVersion();
```

```
  if (fv != "1.1.0" ) {
```

```
    Serial.println( "Please upgrade the firmware" );
```

```
  }
```

```
// Print WiFi MAC address:

printMacAddress();

}

void loop() {
// scan for existing networks:

Serial.println( "Scanning available networks..." );

listNetworks();

delay(10000);

}

void printMacAddress() {
// the MAC address of your Wifi shield

byte mac[6];

// print your MAC address:

WiFi.macAddress(mac);

Serial.print( "MAC: ");

Serial.print(mac[0], HEX);

Serial.print( ":" );

Serial.print(mac[1], HEX);

Serial.print( ":" );

Serial.print(mac[2], HEX);

Serial.print( ":" );

Serial.print(mac[3], HEX);

Serial.print( ":" );

Serial.print(mac[4], HEX);

Serial.print( ":" );

Serial.println(mac[5], HEX);

}

void listNetworks() {

// scan for nearby networks:

Serial.println(" * Scan Networks *" );
```

```

int numSsid = WiFi.scanNetworks();

if (numSsid == -1) {
  Serial.println( "Couldn' t get a wifi connection" );

  while (true);
}

// print the list of networks seen:
Serial.print( "number of available networks:" );
Serial.println(numSsid);

// print the network number and name for each network found:
for (int thisNet = 0; thisNet < numSsid; thisNet++) {
  Serial.print(thisNet);
  Serial.print(" ) ");
  Serial.print(WiFi.SSID(thisNet));
  Serial.print(" tSignal: ");
  Serial.print(WiFi.RSSI(thisNet));
  Serial.print(" dBm" );
  Serial.print(" tEncryptionRaw: ");
  printEncryptionTypeEx(WiFi.encryptionTypeEx(thisNet));
  Serial.print(" tEncryption: ");
  printEncryptionType(WiFi.encryptionType(thisNet));
}
}

void printEncryptionTypeEx(uint32_t thisType) {
  /* Arduino wifi api use encryption type to mapping to security type.
  * This function demonstrate how to get more richful information of security type.
  */

  switch (thisType) {
    case SECURITY_OPEN:
      Serial.print( "Open" );
      break;

```

```
case SECURITY_WEP_PSK:
Serial.print( "WEP" );
break;
case SECURITY_WPA_TKIP_PSK:
Serial.print( "WPA TKIP" );
break;
case SECURITY_WPA_AES_PSK:
Serial.print( "WPA AES" );
break;
case SECURITY_WPA2_AES_PSK:
Serial.print( "WPA2 AES" );
break;
case SECURITY_WPA2_TKIP_PSK:
Serial.print( "WPA2 TKIP" );
break;
case SECURITY_WPA2_MIXED_PSK:
Serial.print( "WPA2 Mixed" );
break;
case SECURITY_WPA_WPA2_MIXED:
Serial.print( "WPA/WPA2 AES" );
break;
}
}
void printEncryptionType(int thisType) {
// read the encryption type and print out the name:
switch (thisType) {
case ENC_TYPE_WEP:
Serial.println( "WEP" );
break;
case ENC_TYPE_TKIP:
```

```
Serial.println( "WPA" );  
  
break;  
  
case ENC_TYPE_CCMP:  
Serial.println( "WPA2" );  
  
break;  
  
case ENC_TYPE_NONE:  
Serial.println( "None" );  
  
break;  
  
case ENC_TYPE_AUTO:  
Serial.println( "Auto" );  
  
break;  
  
}  
  
}
```

Notes and Warnings

NA

WiFiClass::SSID

Description

Return the SSID discovered during the network scan

Syntax

```
char* WiFiClass::SSID(uint8_t networkItem)
```

Parameters

networkItem: specify from which network item want to get the information

Returns

The function returns ssid string of the specified item on the networks scanned a list.

Example Code

Example: ScanNetworks

This example prints the Wifi shield's MAC address, and scans for available Wifi networks using the Wifi shield. Every ten seconds, it scans again. It doesn't connect to any network, so no encryption scheme is specified. The details of the code can be found in the previous section of `WiFiClass::scanNetworks`.

Notes and Warnings

NA

WiFiClass::encryptionType**Description**

Return the encryption type of the networks discovered during the `scanNetworks`

Syntax

```
uint8_t WiFiClass::encryptionType(uint8_t networkItem)
```

Parameters

`networkItem`: specify from which network item want to get the information

Returns

encryption type (enum `wl_enc_type`) of the specified item on the networks scanned a list

Example Code

Example: ScanNetworks

This example prints the Wifi shield's MAC address, and scans for available Wifi networks using the Wifi shield. Every ten seconds, it scans again. It doesn't connect to any network, so no encryption scheme is specified. The details of the code can be found in the previous section of `WiFiClass::scanNetworks`.

Notes and Warnings

NA

WiFiClass::encryptionTypeEx

Description

Return the security type and encryption type of the networks discovered during the scanNetworks

Syntax

```
uint32_t WiFiClass::encryptionTypeEx(uint8_t networkItem)
```

Parameters

networkItem: specify from which network item want to get the information

Returns

security and encryption type of the specified item on the networks scanned a list

Example Code

Example: ScanNetworks

This example prints the Wifi shield's MAC address, and scans for available Wifi networks using the Wifi shield. Every ten seconds, it scans again. It doesn't connect to any network, so no encryption scheme is specified. The details of the code can be found in the previous section of WiFiClass:: scanNetworks.

Notes and Warnings

NA

WiFiClass::RSSI**Description**

Return the RSSI of the networks discovered during the scanNetworks

Syntax

```
int32_t WiFiClass::RSSI(uint8_t networkItem)
```

Parameters

networkItem: specify from which network item want to get the information

Returns

signed value of RSSI of the specified item on the networks scanned a list

Example Code

Example: ScanNetworks

This example prints the Wifi shield's MAC address, and scans for available Wifi networks using the Wifi shield. Every ten seconds, it scans again. It doesn't connect to any network, so no encryption scheme is specified. The details of the code can be found in the previous section of `WiFiClass::scanNetworks`.

Notes and Warnings

NA

`WiFiClass::status`

Description

Return Connection status

Syntax

```
uint8_t WiFiClass::status()
```

Parameters

The function requires no input parameter.

Returns

The function returns one of the values defined in `wl_status_t` as an unsigned integer.

Example Code

Example: ConnectWithWPA

This example demos how to connect to an unencrypted WiFi network, and prints the MAC address of the Wifi shield, the IP address obtained, and other network details. The details of the code can be found in the previous section of `WiFiClass::firmwareVersion`.

Notes and Warnings

NA

WiFiClass::hostByName

Description

Resolve the given hostname to an IP address

Syntax

```
int WiFiClass::hostByName(const char* aHostname, IPAddress& aResult)
```

Parameters

aHostname: Name to be resolved

aResult: IPAddress structure to store the returned IP address

Returns

The function returns “1” if aIPAddrString was successfully converted to an IP address,else otherwise, it will return as an error code.

Example Code

NA

Notes and Warnings

NA

WiFiClass::apbegin

Description

Start AP mode

Syntax

```
int WiFiClass::apbegin(char* ssid, char* channel)
```

```
int WiFiClass::apbegin(char* ssid, char* password, char* channel)
```

Parameters

ssid: SSID of the AP network

channel: AP' s channel, default 1

password: AP' s password

Returns

The function will return the WiFi status.

Example Code

Example: WiFiAPMode

#include

```
char ssid[] = "yourNetwork" ;//Set the AP' s SSID

char pass[] = "Password" ;//Set the AP' s password

char channel[] = "1" ;//Set the AP' s channel

int status = WL_IDLE_STATUS; // the Wifi radio' s status

void setup() {

//Initialize serial and wait for port to open:

Serial.begin(9600);

while (!Serial) {

; // wait for serial port to connect. Needed for native USB port only

}

// check for the presence of the shield:

if (WiFi.status() == WL_NO_SHIELD) {

Serial.println( "WiFi shield not present" );

while (true);

}

String fv = WiFi.firmwareVersion();

if (fv != "1.1.0" ) {

Serial.println( "Please upgrade the firmware" );

}

}
```

```
// attempt to start AP:

while (status != WL_CONNECTED) {

Serial.print( "Attempting to start AP with SSID: ");

Serial.println(ssid);

status = WiFi.apbegin(ssid, pass, channel);

delay(10000);

}

//AP MODE already started:

Serial.println( "AP mode already started" );

Serial.println();

printWifiData();

printCurrentNet();

}

void loop() {

// check the network connection once every 10 seconds:

delay(10000);

printCurrentNet();

}

void printWifiData() {

// print your WiFi shield's IP address:

IPAddress ip = WiFi.localIP();

Serial.print( "IP Address: ");

Serial.println(ip);

// print your subnet mask:

IPAddress subnet = WiFi.subnetMask();

Serial.print( "NetMask: ");

Serial.println(subnet);

// print your gateway address:

IPAddress gateway = WiFi.gatewayIP();

Serial.print( "Gateway: ");
```

```
Serial.println(gateway);

Serial.println();

}

void printCurrentNet() {
// print the SSID of the AP:
Serial.print( "SSID: ");
Serial.println(WiFi.SSID());
// print the MAC address of AP:
byte bssid[6];
WiFi.BSSID(bssid);
Serial.print( "BSSID: ");
Serial.print(bssid[0], HEX);
Serial.print( ":" );
Serial.print(bssid[1], HEX);
Serial.print( ":" );
Serial.print(bssid[2], HEX);
Serial.print( ":" );
Serial.print(bssid[3], HEX);
Serial.print( ":" );
Serial.print(bssid[4], HEX);
Serial.print( ":" );
Serial.println(bssid[5], HEX);
// print the encryption type:
byte encryption = WiFi.encryptionType();
Serial.print( "Encryption Type:" );
Serial.println(encryption, HEX);
Serial.println();
}
```

Notes and Warnings

NA

WiFiClass::disablePowerSave

Description

Disable power-saving mode

Syntax

```
int WiFiClass::disablePowerSave()
```

Parameters

The function requires no input parameter.

Returns

1 if disable success, 0 if failed

Example Code

NA

Notes and Warnings

NA

Class WiFiClient

WiFiClient Class

Description

Defines a class of WiFi Client implementation for Ameba.

Syntax

```
class WiFiClient
```

Members

Public Constructors	
WiFiClient::WiFiClient	Constructs a WiFiClient instance that connects to the specified IP address and port.
Public Methods	
WiFiClient::connect	Connect to the IP address and port
WiFiClient::write	Write a single byte into the packet
WiFiClient::available	Number of bytes remaining in the current packet
WiFiClient::read	Read a single byte from the current packet
WiFiClient:: peek	Return the next byte from the current packet without moving on to the next byte
WiFiClient:: flush	Finish reading the current packet
WiFiClient::stop	Stop client connection
WiFiClient::connected	Check if client is connected, return 1 if connected, 0 if not
WiFiClient::setRecvTimeout	Set receiving timeout

WiFiClient::WiFiClient

Description

Constructs a WiFiClient instance that connects to the specified IP address and port.

Syntax

```
WiFiClient::WiFiClient()
```

```
WiFiClient::WiFiClient(uint8_t sock)
```

Parameters

sock: socket state, default -1.

Returns

The function returns nothing.

Example Code

Example: WiFiWebClient

```
#include <WiFi.h>
```

```
char ssid[] = "yourNetwork" ; // your network SSID (name)
```



```

char pass[] = "password" ; // your network password (use for WPA, or use as key for WEP)

int keyIndex = 0; // your network key Index number (needed only for WEP)

int status = WL_IDLE_STATUS;

//IPAddress server(64,233,189,94); // numeric IP for Google (no DNS)

char server[] = "www.google.com" ; // name address for Google (using DNS)

WiFiClient client;

void setup() {

//Initialize serial and wait for port to open:

Serial.begin(9600);

while (!Serial) {

;

}

// check for the presence of the shield:

if (WiFi.status() == WL_NO_SHIELD) {

Serial.println( "WiFi shield not present" );

// don' t continue:

while (true);

}

String fv = WiFi.firmwareVersion();

if (fv != "1.1.0" ) {

Serial.println( "Please upgrade the firmware" );

}

// attempt to connect to Wifi network:

while (status != WL_CONNECTED) {

Serial.print( "Attempting to connect to SSID: ");

Serial.println(ssid);

// Connect to WPA/WPA2 network. Change this line if using open or WEP network:

status = WiFi.begin(ssid, pass);

// wait 10 seconds for connection:

delay(10000);

```

```
}

Serial.println( "Connected to wifi" );

printWifiStatus();

Serial.println(" nStarting connection to server..." );

// if you get a connection, report back via serial:

if (client.connect(server, 80)) {

  Serial.println( "connected to server" );

  // Make a HTTP request:

  client.println( "GET /search?q=ameba HTTP/1.1" );

  client.println( "Host: www.google.com" );

  client.println( "Connection: close" );

  client.println();

}

}

void loop() {

  // if there are incoming bytes available

  // from the server, read them and print them:

  while (client.available()) {

    char c = client.read();

    Serial.write(c);

  }

  // if the server' s disconnected, stop the client:

  if (!client.connected()) {

    Serial.println();

    Serial.println( "disconnecting from server." );

    client.stop();

    // do nothing forevermore:

    while (true);

  }

}
```

```
void printWifiStatus() {  
    // print the SSID of the network you're attached to:  
    Serial.print( "SSID: ");  
    Serial.println(WiFi.SSID());  
    // print your WiFi shield's IP address:  
    IPAddress ip = WiFi.localIP();  
    Serial.print( "IP Address: ");  
    Serial.println(ip);  
    // print the received signal strength:  
    long rssi = WiFi.RSSI();  
    Serial.print( "signal strength (RSSI):" );  
    Serial.print(rssi);  
    Serial.println(" dBm" );  
}
```

Notes and Warnings

NA

WiFiClient::connect

Description

Connect to the IP address and port

Syntax

```
int WiFiClient::connect(IPAddress ip, uint16_t port)  
int WiFiClient::connect(const char *host, uint16_t port)
```

Parameters

ip: IP address

host: Host name

port: the port to listen on

Returns

Returns “1” : if successful

Returns “0” : if failed

Example Code

Example: WiFiWebClient

The details of the example are explained in the previous section of WiFiClient:: WiFiClient.

Notes and Warnings

NA

WiFiClient::write

Description

Write a single byte into the packet

Syntax

size_t WiFiClient::write(uint8_t byte)

size_t WiFiClient::write(const uint8_t *buf, size_t size)

Parameters

byte: the outgoing byte

buf: the outgoing message

size: the size of the buffer

Returns

The function returns single byte into the packet or returns bytes size from buffer into the packet.

Example Code

NA

Notes and Warnings

NA

WiFiClient::available

Description

Number of bytes remaining in the current packet

Syntax

```
int WiFiClient::available(void)
```

Parameters

The function requires no input parameter.

Returns

- Function returns the number of bytes available in the current packet

Function returns 0: if no data available

Example Code

Example: WiFiWebClient

The details of the example are explained in the previous section of WiFiClient:: WiFiClient.

Notes and Warnings

NA

WiFiClient::read

Description

Read a single byte from the current packet

Syntax

```
int WiFiClient::read()
int WiFiClient::read(unsigned char* buf, size_t size)
int WiFiClient::read(char *buf, size_t size)
```

Parameters

buf: buffer to hold incoming packets (char*)
size: maximum size of the buffer (int)

Returns

size: the size of the buffer
-1: if no buffer is available

Example Code

Example: WiFiWebClient

The details of the example are explained in the previous section of WiFiClient:: WiFiClient.

Notes and Warnings

NA

WiFiClient::peek

Description

Return the next byte from the current packet without moving on to the next byte

Syntax

```
int WiFiClient::peek(void)
```

Parameters

The function requires no input parameter.

Returns

b: the next byte or character

-1: if none is available

Example Code

NA

Notes and Warnings

NA

WiFiClient::flush

Description

Finish reading the current packet

Syntax

```
void WiFiClient::flush(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

WiFiClient::stop

Description

Disconnect from the server. Stop client connection

Syntax

```
void WiFiClient::stop(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: WiFiWebClient

The details of the example are explained in the previous section of WiFiClient:: WiFiClient.

Notes and Warnings

NA

WiFiClient::connected

Description

Check if client is connected, return 1 if connected, 0 if not.

Syntax

```
uint8_t WiFiClient::connected(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns “1” if connected, returns “0” if not connected.

Example Code

Example: WiFiWebClient

The details of the example are explained in the previous section of WiFiClient:: WiFiClient.

Notes and Warnings

NA

WiFiClient::setRecvTimeout

Description

Set receiving timeout

Syntax

```
int WiFiClient::setRecvTimeout(int timeout)
```

Parameters

timeout: timeout in seconds

Returns

0

Example Code

NA

Notes and Warnings

NA

Class WiFiServer

WiFiServer Class

Description

Defines a class of WiFi server implementation for Ameba.

Syntax

```
class WiFiServer
```

Members

Public Constructors	
WiFiServer::WiFiServer(uint16_t port)	Constructs a WiFiServer object and creates a server that listens for incoming connections on the specified port
Public Methods	
WiFiServer::available()	Gets a client that is connected to the server and has data available for reading. The connection persists when the returned client object goes out of scope; you can close it by calling the client.stop()
WiFiServer::begin()	Tells the server to begin listening for incoming connections
WiFiServer::write(const uint8_t* data, size_t len)	Write data to all the clients connected to a server

WiFiServer::WiFiServer

Description

Constructs a WiFiServer object and creates a server that listens for incoming connections on the specified port.

Syntax

```
WiFiServer::WiFiServer(uint16_t port)
```

Parameters

port: The port number being connected to.

Returns

The function returns nothing.

Example Code

Example: SimpleServerWiFi

```
#include <WiFi.h>

char ssid[] = "yourNetwork" ; // your network SSID (name)

char pass[] = "secretPassword" ; // your network password

int keyIndex = 0; // your network key Index number (needed only for WEP)

int status = WL_IDLE_STATUS;

WiFiServer server(5000);

void setup() {

  Serial.begin(9600); // initialize serial communication

  pinMode(9, OUTPUT); // set the LED pin mode

  // check for the presence of the shield:
  if (WiFi.status() == WL_NO_SHIELD) {

    Serial.println( "WiFi shield not present" );

    while (true); // don't continue
  }

  String fv = WiFi.firmwareVersion();
  if ( fv != "1.1.0" )
    Serial.println( "Please upgrade the firmware" );

  // attempt to connect to Wifi network:

  while ( status != WL_CONNECTED) {

    Serial.print( "Attempting to connect to Network named: ");

    Serial.println(ssid); // print the network name (SSID);

    // Connect to WPA/WPA2 network. Change this line if using open or WEP network:
    status = WiFi.begin(ssid, pass);

    // wait 10 seconds for connection:
```

```
delay(10000);

}

server.begin(); // start the tcp server on port 5000

printWifiStatus(); // you're connected now, so print out the status

}

char buffer[256];

void loop() {
  WiFiClient client = server.available();

  while (client.connected()) {
    memset(buffer, 0, 256);

    int n = client.read(((uint8_t*)(&buffer[0]), sizeof(buffer)));

    if (n > 0) {
      for (int i=0; i<n; i++) {
        Serial.print(buffer[i]);
      }

      n = client.write(buffer, n);

      if (n <= 0) break;
    }
  }

  client.stop();
}

void printWifiStatus() {
  // print the SSID of the network you're attached to:
  Serial.print( "SSID: ");
  Serial.println(WiFi.SSID());

  // print your WiFi shield's IP address:
  IPAddress ip = WiFi.localIP();
  Serial.print( "IP Address: ");
  Serial.println(ip);

  // print the received signal strength:
```

```
long rssi = WiFi.RSSI();  
Serial.print( "signal strength (RSSI):" );  
Serial.print(rssi);  
Serial.println(" dBm" );  
}
```

Notes and Warnings

NA

WiFiServer::available

Description

Gets a client that is connected to the server and has data available for reading. The connection persists when the returned client object goes out of scope; you can close it by calling the client.stop().

Syntax

WiFiClient WiFiServer::available(uint8_t* status)

Parameters

status: WiFi availability status

Returns

A Client object; if no Client has data available for reading, this object will evaluate to false in an if-statement

Example Code

Example: SimpleServerWiFi

Details of the code can be found in the previous section of WiFiServer:: WiFiServer.

Notes and Warnings

NA

WiFiServer::begin

Description

Tells the server to begin listening for incoming connections

Syntax

```
void WiFiServer::begin(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: SimpleServerWiFi

Details of the code can be found in the previous section of WiFiServer:: WiFiServer.

Notes and Warnings

NA

WiFiServer::write

Description

Write data to all the clients connected to a server

Syntax

```
size_t WiFiServer::write(uint8_t b)
size_t WiFiServer::write(const uint8_t *buf, size_t size)
```

Parameters

b: byte to be written

buf: data buffer

size: Size of the data in the buffer

Returns

The function returns the number of bytes written. It is not necessary to read this.

Example Code

Example: SimpleServerWiFi

Details of the code can be found in the previous section of WiFiServer:: WiFiServer.

Notes and Warnings

NA

Class WiFiSSLClient

WiFiSSLClient Class

Description

Defines a class of WiFi Secure Socket Layer Client implementation for Ameba.

Syntax

```
class WiFiSSLClient
```

Members

Public Constructors	
WiFiSSLClient::WiFiSSLClient	Constructs a WiFiSSLClient instance that always connects in SSL to the specified IP address and port
Public Methods	
WiFiSSLClient::connect	Connect to the IP address and port
WiFiSSLClient::write	Write a single byte into the packet
WiFiSSLClient::available	Number of bytes remaining in the current packet
WiFiSSLClient::read	Read a single byte from the current packet
WiFiSSLClient:: peek	Return the next byte from the current packet without moving on to the next byte
WiFiSSLClient:: flush	Finish reading the current packet
WiFiSSLClient::stop	Stop SSL client connection
WiFiSSLClient::connected	Check if SSL client is connected, return 1 if connected, 0 if not
WiFiSSLClient:: setRootCA	Set Root CA for authentication
WiFiSSLClient:: set-ClientCertificate	Set certificate of the client
WiFiSSLClient::setRecvTimeout	Set receiving timeout
WiFiSSLClient::setPreSharedKey	Set the pre shared key (PSK) to use for authentication

WiFiSSLClient::WiFiSSLClient

Description

Constructs a WiFiSSLClient instance that always connects in SSL to the specified IP address and port.

Syntax

WiFiSSLClient::WiFiSSLClient(void)

WiFiSSLClient::WiFiSSLClient(uint8_t sock)

Parameters

sock: socket state, default -1

Returns

The function returns nothing.

Example Code

Example: WiFiSSLClient


```

#include

char ssid[] = "yourNetwork" ;// your network SSID (name)

char pass[] = "secretPassword" ;// your network password (use for WPA, or WEP)

int keyIndex = 0; // your network key Index number (needed only for WEP)

int status = WL_IDLE_STATUS;

char server[] = "www.google.com" ;// name address for Google (using DNS)

//unsigned char test_client_key[] = "" ;//For the usage of verifying client
//unsigned char test_client_cert[] = "" ;//For the usage of verifying client
//unsigned char test_ca_cert[] = "" ;//For the usage of verifying server

WiFiSSLClient client;

void setup() {

//Initialize serial and wait for port to open:
Serial.begin(9600);

while (!Serial) {

; // wait for serial port to connect. Needed for native USB port only

}

// check for the presence of the shield:
if (WiFi.status() == WL_NO_SHIELD) {

Serial.println( "WiFi shield not present" );

// don' t continue:

while (true);

}

// attempt to connect to Wifi network:

while (status != WL_CONNECTED) {

Serial.print( "Attempting to connect to SSID: ");

Serial.println(ssid);

// Connect to WPA/WPA2 network. Change this line if using open or WEP network:

status = WiFi.begin(ssid,pass);

// wait 10 seconds for connection:

delay(10000);

```

```
}

Serial.println( "Connected to wifi" );

printWifiStatus();

Serial.println(" nStarting connection to server..." );

// if you get a connection, report back via serial:

if (client.connect(server, 443)) { //client.connect(server, 443, test_ca_cert, test_client_cert, test_client_key)

Serial.println( "connected to server" );

// Make a HTTP request:

client.println( "GET /search?q=realtek HTTP/1.0" );

client.println( "Host: www.google.com" );

client.println( "Connection: close" );

client.println();

}

else

Serial.println( "connected to server failed" );

}

void loop() {

// if there are incoming bytes available

// from the server, read them and print them:

while (client.available()) {

char c = client.read();

Serial.write(c);

}

// if the server' s disconnected, stop the client:

if (!client.connected()) {

Serial.println();

Serial.println( "disconnecting from server." );

client.stop();

// do nothing forevermore:

while (true);
```

```
}  
}  
  
void printWifiStatus() {  
    // print the SSID of the network you're attached to:  
    Serial.print( "SSID: ");  
    Serial.println(WiFi.SSID());  
  
    // print your WiFi shield's IP address:  
    IPAddress ip = WiFi.localIP();  
    Serial.print( "IP Address: ");  
    Serial.println(ip);  
  
    // print your MAC address:  
    byte mac[6];  
    WiFi.macAddress(mac);  
    Serial.print( "MAC address: ");  
    Serial.print(mac[0], HEX);  
    Serial.print( ":" );  
    Serial.print(mac[1], HEX);  
    Serial.print( ":" );  
    Serial.print(mac[2], HEX);  
    Serial.print( ":" );  
    Serial.print(mac[3], HEX);  
    Serial.print( ":" );  
    Serial.print(mac[4], HEX);  
    Serial.print( ":" );  
    Serial.println(mac[5], HEX);  
  
    // print the received signal strength:  
    long rssi = WiFi.RSSI();  
    Serial.print( "signal strength (RSSI):" );  
    Serial.print(rssi);  
    Serial.println(" dBm" );  
}
```

```
}
```

Notes and Warnings

NA

WiFiSSLClient::connect

Description

Connect to the IP address and port.

Syntax

```
int WiFiSSLClient::connect(IPAddress ip, uint16_t port)
```

```
int WiFiSSLClient::connect(const char *host, uint16_t port)
```

```
int WiFiSSLClient::connect(const char* host, uint16_t port, unsigned char* rootCABuff, unsigned char* cli_cert, unsigned char* cli_key)
```

```
int WiFiSSLClient::connect(IPAddress ip, uint16_t port, unsigned char* rootCABuff, unsigned char* cli_cert, unsigned char* cli_key)
```

Parameters

ip: IP address

host: Host name

port: the port to listen on

rootCABuff: buffer that store root CA

cli_cert: buffer that store client certificate

cli_key buffer that store client key pair

Returns

1: if successful

0: if failed

Example Code

Example: WiFiSSLClient

Details of the code can be found in the previous section of WiFiSSLClient:: WiFiSSLClient.

Notes and Warnings

NA

WiFiSSLClient::write**Description**

Write a single byte into the packet

Syntax

```
size_t WiFiSSLClient::write(uint8_t byte)
```

```
size_t WiFiSSLClient::write(const uint8_t *buf, size_t size)
```

Parameters

byte: the outgoing byte

buf: the outgoing message

size: the size of the buffer

Returns

The function returns single -byte into the packet or turns bytes size from the buffer into the packet.

Example Code

NA

Notes and Warnings

NA

WiFiSSLClient::available**Description**

Number of bytes remaining in the current packet

Syntax

```
int WiFiSSLClient::available(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns the number of bytes available in the current packet; else return “0:” if no data available.

Example Code

Example: WiFiSSLClient

Details of the code can be found in the previous section of WiFiSSLClient:: WiFiSSLClient.

Notes and Warnings

NA

WiFiSSLClient::read

Description

Read a single byte from the current packet

Syntax

```
int WiFiSSLClient::read()
```

```
int WiFiSSLClient::read(unsigned char* buf, size_t size)
```

Parameters

buf: buffer to hold incoming packets (char*)

size: maximum size of the buffer (int)

Returns

size: the size of the buffer

-1: if no buffer is available

Example Code

Example: WiFiSSLClient

Details of the code can be found in the previous section of WiFiSSLClient:: WiFiSSLClient.

Notes and Warnings

NA

WiFiSSLClient::peek**Description**

Return the next byte from the current packet without moving on to the next byte.

Syntax

```
int WiFiSSLClient::peek(void)
```

Parameters

The function requires no input parameter.

Returns

b: the next byte or character

-1: if none is available

Example Code

NA

Notes and Warnings

NA

WiFiSSLClient::flush**Description**

Finish reading the current packet

Syntax

`void WiFiSSLClient::flush(void)`

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

WiFiSSLClient::stop

Description

Disconnect from the server. Stop SSL client connection

Syntax

`void WiFiSSLClient::stop(void)`

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: WiFiSSLClient

Details of the code can be found in the previous section of WiFiSSLClient:: WiFiSSLClient.

Notes and Warnings

NA

WiFiSSLClient::connected**Description**

Check if SSL client is connected, return 1 if connected, 0 if not.

Syntax

```
uint8_t WiFiSSLClient::connected(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns “1” if connected, returns “0” if not connected.

Example Code

Example: WiFiSSLClient

Details of the code can be found in the previous section of WiFiSSLClient:: WiFiSSLClient.

Notes and Warnings

NA

WiFiSSLClient::setRootCA**Description**

Set Root CA for authentication

Syntax

```
void WiFiSSLClient::setRootCA(unsigned char *rootCA)
```

Parameters

rootCA: a string of rootCA

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

WiFiSSLClient::setClientCertificate

Description

Set certificate of client

Syntax

```
void WiFiSSLClient::setClientCertificate(unsigned char *client_ca, unsigned char *private_key)
```

Parameters

client_ca: Client certificate

private_key: client's private key pair

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

WiFiSSLClient::setRecvTimeout

Description

Set receiving timeout

Syntax

```
int WiFiSSLClient::setRecvTimeout(int timeout)
```

Parameters

timeout: timeout in seconds

Returns

The function returns “0” .

Example Code

NA

Notes and Warnings

NA

WiFiSSLClient::setPreSharedKey

Description

Set the pre shared key (PSK) to use for authentication

Syntax

```
void WiFiSSLClient::setPreSharedKey(unsigned char *pskIdent, unsigned char *psKey)
```

Parameters

pskIdent: identity for PSK

psKey: Pre shared key

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Do not set a root CA and client certificate if PSK should be used for authentication. If root CA, client certificate and PSK are all set, certificate based authentication will be used.

Class WiFiUdp

WiFiUDP Class

Description

Defines a class of WiFi UDP implementation for Ameba.

Syntax

```
class WiFiUDP
```

Members

Public Constructors	
WiFiUDP::WiFiUDP	Constructs a WiFiUDP instance of the WiFi UDP class that can send and receive UDP messages
Public Methods	
WiFiUDP:: begin	initialize, start listening on the specified port. Returns 1 if successful, 0 if there are no sockets available to use
WiFiUDP:: stop	Finish with the UDP socket
WiFiUDP:: begin-Packet	Start building up a packet to send to the remote host-specific in IP and port
WiFiUDP:: endPacket	Finish off this packet and send it
WiFiUDP:: write	Write a single byte into the packet
WiFiUDP:: writeImmediately	Send packet immediately from the buffer
WiFiUDP:: parsePacket	Start processing the next available incoming packet
WiFiUDP::available	Number of bytes remaining in the current packet
WiFiUDP::read	Read a single byte from the current packet
WiFiUDP:: peek	Return the next byte from the current packet without moving on to the next byte
WiFiUDP:: flush	Finish reading the current packet
WiFiUDP:: remoteIP	Return the IP address of the host who sent the current incoming packet
WiFiUDP:: remotePort	Return the port of the host who sent the current incoming packet
WiFiUDP:: setRecv-Timeout	Set receiving timeout

WiFiUDP::WiFiUDP

Description

Constructs a WiFiUDP instance of the WiFi UDP class that can send and receive UDP messages.

Syntax

```
WiFiUDP::WiFiUDP(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: WiFiUdpSendReceiveString

This example demonstrates WiFi UDP send and receive string. This sketch waits for a UDP packet on a local port using a WiFi shield. When a packet is received an Acknowledge packet is sent to the client on port remotePort.

```
#include <WiFi.h>

#include <WiFiUdp.h>

int status = WL_IDLE_STATUS;

char ssid[] = "yourNetwork" ; // your network SSID (name)

char pass[] = "secretPassword" ; // your network password (use for WPA, or use as key for WEP)

int keyIndex = 0; // your network key Index number (needed only for WEP)

unsigned int localPort = 2390; // local port to listen on

char packetBuffer[255]; //buffer to hold incoming packet

char ReplyBuffer[] = "acknowledged" ; // a string to send back

WiFiUDP Udp;

void setup() {

//Initialize serial and wait for port to open:

Serial.begin(9600);

while (!Serial) {

; // wait for serial port to connect. Needed for native USB port only

}

// check for the presence of the shield:

if (WiFi.status() == WL_NO_SHIELD) {

Serial.println( "WiFi shield not present" );

// don' t continue:

while (true);

}

String fv = WiFi.firmwareVersion();

if (fv != "1.1.0" ) {

Serial.println( "Please upgrade the firmware" );

}

}
```

```

// attempt to connect to Wifi network:

while (status != WL_CONNECTED) {

Serial.print( "Attempting to connect to SSID: ");

Serial.println(ssid);

// Connect to WPA/WPA2 network. Change this line if using open or WEP network:

status = WiFi.begin(ssid,pass);

// wait 10 seconds for connection:

delay(10000);

}

Serial.println( "Connected to wifi" );

printWifiStatus();

Serial.println(" nStarting connection to server..." );

// if you get a connection, report back via serial:

Udp.begin(localPort);

}

void loop() {

// if there's data available, read a packet

int packetSize = Udp.parsePacket();

if (packetSize) {

Serial.print( "Received packet of size ");

Serial.println(packetSize);

Serial.print( "From ");

IPAddress remoteIp = Udp.remoteIP();

Serial.print(remoteIp);

Serial.print(" , port ");

Serial.println(Udp.remotePort());

// read the packet into packetBuffer

int len = Udp.read(packetBuffer, 255);

if (len > 0) {

packetBuffer[len] = 0;

```

```
}  
  
Serial.println( "Contents:" );  
  
Serial.println(packetBuffer);  
  
// send a reply, to the IP address and port that sent us the packet we received  
Udp.beginPacket(Udp.remoteIP(), Udp.remotePort());  
  
Udp.write(ReplyBuffer);  
  
Udp.endPacket();  
  
}  
  
}  
  
void printWifiStatus() {  
  // print the SSID of the network you're attached to:  
  Serial.print( "SSID: ");  
  Serial.println(WiFi.SSID());  
  
  // print your WiFi shield's IP address:  
  IPAddress ip = WiFi.localIP();  
  Serial.print( "IP Address: ");  
  Serial.println(ip);  
  
  // print the received signal strength:  
  long rssi = WiFi.RSSI();  
  Serial.print( "signal strength (RSSI):" );  
  Serial.print(rssi);  
  Serial.println(" dBm" );  
}
```

Notes and Warnings

This constructor does not take in any parameter, thus use another method to set up the IP address and port number.

WiFiUDP::begin

Description

Initialize, start listening on the specified port. Returns 1 if successful, 0 if there are no sockets available to use.

Syntax

```
uint8_t WiFiUDP::begin(uint16_t port)
```

Parameters

port: the local port to listen on

Returns

1: if successful

0: if there are no sockets available to use

Example Code

Example: WiFiUdpSendReceiveString

This example demonstrates WiFi UDP send and receive string. This sketch waits for a UDP packet on a local port using a WiFi shield. When a packet is received an Acknowledge packet is sent to the client on port remotePort. The detail of the code can be found in WiFiUDP:: WiFiUDP.

Notes and Warnings

NA

WiFiUDP::stop**Description**

Disconnect from the server. Release any resource being used during the UDP session.

Syntax

```
void WiFiUDP::stop(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

WiFiUDP::beginPacket

Description

Start building up a packet to send to the remote host-specific in IP and port.

Syntax

```
int WiFiUDP::beginPacket(const char *host, uint16_t port)
```

```
int WiFiUDP::beginPacket(IPAddress ip, uint16_t port)
```

Parameters

host: hostname

port: port number

ip: IP address

Returns

1: if successful

0: if there was a problem with the supplied IP address or port

Example Code

Example: WiFiUdpSendReceiveString

This example demonstrates WiFi UDP send and receive string. This sketch waits for a UDP packet on a local port using a WiFi shield. When a packet is received an Acknowledge packet is sent to the client on port remotePort. The detail of the code can be found in WiFiUDP:: WiFiUDP.

Notes and Warnings

NA

WiFiUDP::endPacket**Description**

Finish off this packet and send it

Syntax

```
int WiFiUDP::endPacket(void)
```

Parameters

The function requires no input parameter.

Returns

1: if the packet was sent successfully

0: if there was an error

Example Code

Example: WiFiUdpSendReceiveString

This example demonstrates WiFi UDP send and receive string. This sketch waits for a UDP packet on a local port using a WiFi shield. When a packet is received an Acknowledge packet is sent to the client on port remotePort. The detail of the code can be found in WiFiUDP:: WiFiUDP.

Notes and Warnings

NA

WiFiUDP::write**Description**

Write a single byte into the packet.

Syntax

size_t WiFiUDP::write(uint8_t byte)

size_t WiFiUDP::write(const uint8_t *buffer, size_t size)

Parameters

byte: the outgoing byte

buffer: the outgoing message

size: the size of the buffer

Returns

single-byte into the packet

bytes size from the buffer into the packet

Example Code

Example: WiFiUdpSendReceiveString

This example demonstrates WiFi UDP send and receive string. This sketch waits for a UDP packet on a local port using a WiFi shield. When a packet is received an Acknowledge packet is sent to the client on port remotePort. The detail of the code can be found in WiFiUDP:: WiFiUDP.

Notes and Warnings

NA

WiFiUDP::writeImmediately

Description

Send packet immediately from the buffer

Syntax

size_t WiFiUDP::writeImmediately(const uint8_t *buffer, size_t size)

Parameters

buffer: the outgoing message

size: the size of the buffer

Returns

single-byte into the packet

bytes size from the buffer into the packet

Example Code

NA

Notes and Warnings

NA

WiFiUDP::parsePacket**Description**

Start processing the next available incoming packet

Syntax

```
int WiFiUDP::parsePacket(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns the size of the packet in bytes or returns “0:” if no packets are available.

Example Code

Example: WiFiUdpSendReceiveString

Notes and Warnings

NA

WiFiUDP::available

Description

Number of bytes remaining in the current packet.

Syntax

```
int WiFiUDP::available(void)
```

Parameters

The function requires no input parameter.

Returns

the number of bytes available in the current packet

0: if parsePacket hasn't been called yet

Example Code

NA

Notes and Warnings

NA

WiFiUDP::read

Description

Read a single byte from the current packet

Syntax

```
int WiFiUDP::read()
```

```
int WiFiUDP::read(unsigned char* buffer, size_t len)
```

Parameters

buffer: buffer to hold incoming packets (char*)

len: maximum size of the buffer (int)

Returns

size: the size of the buffer

-1: if no buffer is available

Example Code

Example: WiFiUdpSendReceiveString

his example demonstrates WiFi UDP send and receive string. This sketch waits for a UDP packet on a local port using a WiFi shield. When a packet is received an Acknowledge packet is sent to the client on port remotePort. The detail of the code can be found in WiFiUDP:: WiFiUDP.

Notes and Warnings

NA

WiFiUDP::peek**Description**

Return the next byte from the current packet without moving on to the next byte

Syntax

int WiFiUDP::peek(void)

Parameters

The function requires no input parameter.

Returns

b: the next byte or character

-1: if none is available

Example Code

NA

Notes and Warnings

NA

WiFiUDP::flush

Description

Finish reading the current packet

Syntax

```
void WiFiUDP::flush(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

WiFiUDP::remoteIP

Description

Return the IP address of the host who sent the current incoming packet

Syntax

IPAddress WiFiUDP::remoteIP(void)

Parameters

The function requires no input parameter.

Returns

IP address connecting to

Example Code

Example: WiFiUdpSendReceiveString

This example demonstrates WiFi UDP send and receive string. This sketch waits for a UDP packet on a local port using a WiFi shield. When a packet is received an Acknowledge packet is sent to the client on port remotePort. The detail of the code can be found in WiFiUDP:: WiFiUDP.

Notes and Warnings

NA

WiFiUDP::remotePort**Description**

Return the port of the host who sent the current incoming packet

Syntax

uint16_t WiFiUDP::remotePort(void)

Parameters

The function requires no input parameter.

Returns

The remote port connecting to

Example Code

Example: WiFiUdpSendReceiveString

This example demonstrates WiFi UDP send and receive string. This sketch waits for a UDP packet on a local port using a WiFi shield. When a packet is received an Acknowledge packet is sent to the client on port remotePort. The detail of the code can be found in WiFiUDP:: WiFiUDP.

Notes and Warnings

NA

WiFiUDP::setRecvTimeout

Description

Set receiving timeout

Syntax

```
void WiFiUDP::setRecvTimeout(int timeout)
```

Parameters

timeout in seconds

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

Readme

The Ameba WiFi related APIs and examples are works based on Arduino WiFi shield libraries (<https://www.arduino.cc/en/Reference/WiFi>).

These include,

- `WiFi.cpp`
- `WiFi.h`
- `WiFiServer.cpp`
- `WiFiServer.h`
- `WiFiUdp.cpp`
- `WiFiUdp.h`

These libraries are under GNU Lesser General Public License, either version 2.1 of the License, or (at your option) any later version.

Wire

Class TwoWire

TwoWire Class

Description

Defines a class of I2C API

Syntax

```
class TwoWire
```

Members

Public Constructors	
TwoWire::TwoWire	Constructs a TwoWire object
Public Methods	
TwoWire::begin	Initialize I2C master/slave
TwoWire::setClock	Set I2C frequency
TwoWire::beginTransaction	Begin I2C transmission
TwoWire::endTransmission	End I2C transmission
TwoWire::requestFrom	Set I2C requestFrom
TwoWire::write	Write data to I2C
TwoWire::available	Check if I2C is available
TwoWire::read	Read data from I2C
TwoWire::peek	Read peek from I2C
TwoWire::flush	Do nothing, use, and transmission(..) to force data transfer
TwoWire::onReceive	Callback function when I2C on receive
TwoWire::onRequest	Callback function when I2C on request

TwoWire::TwoWire

Description

Constructs a TwoWire object.

Syntax

```
TwoWire::TwoWire (uint32_t dwSDAPin, uint32_t dwSCLPin);
```

Parameters

dwSDAPin: The Arduino PIN to be set as an SDA pin.

dwSCLPin: The Arduino PIN to be set as an SCL pin.

Returns

The function returns nothing.

Example Code

Example: MasterWriter

This example demonstrates the use of the wire library writes to an I2C/TWI slave device.

```

#include <Wire.h>

void setup() {
  Wire.begin(); // join i2c bus (address optional for master)
}

byte x = 0;

void loop() {
  Wire.beginTransmission(8); // transmit to device #8
  Wire.write( "x is "); // sends five bytes
  Wire.write(x); // sends one byte
  Wire.endTransmission(); // stop transmitting
  x++;
  delay(500);
}

```

Example: MasterReader

```

#include <Wire.h>

void setup() {
  Wire.begin(); // join i2c bus (address optional for master)
  Serial.begin(9600); // start serial for output
}

void loop() {
  Wire.requestFrom(8, 6); // request 6 bytes from slave device #8
  while (Wire.available()) { // slave may send less than requested
    char c = Wire.read(); // receive a byte as character
    Serial.print(c); // print the character
  }
  delay(500);
}

```

This example demonstrates the use of the wire library reads data from an I2C/TWI slave device.

Notes and Warnings

Include “Wire.h” to use the class function.

TwoWire::begin

Description

Initialize I2C master/slave.

Syntax

```
void TwoWire::begin (void);  
void TwoWire::begin (uint8_t address = 0);  
void TwoWire::begin (int address);
```

Parameters

void: Set the I2C master mode.

address: Set the I2C master mode with slave address value.

Returns

The function returns nothing.

Example Code

Example: MasterReader; MasterWriter

The details of the code can be found in the previous section of TwoWire:: TwoWire.

Notes and Warnings

Include “Wire.h” to use the class function.

TwoWire::setClock

Description

Set I2C frequency.

Syntax

```
void TwoWire::setClock(uint32_t frequency);
```

Parameters

frequency: The frequency values.

Returns

The function returns nothing.

Example Code

Example: MasterReader; MasterWriter

The details of the code can be found in the previous section of TwoWire:: TwoWire.

Notes and Warnings

Include “Wire.h” to use the class function.

TwoWire::beginTransmission**Description**

Begin I2C transmission.

Syntax

```
void TwoWire::beginTransmission (uint8_t address);
```

```
void TwoWire::beginTransmission (int address);
```

Parameters

address: The transmission address.

Returns

The function returns nothing.

Example Code

Example: MasterReader; MasterWriter

The details of the code can be found in the previous section of TwoWire:: TwoWire.

Notes and Warnings

Include “Wire.h” to use the class function.

TwoWire::endTransmission

Description

End I2C transmission. Originally, ‘endTransmission’ was an f(void) function. It has been modified to take one parameter indicating whether or not a STOP should be performed on the bus. Calling endTransmission(false) allows a sketch to perform a repeated start.

WARNING: Nothing in the library keeps track of whether the bus tenure has been properly ended with a STOP. It is very possible to leave the bus in a hung state if no call to endTransmission(true) is made. Some I2C devices will behave oddly if they do not see a STOP.

If the input parameter is void, this provides backward compatibility with the original definition, and expected behavior, of endTransmission.

Syntax

```
uint8_t TwoWire::endTransmission (uint8_t sendStop);  
uint8_t TwoWire::endTransmission (void);
```

Parameters

sendStop: True to end the transmission

Returns

Return 0 if successful, else error.

Example Code

Example: MasterReader; MasterWriter

The details of the code can be found in the previous section of TwoWire:: TwoWire.

Notes and Warnings

Include “Wire.h” to use the class function.

TwoWire::requestFrom

Description

Set I2C requestFrom.

Syntax

```
uint8_t TwoWire::requestFrom (uint8_t address, uint8_t quantity, uint8_t sendStop);  
uint8_t TwoWire::requestFrom (uint8_t address, uint8_t quantity);  
uint8_t TwoWire::requestFrom(int address, int quantity);  
uint8_t TwoWire::requestFrom (int address, int quantity, int sendStop);
```

Parameters

address: I2C read address.

quantity: I2C read quantity.

sendStop: True to end the transmission.

Returns

Return 0 if successful, else error.

Example Code

Example: MasterReader; MasterWriter

The details of the code can be found in the previous section of TwoWire:: TwoWire.

Notes and Warnings

Include “Wire.h” to use the class function.

TwoWire::write

Description

Write data to I2C.

Syntax

```
size_t TwoWire::write (uint8_t data);  
size_t TwoWire::write (const uint8_t *data, size_t quantity);
```

Parameters

data: The data to be transmitted.

quantity: The quantity of data.

Returns

Return 0 if successful, else error.

Example Code

Example: MasterReader; MasterWriter

The details of the code can be found in the previous section of TwoWire:: TwoWire.

Notes and Warnings

Include “Wire.h” to use the class function.

TwoWire::available

Description

Check if I2C is available.

Syntax

```
int TwoWire::available (void);
```

Parameters

The function requires no input parameter.

Returns

Return 0 if successful, else error.

Example Code

Example: MasterReader; MasterWriter

The details of the code can be found in the previous section of TwoWire:: TwoWire.

Notes and Warnings

Include “Wire.h” to use the class function.

TwoWire::read**Description**

Read data from I2C

Syntax

```
int TwoWire::read (void);
```

Parameters

The function requires no input parameter.

Returns

The read data from the receive buffer.

Example Code

Example: MasterReader; MasterWriter

The details of the code can be found in the previous section of TwoWire:: TwoWire.

Notes and Warnings

Include “Wire.h” to use the class function.

TwoWire::peek

Description

Read peek from I2C.

Syntax

```
int TwoWire::peek (void);
```

Parameters

The function requires no input parameter.

Returns

The peek data read from the receive buffer.

Example Code

Example: MasterReader; MasterWriter

The details of the code can be found in the previous section of TwoWire:: TwoWire.

Notes and Warnings

Include “Wire.h” to use the class function.

TwoWire::flush

Description

Do nothing, use endTransmission(..) to force data transfer.

Syntax

```
void TwoWire::flush (void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: MasterReader; MasterWriter

Notes and Warnings

Include “Wire.h” in order to use the class function.

TwoWire::onReceive

Description

Callback function when I2C on receive.

Syntax

```
void TwoWire::onReceive (void(*function)(int));
```

Parameters

function: The callback function.

Returns

The function returns nothing.

Example Code

Example: MasterReader; MasterWriter

The details of the code can be found in the previous section of TwoWire:: TwoWire.

Notes and Warnings

Include “Wire.h” to use the class function.

TwoWire::onRequest

Description

Callback function when I2C on request.

Syntax

```
void TwoWire::onRequest (void(*function)(void));
```

Parameters

function: The callback function

Returns

The function returns nothing.

Example Code

Example: MasterReader; MasterWriter

The details of the code can be found in the previous section of TwoWire:: TwoWire.

Notes and Warnings

Include “Wire.h” to use the class function.

Wire_Readme

The Ameba LCD related api and example are works based on “New LiquidCrystal library” (<https://bitbucket.org/fmalpartida/new-liquidcrystal/>).

These include,

LCD.h

LCD.cpp

I2CIO.h
I2CIO.cpp
LiquidCrystal_I2C.h
LiquidCrystal_I2C.cpp
examples/LcdHelloWorld/LcdHelloWorld.ino

These files inherit the licence of “New LiquidCrystal Library” which are under a Creative Commons Attribution-ShareAlike 3.0 Unported License. CC BY-SA 3.0.

1.2.6 Resources

Links

- [AmebaD Arduino Github](#)
- [Arduino Website](#)

1.2.7 Support

FAQ

Where to buy Ameba RTL8722DM Board?

Refer to [Purchase link](#).

Which Bluetooth standards are supported by RTL8722CSM/RTL8722DM?

Both boards support BLE 5.0. Classic Bluetooth (BR/EDR) is not supported.

Which BLE roles are supported?

RTL8722CSM/RTL8722DM can operate as either a BLE Central or BLE Peripheral device.

Are all pins on RTL8722CSM/RTL8722DM usable?

No, those marked NC are not connected to any pin and thus unusable.

Is XIP (execute in place) supported on RTL8722CSM/RTL8722DM?

Yes, it is supported.

Does RTL8722CSM support 5G WiFi?

No. Only RTL8722DM supports dual band 2.4G + 5G WiFi. RTL8722CSM only supports single band 2.4G WiFi.

How to enter the download mode?

Press and hold the UART DOWNLOAD button. Then Press the RESET button and release both UART DOWNLOAD and RESET buttons.

Trouble shooting

RTL8722CSM/RTL8722DM cannot be found as a Bluetooth device.

Please make sure the antenna is connected properly. Check your code for the correct Bluetooth configurations.

My code is not behaving as I expected.

Try to debug your program using `printf()` and `Serial.print()` statements. If the issue persists, you can ask for help at [Forums](#)

Why is there no output on my serial terminal after connecting to RTL8722CSM/RTL8722DM UART?

RTL8722CSM/RTL8722DM is by default configured at 115200 baudrate, please check if your serial terminal is configured to 115200.

My program is not being downloaded into RTL8722CSM/RTL8722DM?

Please follow the procedure for the correct downloading:

1. Enter the download mode. The on-board Green LED will blink when entered download mode.
 2. When downloading the image into board the on-board Red LED will blink
 3. After a successful download, you will see log like this “All images sent successfully” .
-

Sometimes WiFi signal is weak?

The default antenna for RTL8722CSM/RTL8722DM uses the I-Pex Connector. Please change/connect the I-Pex Connector antenna.

Why is my board not powering up?


Please make sure the connector J38 beside resistor R43 is connected. The connector is used to link the power to IC.

If you have driver issue to connect board to your computer?

Please go to <https://ftdichip.com/drivers/> for USB driver.

1.3 BW16 (by Ai-Thinker)

Welcome to BW16 (by Ai-Thinker) online documentation.

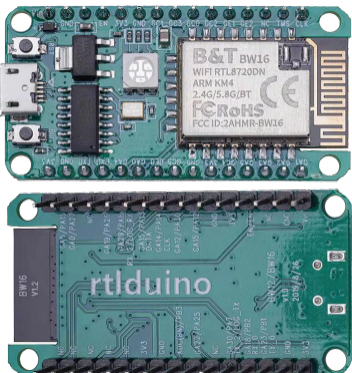

1.3.1 Getting Started


Ameba ARDUINO: Getting Started with BW16

Required Environment


RTL8720DN Dual-Band Wi-Fi board currently supports Windows XP/7/8/10 32-bits and 64-bits operating systems. In this documentation, please use Arduino IDE with version 1.8.15 or later.

Introduction to BW16

Realtek RTL8720DN is a Wi-Fi and Bluetooth IC that supports 2.4GHz and 5GHz dual bands for Wi-Fi communication, and Bluetooth Low Energy (BLE) 5.0. BW16 is a module manufactured by B&T, this module is a highly integrated Wi-Fi and Bluetooth module with the RTL8720DN as the main SoC (System on Chip), it can be regarded as an SoC for the Wi-Fi and Bluetooth application with typical SBCs.

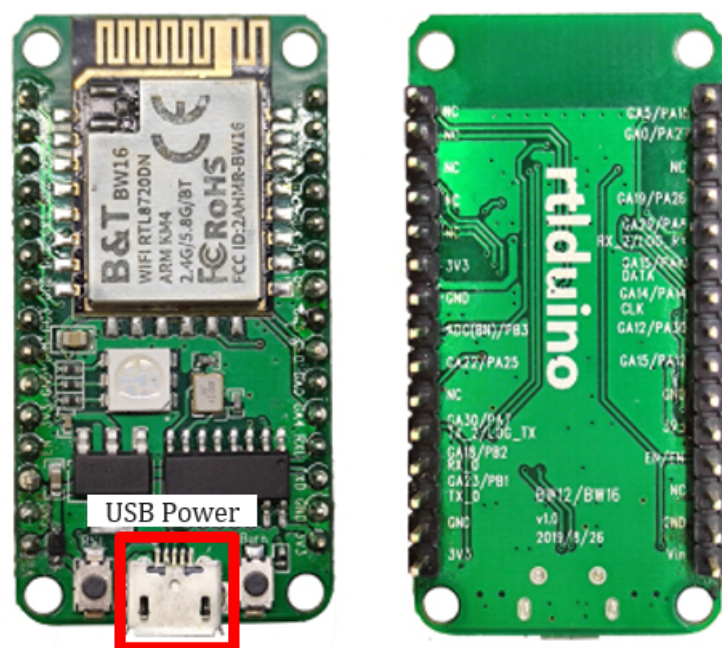


RTL8720DN (BW16) has a smaller size than AmebaD and AmebaD MINI as shown in the above figure. It uses Micro USB to supply power, which is common in many smart devices. Please refer to the following figure and table for the pin diagram and function of RTL8720DN (BW16).

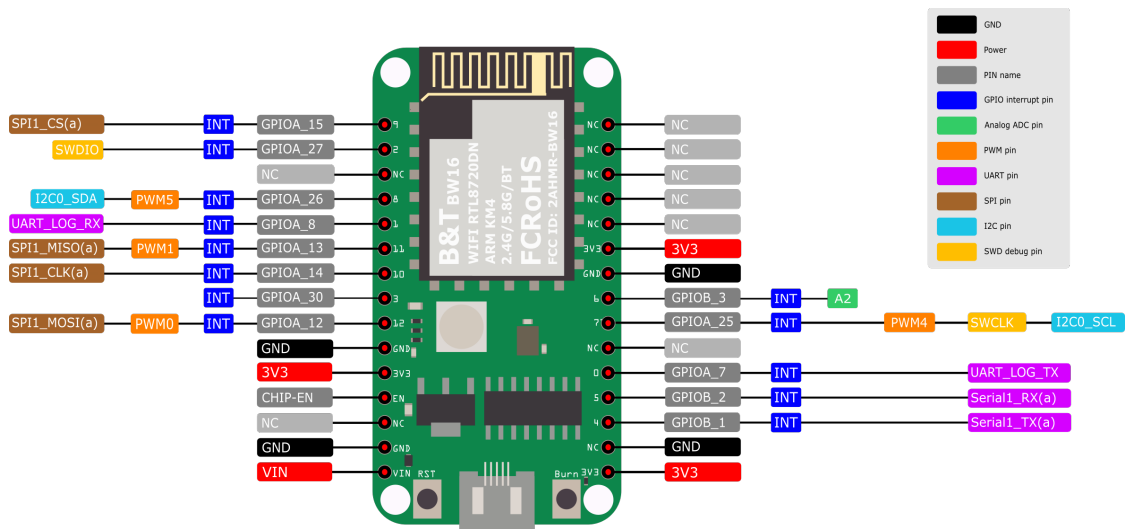

#	PIN name	GPIO	ADC	PWM	UART	SPI	I2C
D0(PA7)	GPIOA_7	✓			UART_LOG_TX		
D1(PA8)	GPIOA_8	✓			UART_LOG_RX		
D2(PA27)	GPIOA_27	✓					
D3(PA30)	GPIOA_30	✓					
D4(PB1)	GPIOB_1	✓			Serial_TX		
D5(PB2)	GPIOB_2	✓			Serial_RX		
D6(PB3)	GPIOB_3	✓	A2				
D7(PA25)	GPIOA_25				✓		I2C0_CLK
D8(PA26)	GPIOA_26	✓		✓			I2C0_SDA
D9(PA15)	GPIOA_15	✓				SPI_CS	
D10(PA14)	GPIOA_14	✓				SPI_CLK	
D11(PA13)	GPIOA_13	✓		✓		SPI_MISO	
D12(PA12)	GPIOA_12	✓		✓		SPI_MOSI	

Setting up Development Environment

Step 1. Installing the Driver

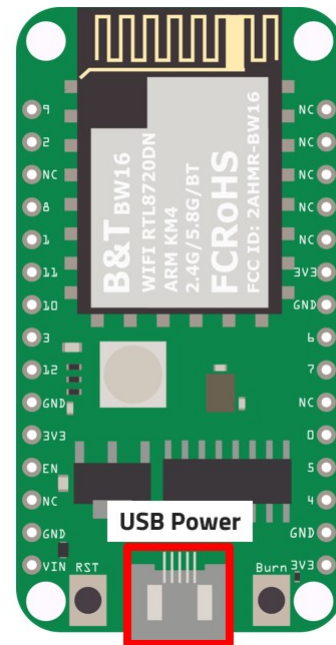


First, connect RTL8720DN (BW16) to the computer via Micro USB:

If this is the first time you connect RTL8720DN (BW16) to your computer, here is something that you might take note of:

From the pinmap above, we know D0 and D1 pins are used for program uploading. However, according to the schematic design of AI Thinker, the onboard USB-to-UART module is connected to D4 and D5 which cannot be directly used for program upload.


In order to upload firmware to this board, we suggested that you could choose to add in an external USB-to-UART module connecting to D0 and D1 as shown in the pin connection below:

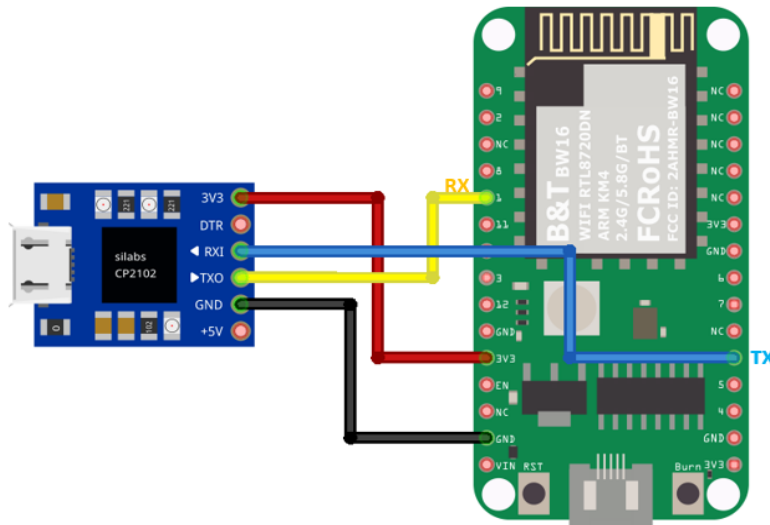


Optionally, you could short the pins indicated below to use the on-board USB:

D1 — D5

D0 — D4

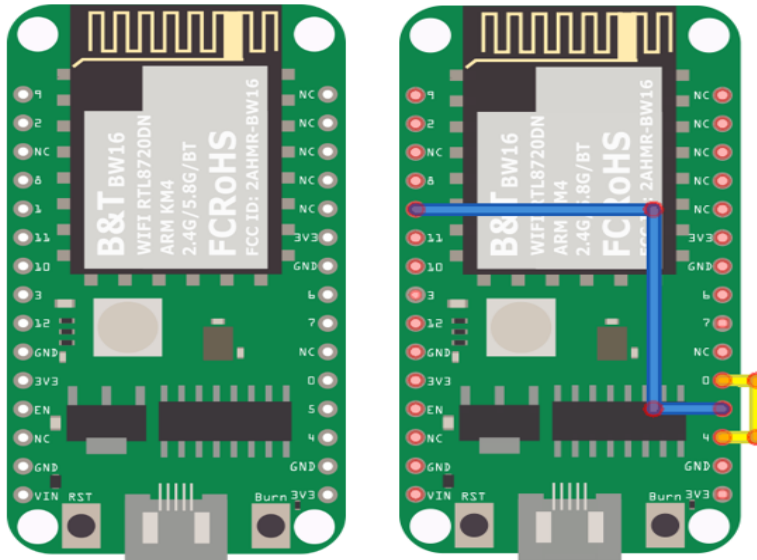

After connecting accordingly, the USB driver for RTL8720DN (BW16) will be automatically installed. If you have driver issue of connecting board, please go to http://www.wch-ic.com/downloads/CH341SER_ZIP.html for USB driver. You can check the COM Port number in your Device Manager:

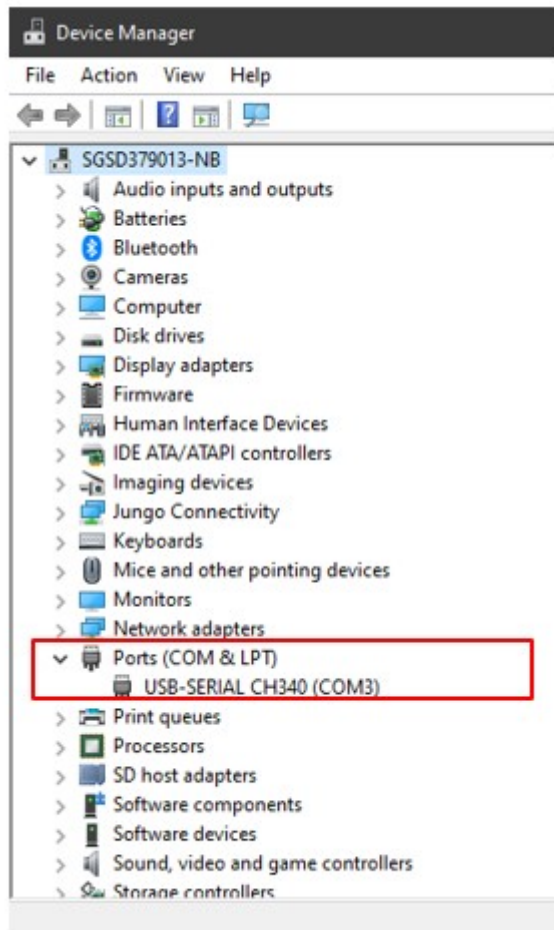

Step 2. Set up Arduino IDE

From version 1.6.5, Arduino IDE supports third-party hardware. Therefore, we can use Arduino IDE to develop applications on RTL8720DN (BW16), and the basic examples of Arduino can run on RTL8720DN (BW16) too. Refer to the Basic Examples.

Arduino IDE can be downloaded in the [Arduino website](#).


When the installation is finished, open Arduino IDE. To set up RTL8722DM correctly in Arduino IDE, go to “File” -> “Preferences” .

And paste the following URL into “Additional Boards Manager URLs” field:


```
https://github.com/ambiot/ambd_arduino/raw/master/Arduino_package/package_realtek.com_amebad_index.json
```

RTL8720DN (BW16) will be supported from v3.0.8 officially.

Next, go to “Tools” -> “Board” -> “Boards Manager” :

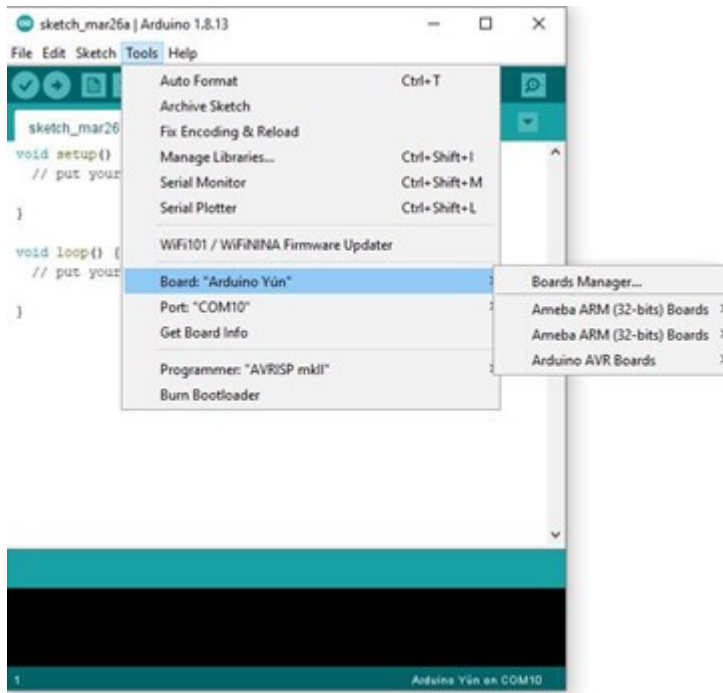

The “*Boards Manager*” requires about 10~20 seconds to refresh all hardware files (if the network is in bad condition, it may take longer). Every time the new hardware is connected, we need to reopen the Board Manager. So, we close the “*Boards Manager*”, and then open it again. Find “*Realtek AmebaD Boards (32-bits ARM Cortex-M4 @200MHz)*” in the list, click “*Install*”, then the Arduino IDE starts to download required files for RTL8722DM.

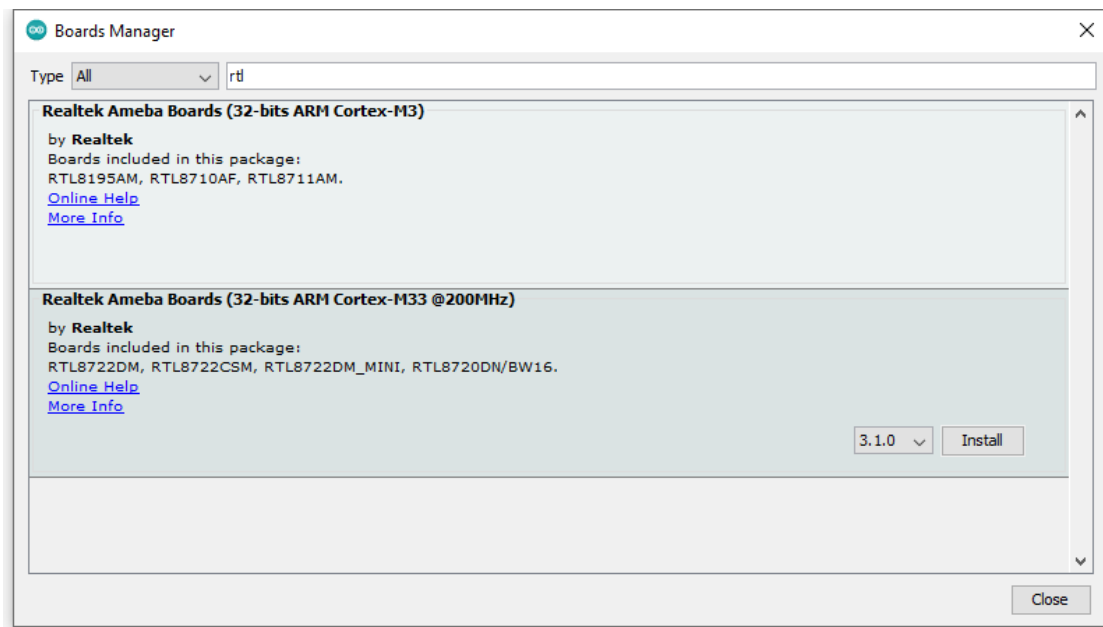


If you are facing GitHub downloading issue, please refer to the following link at [Download/Software Development Kit](#). There are 3 sections:

1. “AmebaD_Arduino_patch1_SDK” , please select at least 1 of the SDKs. There are 5 latest released SDK options.
2. “AmebaD_Arduino_patch2_Tools” , please select according to your operation system. There are Windows, Linux and MacOS.
3. “AmebaD_Arduino_Source_Code” , this section is optional download only wants to refer the latest source code.

Download the files selected, then unzip (patch1 and patch2 are compulsory). There are “Install.doc” / “Install.pdf” for you to refer installation steps. According to your system, please run the installation tool in the “Offline_SDK_installation_tool” folder.


After the installation tool running successfully, you may open Arduino IDE and proceed to “Tools” -> “Board” -> “Boards Manager...”. Try to find “Realtek AmebaD Boards (32-bits ARM Cortex-M4 @200MHz)” ‘ in the list, click “Install” , then the Arduino IDE starts to download required files for AmebaD.

Finally, we select RTL8722DM as current connected board in “Tools” -> “Board” -> “Ameba ARM (32-bits) Boards” -> “RTL8722DM”:

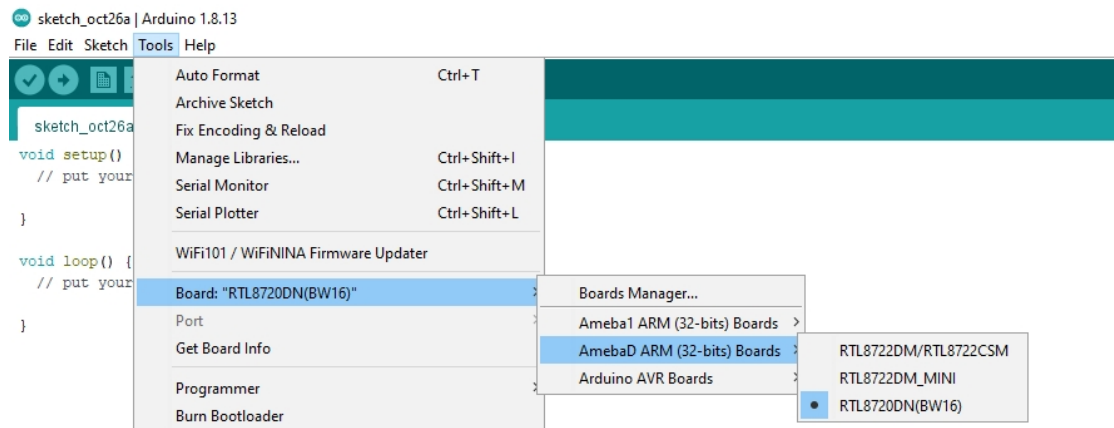

How to upload firmware into BW16

Depending on the batch of manufacturing, some BW16 modules on the development board might have built-in the default B&T firmware, the firmware information is shown in the image below:

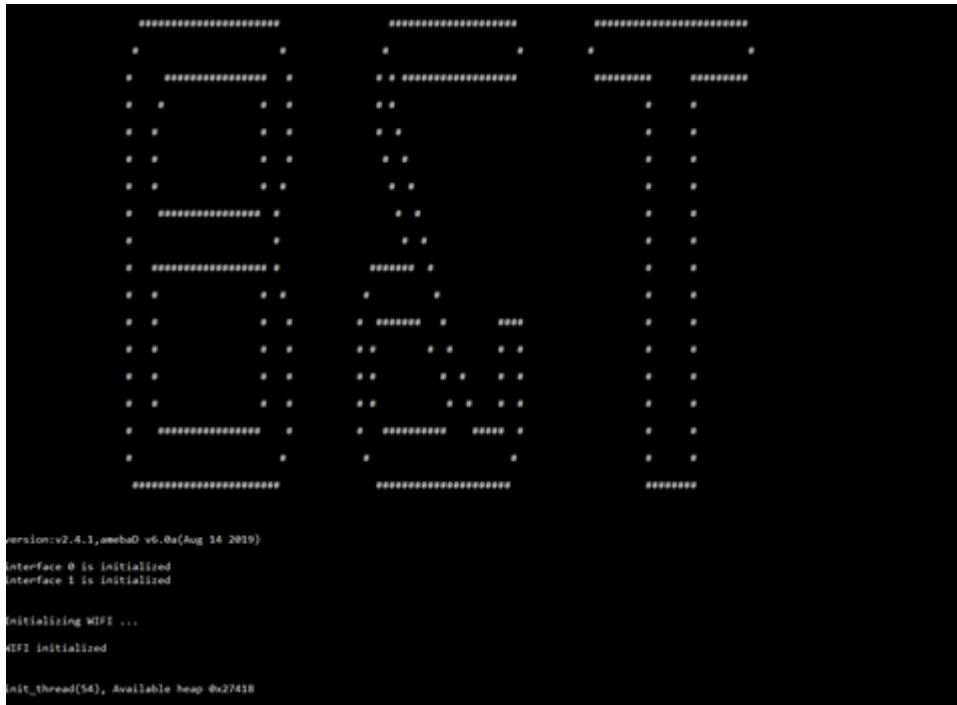

This will cause Arduino Image unable to flash into the module. Although information of “All images are sent successfully! Image tool closed! Upload Image did.” is showing in the Image Tool, however, the factory image is unable to be erased. Unfortunately after press the onboard RST button, you will find the factory image still remains in the flash.

Arduino IDE provides many built-in examples, which can be compiled, uploaded and run directly on the boards. Here, we take the “Blink” example as the first try.

Open “File” -> “Examples” -> “01.Basics” -> “Blink” :

Uploading Solution

Method 1: Use AmebaD Image Tool to erase flash

The B&T default factory image can be washed using “Erase” function provided by Realtek’ s Image Tool. Using Image Tool to erase the flash image memory starting from memory address: 0x8000_0000 till the end of 2MB memory location, later on, we need to upload Realtek’ s image back to the module again using Arduino IDE.

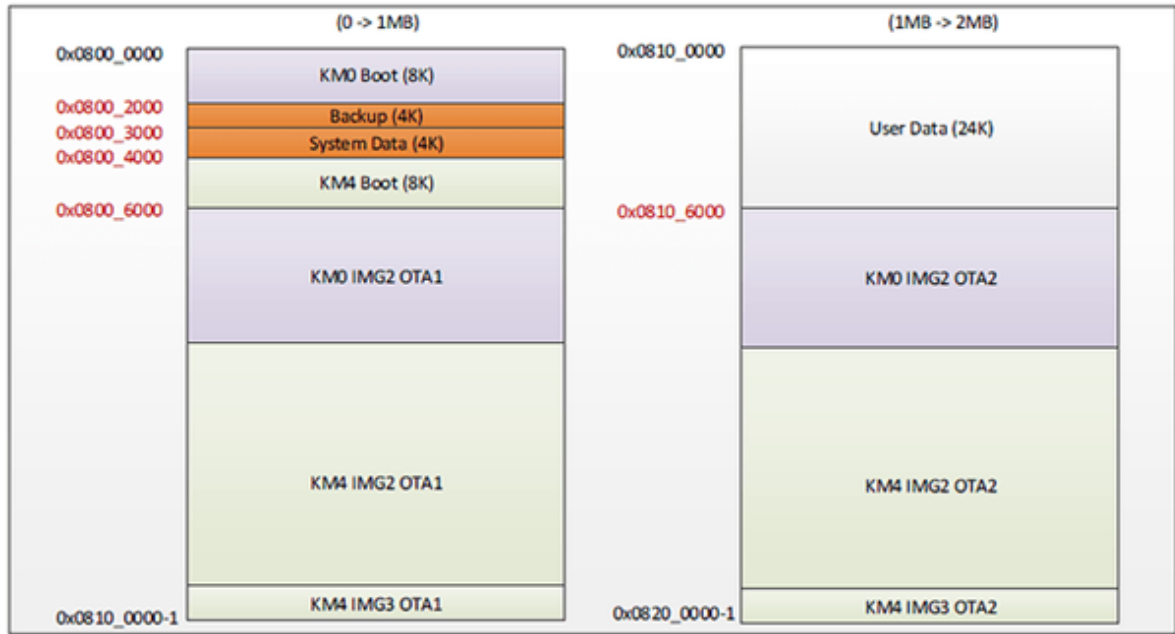


Fig 9-1 1M/2M Flash program layout

Step 1 –Download and prepare the Image Tool

Download ambd_sdk from the link ambiot GitHub: https://github.com/ambiot/ambd_sdk.


The Realtek' s Image Tool can be found under the following file path:

“ambd_sdk\tools\AmebaD\Image_tool\image_tool.exe”


Arduino IDE opens a new window with the complete sample code.

Step 2 –Setup the Image Tool

1. In the “Chip Select” option, choose “AmebaD(8721D)” which is also suitable for RTL8720DN chip.
2. Select correct COM Port that you are using.
3. Set the Baudrate to “115200” .
4. Then key in the Flash Erase starting position from Memory Address of 0x0800 0000.
5. The size to be 2048 KB.
6. Set the module to “Download mode” first, then click the “Erase” button.

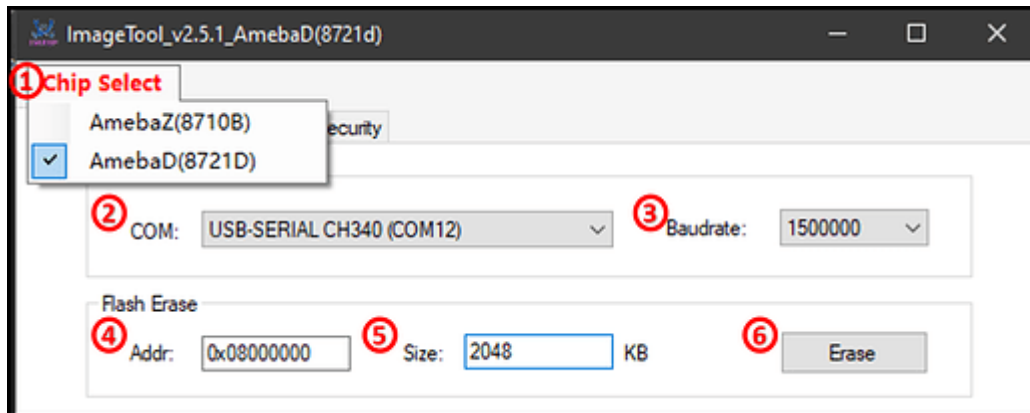


Upon finishing the above image erase and press the reset button, we could find that the "#calibration" will no longer pop out, only "#" will appear in the Serial Monitor.

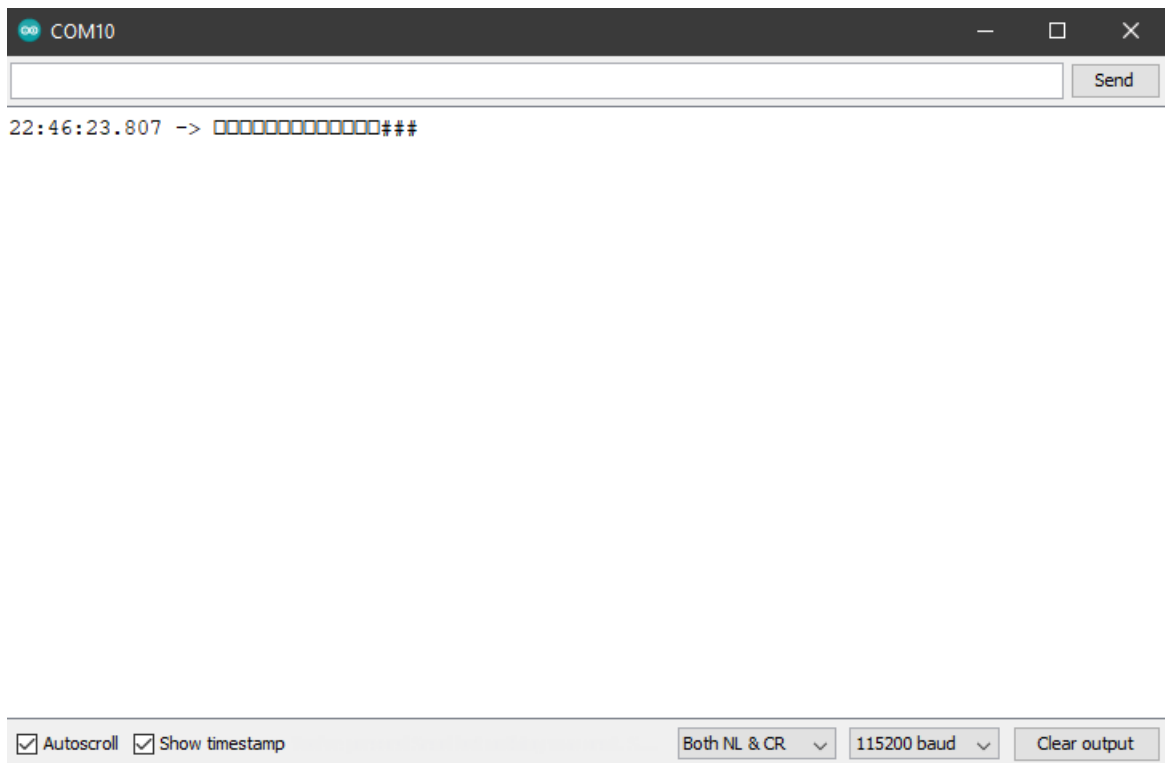

Step 3 –Download Image using Arduino IDE

Now you are able to download the program via UART in Arduino IDE. In order to upload the program, you could choose to either use an external USB-to-UART module connecting to D0 and D1, or short the pins indicated below to use the on-board USB:

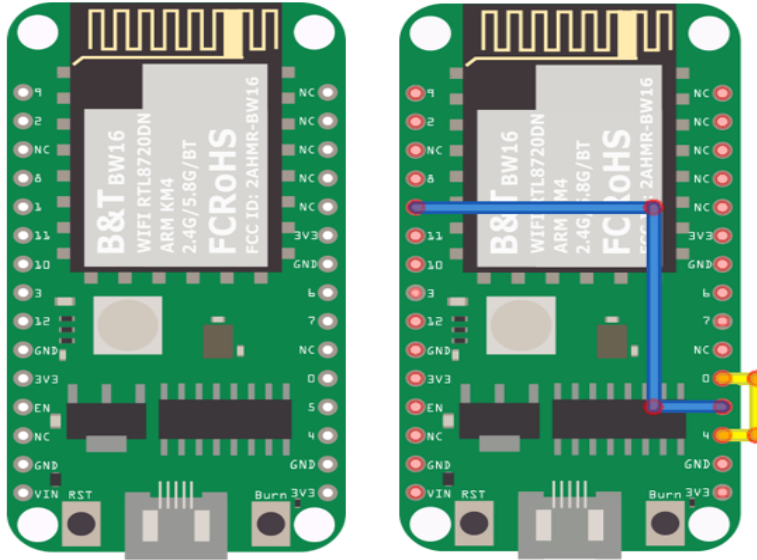

D1 —D5

D0 —D4

Optional Uploading Solution

OTA (Over The Air)

Ai-Thinker is providing a guide for OTA firmware upload in Section 6.1 of B&T “RTL8720D AT Command User Manual” of which can be retrieved from this [link](#) here.


Try the First Example

Step 1. Compile & Upload


Arduino IDE provides many built-in examples, which can be compiled, uploaded, and run directly on the boards.

Here, we take the “Blink” example as the first try.

Open “File” -> “Examples” -> “01.Basics” -> “Blink” :

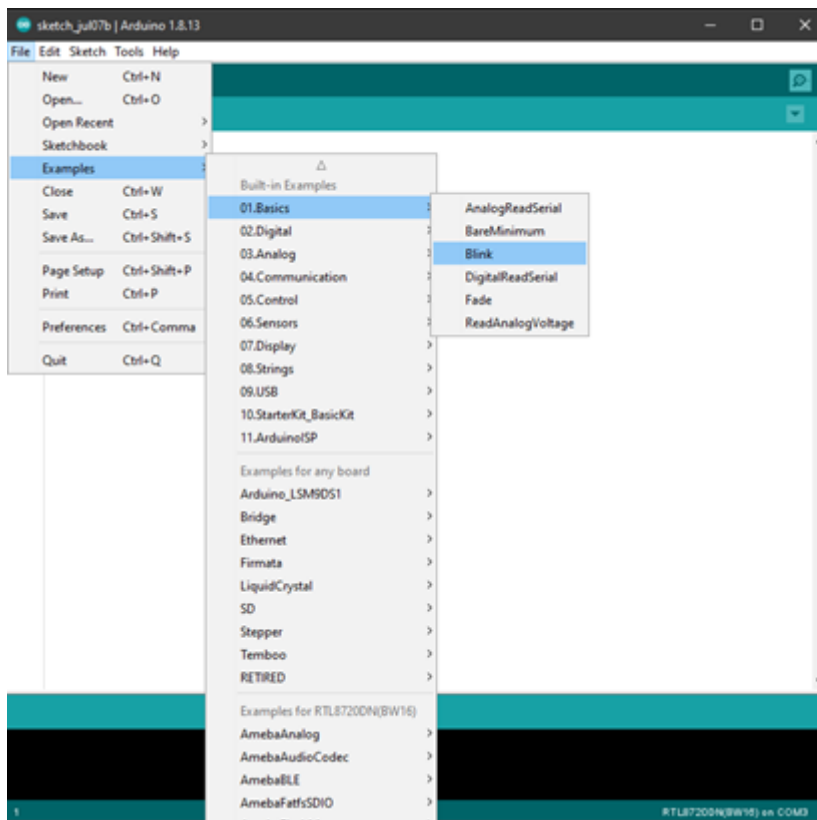


Arduino IDE opens a new window with the complete sample code.

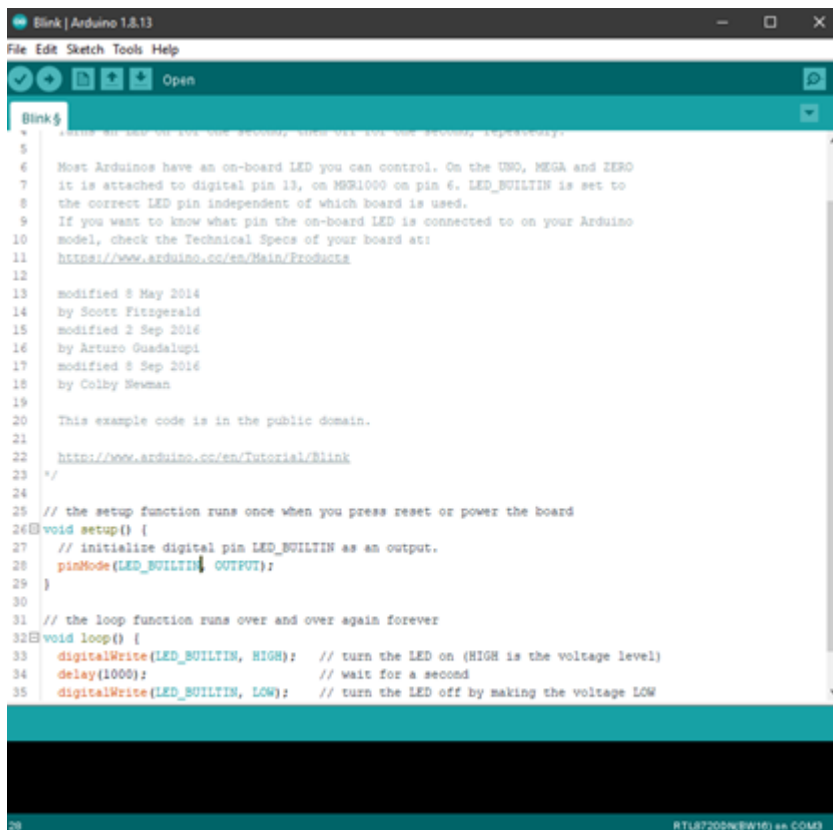


There is an onboard LED of RTL8720DN(BW16), the default LED_BUILTIN is a green onboard LED. Change LED_BUILTIN to LED_B or LED_R for different colors such as blue and red. Here we use LED_B for demonstration purpose.

Next, we compile the sample code directly; click “Sketch” -> “Verify/Compile”

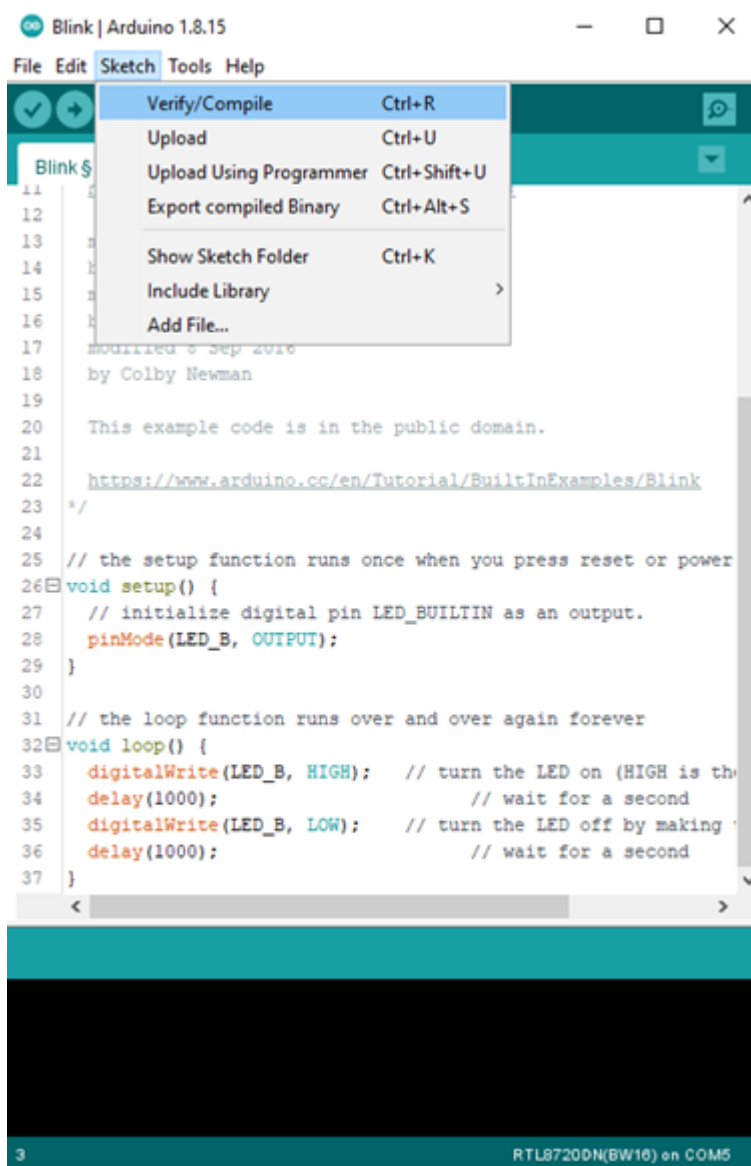

Arduino IDE prints the compiling messages in the bottom area of the IDE window. When the compilation is finished, you will get the message similar to the following figure:

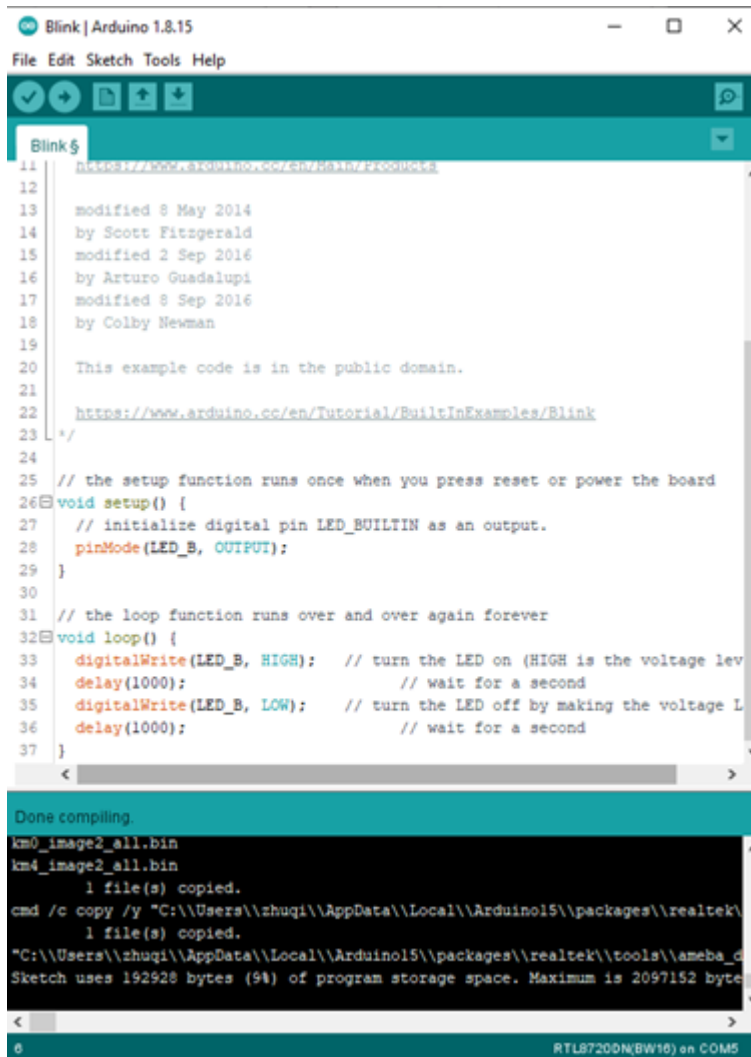

The screenshot shows the Arduino IDE interface. The top menu bar includes File, Edit, Sketch, Tools, and Help. The toolbar contains icons for opening, saving, and running. The main text area displays the Blink sketch code, which includes comments about the code's origin and the setup/loop functions. The bottom status bar shows the board selected as RTL8720DN(BW16) on COM5. The output window at the bottom shows the compilation process, including file copying and the final sketch size.

```

11  https://www.arduino.cc/en/Tutorial/BuiltInExamples
12
13  modified 8 May 2014
14  by Scott Fitzgerald
15  modified 2 Sep 2016
16  by Arturo Guadalupi
17  modified 8 Sep 2016
18  by Colby Newman
19
20  This example code is in the public domain.
21
22  https://www.arduino.cc/en/Tutorial/BuiltInExamples/Blink
23  */
24
25  // the setup function runs once when you press reset or power the board
26  void setup() {
27    // initialize digital pin LED_BUILTIN as an output.
28    pinMode(LED_B, OUTPUT);
29  }
30
31  // the loop function runs over and over again forever
32  void loop() {
33    digitalWrite(LED_B, HIGH); // turn the LED on (HIGH is the voltage lev
34    delay(1000); // wait for a second
35    digitalWrite(LED_B, LOW); // turn the LED off by making the voltage L
36    delay(1000); // wait for a second
37  }

```

Done compiling.


km0_image2_all.bin
km4_image2_all.bin
1 file(s) copied.
cmd /c copy /y "C:\\Users\\zhuqi\\AppData\\Local\\Arduino15\\packages\\realtek\\
1 file(s) copied.
"C:\\Users\\zhuqi\\AppData\\Local\\Arduino15\\packages\\realtek\\tools\\ameba_d
Sketch uses 192928 bytes (9%) of program storage space. Maximum is 2097152 byte

RTL8720DN(BW16) on COM5

Afterwards, we will upload the compiled code to RTL8720DN(BW16).

Please make sure RTL8720DN(BW16) is connected to your computer, then click “Sketch” -> “Upload” .

The Arduino IDE will compile first then upload. During the uploading process, users are required to enter the upload mode of the board. To enter the upload mode, first press and hold the RTL8720DN(BW16) “Burn” button, press the “RST” button, and then release the “Burn” button.



Press “Upload” button in Arduino IDE to compile and upload the program. Arduino IDE will wait for 5s for the development board to enter the upload mode.

The screenshot shows the Arduino IDE interface. The top menu bar includes 'File', 'Edit', 'Sketch', 'Tools', and 'Help'. Below the menu is a toolbar with icons for opening, saving, and running. The main text area displays the 'Blink' example code, which includes comments about its history and a link to the Arduino website. The code defines a setup function to initialize the LED_BUILTIN pin and a loop function that turns the LED on and off with a 1-second delay. At the bottom, a black window shows the upload progress, including messages like 'Done uploading.', 'Please enter the upload mode (wait 5s)', and 'Uploading.....'. The status bar at the bottom indicates 'RTL8720DN(BW16) on COM5'.

```

Blink
11 https://www.arduino.cc/en/Tutorial/BuiltInExamples/Blink
12
13 modified 8 May 2014
14 by Scott Fitzgerald
15 modified 2 Sep 2016
16 by Arturo Guadalupi
17 modified 8 Sep 2016
18 by Colby Newman
19
20 This example code is in the public domain.
21
22 https://www.arduino.cc/en/Tutorial/BuiltInExamples/Blink
23 */
24
25 // the setup function runs once when you press reset or power the board
26 void setup() {
27   // initialize digital pin LED_BUILTIN as an output.
28   pinMode(LED_BUILTIN, OUTPUT);
29 }
30
31 // the loop function runs over and over again forever
32 void loop() {
33   digitalWrite(LED_BUILTIN, HIGH); // turn the LED on (HIGH is the voltage lev
34   delay(1000); // wait for a second
35   digitalWrite(LED_BUILTIN, LOW); // turn the LED off by making the voltage l

```

Done uploading.

Please enter the upload mode (wait 5s)

05

04

03

02

01

Uploading.....

All images are sent successfully!

Image tool closed!

Upload Image done.

RTL8720DN(BW16) on COM5

Again, during the uploading procedure the IDE prints messages. Uploading procedure takes considerably longer time (about 30 seconds to 1 minute). When upload completed, the “Done uploading” message is printed.

Step 2.Run the Blink example

In each example, Arduino not only provides sample code, but also detailed documentation, including wiring diagram, sample code explanation, technical details, ...etc. These examples can be directly used on RTL8720DN (BW16).

So, we find the detailed information of the [Blink example](#).

In short, for RTL8720DN, the example can be run on both the onboard RGB LED or external LED (use any GPIO pins for signal output). Finally, press the “RST” button, and you can see the RGB LED turns into blue and keep blinking.

References

1. Introduction of RTL8720DN on Instructable: <https://www.instructables.com/RTL8720DN/>
2. Load Arduino image into BW16: [How to load BW16 program with Arduino –#13](#)
3. RTL8720DN (BW16) IMG2 SIGN Invalid Solution: [RTL8720DN\(BW16\) IMG2 SIGN Invalid Solution](#)
4. FTDI Driver Download from here: https://ftdichip.com/wp-content/uploads/2021/02/CDM21228_Setup.zip

(End)

注解: If you face any issue, please refer to the FAQ and Trouble shooting sections on [../support/index](#) page.

1.3.2 Download

1.3.3 Peripherals & Examples

Basic Examples

Ameba ARDUINO: [RTL8722CSM][RTL8722DM] Supported ARDUINO built-in example list

There are many built-in examples in Arduino. In the table below, we list all examples that are compatible with Ameba.

Category	Name	Comment
01.Basics	AnalogReadSerial	Connect potentiometer to 3.3V
	BareMinimum	
	Blink	Connect LED to pin 8
	DigitalReadSerial	
	Fade	
	ReadAnalogVoltage	ADC can read a maximum of 3.3V.
02.Digital	BlinkWithoutDelay	Connect LED to pin 8
	Button	Connect LED to pin 13
	Debounce	Connect LED to pin 13
	DigitalInputPullup	Connect LED to pin 13
	StateChangeDetection	Connect LED to pin 13
	toneKeyboard	
	toneMelody	

下页继续

表 7 - 续上页

Category	Name	Comment
	toneMultiple	
	tonePitchFollower	
03.Analog	AnalogInOutSerial	
	AnalogInput	Connect LED to pin 13
	Analog Write Mega	
	Calibration	Connect another LED to pin 13
	Fading	
	Smoothing	
04.Communication	ASCIITable	
	Dimmer	Use serial baud rate 115200
	Graph	Use serial baud rate 115200, Connect potentiometer to 3.3V
	Midi	Please use Serial1 and pin 26, or use Serial2 and pin 17
	MultiSerial	
	PhysicalPixel	Use serial baud rate 115200
	ReadASCIIString	
	SerialCallResponse	Use serial baud rate 115200
	Serial CallResponseASCII	Use serial baud rate 115200
	SerialEvent	
	SerialPassthrough	
	VirtualColorMixer	Use serial baud rate 115200
05.Control	Arrays	Use pins 1, 2, 3, 4, 5, 6
	ForLoopIteration	Use pins 1, 2, 3, 4, 5, 6
	IfStatementConditional	
	switchCase	
	switchCase2	
	While StatementConditional	Connect another LED to pin 13
06.Display	barGraph	Use another pin to replace pin 7
	RowColumnScanning	
07.Strings	CharacterAnalysis	
	String AdditionOperator	
	StringAppendOperator	
	StringCaseChanges	
	StringCharacters	
	String ComparisonOperators	
	StringIndexOf	
	StringLength	
	StringLengthTrim	

下页继续

表 7 - 续上页

Category	Name	Comment
	StringReplace	
	String.StartsWithEndsWith	
	String.Substring	
	String.ToInt	

Network Examples

Connect to WiFi

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1

Procedure


There three common encryption type in WiFi connection. The first one is “OPEN” , which means there is no password needed to connect to this network. The second type of encryption is WPA, which requires the correct password to access. The third type is WEP, which requires a hexadecimal password and a keyindex.

In the following, we will give a brief introduction on how to establish WiFi connection with these three types of encryption on Ameba.

First, make sure the correct Ameba development board is selected in “Tools” -> “Board” .


- Open (WiFi connection without password)

Open the “ConnectNoEncryption” example in “File” -> “Examples” -> “AmebaWiFi” -> “ConnectWithWiFi” -> “ConnectNoEncryption”

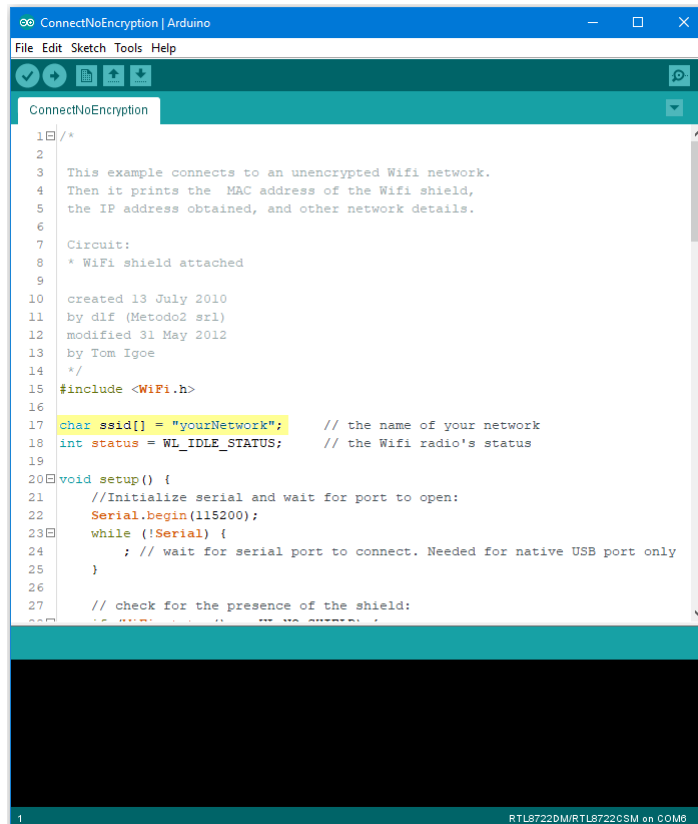

In the sample code, modify “ssid” to be the same as the WiFi SSID to be connected to.

Next, upload the sample code, and press the reset button on Ameba. Then you will see a message “You’re connected to the networkSSID: XXXXX”, and the information of this WiFi connection is printed in the serial monitor every 10 seconds.

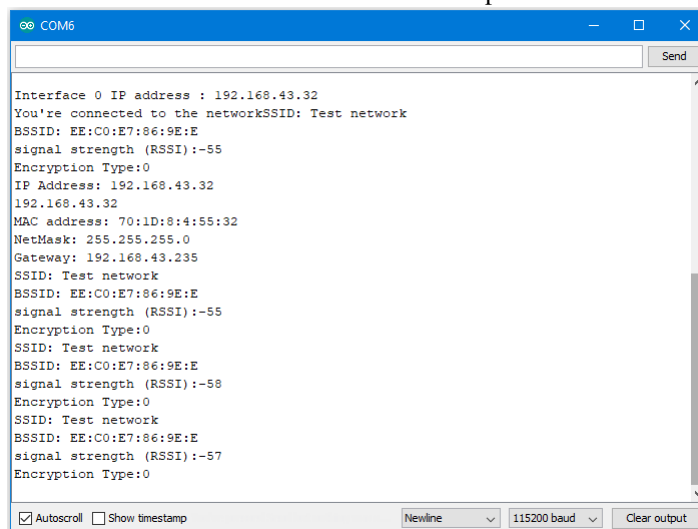


- WiFi connection with WPA encryption

Open the “ConnectWithWPA” example in “File” -> “Examples”
 -> “AmebaWiFi” -> “ConnectWithWiFi” -> “ConnectWithWPA”



```

1  /*
2
3   This example connects to an unencrypted Wifi network.
4   Then it prints the  MAC address of the Wifi shield,
5   the IP address obtained, and other network details.
6
7   Circuit:
8   * Wifi shield attached
9
10  created 13 July 2010
11  by dlf (Metodo2 srl)
12  modified 31 May 2012
13  by Tom Igoe
14  */
15  #include <WiFi.h>
16
17  char ssid[] = "yourNetwork"; // your network SSID (name)
18  char pass[] = "secretPassword"; // your network password
19  int status = WL_IDLE_STATUS; // the Wifi radio's status
20
21  void setup() {
22    //Initialize serial and wait for port to open:
23    Serial.begin(115200);
24    while (!Serial) {
25      ; // wait for serial port to connect. Needed for native USB port only
26    }
27
28    // ...
29  }
30
31  void loop() {
32    // ...
33  }
34
35  // ...
36
37  // ...
38
39  // ...
40
41  // ...
42
43  // ...
44
45  // ...
46
47  // ...
48
49  // ...
50
51  // ...
52
53  // ...
54
55  // ...
56
57  // ...
58
59  // ...
60
61  // ...
62
63  // ...
64
65  // ...
66
67  // ...
68
69  // ...
70
71  // ...
72
73  // ...
74
75  // ...
76
77  // ...
78
79  // ...
80
81  // ...
82
83  // ...
84
85  // ...
86
87  // ...
88
89  // ...
90
91  // ...
92
93  // ...
94
95  // ...
96
97  // ...
98
99  // ...
100
101  // ...
102
103  // ...
104
105  // ...
106
107  // ...
108
109  // ...
110
111  // ...
112
113  // ...
114
115  // ...
116
117  // ...
118
119  // ...
120
121  // ...
122
123  // ...
124
125  // ...
126
127  // ...
128
129  // ...
130
131  // ...
132
133  // ...
134
135  // ...
136
137  // ...
138
139  // ...
140
141  // ...
142
143  // ...
144
145  // ...
146
147  // ...
148
149  // ...
150
151  // ...
152
153  // ...
154
155  // ...
156
157  // ...
158
159  // ...
160
161  // ...
162
163  // ...
164
165  // ...
166
167  // ...
168
169  // ...
170
171  // ...
172
173  // ...
174
175  // ...
176
177  // ...
178
179  // ...
180
181  // ...
182
183  // ...
184
185  // ...
186
187  // ...
188
189  // ...
190
191  // ...
192
193  // ...
194
195  // ...
196
197  // ...
198
199  // ...
200
201  // ...
202
203  // ...
204
205  // ...
206
207  // ...
208
209  // ...
210
211  // ...
212
213  // ...
214
215  // ...
216
217  // ...
218
219  // ...
220
221  // ...
222
223  // ...
224
225  // ...
226
227  // ...
228
229  // ...
230
231  // ...
232
233  // ...
234
235  // ...
236
237  // ...
238
239  // ...
240
241  // ...
242
243  // ...
244
245  // ...
246
247  // ...
248
249  // ...
250
251  // ...
252
253  // ...
254
255  // ...
256
257  // ...
258
259  // ...
260
261  // ...
262
263  // ...
264
265  // ...
266
267  // ...
268
269  // ...
270
271  // ...
272
273  // ...
274
275  // ...
276
277  // ...
278
279  // ...
280
281  // ...
282
283  // ...
284
285  // ...
286
287  // ...
288
289  // ...
290
291  // ...
292
293  // ...
294
295  // ...
296
297  // ...
298
299  // ...
300
301  // ...
302
303  // ...
304
305  // ...
306
307  // ...
308
309  // ...
310
311  // ...
312
313  // ...
314
315  // ...
316
317  // ...
318
319  // ...
320
321  // ...
322
323  // ...
324
325  // ...
326
327  // ...
328
329  // ...
330
331  // ...
332
333  // ...
334
335  // ...
336
337  // ...
338
339  // ...
340
341  // ...
342
343  // ...
344
345  // ...
346
347  // ...
348
349  // ...
350
351  // ...
352
353  // ...
354
355  // ...
356
357  // ...
358
359  // ...
360
361  // ...
362
363  // ...
364
365  // ...
366
367  // ...
368
369  // ...
370
371  // ...
372
373  // ...
374
375  // ...
376
377  // ...
378
379  // ...
380
381  // ...
382
383  // ...
384
385  // ...
386
387  // ...
388
389  // ...
390
391  // ...
392
393  // ...
394
395  // ...
396
397  // ...
398
399  // ...
400
401  // ...
402
403  // ...
404
405  // ...
406
407  // ...
408
409  // ...
410
411  // ...
412
413  // ...
414
415  // ...
416
417  // ...
418
419  // ...
420
421  // ...
422
423  // ...
424
425  // ...
426
427  // ...
428
429  // ...
430
431  // ...
432
433  // ...
434
435  // ...
436
437  // ...
438
439  // ...
440
441  // ...
442
443  // ...
444
445  // ...
446
447  // ...
448
449  // ...
450
451  // ...
452
453  // ...
454
455  // ...
456
457  // ...
458
459  // ...
460
461  // ...
462
463  // ...
464
465  // ...
466
467  // ...
468
469  // ...
470
471  // ...
472
473  // ...
474
475  // ...
476
477  // ...
478
479  // ...
480
481  // ...
482
483  // ...
484
485  // ...
486
487  // ...
488
489  // ...
490
491  // ...
492
493  // ...
494
495  // ...
496
497  // ...
498
499  // ...
500
501  // ...
502
503  // ...
504
505  // ...
506
507  // ...
508
509  // ...
510
511  // ...
512
513  // ...
514
515  // ...
516
517  // ...
518
519  // ...
520
521  // ...
522
523  // ...
524
525  // ...
526
527  // ...
528
529  // ...
530
531  // ...
532
533  // ...
534
535  // ...
536
537  // ...
538
539  // ...
540
541  // ...
542
543  // ...
544
545  // ...
546
547  // ...
548
549  // ...
550
551  // ...
552
553  // ...
554
555  // ...
556
557  // ...
558
559  // ...
560
561  // ...
562
563  // ...
564
565  // ...
566
567  // ...
568
569  // ...
570
571  // ...
572
573  // ...
574
575  // ...
576
577  // ...
578
579  // ...
580
581  // ...
582
583  // ...
584
585  // ...
586
587  // ...
588
589  // ...
590
591  // ...
592
593  // ...
594
595  // ...
596
597  // ...
598
599  // ...
600
601  // ...
602
603  // ...
604
605  // ...
606
607  // ...
608
609  // ...
610
611  // ...
612
613  // ...
614
615  // ...
616
617  // ...
618
619  // ...
620
621  // ...
622
623  // ...
624
625  // ...
626
627  // ...
628
629  // ...
630
631  // ...
632
633  // ...
634
635  // ...
636
637  // ...
638
639  // ...
640
641  // ...
642
643  // ...
644
645  // ...
646
647  // ...
648
649  // ...
650
651  // ...
652
653  // ...
654
655  // ...
656
657  // ...
658
659  // ...
660
661  // ...
662
663  // ...
664
665  // ...
666
667  // ...
668
669  // ...
670
671  // ...
672
673  // ...
674
675  // ...
676
677  // ...
678
679  // ...
680
681  // ...
682
683  // ...
684
685  // ...
686
687  // ...
688
689  // ...
690
691  // ...
692
693  // ...
694
695  // ...
696
697  // ...
698
699  // ...
700
701  // ...
702
703  // ...
704
705  // ...
706
707  // ...
708
709  // ...
710
711  // ...
712
713  // ...
714
715  // ...
716
717  // ...
718
719  // ...
720
721  // ...
722
723  // ...
724
725  // ...
726
727  // ...
728
729  // ...
730
731  // ...
732
733  // ...
734
735  // ...
736
737  // ...
738
739  // ...
740
741  // ...
742
743  // ...
744
745  // ...
746
747  // ...
748
749  // ...
750
751  // ...
752
753  // ...
754
755  // ...
756
757  // ...
758
759  // ...
760
761  // ...
762
763  // ...
764
765  // ...
766
767  // ...
768
769  // ...
770
771  // ...
772
773  // ...
774
775  // ...
776
777  // ...
778
779  // ...
780
781  // ...
782
783  // ...
784
785  // ...
786
787  // ...
788
789  // ...
790
791  // ...
792
793  // ...
794
795  // ...
796
797  // ...
798
799  // ...
800
801  // ...
802
803  // ...
804
805  // ...
806
807  // ...
808
809  // ...
810
811  // ...
812
813  // ...
814
815  // ...
816
817  // ...
818
819  // ...
820
821  // ...
822
823  // ...
824
825  // ...
826
827  // ...
828
829  // ...
830
831  // ...
832
833  // ...
834
835  // ...
836
837  // ...
838
839  // ...
840
841  // ...
842
843  // ...
844
845  // ...
846
847  // ...
848
849  // ...
850
851  // ...
852
853  // ...
854
855  // ...
856
857  // ...
858
859  // ...
860
861  // ...
862
863  // ...
864
865  // ...
866
867  // ...
868
869  // ...
870
871  // ...
872
873  // ...
874
875  // ...
876
877  // ...
878
879  // ...
880
881  // ...
882
883  // ...
884
885  // ...
886
887  // ...
888
889  // ...
890
891  // ...
892
893  // ...
894
895  // ...
896
897  // ...
898
899  // ...
900
901  // ...
902
903  // ...
904
905  // ...
906
907  // ...
908
909  // ...
910
911  // ...
912
913  // ...
914
915  // ...
916
917  // ...
918
919  // ...
920
921  // ...
922
923  // ...
924
925  // ...
926
927  // ...
928
929  // ...
930
931  // ...
932
933  // ...
934
935  // ...
936
937  // ...
938
939  // ...
940
941  // ...
942
943  // ...
944
945  // ...
946
947  // ...
948
949  // ...
950
951  // ...
952
953  // ...
954
955  // ...
956
957  // ...
958
959  // ...
960
961  // ...
962
963  // ...
964
965  // ...
966
967  // ...
968
969  // ...
970
971  // ...
972
973  // ...
974
975  // ...
976
977  // ...
978
979  // ...
980
981  // ...
982
983  // ...
984
985  // ...
986
987  // ...
988
989  // ...
990
991  // ...
992
993  // ...
994
995  // ...
996
997  // ...
998
999  // ...
1000
1001  // ...
1002
1003  // ...
1004
1005  // ...
1006
1007  // ...
1008
1009  // ...
1010
1011  // ...
1012
1013  // ...
1014
1015  // ...
1016
1017  // ...
1018
1019  // ...
1020
1021  // ...
1022
1023  // ...
1024
1025  // ...
1026
1027  // ...
1028
1029  // ...
1030
1031  // ...
1032
1033  // ...
1034
1035  // ...
1036
1037  // ...
1038
1039  // ...
1040
1041  // ...
1042
1043  // ...
1044
1045  // ...
1046
1047  // ...
1048
1049  // ...
1050
1051  // ...
1052
1053  // ...
1054
1055  // ...
1056
1057  // ...
1058
1059  // ...
1060
1061  // ...
1062
1063  // ...
1064
1065  // ...
1066
1067  // ...
1068
1069  // ...
1070
1071  // ...
1072
1073  // ...
1074
1075  // ...
1076
1077  // ...
1078
1079  // ...
1080
1081  // ...
1082
1083  // ...
1084
1085  // ...
1086
1087  // ...
1088
1089  // ...
1090
1091  // ...
1092
1093  // ...
1094
1095  // ...
1096
1097  // ...
1098
1099  // ...
1100
1101  // ...
1102
1103  // ...
1104
1105  // ...
1106
1107  // ...
1108
1109  // ...
1110
1111  // ...
1112
1113  // ...
1114
1115  // ...
1116
1117  // ...
1118
1119  // ...
1120
1121  // ...
1122
1123  // ...
1124
1125  // ...
1126
1127  // ...
1128
1129  // ...
1130
1131  // ...
1132
1133  // ...
1134
1135  // ...
1136
1137  // ...
1138
1139  // ...
1140
1141  // ...
1142
1143  // ...
1144
1145  // ...
1146
1147  // ...
1148
1149  // ...
1150
1151  // ...
1152
1153  // ...
1154
1155  // ...
1156
1157  // ...
1158
1159  // ...
1160
1161  // ...
1162
1163  // ...
1164
1165  // ...
1166
1167  // ...
1168
1169  // ...
1170
1171  // ...
1172
1173  // ...
1174
1175  // ...
1176
1177  // ...
1178
1179  // ...
1180
1181  // ...
1182
1183  // ...
1184
1185  // ...
1186
1187  // ...
1188
1189  // ...
1190
1191  // ...
1192
1193  // ...
1194
1195  // ...
1196
1197  // ...
1198
1199  // ...
1200
1201  // ...
1202
1203  // ...
1204
1205  // ...
1206
1207  // ...
1208
1209  // ...
1210
1211  // ...
1212
1213  // ...
1214
1215  // ...
1216
1217  // ...
1218
1219  // ...
1220
1221  // ...
1222
1223  // ...
1224
1225  // ...
1226
1227  // ...
1228
1229  // ...
1230
1231  // ...
1232
1233  // ...
1234
1235  // ...
1236
1237  // ...
1238
1239  // ...
1240
1241  // ...
1242
1243  // ...
1244
1245  // ...
1246
1247  // ...
1248
1249  // ...
1250
1251  // ...
1252
1253  // ...
1254
1255  // ...
1256
1257  // ...
1258
1259  // ...
1260
1261  // ...
1262
1263  // ...
1264
1265  // ...
1266
1267  // ...
1268
1269  // ...
1270
1271  // ...
1272
1273  // ...
1274
1275  // ...
1276
1277  // ...
1278
1279  // ...
1280
1281  // ...
1282
1283  // ...
1284
1285  // ...
1286
1287  // ...
1288
1289  // ...
1290
1291  // ...
1292
1293  // ...
1294
1295  // ...
1296
1297  // ...
1298
1299  // ...
1300
1301  // ...
1302
1303  // ...
1304
1305  // ...
1306
1307  // ...
1308
1309  // ...
1310
1311  // ...
1312
1313  // ...
1314
1315  // ...
1316
1317  // ...
1318
1319  // ...
1320
1321  // ...
1322
1323  // ...
1324
1325  // ...
1326
1327  // ...
1328
1329  // ...
1330
1331  // ...
1332
1333  // ...
1334
1335  // ...
1336
1337  // ...
1338
1339  // ...
1340
1341  // ...
1342
1343  // ...
1344
1345  // ...
1346
1347  // ...
1348
1349  // ...
1350
1351  // ...
1352
1353  // ...
1354
1355  // ...
1356
1357  // ...
1358
1359  // ...
1360
1361  // ...
1362
1363  // ...
1364
1365  // ...
1366
1367  // ...
1368
1369  // ...
1370
1371  // ...
1372
1373  // ...
1374
1375  // ...
1376
1377  // ...
1378
1379  // ...
1380
1381  // ...
1382
1383  // ...
1384
1385  // ...
1386
1387  // ...
1388
1389  // ...
1390
1391  // ...
1392
1393  // ...
1394
1395  // ...
1396
1397  // ...
1398
1399  // ...
1400
1401  // ...
1402
1403  // ...
1404
1405  // ...
1406
1407  // ...
1408
1409  // ...
1410
1411  // ...
1412
1413  // ...
1414
1415  // ...
1416
1417  // ...
1418
1419  // ...
1420
1421  // ...
1422
1423  // ...
1424
1425  // ...
1426
1427  // ...
1428
1429  // ...
1430
1431  // ...
1432
1433  // ...
1434
1435  // ...
1436
1437  // ...
1438
1439  // ...
1440
1441  // ...
1442
1443  // ...
1444
1445  // ...
1446
1447  // ...
1448
1449  // ...
1450
1451  // ...
1452
1453  // ...
1454
1455  // ...
1456
1457  // ...
1458
1459  // ...
1460
1461  // ...
1462
1463  // ...
1464
1465  // ...
1466
1467  // ...
1468
1469  // ...
1470
1471  // ...
1472
1473  // ...
1474
1475  // ...
1476
1477  // ...
1478
1479  // ...
1480
1481  // ...
1482
1483  // ...
1484
1485  // ...
1486
1487  // ...
1488
1489  // ...
1490
1491  // ...
1492
1493  // ...
1494
1495  // ...
1496
1497  // ...
1498
1499  // ...
1500
1501  // ...
1502
1503  // ...
1504
1505  // ...
1506
1507  // ...
1508
1509  // ...
1510
1511  // ...
1512
1513  // ...
1514
1515  // ...
1516
1517  // ...
1518
1519  // ...
1520
1521  // ...
1522
1523  // ...
1524
1525  // ...
1526
1527  // ...
1528
1529  // ...
1530
1531  // ...
1532
1533  // ...
1534
1535  // ...
1536
1537  // ...
1538
1539  // ...
1540
1541  // ...
1542
1543  // ...
1544
1545  // ...
1546
1547  // ...
1548
1549  // ...
1550
1551  // ...
1552
1553  // ...
1554
1555  // ...
1556
1557  // ...
1558
1559  // ...
1560
1561  // ...
1562
1563  // ...
1564
1565  // ...
1566
1567  // ...
1568
1569  // ...
1570
1571  // ...
1572
1573  // ...
1574
1575  // ...
1576
1577  // ...
1578
1579  // ...
1580
1581  // ...
1582
1583  // ...
1584
1585  // ...
1586
1587  // ...
1588
1589  // ...
1590
1591  // ...
1592
1593  // ...
1594
1595  // ...
1596
1597  // ...
1598
1599  // ...
1600
1601  // ...
1602
1603  // ...
1604
1605  // ...
1606
1607  // ...
1608
1609  // ...
1610
1611  // ...
1612
1613  // ...
1614
1615  // ...
1616
1617  // ...
1618
1619  // ...
1620
1621  // ...
1622
1623  // ...
1624
1625  // ...
1626
1627  // ...
1628
1629  // ...
1630
1631  // ...
1632
1633  // ...
1634
1635  // ...
1636
1637  // ...
1638
1639  // ...
1640
1641  // ...
1642
1643  // ...
1644
1645  // ...
1646
1647  // ...
1648
1649  // ...
1650
1651  // ...
1652
1653  // ...
1654
1655  // ...
1656
1657  // ...
1658
1659  // ...
1660
1661  // ...
1662
1663  // ...
1664
1665  // ...
1666
1667  // ...
1668
1669  // ...
1670
1671  // ...
1672
1673  // ...
1674
1675  // ...
1676
1677  // ...
1678
1679  // ...
1680
1681  // ...
1682
1683  // ...
1684
1685  // ...
1686
1687  // ...
1688
1689  // ...
1690
1691  // ...
1692
1693  // ...
1694
1695  // ...
1696
1697  // ...
1698
1699  // ...
1700
1701  // ...
1702
1703  // ...
1704
1705  // ...
1706
1707  // ...
1708
1709  // ...
1710
1711  // ...
1712
1713  // ...
1714
1715  // ...
1716
1717  // ...
1718
1719  // ...
1720
1721  // ...
1722
1723  // ...
1724
1725  // ...
1726
1727  // ...
1728
1729  // ...
1730
1731  // ...
1732
1733  // ...
1734
1735  // ...
1736
1737  // ...
1738
1739  // ...
1740
1741  // ...
1742
1743  // ...
1744
1745  // ...
1746
1747  // ...
1748
1749  // ...
1750
1751  // ...
1752
1753  // ...
1754
1755  // ...
1756
1757  // ...
1758
1759  // ...
1760
1761  // ...
1762
1763  // ...
1764
1765  // ...
1766
1767  // ...
1768
1769  // ...
1770
1771  // ...
1772
1773  // ...
1774
1775  // ...
1776
1777  // ...
1778
1779  // ...
1780
1781  // ...
1782
1783  // ...
1784
1785  // ...
1786
1787  // ...
1788
1789  // ...
1790
1791  // ...
1792
1793  // ...
1794
1795  // ...
1796
1797  // ...
1798
1799  // ...
1800
1801  // ...
1802
1803  // ...
1804
1805  // ...
1806
1807  // ...
1808
1809  // ...
1810
1811  // ...
1812
1813  // ...
1814
1815  // ...
1816
1817  // ...
1818
1819  // ...
1820
1821  // ...
1822
1823  // ...
1824
1825  // ...
1826
1827  // ...
1828
1829  // ...
1830
1831  // ...
1832
1833  // ...
1834
1835  // ...
1836
1837  // ...
1838
1839  // ...
1840
1841  // ...
1842
1843  // ...
1844
1845  // ...
1846
1847  // ...
1848
1849  // ...
1850
1851  // ...
1852
1853  // ...
1854
1855  // ...
1856
1857  // ...
1858
1859  // ...
1860
1861  // ...
1862
1863  // ...
1864
1865  // ...
1866
1867  // ...
1868
1869  // ...
1870
1871  // ...
1872
1873  // ...
1874
1875  // ...
1876
1877  // ...
1878
1879  // ...
1880
1881  // ...
1882
1883  // ...
1884
1885  // ...
1886
1887  // ...
1888
1889  // ...
1890
1891  // ...
1892
1893  // ...
1894
1895  // ...
1896
1897  // ...
1898
1899  // ...
1900
1901  // ...
1902
1903  // ...
1904
1905  // ...
1906
1907  // ...
1908
1909  // ...
1910
1911  // ...
1912
1913  // ...
1914
1915  // ...
1916
1917  // ...
1918
1919  // ...
1920
1921  // ...
1922
1923  // ...
1924
1925  // ...
1926
1927  // ...
1928
1929  // ...
1930
1931  // ...
1932
1933  // ...
1934
1935  // ...
1936
1937  // ...
1938
1939  // ...
1940
1941  // ...
1942
1943  // ...
1944
1945  // ...
1946
1947  // ...
1948
1949  // ...
1950
1951  // ...
1952
1953  // ...
1954
1955  // ...
1956
1957  // ...
1958
1959  // ...
1960
1961  // ...
1962
1963  // ...
1964
1965  // ...
1966
1967  // ...
1968
1969  // ...
1970
1971  // ...
1972
1973  // ...
1974
1975  // ...
1976
1977  // ...
1978
1979  // ...
1980
1981  // ...
1982
1983  // ...
1984
1985  // ...
1986
1987  // ...
1988
1989  // ...
1990
1991  // ...
1992
1993  // ...
1994
1995  // ...
1996
1997  // ...
1998
1999  // ...
2000
2001  // ...
2002
2003  // ...
2004
2005  // ...
2006
2007  // ...
2008
2009  // ...
2010
2011  // ...
2012
2013  // ...
2014
2015  // ...
2016
2017  // ...
2018
2019  // ...
2020
2021  // ...
2022
2023  // ...
2024
2025  // ...
2026
2027 
```

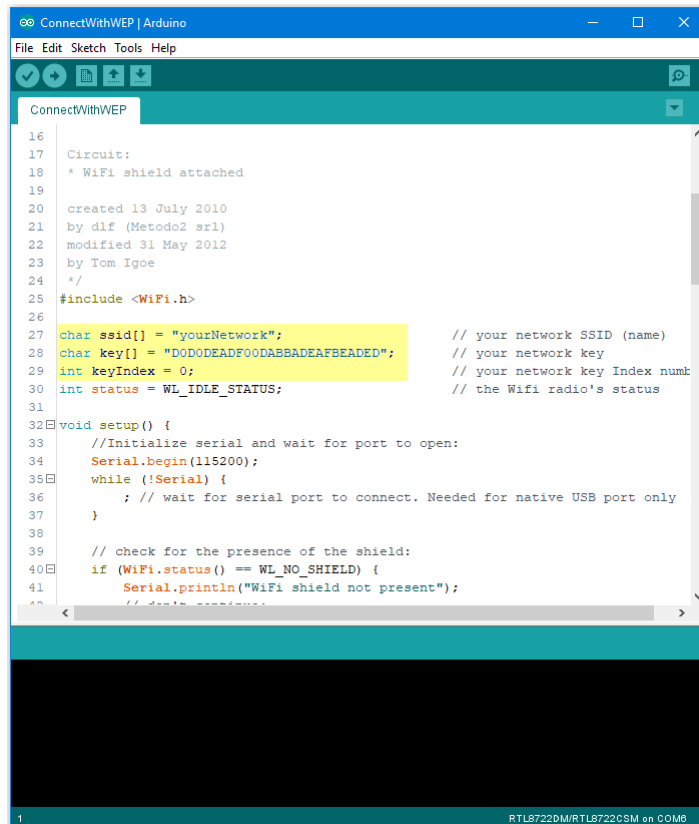

In the sample code, modify “ssid” to the SSID to be connected, “key” to the hexadecimal password, “keyIndex” to your key index number.

Next, upload the sample code, and press the reset button on Ameba. Then you will see a message “You’re re connected to the networkSSID: XXXXX” , and the information of this WiFi connection is printed in the IDE every 10 seconds.

Code Reference

<https://www.arduino.cc/en/Reference/WiFiBegin>

To get the information of a WiFi connection:

Use `WiFi.SSID()` to get SSID of the current connected network.

<https://www.arduino.cc/en/Reference/WiFiSSID>

Use `WiFi.RSSI()` to get the signal strength of the connection.

<https://www.arduino.cc/en/Reference/WiFiRSSI>

Use `WiFi.encryptionType()` to get the encryption type of the WiFi connection.

<https://www.arduino.cc/en/Reference/WiFiEncryptionType>

Use `WiFi.BSSID()` to get the MAC address of the router you are connected to.

<https://www.arduino.cc/en/Reference/WiFiBSSID>

To get the information of Ameba:

Use `WiFi.macAddress()` to get the MAC address of Ameba.

<https://www.arduino.cc/en/Reference/WiFiMACAddress>

Use `WiFi.localIP()` to get the IP address of Ameba.

<https://www.arduino.cc/en/Reference/WiFiLocalIP>

Use `WiFi.subnetMask()` to get the subnet mask.

<https://www.arduino.cc/en/Reference/WiFiSubnetMask>

Use `WiFi.gatewayIP()` to get the WiFi shield's gateway IP address.

<https://www.arduino.cc/en/Reference/WiFiGatewayIP>

Comparison with Arduino

In the Arduino platform, we need to add an extra WiFi shield to be the WiFi module to realize the WiFi connection.

And we must `#include` to use SPI to communicate with WiFi module.

However, Ameba is already equipped with WiFi module. Therefore, `#include` is not needed.

Use Ameba as Server to communicate with Client

Materials


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Laptop (Make sure it is connected to the same network domain as Ameba, and tcp tools are installed.)

Example

In this example, we first connect Ameba to WiFi, then we use Ameba as server to communicate with client.

First, we make sure the correct Ameba development board is set in “Tools” -> “Board”

Then, open the Simple WiFi Server example in “File” -> “Examples” -> “AmebaWiFi” -> “SimpleServerWiFi”

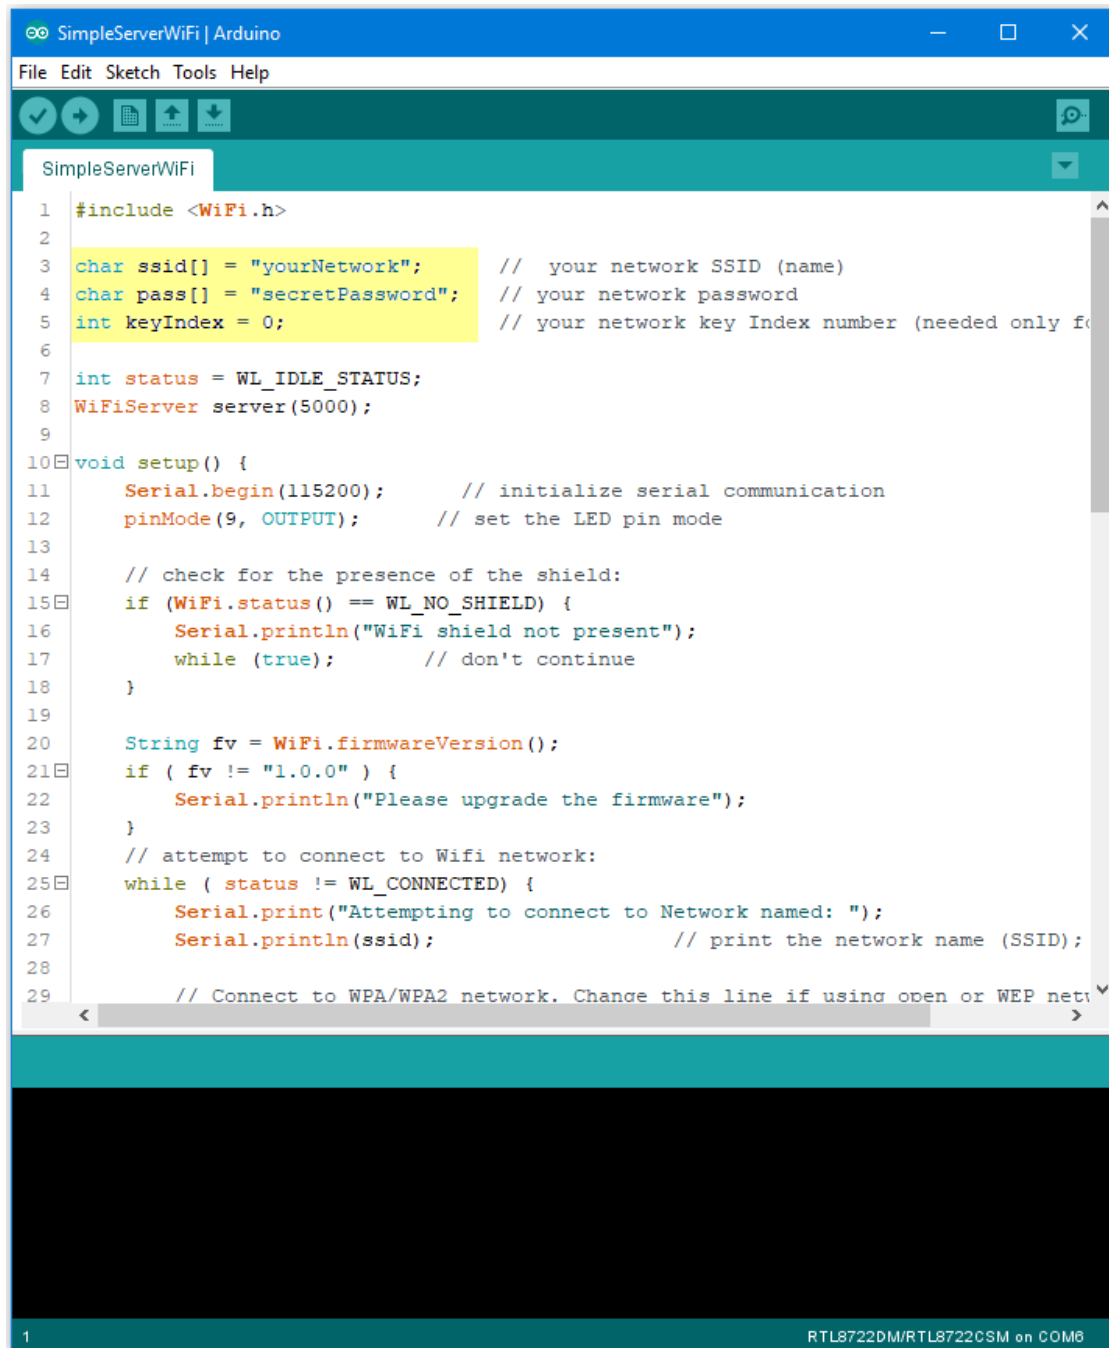


```
SimpleServerWiFi | Arduino
File Edit Sketch Tools Help

SimpleServerWiFi


1 #include <WiFi.h>
2
3 char ssid[] = "yourNetwork"; // your network SSID (name)
4 char pass[] = "secretPassword"; // your network password
5 int keyIndex = 0; // your network key Index number (needed only for WEP)
6
7 int status = WL_IDLE_STATUS;
8 WiFiServer server(5000);
9
10 void setup() {
11     Serial.begin(115200); // initialize serial communication
12     pinMode(9, OUTPUT); // set the LED pin mode
13
14     // check for the presence of the shield:
15     if (WiFi.status() == WL_NO_SHIELD) {
16         Serial.println("WiFi shield not present");
17         while (true); // don't continue
18     }
19
20     String fv = WiFi.firmwareVersion();
21     if ( fv != "1.0.0" ) {
22         Serial.println("Please upgrade the firmware");
23     }
24     // attempt to connect to Wifi network:
25     while ( status != WL_CONNECTED) {
26         Serial.print("Attempting to connect to Network named: ");
27         Serial.println(ssid); // print the network name (SSID);
28
29         // Connect to WPA/WPA2 network. Change this line if using open or WEP network
30     }
```

In the sample code, modify the highlighted parameters and enter the ssid and password for your WiFi connection.

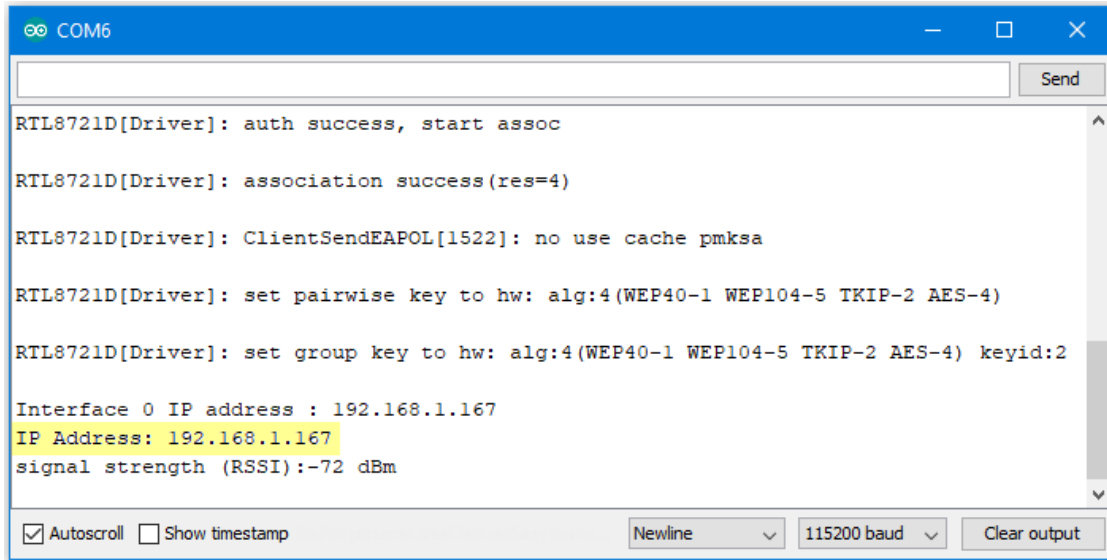

Next, upload the code, then press the reset button on Ameba. At this moment, you will see the connection information is displayed in the console.

Next, we use the socket tool in the laptop to be the client and connect to the IP address of the Ameba board shown in the connection information at port 5000. (Note: The socket tool we used in this example is “sokit”)

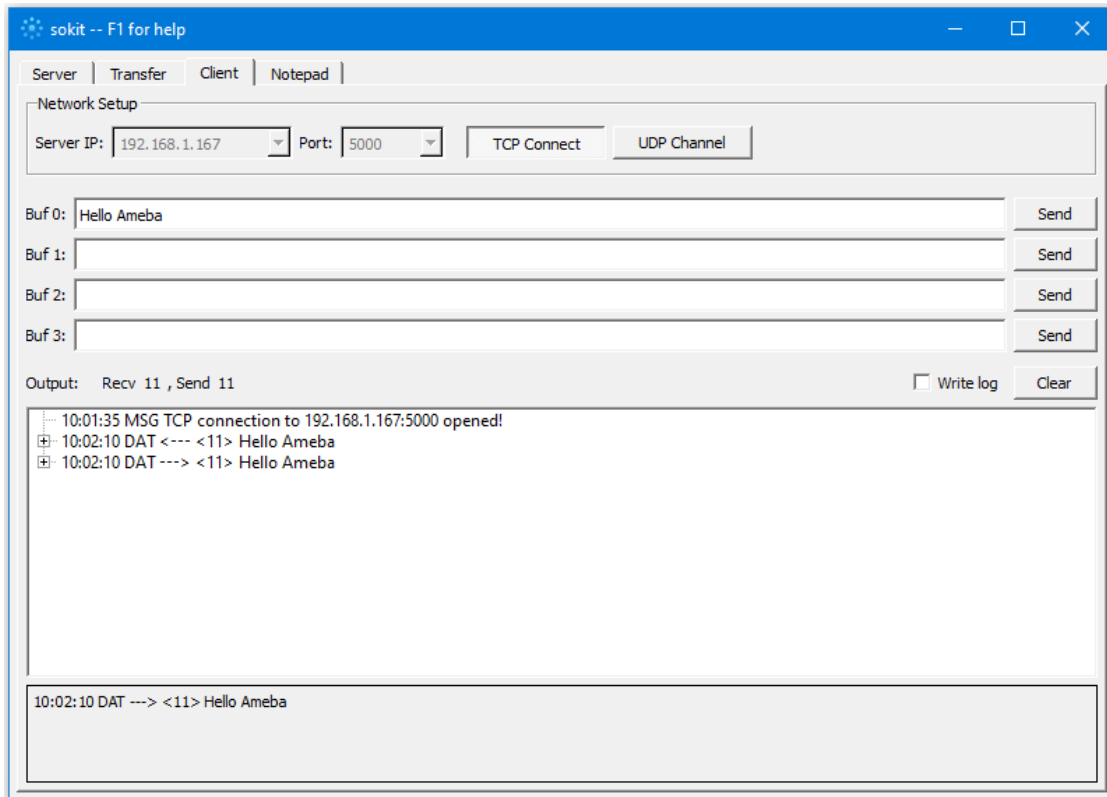

Click on the “Client” tab to choose the client mode, specify the IP and port of the server, then click “TCP Connect” .

If the connection is established successfully, the server shows a message: “A client connected to this Server” , and the

IP and port of the connected client.

In this example, when the client and server are connected and the client sends a string to Ameba server, the Ameba server returns the identical string back to the client.

The string sent to server is returned and showed at the client side.

Code Reference

Use `WiFi.begin()` to establish WiFi connection;

<https://www.arduino.cc/en/Reference/WiFiBegin>

To get the information of a WiFi connection:

Use `WiFi.SSID()` to get SSID of the current connected network.

<https://www.arduino.cc/en/Reference/WiFiSSID>

Use `WiFi.RSSI()` to get the signal strength of the connection.

<https://www.arduino.cc/en/Reference/WiFiRSSI>

Use `WiFi.localIP()` to get the Ameba WiFi shield's IP address.

<https://www.arduino.cc/en/Reference/WiFiLocalIP>

Create server and transmitting data:

Use `Server(port)` to create a server that listens on the specified port.

<https://www.arduino.cc/en/Reference/WiFiServer>

Use `server.begin()` to tell the server to begin listening for incoming connections.

<https://www.arduino.cc/en/Reference/WiFiServerBegin>

Use `server.available()` to get a client that is connected to the server and has data available for reading.

<https://www.arduino.cc/en/Reference/WiFiServerAvailable>

Use `client.read()` to read the next byte received from the server.

<https://www.arduino.cc/en/Reference/WiFiClientRead>

Use `client.write()` to write data to the server.

<https://www.arduino.cc/en/Reference/WiFiClientWrite>

Use `client.stop()` to disconnect from the server.

<https://www.arduino.cc/en/Reference/WiFiClientStop>

Use Ameba to retrieve HTTP websites from the internet

Materials


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1

Example


In this example, the `HttpClient` library is used to retrieve a webpage using the HTTP protocol.

First, make sure that the correct Ameba development board is selected in “Tools” -> “Board”


Then open “File” -> “Examples” -> “AmebaHttp” -> “SimpleHttpExample”

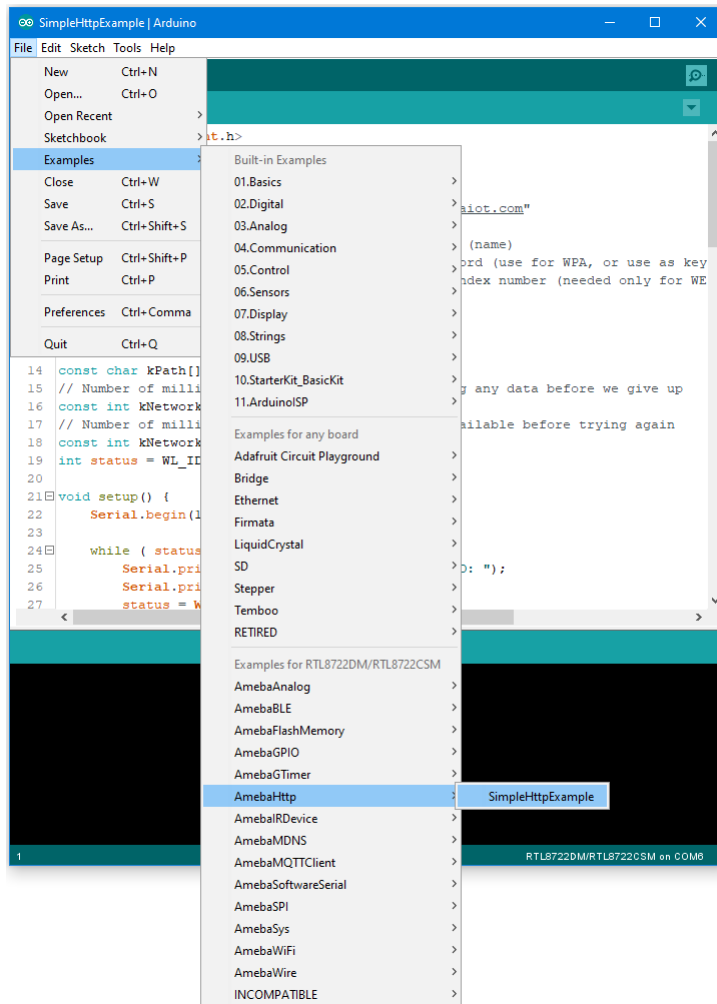

In the sample code, modify the highlighted section to enter the information required (ssid, password, key index) to connect to your WiFi network.

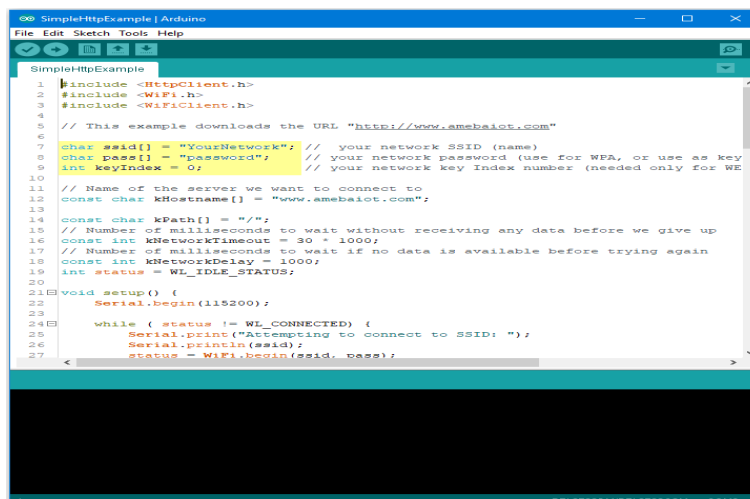

Upload the code and press the reset button on Ameba once the upload is finished. Open the serial monitor in the Arduino IDE and you can see the information retrieved from the website.

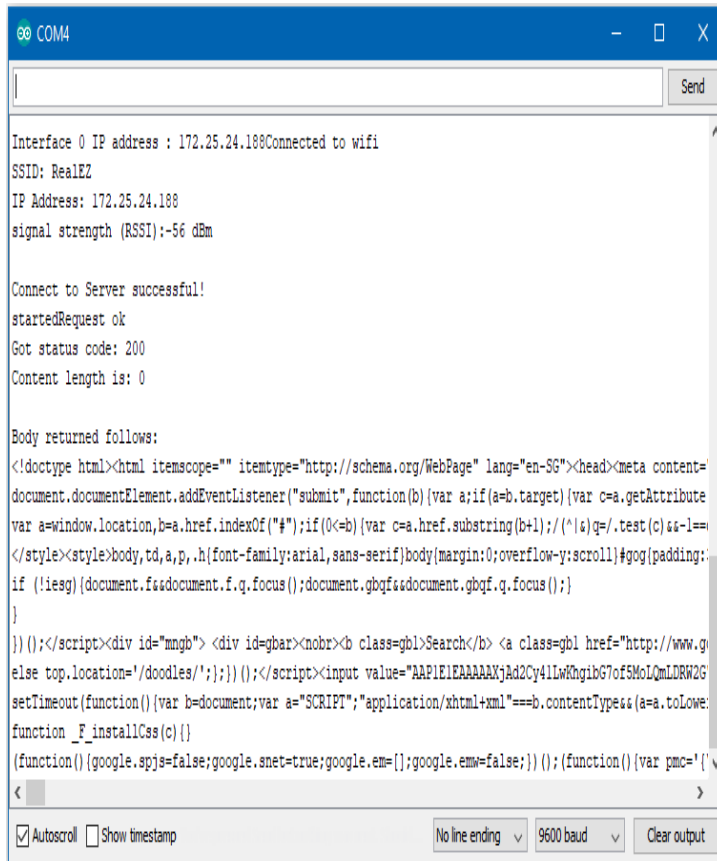

```

COM4

Interface 0 IP address : 172.25.24.188Connected to wifi
SSID: RealEZ
IP Address: 172.25.24.188
signal strength (RSSI):-56 dBm

Connect to Server successful!
startedRequest ok
Got status code: 200
Content length is: 0

Body returned follows:
<!doctype html><html itemscope="" itemtype="http://schema.org/WebPage" lang="en-SG"><head><meta content=
document.documentElement.addEventListener("submit",function(b){var a;if(a=b.target){var c=a.getAttribute
var a=window.location,b=a.href.indexOf("#");if(0<=b){var c=a.href.substring(b+1);/^(s)q=/.test(c);s-l==
</style><style>body,td,a,p,h{font-family:arial,sans-serif}body{margin:0;overflow-y:scroll}#gog{padding:
if (!ie6){document.f.q.focus();document.gbqf.q.focus();}
}
})();</script><div id="mngr"><div id="gbar"><no><b class="gbl">Search</b><a class="gbl" href="http://www.g
else top.location='/doodles/';})();</script><input value="AAPIEIEAAAAAKjAd2Cy4lLwKhgibG7of5MoLQmLDRW2G
setTimeout(function(){var b=document;var a="SCRIPT";"application/xhtml+xml"===b.contentType&&(a=a.toLow
function _F_installCss(c){
(function(){google.spjs=false;google.snet=true;google.em=[];google.emm=false;})();(function(){var pnc='

```

Code Reference

Use `WiFi.begin()` to establish WiFi connection:

<https://www.arduino.cc/en/Reference/WiFiBegin>

To get the information of a WiFi connection:

Use `WiFi.SSID()` to get SSID of the current connected network.

<https://www.arduino.cc/en/Reference/WiFiSSID>

Use `WiFi.RSSI()` to get the signal strength of the connection.

<https://www.arduino.cc/en/Reference/WiFiRSSI>

Use `WiFi.localIP()` to get the IP address of Ameba.

<https://www.arduino.cc/en/Reference/WiFiLocalIP>

Use `WiFiClient` to create a client to handle the WiFi connection.

<https://www.arduino.cc/en/Reference/WiFiClient>

Use HTTPClient to create a client to handle the HTTP connection.

Use `http.get()` to send a GET request to the website.

Use Ameba to retrieve information from the Internet

Materials


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1

Example


In this example, we use Ameba to be a web client to retrieve information from the Internet.

First, make sure the correct Ameba development board is selected in “Tools” -> “Board”

Then open “File” -> “Examples” -> “AmebaWiFi” -> “WiFiWebClient”

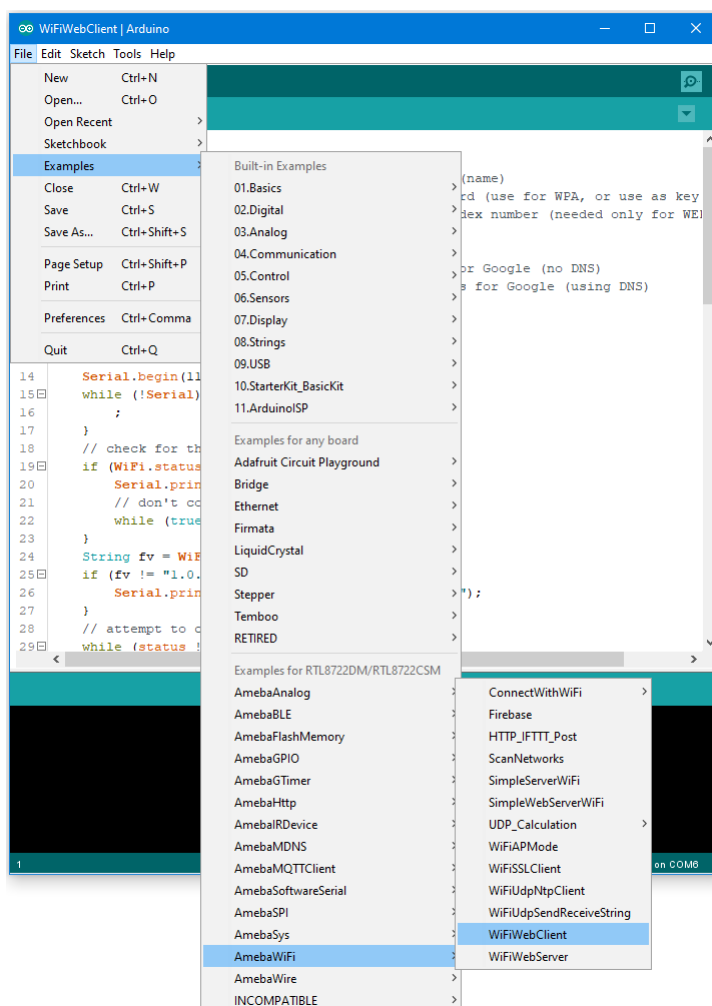

In the sample code, modify the highlighted snippet and enter the required information (ssid, password, key index) required to connect to your WiFi network.

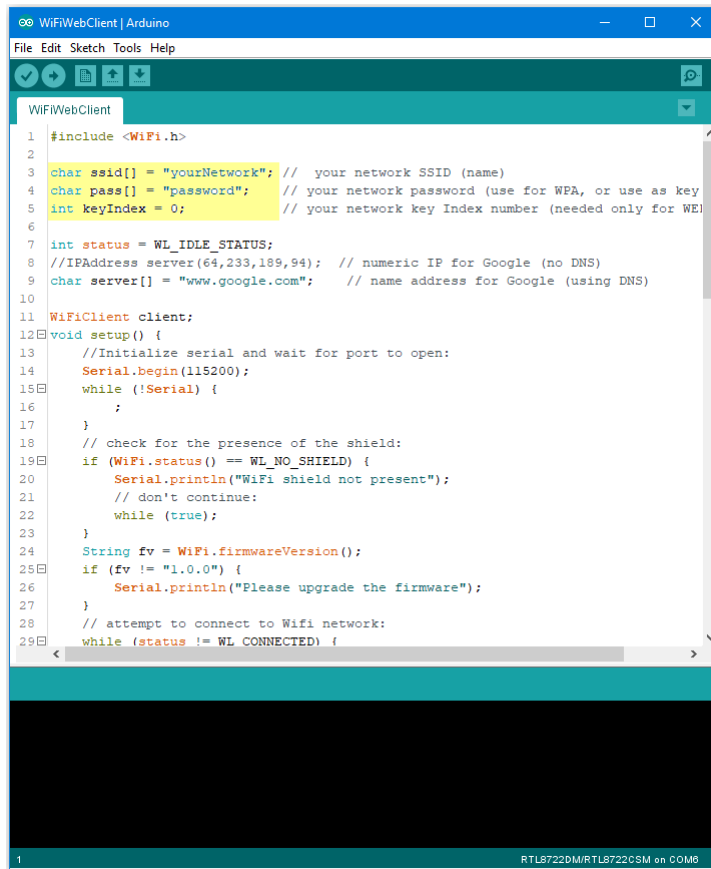


```

1 #include <WiFi.h>
2
3 char ssid[] = "yourNetwork"; // your network SSID (name)
4 char pass[] = "password"; // your network password (use for WPA, or use as key
5 int keyIndex = 0; // your network key Index number (needed only for WE
6
7 int status = WL_IDLE_STATUS;
8 //IPAddress server(64,233,189,94); // numeric IP for Google (no DNS)
9 char server[] = "www.google.com"; // name address for Google (using DNS)
10
11 WiFiClient client;
12 void setup() {
13     //Initialize serial and wait for port to open:
14     Serial.begin(115200);
15     while (!Serial) {
16         ;
17     }
18     // check for the presence of the shield:
19     if (WiFi.status() == WL_NO_SHIELD) {
20         Serial.println("WiFi shield not present");
21         // don't continue:
22         while (true);
23     }
24     String fv = WiFi.firmwareVersion();
25     if (fv != "1.0.0") {
26         Serial.println("Please upgrade the firmware");
27     }
28     // attempt to connect to Wifi network:
29     while (status != WL_CONNECTED) {

```

Upload the code and press the reset button on Ameba. Then you can see the information retrieved from Google is shown in the Arduino serial monitor.

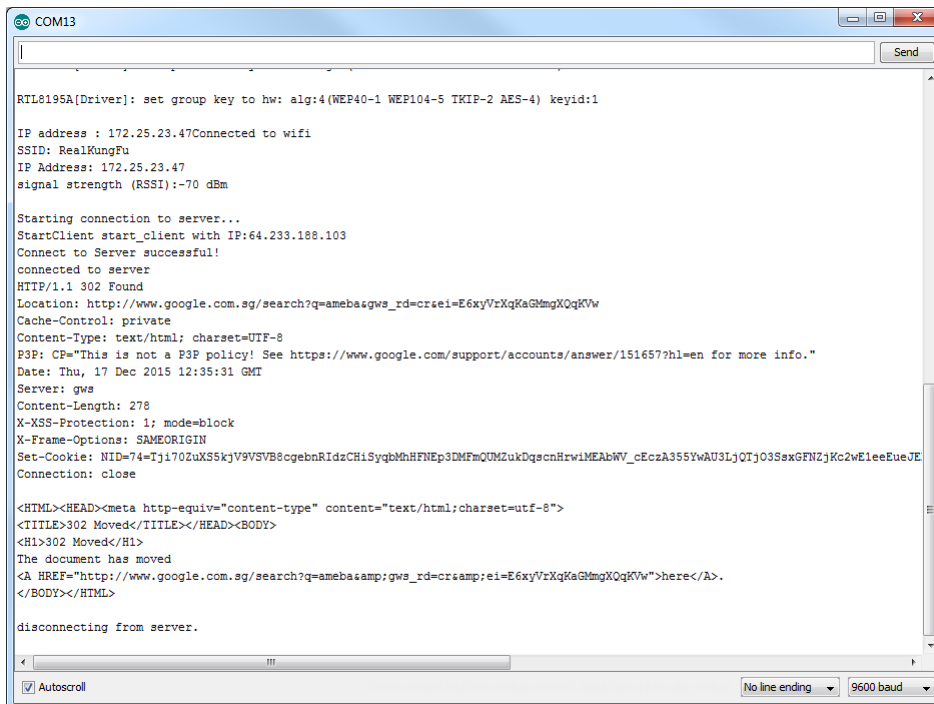

```

RTL8195A[Driver]: set group key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4) keyid:1

IP address : 172.25.23.47Connected to wifi
SSID: RealKungFu
IP Address: 172.25.23.47
signal strength (RSSI): -70 dBm

Starting connection to server...
StartClient start_client with IP:64.233.188.103
Connect to Server successful!
connected to server
HTTP/1.1 302 Found
Location: http://www.google.com.sg/search?q=amebas&gws_rd=cr&ei=E6xyVrXqKaGmngXQqKVw
Cache-Control: private
Content-Type: text/html; charset=UTF-8
P3P: CP="This is not a P3P policy! See https://www.google.com/support/accounts/answer/151657?hl=en for more info."
Date: Thu, 17 Dec 2015 12:35:31 GMT
Server: gws
Content-Length: 278
X-XSS-Protection: 1; mode=block
X-Frame-Options: SAMEORIGIN
Set-Cookie: NID=74=Tji70ZuX55kjV9VSVB8cgebnRIdzChISyqkMhHFNEp3DMFmQUMZukDqscnHrwiMEAbWV_cEcA355YwAU3LjQTj03SsxGFNZjKc2wE1eeEueJE
Connection: close

<HTML><HEAD><meta http-equiv="content-type" content="text/html; charset=utf-8">
<TITLE>302 Moved</TITLE></HEAD><BODY>
<H1>302 Moved</H1>
The document has moved
<A HREF="http://www.google.com.sg/search?q=amebas&gws_rd=cr&ei=E6xyVrXqKaGmngXQqKVw">here</A>.
</BODY></HTML>

disconnecting from server.

```


Code Reference

<https://www.arduino.cc/en/Reference/WiFiBegin>

To get the information of a WiFi connection: Use `WiFi.SSID()` to get SSID of the current connected network.

<https://www.arduino.cc/en/Reference/WiFiSSID>

Use `WiFi.RSSI()` to get the signal strength of the connection.

<https://www.arduino.cc/en/Reference/WiFiRSSI>

Use `WiFi.localIP()` to get the IP address of Ameba.

<https://www.arduino.cc/en/Reference/WiFiLocalIP>

Use `WiFiClient()` to create a client.

<https://www.arduino.cc/en/Reference/WiFiClient>

Use `client.connect()` to connect to the IP address and port specified.

<https://www.arduino.cc/en/Reference/WiFiClientConnect>

Use `client.println()` to print data followed by a carriage return and newline.

<https://www.arduino.cc/en/Reference/WiFiClientPrintln>

Use `client.available()` to return the number of bytes available for reading.

<https://www.arduino.cc/en/Reference/WiFiClientAvailable>

Use `client.read()` to read the next byte received from the server the client is connected to.

<https://www.arduino.cc/en/Reference/WiFiClientRead>

Use `client.stop()` to disconnect from the server the client is connected to.

<https://www.arduino.cc/en/Reference/WiFiClientStop>

Use Ameba as Server to control LED

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Breadboard x 1
- LED x 1
- 1K Ω Resistor x 1


Procedure


In this example, we connect Ameba to WiFi and use Ameba as server, the user can control the LED on/off through a webpage.

First, connect Ameba with the LED.


In a LED, the longer pin is the positive pole, and the shorter pin is the negative pole. So, we connect the shorter pin to GND and connect the longer pin to D13. Additionally, to avoid the electric current exceeds the tolerance of the LED and causes damage, we connect a resistance on the positive pole.

RTL8722DM / RTL8722CSM Wiring Diagram:

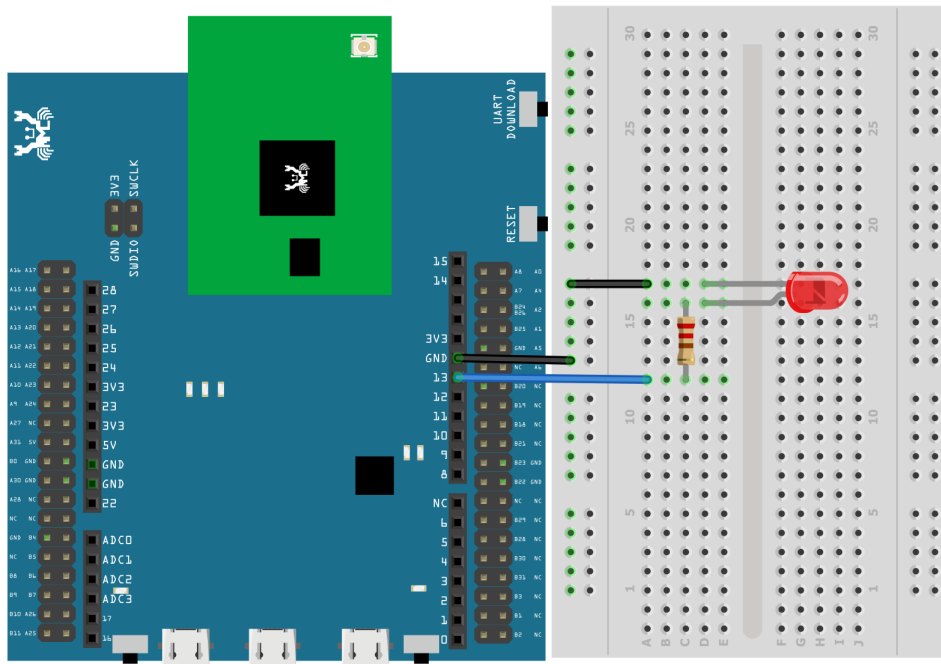


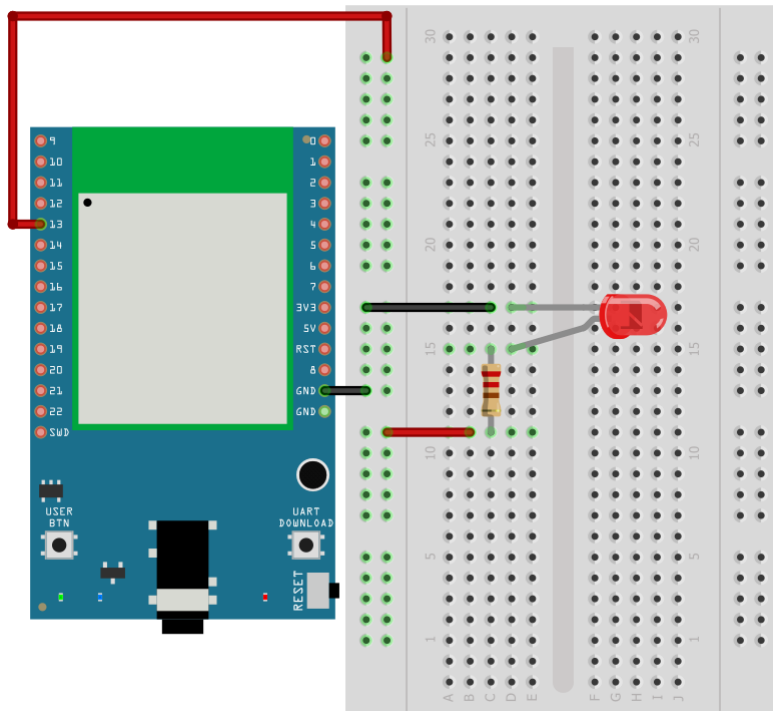

Then open “File” -> “Examples” -> “AmebaWiFi” -> “SimpleWebServerWiFi”

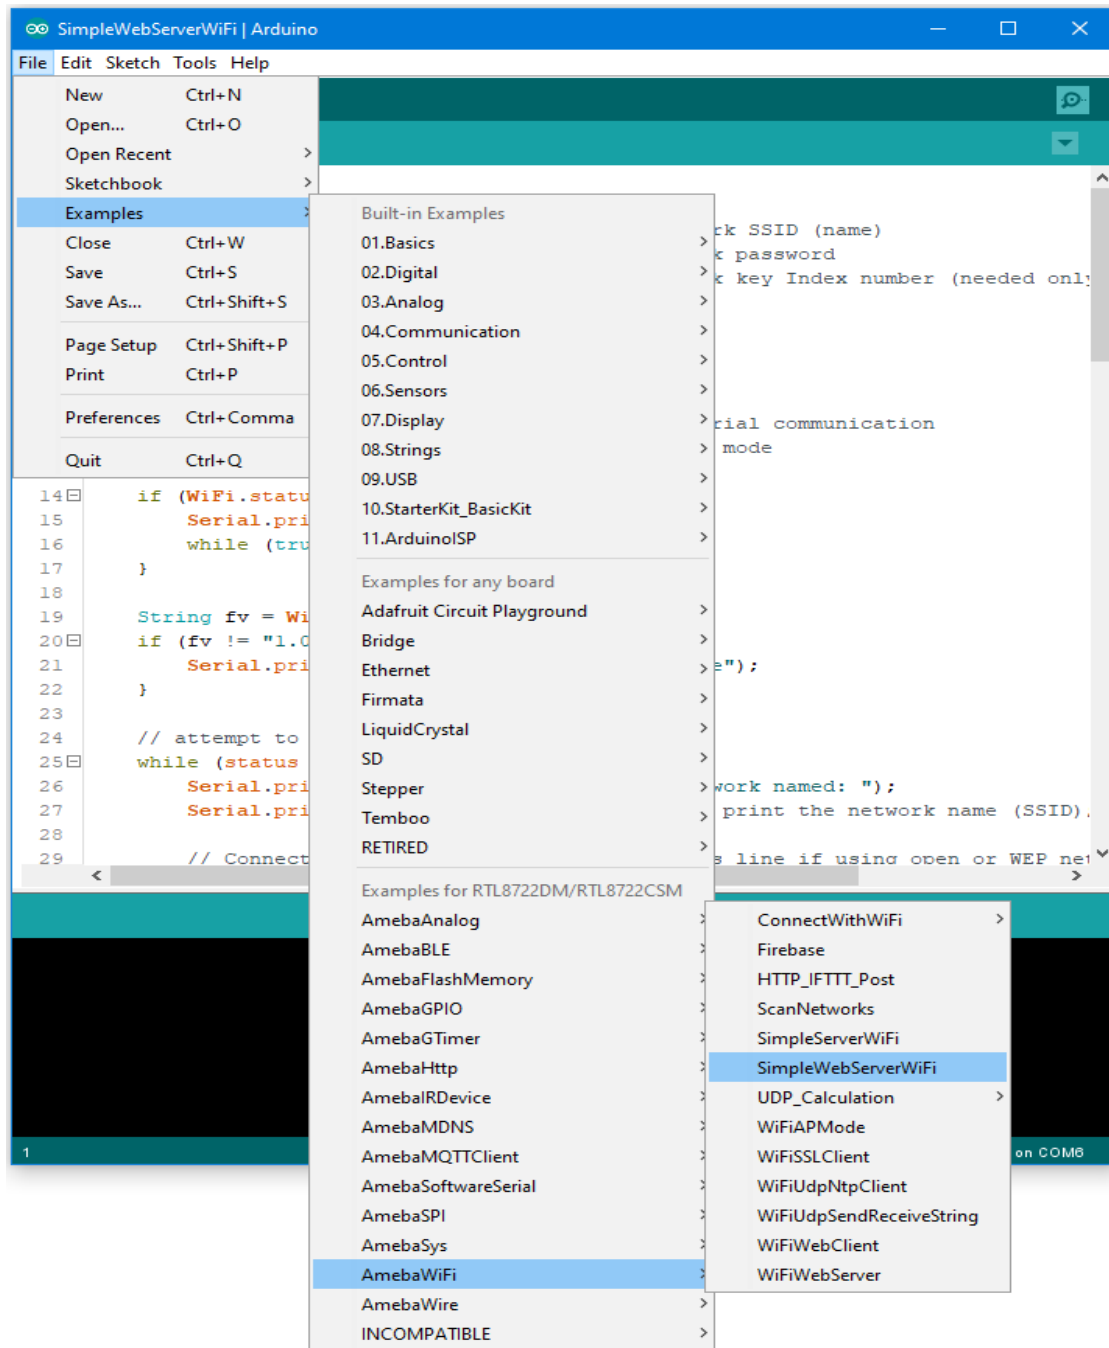

In the sample code, modify the highlighted snippet to corresponding information.

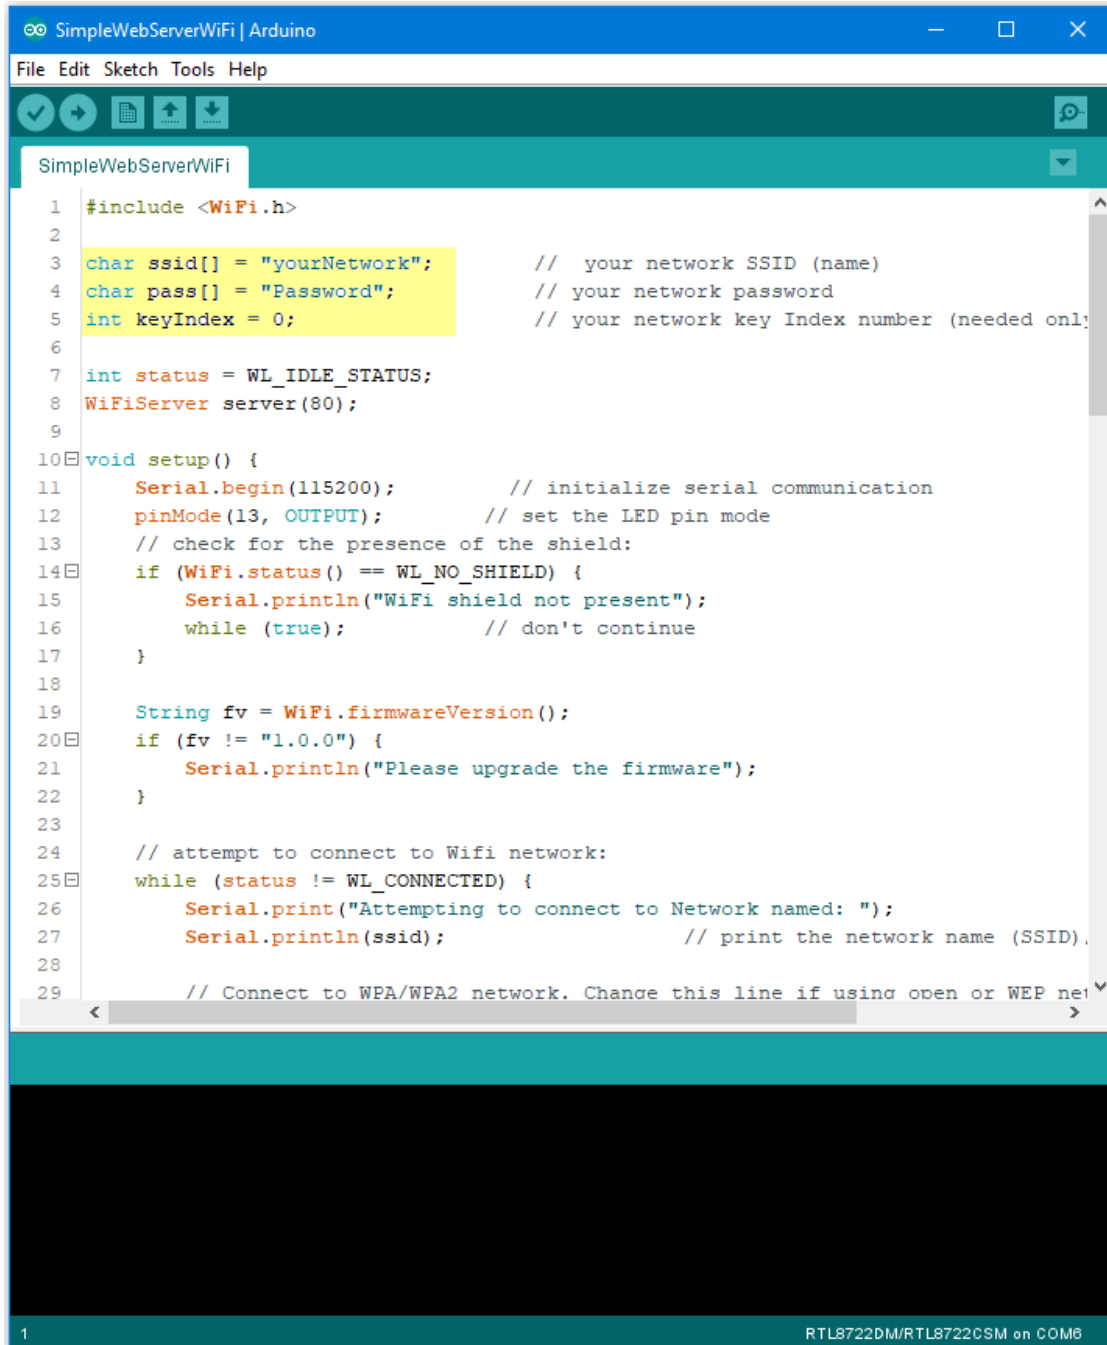

```


1  #include <WiFi.h>
2
3  char ssid[] = "yourNetwork";      // your network SSID (name)
4  char pass[] = "Password";         // your network password
5  int keyIndex = 0;                  // your network key Index number (needed only)
6
7  int status = WL_IDLE_STATUS;
8  WiFiServer server(80);
9
10 void setup() {
11     Serial.begin(115200);           // initialize serial communication
12     pinMode(13, OUTPUT);            // set the LED pin mode
13     // check for the presence of the shield:
14     if (WiFi.status() == WL_NO_SHIELD) {
15         Serial.println("WiFi shield not present");
16         while (true);               // don't continue
17     }
18
19     String fv = WiFi.firmwareVersion();
20     if (fv != "1.0.0") {
21         Serial.println("Please upgrade the firmware");
22     }
23
24     // attempt to connect to Wifi network:
25     while (status != WL_CONNECTED) {
26         Serial.print("Attempting to connect to Network named: ");
27         Serial.println(ssid);        // print the network name (SSID)
28
29         // Connect to WPA/WPA2 network. Change this line if using open or WEP network

```

Upload the code and press the reset button on Ameba. When the connection is established, you will see the message:

"To see this page in action, open a browser to <http://xxx.xxx.xxx.xxx>"

in the Arduino IDE as shown in the figure:

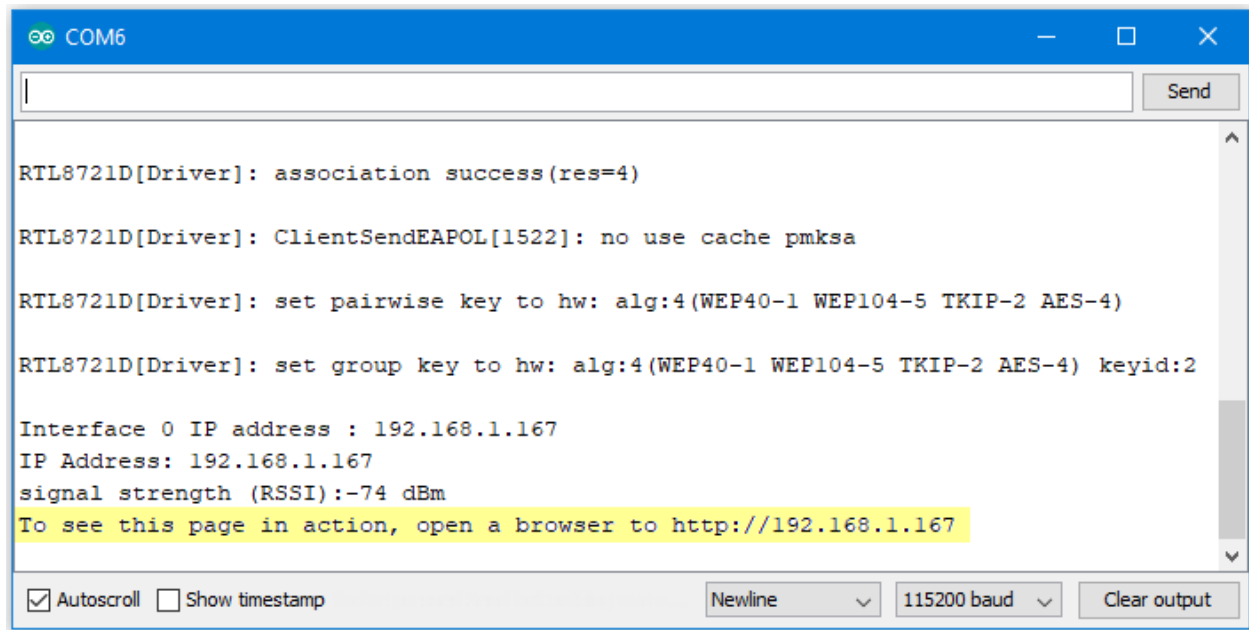

The screenshot shows a serial terminal window titled 'COM6'. It displays a series of log messages from the RTL8721D driver. The messages indicate a successful association, the use of a specific EAPOL client, and the setting of pairwise and group keys. It also shows the IP address assigned to the interface (192.168.1.167) and the signal strength (-74 dBm). A yellow highlight is placed on the final line of the log, which is a URL: 'To see this page in action, open a browser to http://192.168.1.167'. At the bottom of the window, there are controls for 'Autoscroll' (checked), 'Show timestamp' (unchecked), a 'Newline' dropdown, a baud rate dropdown set to '115200 baud', and a 'Clear output' button.

```
COM6

| Send

RTL8721D[Driver]: association success(res=4)

RTL8721D[Driver]: ClientSendEAPOL[1522]: no use cache pmksa


RTL8721D[Driver]: set pairwise key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4)

RTL8721D[Driver]: set group key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4) keyid:2

Interface 0 IP address : 192.168.1.167
IP Address: 192.168.1.167
signal strength (RSSI):-74 dBm
To see this page in action, open a browser to http://192.168.1.167

☒ Autoscroll ☐ Show timestamp Newline 115200 baud Clear output
```

Next, open the browser of a computer or a cell phone under the same WiFi domain, enter the address in the message.

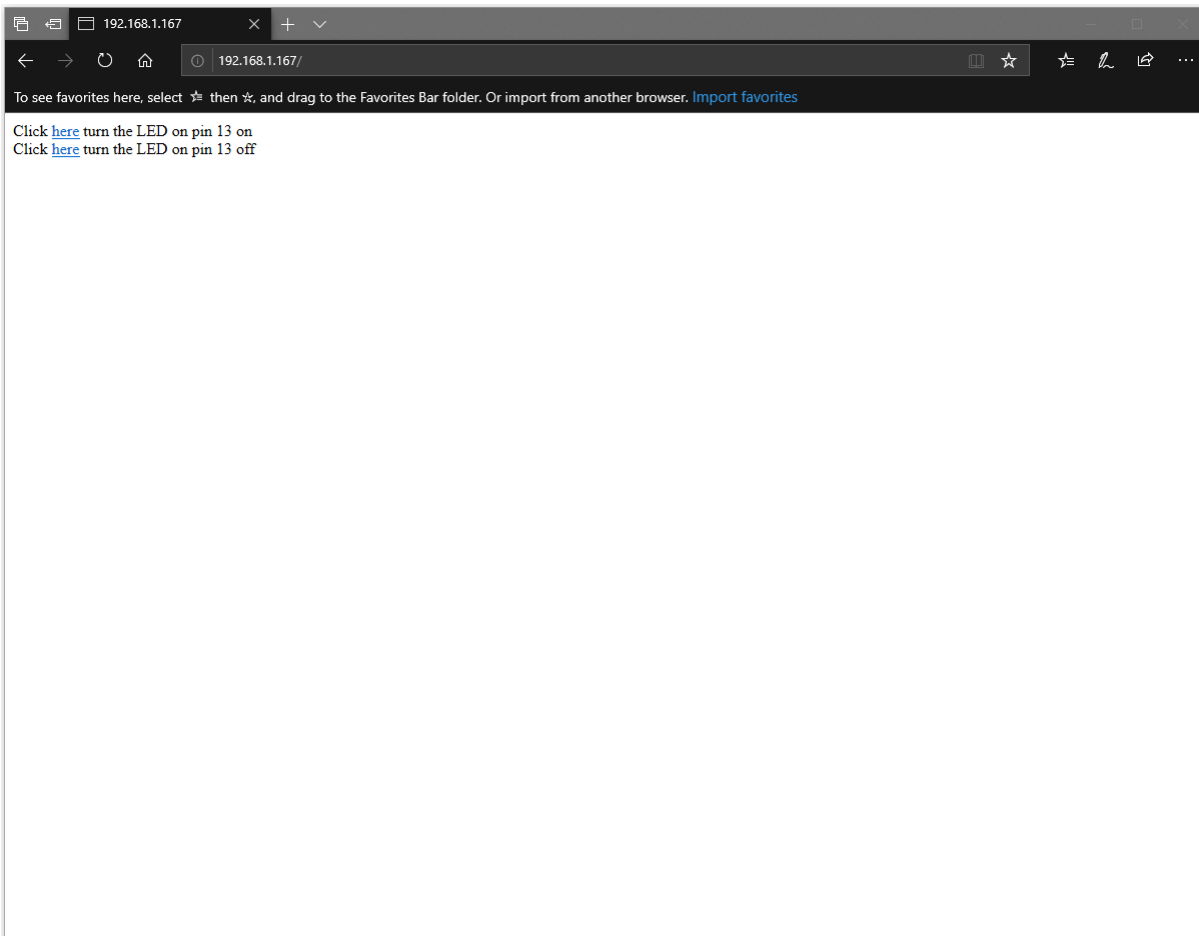

In the webpage, you can turn on/off the LED.

Code Reference

Use `WiFi.begin()` to establish WiFi connection.

<https://www.arduino.cc/en/Reference/WiFiBegin>

To get the information of a WiFi connection:

Use `WiFi.SSID()` to get SSID of the current connected network.

<https://www.arduino.cc/en/Reference/WiFiSSID>

Use `WiFi.RSSI()` to get the signal strength of the connection.

<https://www.arduino.cc/en/Reference/WiFiRSSI>

Use `WiFi.localIP()` to get the IP address of Ameba.

<https://www.arduino.cc/en/Reference/WiFiLocalIP>

Use `WiFiServer server()` to create a server that listens on the specified port.

<https://www.arduino.cc/en/Reference/WiFiServer>

Use `server.begin()` to tell the server to begin listening for incoming connections.

<https://www.arduino.cc/en/Reference/WiFiServerBegin>

Use `server.available()` to get a client that is connected to the server and has data available for reading.

<https://www.arduino.cc/en/Reference/WiFiServerAvailable>

Use `client.connected()` to get whether or not the client is connected.

<https://www.arduino.cc/en/Reference/WiFiClientConnected>

Use `client.println()` to print data followed by a carriage return and newline.

<https://www.arduino.cc/en/Reference/WiFiClientPrintln>

Use `client.print()` to print data to the server that a client is connected to.

<https://www.arduino.cc/en/Reference/WiFiClientPrint>

Use `client.available()` to return the number of bytes available for reading.

<https://www.arduino.cc/en/Reference/WiFiClientAvailable>

Use `client.read()` to read the next byte received from the server the client is connected to.

<https://www.arduino.cc/en/Reference/WiFiClientRead>

Use `client.stop()` to disconnect from the server the client is connected to.

<https://www.arduino.cc/en/Reference/WiFiClientStop>

Use Ameba as Server to send Ameba status


Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1


Example

In this example, we connect Ameba to WiFi and use Ameba as server to send message to connected client.

First, open “File” -> “Examples” -> “AmebaWiFi” -> “WiFiWebServer”

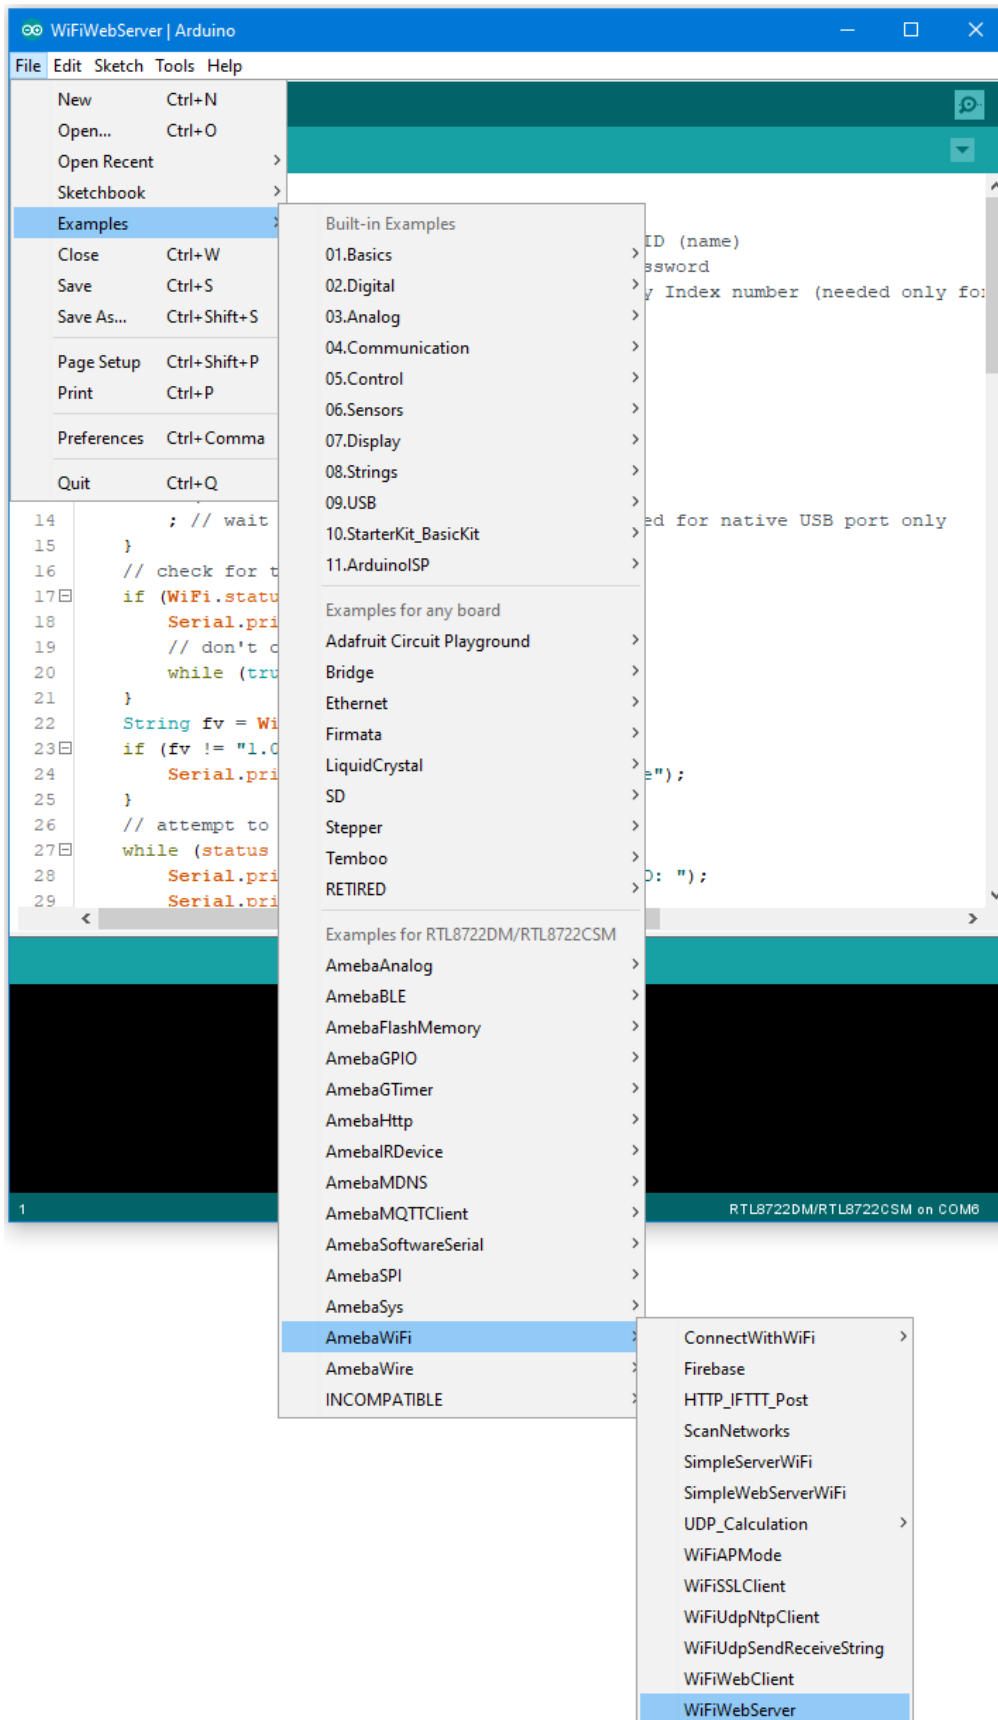

In the sample code, modify the highlighted snippet and enter the required information (ssid, password, key index) required to connect to your WiFi network.

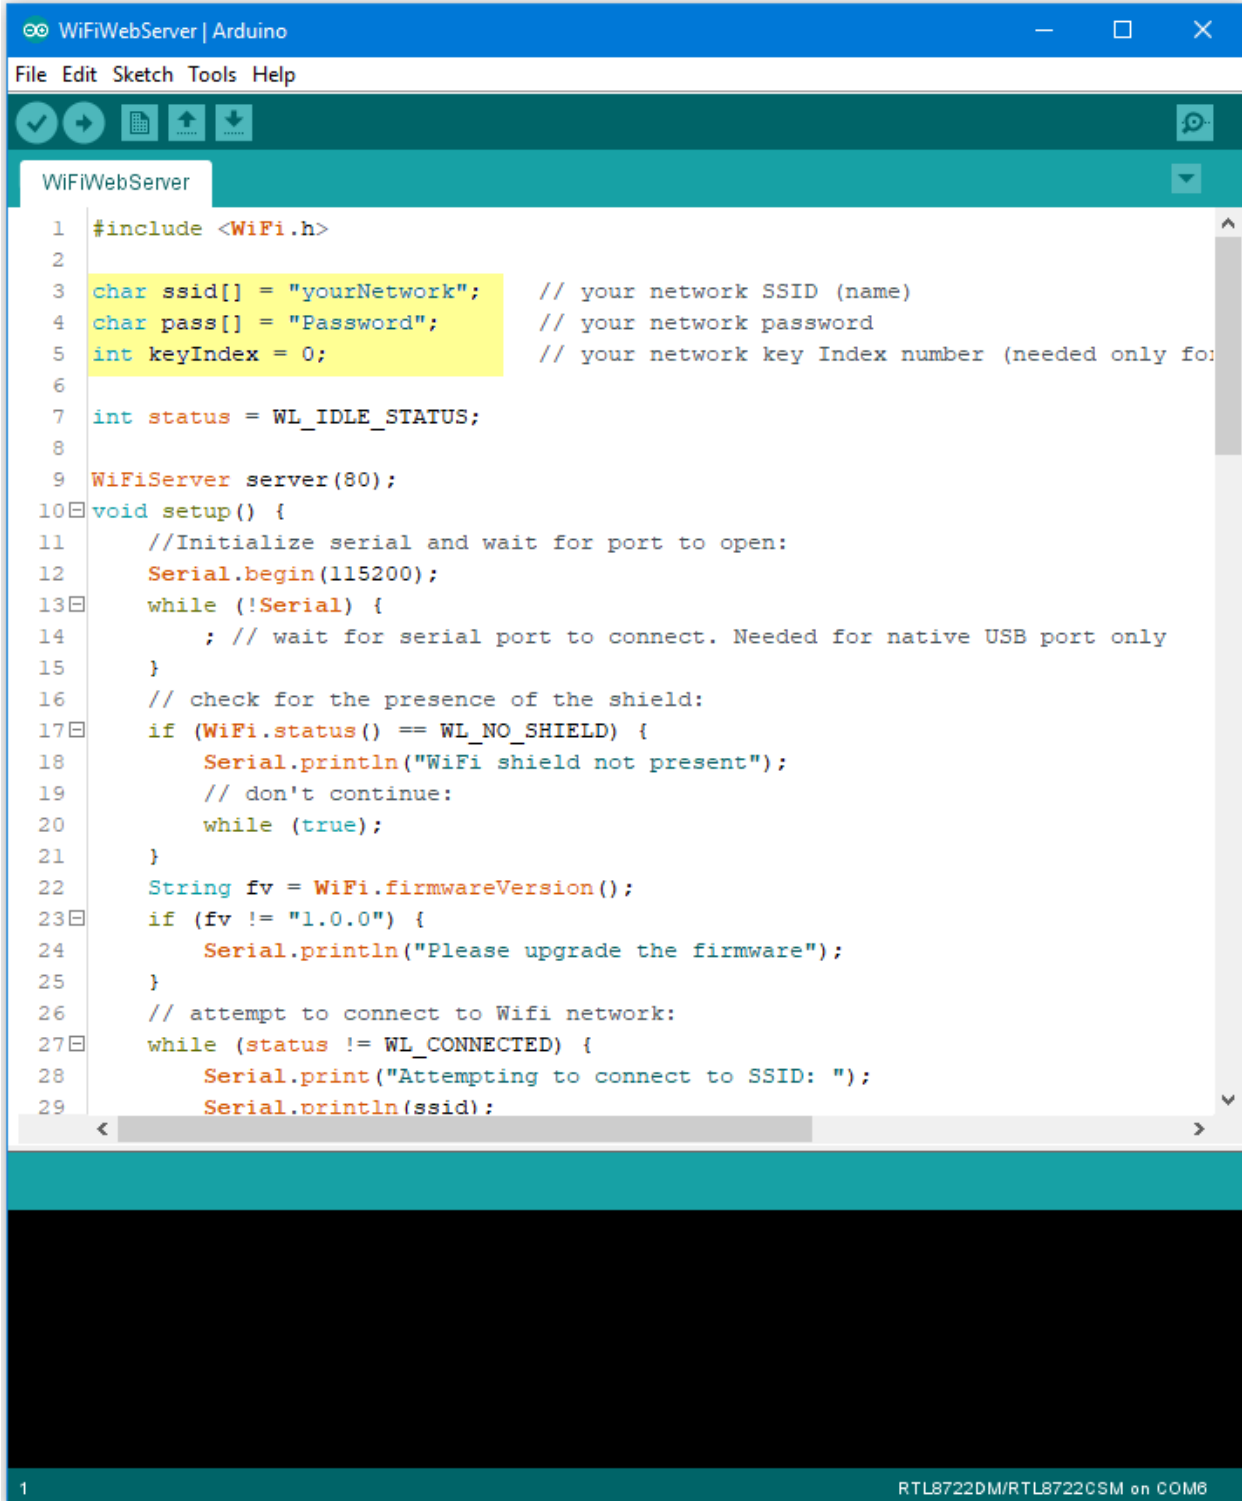


```

1  #include <WiFi.h>
2
3  char ssid[] = "yourNetwork";    // your network SSID (name)
4  char pass[] = "Password";       // your network password
5  int keyIndex = 0;               // your network key Index number (needed only for
6
7  int status = WL_IDLE_STATUS;
8
9  WiFiServer server(80);
10 void setup() {
11     //Initialize serial and wait for port to open:
12     Serial.begin(115200);
13     while (!Serial) {
14         ; // wait for serial port to connect. Needed for native USB port only
15     }
16     // check for the presence of the shield:
17     if (WiFi.status() == WL_NO_SHIELD) {
18         Serial.println("WiFi shield not present");
19         // don't continue:
20         while (true);
21     }
22     String fv = WiFi.firmwareVersion();
23     if (fv != "1.0.0") {
24         Serial.println("Please upgrade the firmware");
25     }
26     // attempt to connect to Wifi network:
27     while (status != WL_CONNECTED) {
28         Serial.print("Attempting to connect to SSID: ");
29         Serial.println(ssid);

```

Upload the code and press the reset button on Ameba. After connecting to WiFi, Ameba starts to run as server. The IP of the server is shown in the serial monitor, and port is 80.

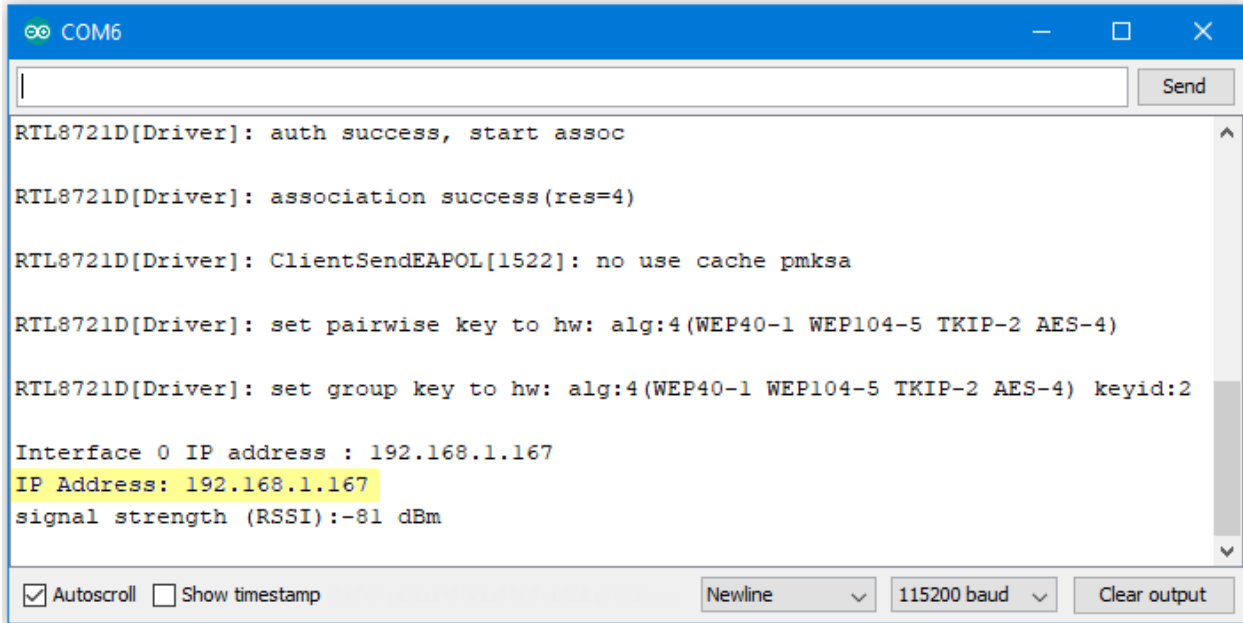


The screenshot shows a serial terminal window titled "COM6". It contains several lines of log output from a driver. The text is as follows:

```
RTL8721D[Driver]: auth success, start assoc  
RTL8721D[Driver]: association success(res=4)  
RTL8721D[Driver]: ClientSendEAPOL[1522]: no use cache pmksa  
RTL8721D[Driver]: set pairwise key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4)  
RTL8721D[Driver]: set group key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4) keyid:2  
Interface 0 IP address : 192.168.1.167  
IP Address: 192.168.1.167  
signal strength (RSSI):-81 dBm
```

At the bottom of the window, there are controls: a checked "Autoscroll" checkbox, an unchecked "Show timestamp" checkbox, a "Newline" dropdown menu, a "115200 baud" dropdown menu, and a "Clear output" button.

We connect to the server in a browser, and we can see the data sent from the server.

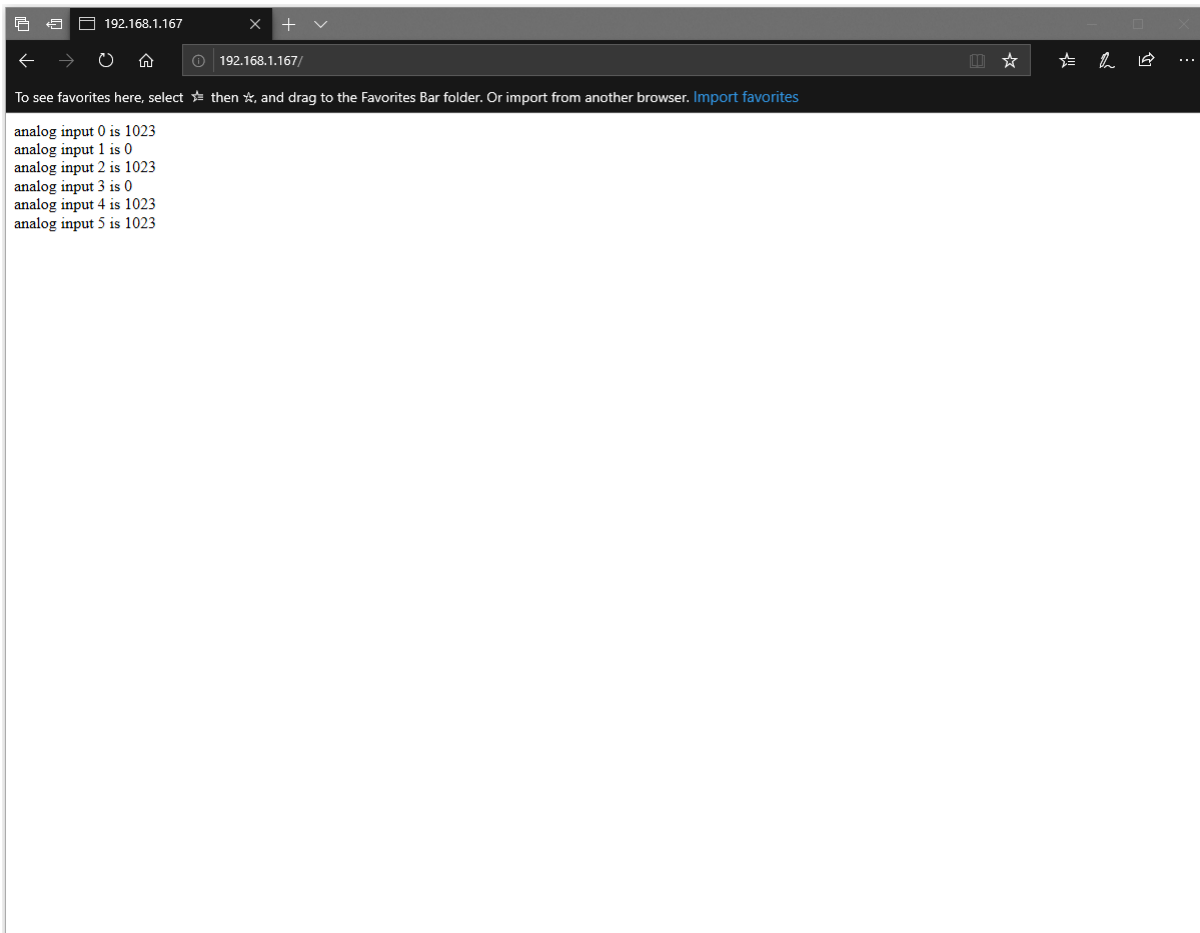

The screenshot shows a web browser window with the address bar set to "192.168.1.167". The page content displays the following text:

```
analog input 0 is 1023  
analog input 1 is 0  
analog input 2 is 1023  
analog input 3 is 0  
analog input 4 is 1023  
analog input 5 is 1023
```

Code Reference

Use `WiFi.begin()` to establish WiFi connection.

<https://www.arduino.cc/en/Reference/WiFiBegin>

To get the information of a WiFi connection:

Use `WiFi.SSID()` to get SSID of the current connected network.

<https://www.arduino.cc/en/Reference/WiFiSSID>

Use `WiFi.RSSI()` to get the signal strength of the connection.

<https://www.arduino.cc/en/Reference/WiFiRSSI>

Use `WiFi.localIP()` to get the IP address of Ameba.

<https://www.arduino.cc/en/Reference/WiFiLocalIP>

Use `WiFiServer server()` to create a server that listens on the specified port.

<https://www.arduino.cc/en/Reference/WiFiServer>

Use `server.begin()` to tell the server to begin listening for incoming connections.

<https://www.arduino.cc/en/Reference/WiFiServerBegin>

Use `server.available()` to get a client that is connected to the server and has data available for reading.

<https://www.arduino.cc/en/Reference/WiFiServerAvailable>

Use `client.connected()` to check whether or not the client is connected.

<https://www.arduino.cc/en/Reference/WiFiClientConnected>

Use `client.println()` to print data followed by a carriage return and newline.

<https://www.arduino.cc/en/Reference/WiFiClientPrintln>

Use `client.print()` to print data to the server that a client is connected to.

<https://www.arduino.cc/en/Reference/WiFiClientPrint>

Use `client.available()` to return the number of bytes available for reading.

<https://www.arduino.cc/en/Reference/WiFiClientAvailable>

Use `client.read()` to read the next byte received from the server the client is connected to.

<https://www.arduino.cc/en/Reference/WiFiClientRead>

Use `client.stop()` to disconnect from the server the client is connected to.

<https://www.arduino.cc/en/Reference/WiFiClientStop>

Use Ameba as UDP server


Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1


Example

In this example, we connect Ameba to WiFi and use Ameba to be an UDP server. When Ameba receives a message from UDP client, it replies “acknowledged” message to client.

Open the WiFi Web Server example. “File” -> “Examples” -> “AmebaWiFi” -> “WiFiUdpSendReceiveString”

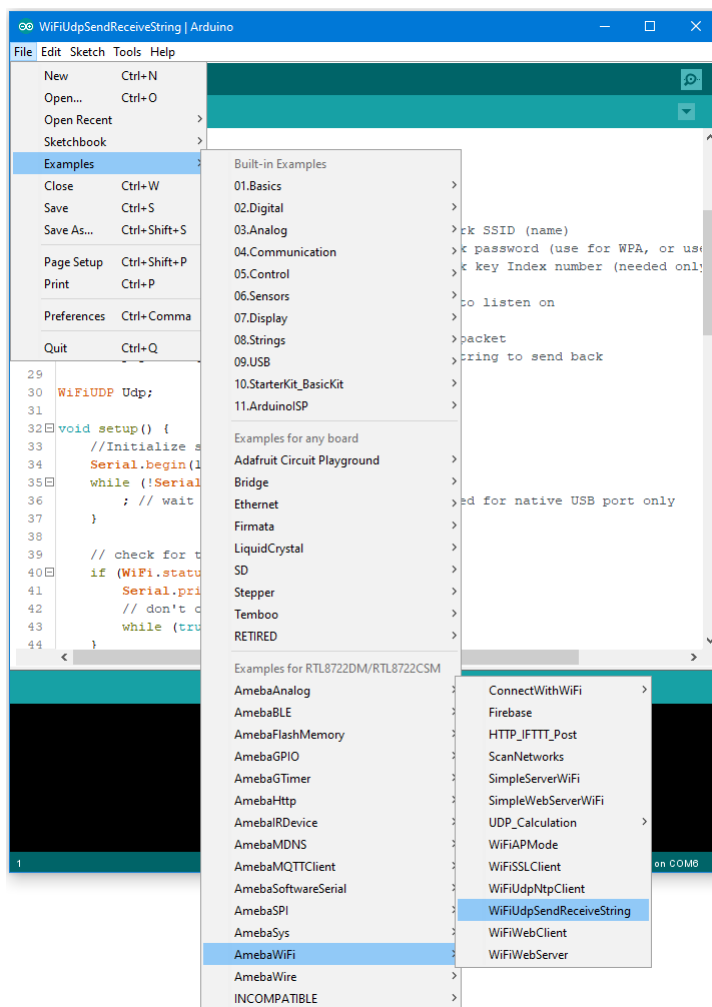

Modify the highlighted code section (ssid, password, keyindex) to connect to your WiFi network.

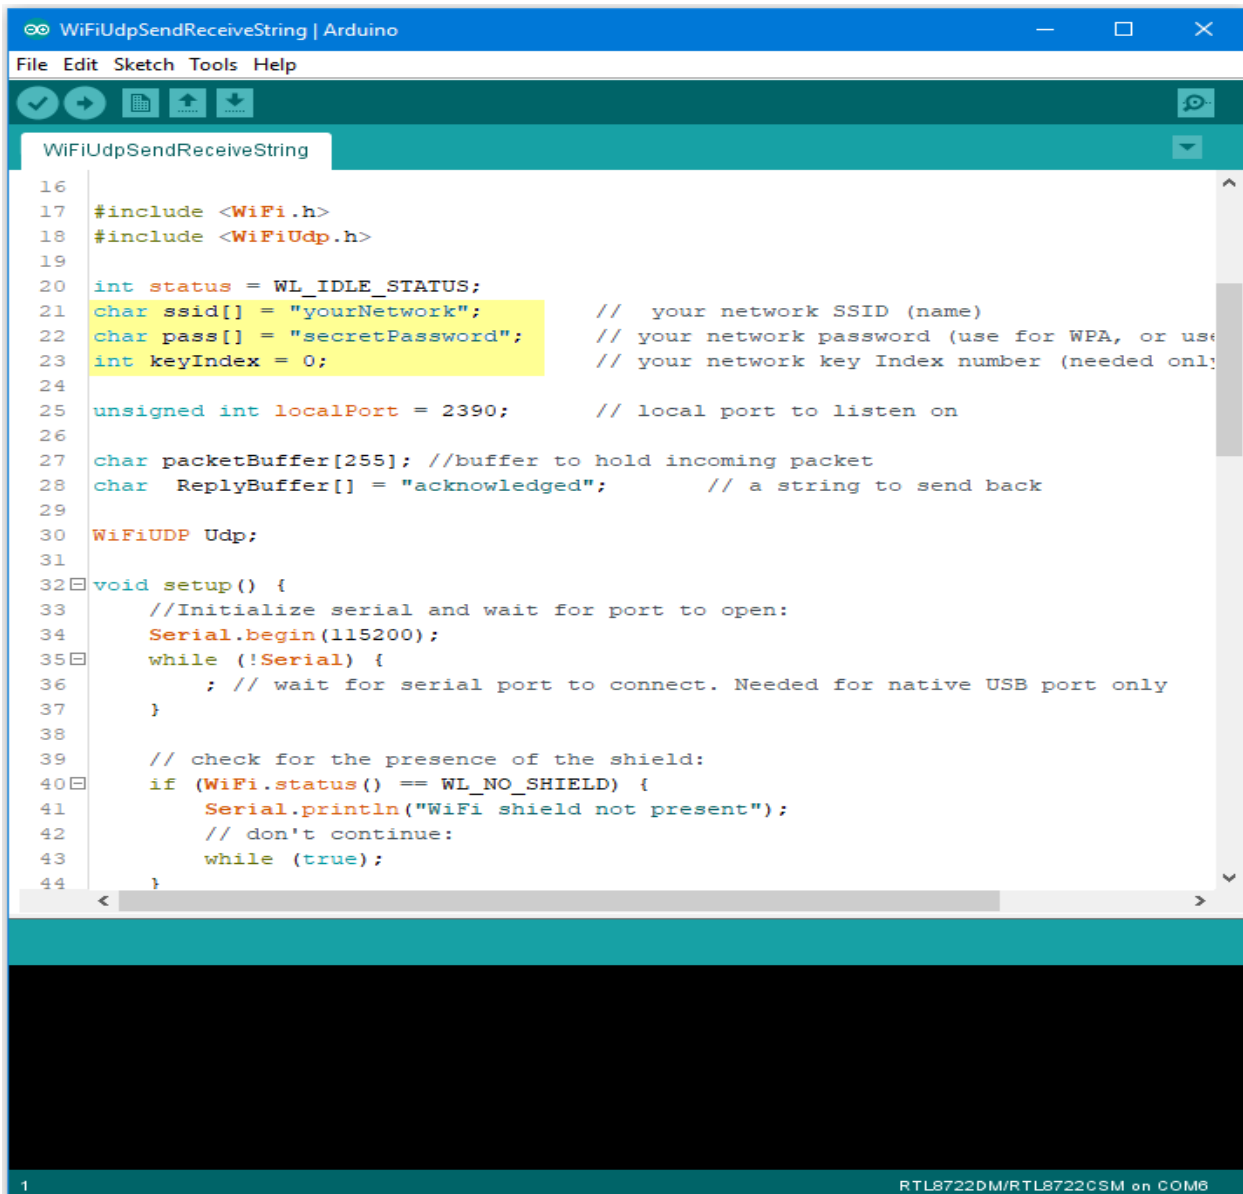


```
WiFiUdpSendReceiveString | Arduino
File Edit Sketch Tools Help

WiFiUdpSendReceiveString
16
17 #include <WiFi.h>
18 #include <WiFiUdp.h>
19
20 int status = WL_IDLE_STATUS;
21 char ssid[] = "yourNetwork"; // your network SSID (name)
22 char pass[] = "secretPassword"; // your network password (use for WPA, or use
23 int keyIndex = 0; // your network key Index number (needed only)
24
25 unsigned int localPort = 2390; // local port to listen on
26
27 char packetBuffer[255]; //buffer to hold incoming packet
28 char ReplyBuffer[] = "acknowledged"; // a string to send back
29
30 WiFiUDP Udp;
31
32 void setup() {
33     //Initialize serial and wait for port to open:
34     Serial.begin(115200);
35     while (!Serial) {
36         ; // wait for serial port to connect. Needed for native USB port only
37     }
38
39     // check for the presence of the shield:
40     if (WiFi.status() == WL_NO_SHIELD) {
41         Serial.println("WiFi shield not present");
42         // don't continue:
43         while (true);
44     }
45 }
```

1 RTL8722DM/RTL8722CSM on COM8


Compile the code and upload it to Ameba. After pressing the Reset button, Ameba connects to WiFi and starts the UDP server with port 2390. After the UDP server starts service, Ameba prints the “Starting connection to server” message and waits for client connection.

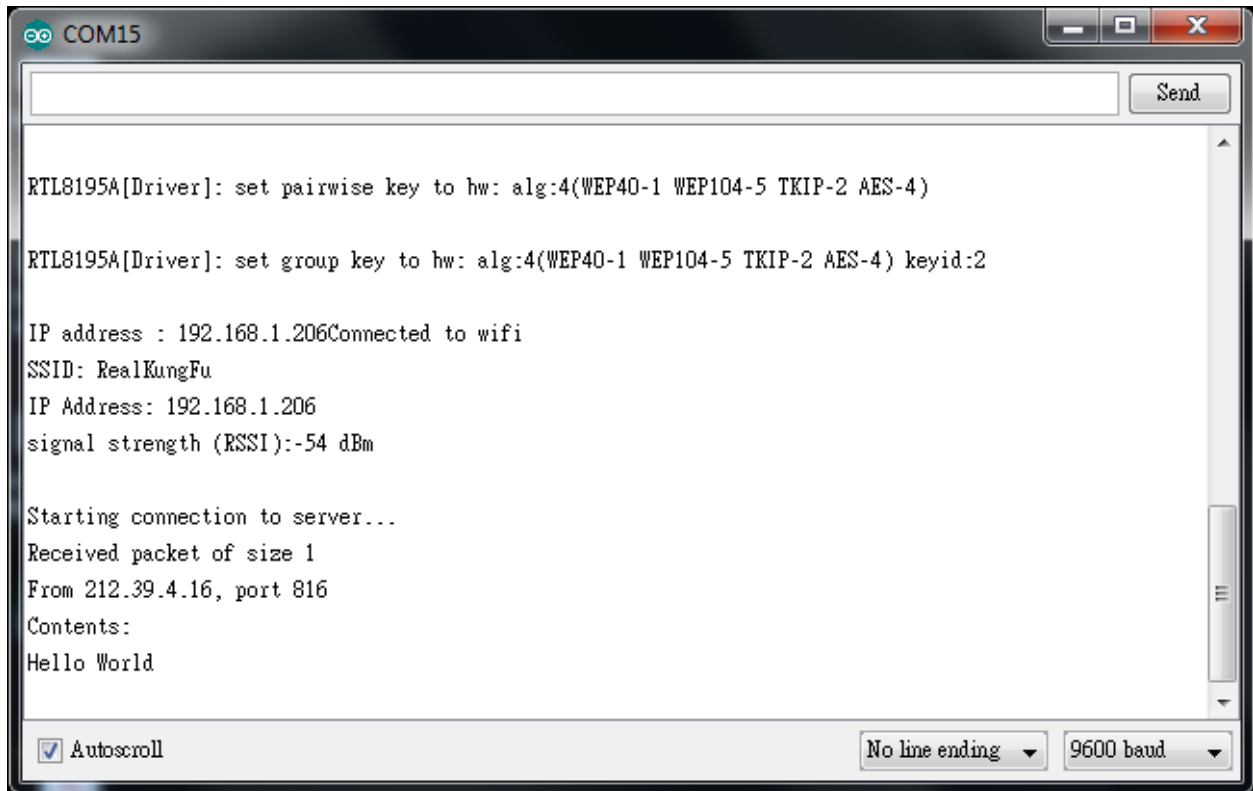

As to the UDP client, we use “sokit” program in the computer to connect to UDP server.

Choose client mode and fill in the IP of UDP server (which is the IP of Ameba) and port 2390, then click “UDP Connect” .

After the connection is established, fill in “Hello World” in the Buf 0 field in sokit and click “Send” . Then you can see the Ameba UDP server replies “acknowledged” .

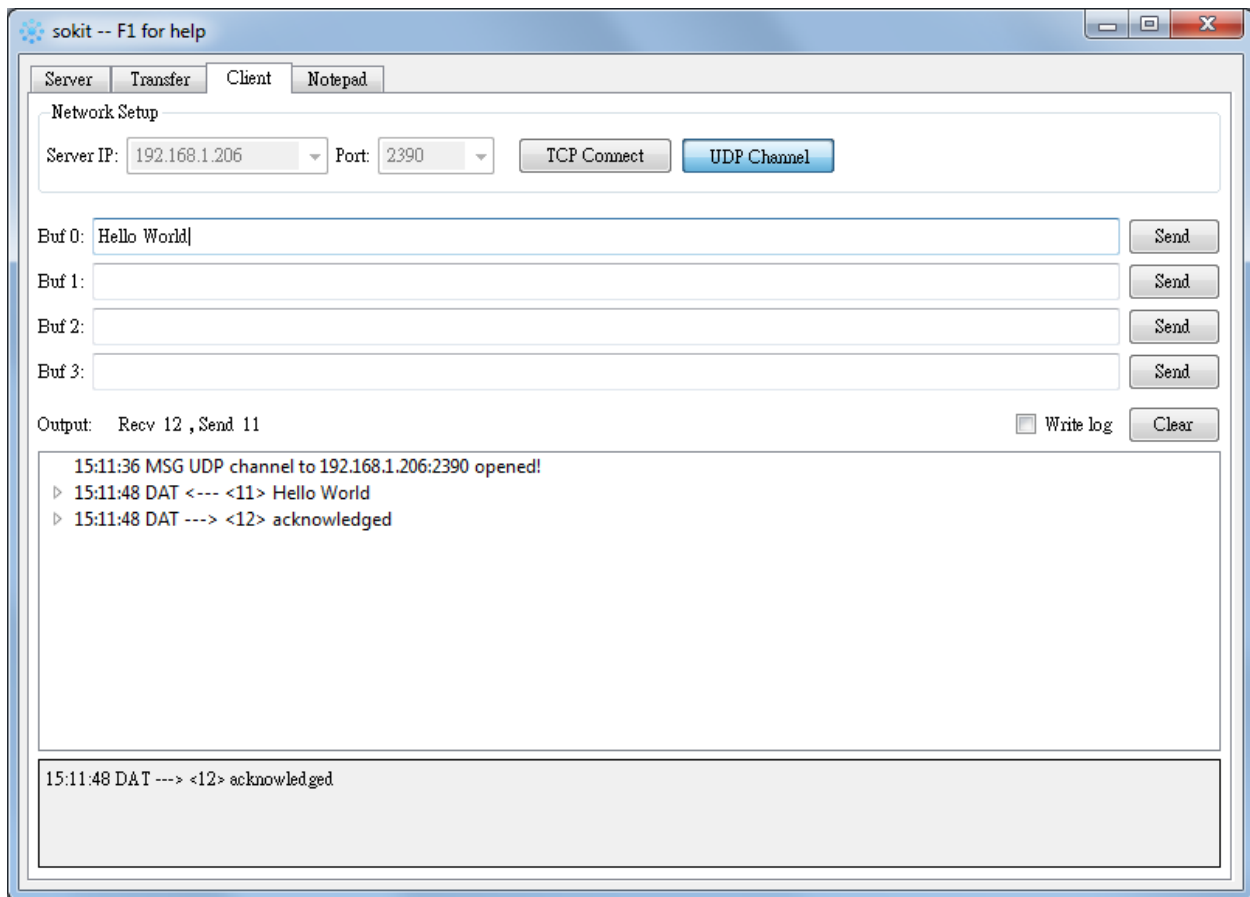

Code Reference

Refer to the Arduino tutorial for detailed information about this example.

<https://www.arduino.cc/en/Tutorial/WiFiSendReceiveUDPString>

First, use `begin()` to open an UDP port on Ameba.

<https://www.arduino.cc/en/Reference/WiFiUDPBgin>

Use `parsePacket()` to wait for data from client.

<https://www.arduino.cc/en/Reference/WiFiUDPParsePacket>

When a connection is established, use `remoteIP()` and `remotePort()` to get the IP and port of the client.

<https://www.arduino.cc/en/Reference/WiFiUDPRemoteIP>

Then use `read()` to read the data sent by client.

<https://www.arduino.cc/en/Reference/WiFiUDPRead>

To send reply, use `beginPacket()`, `write()`, `end()`.

<https://www.arduino.cc/en/Reference/WiFiUDPBeginPacket>

<https://www.arduino.cc/en/Reference/WiFiUDPWrite>

<https://www.arduino.cc/en/Reference/WiFiUDPEndPacket>

Retrieve Universal Time (UTC) By Ameba


Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1

Example

In this example, we connect Ameba to WiFi. Then send NTP (Network Time Protocol, RFC 1305) request to NTP server using UDP. After receiving the NTP request, the NTP server replies current UTC (Coordinated Universal Time) packet. We will parse the UTC packet to show current UTC time in the serial monitor.

Open the example: “File” -> “Examples” -> “AmebaWiFi” -> “WiFiUdpNtpClient”

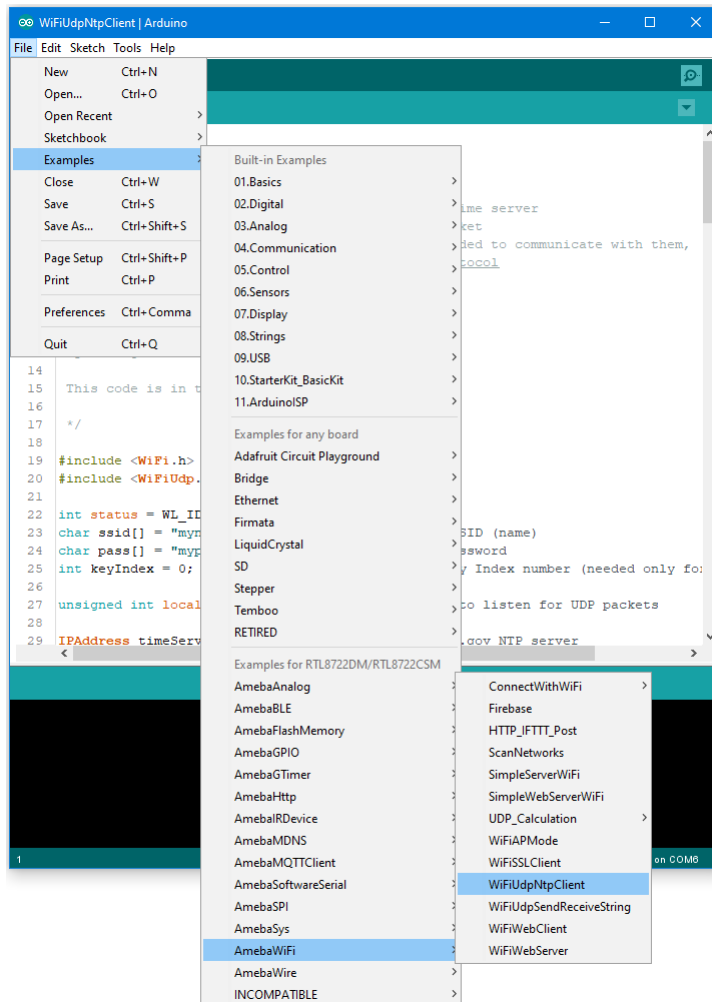

Modify the highlighted code section (ssid, password, keyindex) to connect to your WiFi network.

```

11  by Michael Margolis
12  modified 9 Apr 2012
13  by Tom Igoe
14
15  This code is in the public domain.
16
17  */
18
19  #include <WiFi.h>
20  #include <WiFiUdp.h>
21
22  int status = WL_IDLE_STATUS;
23  char ssid[] = "mynetwork"; // your network SSID (name)
24  char pass[] = "mypassword"; // your network password
25  int keyIndex = 0; // your network key Index number (needed only for
26
27  unsigned int localPort = 2390; // local port to listen for UDP packets
28
29  IPAddress timeServer(129, 6, 15, 28); // time.nist.gov NTP server
30
31  const int NTP_PACKET_SIZE = 48; // NTP time stamp is in the first 48 bytes of the
32
33  byte packetBuffer[ NTP_PACKET_SIZE]; //buffer to hold incoming and outgoing packets
34
35  // A UDP instance to let us send and receive packets over UDP
36  WiFiUDP Udp;
37
38  void setup() {
39    // Open serial communications and wait for port to open:

```

Compile the code and upload it to Ameba. After pressing the Reset button, Ameba connects to WiFi and sends NTP request packet to NTP server “129.6.15.28” .

We parse the replied packet and show UTC time in serial monitor:

```

Interface 0 IP address : 192.168.1.167Connected to wifi
IP Address: 192.168.1.167
signal strength (RSSI):-80 dBm


Starting connection to server...
1
packet received
Seconds since Jan 1 1900 = 3798154620
Unix time = 1589165820
The UTC time is 2:57:00
1
packet received
Seconds since Jan 1 1900 = 3798154631
Unix time = 1589165831
The UTC time is 2:57:11
1

```

Use MQTT To Upload And Listen To Data

Intro to MQTT

MQTT (Message Queuing Telemetry Transport) is a protocol proposed by IBM and Eurotech. The introduction in [MQTT Official Website](#): MQTT is a machine-to-machine (M2M)/"Internet of Things" connectivity protocol. It was designed as an extremely lightweight publish/subscribe messaging transport. We can say MQTT is a protocol designed for IoT. MQTT is based on TCP/IP and transmits/receives data via publish/subscribe. Please refer to the figure below:

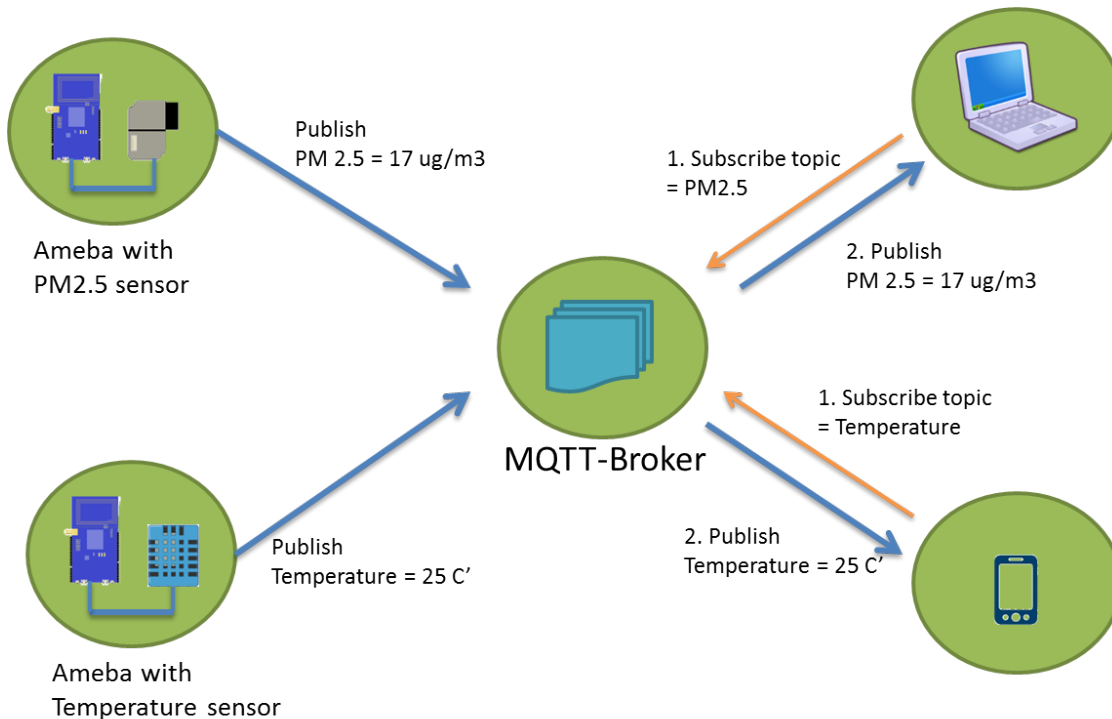

In the operation of MQTT, there are several roles:

- **Publisher:** Usually publishers are the devices equipped with sensors (ex. Ameba). Publishers uploads the data of the sensors to MQTT-Broker, which serves as a database with MQTT service.
- **Subscriber:** Subscribers are referred to the devices which receive and observe messages, such as a laptop or a mobile phone.
- **Topic:** Topic is used to categorized the messages, for example the topic of a message can be "PM2.5" or "Temperature". Subscribers can choose messages of which topics they want to receive.


Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1

Example

In this example, we connect Ameba to MQTT-Broker. Then send messages as publisher and receive messages from MQTT-Broker as subscriber.

Open the MQTT example “File” -> “Examples” -> “AmebaMQTTClient” -> “MQTT_Basic”

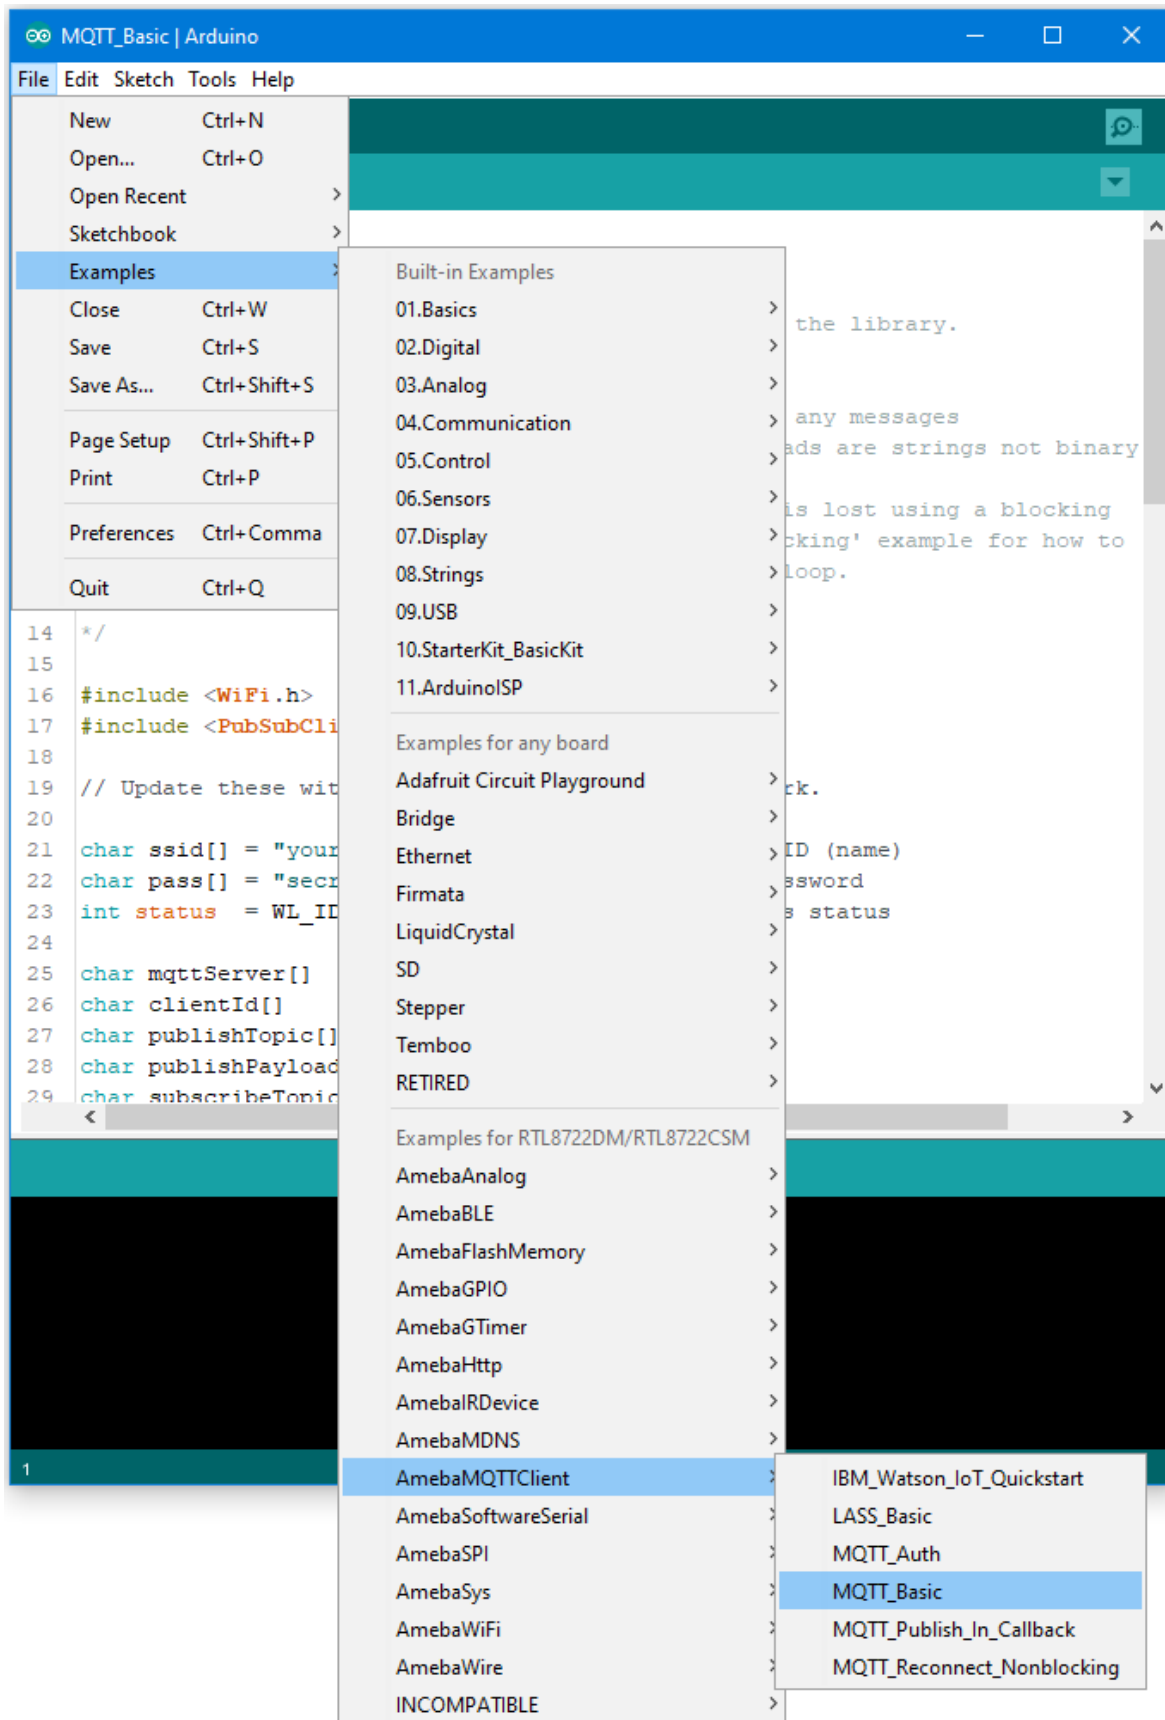

Please modify some WiFi-related parameters.

And some information related to MQTT:

```

MQTT_Basic | Arduino
File Edit Sketch Tools Help

MQTT_Basic


6   - publishes "hello world" to the topic "outTopic"
7   - subscribes to the topic "inTopic", printing out any messages
8     it receives. NB - it assumes the received payloads are strings not binary
9
10  It will reconnect to the server if the connection is lost using a blocking
11  reconnect function. See the 'mqtt_reconnect_nonblocking' example for how to
12  achieve the same result without blocking the main loop.
13
14  */
15
16  #include <WiFi.h>
17  #include <PubSubClient.h>
18
19  // Update these with values suitable for your network.
20
21  char ssid[] = "yourNetwork";    // your network SSID (name)
22  char pass[] = "secretPassword"; // your network password
23  int status  = WL_IDLE_STATUS;   // the Wifi radio's status
24
25  char mqttServer[] = "test.mosquitto.org";
26  char clientId[]   = "amebaClient";
27  char publishTopic[] = "outTopic";
28  char publishPayload[] = "hello world";
29  char subscribeTopic[] = "inTopic";
30
31  void callback(char* topic, byte* payload, unsigned int length) {
32    Serial.print("Message arrived [");
33    Serial.print(topic);
34    Serial.print("] ");
  
```

1 RTL8722DM/RTL8722CSM on COM8

The “mqttServer” refers to the MQTT-Broker, we use the free MQTT sandbox “test.mosquitto.org” for testing.

- “clientId” is an identifier for MQTT-Broker to identify the connected device.
- “publishTopic” is the topic of the published message, we use “outTopic” in the example. The devices subscribe to “outTopic” will receive the message.
- “publishPayload” is the content to be published.
- “subscribeTopic” is to tell MQTT-broker which topic we want to subscribe to.

Next, compile the code and upload it to Ameba. Press the reset button, then open the serial monitor

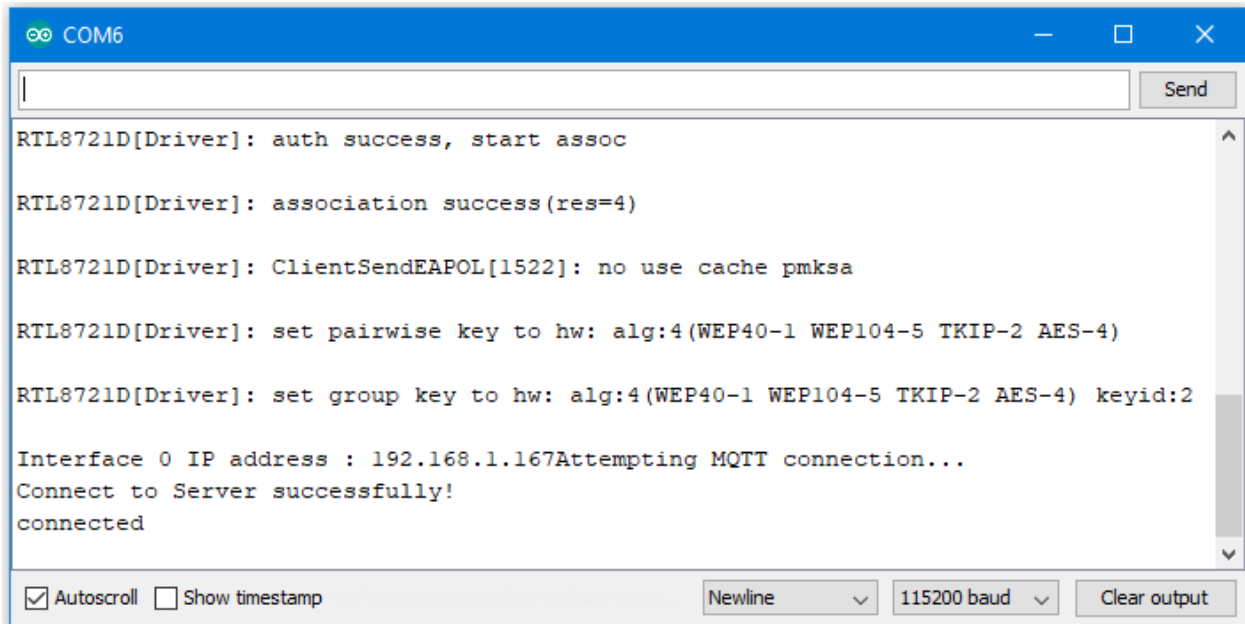

The screenshot shows a serial monitor window with a blue title bar labeled 'COM6'. The main text area displays the following log messages:


```
RTL8721D[Driver]: auth success, start assoc
RTL8721D[Driver]: association success(res=4)
RTL8721D[Driver]: ClientSendEAPOL[1522]: no use cache pmksa
RTL8721D[Driver]: set pairwise key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4)
RTL8721D[Driver]: set group key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4) keyid:2
Interface 0 IP address : 192.168.1.167Attempting MQTT connection...
Connect to Server successfully!
connected
```

At the bottom of the window, there are controls: a checked 'Autoscroll' checkbox, an unchecked 'Show timestamp' checkbox, a 'Newline' dropdown menu, a '115200 baud' dropdown menu, and a 'Clear output' button.

After Ameba is connected to MQTT server, it sends the message “hello world” to “outTopic” .

To see the message, we need another MQTT client.


Here we use a chrome plugin “MQTTLens” to be the MQTT client. You can find it in google webstore.

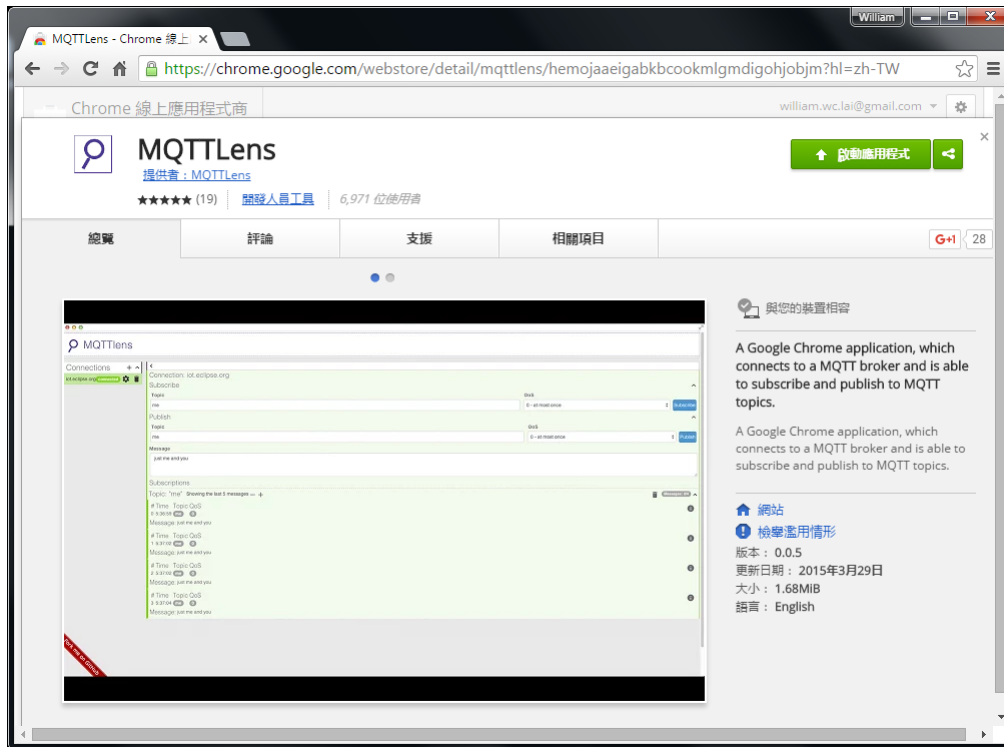

Install and open the MQTTLens, click “+” next to “Connection” on the left, and fill in the required information

- **Connection Name:** Used to identify the connection, you can choose a name you like.
- **Hostname:** The MQTT-Broker server, here we use “iot.eclipse.org”
- **Client ID:** We use the default randomly generated ID.


Then click “CREATE CONNECTION” .

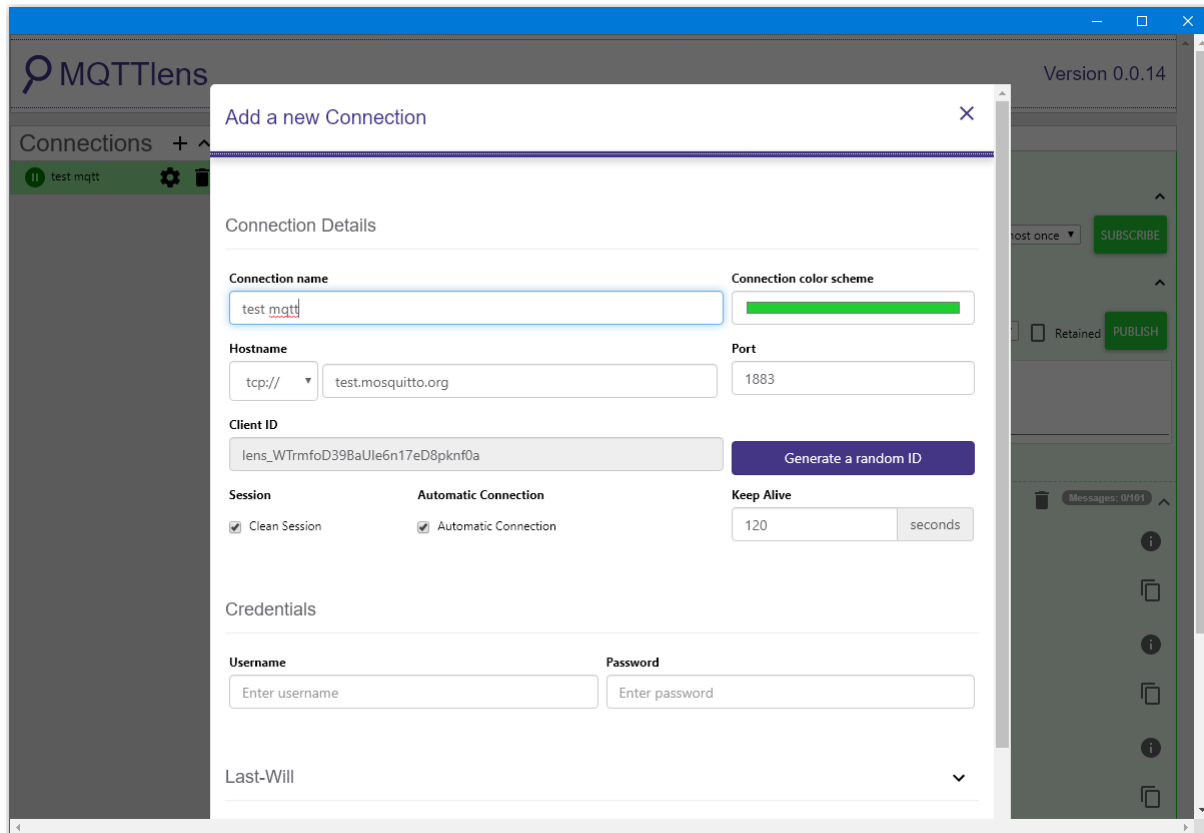

Since we have not registered the topic we want to listen to, we would not receive any messages now.

Fill in “outTopic” in the “Topic” field and click “Subscribe” .

Wait for Ameba to send next message (or you can press the reset button). Then you can see the “hello world” message show up.

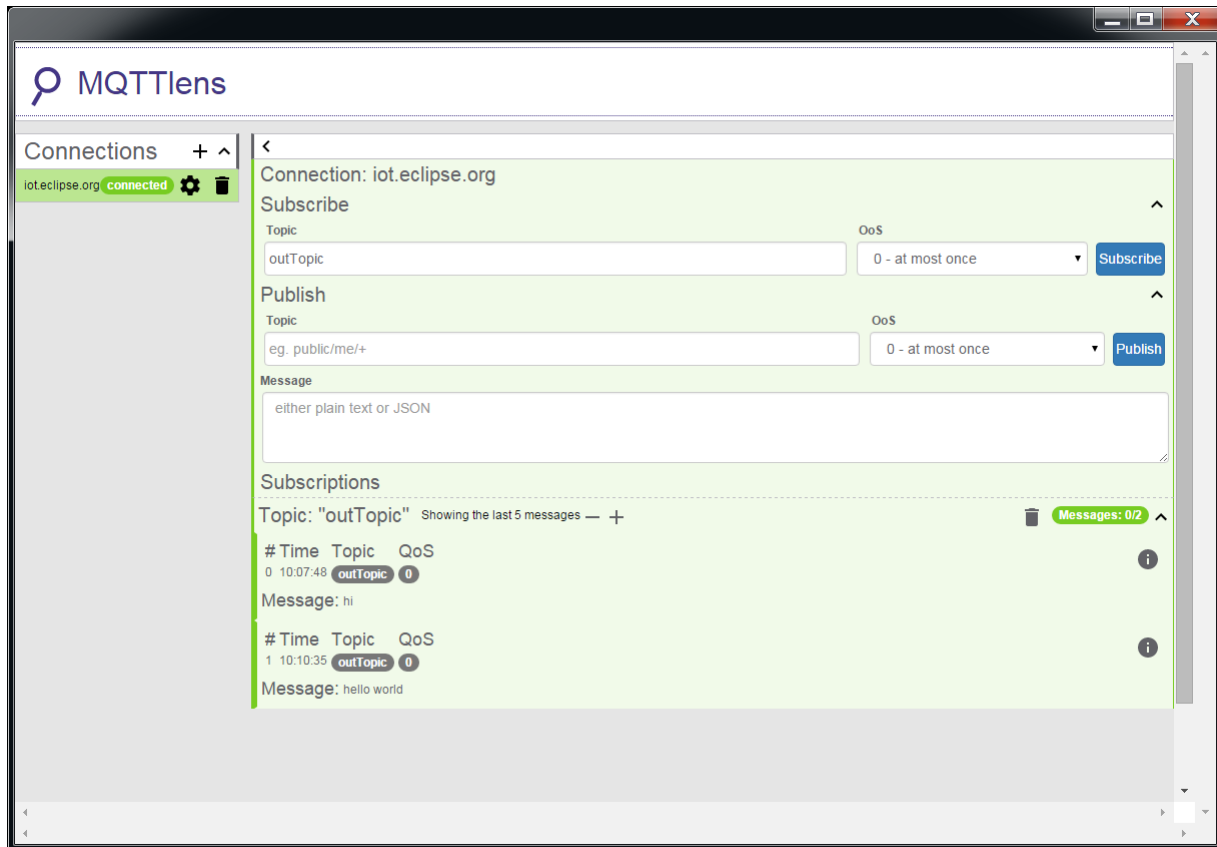

Use Amazon AWS IoT Shadow Service

Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1


Example

Introduction

Amazon AWS IoT is a cloud IoT service platform:

Amazon AWS IoT is a platform that enables you to connect devices to AWS Services and other devices, secure data and interactions, process and act upon device data, and enable applications to interact with devices even when they are offline. (<https://aws.amazon.com/iot/how-it-works/>)

The service architecture of AWS IoT:

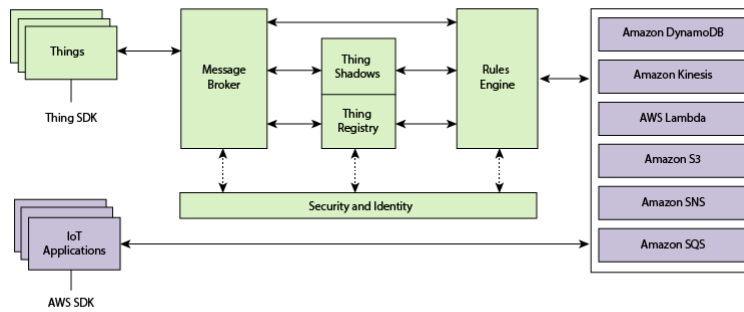

(Picture from <http://docs.aws.amazon.com/iot/latest/developerguide/aws-iot-how-it-works.html>)

In the architecture, Ameba belongs to the upper-left “Things” block. A TLS secure channel will be established between “Things” and the MQTT Message Broker. Afterwards, “Things” and “Message Broker” communicate using MQTT Protocol via this secure channel. Behind the “Message Broker”, the “Thing Shadows” keeps messages temporarily when Ameba is offline, and sends the control message to Ameba next time it is connected. The “Rules Engine” allows you to place restrictions to the behavior of Things or to connect Things to other services of Amazon.

AWS Management Console

First, create an account and sign up for AWS IoT [service:https://aws.amazon.com/](https://aws.amazon.com/)

Afterwards, log in to the Amazon Management Console and click “IoT Core” found under services -> Internet of Things.

Then you will enter the home page of AWS IoT. To offer the best service quality, Amazon offers servers in different regions for users to choose from.

Click the region dropdown menu at the upper-right:

Ameba Arduino: [RTL819] x AWS IoT x

Secure | <https://us-east-2.console.aws.amazon.com/iot/home?region=us-east-2#/home>

aws Services Resource Groups testteam Ohio Support

AWS IoT

AWS IoT is a managed cloud platform that lets connected devices - cars, light bulbs, sensor grids, and more - easily and securely interact with cloud applications and other devices.

[Get started](#)

Connect and manage your devices

Connect devices to the cloud using the protocol that best fits your requirements - HTTP, MQTT, or WebSocket. Devices can communicate with each other even if they are using different protocols.

[Learn more](#)

Process and act upon device data

Filter, transform, and act upon data from devices on the fly, based on business rules. AWS IoT can be easily integrated with AWS services like Amazon DynamoDB, Amazon Kinesis, Amazon Machine Learning, and AWS Lambda.

[Learn more](#)


Read and set device state at any time

AWS IoT stores the latest state of a device so that it can be read or set anytime, even when the device is offline.


[Learn more](#)

Feedback English (US) © 2008 - 2018, Amazon Web Services, Inc. or its affiliates. All rights reserved. Privacy Policy Terms of Use


Choose a nearby region.

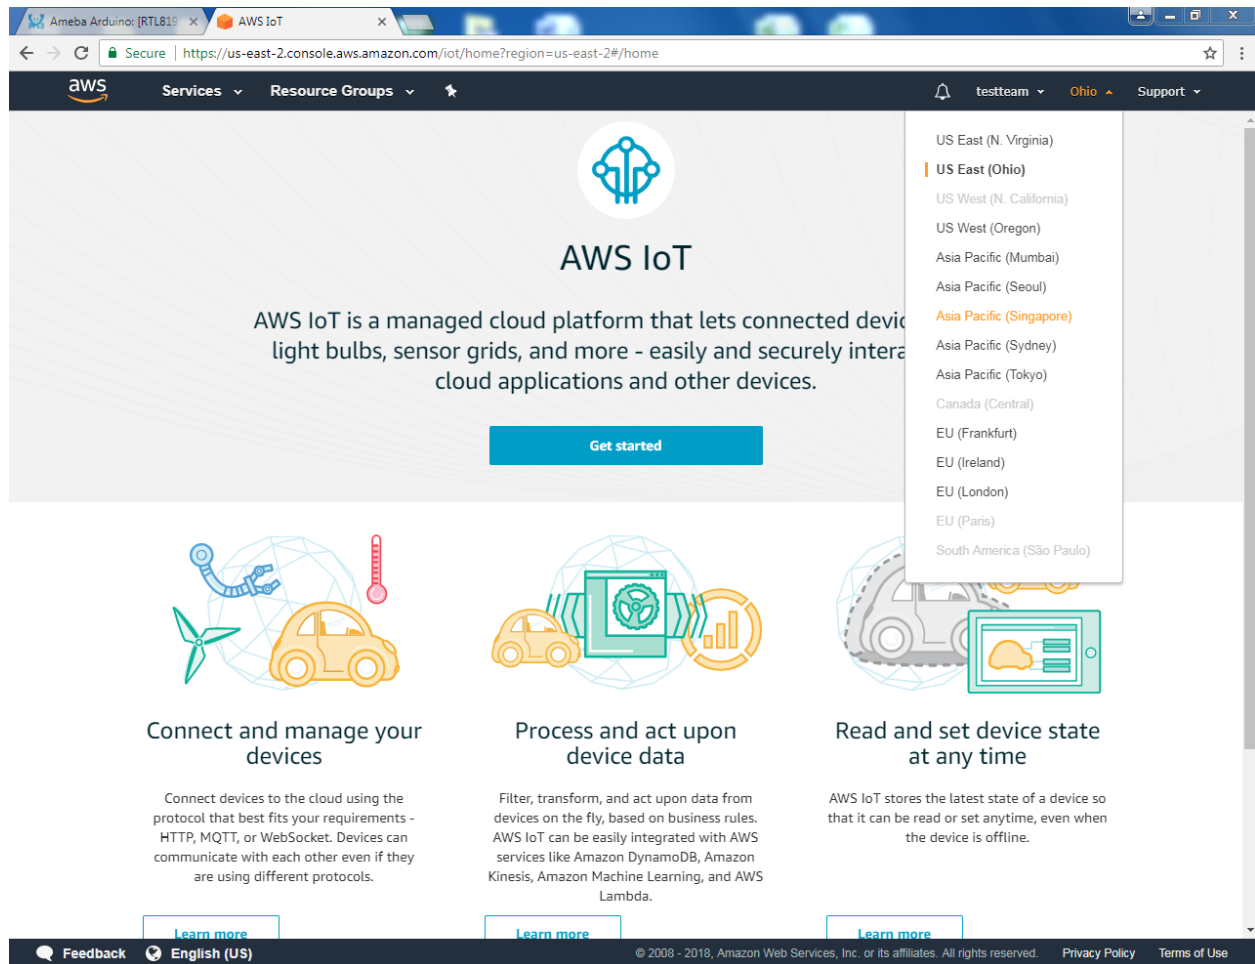

Then from Services, go to Onboard then Get Started.

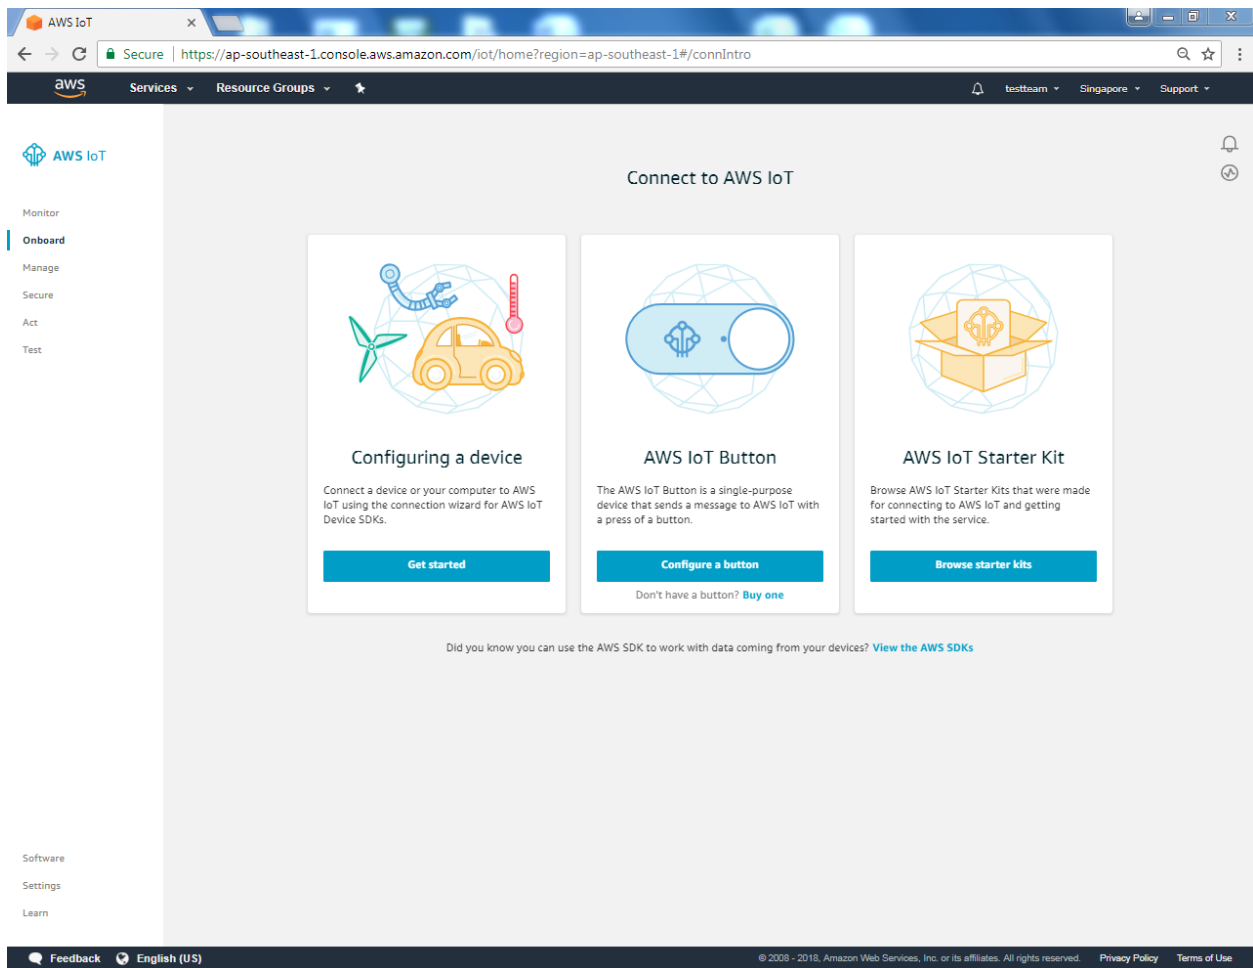

Enter the main page of AWS IoT. Under the Onboard a device, click Get started.

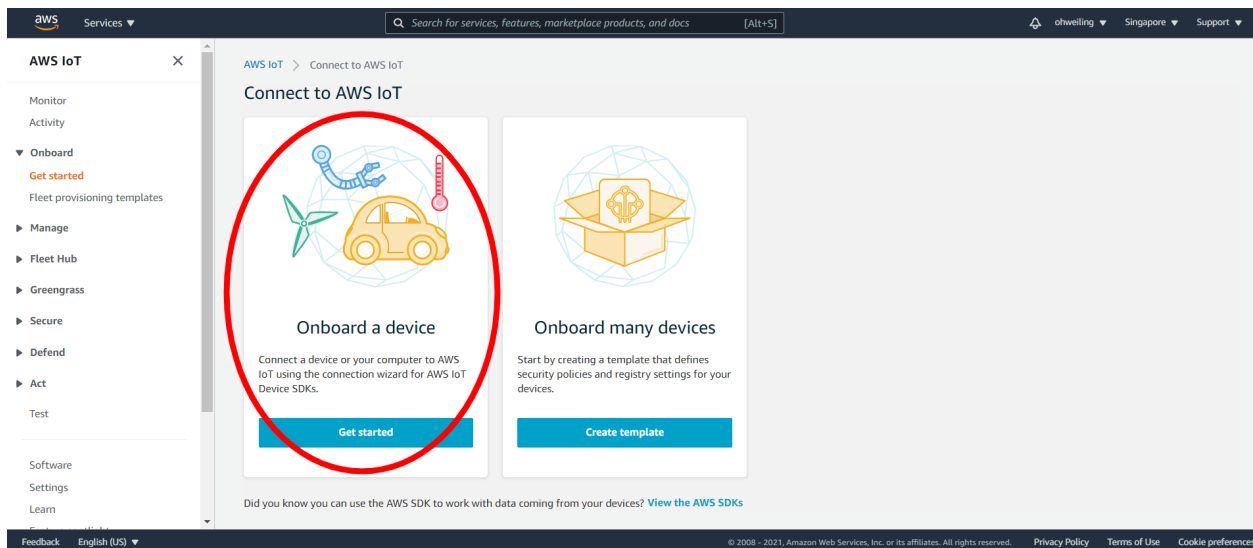

Click Create single thing

The screenshot shows the AWS IoT console interface. At the top, there's a navigation bar with the AWS logo, 'Services' dropdown, a search bar, and user information. Below the navigation bar, the breadcrumb trail reads 'AWS IoT > Manage > Things > Create things'. The main heading is 'Create things' with an 'Info' link. A descriptive paragraph explains that a thing resource is a digital representation of a physical device or logical entity in AWS IoT. Below this, a section titled 'Number of things to create' contains two radio button options: 'Create single thing' (selected) and 'Create many things'. The 'Create single thing' option has a sub-description: 'Create a thing resource to register a device. Provision the certificate and policy necessary to allow the device to connect to AWS IoT.' The 'Create many things' option has a sub-description: 'Create a task that creates multiple thing resources to register devices and provision the resources those devices require to connect to AWS IoT.' At the bottom of this section are 'Cancel' and 'Next' buttons. The footer contains 'Feedback', 'English (US)' dropdown, copyright information, and links to 'Privacy Policy', 'Terms of Use', and 'Cookie preferences'.

Fill in “ameba” on the name field. Attributes represent the status of Ameba.

The screenshot shows the 'Specify thing properties' page in the AWS IoT console. The breadcrumb trail is 'AWS IoT > Manage > Things > Create things > Create single thing'. On the left, a sidebar shows the progress: 'Step 1: Specify thing properties' (active), 'Step 2 - optional: Configure device certificate', and 'Step 3 - optional: Attach policies to certificate'. The main heading is 'Specify thing properties' with an 'Info' link. A descriptive paragraph explains that a thing resource is a digital representation of a physical device or logical entity in AWS IoT. Below this, a section titled 'Thing properties' contains a 'Thing name' field with the value 'ameba' entered. A note below the field states: 'Enter a unique name containing only: letters, numbers, hyphens, colons, or underscores. A thing name can't contain any spaces.' Below the 'Thing name' field is a section titled 'Additional configurations' with a note: 'You can use these configurations to add detail that can help you to organize, manage, and search your things.' This section contains four expandable options: 'Thing type - optional', 'Searchable thing attributes - optional', 'Thing groups - optional', and 'Billing group - optional'. The footer is identical to the previous screenshot.

Under the searchable thing attributes. The value of the attributes can be updated directly by Ameba or by the control side and control side can request Ameba to set the attribute to desired value.

Here we add an attribute named “led” with value “0” and click “Next” .

A thing resource is a digital representation of a physical device or logical entity in AWS IoT. Your device or entity needs a thing resource in the registry to use AWS IoT features such as Device Shadows, events, jobs, and device management features.

Thing properties [Info](#)

Thing name

ameba

Enter a unique name containing only: letters, numbers, hyphens, colons, or underscores. A thing name can't contain any spaces.

Additional configurations

You can use these configurations to add detail that can help you to organize, manage, and search your things.

▶ **Thing type - optional**

▼ **Searchable thing attributes - optional**

Add searchable attributes to allow your thing to be grouped and searched without using fleet indexing.

Searchable attribute	Value - optional	
led	0	Remove

[Add new attribute](#)

You can add up to 2 more attributes.

▶ **Thing groups - optional**

▶ **Billing group - optional**

Click Skip creating a certificate at this time and then Create thing

Configure device certificate - *optional* [Info](#)

A device requires a certificate to connect to AWS IoT. You can choose how you to register a certificate for your device now, or you can create and register a certificate for your device later. Your device won't be able to connect to AWS IoT until it has an active certificate with an appropriate policy.

Device certificate

☐ Auto-generate a new certificate (recommended)
Generate a certificate, public key, and private key using AWS IoT's certificate authority.

☐ Use my certificate
Use a certificate signed by your own certificate authority.

☐ Upload CSR
Register your CA and use your own certificates on one or many devices.


☒ Skip creating a certificate at this time
You can create a certificate for this thing and attach a policy to the certificate at a later time.

[Cancel](#) [Previous](#) [Create thing](#)


Next, click Policy, and create a policy. Policy is used to restrict the functions that a “thing” can do, it can limit the MQTT actions or specific topic that can be performed. Learn more about policy:

<http://docs.aws.amazon.com/iot/latest/developerguide/authorization.html>


Here we do not place policy on Ameba. Fill in “amebaPolicy” in the Name field, “iot:” in Action field and “*” in resources field. Then “Allow”. Finally, click “Create”.

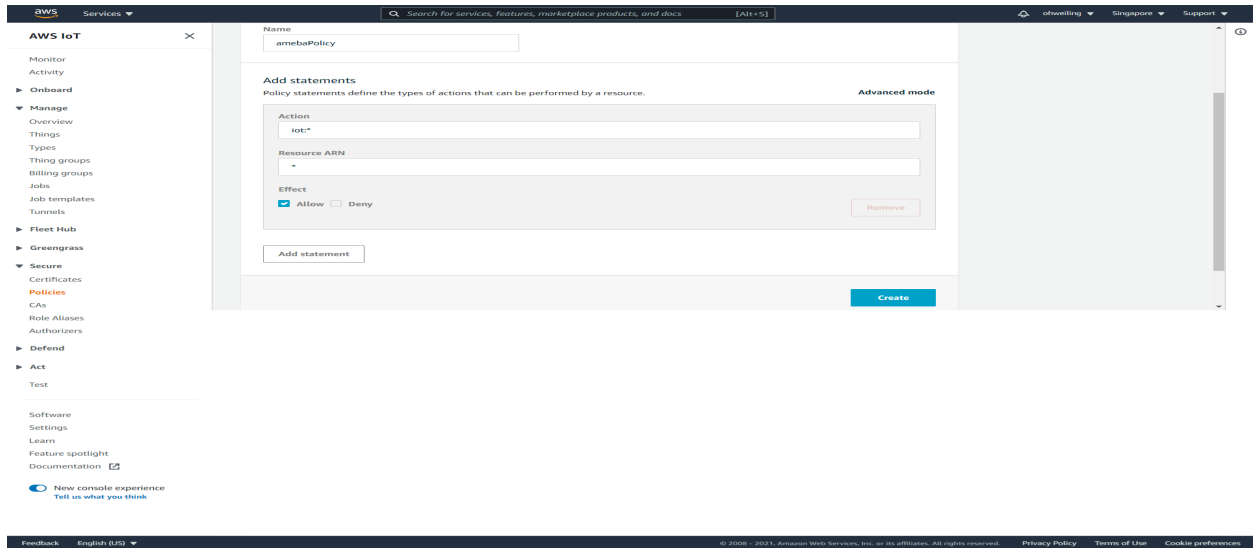


Next, we have to setup the TLS certificate. You can choose to user-defined or generate a certificate by AWS IoT. In this example we click Create Certificate to generate a TLS certificate.

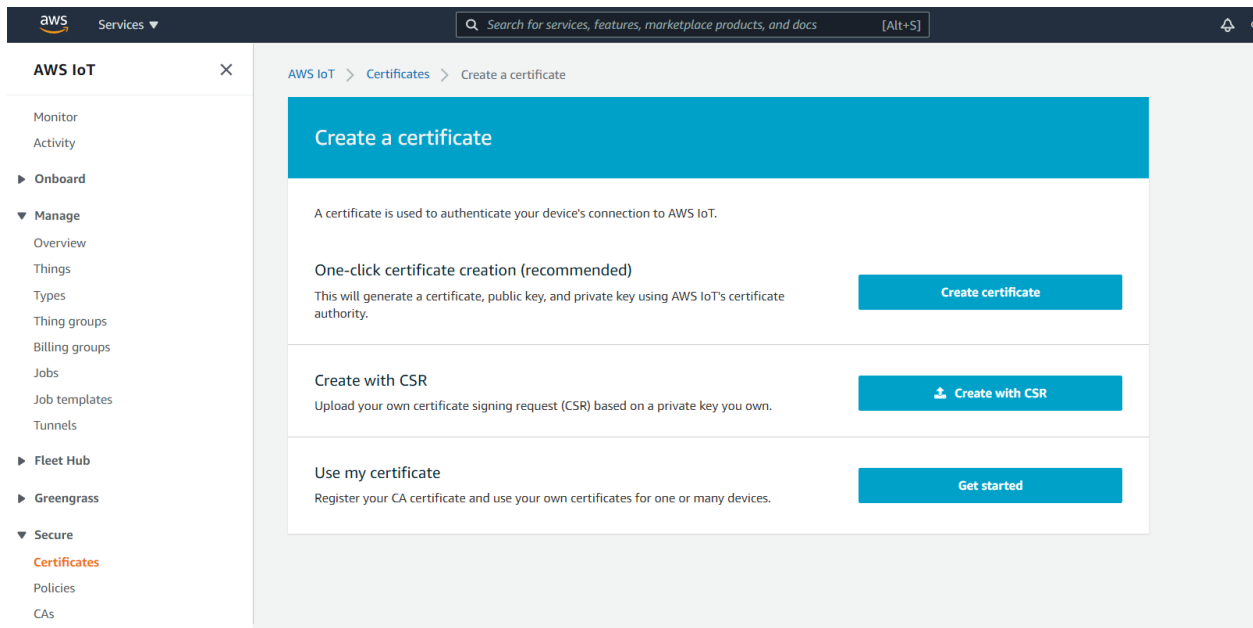


You can see 4 Links. Please download each of the link, “public key” , “private key” , “Certificate” and “rootCA” . After downloading the 4 files, click Done and go back to the certificate main page.

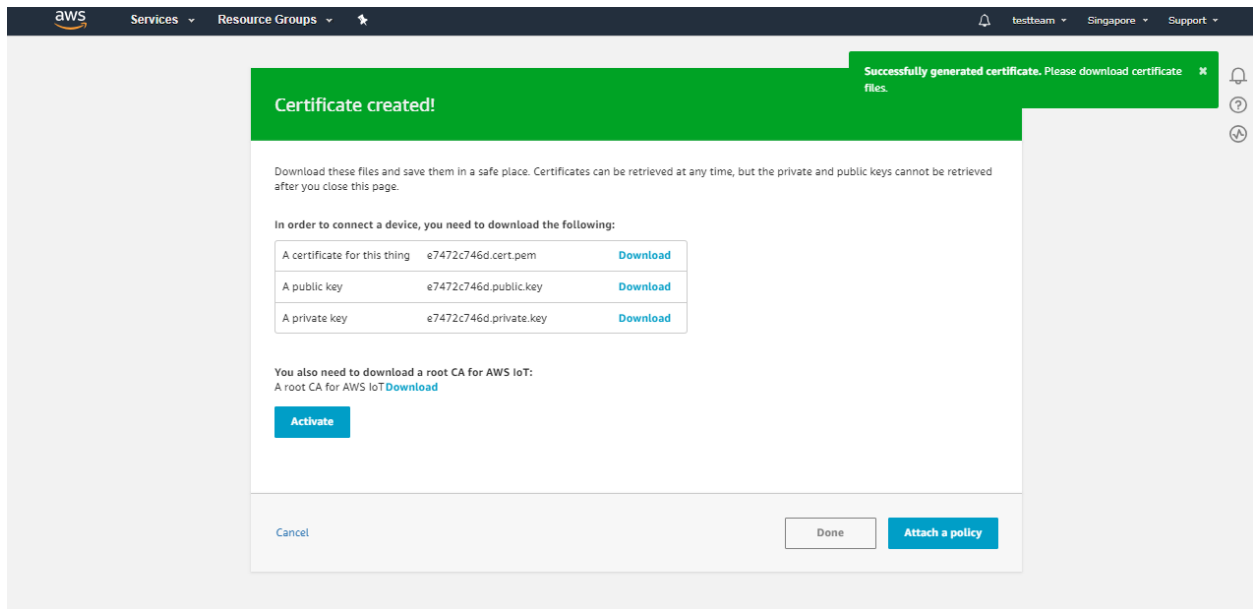


Click Attach a policy in the Actions dropdown menu.

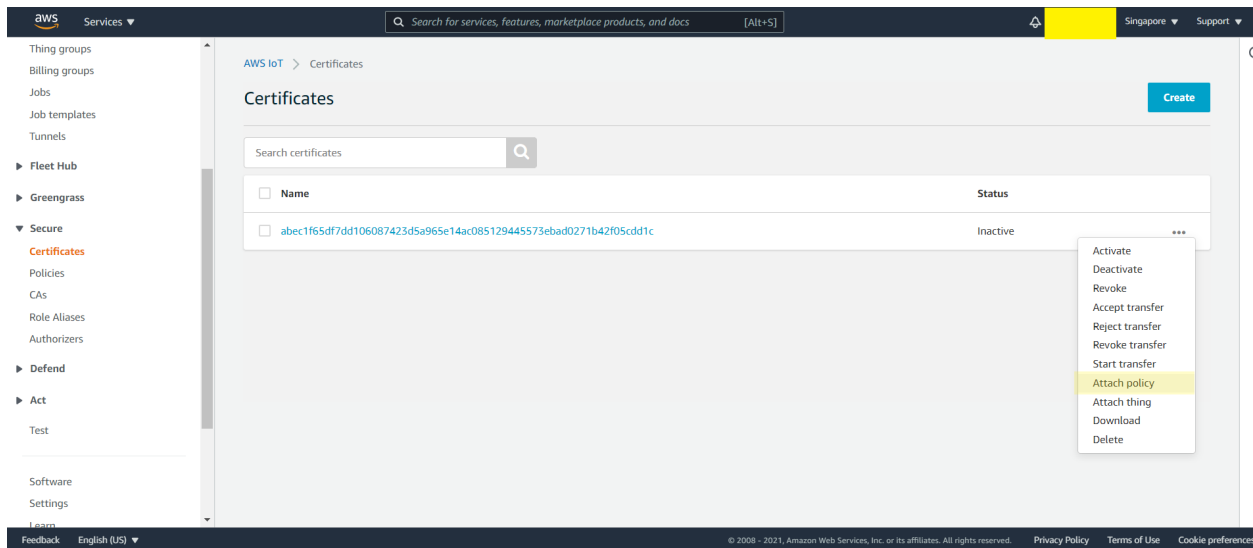


Choose amebaPolicy and click attach.

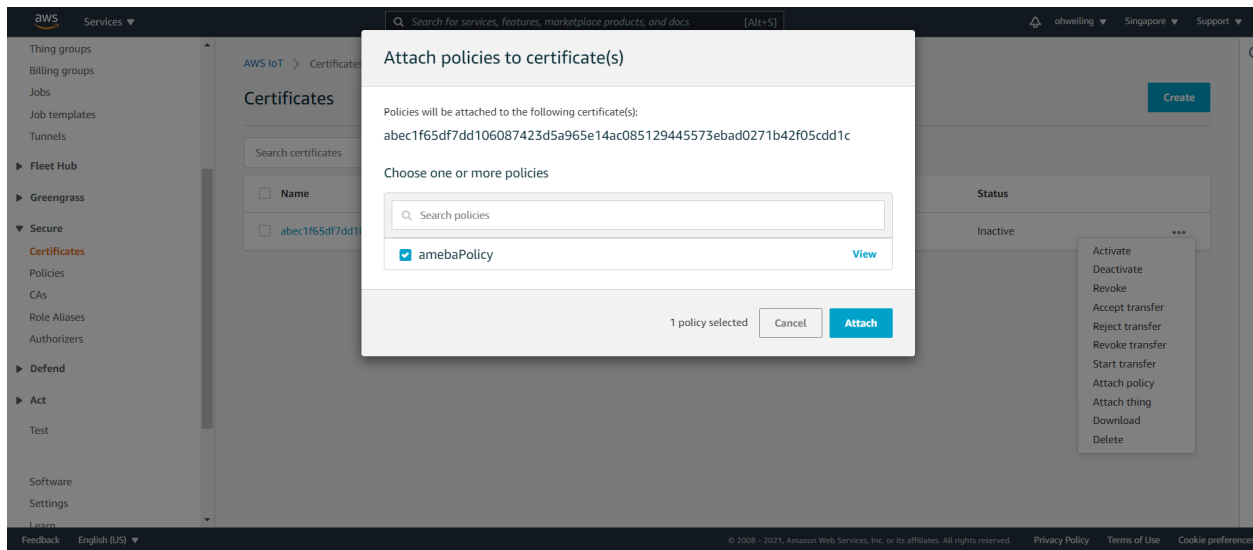

Then go back to the “Actions” drop-down menu at the top right of the certificates homepage, click on “Attach thing”, select the thing “ameba” you just created when the window below appears, then click on “Attach”

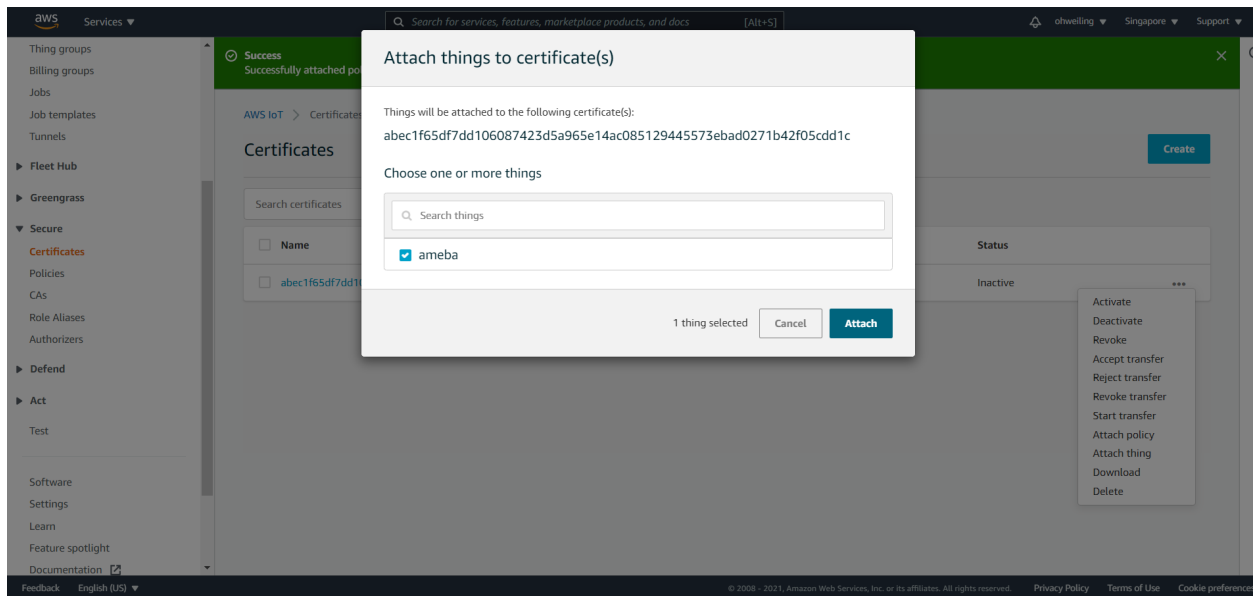


Go back to certificate main page and click Certificate and click Activate in the Actions drop down menu.

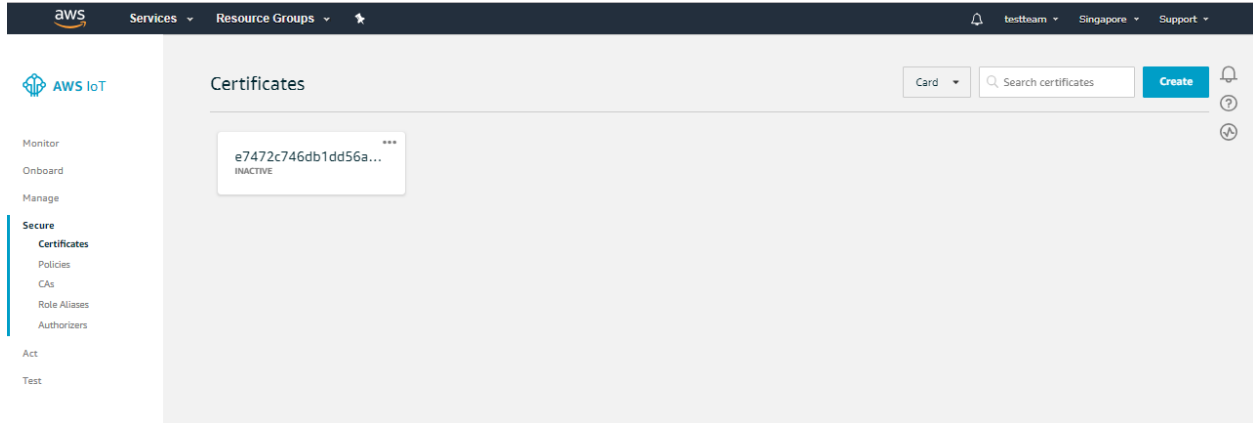

Next, click Manage, and click Things, then click “ameba” the thing we created just now.

Click on Interact and View settings.

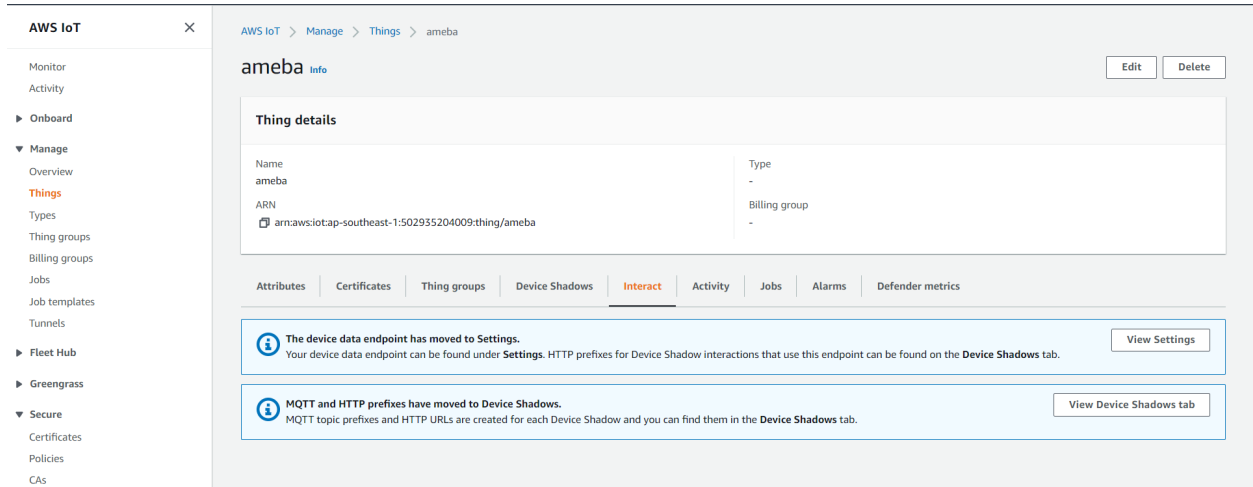


Find out the information of Rest API Endpoint to set Amazon Alexa:

- REST API endpoint: In the value “<https://a1a7004baosgyy.iot.us-east-1.amazonaws.com/things/ameba/shadow>”, the part “a1a7004baosgyy.iot.us-east-1.amazonaws.com” is the MQTT Broker server address.
- MQTT topic: The value “\$aws/things/ameba/shadow/update” represents the MQTT topic we will use in the AWS IoT Shadow service (if we use MQTT only, without AWS IoT Shadow service, then we can specify other topic name). It is recommended to use “\$aws/things/ameba/shadow/update” here.

Ameba setting


Open “File” -> “Examples” -> “AmebaMQTTClient” -> “Amazon_AWS_IoT_Basic”

In the sample code, modify the highlighted snippet to reflect your WiFi network settings.

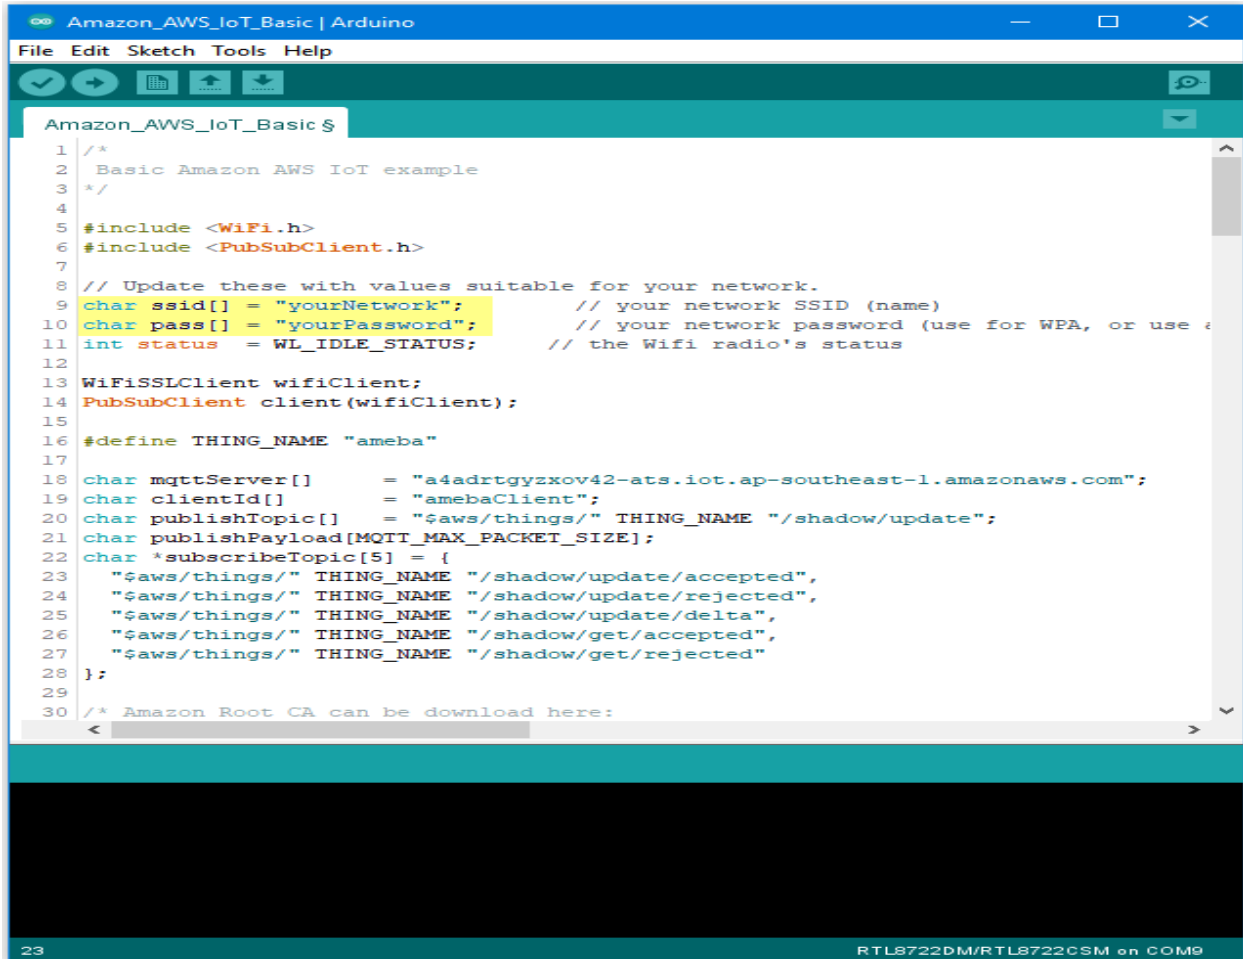

```
1  /*
2   Basic Amazon AWS IoT example
3  */
4
5  #include <WiFi.h>
6  #include <PubSubClient.h>
7
8  // Update these with values suitable for your network.
9  char ssid[] = "yourNetwork"; // your network SSID (name)
10 char pass[] = "yourPassword"; // your network password (use for WPA, or use e
11 int status = WL_IDLE_STATUS; // the Wifi radio's status
12
13 WiFiSSLClient wifiClient;
14 PubSubClient client(wifiClient);
15
16 #define THING_NAME "ameba"
17
18 char mqttServer[] = "a4adrtgyzxov42-ats.iot.ap-southeast-1.amazonaws.com";
19 char clientId[] = "amebaClient";
20 char publishTopic[] = "$aws/things/" THING_NAME "/shadow/update";
21 char publishPayload[MQTT_MAX_PACKET_SIZE];
22 char *subscribeTopic[5] = {
23   "$aws/things/" THING_NAME "/shadow/update/accepted",
24   "$aws/things/" THING_NAME "/shadow/update/rejected",
25   "$aws/things/" THING_NAME "/shadow/update/delta",
26   "$aws/things/" THING_NAME "/shadow/get/accepted",
27   "$aws/things/" THING_NAME "/shadow/get/rejected"
28 };
29
30 /* Amazon Root CA can be download here:
```

Then fill in the “thing” name “ameba” .

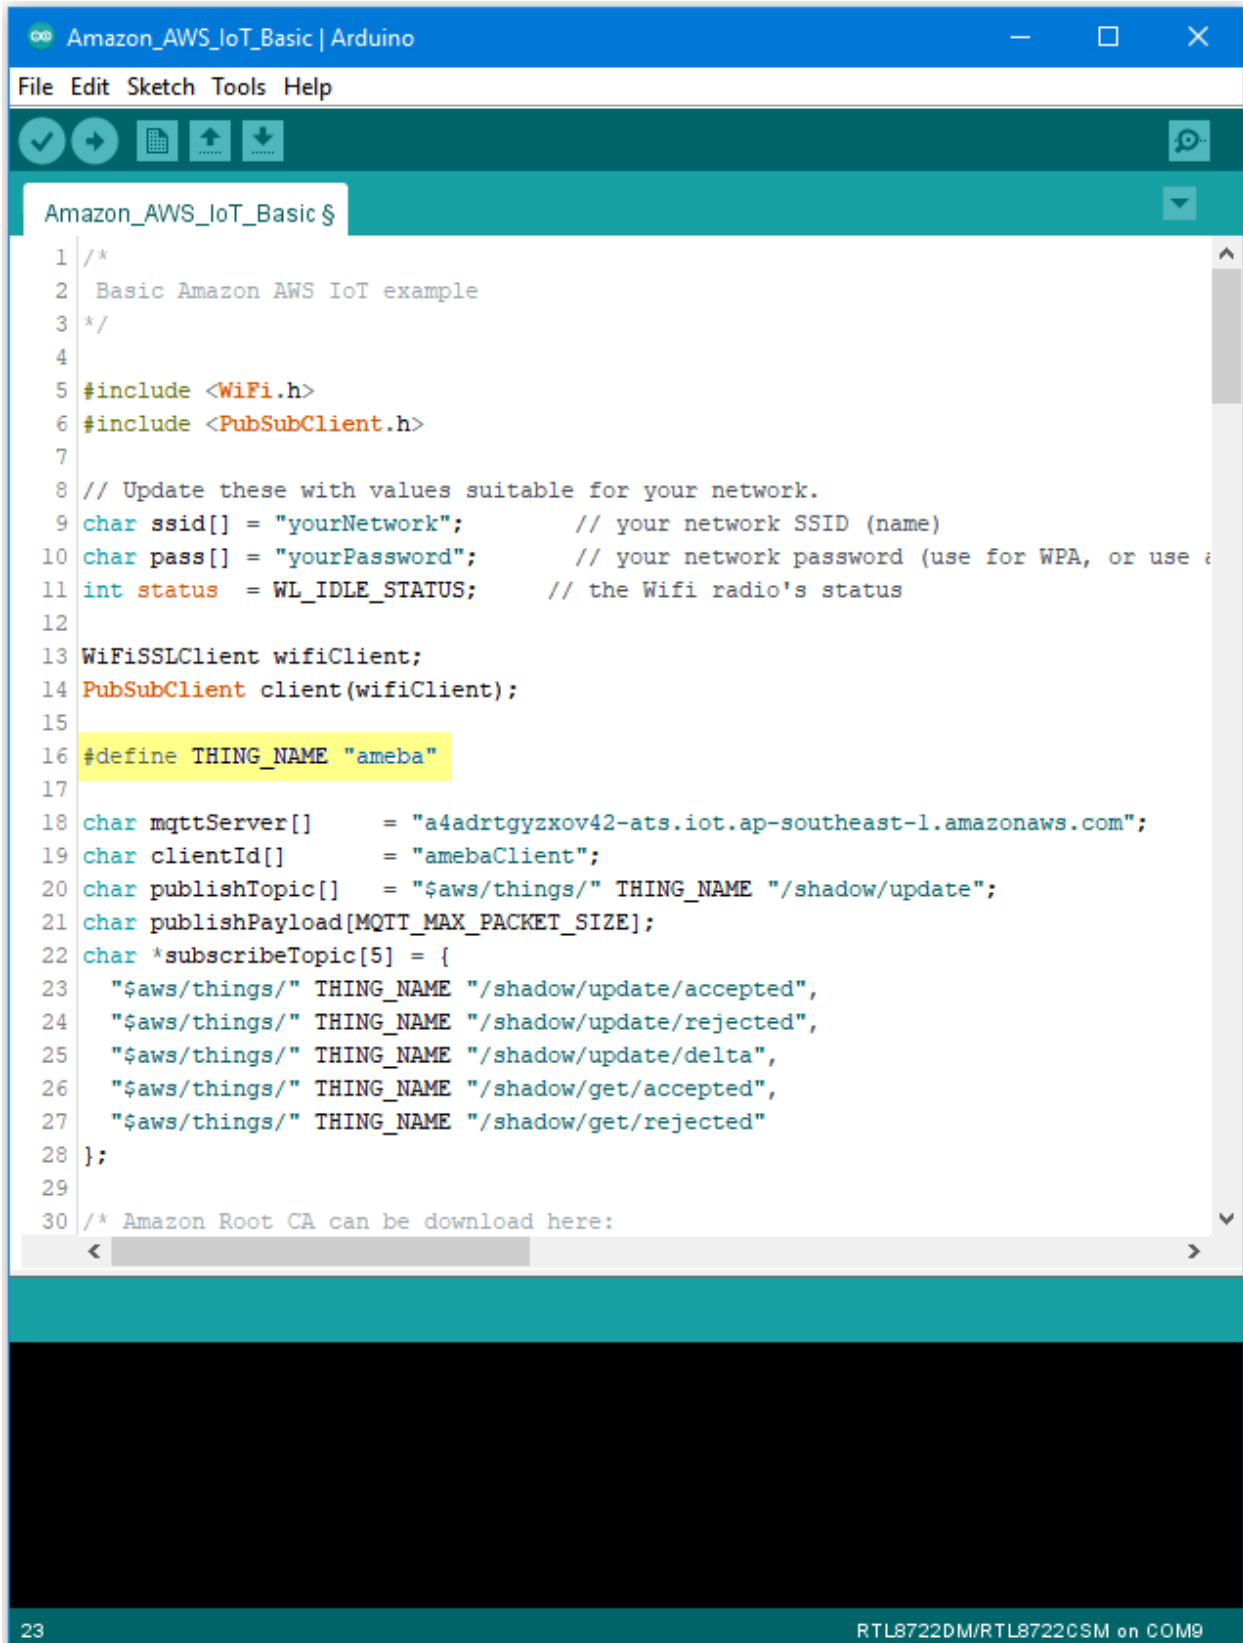

```

1  /*
2   Basic Amazon AWS IoT example
3  */
4
5  #include <WiFi.h>
6  #include <PubSubClient.h>
7
8  // Update these with values suitable for your network.
9  char ssid[] = "yourNetwork";      // your network SSID (name)
10 char pass[] = "yourPassword";     // your network password (use for WPA, or use a
11 int status = WL_IDLE_STATUS;      // the Wifi radio's status
12
13 WiFiSSLClient wifiClient;
14 PubSubClient client(wifiClient);
15
16 #define THING_NAME "ameba"
17
18 char mqttServer[] = "a4adrtgyzxov42-ats.iot.ap-southeast-1.amazonaws.com";
19 char clientId[] = "amebaClient";
20 char publishTopic[] = "$aws/things/" THING_NAME "/shadow/update";
21 char publishPayload[MQTT_MAX_PACKET_SIZE];
22 char *subscribeTopic[5] = {
23   "$aws/things/" THING_NAME "/shadow/update/accepted",
24   "$aws/things/" THING_NAME "/shadow/update/rejected",
25   "$aws/things/" THING_NAME "/shadow/update/delta",
26   "$aws/things/" THING_NAME "/shadow/get/accepted",
27   "$aws/things/" THING_NAME "/shadow/get/rejected"
28 };
29
30 /* Amazon Root CA can be download here:

```

23

RTL8722DM/RTL8722CSM on COM9

And the MQTT Broker server address we found earlier in AWS IoT.

```

1  /*
2   Basic Amazon AWS IoT example
3  */
4
5  #include <WiFi.h>
6  #include <PubSubClient.h>
7
8  // Update these with values suitable for your network.
9  char ssid[] = "yourNetwork";      // your network SSID (name)
10 char pass[] = "yourPassword";     // your network password (use for WPA, or use a
11 int status  = WL_IDLE_STATUS;     // the Wifi radio's status
12
13 WiFiSSLClient wifiClient;
14 PubSubClient client(wifiClient);
15
16 #define THING_NAME "ameba"
17
18 char mqttServer[] = "a4adrtgyzxov42-ats.iot.ap-southeast-1.amazonaws.com";
19 char clientId[] = "amebaClient";
20 char publishTopic[] = "$aws/things/" THING_NAME "/shadow/update";
21 char publishPayload[MQTT_MAX_PACKET_SIZE];
22 char *subscribeTopic[5] = {
23   "$aws/things/" THING_NAME "/shadow/update/accepted",
24   "$aws/things/" THING_NAME "/shadow/update/rejected",
25   "$aws/things/" THING_NAME "/shadow/update/delta",
26   "$aws/things/" THING_NAME "/shadow/get/accepted",
27   "$aws/things/" THING_NAME "/shadow/get/rejected"
28 };
29
30 /* Amazon Root CA can be download here:

```

23

RTL8722DM/RTL8722C5M on COM9

Next, fill in the root CA used in TLS. Download and make sure the downloaded root CA contents conforms to the root CA used in the sketch.

```
Amazon_AWS_IoT_Basic | Arduino
File Edit Sketch Tools Help

Amazon_AWS_IoT_Basic $
26 "$aws/things/" THING_NAME "/shadow/get/accepted",
27 "$aws/things/" THING_NAME "/shadow/get/rejected"
28 };
29
30 /* Amazon Root CA can be download here:
31 * https://docs.aws.amazon.com/iot/latest/developerguide/server-authentication.htm
32 */
33 char* rootCABuff = \
34 // Amazon Root CA 1 RSA 2048
35 "-----BEGIN CERTIFICATE-----\n" \
36 "MIIDQTCCAimgAwIBAgITBmyfz5m/jAo54vB4ikPmljZbyjANBgkqhkiG9w0BAQFf\n" \
37 "ADA5MQswCQYDVQQGEwJVUzEPMA0GA1UEChMGQWlhbm9uMRkwFwYDVQQDExBBBW\n" \
38 "b24gUm9vdCBDQSAxMB4XDTE1MDUyNjAwMDAwMFoXDTM4MDExNzAwMDAwMFow\n" \
39 "OTEL\n" \
40 "MAkGA1UEBhMCVVMxZDANBgNVBAoTBkFtYXpjb2ZBcGAlUEAxMQQWlhbm9u\n" \
41 "IFJv\n" \
42 "b3QgQ0EgMTCCASIwDQYJKoZIhvcNAQEBBQADggEPADCCAQoCggEBALJ4gHHK\n" \
43 "eNXj\n" \
44 "ca9HgFB0fW7Y14h29Jl09lghYPl0hAEvrAlhtOgQ3pOsQTONroBvo3bSMgH\n" \
45 "FzZM\n" \
46 "906II8c+6zfltRn4SWiw3te5djgdYZ6k/oI2peVKVuRF4fn9tBb6dNqcmzU5L\n" \
47 "qw\n" \
48 "IFAGbHrQgLKm+a/sRxmPUDgH3KKHOVj4utWp+UhnMJbulHheb4mjUcAwhmahR\n" \
49 "Wa6\n" \
50 "VOujw5H5SNz/0egwLX0tdHAL14gk957EWW67c4cX8jJGKLhD+rcdqsq08p8kD\n" \
51 "ilL\n" \
52 "93FcXmn/6pUCyziKrlA4b9v7LWIbxcceVOF34GfID5yHI9Y/QCB/IIDeGEw+OyQm\n" \
53 "n\n" \
54 "jgSubJrIqq0CAwEAAaNCMEAwDwYDVROTAQH/BAUwAwEB/zAOBgNVHQ8BAf8EBAMC\n" \
55 "n\n" \
56 "AYYwHQYDVRO0BBYEFIQYzIU07LwMlJQuCFmcx7IQTgoIMA0GCSqGSIb3DQEBCwUA\n" \
57 "n\n" \
58 "A4IBAQC8jdaQZChGsV2USggNiMOruYou6r4lK5IpDB/G/wkjUu0yKGX9rbxenDI\n" \
59 "n\n" \
60 "U5PMCCjjmCXPI6T53iHTfIUJRu6adTrCC2qJeH2ERxhlbIlBjtt/msv0tadQ1wUs\n" \
61 "n\n" \
62 "N+gDS63pYaACbvXy8MWy7Vu33PqUXHeeE6V/Uq2V8viTO96LXFvKWlJbYK8U90vv\n" \
63 "n\n" \
64 "o/ufQJVtMVT8QtPHRh8jrdkPSHCa2XV4cdFyQzRlbdZwgJcJmApzyMZFo6IQ6XU\n" \
65 "n\n" \
66 "5MsI+yMRQ+hDKXJioaldXgjUkK642M4UwtBV8ob2xJNDd2ZhwLnoQdeXeGADbkpy\n" \
67 "n\n" \
68 "rqXRfboQnoZsG4q5WTP468SQvvG5\n" \
69 "n\n" \
70 "-----END CERTIFICATE-----\n";
71
```

Next, fill in the certificate we created in the AWS IoT Console (i.e., client certificate), usually its file name ends with “-certificate.pem.crt” (e.g., “efae24a533-certificate.pem.crt”). Open the certificate with a text editor, and adjust its format as follows to use in the sketch:

- Add the new line character “\n” at the end of each line.
- Add double-quote at the beginning and the end of each line.
- To concatenate each line as a string, add “” at the end of each line.
- The last line ends with semicolon.

Adjust the format of the private key in the same way and add it to privateKeyBuff.

```

56 /* Fill in YOUR certificate.pem.crt with LINE ENDINGS */
57 char* certificateBuff = \
58 "-----BEGIN CERTIFICATE-----\n" \
59 "MIIDWjCCAKKgAwIBAgIVAPsRFvnxpgcxvXwyMKczt/eeebcAMA0GCSqGSIb3DQEBA\n" \
60 "CwUAME0xSzBjBgNVBAsMQkFtYXpvbiBXZWlgaU2VydmljZXMGtZlBbWF6b24uY29t\n" \
61 "IEluYy4gTD1TZWF0dGx1IFNUPVdhc2hpbmd0b24gQz1VUzAeFw0yMDA3MDYwNjUy\n" \
62 "MzZaFw000TEyMzEyMzU5NTlaMB4xHDAaBgNVBAMME0FXUyBjblQgQ2VydGhmaWNh\n" \
63 "dGUwgGElMA0GCSqGSIb3DQEBAQUAA4IBDwAwggEKAoIBAQDKcYAWmFZwzGadgTlP\n" \
64 "4LK4uCs9vx9iHisnXl8pClDeBXxKt0QB2InvTtXGahjmUSLqnOBthabAxNTu+mo3\n" \
65 "N96KpQlmedBldkFfJtMG+2bQaFzjOEge0k3qFNqQdaM8JQkg+dv2VkhFoXVxr\n" \
66 "WKcwWcqWjexmb9hVFYKm8AlaNHyh+yHsv5J0xg9KP/2ThWqVG89kx/ssei+kw\n" \
67 "9pK7ghGpldszMKvSlwdTHcQJj1b3UC+22soJj1CICBqmOxMVBbQT575KNKFi+U\n" \
68 "yneF3oIYgwnDotX5kxHq3Cw0cUteaYmzYKITIUYBxXq5B2CRZJsrNG46FK492\n" \
69 "3TR/AgMBAAGjYDBeMB8GA1UdIwQYMBaAFFJEaISt+QJLn05x8h7kXmC5WaQpMB\n" \
70 "AlUdDgQWBBTQuDC06walAD36MRM0Cz9TtRCPlzAMBgNVHRMBAf8EAjAAMA4GA1\n" \
71 "UdEB/wQEAwIHgDANBgkqhkiG9w0BAQsFAAOCAQEAFIzoSivJZyay6ltW0tMkqs4\n" \
72 "EXg3eXIhohXfkkxqKJNN4nUrp7hMYfII/HPf/6+JL9/ltvEth6QjvW9xfXFptiv\n" \
73 "KvgIMyjqzILVpi5hUxM9ewdQJFK0b+v1X/VtkXHvgXYAHTceDOVC39blz/W7mj\n" \
74 "wDKB69E8Hhp4/8YP0Bs+GOvAM8pnxJrVoNnCHpjerDFDSjmNoq33iaNtPws8FC\n" \
75 "Dd65aHrDlcyRSYp+lC2Ovg0w2v2ECWWLuZDZOPPuyRcdcrAbLiAJYLakjE9G/n\n" \
76 "NbQjhqs3h0r43SWbU0zunJbJfpbWEBMDEB2gke2adCyD+lFauwTyQDb+nXrSHA\n" \
77 "-----END CERTIFICATE-----\n";
78
79 /* Fill in YOUR private.pem.key with LINE ENDINGS */
80 char* privateKeyBuff = \
81 "-----BEGIN RSA PRIVATE KEY-----\n" \
82 "MIIEowIBAAKCAQEAynGAFphWcMxmnyE9T+CyuLgrPb8fYh4rJl5fKQtQ3gV8SrdE\n" \
83 "AdiJ707VxmoY51Ei6pzgbYWmwMTU7vpqNzfeiqUNZhHQ2XZBXybTBvtm0Ghc4zh\n" \
84 "ntJN6hTakHWjPCUJIPnb9lZIRaFlca58BlinMFnKlo3sZm/YVRWCpvAJWjR8ofsh\n" \
85 "7L+SdMYPSj/9k4VqlRvPZMf7LHovpMDYQ/aSu4IRqdXbMzJL0tcHUx3ECY9W91Av\n"

```


23

RTL8722DM/RTL8722CSM on COM9

Compile and run

Upload the code and press the reset button on Ameba once the upload is finished.

Open the serial monitor in the Arduino IDE and observe as Ameba connects to the AWS IoT server and sends updates on the LED state variable.

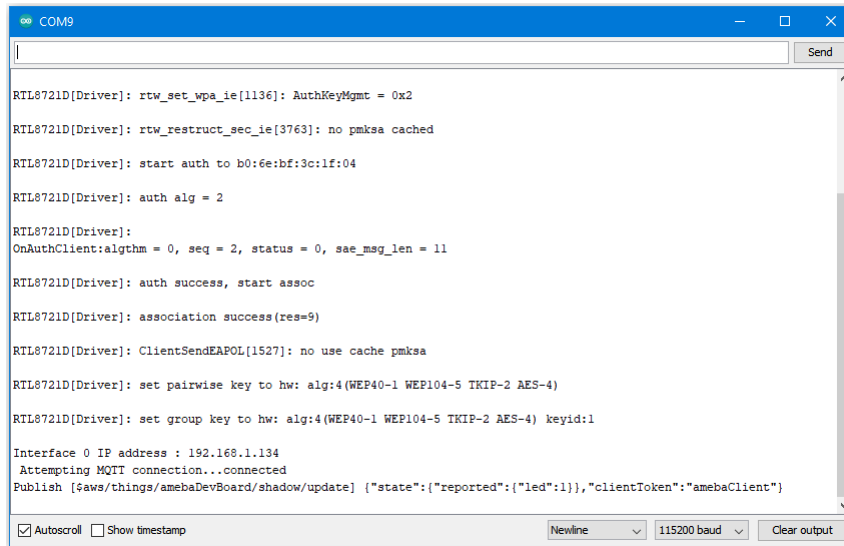

```

COM9

RTLS721D[Driver]: rtw_set_wpa_ie[1136]: AuthKeyMgmt = 0x2
RTLS721D[Driver]: rtw_restruct_sec_ie[3763]: no pmksa cached
RTLS721D[Driver]: start auth to b0:6e:bf:3c:1f:04
RTLS721D[Driver]: auth alg = 2
RTLS721D[Driver]:
OnAuthClient:algthm = 0, seq = 2, status = 0, sae_msg_len = 11
RTLS721D[Driver]: auth success, start assoc
RTLS721D[Driver]: association success(res=9)
RTLS721D[Driver]: ClientSendEAPOL[1527]: no use cache pmksa
RTLS721D[Driver]: set pairwise key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4)
RTLS721D[Driver]: set group key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4) keyid:1
Interface 0 IP address : 192.168.1.134
Attempting MQTT connection...connected
Publish [aws/things/amebaDevBoard/shadow/update] {"state":{"reported":{"led":1},"clientToken":"amebaClient"}
Autoscroll Show timestamp Newline 115200 baud Clear output
  
```

Alternatives

Ameba can also retrieve the current LED status variable from the AWS shadow. This is done by sending a message to the “shadow/get” topic. Refer to the Amazon_AWS_IoT_with_ACK example code for more information.

Code Reference

Change led state:

In this example, we use GPIO interface to control the led. We set led_pin to 10 and led_state to 1 by default in the sample code.

```
pinMode(led_pin, OUTPUT);
digitalWrite(led_pin, led_state);
```

Set up certificate:

Note that we use the WiFiSSLClient type of wifiClient.

```
WiFiSSLClient wifiClient;
```

WiFiSSLClient inherits Client, so it can be passed as the parameter of PubSubClient constructor.

Next, set up TLS certificate required in connection.

```
wifiClient.setRootCA((unsigned char*)rootCABuff);  
wifiClient.setClientCertificate((unsigned char*)certificateBuff, (unsigned_  
↳char*)privateKeyBuff);
```

Configure MQTT Broker server

Then MQTT PubClient set MQTT Broker server to connect

```
client.setServer(mqttServer, 8883);  
client.setCallback(callback);
```

Connect to MQTT Broker server:

In loop(), call reconnect() function and try to connect to MQTT Broker server and do the certificate verification.

```
while (!client.connected()) {
```

Subscribe & Publish

Next, subscribe to topics.

```
for (int i=0; i<5; i++) {  
    client.subscribe(subscribeTopic[i]);  
}
```

There are some common topics:

“\$aws/things/ameba/shadow/update/accepted” ,

“\$aws/things/ameba/shadow/update/rejected” ,

“\$aws/things/ameba/shadow/update/delta” ,
 “\$aws/things/ameba/shadow/get/accepted” ,
 “\$aws/things/ameba/shadow/get/rejected”

Related documentation:

<http://docs.aws.amazon.com/iot/latest/developerguide/thing-shadow-data-flow.html>

Then publish current status::

```
sprintf(publishPayload,
  "{\"state\":{\"reported\":{\"led\":%d}},\"clientToken\":\"%s\"}\",
  led_state, clientId);
```

```
client.publish(publishTopic, publishPayload);
```

Listen to topic and make response:

In the callback function, we listen to the 5 subscribed topics and check if there are messages of “/shadow/get/accepted” :

```
if (strstr(topic, "/shadow/get/accepted") != NULL) {
```

If there is, the message is from the control side. If the attribute state in the message is different from current state, publish the new state.

```
updateLedState(desired_led_state);
```

Use MQTT over TLS


Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1

Example

In this example, we connect Ameba to a MQTT broker using TLS authentication. Then send messages as a publisher

and receive messages from as a subscriber. Open the MQTT example “File” -> “Examples” -> “AmebaMQTTClient” -> “MQTT_TLS”

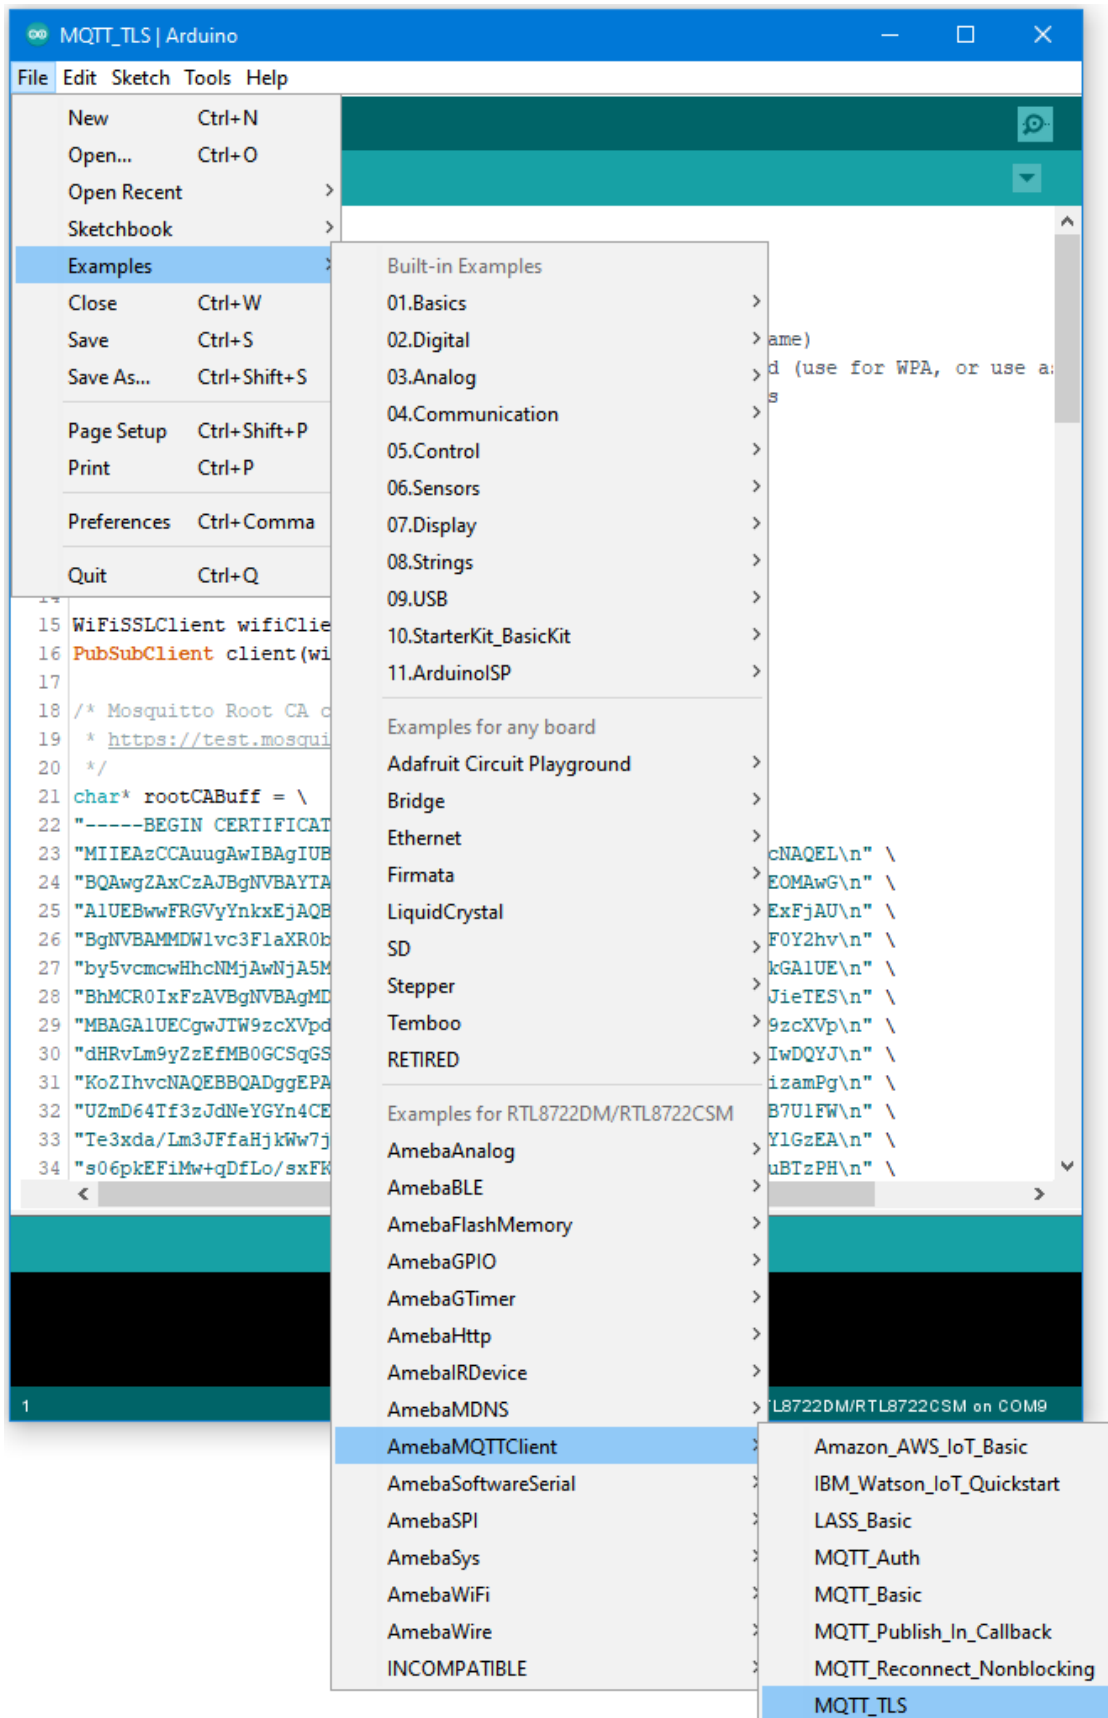

Please modify the WiFi-related parameters to connect to your WiFi network.

Modify the MQTT parameters to fit your application:

```
MQTT_TLS | Arduino
File Edit Sketch Tools Help

MQTT_TLS

1 #include <WiFi.h>
2 #include <PubSubClient.h>
3
4 // Update these with values suitable for your network.
5 char ssid[] = "yourNetwork"; // your network SSID (name)
6 char pass[] = "yourPassword"; // your network password (use for WPA, or use a
7 int status = WL_IDLE_STATUS; // the Wifi radio's status
8
9 char mqttServer[] = "test.mosquitto.org";
10 char clientId[] = "amebaClient";
11 char publishTopic[] = "outTopic";
12 char publishPayload[] = "hello world";
13 char subscribeTopic[] = "inTopic";
14
15 WiFiSSLClient wifiClient;
16 PubSubClient client(wifiClient);
17
18 /* Mosquitto Root CA can be download here:
19 * https://test.mosquitto.org/
20 */
21 char* rootCABuff = \
22 "-----BEGIN CERTIFICATE-----\n" \
23 "MIIEAzCCAuugAwIBAgIUBYlh1CGvdj4NhBXkZ/uLUZNI LAwwDQYJKoZIhvcNAQEL\n" \
24 "BQAwZ2AxZCzAJBgNVBAYTAkdCMRcwFQYDVOQIDA5Vbml0ZWQgS2luZ2RvbTEOMAwG\n" \
25 "A1UEBwwFRGVyYnkvEjAQBgNVBAoMVCU1vc3FlaXR0b2ELMAkGA1UECwwCQ0ExFjAU\n" \
26 "BgNVBAMMDWlvc3FlaXR0by5vcmcxHzAdBgkqhkiG9w0BCQEWElJvZ2VzV2VzV2Vz\n" \
27 "by5vcmcwHhcNMjAwNjA5MTEwNjM5MzcwMzAwNjA3MTEwNjM5MjCBDELMAkGA1UE\n" \
28 "BhmCR0IxZ2AxZ2AxZ2AxZ2AxZ2AxZ2AxZ2AxZ2AxZ2AxZ2AxZ2AxZ2AxZ2AxZ2Ax\n" \
29 "MBAGA1UECgwJTW9zcXVpdHRvMjAwNjA3MTEwNjM5MzcwMzAwNjA3MTEwNjM5MjCB\n" \
30 "dHRvLm9yZ2VzV2VzV2VzV2VzV2VzV2VzV2VzV2VzV2VzV2VzV2VzV2VzV2VzV2Vz\n" \
31 "KoZIhvcNAQEBBQADggEPADCCAQoCggEBAME0HKmIzftOwkKLT3THHe+ObdizamPg\n" \
32 "UZmD64Tf3zJdNeYGYn4CEXbyP6fy3tWc8S2boW6dzrH8SdFf9uo320GA9B7U1FW\n" \
33 "Te3xda/Lm3JffaHjkw7jBwcauQZjpGINHapHRlpiCZsquAthOgxW9SgDgY1GzEA\n" \
34 "s06pkEFiMw+qDfLo/sxFKB6vQlFekMeCymjLCbNwPjYqyhFmPwio/PDMruBTzPH\n" \
35 "
```

The “mqttServer” refers to the MQTT-Broker, we use the free MQTT sandbox “test.mosquitto.org” for testing.


“clientId” is an identifier for MQTT-Broker to identify the connected device.

“publishTopic” is the topic of the published message, we use “outTopic” in the example. The devices subscribe to “outTopic” will receive the message.

“publishPayload” is the content to be published.

“subscribeTopic” is to tell MQTT-broker which topic we want to subscribe to.

Next, compile the code and upload it to Ameba. Press the reset button, then open the serial monitor

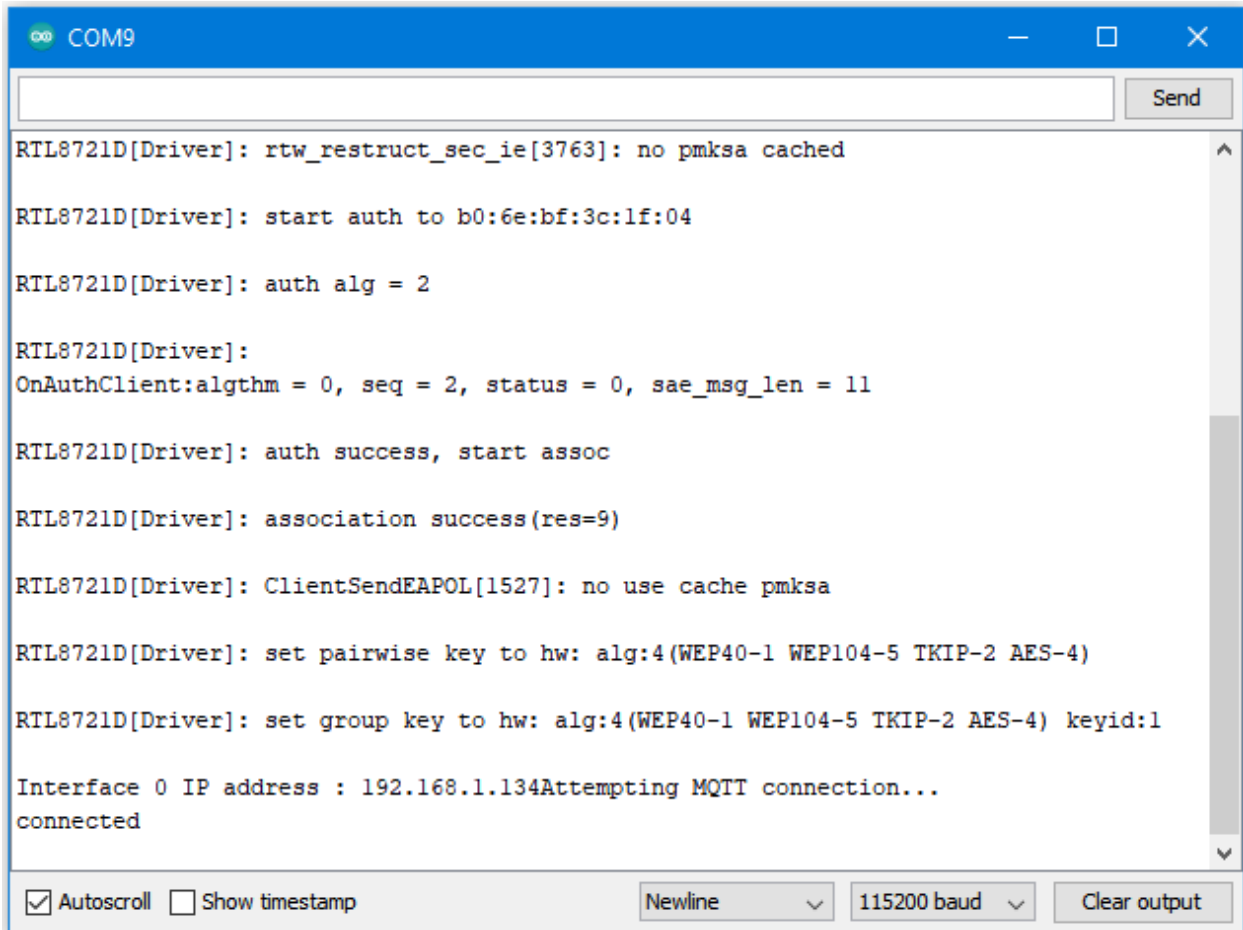

```

COM9
Send

RTL8721D[Driver]: rtw_restruct_sec_ie[3763]: no pmksa cached

RTL8721D[Driver]: start auth to b0:6e:bf:3c:1f:04

RTL8721D[Driver]: auth alg = 2

RTL8721D[Driver]:
OnAuthClient:alghm = 0, seq = 2, status = 0, sae_msg_len = 11

RTL8721D[Driver]: auth success, start assoc

RTL8721D[Driver]: association success(res=9)

RTL8721D[Driver]: ClientSendEAPOL[1527]: no use cache pmksa

RTL8721D[Driver]: set pairwise key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4)

RTL8721D[Driver]: set group key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4) keyid:1

Interface 0 IP address : 192.168.1.134Attempting MQTT connection...
connected


☒ Autoscroll ☐ Show timestamp
Newline 115200 baud Clear output

```

After Ameba is connected to MQTT server, it sends the message “hello world” to “outTopic” . To see the message, use another MQTT client. Refer to the MQTT_Basic example guide on how to setup a PC-based MQTT client.

If you wish to use TLS client authentication in addition to server authentication, you will need to generate an OpenSSL private key and obtain a signed certificate from the server. For testing purposes, signed certificates can be obtained from test.mosquitto.org by following the guide at <https://test.mosquitto.org/ssl/>.

Replace the character strings “certificateBuff” and “privateKeyBuff” with your signed certificate and OpenSSL private key, ensuring that they are formatted the same way as the shown in the example code. Also uncomment the highlighted code to enable client authentication, and to change the MQTT port number.

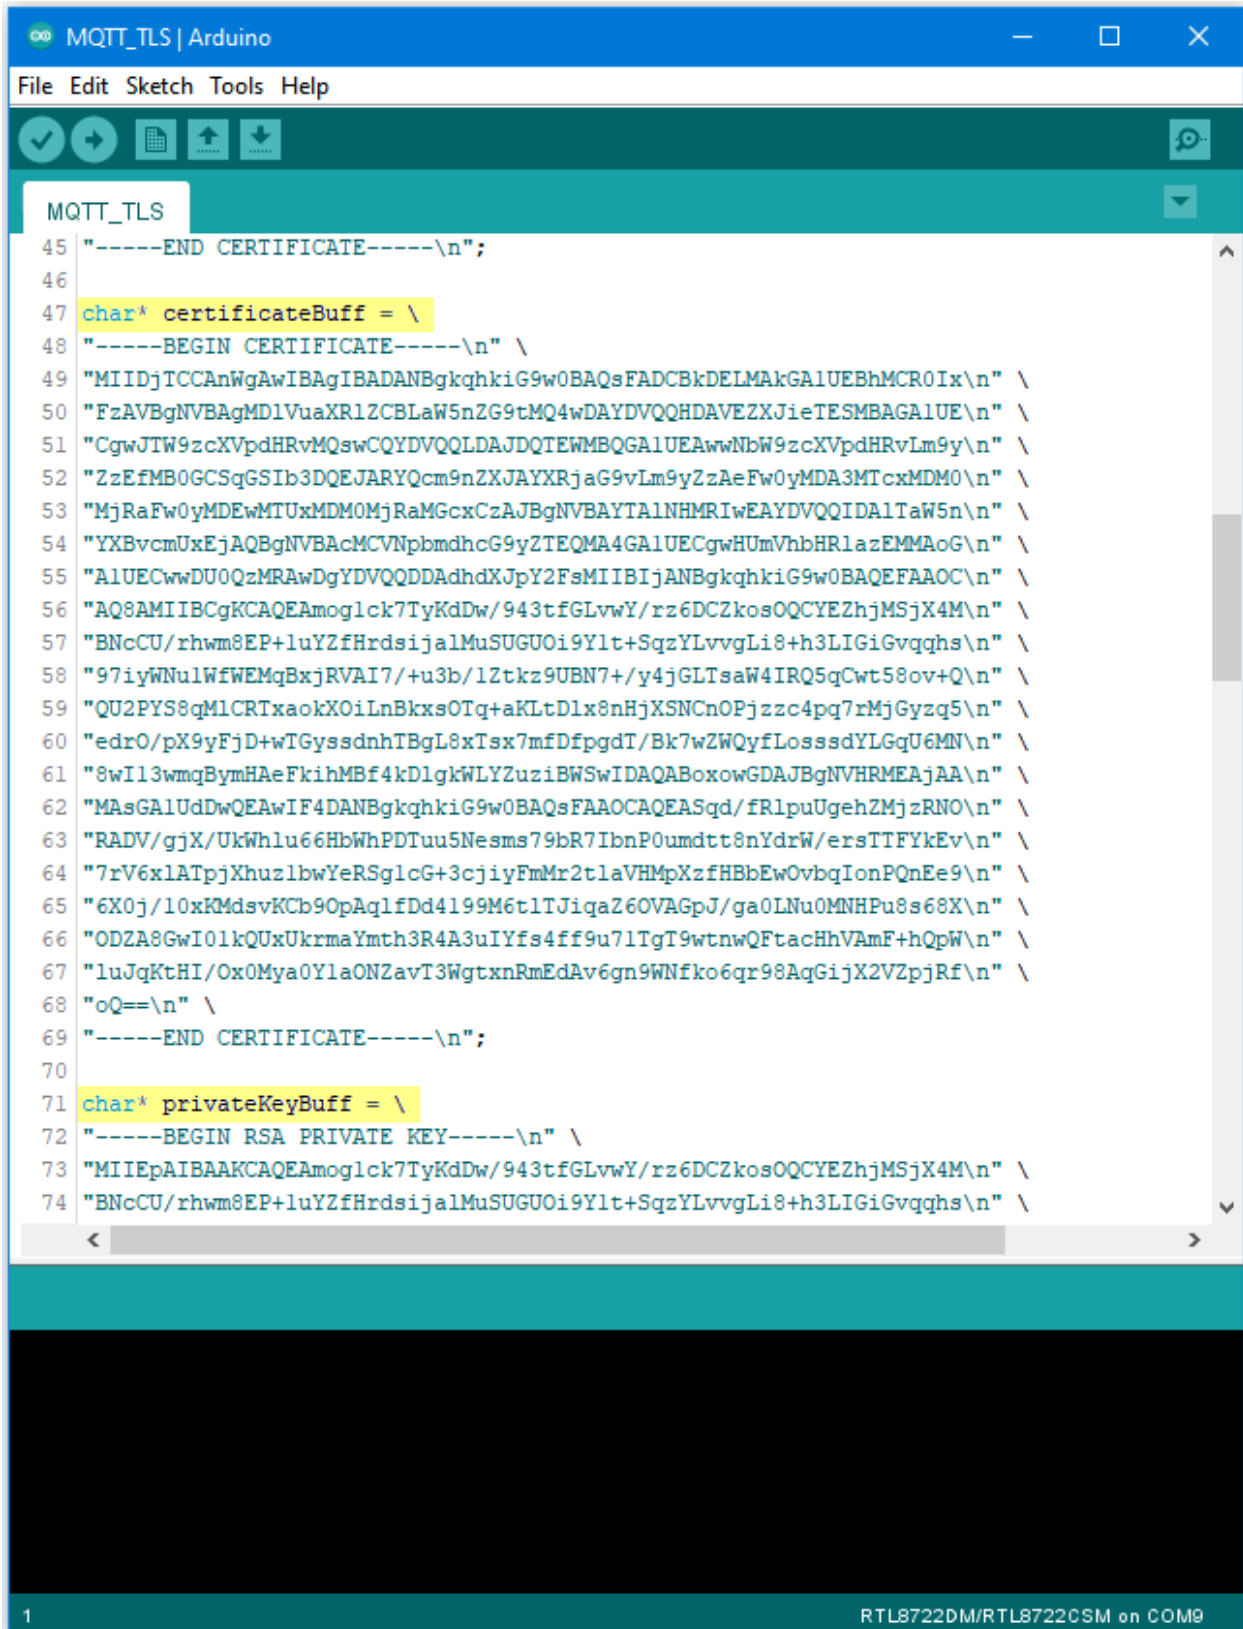

```

MQTT_TLS | Arduino
File Edit Sketch Tools Help

MQTT_TLS
45 "-----END CERTIFICATE-----\n";
46
47 char* certificateBuff = \
48 "-----BEGIN CERTIFICATE-----\n" \
49 "MIIDjTCCAnWgAwIBAgIBADANBgkqhkiG9w0BAQsFADCBkDELMAkGA1UEBhMCR0Ix\n" \
50 "FzAVBgNVBAGMD1VuaXRlZCBLaW5nZG9tMQ4wDAYDVQQHDAVEZXJieTESMBAGAlUE\n" \
51 "CgwJTW9zcXVpdHRvMQswCQYDVQQLDAJQTEWMBQGA1UEAwNBW9zcXVpdHRvLm9y\n" \
52 "ZzEfMB0GCSqGSIb3DQEJARYQcm9nZXJAYXRjaG9vLm9yZzAeFw0yMDA3MTcxMDM0\n" \
53 "MjRaFw0yMDEwMTUxMDM0MjRaMGcxZzAJBgNVBAYTA1NHMRIwEAYDVQQIDAlTaW5n\n" \
54 "YXBvcnUxZjAQBgNVBACMCVnpbmdhcG9yZTEQMA4GA1UECgwHUmVhbHRlZEMMAoG\n" \
55 "AlUECwWDU0QzMRAdDgYDVQDDAdhdXJpY2FsMIIIBIjANBgkqhkiG9w0BAQEFAAO\n" \
56 "AQ8AMIIBCGKCAQEA moglck7TyKdDw/943tfGLvwY/rz6DCZkosOQCYEZhjMSjX4M\n" \
57 "BNcCU/rhwm8EP+luYZfHrdsijalMuSUGUOi9Ylt+SqzYLvvgLi8+h3LIGiGvqghs\n" \
58 "97iyWNulWfWEMqBxjRVAI7/+u3b/lZtkz9UBN7+/y4jGLTsaW4IRQ5qCwt58ov+Q\n" \
59 "QU2PYS8qMlCRTxaokXOiLnBkxsOTq+aKLTdlx8nHjXSNcNOPjz zc4pq7rMjGyzq5\n" \
60 "edrO/pX9yFjD+wTgyssdnhTBgL8xTsx7mfDfpgdT/Bk7wZWQyfLosssdYLGqU6MN\n" \
61 "8wIl3wmqBymHAEfkihMBf4kDlglWLYZuziBWSwIDAQABoxowGDAJBgNVHRMEAjAA\n" \
62 "MAsGAlUdDwQEAwIF4DANBgkqhkiG9w0BAQsFAAOCAQEASqd/fRlpuUgehZMjzRNO\n" \
63 "RADV/gjX/UkWhlu66HbWhPDTuu5Nesms79bR7IbnP0umdt8nYdrW/ersTTFYkEv\n" \
64 "7rV6xlatPjXhuzlbwYeRSglcG+3cjiyFmMr2tlaVHMPXzfHBBEwOvbqIonPQnEe9\n" \
65 "6X0j/10xKMdsVKCb9OpAqlfDd4199M6t1TJiqaZ6OVAGpJ/ga0LNU0MNHPU8s68X\n" \
66 "ODZA8GwI0lkQUxUkrmaYmth3R4A3uIYfs4ff9u71TgT9wtnwQftacHhVAmF+hQpW\n" \
67 "luJqKtHI/Ox0Mya0YlaONZavT3WgtxnRmEdAv6gn9WNfko6qr98AqGijX2VZpjRf\n" \
68 "oQ==\n" \
69 "-----END CERTIFICATE-----\n";
70
71 char* privateKeyBuff = \
72 "-----BEGIN RSA PRIVATE KEY-----\n" \
73 "MIIEpAIBAAKCAQEA moglck7TyKdDw/943tfGLvwY/rz6DCZkosOQCYEZhjMSjX4M\n" \
74 "BNcCU/rhwm8EP+luYZfHrdsijalMuSUGUOi9Ylt+SqzYLvvgLi8+h3LIGiGvqghs\n"

```

1 RTL8722DM/RTL8722CSM on COM9

```

MQTT_TLS $
130
131 void setup() {
132   Serial.begin(115200);
133
134   while (status != WL_CONNECTED) {
135     Serial.print("\r\n Attempting to connect to SSID: ");
136     Serial.println(ssid);
137     // Connect to WPA/WPA2 network. Change this line if using open or WEP network:
138     status = WiFi.begin(ssid, pass);
139     if (status == WL_CONNECTED) break;
140     // retry after 1 second
141     delay(1000);
142   }
143
144   wifiClient.setRootCA((unsigned char*)rootCABuff);
145   wifiClient.setClientCertificate((unsigned char*)certificateBuff, (unsigned char*)privateKeyBuff);
146   client.setServer(mqttServer, 8884);
147   /*
148   wifiClient.setRootCA((unsigned char*)rootCABuff);
149   client.setServer(mqttServer, 8883);
150   /*
151   client.setCallback(callback);
152
153   // Allow the hardware to sort itself out
154   delay(1500);
155 }
156
157 void loop()
158 {
159   if (!client.connected()) {
160
144
RTL8722DM/RTL8722CSM on COM9

```

Upload PM2.5 Data to LASS System

Intro to LASS

The LASS stands for “Location Aware Sensor System” . It is an open project and was started only for the interest of public welfare. Find detailed introduction [here](#).

Practically, LASS is based on MQTT protocol to collect all kinds of uploaded data, and for those who need these data can subscribe top as well.

Find more LASS information at their [official hackpad](#).

Preparation


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- PlanTower PMS3003 or PMS5003 x1

Example

In this example, we use applications mentioned at our website, including:


- **MQTT**: a MQTT-Broker to connect to LASS. The Client is “FT1_0XXXX” , the XXXX are the four last digits of Ameba’ s Wi-Fi MAC, and the outTopic is “LASS/Test/Pm25Ameba/**clientID**” , where clientID is the actual Ameba’ s MQTT client ID.
- **NTP**: uploaded data must have time notation
- **PM2.5**: uploaded data includes PM2.5 information

Open the example. “File” -> “Examples” -> “AmebaMQTTClient” -> “lass_basic”

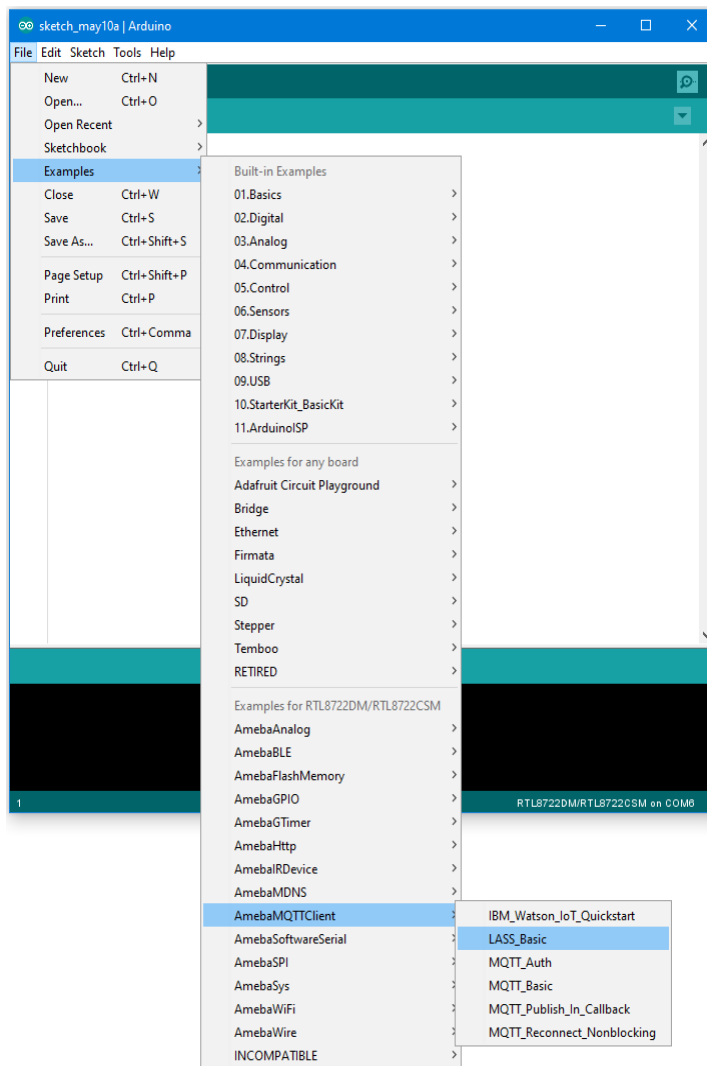

This example requires internet connection, so make sure you fill in SSID and PASS into AP information that you wish to connect.

Also, LASS requires GPS information. There is no GPS sensor included in this example, so you must manually provide GPS information. Use Google Map to find the coordinates you plan to place your Ameba. You can see in this example that the latitude is 24.7814033, and the longitude is 120.9933676

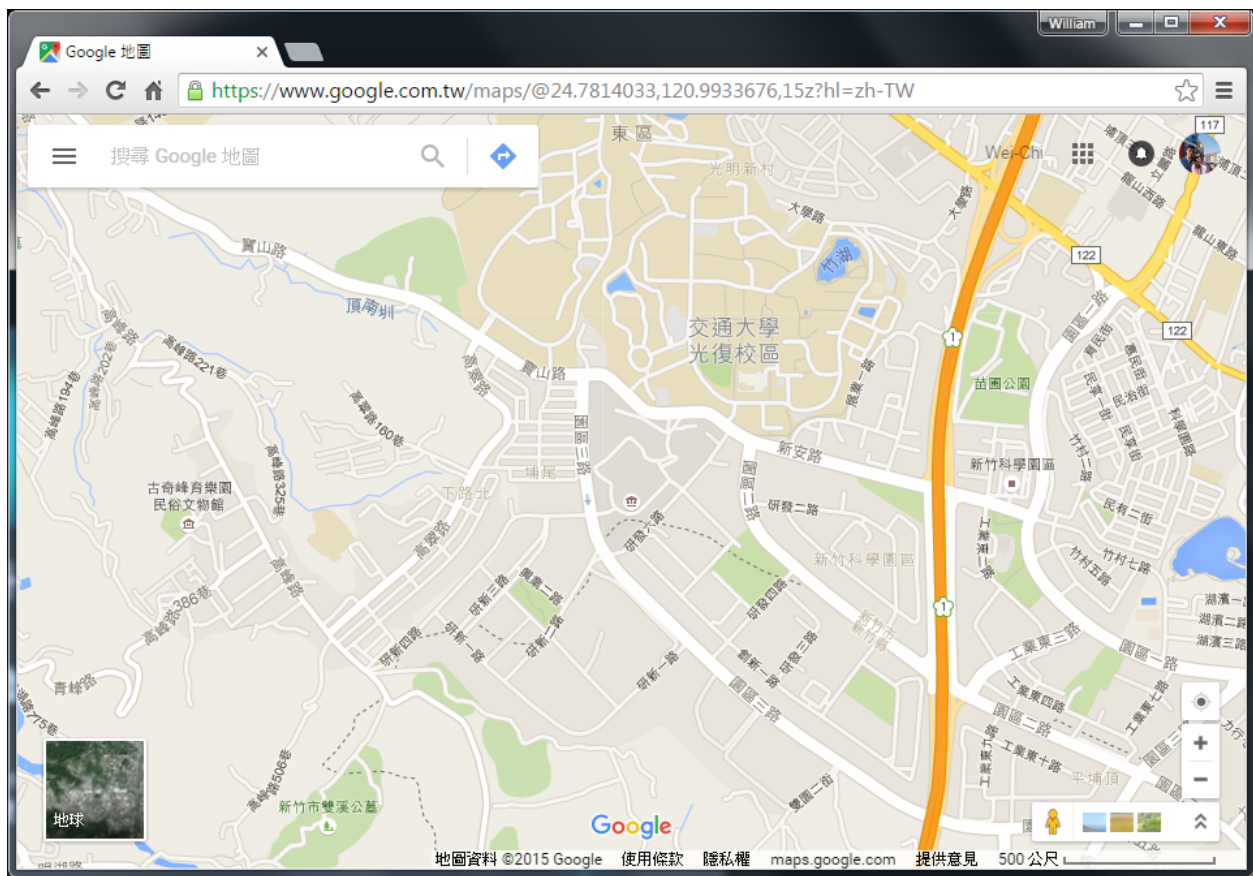

Fill in GPS info at `gps_lat` and `gps_lon`.


```


1  /*
2   This example demonstrate how to upload sensor data to MQTT server of LASS.
3   It include features:
4       (1) Connect to WiFi
5       (2) Retrieve NTP time with WiFiUDP
6       (3) Get PM 2.5 value from PMS3003 air condition sensor with UART
7       (4) Connect to MQTT server and try reconnect when disconnect
8
9   You can find more information at this site:
10
11       https://lass.hackpad.com/LASS-README-DtZ5T6DXLbu
12
13  */
14
15  #include <WiFi.h>
16  #include <PubSubClient.h>
17  #include <WiFiUdp.h>
18  #include <PMS3003.h>
19
20  char ssid[] = "yourNetwork"; // your network SSID (name)
21  char pass[] = "secretPassword"; // your network password
22  int keyIndex = 0; // your network key Index number (needed onl
23
24  char gps_lat[] = "24.7814033"; // device's gps latitude
25  char gps_lon[] = "120.9933676"; // device's gps longitude
26
27  char server[] = "gpssensor.ddns.net"; // the MQTT server of LASS
28  char clientId[17] = ""; // client id for MQTT
29  char outTopic[20] = "LASS/Test/PM25/live"; // MQTT publish topic
30

```


1 RTL8722DM/RTL8722CSM on COM6

Then connect sensors according to UART-PlanTower PMS3003 wiring example.


RTL8722DM / RTL8722CSM:

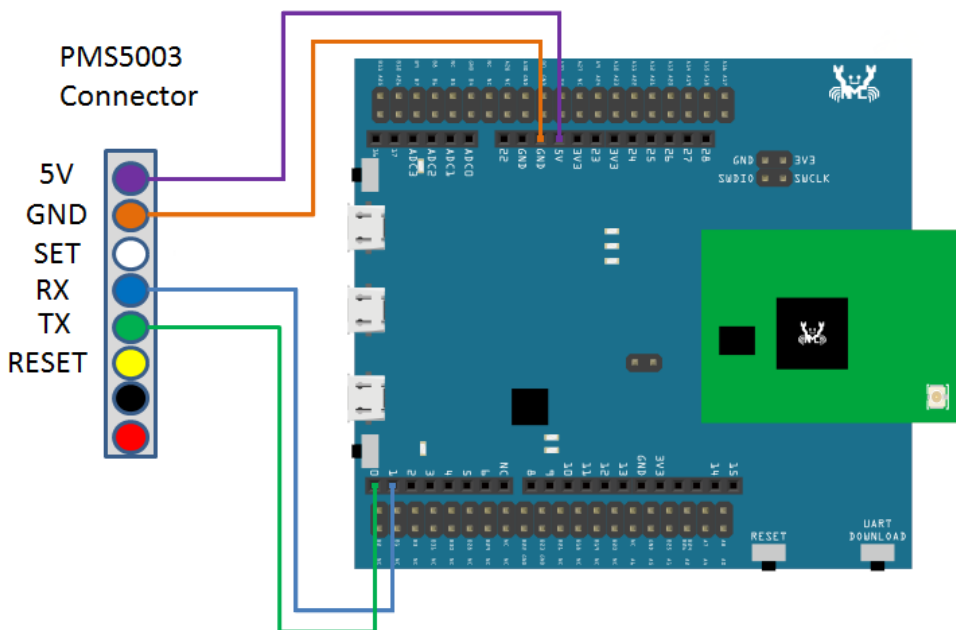

RTL8722DM MINI:

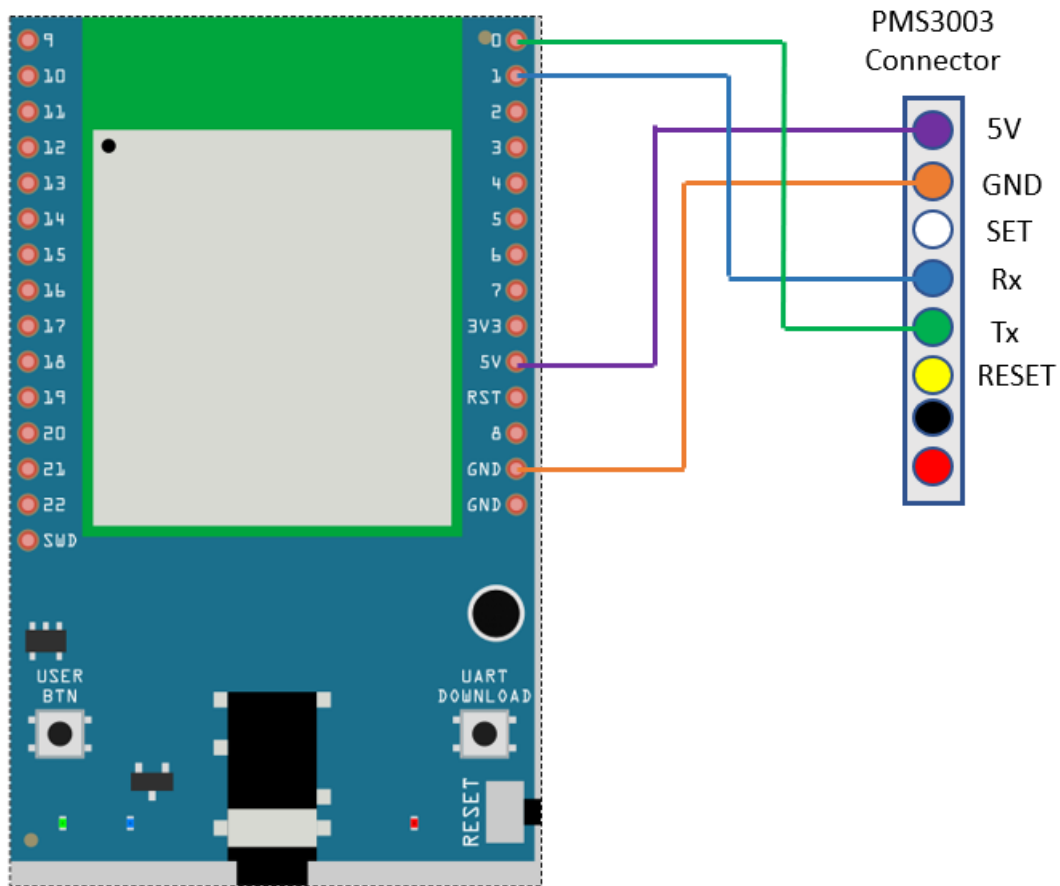


Compile the code and upload it to Ameba. After pressing the Reset button, Ameba will attempt to read PM2.5 data every minute and upload it to LASS MQTT-Broker. Open Serial Monitor to see the uploaded data, including client id, topic, and current PM2.5 status.

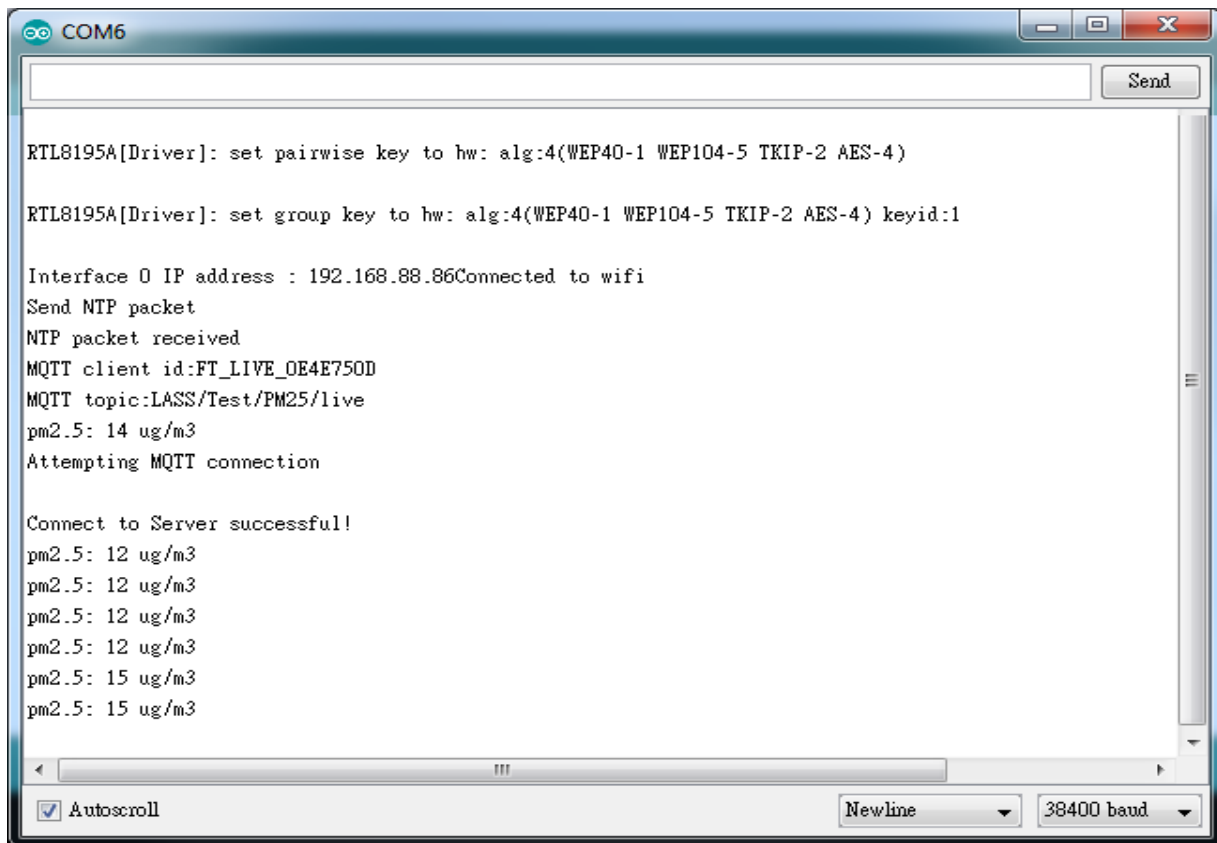

We can also use MQTTlens to verify if the data is properly uploaded.

Enter “gpssensor.ddns.net” as the MQTT-Broker server and “LASS/Test/PM25/live” as the subscribe topic to receive data.

The time uses UTC format, and the PM2.5 data stores in s_d0. In the figure, s_d0 = 9 represents that the PM2.5 is 9, meaning that the entire publish/subscribe process is working successfully.

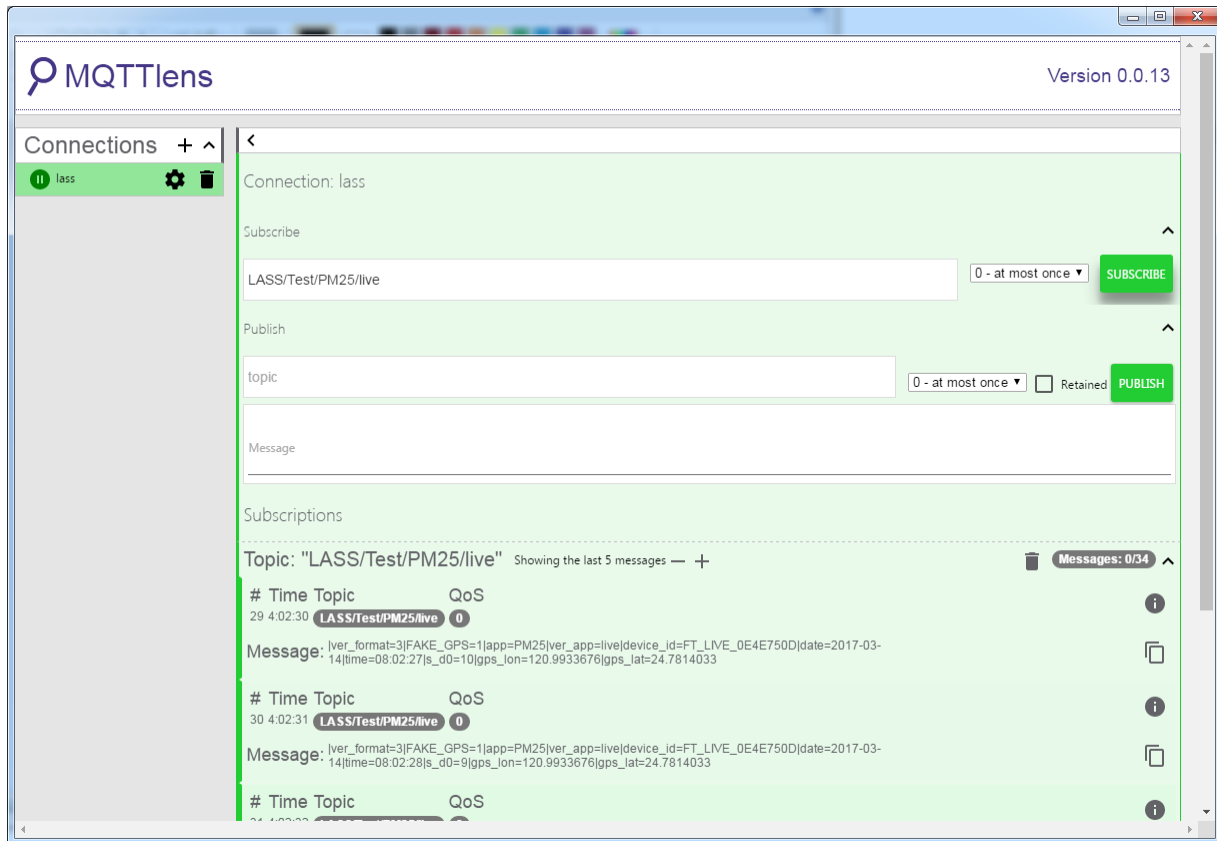

Ameba AP Mode

In AP mode, Ameba can accept at most 3 station connections, and can be set to open mode or WPA2 mode.


Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1

Example

In this example, we turn on the AP mode of Ameba and connect station to Ameba.

Open the WiFi AP example, “File” -> “Examples” -> “AmebaWiFi” -> “WiFiAPMode”

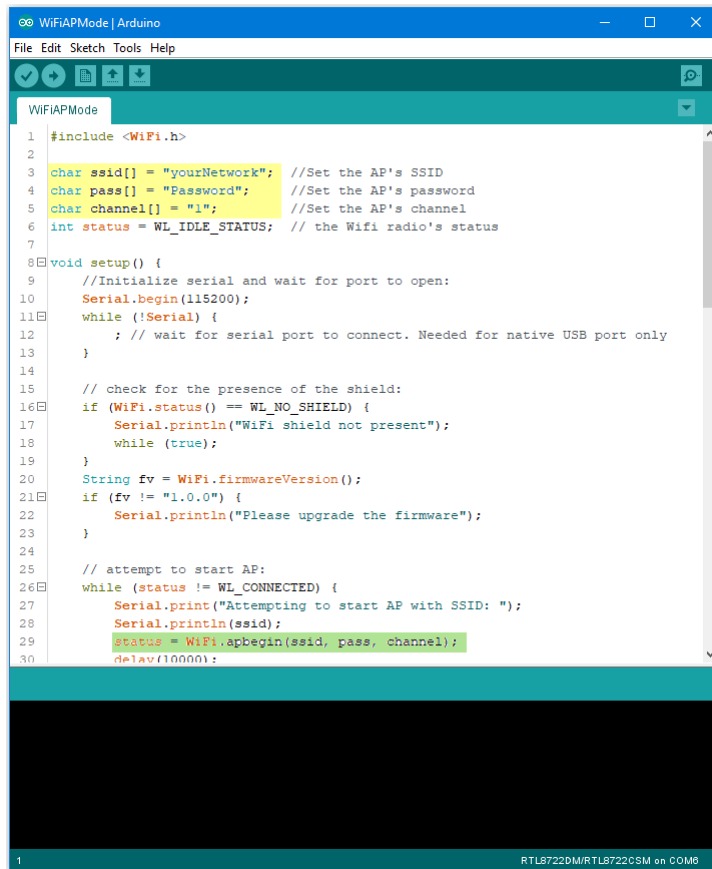

```
1 #include <WiFi.h>
2
3 char ssid[] = "yourNetwork"; //Set the AP's SSID
4 char pass[] = "Password"; //Set the AP's password
5 char channel[] = "1"; //Set the AP's channel
6 int status = WL_IDLE_STATUS; // the Wifi radio's status
7
8 void setup() {
9     //Initialize serial and wait for port to open:
10    Serial.begin(115200);
11    while (!Serial) {
12        ; // wait for serial port to connect. Needed for native USB port only
13    }
14
15    // check for the presence of the shield:
16    if (WiFi.status() == WL_NO_SHIELD) {
17        Serial.println("WiFi shield not present");
18        while (true);
19    }
20    String fw = WiFi.firmwareVersion();
21    if (fw != "1.0.0") {
22        Serial.println("Please upgrade the firmware");
23    }
24
25    // attempt to start AP:
26    while (status != WL_CONNECTED) {
27        Serial.print("Attempting to start AP with SSID: ");
28        Serial.println(ssid);
29        status = WiFi.apbegin(ssid, pass, channel);
30        delay(10000);
31    }
```


In the highlighted code snippet, fill in your SSID, PASSWORD and CHANNEL.

The code highlighted in green is the API we used to turn on the AP mode in security mode.

If you want to turn on the AP mode in open mode, please modify the code to

```
status = WiFi.apbegin(ssid, channel);
```

Then upload the sample code and press reset, and you can see related information shown in serial monitor.

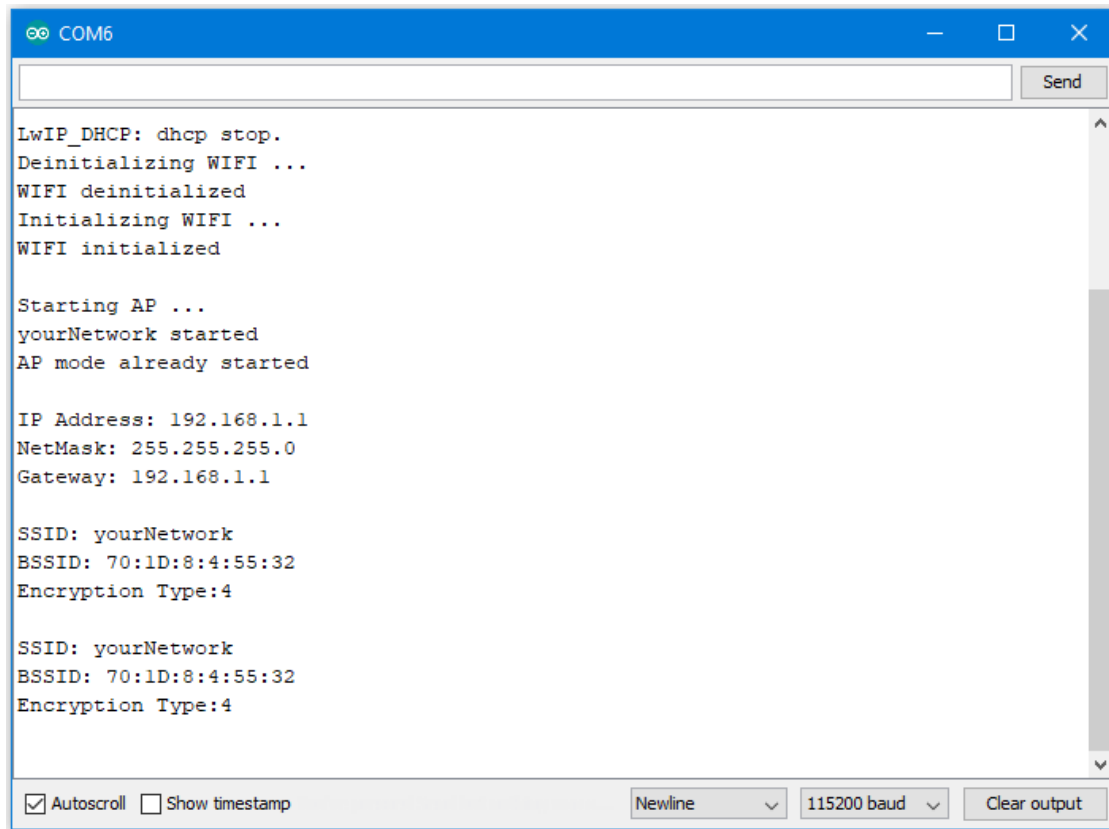

```
COM6
LwIP_DHCP: dhcp stop.
Deinitializing WIFI ...
WIFI deinitialized
Initializing WIFI ...
WIFI initialized

Starting AP ...
yourNetwork started
AP mode already started


IP Address: 192.168.1.1
NetMask: 255.255.255.0
Gateway: 192.168.1.1

SSID: yourNetwork
BSSID: 70:1D:8:4:55:32
Encryption Type:4


SSID: yourNetwork
BSSID: 70:1D:8:4:55:32
Encryption Type:4
```

Autoscroll ☒ Show timestamp ☐ Newline 115200 baud Clear output

In the figure below, we show the messages shown in serial monitor when two stations connect to Ameba AP in open mode:

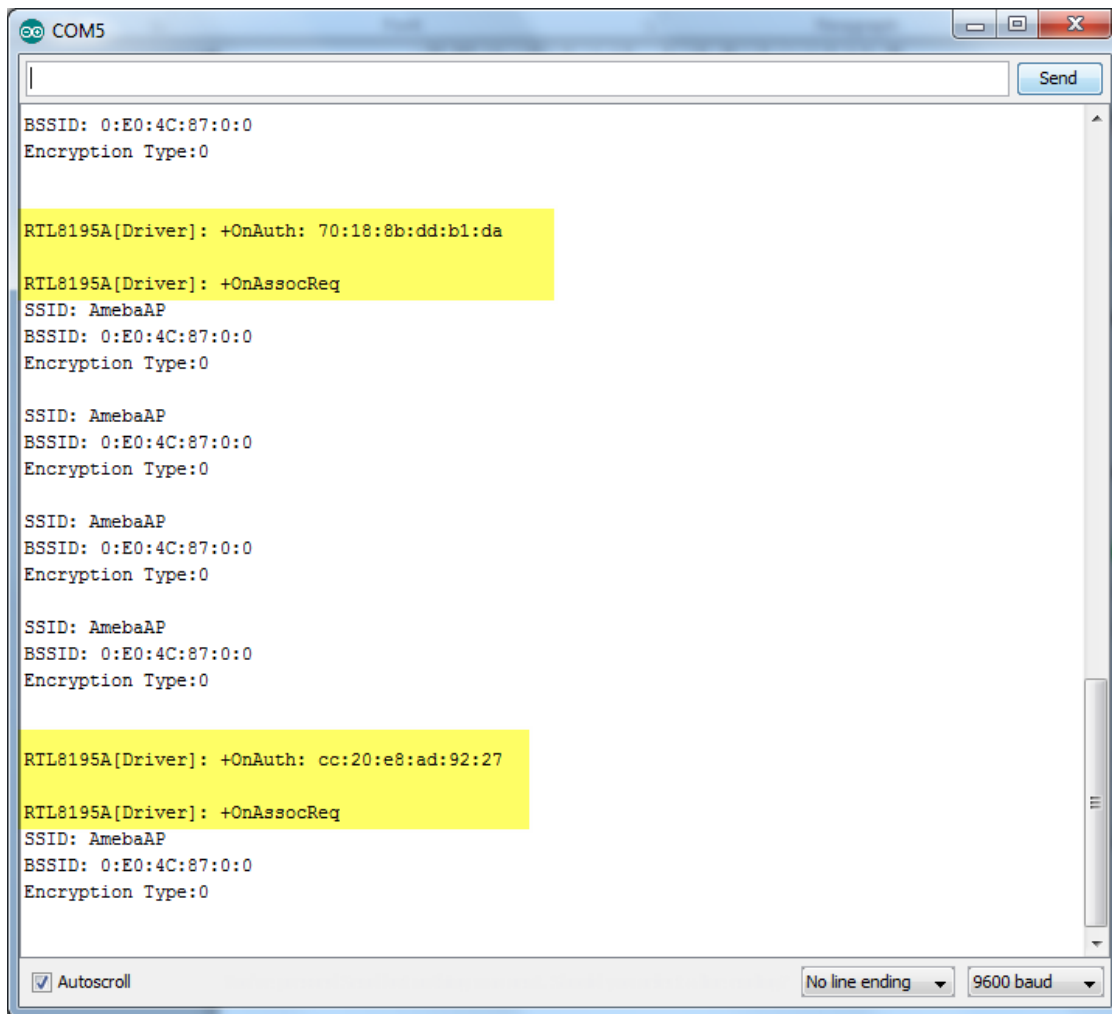

In the figure below, we show the messages shown in serial monitor when a station connects to Ameba AP in security mode:

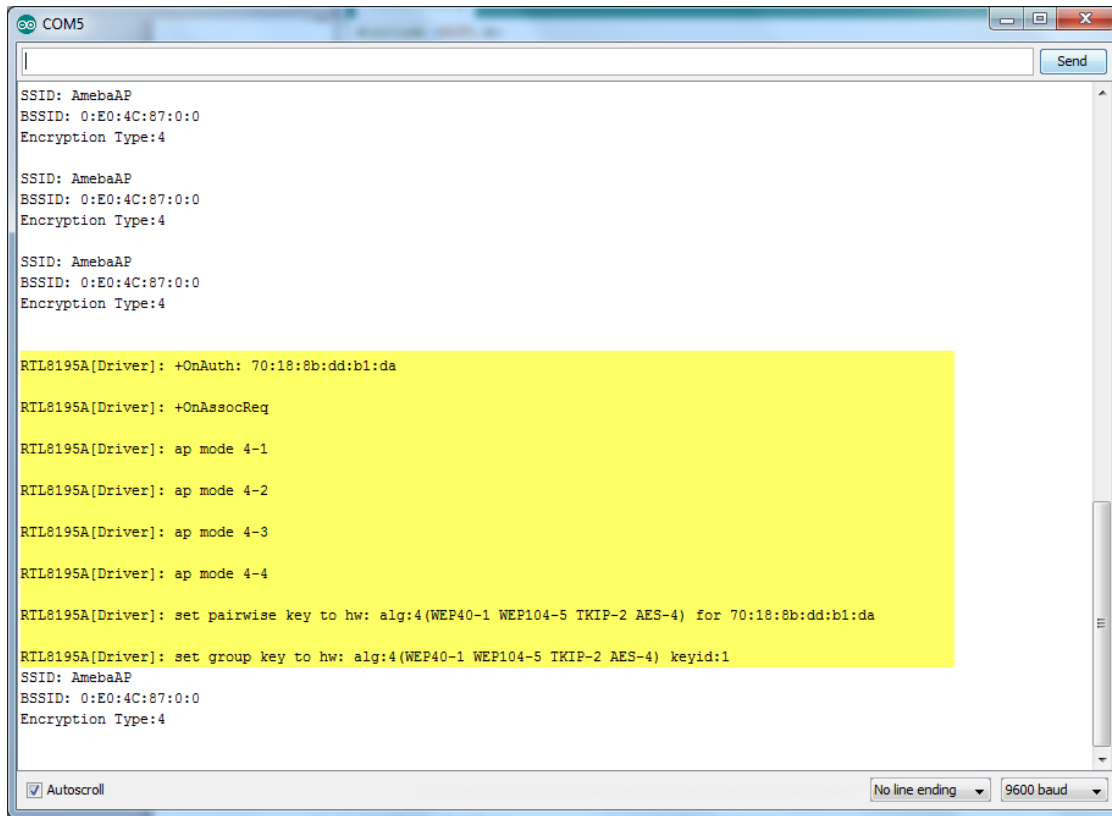

Use mDNS To Let Arduino IDE Find Ameba

Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1

Example

mDNS (Multicast DNS) is a protocol used in the local area network. It delivers the network information like IP address and provided services to others. mDNS is based on the UDP protocol, and it sends packets to 224.0.0.251 with port 5353 under IPv4 address. The naming style for the service follows the format: **{Instance Name}.{Protocol Name}.{Domain}**

- Instance Name: used to identify the name of the service
- Protocol Name: Divided into two parts, the front end is in regard to the name of the service, and it adds baseline as a prefix. The rear end is in regard to the transport protocol name it used, and it also adds baseline as a prefix
- Domain: Local area network in normal cases

For example, Arduino IDE adopts the naming for the mDNS service which is used in OTA as


following: **MyAmeba._arduino_tcp.local**

Among the naming example, “MyAmeba” can identify the Ameba device name and the name “MyAmeba” is changeable. “_arduino_tcp” is the protocol that Arduino IDE adopts, and the Domain is set as local in common.

Open the example, “File” -> “Examples” -> “AmebaMDNS” -> “mdns_on_arduino_ide”

You need to input ssid and password of the AP because the example will use WiFi connection.

And you can find out the naming of the service at the place where it declares MDNS Service. The example uses the default name “MyAmeba” and the name is changeable.

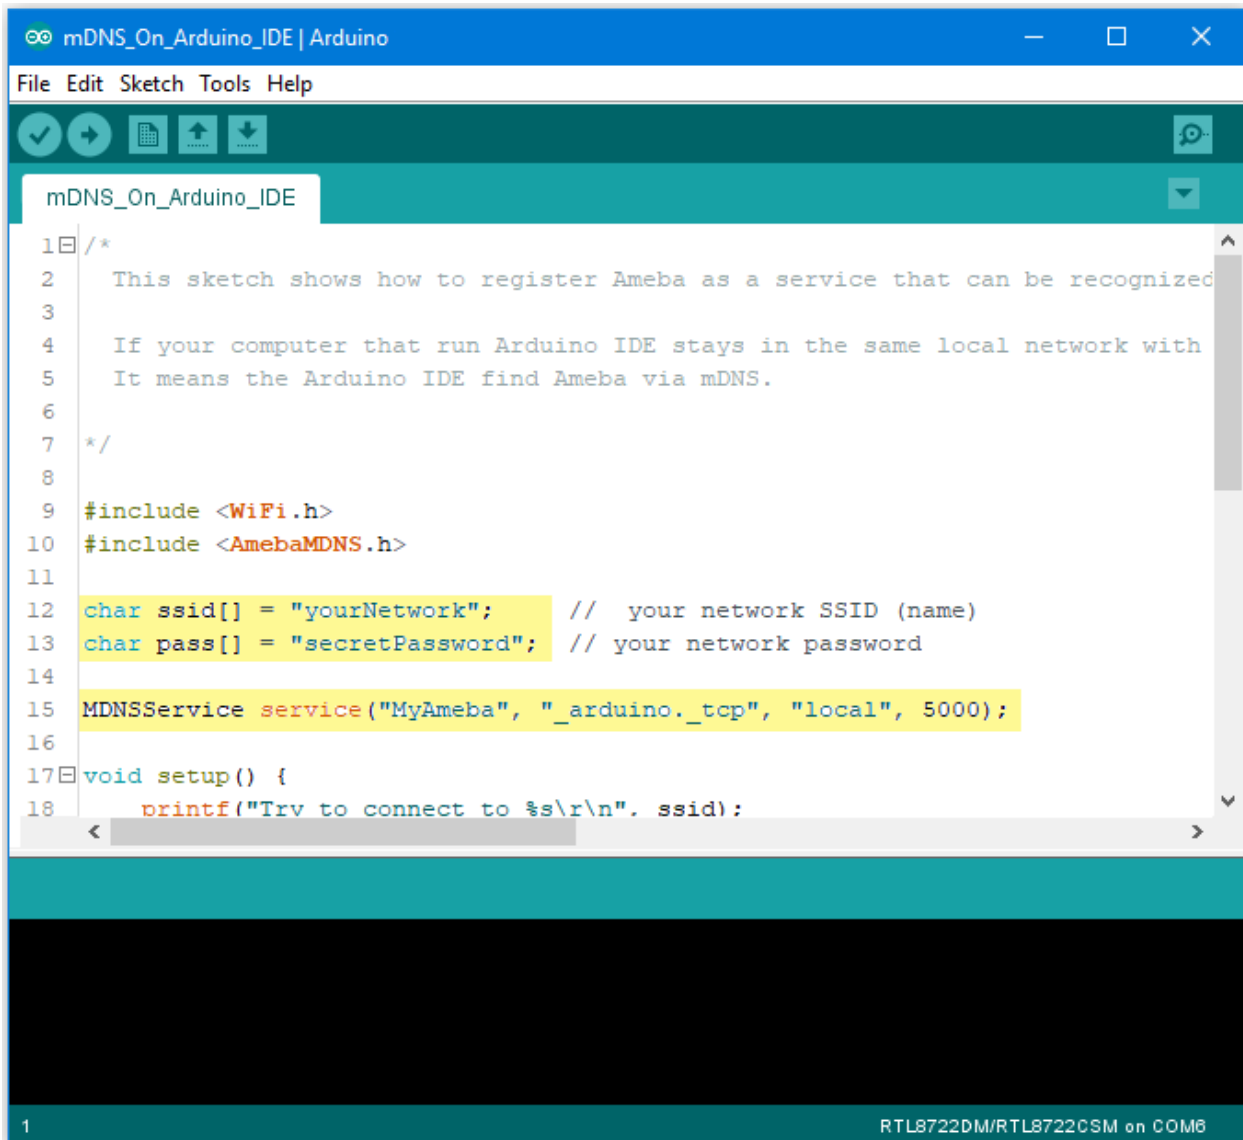


```


1  /*
2   This sketch shows how to register Ameba as a service that can be recognized
3
4   If your computer that run Arduino IDE stays in the same local network with
5   It means the Arduino IDE find Ameba via mDNS.
6
7  */
8
9  #include <WiFi.h>
10 #include <AmebaMDNS.h>
11
12 char ssid[] = "yourNetwork"; // your network SSID (name)
13 char pass[] = "secretPassword"; // your network password
14
15 MDNSService service("MyAmeba", "_arduino_tcp", "local", 5000);
16
17 void setup() {
18   printf("Try to connect to %s\r\n", ssid);

```

Next, go to (“Tools” -> “Port”), and you can find out at least one Serial Port. This port is simulated by Ameba board via USB. Choose this port and upload the compiled code to

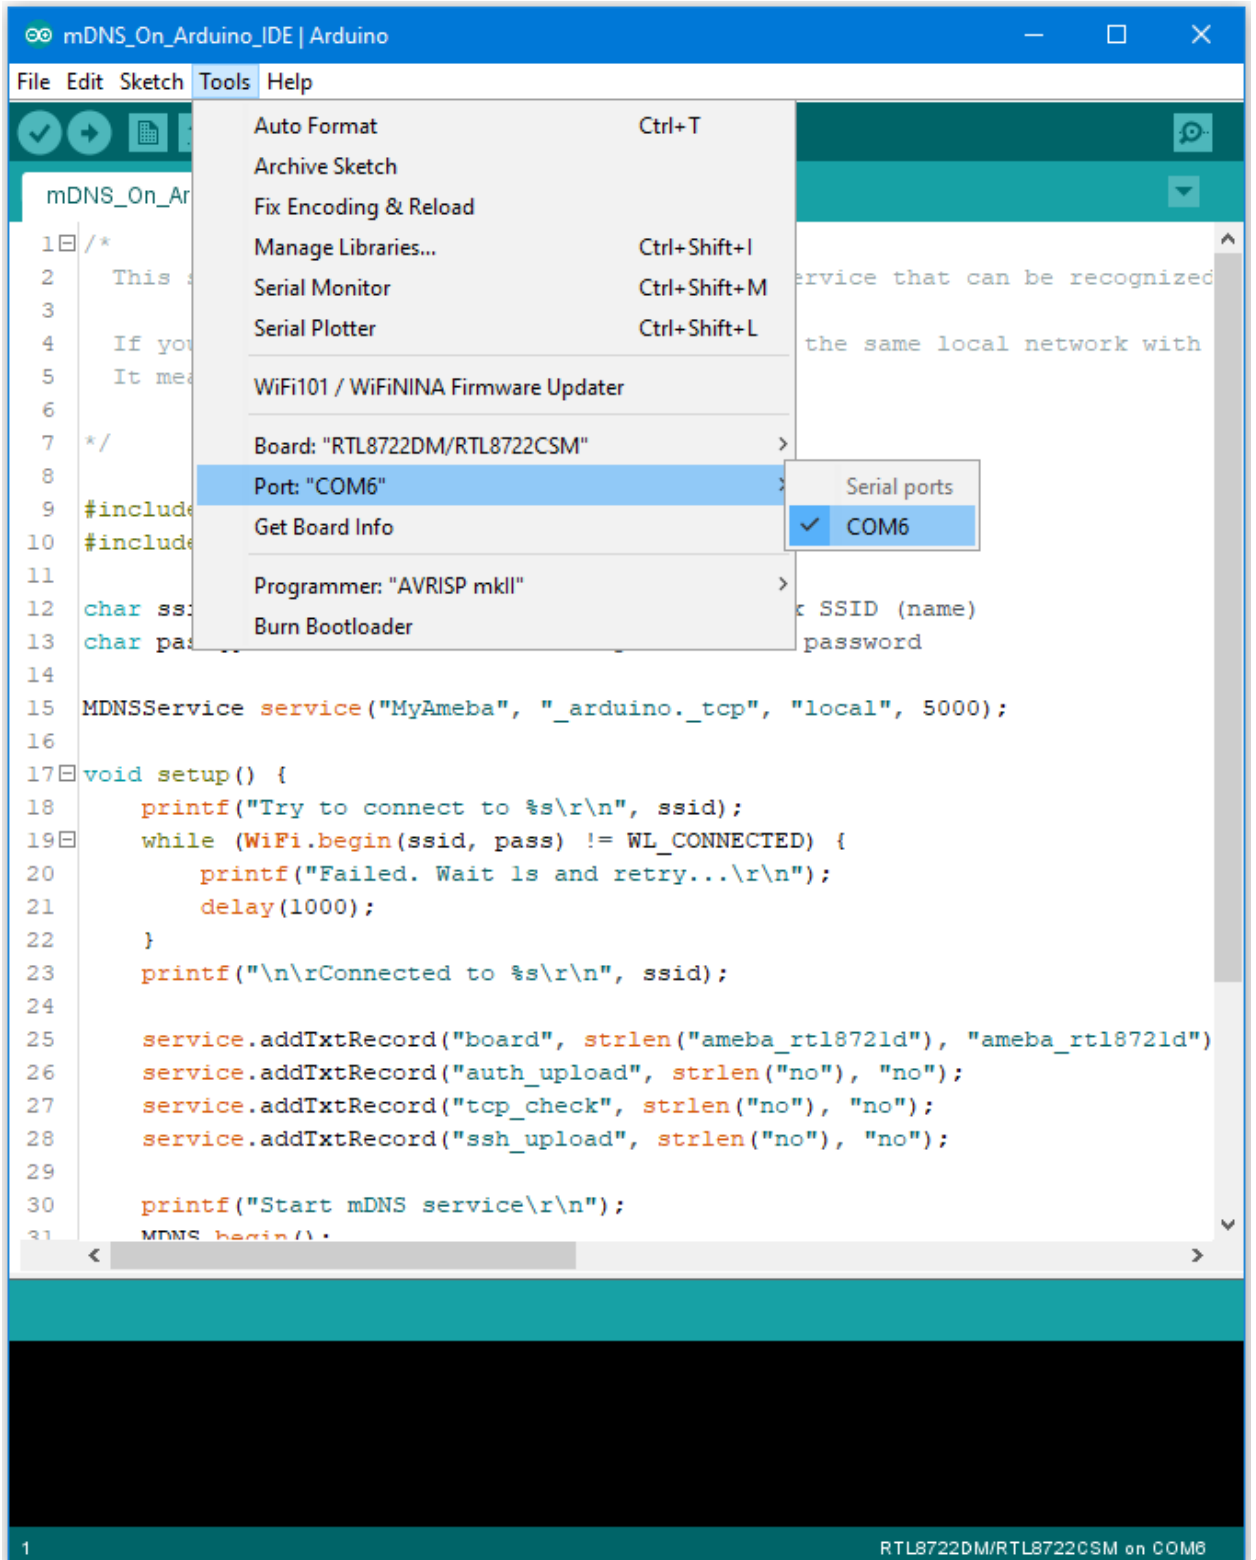

Ameba. After uploading the code, press the reset button on Ameba and waiting for Ameba to connect with AP and activate the mDNS service after a while. You can see the Log at the bottom of the Serial Monitor.

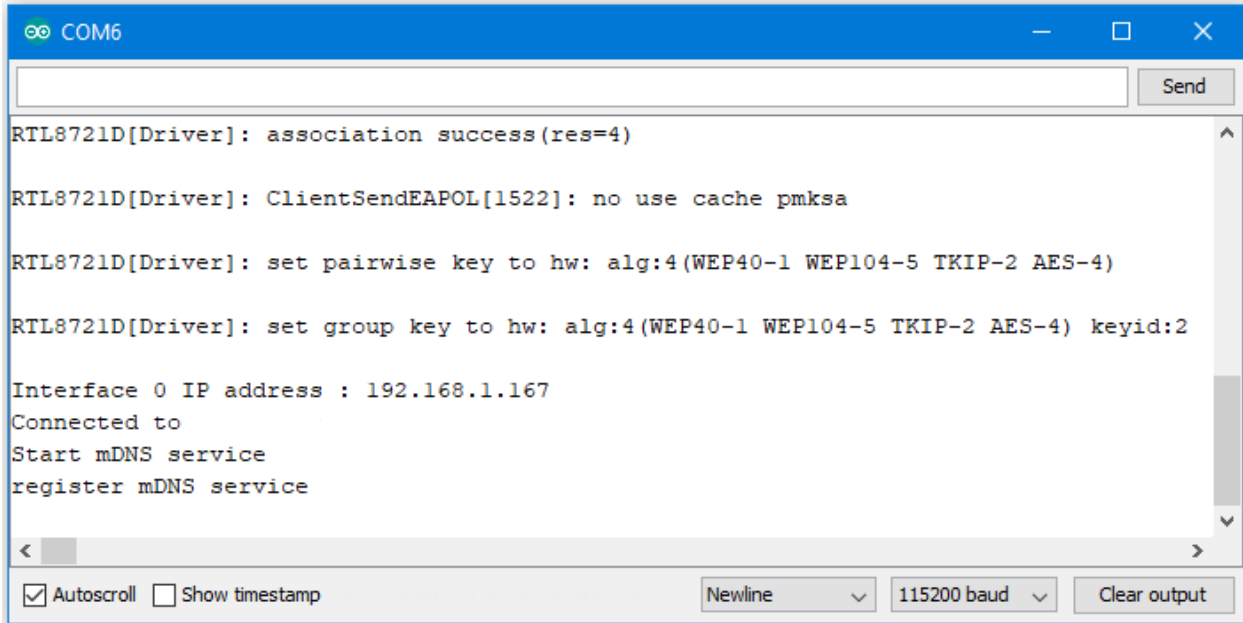

```
COM6
RTL8721D[Driver]: association success(res=4)

RTL8721D[Driver]: ClientSendEAPOL[1522]: no use cache pmksa


RTL8721D[Driver]: set pairwise key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4)

RTL8721D[Driver]: set group key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4) keyid:2

Interface 0 IP address : 192.168.1.167
Connected to
Start mDNS service
register mDNS service

☒ Autoscroll ☐ Show timestamp
Newline 115200 baud Clear output
```

Then you can find out the added item “Network Ports” “**MyAmeba at 192.168.1.167 (Ameba RTL8722DM/RTL8722CSM)**”, “MyAmeba” is the device name we set up, and “IP” is the IP address that AP assigned to Ameba, the IP address should be the same with the IP shown in the Serial Monitor. Last, “Ameba RTL8722DM/RTL8722CSM” is the type name of the board, and it means that Ameba can let Arduino IDE identify the mDNS service successfully.(We still can not use the Internet to upload the code, and we will explain this part in the OTA exam-

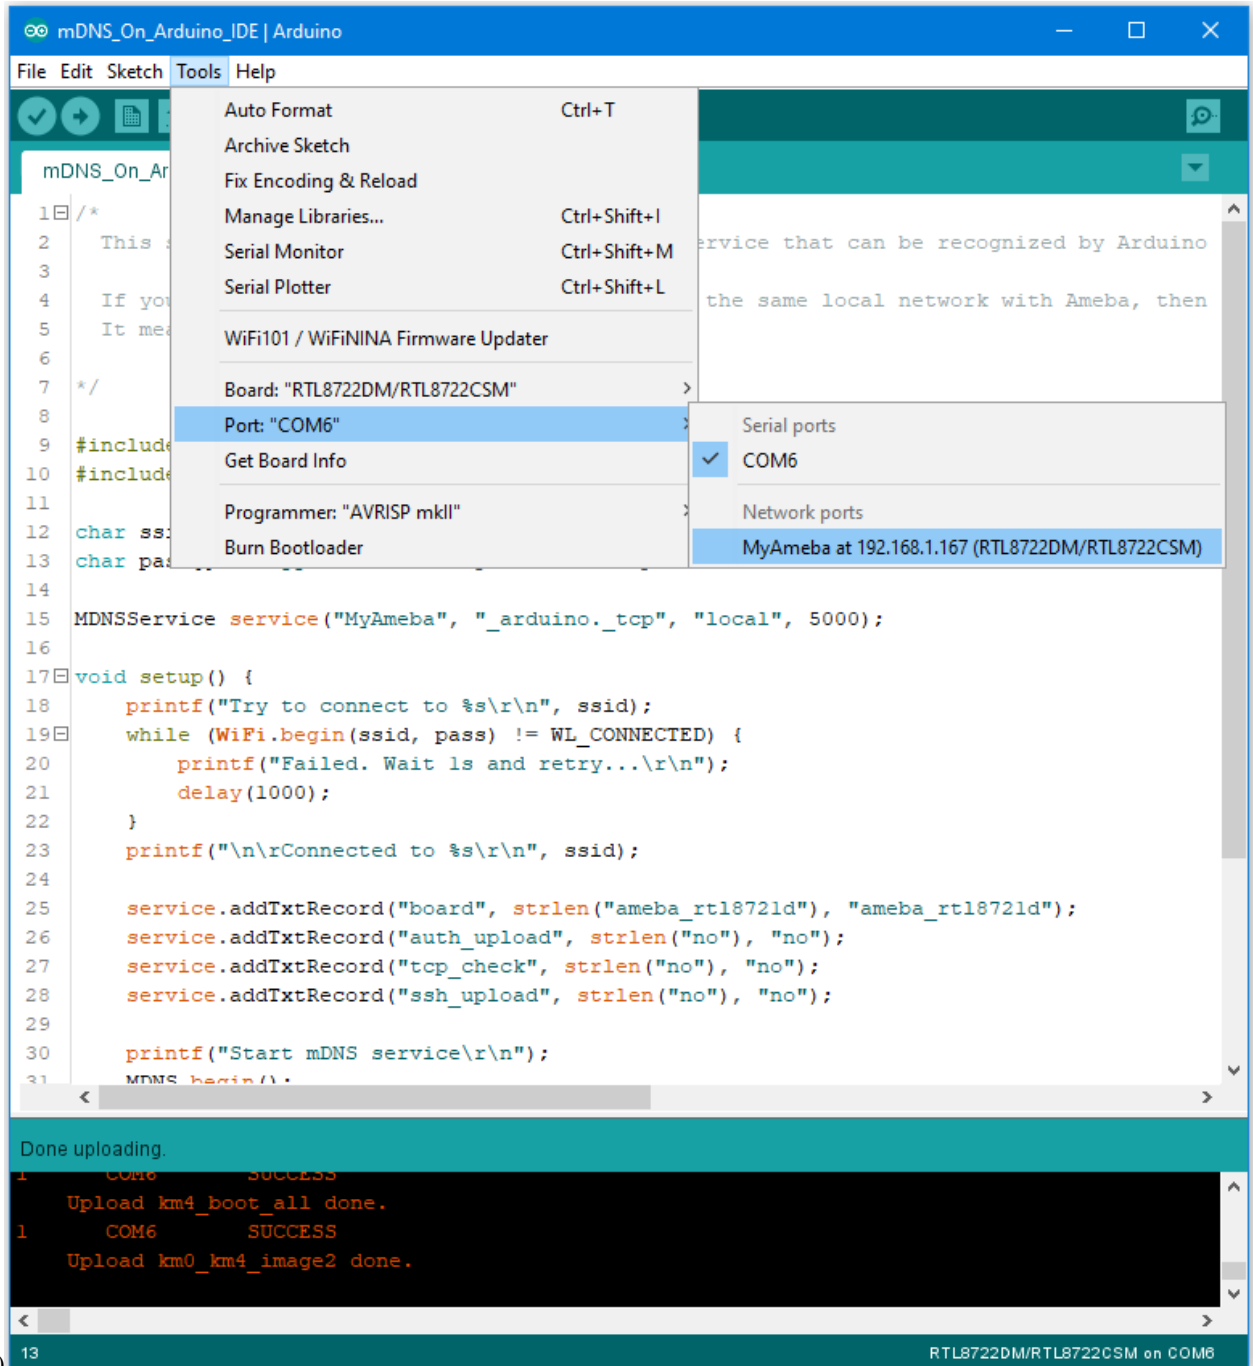

ple.)

If you cannot find the Network ports on your Arduino IDE, please check:

- Does your computer in the same local area network with the Ameba?
- Restart the Arduino IDE, and it will find the mDNS service again
- Check the Log in Serial Monitor if the Ameba connects to the AP and activate mDNS service successfully

Code Reference

The program set up the mDNS service in the beginning, the first parameter is Instance Name, and it is changeable in this example. The second parameter is the protocol that the service used, and it would be “_arduino._tcp” for Arduino IDE. The third parameter is Domain, and it would be “local” in common. The fourth parameter is the port number for the service, it is 5000 here and we doesn’ t use it in the example.

```
MDNSService service("MyAmeba", "_arduino._tcp", "local", 5000);
```

After connected to the network, we set up some text fields for the service. For the following example, “board” is the name of the field, “ameba_rtl8721d” is the value of the field. “board” is used to let Arduino IDE check installed SDK to see if it exists known device or not. We will use the name of the device if there is known device, users can change “ameba_rtl8721d” to “yun” or other names to find out what’ s the difference if interested.

```
service.addTxtRecord("board", strlen("ameba_rtl8721d"), "ameba_rtl8721d");
```

Then we add three text fields “auth_upload” , “tcp_check” , and “ssh_upload” , this example does not activate these services.

```
service.addTxtRecord("auth_upload", strlen("no"), "no");  
service.addTxtRecord("tcp_check", strlen("no"), "no");  
service.addTxtRecord("ssh_upload", strlen("no"), "no");
```

Next we activate MDNS

```
MDNS.begin();
```

and register to the mDNS service.

```
MDNS.registerService(service);
```

Use Firebase To Push Messaging Services

Preparation


- Ameba x 1
- Android Studio
- Smart phone with Google Play Service x 1

Example

In the era of the popularity of smart phones, people often receive reminders from specific apps. In this example, we will teach how to use Google Firebase to send messages from the Ameba Client to mobile phones.

First, we use Firebase Cloud Messaging (FCM) as a cross-platform messaging solution that lets you deliver messages for free and reliably.

With FCM, you can notify your client application (App) to sync emails or other data. You can send a message to drive user engagement. For instant messaging content, a message can transfer up to 4KB of payload to the client application.

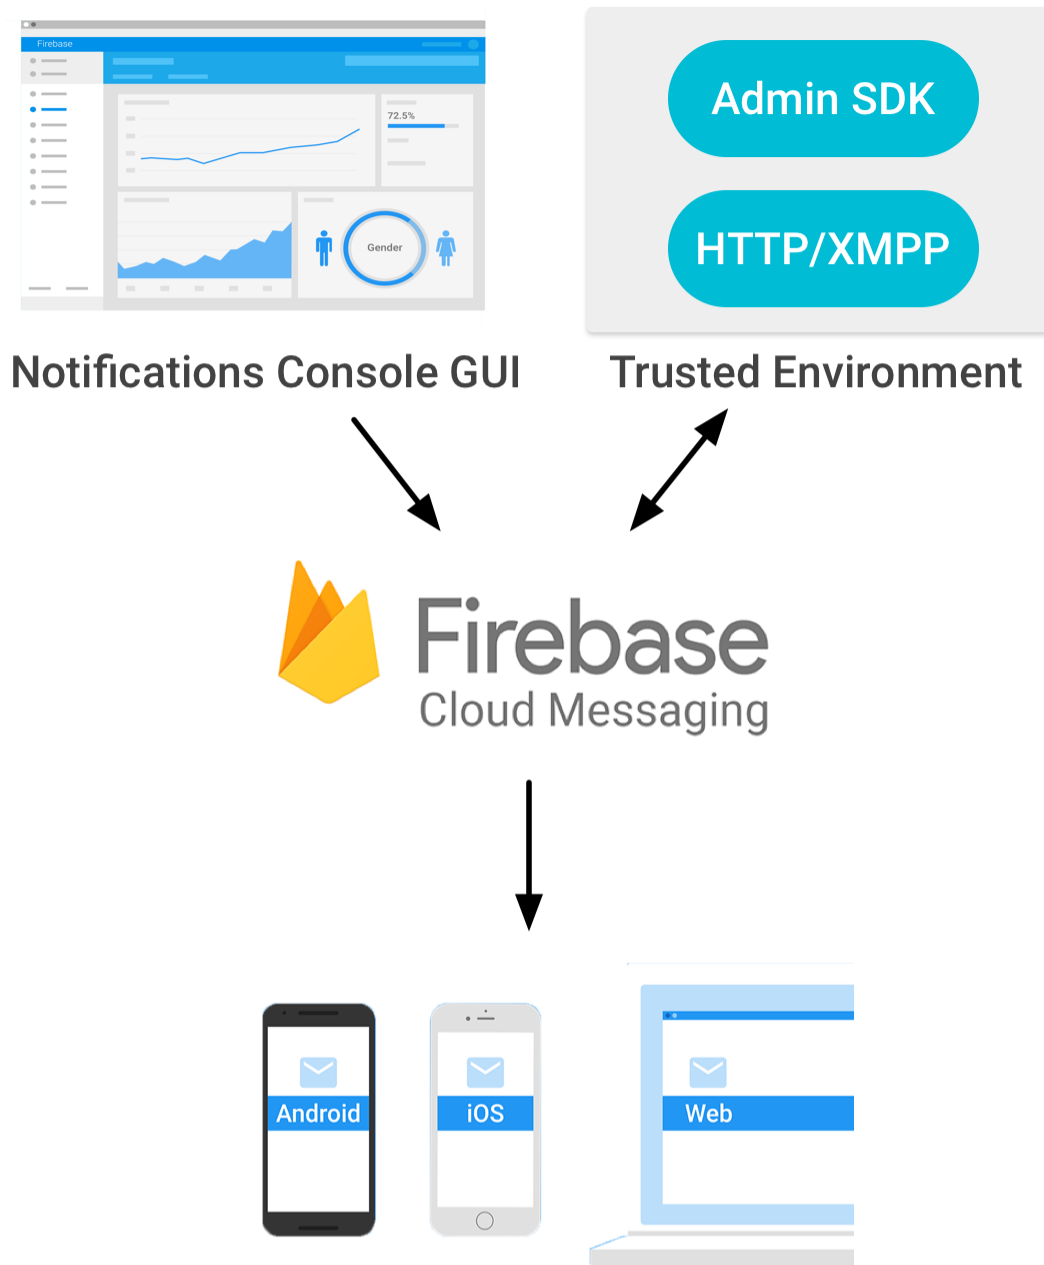

The FCM implementation includes two main parts for sending and receiving:

1. A trusted environment, such as Cloud Functions for Firebase or an application server for building, locating, and sending messages.
2. Receive iOS, Android or Web (JavaScript) client applications for messages.

You can use [Admin SDK](#) or [HTTP&XMPP API](#) to send messages. To test or send marketing or engagement messages with powerful built-in targeting and analytics, you can also use [Notifications composer](#)

We know that Ameba can send messages to specific apps as long as it implements the http client function.

First of all, we must first set up an environment for developing Android apps. Please download Android Studio first on Android official website.

<https://developer.android.com/studio/install>

Then we can use the Android example provided by Firebase to download Firebase Quickstart Samples.


<https://github.com/firebase/quickstart-android>

Open Android Studio and click on Import Project, select the messaging project in Firebase Quickstart Samples. Since we won't use other functions, we can only choose the messaging project.


Android Studio will need to install the SDK and Google repository for the first time to start the messaging project. You can refer to the following page for update.

<https://developer.android.com/studio/intro/update>


Wait until the required components for compiling the app are installed, you can open the messaging project, and Android Studio comes with the Firebase registration function.

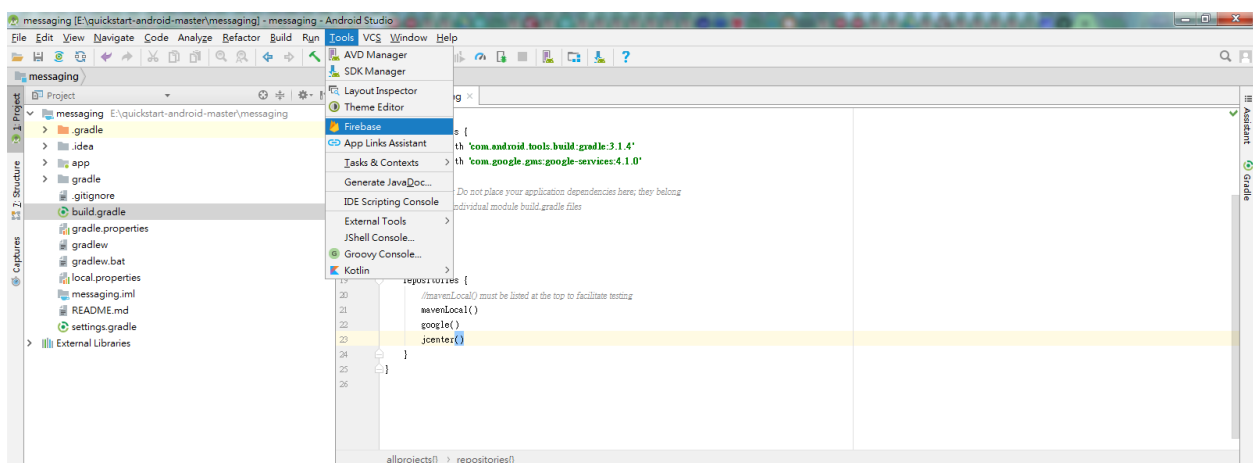


As shown above, open the toolbar and click Tools->Select Firebase.

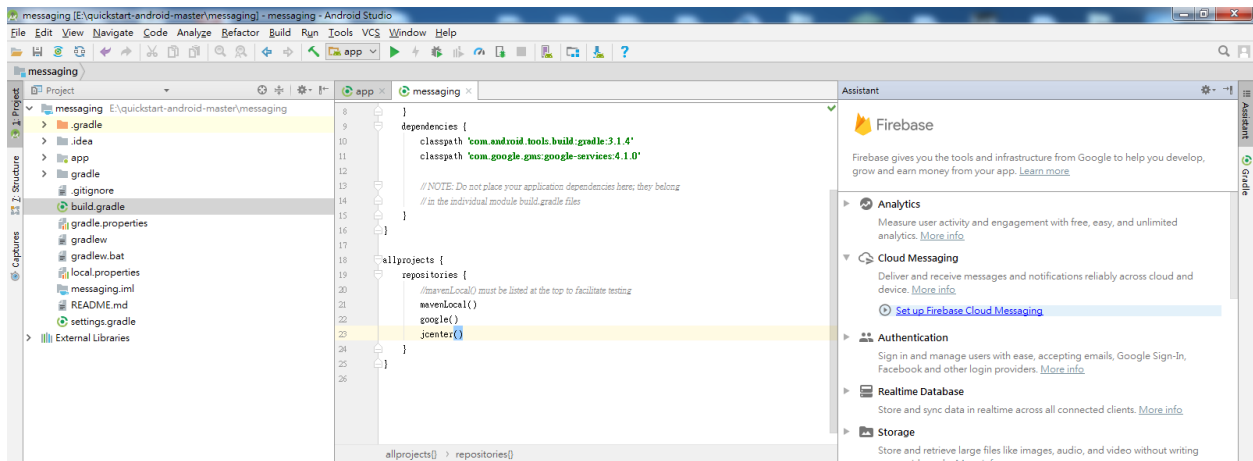

Open Firebase Assistant in the right pane, then see Cloud Messaging, select Set up Firebase Cloud Messaging to start the registration process.

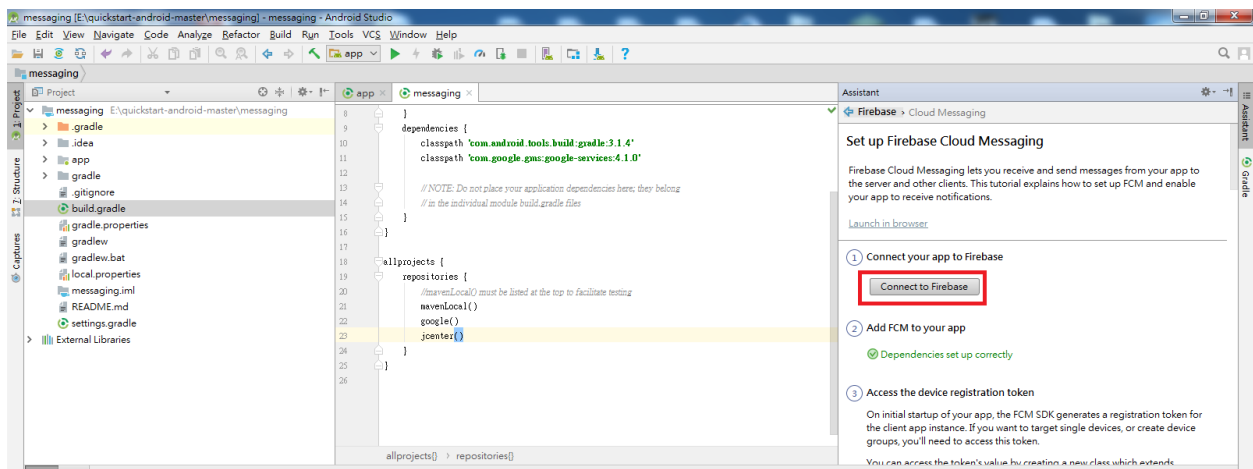

Click Connect to Firebase




Login to Android Studio


Use your Google Account to login to Android Studio and unlock the following services for your Android app:




Then bring out the page, and click on Firebase on the left and log in to the Gmail account. Once you log in, you will be taken to the Firebase homepage.

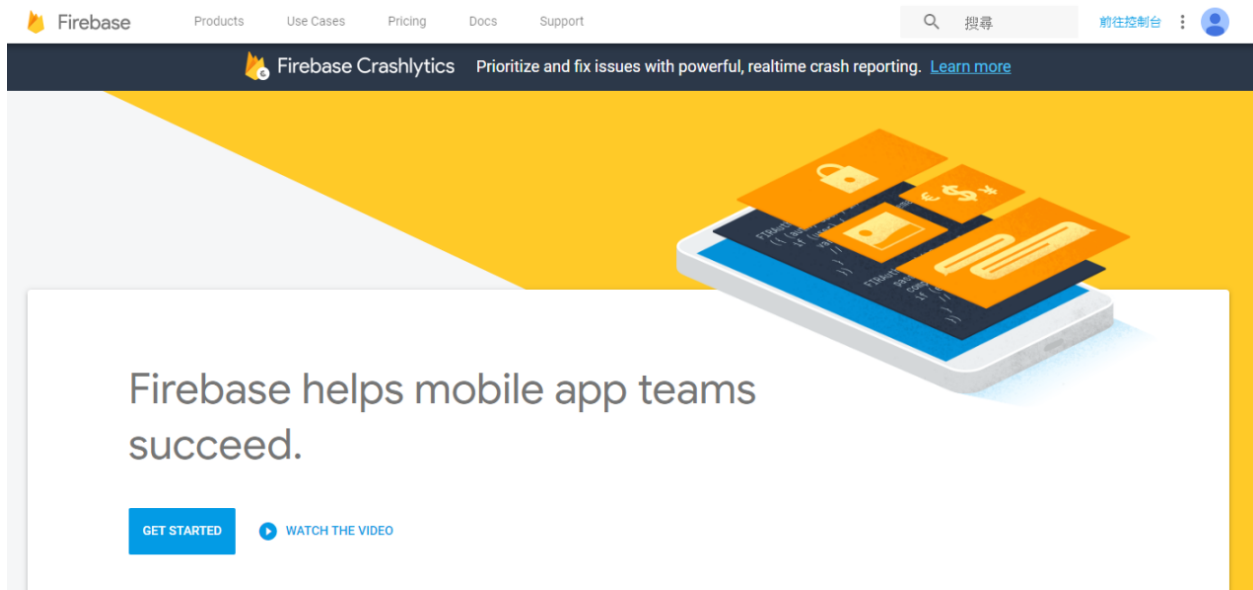

Let's keep the homepage first, we need to go to the Firebase Console and go back to Android Studio.

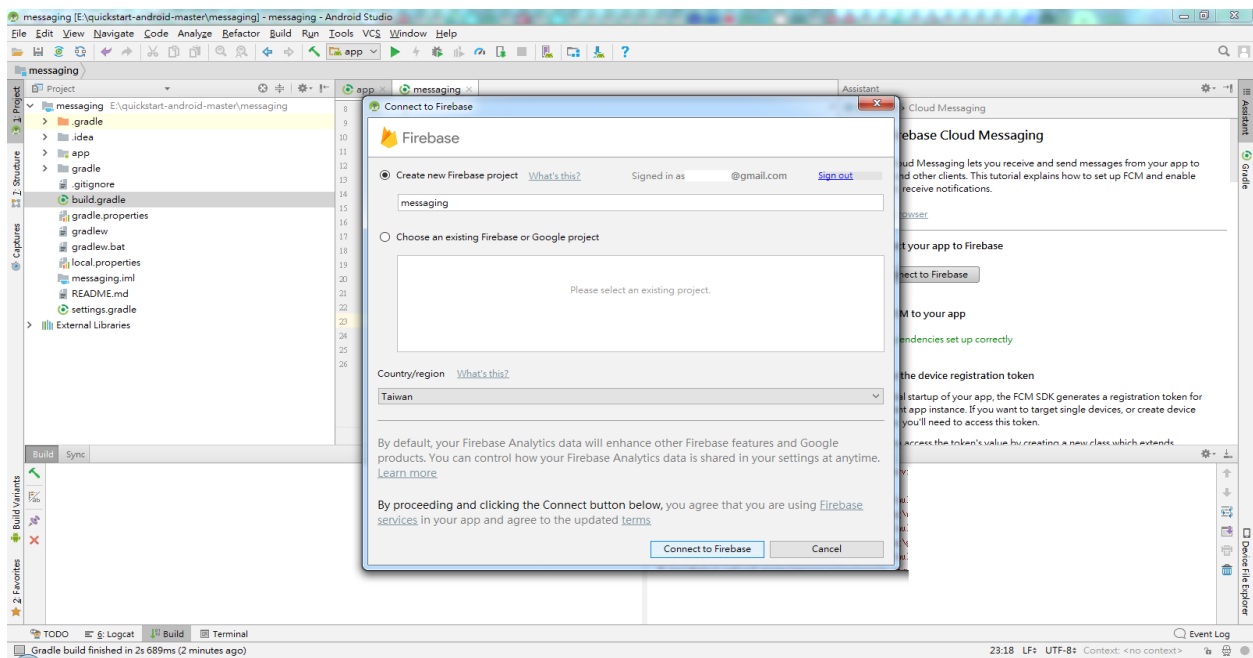


We can see that when the webpage is successfully logged in, Android Studio also brings up the login information dialog box, click connect to Firebase

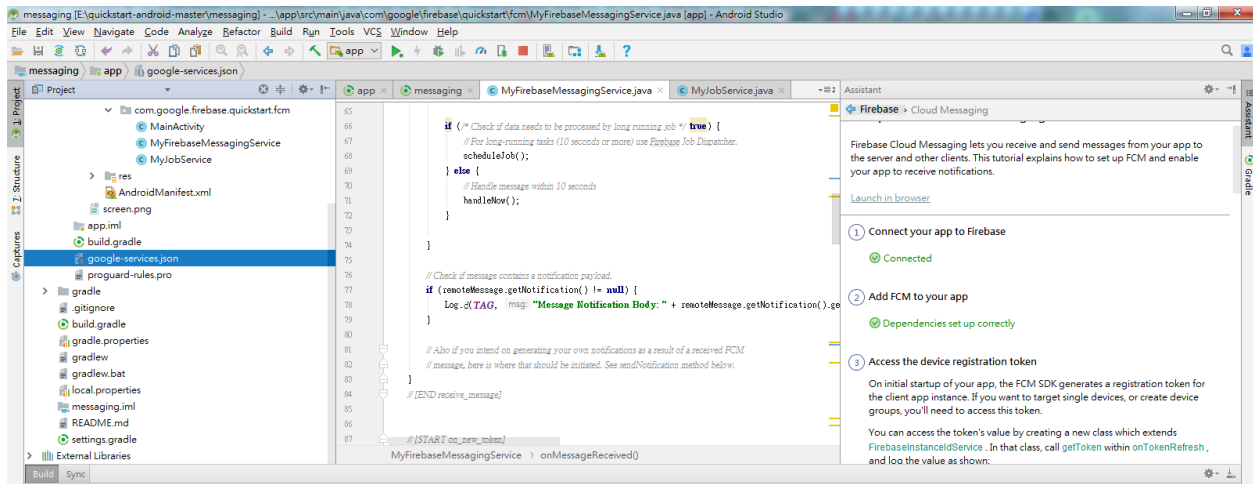


You can see Dependencies set up correctly in the right pane and see a google-service.json file in the left pane, indicating that the app has been registered successfully.

At this point, you can connect your phone to your computer (press Shift+F10) or press the Runs App in the toolbar. Please note here that Firebase requires a mobile phone to provide Google play service (GPS) service. An example of not being able to use Firebase without installing Google Play.

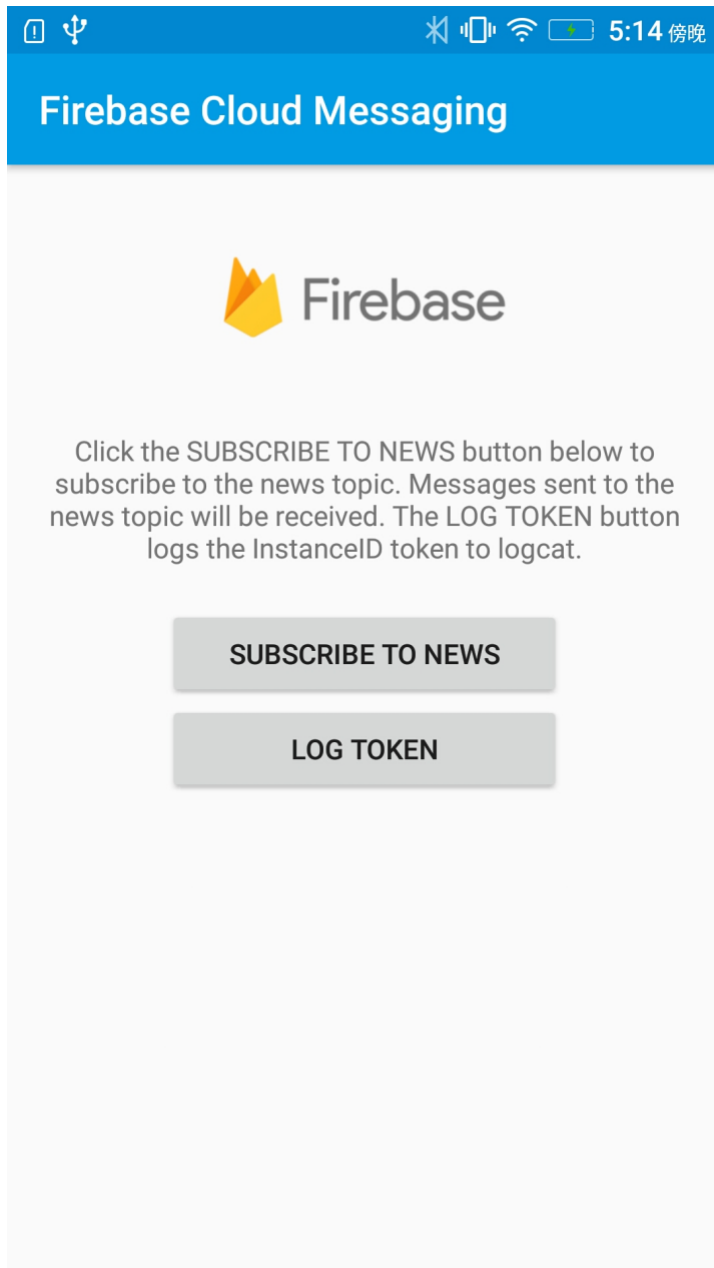


As shown above, the messaging app is installed and executed successfully on the phone. Click LOG TOKEN at this time.

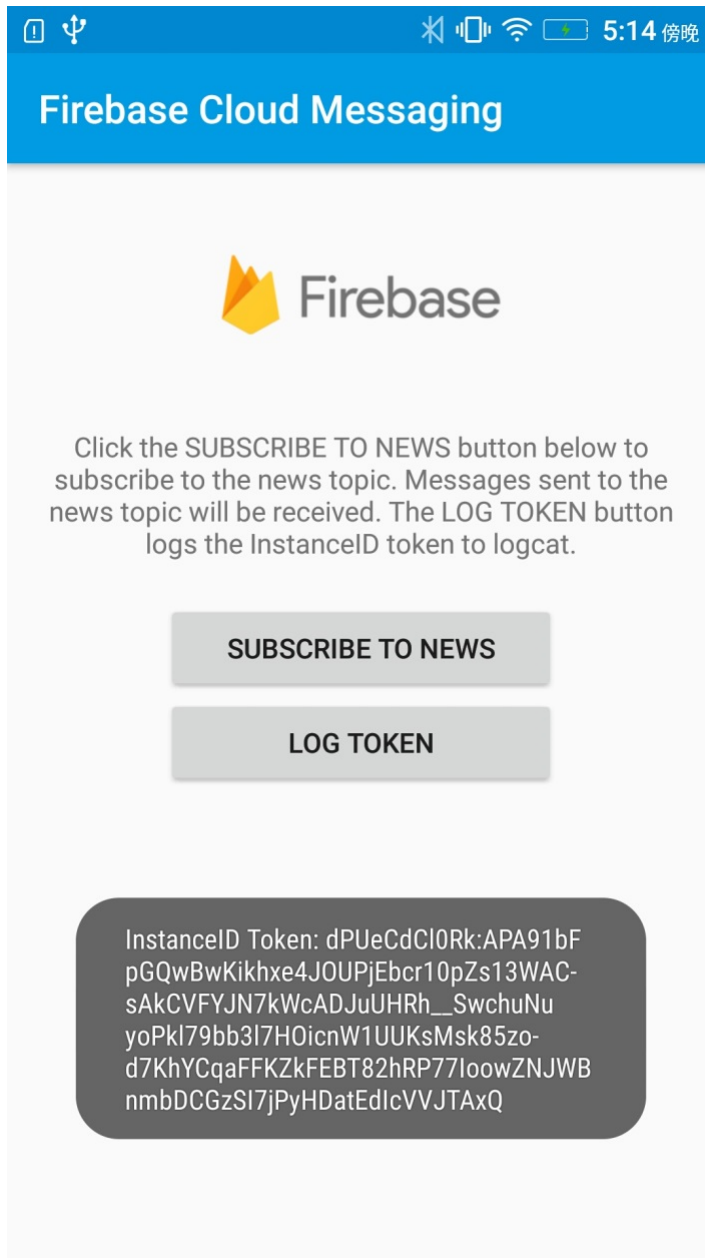


There will be a Token ID, which is the Access Token required to send the message, representing the ID of the FCM service APP installed on a particular phone. This ID is unique and will be reassigned when the app is removed and re-installed. It means that the message can be sent to a specific phone. The FCM service can also push messages to a NEWS (Topic). This section can be found in Firebase topic-messaging:

<https://firebase.google.com/docs/cloud-messaging/android/topic-messaging>


Therefore, we need to save this Access Token, return to Android Studio as shown below, select Debug at the log level of the Logcat. When you press the LOG TOKEN button on the App, Logcat will print out the Access Token ID. We will save the code after the InstanceID Token: in the Log message.

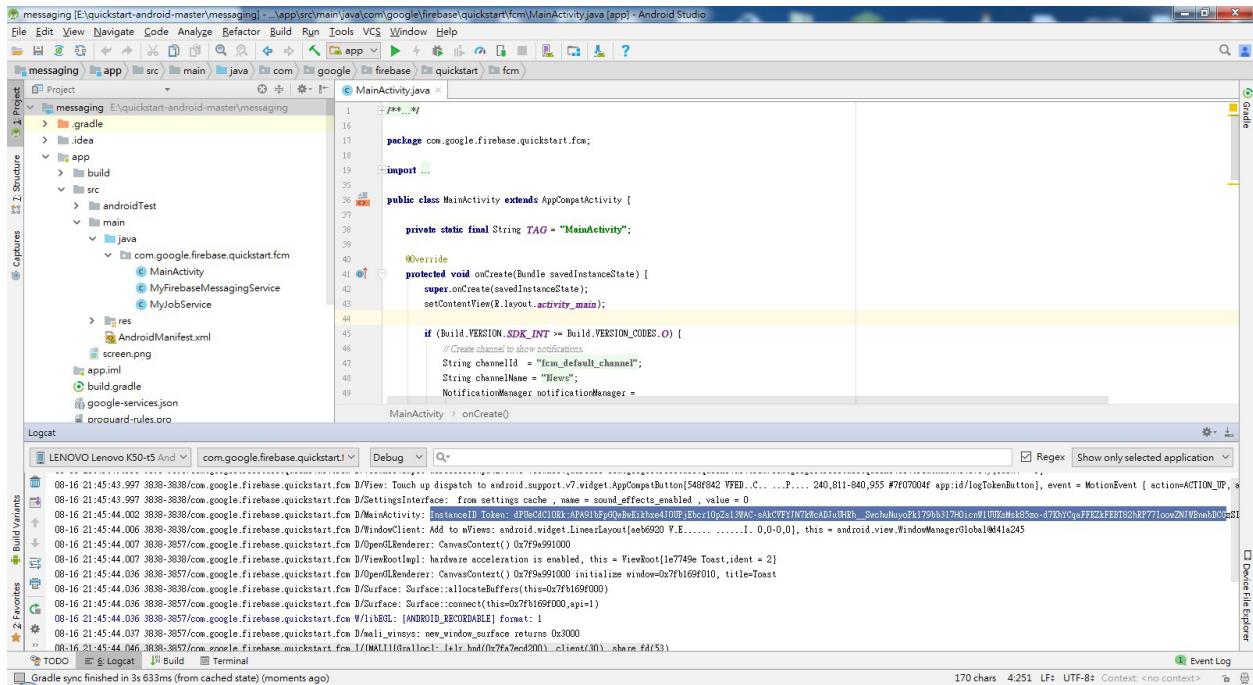


Then we have to go back to the page that was brought when we first logged into Firebase.

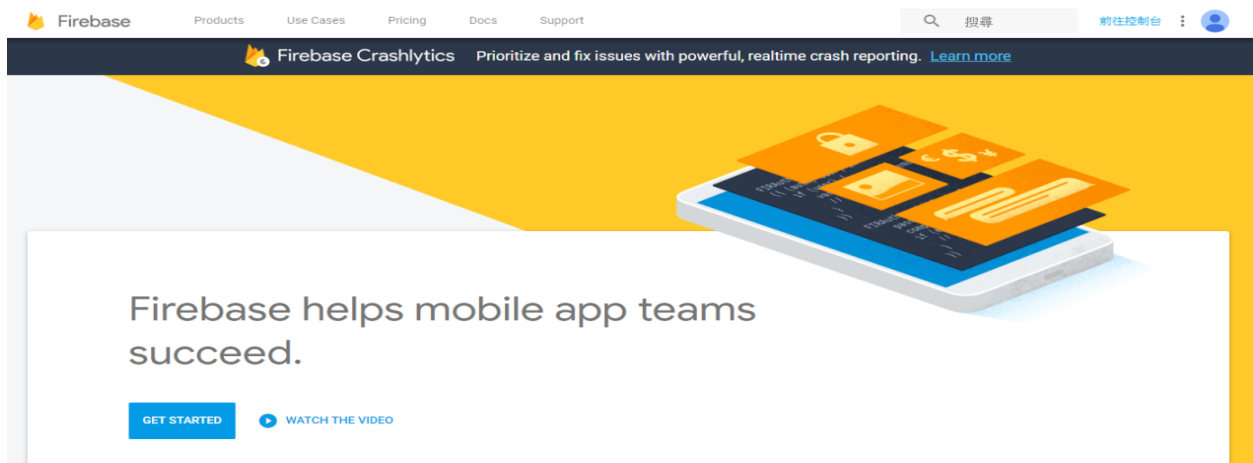


Click in the upper right corner to go to the console

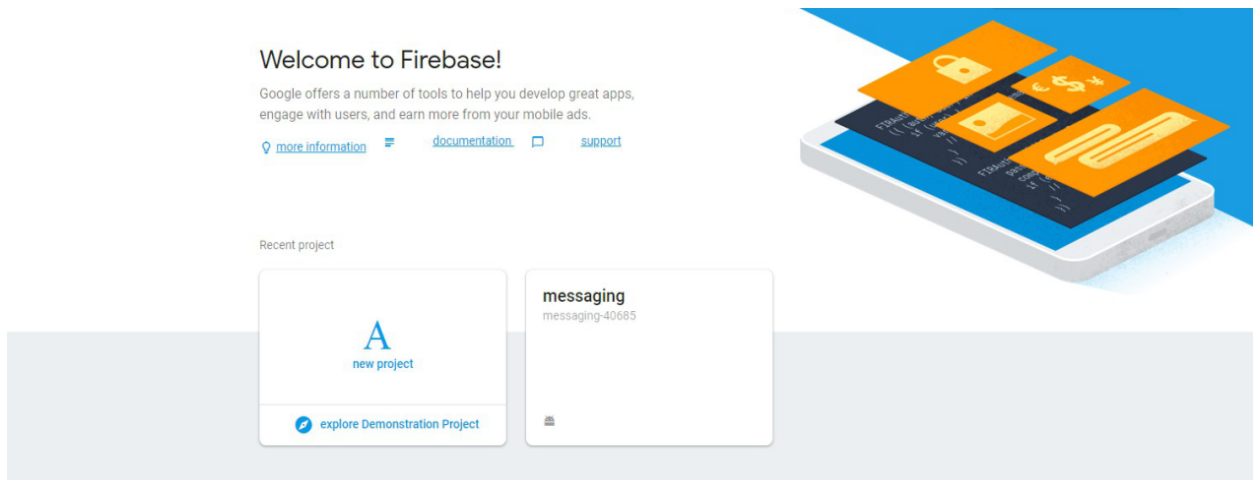


At this point, You can see that Android Studio has just built the messaging project for us in the operation.

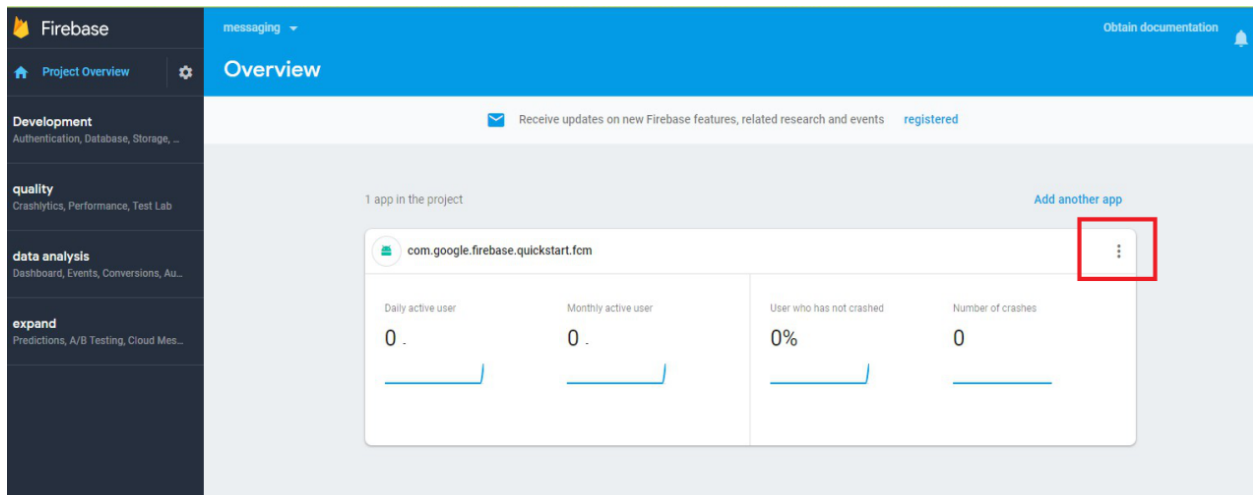

Click to enter the messaging project with settings page, as shown above.

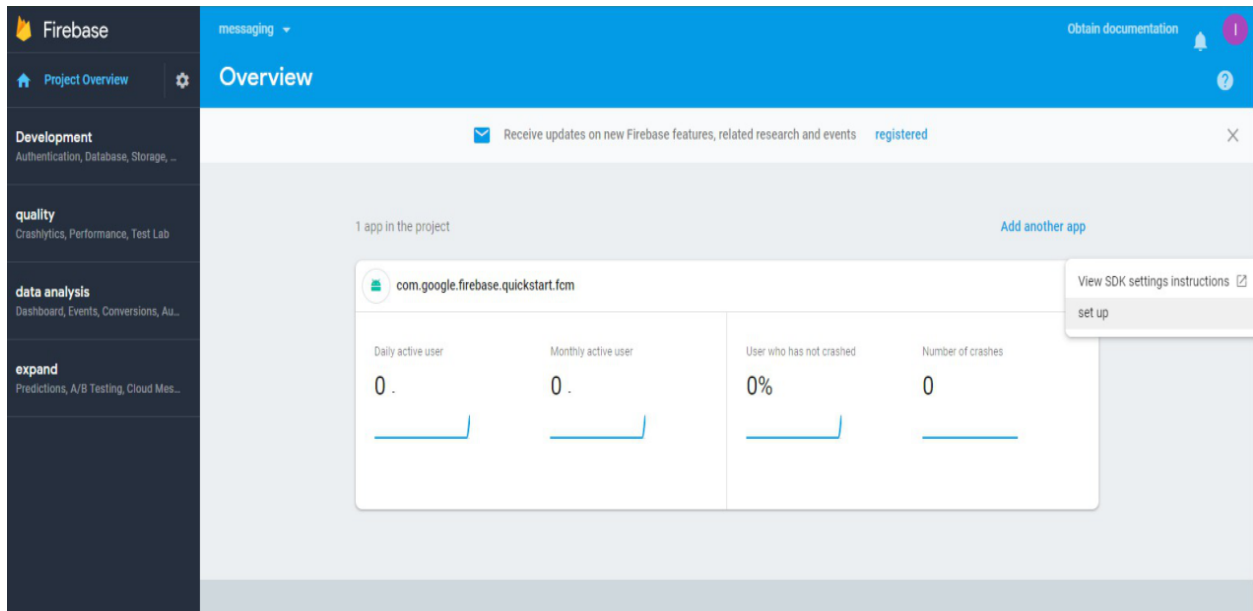


Select Set up

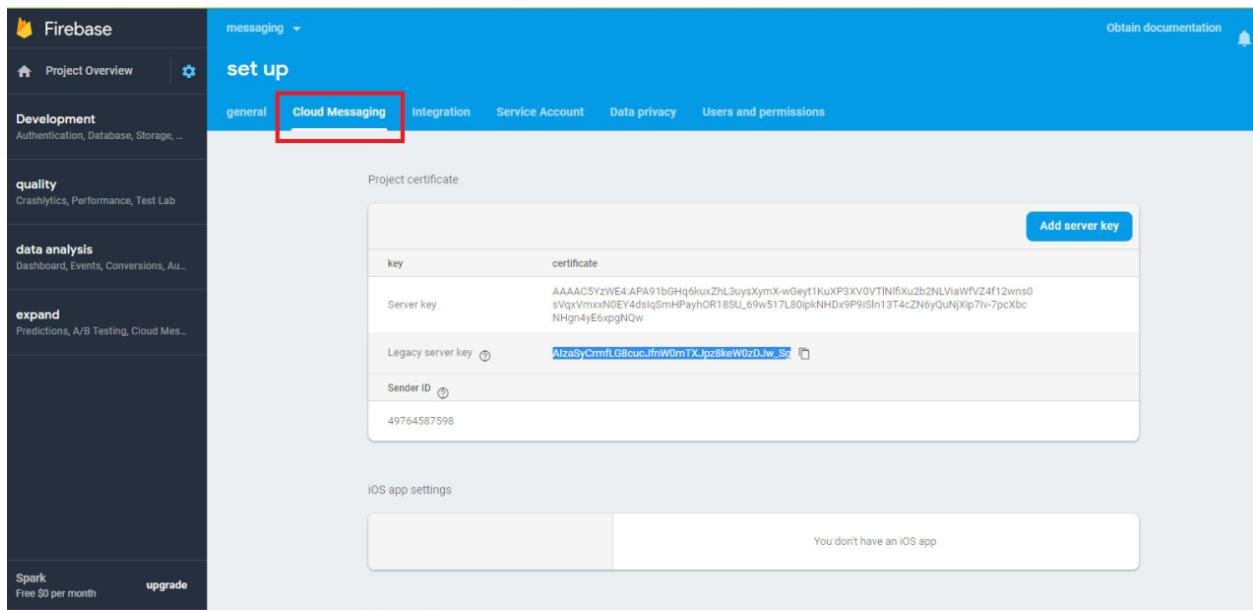

Go to the Settings page and select the Cloud Messaging page. We will see the Legacy server key. This Server key also needs to be used in the program. Let's save it and start editing the code.

Open the example "File" -> "Examples" -> "AmebaWiFi" -> "Firebase.ino"

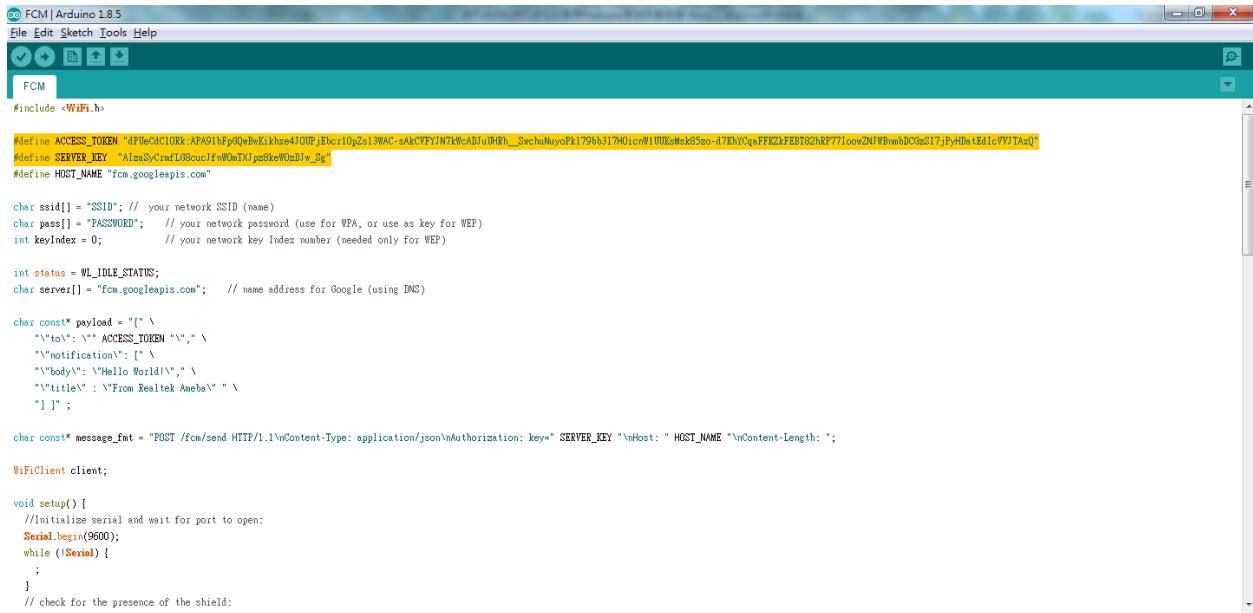

```

FCM | Arduino 1.8.5
File Edit Sketch Tools Help

FCM

#include <WiFi.h>

#define ACCESS_TOKEN "dFileOC10Rk:APA91bFpQbWkixze4J0IF_eHcr10pZs1WAC-sAkCYFYJN7KwADJuIHkH_ScehuNuyoPk179bK317H0icwfl1UUsMsk85zo-47EDV0qeFFK2KFEBT02hRP77/coow2NtVEmwBD0ss17jPp4Hba4EdicV71TAcQ"
#define SERVER_KEY "AImSjCmfL08oucFmWOnTXjgs8keWozDw_2g"
#define HOST_NAME "fcm.googleapis.com"

char ssid[] = "SSID"; // your network SSID (name)
char pass[] = "PASSWORD"; // your network password (use for WPA, or use as key for WEP)
int keyIndex = 0; // your network key Index number (needed only for WEP)

int status = WL_IDLE_STATUS;
char server[] = "fcm.googleapis.com"; // name address for Google (using DNS)

char const* payload = "[{" \
  "\"to\": \"\" ACCESS_TOKEN \"\", \" \" \
  "\"notification\": { \" \" \
  "\"body\": \"Hello World!\" \" \" \
  "\"title\": \"From Realtek Ameba\" \" \" \
  "} ]";


char const* message_fmt = "POST /fcm/send HTTP/1.1\nContent-Type: application/json\nAuthorization: key= \"SERVER_KEY \"\nHost: \"HOST_NAME \"\nContent-Length: ";

WiFiClient client;

void setup() {
  //Initialize serial and wait for port to open:
  Serial.begin(9600);
  while (!Serial) {
    ;
  }
  // check for the presence of the shield:

```

As shown above, ACCESS_TOKEN and SERVER_KEY are defined in the reverse white part, that is, the ACCESS token ID that we just saved from the APP and the Server Key saved in the Firebase console page. We fill in the two sets of IDs, compile and upload them to Ameba. Press the Reset button and open the terminal.

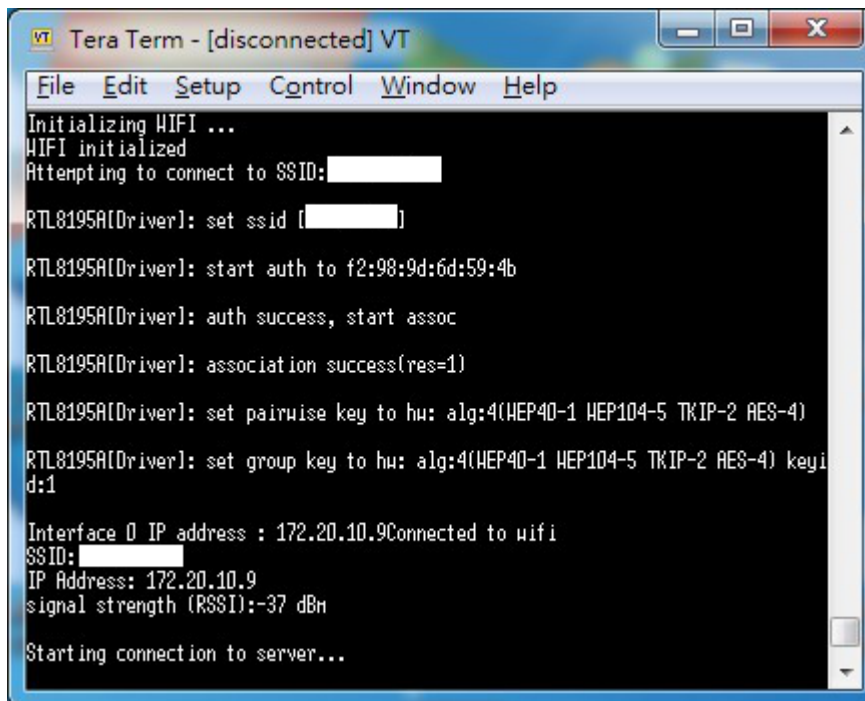

```

VT Tera Term - [disconnected] VT
File Edit Setup Control Window Help

Initializing WIFI ...
WIFI initialized
Attempting to connect to SSID: [redacted]

RTL8195A(Driver): set ssid [redacted]
RTL8195A(Driver): start auth to f2:98:9d:6d:59:4b
RTL8195A(Driver): auth success, start assoc
RTL8195A(Driver): association success(res=1)
RTL8195A(Driver): set pairwise key to hu: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4)
RTL8195A(Driver): set group key to hu: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4) keyi
d:1

Interface 0 IP address : 172.20.10.9Connected to wifi
SSID: [redacted]
IP Address: 172.20.10.9
signal strength (RSSI):-37 dBm

Starting connection to server...

```

Connect to FCM Server after connecting to AP


```
Connect to Server successful!  
connected to server
```

```
Request:  
POST /fcm/send HTTP/1.1  
Content-Type: application/json  
Authorization: key=AIzaSyCrmfLG8cucJfnH0nTXJpz8keH0zDJu_Sg  
Host: fcm.googleapis.com  
Content-Length: 258
```

```
{ "to": "dPUeCdC1ORk:APA91bFpGQuBuKikhxe4JOUPjEbc10pZs13HAC-sAkCVFYJN7kH  
h_SuchuMuyoPk179bb317H0icnH1UUKsHsk85zo-d7KhYCqaFFKZkFEBT82hRP77IoouZHNJ  
zSI7jPyHdatEdIcVWJTAxQ", "notification": { "body": "Hello World!", "title":  
Realtek Ameba" } }
```

```
HTTP/1.1 200 OK  
Content-Type: application/json; charset=UTF-8  
Date: Thu, 16 Aug 2018 10:47:30 GMT  
Expires: Thu, 16 Aug 2018 10:47:30 GMT  
Cache-Control: private, max-age=0  
X-Content-Type-Options: nosniff  
X-Frame-Options: SAMEORIGIN
```

After showing Connect to Server successful, it means that the FCM connection is successful and the message will be sent. During the process, HTTP/1.1 200 OK will be received to indicate that the message is successfully pushed. At this time, the mobile phone screen is opened and the App receives the message from Ameba.

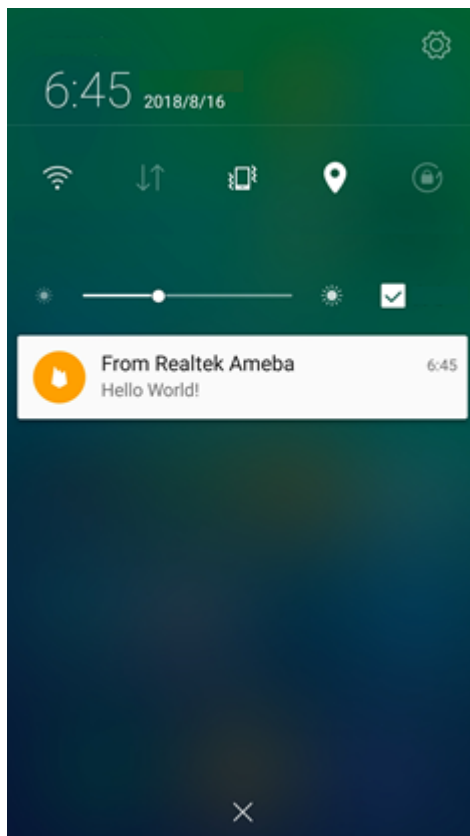

Code Reference

Firebase.ino

This example uses the HTTP protocol to push messages. Users can learn the payload format from the Firebase development website.

<https://firebase.google.com/docs/cloud-messaging/send-message>

The main payload format in the program is as follows. The user can freely change the Title and Body of the message. Body represents the content of the message.

```
char const* payload = "{" \
  "\"to\": \"" ACCESS_TOKEN "\", \"\
  "\"notification\": { \"\
  "\"body\": \"Hello World!\", \"\
  "\"title\" : \"From Realtek Ameba\" \"\
  \"} }\" ;
```

```
setup() {
  if (client.connect(server, 80)) {
    Serial.println("connected to server");
    // Make a HTTP request:
    sprintf(message, "%s%s%s%s%s%d%s%s", "POST /fcm/send HTTP/1.1\nContent-Type:
↪application/json\nAuthorization: key=", SERVER_KEY, "\nHost: ", HOST_NAME, "\nContent-
↪Length: ", strlen(payload), "\n\n", payload, "\n");
    printf("\nRequest:\n%s \n", message);
    client.println(message);
    client.println();
  }
}
```

The sprintf part puts the payload into the HTTP POST content and sends the message out after connecting to the FCM Server.

```
loop() {
  while (client.available()) {
    char c = client.read();
    Serial.write(c);
  }
}
```

Waiting for the response from Server and printing out the response.


Access IFTTT Via Ameba

Introduction to IFTTT

IFTTT, known as If This Then That, is a website and mobile app and free web-based service to create the applets, or the chains of simple conditional statements. The applet is triggered by changes that occur within other web services such as Gmail, Facebook, Telegram, Instagram, Pinterest etc.

Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- An account from <https://ifttt.com/> , in order to access IFTTT service*

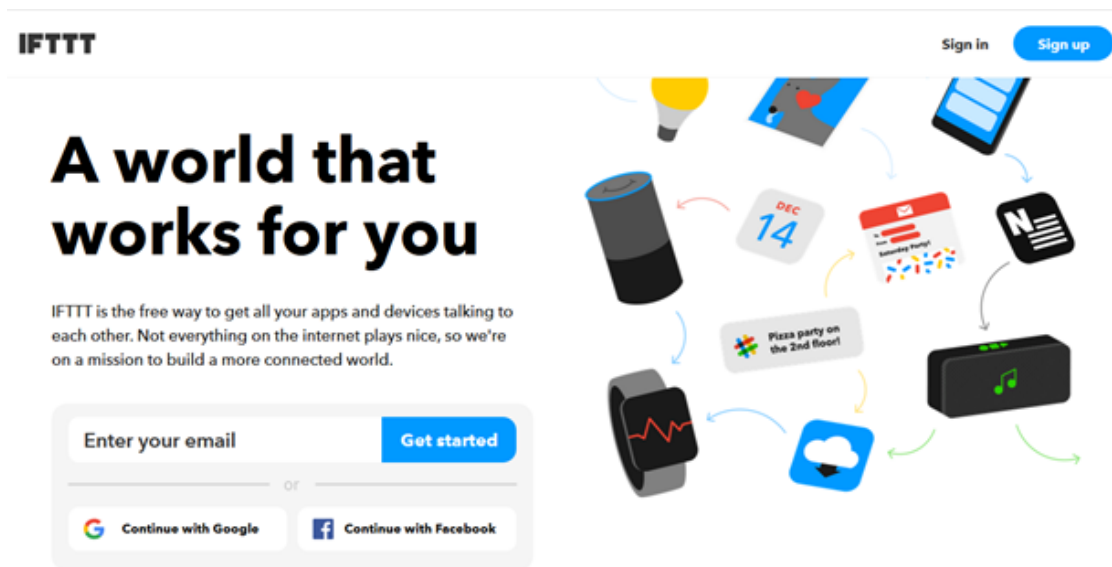

注解: Upon log in, there are several cloud and online services that are integrated with IFTTT platforms.


Example

- Generate Applet from IFTTT


In this example, we obtain an example of IFTTT Applet to send email to specified recipient.

To run the example, HTTP POST feature of the Ameba is used to post a simple webhook service that is received by IFTTT platform and in turn be used to trigger a response (sending an email).


After logging in <https://ifttt.com/>, click **Create** from the top bar.

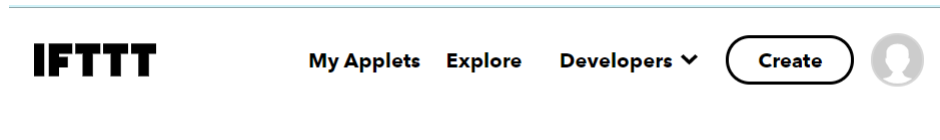


Click “Add” to add the trigger.

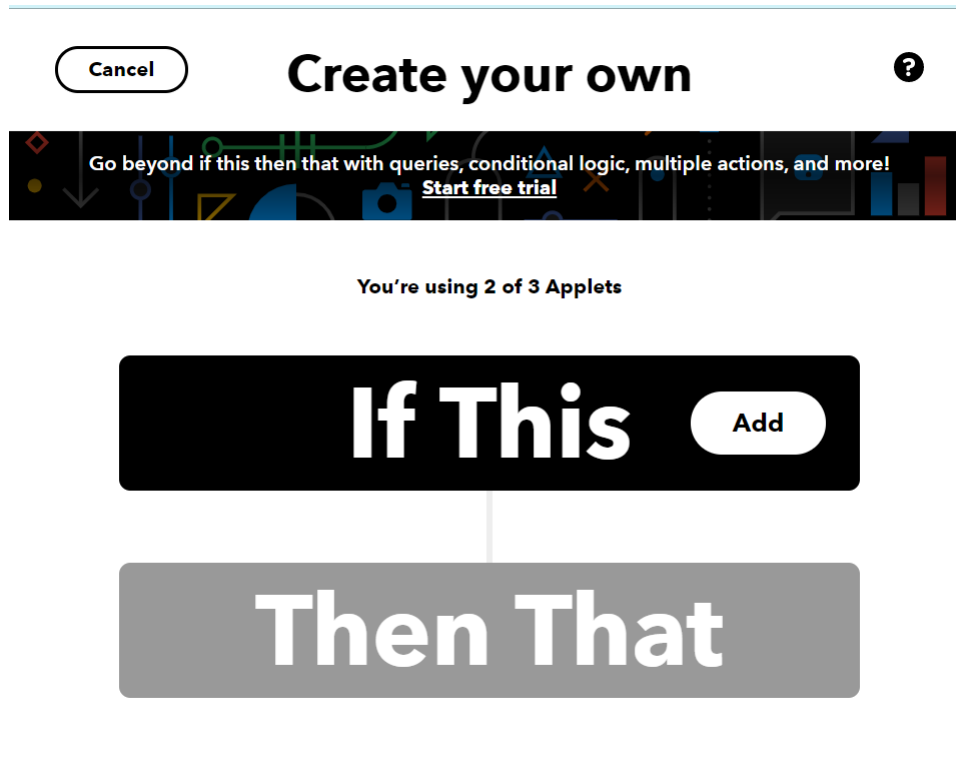

Choose Webhooks service as shown below. Alternatively, search the service by typing into the search bar.

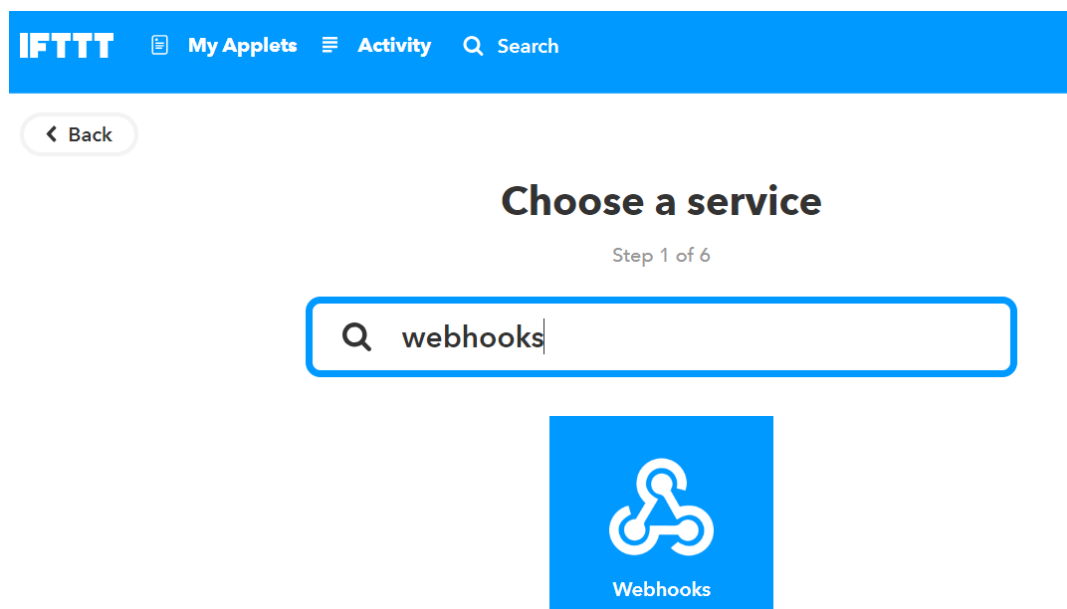

After that, the available triggers will appear. Choose Receive a Web request.

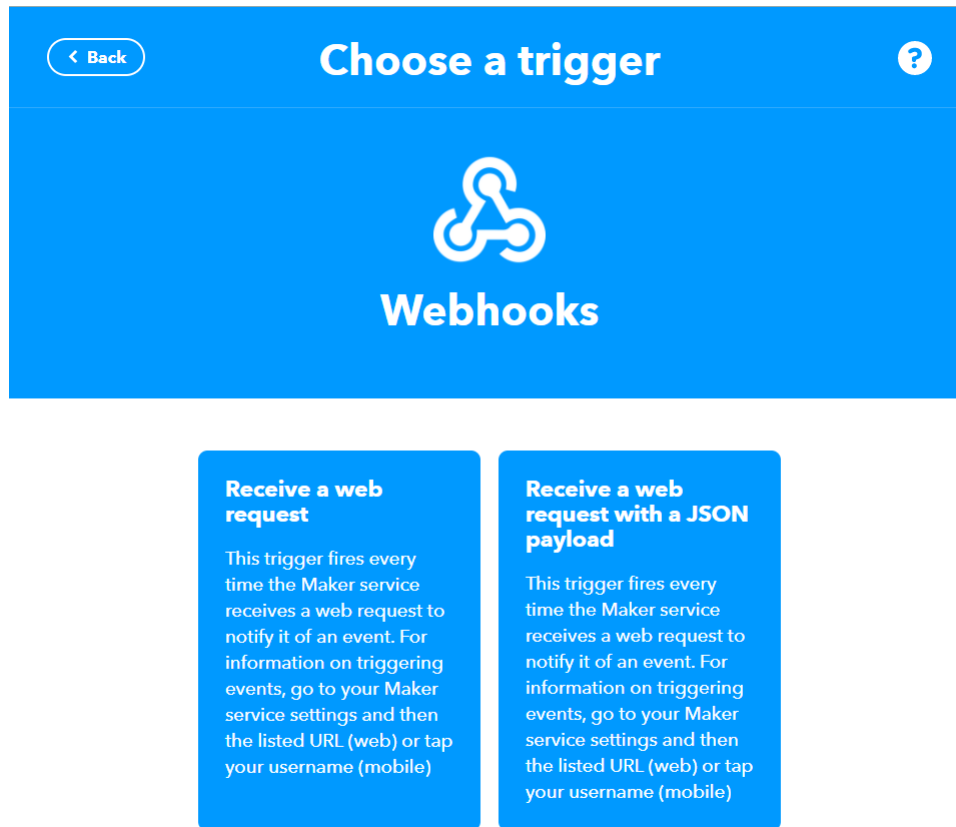


Next, an Event Name is required to identify the trigger successfully. In this example, set the Event name as “test_event” .

[< Back](#)

Complete trigger fields

?



Receive a web request

This trigger fires every time the Maker service receives a web request to notify it of an event. For information on triggering events, go to your Maker service settings and then the listed URL (web) or tap your username (mobile)

Event Name

The name of the event, like "button_pressed" or "front_door_opened"

Create trigger

Next, click **Add** in Then That field to create the action service taken in response to the last trigger.


[< Cancel](#)

Create your own

?

Go beyond if this then that with queries, conditional logic, multiple actions, and more! [Start free trial](#)

You're using 2 of 3 Applets

IfReceive a web request


EditDelete

+


Then That

Add

Choose Email as the action service.

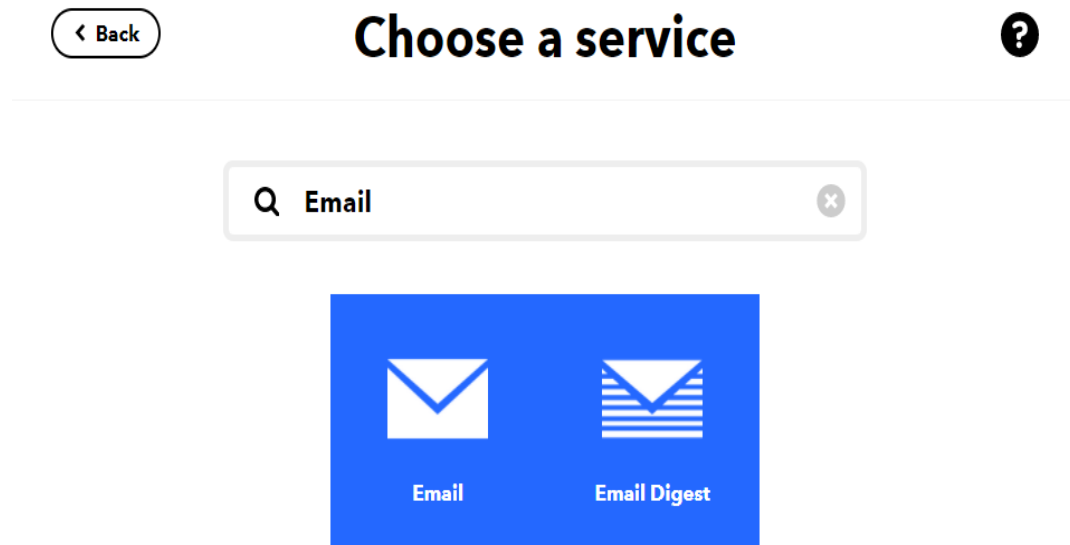

Click on Send me an email.

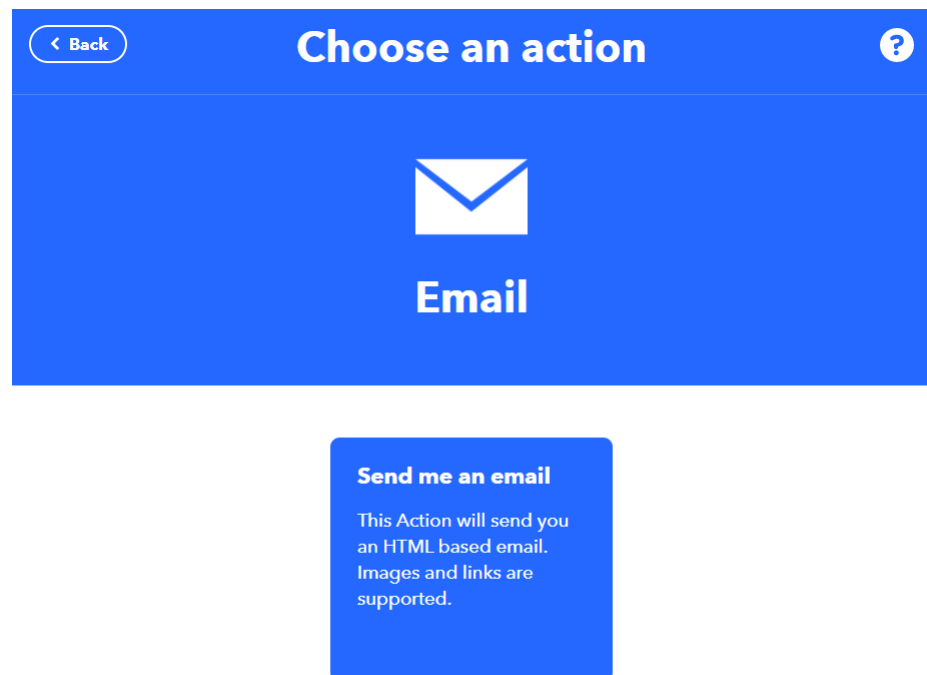

Under the template of **Send me an Email**, the contents of the email, such as subject and body is editable. Click **Create Action** to complete the action. Take note that **Email service** is offered to the

email address registered under IFTTT account.

The screenshot shows the IFTTT 'Complete action fields' interface for the 'Send me an email' action. The background is blue. At the top left is a '< Back' button, and at the top right is a help icon (?). In the center, there is a white envelope icon, the title 'Send me an email', and a note: 'This Action will send you an HTML based email. Images and links are supported.' Below this, there are two main sections: 'Subject' and 'Body'. The 'Subject' section contains a text box with the text 'The event named " **EventName** " occurred on the Maker Webhooks service' and an 'Add ingredient' button. The 'Body' section contains a text box with the text 'What: **EventName**
 When: **OccurredAt**
 Extra Data: **Value1** , **Value2** , **Value3** ,' and another 'Add ingredient' button. At the bottom center is a large blue button labeled 'Create action'.


- Post the Trigger via Ameba

Once the Applet is ready in the IFTTT dashboard, the example program can be flashed onto the Ameba board to post the HTTP request.

Open the example code in “File” -> “Examples” -> “AmebaWiFi” -> “HTTP_IFTTT_Post”

In the example program, edit the following 3 items inside the code to make the program work.

1. The WiFi credentials to connect to the Wi-Fi hotspot or access point of desirable choice.
2. Under the Host name field, enter the host name of the IFTTT service “maker.ifttt.com” .
3. Under the Path name field, enter the Event name and key field “/trigger/Event name/with/key/Key Field”
 - Event name: The event name should be the same as the one specified in the IFTTT applet. In this example, the event name is “test_event” .
 - Key Field: Available under webhook service in individual IFTTT account. See the next step for the steps to obtain the Key Field.

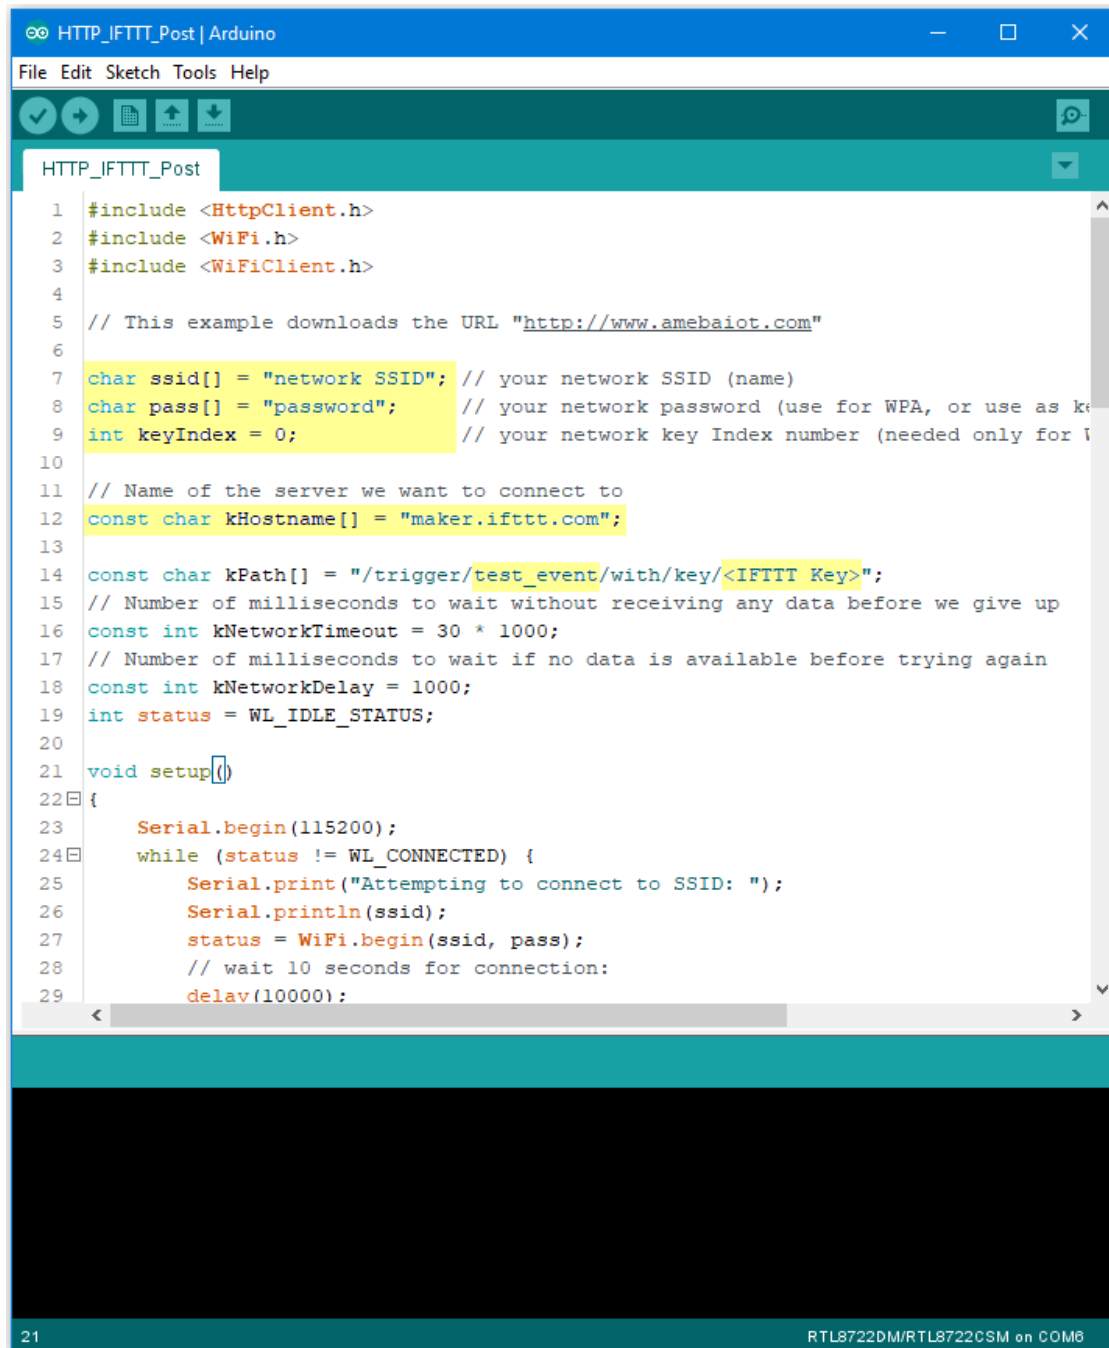

```
1 #include <HttpClient.h>
2 #include <WiFi.h>
3 #include <WiFiClient.h>
4
5 // This example downloads the URL "http://www.amebaiot.com"
6
7 char ssid[] = "network SSID"; // your network SSID (name)
8 char pass[] = "password";     // your network password (use for WPA, or use as key for WEP)
9 int keyIndex = 0;              // your network key Index number (needed only for WEP)
10
11 // Name of the server we want to connect to
12 const char kHostname[] = "maker.ifttt.com";
13
14 const char kPath[] = "/trigger/test_event/with/key/<IFTTT Key>";
15 // Number of milliseconds to wait without receiving any data before we give up
16 const int kNetworkTimeout = 30 * 1000;
17 // Number of milliseconds to wait if no data is available before trying again
18 const int kNetworkDelay = 1000;
19 int status = WL_IDLE_STATUS;
20
21 void setup()
22 {
23     Serial.begin(115200);
24     while (status != WL_CONNECTED) {
25         Serial.print("Attempting to connect to SSID: ");
26         Serial.println(ssid);
27         status = WiFi.begin(ssid, pass);
28         // wait 10 seconds for connection:
29         delay(10000);
30     }
31 }
```


21

RTL8722DM/RTL8722CSM on COM8


To obtain a key from documentation tab of the Webhooks, find the webhook service in the Explore tab.



On the Webhooks service page, click on the Documentation tab.

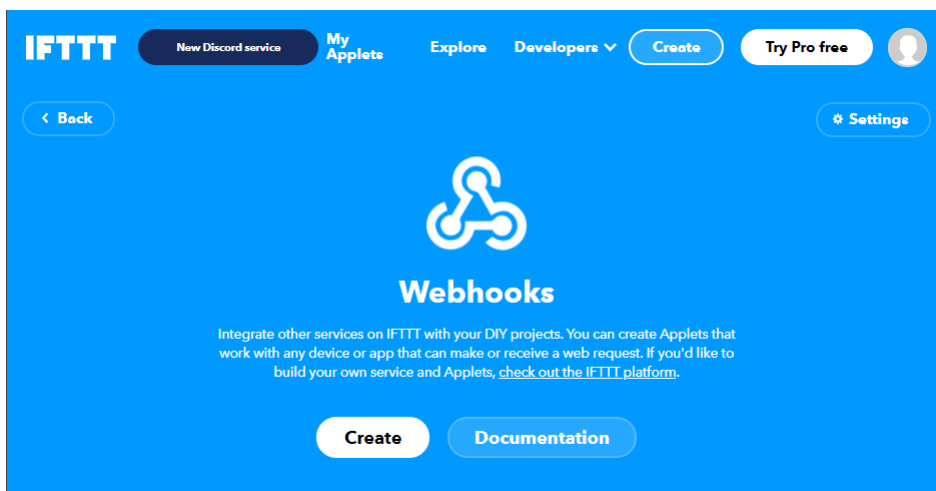


The key can be found in the documentation page. Also, information on how HTTP request can be used.

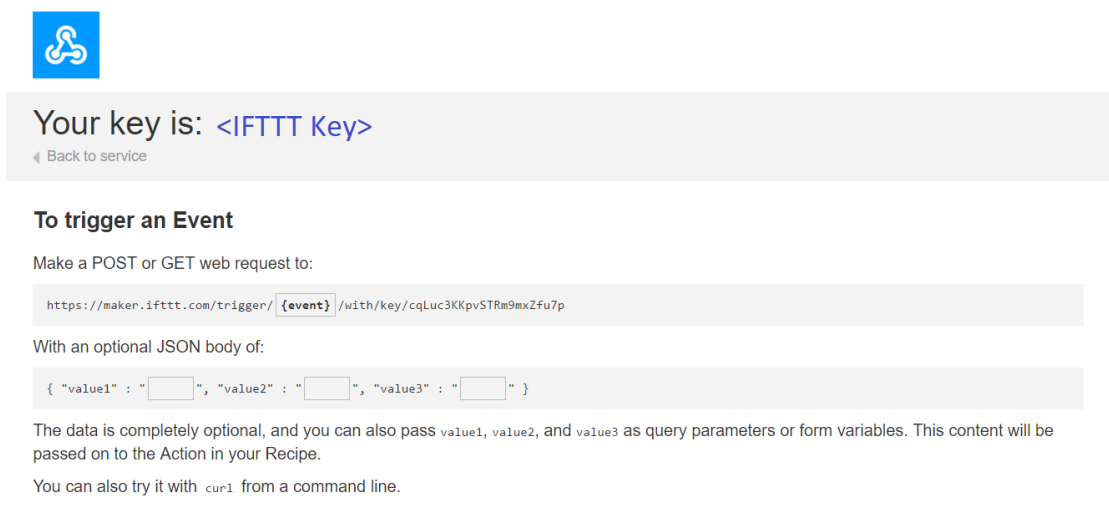


Once the example is ready, connect to Ameba board via USB Cable.

On the Arduino IDE, compile the code and upload the code onto Ameba and press the reset button. After the event has been successfully fired, “Congratulations! You have fired the test_event event” can be seen on the serial monitor and an email reminder for this event will be delivered.

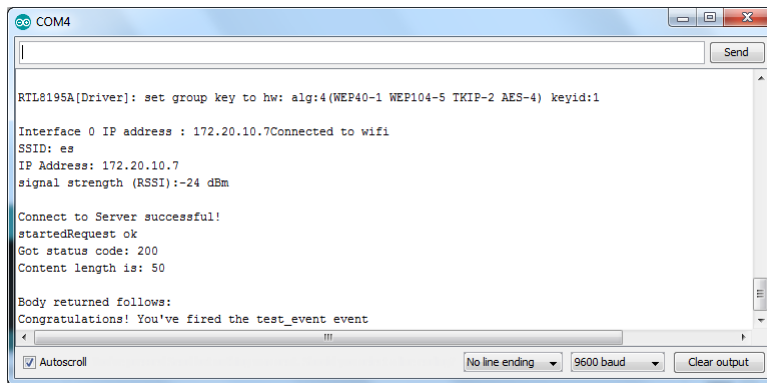

Thereafter an email is sent to recipient email account registered at IFTTT Applet and email notification will be received.

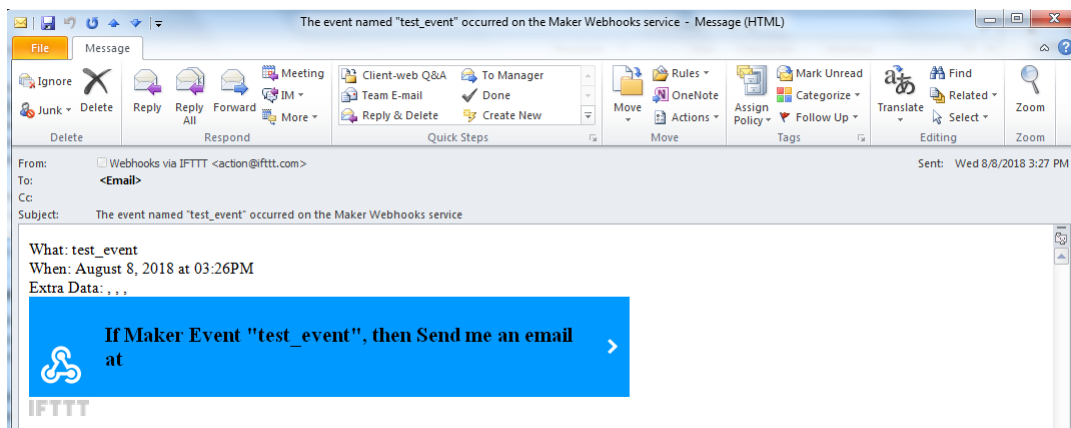

Use Ameba To Securely Retrieve Information From The Internet


Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1


Example

This example uses Ameba to securely retrieve information from the internet using SSL. SSL is an acronym for Secure Sockets Layer. It is a cryptographic protocol designed to provide communications security over a computer network, by encrypting the messages passed between server and client.

Open the “WiFiSSLClient” example in “File” -> “Examples” -> “AmebaWiFi” -> “WiFiSSLClient”

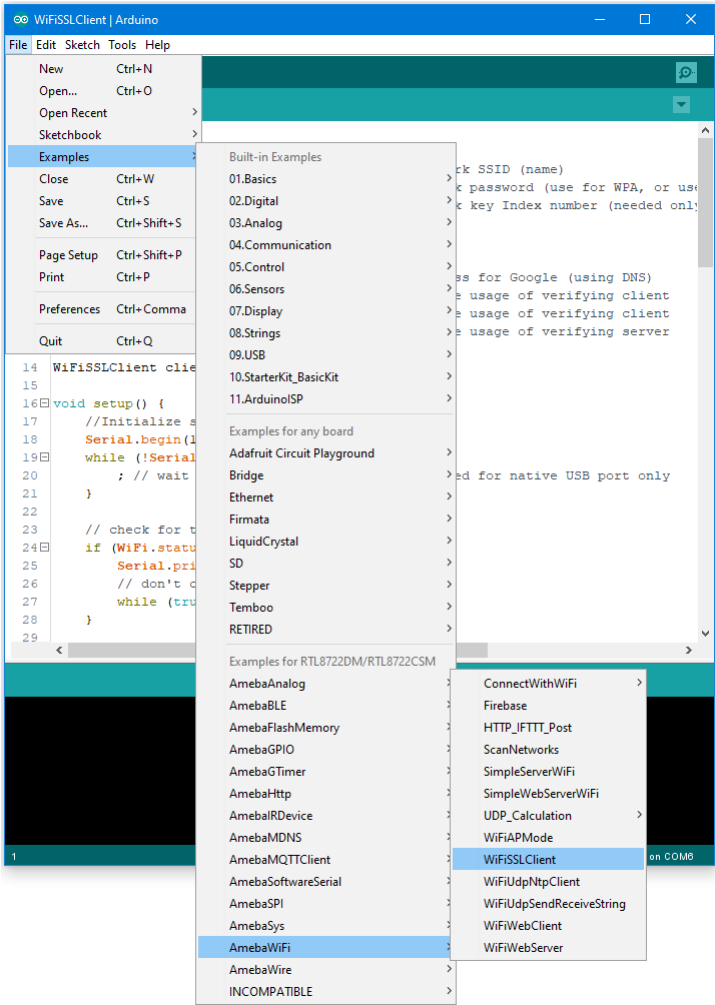

In the sample code, modify the highlighted snippet to reflect your WiFi network settings.

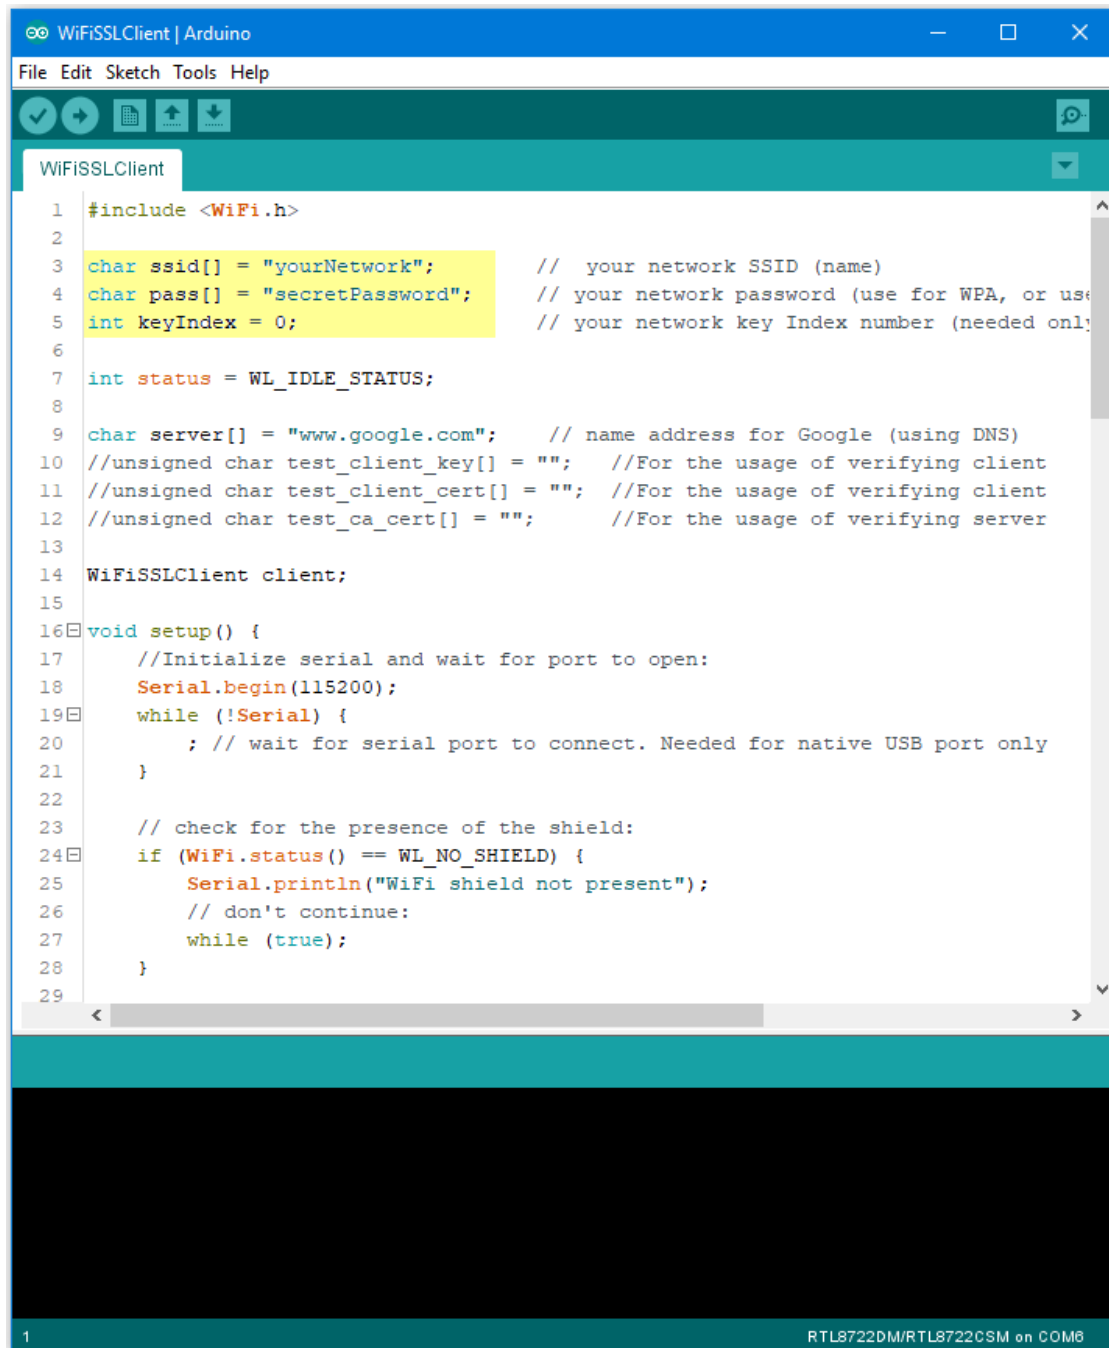


```
1 #include <WiFi.h>
2
3 char ssid[] = "yourNetwork";    // your network SSID (name)
4 char pass[] = "secretPassword"; // your network password (use for WPA, or use
5 int keyIndex = 0;                // your network key Index number (needed only)
6
7 int status = WL_IDLE_STATUS;
8
9 char server[] = "www.google.com"; // name address for Google (using DNS)
10 //unsigned char test_client_key[] = ""; //For the usage of verifying client
11 //unsigned char test_client_cert[] = ""; //For the usage of verifying client
12 //unsigned char test_ca_cert[] = ""; //For the usage of verifying server
13
14 WiFiSSLClient client;
15
16 void setup() {
17     //Initialize serial and wait for port to open:
18     Serial.begin(115200);
19     while (!Serial) {
20         ; // wait for serial port to connect. Needed for native USB port only
21     }
22
23     // check for the presence of the shield:
24     if (WiFi.status() == WL_NO_SHIELD) {
25         Serial.println("WiFi shield not present");
26         // don't continue:
27         while (true);
28     }
29 }
```

1

RTL8722DM/RTL8722CSM on COM8

Upload the code and press the reset button on Ameba once the upload is finished.

Open the serial monitor in the Arduino IDE and observe as Ameba retrieves a text file from os.mbed.com.

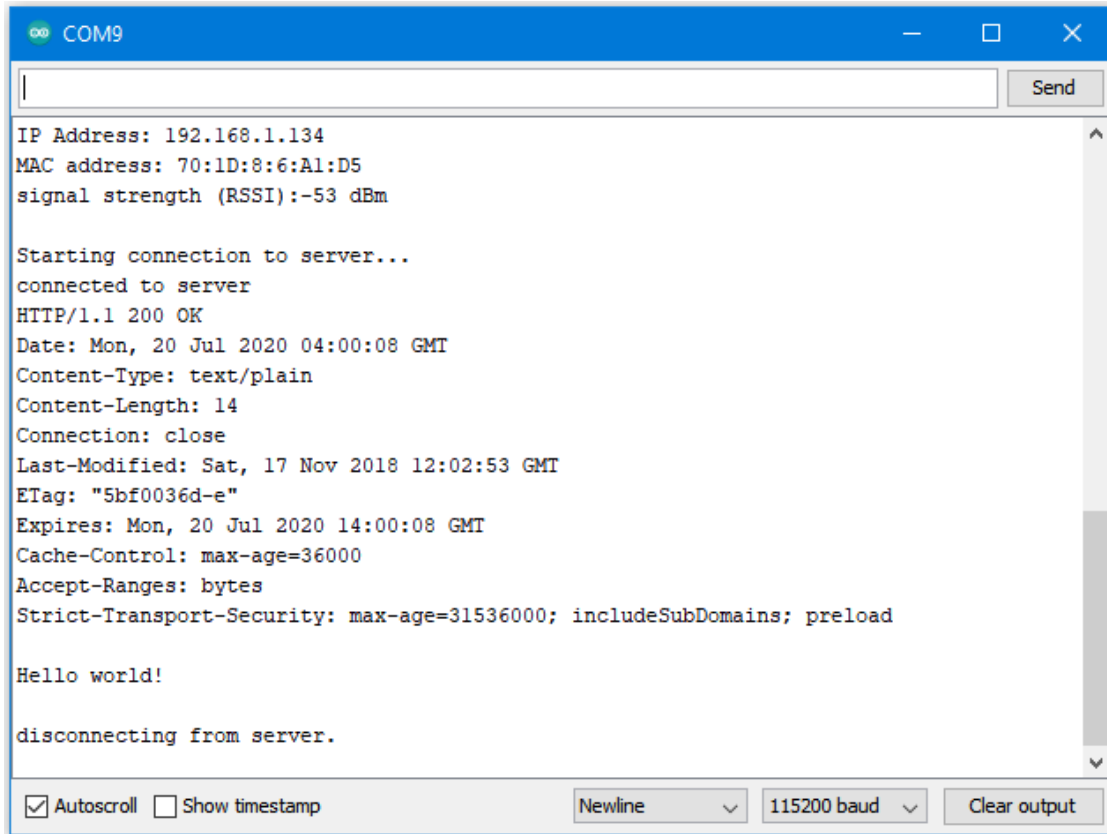

```
COM9
IP Address: 192.168.1.134
MAC address: 70:1D:8:6:A1:D5
signal strength (RSSI):-53 dBm

Starting connection to server...
connected to server
HTTP/1.1 200 OK
Date: Mon, 20 Jul 2020 04:00:08 GMT
Content-Type: text/plain
Content-Length: 14
Connection: close
Last-Modified: Sat, 17 Nov 2018 12:02:53 GMT
ETag: "5bf0036d-e"
Expires: Mon, 20 Jul 2020 14:00:08 GMT
Cache-Control: max-age=36000
Accept-Ranges: bytes
Strict-Transport-Security: max-age=31536000; includeSubDomains; preload

Hello world!

disconnecting from server.
```

☒ Autoscroll ☐ Show timestamp Newline 115200 baud Clear output

Code Reference

Use “WiFiSSLClient client;” to create a client that uses SSL. After creation, the client can be used in the same way as a regular client.

BLE –BLE Battery Service

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Android / iOS mobile phone

Example

Introduction

BLE connections use a server client model. The server contains the data of interest, while the client connects to the server to read the data. Commonly, a Bluetooth peripheral device acts as a server, while a Bluetooth central device acts as a

client. Servers can contain many services, with each service containing a some set of data. Clients can send requests to read or write some data and can also subscribe to notifications so that the server can send data updates to a client.

In this example, a basic battery service is set up on the Ameba Bluetooth stack. A mobile phone is used to connect to the Ameba peripheral device and read the battery data.

Procedure

Ensure that the following Bluetooth apps are installed on your mobile phone. These apps will show you the raw data sent by Ameba and allow you to interact with the data.


The recommended application is nRF connect, and is available at the links below:

- Android: <https://play.google.com/store/apps/details?id=no.nordicsemi.android.mcp>
- iOS : <https://apps.apple.com/us/app/nrf-connect/id1054362403>

LightBlue is an alternative application that can also be used, but has less features:


- Android: <https://play.google.com/store/apps/details?id=com.punchthrough.lightblueexplorer>
- iOS : <https://apps.apple.com/us/app/lightblue/id557428110>

Open the example, “Files” -> “Examples” -> “AmebaBLE” -> “BLEBatteryService”

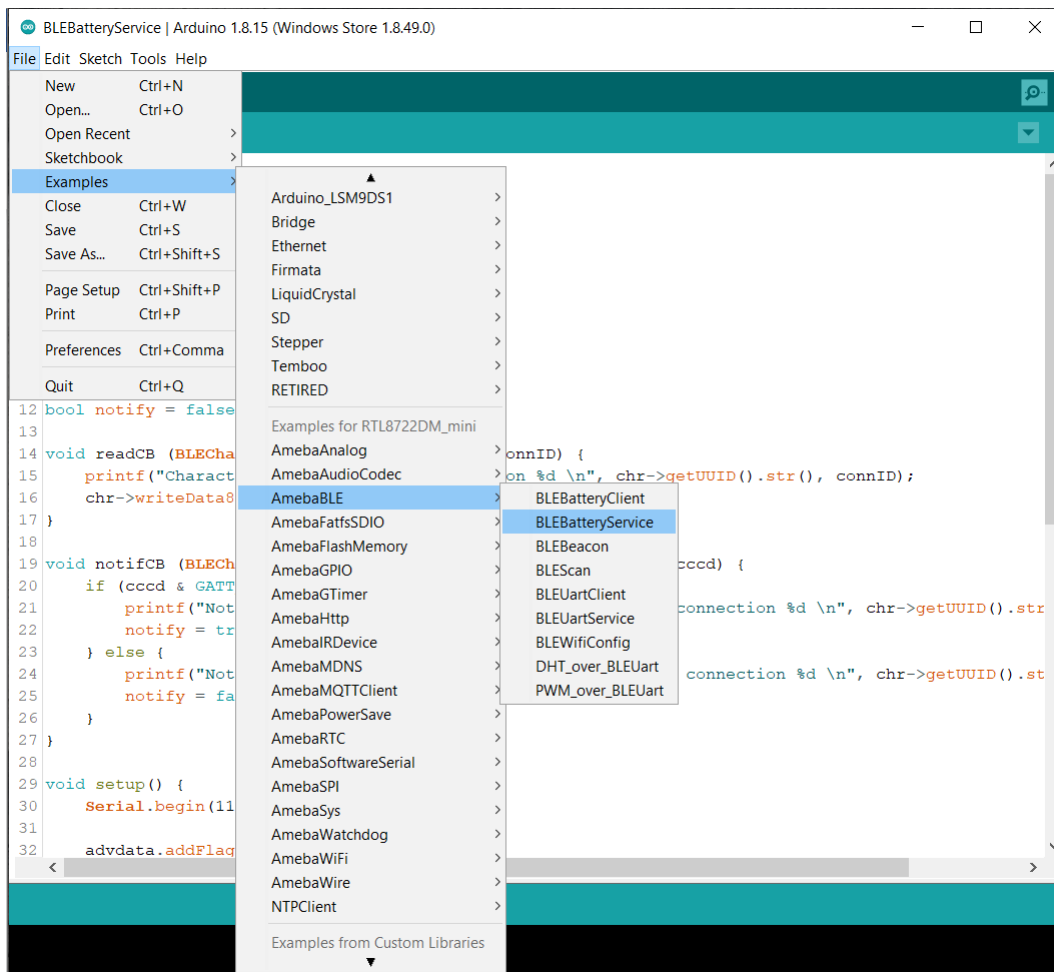


Upload the code and press the reset button on Ameba once the upload is finished.


On your mobile phone, open the Bluetooth app and scan for the Bluetooth signal broadcast by Ameba, it should appear as a device named “AMEBA_BLE_DEV” .

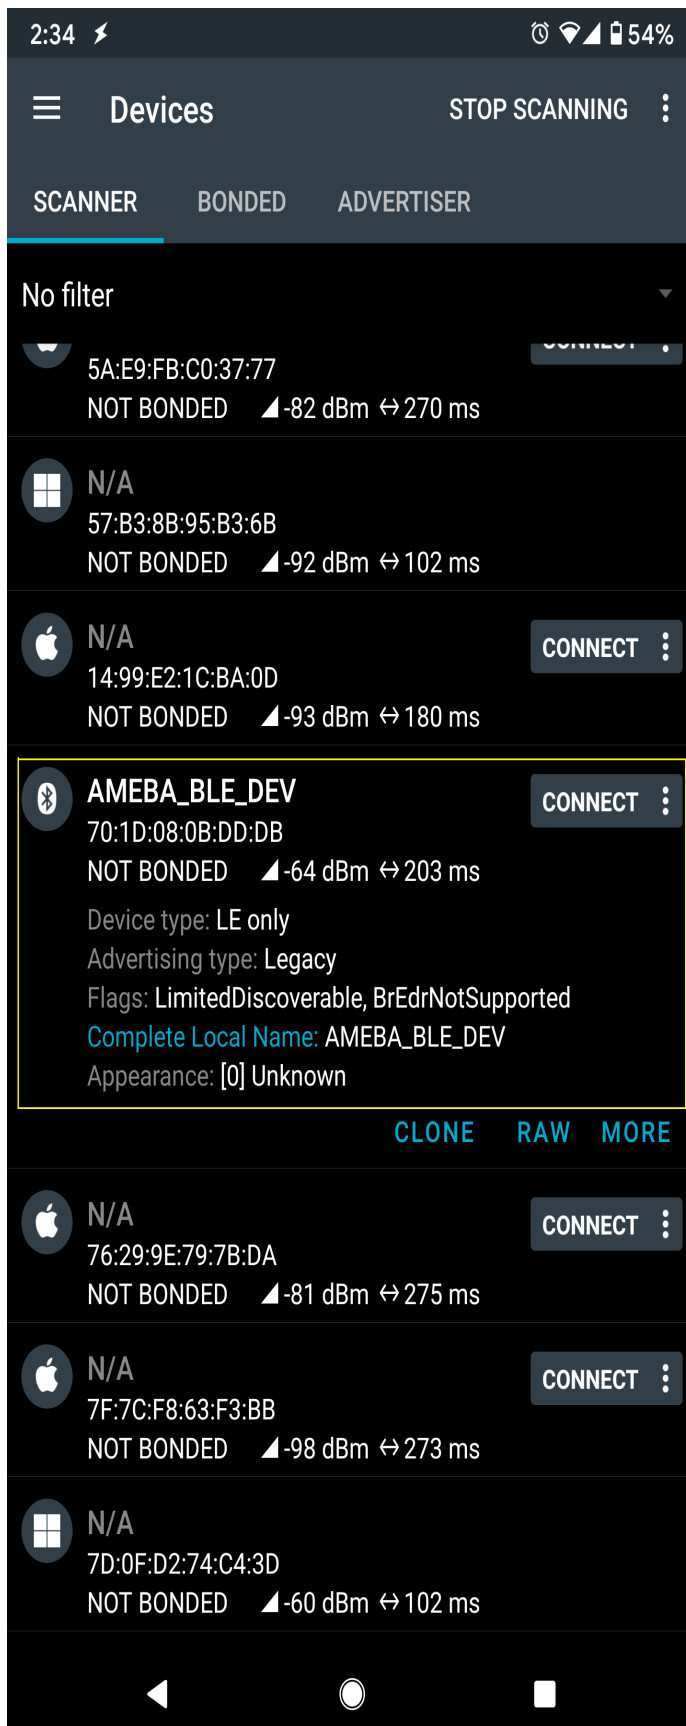


Connect to the Ameba Bluetooth device, and a list of available services should appear. Click on the battery service to expand it, and you can see the battery level data value. The arrows highlighted in the box on the right are used to read data and subscribe to notifications. Click on the single arrow to read the battery level value, and a 90% value will appear.

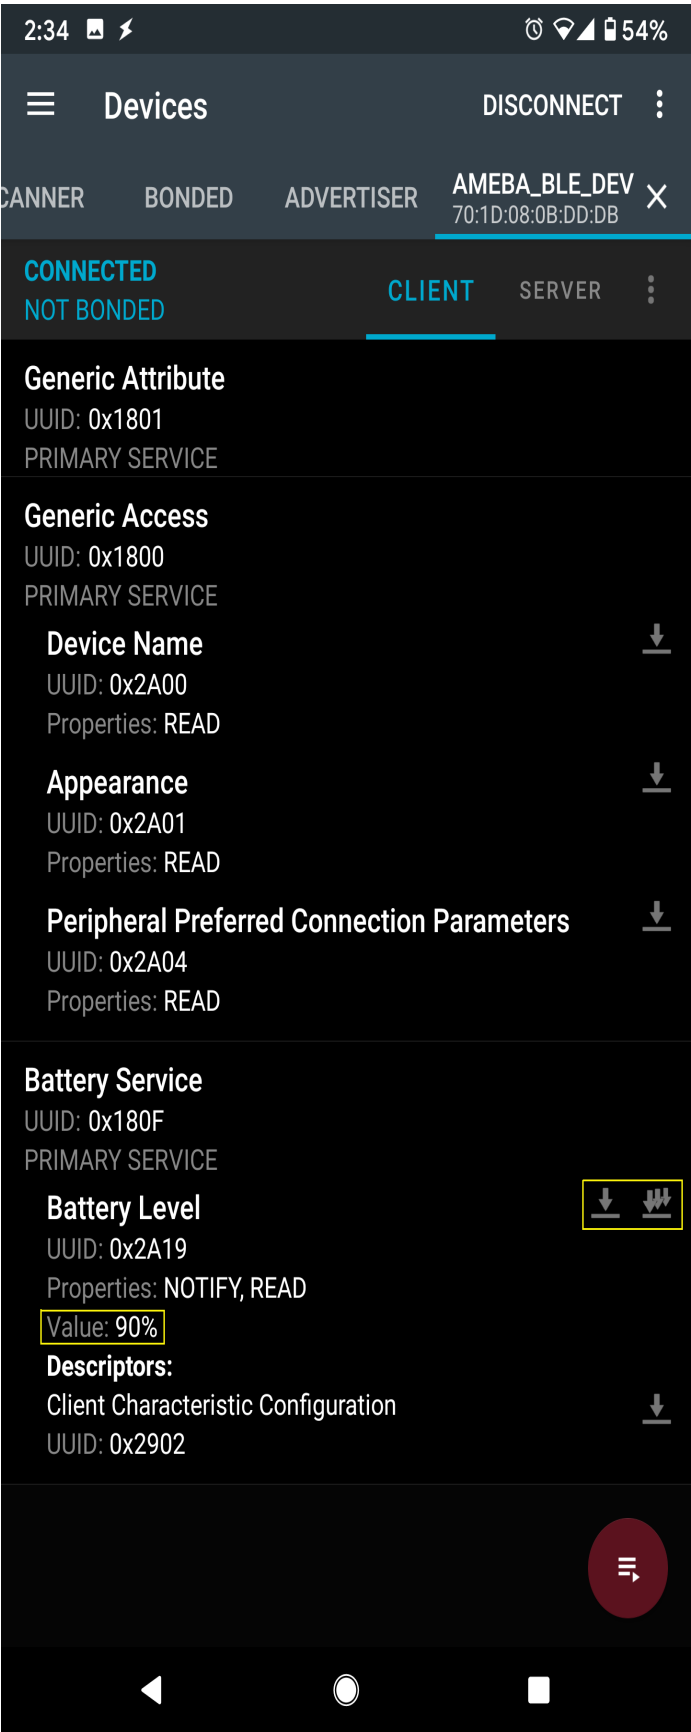

Click on the triple arrow to subscribe to updates on the battery level value, and the battery value will start updating by itself.

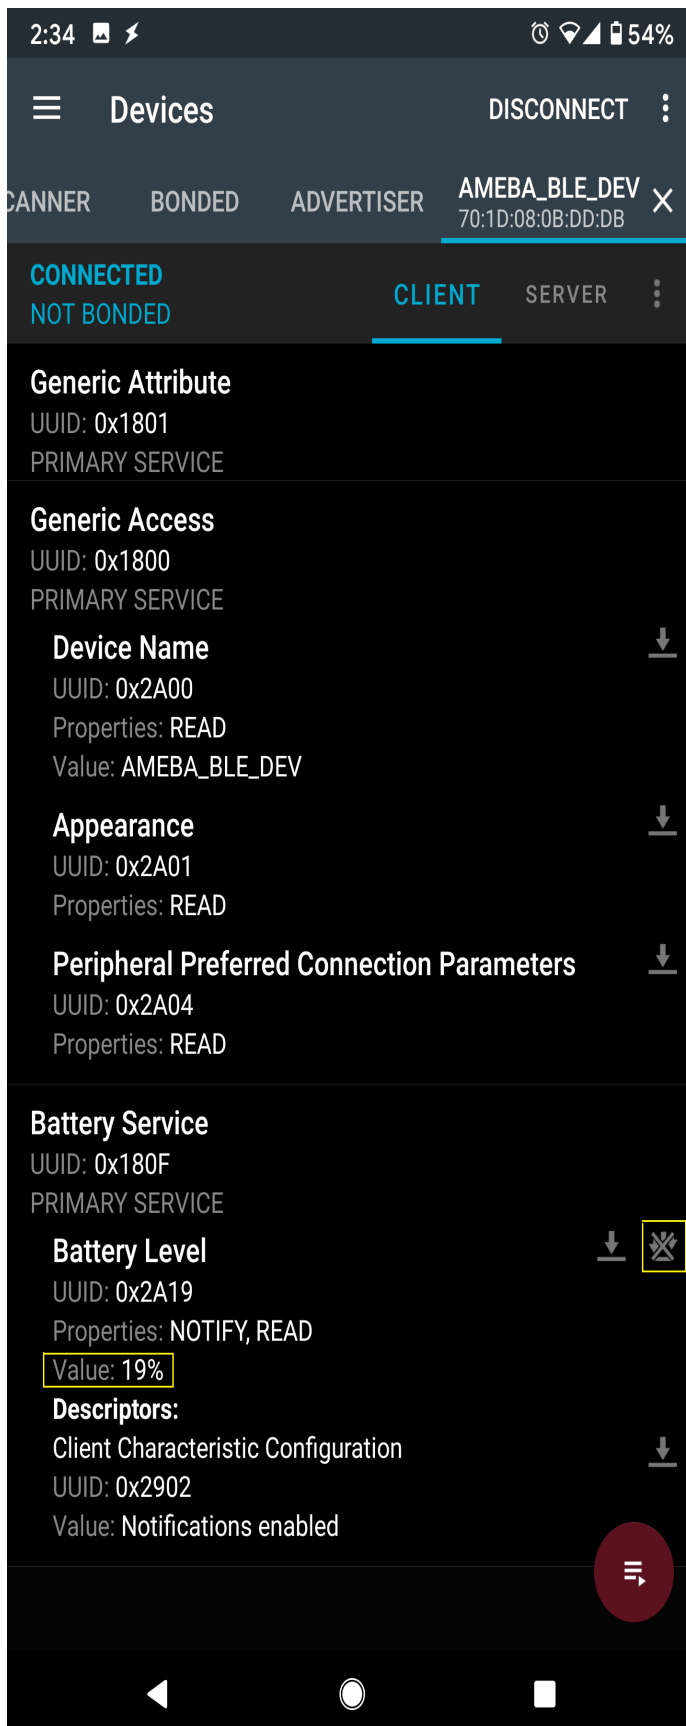

The serial monitor will show the sketch increasing the battery level every second. When you click on either of the arrows, the sketch running on the Ameba will be notified, and will print out the action taken.

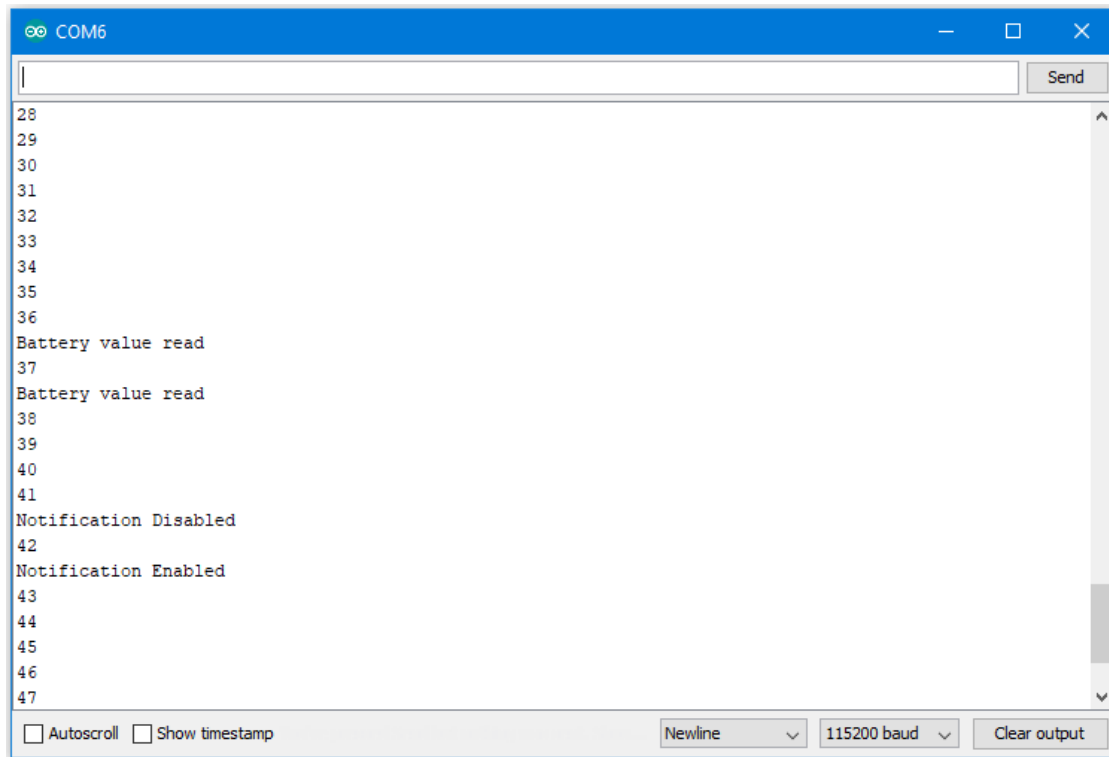

Code Reference

BLEService and BLECharacteristic classes are used to create and define the battery service to run on the Bluetooth device.

`BLE.configAdvert() -> setAdvType(GAP_ADTYPE_ADV_IND)` is used to set the advertisement type to a general undirected advertisement that allows for connections.

`setReadCallback()` and `setCCCDCallback()` is used to register functions that will be called when the battery level data is read, or notification is enabled by the user.

`BLE.configServer(1)` is used to tell the Bluetooth stack that there will be one service running.

`addService()` registers the battery service to the Bluetooth stack.

BLE –BLE Beacon

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Android / iOS mobile phone

Example

Introduction

A BLE beacon broadcasts its identity to nearby Bluetooth devices, to enable the other devices to determine their location relative to the beacon, and to perform actions based on information broadcasted by the beacon.

Example applications of beacons include indoor positioning system, location-based advertising and more.

From the definition of its purpose as a broadcast device, a BLE beacon thus cannot be connected to, and can only send information in its Bluetooth advertisement packets.

There are several BLE beacon protocols. The Ameba BLEBeacon library supports the iBeacon and AltBeacon protocols.

Procedure

First, you need to install some Bluetooth apps on your mobile phone. These apps will show you the raw data sent by Ameba and allow you to interact with the data.


The recommended application is nRF connect, and is available at the links below:

- **Android** : <https://play.google.com/store/apps/details?id=no.nordicsemi.android.mcp>
- **iOS** : <https://apps.apple.com/us/app/nrf-connect/id1054362403>

LightBlue is an alternative application that can also be used, but has less features:


- **Android** : <https://play.google.com/store/apps/details?id=com.punchthrough.lightblueexplorer>
- **iOS** : <https://apps.apple.com/us/app/lightblue/id557428110>

Open the example, “Files” -> “Examples” -> “AmebaBLE” -> “BLEBeacon”

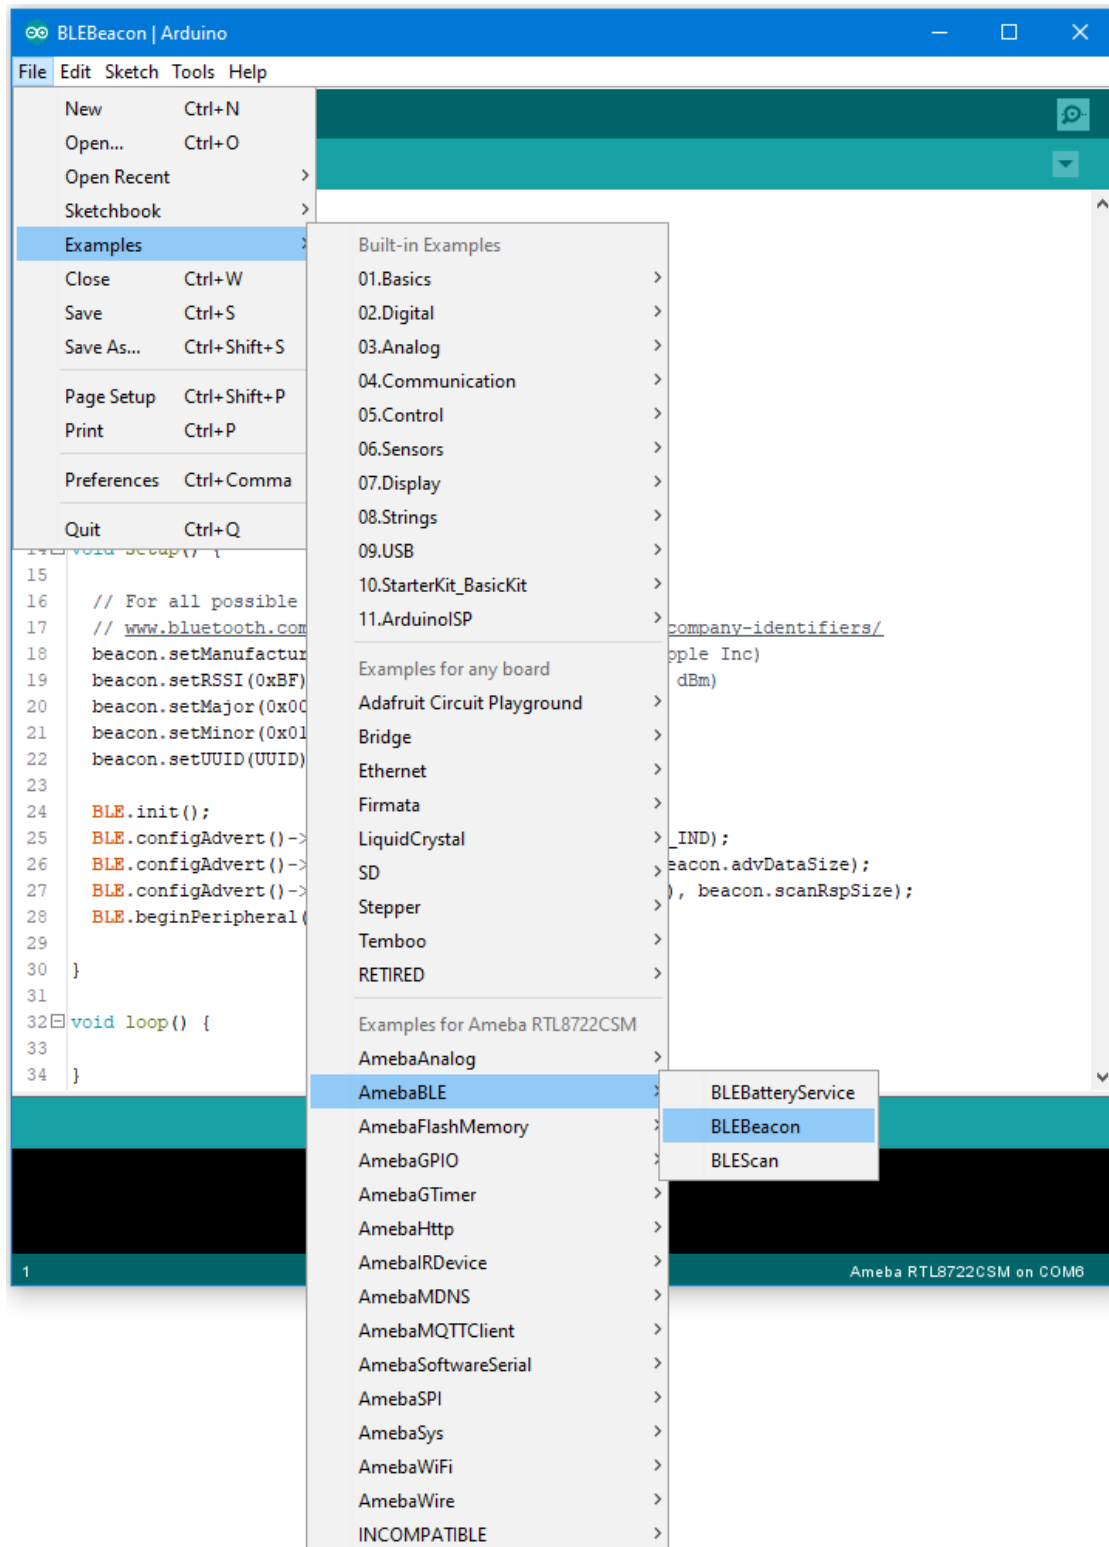

Upload the code and press the reset button on Ameba once the upload is finished.

On your mobile phone, open the Bluetooth app and scan for the beacon signal broadcast by Ameba.

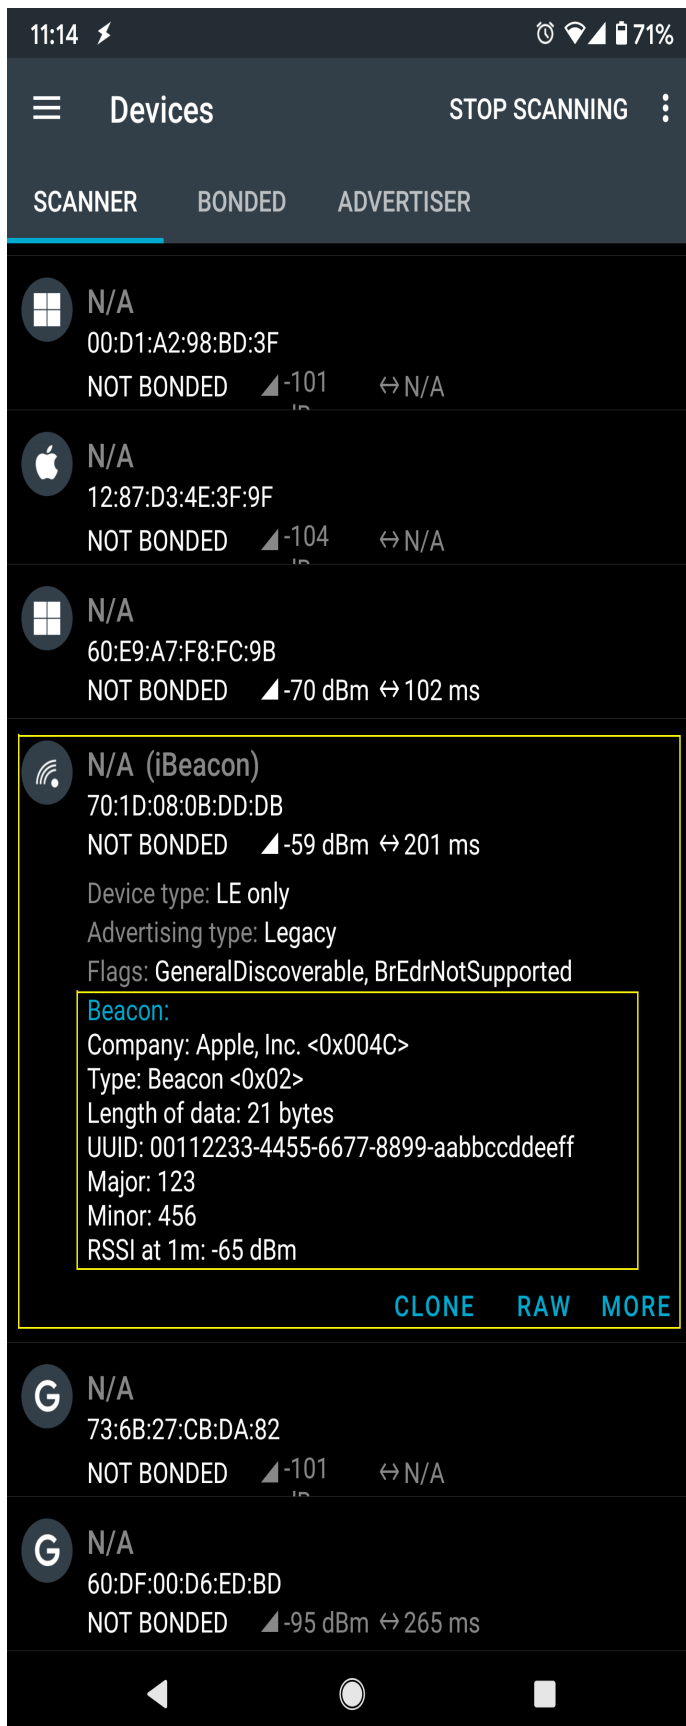

If you happen to be in an environment with multiple BLE beacons, you can tap the entries to expand them, and verify that the beacon data is identical to the data in the sketch.

Code Reference

`setRssi()` is used to set the received signal strength indicator (rssi) data field for a beacon. The specification states that this should be the received signal strength from the beacon at a 1 meter distance. With no method to measure this, it is set to -65dBm as an estimate.

`setMajor()` and `setMinor()` are used to set the two data fields. The purpose of these data are left for the manufacturer of the beacon to define, and can be used in any way.

`setUUID()` is used to give the beacon a universally unique identifier (UUID). This is a 128-bit number usually expressed as a hexadecimal string. It is used to identify each unique beacon, and can be randomly generated for free online.

The BLEBeacon library includes both `iBeacon` and `AltBeacon` classes, replace line 6 `iBeacon` with `altBeacon` to create an `AltBeacon` instead. The data fields are mostly the same, with only minor changes, please look at the header files for more details.

`BLE.init()` is used to allocate memory and prepare Ameba for starting the Bluetooth stack.

`BLE.configAdvert()` is used to configure the Bluetooth advertisement settings, to which we pass the beacon data and set the device as non-connectable.

`BLE.beginPeripheral()` starts Ameba in Bluetooth peripheral mode, after which it will begin to advertise with the beacon data provided.

BLE –BLE Scan

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Android / iOS mobile phone


Example

Introduction

This example configures the Ameba as a Bluetooth central device, uses the scan functionality to scan for other Bluetooth devices, and prints out the results to the serial monitor.


Procedure

Open the example, “Files” -> “Examples” -> “AmebaBLE” -> “BLEScan”

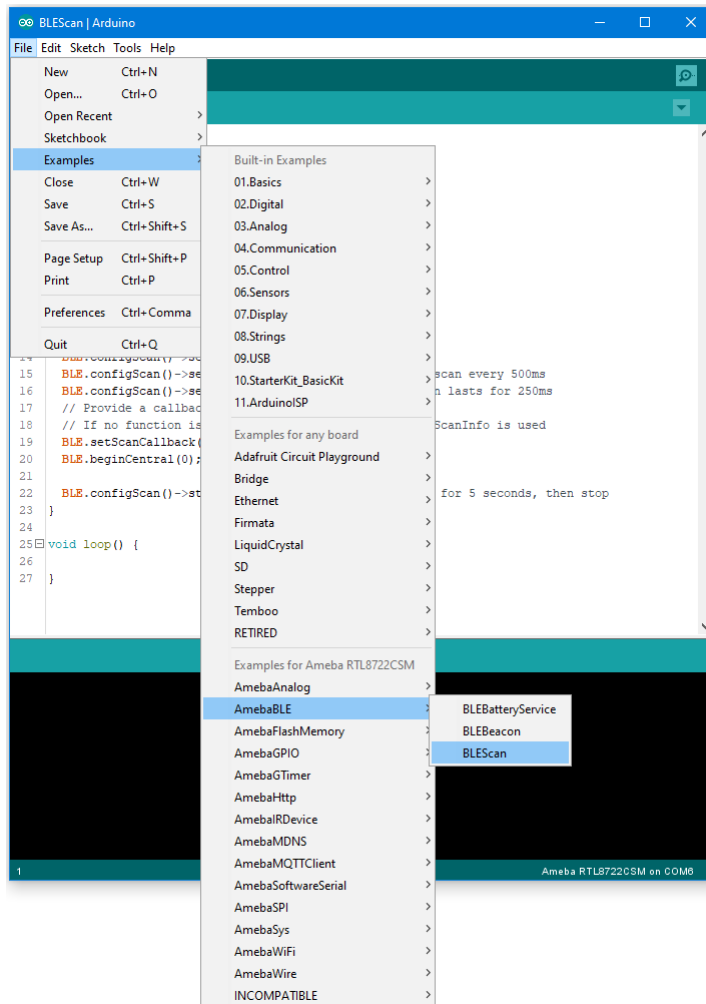

Upload the code and press the reset button on Ameba once the upload is finished.

Open the Arduino serial monitor, and you should see the scan results of nearby Bluetooth devices formatted and printed out.

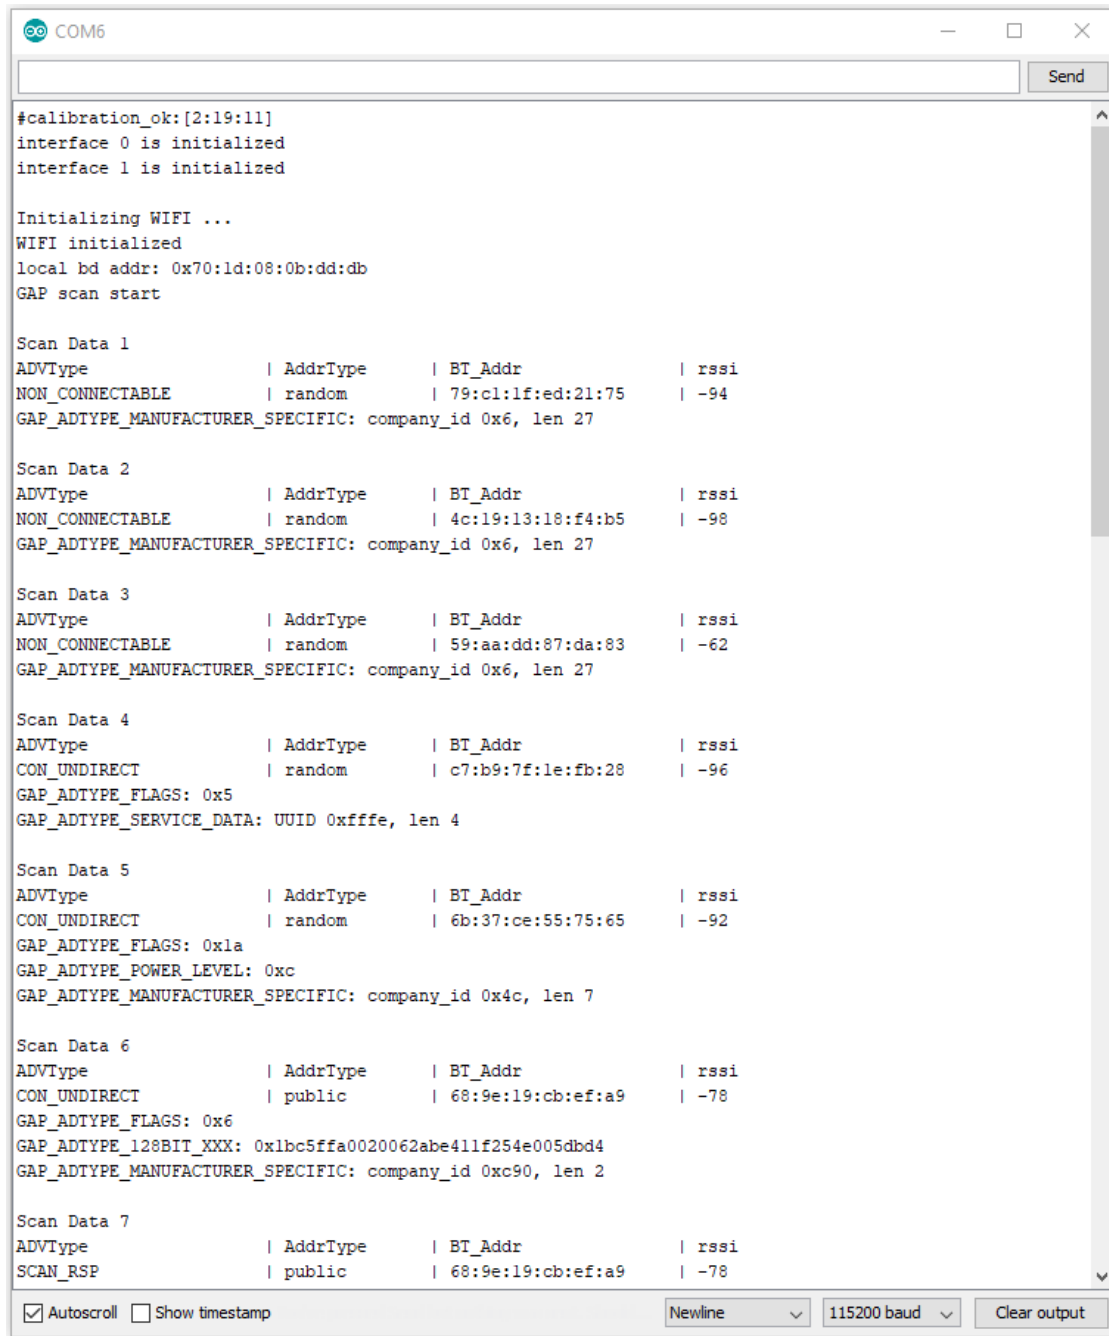

```

COM6
Send

#calibration_ok:[2:19:11]
interface 0 is initialized
interface 1 is initialized

Initializing WIFI ...
WIFI initialized
local bd addr: 0x70:1d:08:0b:dd:db
GAP scan start

Scan Data 1
ADVType          | AddrType      | BT_Addr        | rssi
NON_CONNECTABLE  | random        | 79:c1:1f:ed:21:75 | -94
GAP_ADTYPE_MANUFACTURER_SPECIFIC: company_id 0x6, len 27

Scan Data 2
ADVType          | AddrType      | BT_Addr        | rssi
NON_CONNECTABLE  | random        | 4c:19:13:18:f4:b5 | -98
GAP_ADTYPE_MANUFACTURER_SPECIFIC: company_id 0x6, len 27

Scan Data 3
ADVType          | AddrType      | BT_Addr        | rssi
NON_CONNECTABLE  | random        | 59:aa:dd:87:da:83 | -62
GAP_ADTYPE_MANUFACTURER_SPECIFIC: company_id 0x6, len 27

Scan Data 4
ADVType          | AddrType      | BT_Addr        | rssi
CON_UNDIRECT     | random        | c7:b9:7f:1e:fb:28 | -96
GAP_ADTYPE_FLAGS: 0x5
GAP_ADTYPE_SERVICE_DATA: UUID 0xfffe, len 4

Scan Data 5
ADVType          | AddrType      | BT_Addr        | rssi
CON_UNDIRECT     | random        | 6b:37:ce:55:75:65 | -92
GAP_ADTYPE_FLAGS: 0x1a
GAP_ADTYPE_POWER_LEVEL: 0xc
GAP_ADTYPE_MANUFACTURER_SPECIFIC: company_id 0x4c, len 7

Scan Data 6
ADVType          | AddrType      | BT_Addr        | rssi
CON_UNDIRECT     | public        | 68:9e:19:cb:ef:a9 | -78
GAP_ADTYPE_FLAGS: 0x6
GAP_ADTYPE_128BIT_XXX: 0x1bc5ffa0020062abe411f254e005dbd4
GAP_ADTYPE_MANUFACTURER_SPECIFIC: company_id 0xc90, len 2

Scan Data 7
ADVType          | AddrType      | BT_Addr        | rssi
SCAN_RSP         | public        | 68:9e:19:cb:ef:a9 | -78

☒ Autoscroll ☐ Show timestamp
Newline 115200 baud Clear output

```

If you have the Bluetooth app nRF Connect installed, you can also use it to send out Bluetooth advertisements for the Ameba to pick up.

Code Reference

`setScanMode(GAP_SCAN_MODE_ACTIVE)` is used to set the scan mode. Active scanning will request for an additional scan response data packet from a device when it is found. Passive scanning will only look at the advertisement data, and not request for additional data.

`setScanInterval()` and `setScanWindow()` are used to set the frequency and duration of scans in milliseconds. A scan will start every interval duration, and each scan will last for the scan window duration. The scan window duration should be lesser or equal to the scan interval. Set a short interval to discover devices rapidly, set a long interval to conserve power.

`setScanCallback(scanFunction)` is used to register a function to be called when scan results are received. This can be used to set a user function for additional processing of scan data, such as looking for a specific device. If no function is registered, the scan results are formatted and printed to the serial monitor by default.

`beginCentral(0)` is used to start the Bluetooth stack in Central mode. The argument 0 is used to indicate that no clients will be operating in central mode.

`startScan(5000)` is used to start the scanning process for a specified duration of 5000 milliseconds. The scan will repeat according to the set scan interval and scan window values. After 5000 milliseconds, the scan process will stop, and will be ready to be started again.

BLE –Battery Client

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1

Example

Introduction


BLE connections use a server client model. The server contains the data of interest, while the client connects to the server to read the data. Commonly, a Bluetooth peripheral device acts as a server, while a Bluetooth central device acts as a client. Servers can contain many services, with each service containing a some set of data. Clients can send requests to read or write some data and can also subscribe to notifications so that the server can send data updates to a client.

In this example, a basic battery client is set up on the Ameba Bluetooth stack. The client connects to another Ameba board running the corresponding BLE battery service to read the battery level data.

Procedure

On the first Ameba board, upload the BLEBatteryService example code and let it run.

For the second Ameba board, open the example “Files” -> “Examples” -> “AmebaBLE” -> “BLEBatteryClient” .

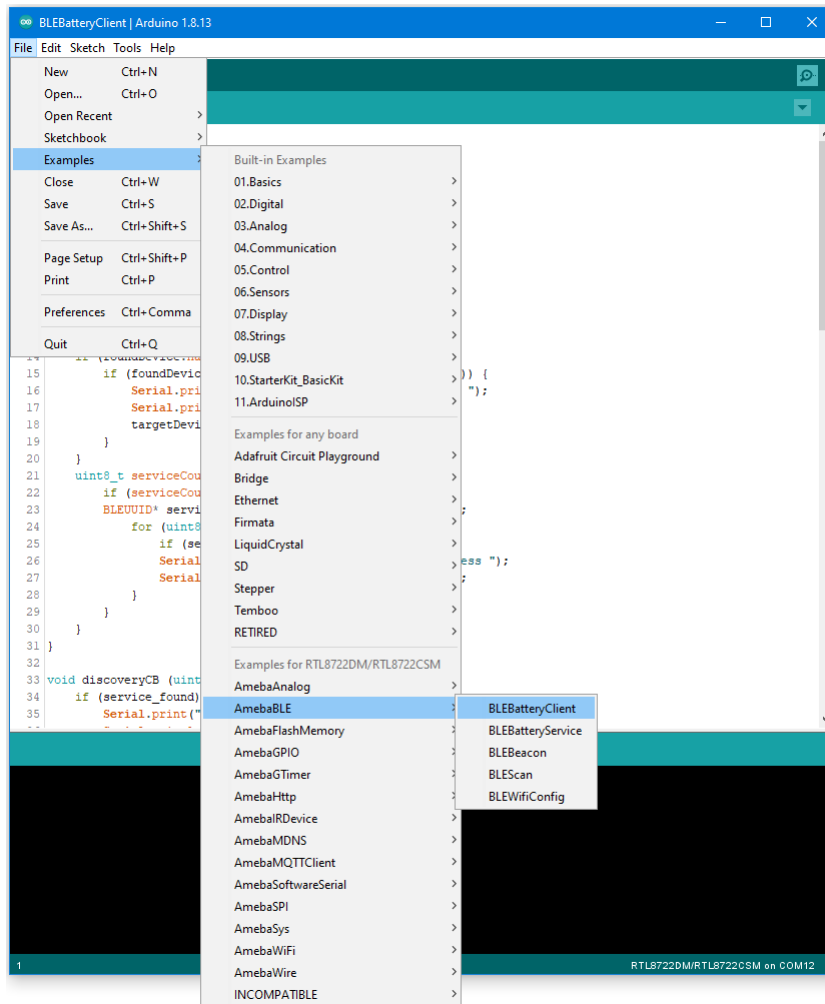

Upload the code and press the reset button on Ameba once the upload is finished.

Open the serial monitor and observe the log messages as the Ameba board with the battery client scans, connects, and reads data from the Ameba board with the battery service.

```

COM9
UDWcalibration_OK:[2:19:11]
interface 0 is initialized
interface 1 is initialized

Initializing WIFI ...
WIFI initialized
[BLE Device] Local BT addr: 70:1d:08:0b:fe:d2
[BLE Device] GAP scan start
Found Ameba BLE Device at address 70:1d:08:0b:DD:DB
Found Battery Service at address 70:1d:08:0b:DD:DB
[BLE Device] GAP scan stop
[BLE Device] Connected conn_id 0
BLE connected to device at 0
Battery service found on connection id: 0
Battery level read callback for connection id: 0 Battery level: 90
Notifications Enabled
Notification received for connection id: 0 Battery level: 9
Notification received for connection id: 0 Battery level: 10
Notification received for connection id: 0 Battery level: 11
Notification received for connection id: 0 Battery level: 12
Notification received for connection id: 0 Battery level: 13
Battery level read callback for connection id: 0 Battery level: 90
Notification received for connection id: 0 Battery level: 14
Notification received for connection id: 0 Battery level: 15
Notification received for connection id: 0 Battery level: 16
Notification received for connection id: 0 Battery level: 17
Notification received for connection id: 0 Battery level: 18
Notifications Disabled

```

Highlighted in yellow, the Ameba board with the battery client first scans for advertising BLE devices with the advertised device name “AMEBA_BLE_DEV” and the advertised service UUID of 0x180F representing the battery service.

After finding the target device, the Ameba board with the battery client forms a BLE connection and searches for a battery service on the connected device, highlighted in blue.

With the client connected to the service, the battery client begins to read data using both regular data reads and notifications, highlighted in green.

Code Reference

BLEClient is used to create a client object to discover services and characteristics on the connected device.

- `setNotifyCallback()` is used to register a function that will be called when a battery level notification is received.
- `BLE.configClient()` is used to configure the Bluetooth stack for client operation.
- `addClient(connID)` creates a new BLEClient object that corresponds to the connected device.

BLE –WiFi Configuration Service

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Android / iOS mobile phone

Example

Introduction

In this example, a WiFi configuration service is set up on the Ameba Bluetooth stack. A mobile phone with the configuration app connects to the Ameba device using BLE and configures the Ameba to connect to the correct WiFi access point.


Procedure

Ensure that the Realtek WiFi configuration app is installed on your mobile phone, it is available at:

–Google Play Store: <https://play.google.com/store/apps/details?id=com.rtk.btconfig>


–Apple App Store: <https://apps.apple.com/sg/app/easy-wifi-config/id1194919510>

Open the example, “Files” -> “Examples” -> “AmebaBLE” -> “BLEWifiConfigService” .

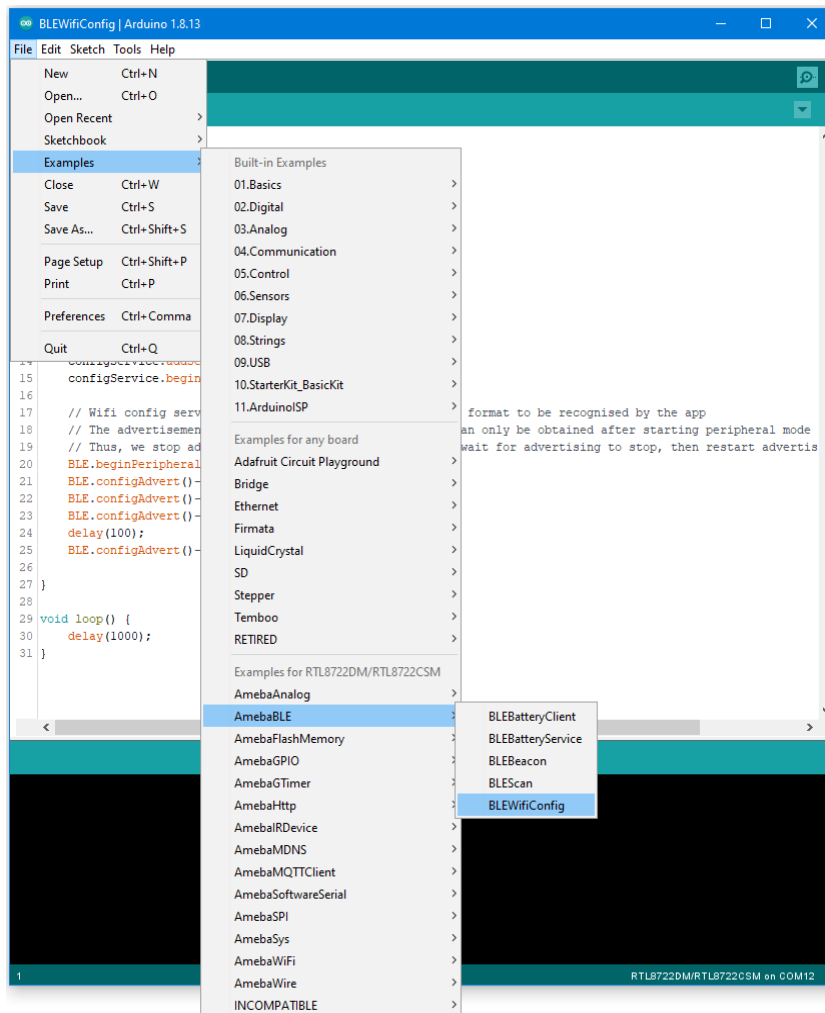


Upload the code and press the reset button on Ameba once the upload is finished.


On your mobile phone, open the Realtek WiFiConfig app and tap the round button to scan for Ameba boards.

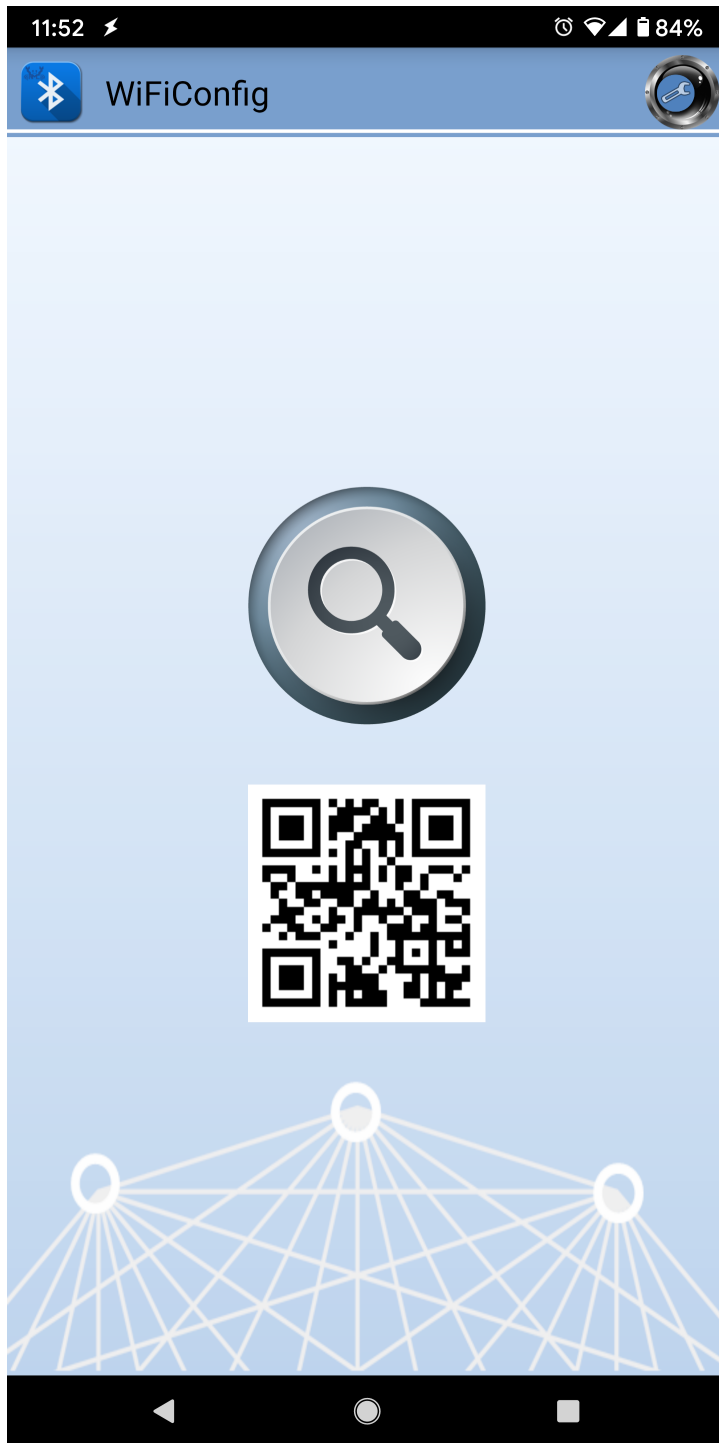


Select the correct Ameba board from the scan results. The app will connect to the Ameba board and ask the board to scan for WiFi networks and send the scan results back to the app using BLE.



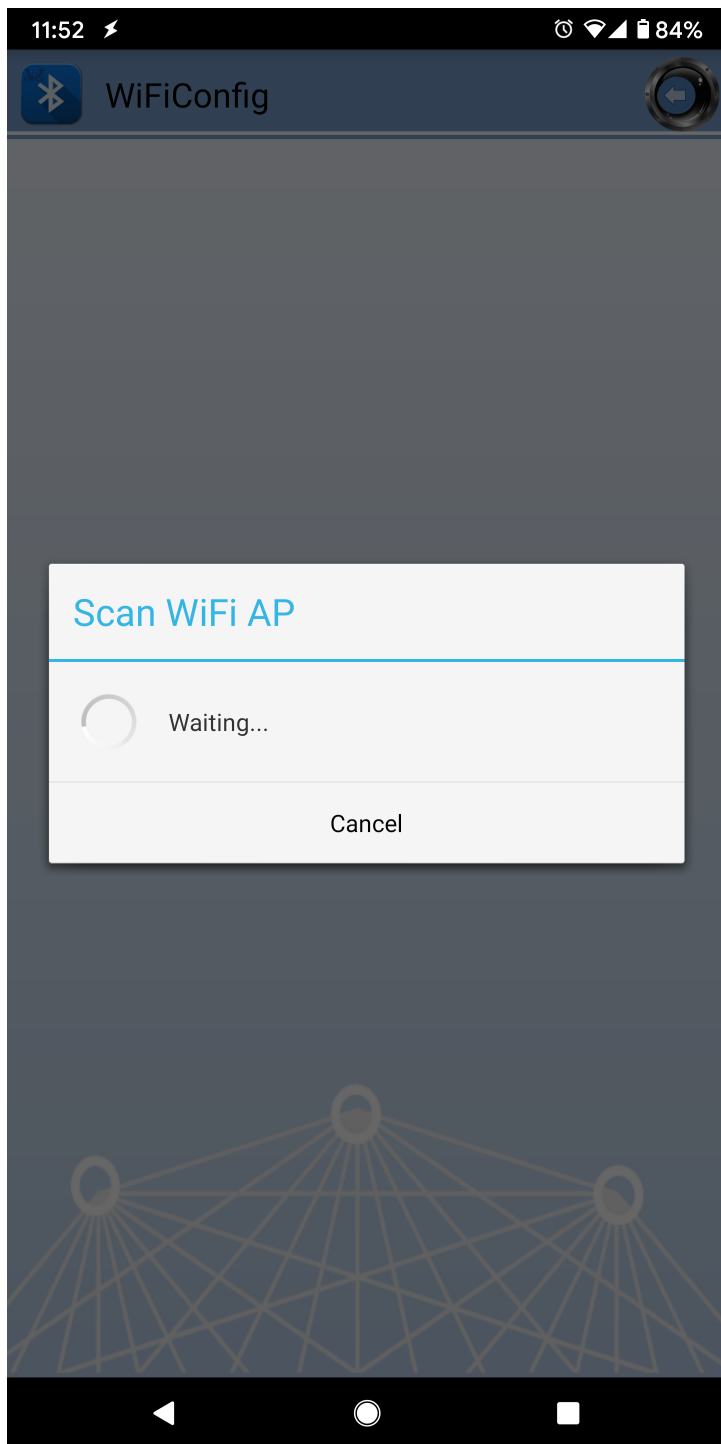


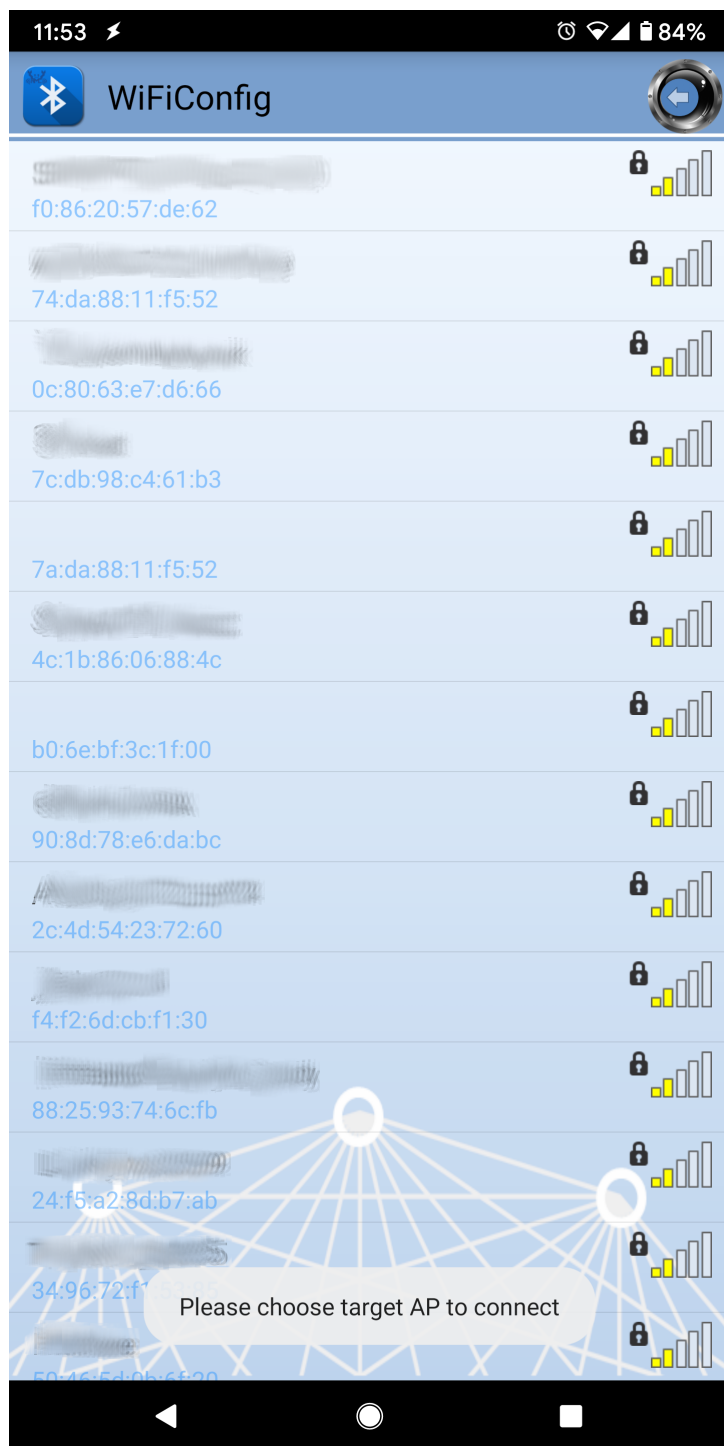

If your phone is currently connected to a WiFi network, the app will ask for the WiFi password to connect the Ameba board to the same WiFi network. Tap “Select AP” to choose another WiFi network, or enter the password and tap continue to connect Ameba to the selected WiFi network.

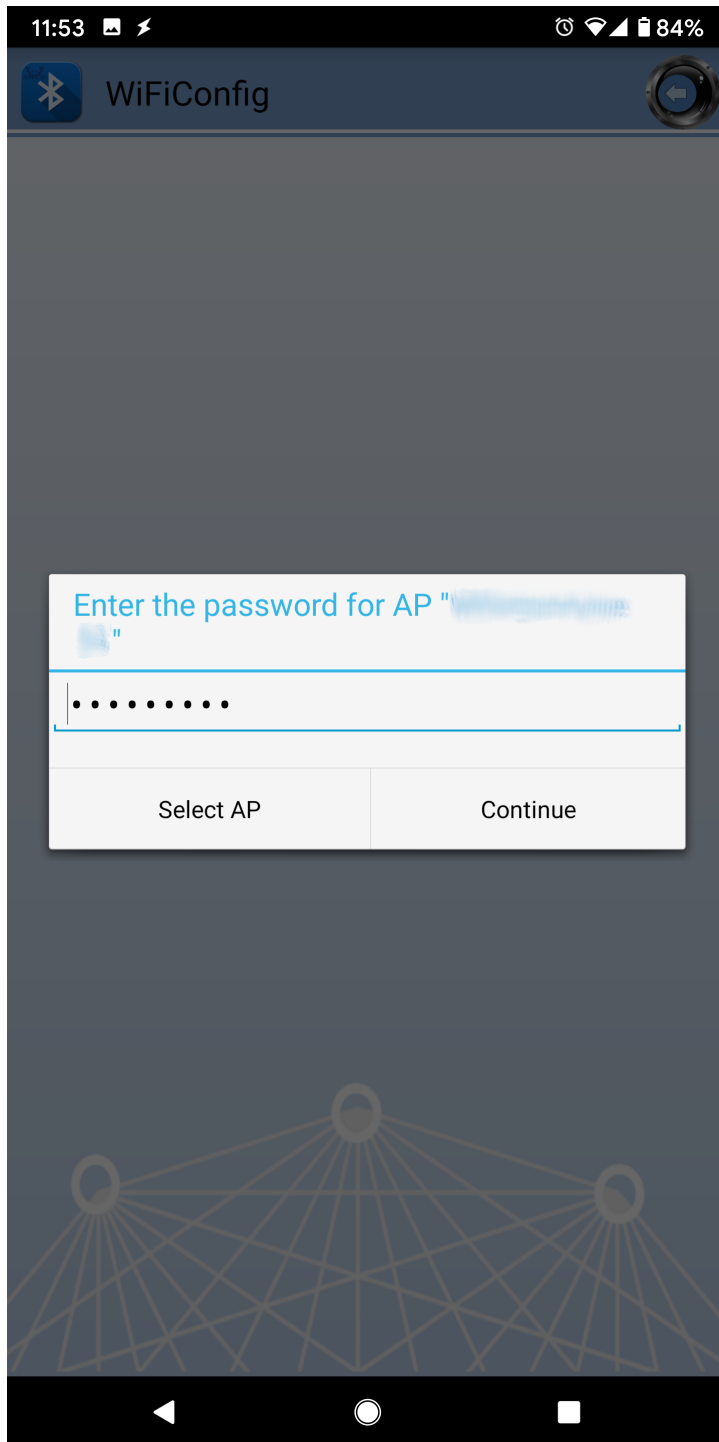

After the Ameba board connects to the WiFi network, the following message will be shown. Tap “Try another AP” to connect to another WiFi network or tap “Confirm” to keep the current WiFi network and disconnect BLE from the Ameba board.

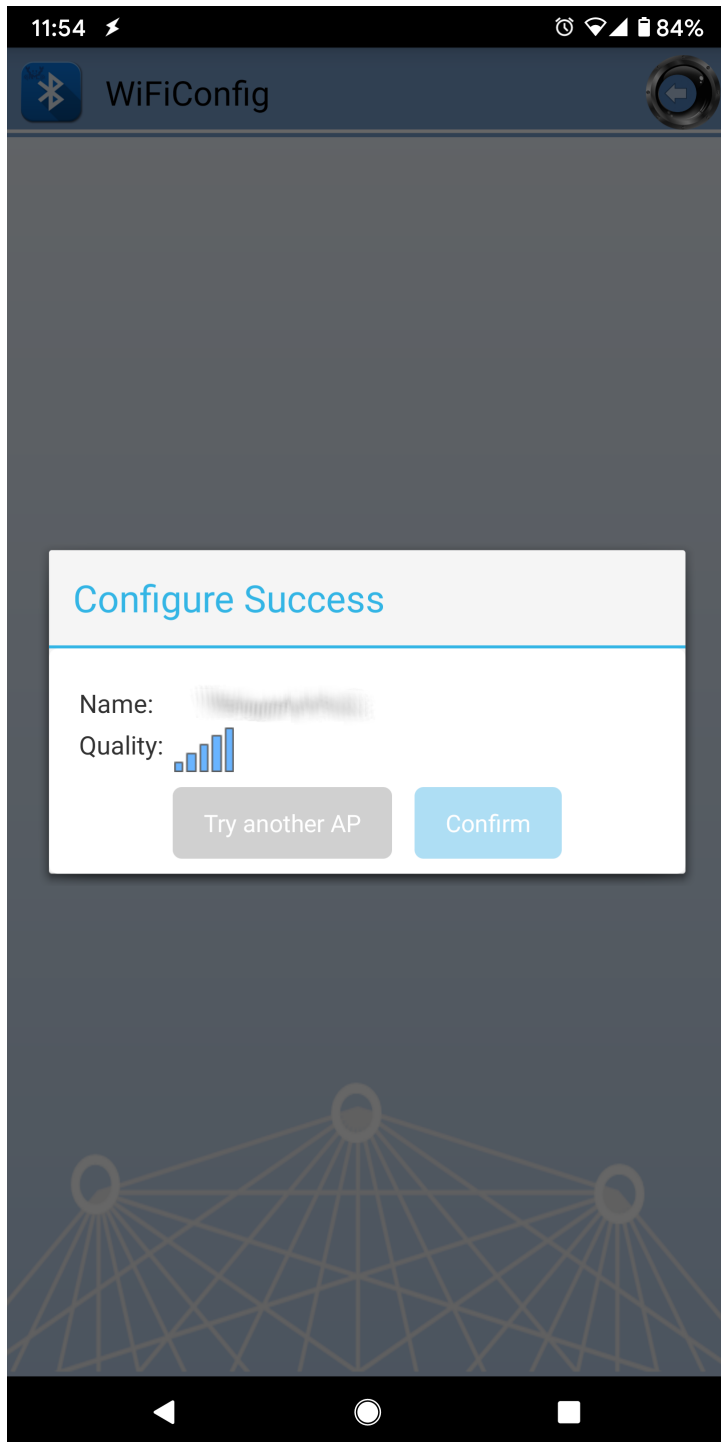

Code Reference

BLEWifiConfigService is used to create an instance of the WiFi configuration service to run on the Bluetooth device.

`BLE.configAdvert() -> setAdvType(configService.advData())` is used to set the correct advertisement data necessary for the phone app to find the Ameba Bluetooth device.

BLE –BLE UART Client

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 2

Example

Introduction


In this example, two RTL8722 boards are connected using BLE. One board runs a BLE UART service, while the other connects to the service using a client and both boards are able to communicate with text messages over the UART service.

Procedure

On the first board, upload the BLE UART service example code. Refer to the example guide for detailed instructions.


For the second board, open the example, “Files” -> “Examples” -> “AmebaBLE” -> “BLEUartClient”

.

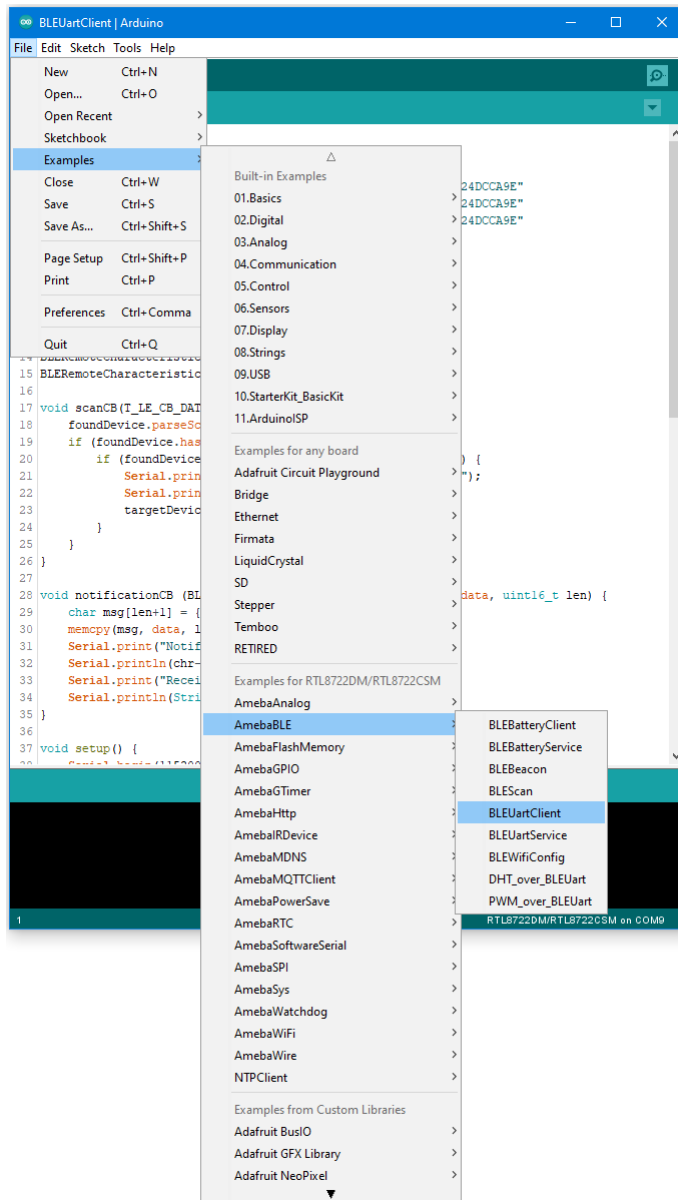

Upload the code and press the reset button on Ameba once the upload is finished.

Reset the UART service board first, wait for the BLE advertisement process to begin, and reset the UART client board. The client board should scan, discover, and connect to the service board. After connecting, the client board will verify that the correct UART service exists on the service board, before enabling notifications on the TX characteristic. Any message typed in the serial terminal will be sent to the other board using the UART service.

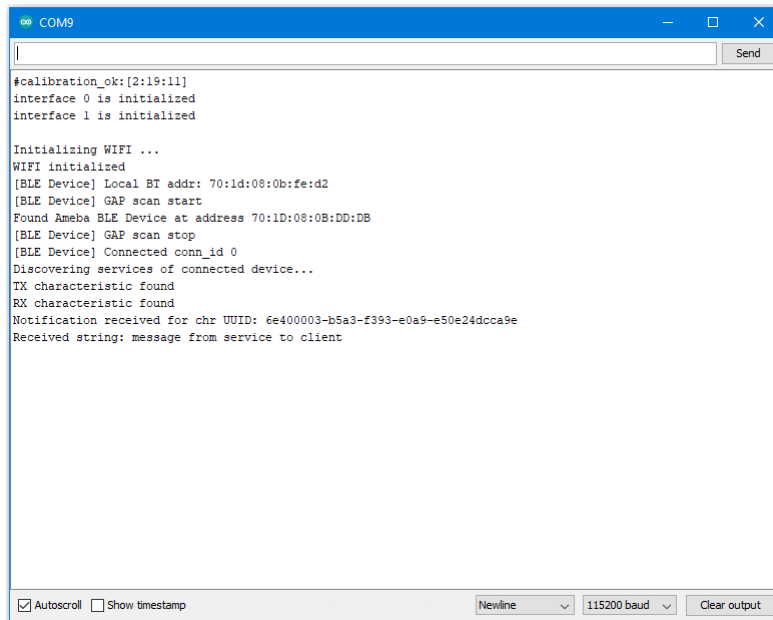

```
COM9
#calibration_ok:[2:19:11]
interface 0 is initialized
interface 1 is initialized

Initializing WIFI ...
WIFI initialized
[BLE Device] Local BT addr: 70:1d:08:0b:fe:d2
[BLE Device] GAP scan start
Found Ameba BLE Device at address 70:1D:08:0B:DD:DB
[BLE Device] GAP scan stop
[BLE Device] Connected conn_id 0
Discovering services of connected device...
TX characteristic found
RX characteristic found
Notification received for chr UUID: 6e400003-b5a3-f393-e0a9-e50e24dcca9e
Received string: message from service to client

Autoscroll Show timestamp Newline 115200 baud Clear output
```

Code Reference

The `BLEClient` class is used to discover the services that exist on a connected BLE device. The discovery process will create `BLERemoteService`, `BLERemoteCharacteristic` and `BLERemoteDescriptor` objects corresponding to the services, characteristics and descriptors that exist on the connected device. These objects can then be used to read and write data to the connected device.

BLE –BLE UART Service

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Android / iOS smartphone

Example

Introduction

With BLE, application data is sent and received using the GATT system. GATT uses services, characteristics, and attributes to organise data and control how the data can be read from and written to. The Bluetooth SIG specification for BLE includes several predefined services for common applications, but users are free to implement custom services and characteristics to best fit their data structure and application needs

In this example, the `BLEService` and `BLECharacteristic` classes are used to implement a custom service for transmitting ASCII characters similar to regular UART. This custom service is the Nordic UART Service, which is supported in several smartphone apps.

Procedure

Ensure that a compatible BLE UART app is installed on your smartphone, it is available at:

–Google Play Store:


<https://play.google.com/store/apps/details?id=com.adafruit.bluefruit.le.connect>

https://play.google.com/store/apps/details?id=de.kai_morich.serial_bluetooth_terminal

–Apple App Store:


<https://apps.apple.com/us/app/bluefruit-connect/id830125974>


Open the example, “Files” -> “Examples” -> “AmebaBLE” -> “BLEUartService” .

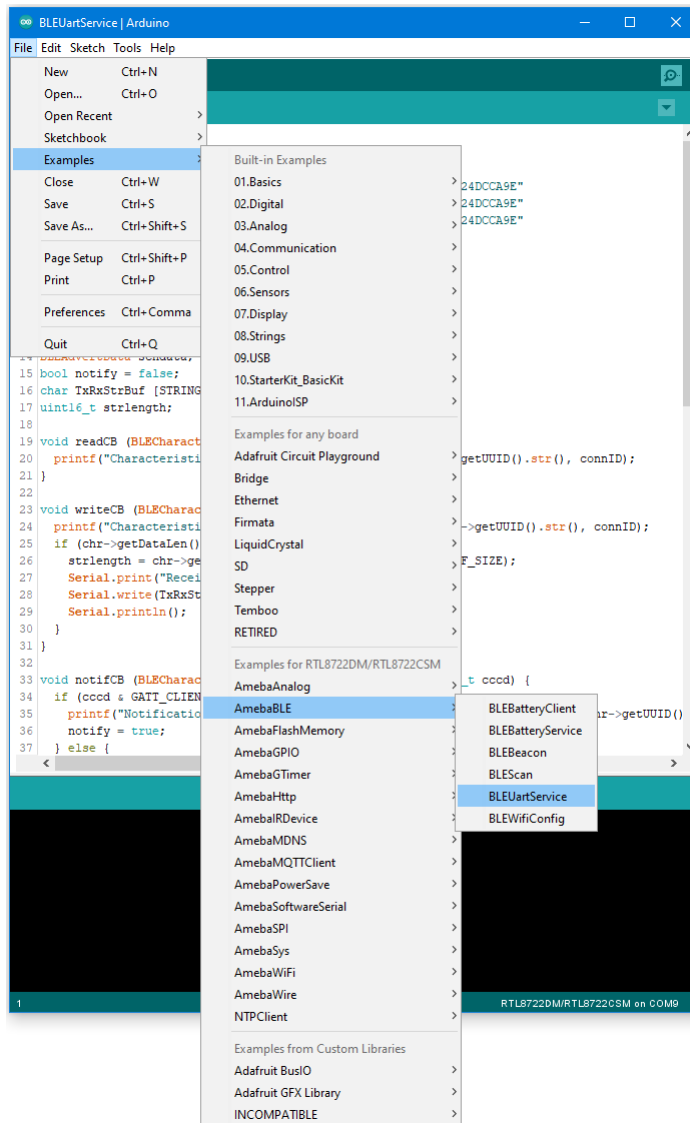

Upload the code and press the reset button on Ameba once the upload is finished.

Open the app on your smartphone, scan and connect to the Ameba board shown as “AMEBA_BLE_DEV” and choose the UART function in the app. Note that the BLE UART service on the Ameba board will only work with the UART and Plotter functions in the Bluefruit Connect app, other functions (Pin I/O, Image Transfer) require other BLE services that are not included in this example.

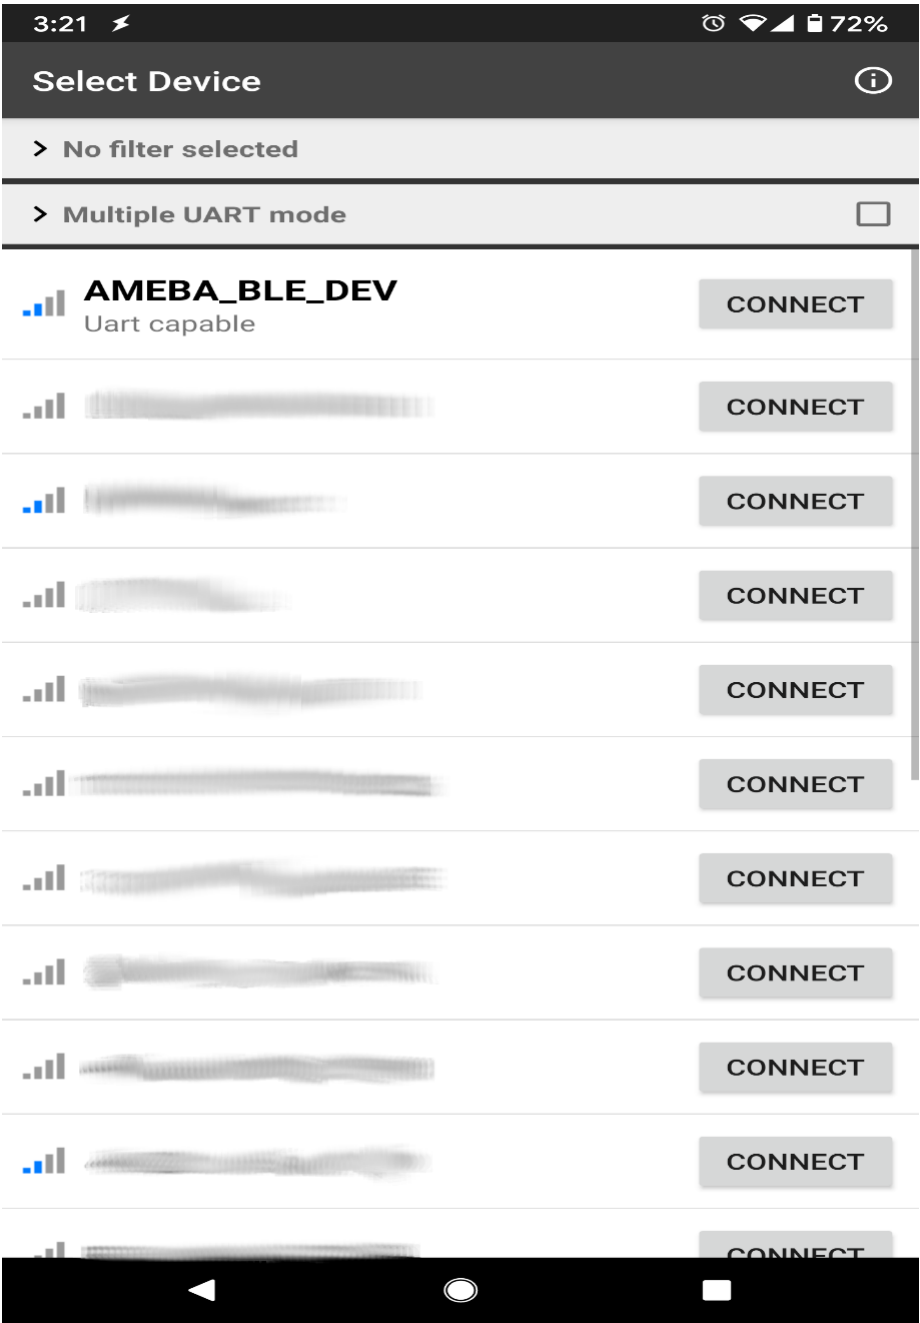

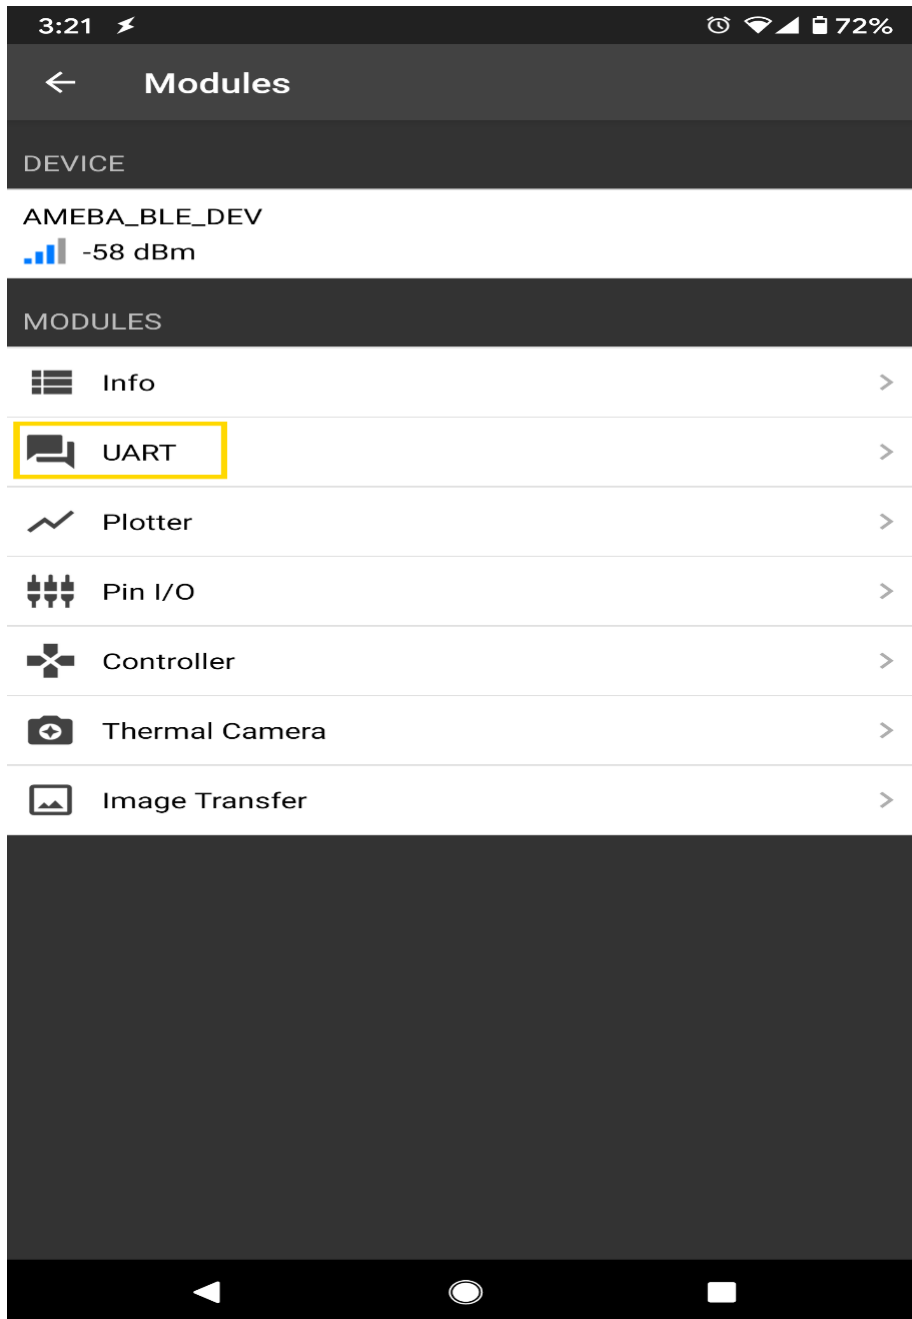



In the UART terminal section of the app, enter a message and click send. You should see the message appear in the Arduino serial monitor.

In the Arduino serial monitor, enter a message and click send. The message will appear in the smartphone app.



message from app to Ameba
message from Ameba to smartphone app

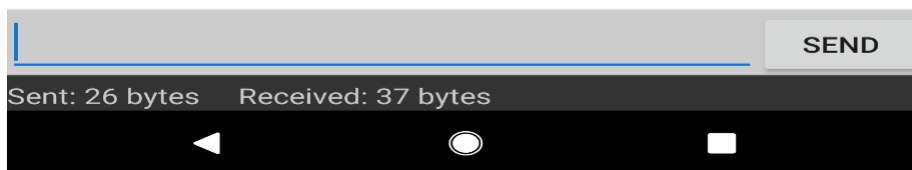

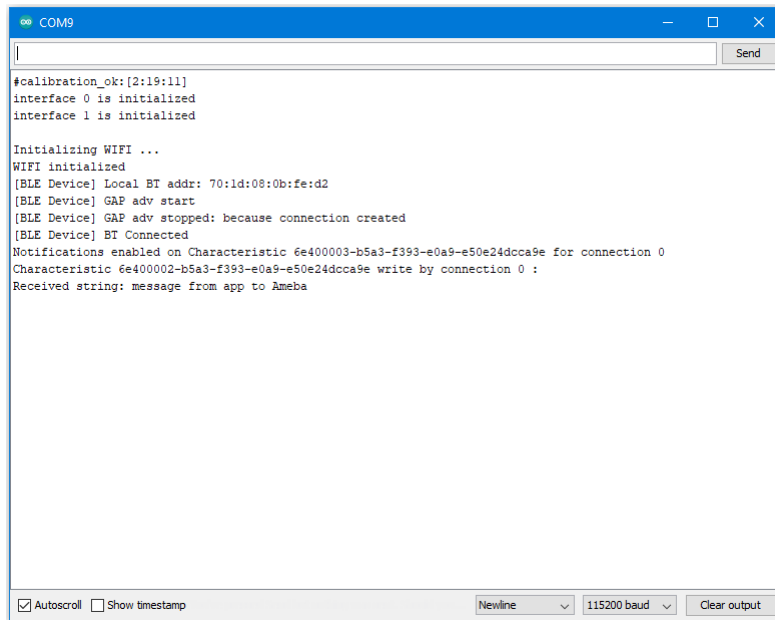

```
#calibration_ok:[2:19:11]
interface 0 is initialized
interface 1 is initialized

Initializing WIFI ...
WIFI initialized
[BLE Device] Local BT addr: 70:1d:08:0b:ferd2
[BLE Device] GAP adv start
[BLE Device] GAP adv stopped: because connection created
[BLE Device] BT Connected
Notifications enabled on Characteristic 6e400003-b5a3-f393-e0a9-e50e24dcca9e for connection 0
Characteristic 6e400002-b5a3-f393-e0a9-e50e24dcca9e write by connection 0 :
Received string: message from app to Ameba
```

Code Reference

The `BLECharacteristic` class is used to create two characteristics, one for receive (Rx) and one for transmit (Tx), and added to a service created with the `BLEService` class.

The required read/write/notify properties are set for each characteristic using the `set__Property()` methods, and callback functions are registered using the `set__Callback()` methods. The required buffer size is also set for each characteristic so that it has enough memory to store a complete string.

When data is written to the receive characteristic, the registered callback function is called, which prints out the received data as a string to the serial monitor.

When data is received on the serial port, it is copied into the transmit characteristic buffer, and the `notify()` method is used to inform the connected device of the new data.

BLE –DHT over BLE UART

Materials

- AmebaD [RTL8722DM/ RTL8722CSM/ RTL8722DM MINI] x 1
- DHT11 or DHT22 or DHT21
- Android / iOS smartphone

Example


Introduction

In this example, the data obtained from a DHT temperature and humidity sensor are transmitted over a BLE UART service to a smartphone. Refer to the other examples for detailed explanations of using the DHT sensor and the BLE UART service.


Procedure

Connect the DHT sensor to the Ameba board following the diagram.

RTL8722DM / RTL8722CSM:

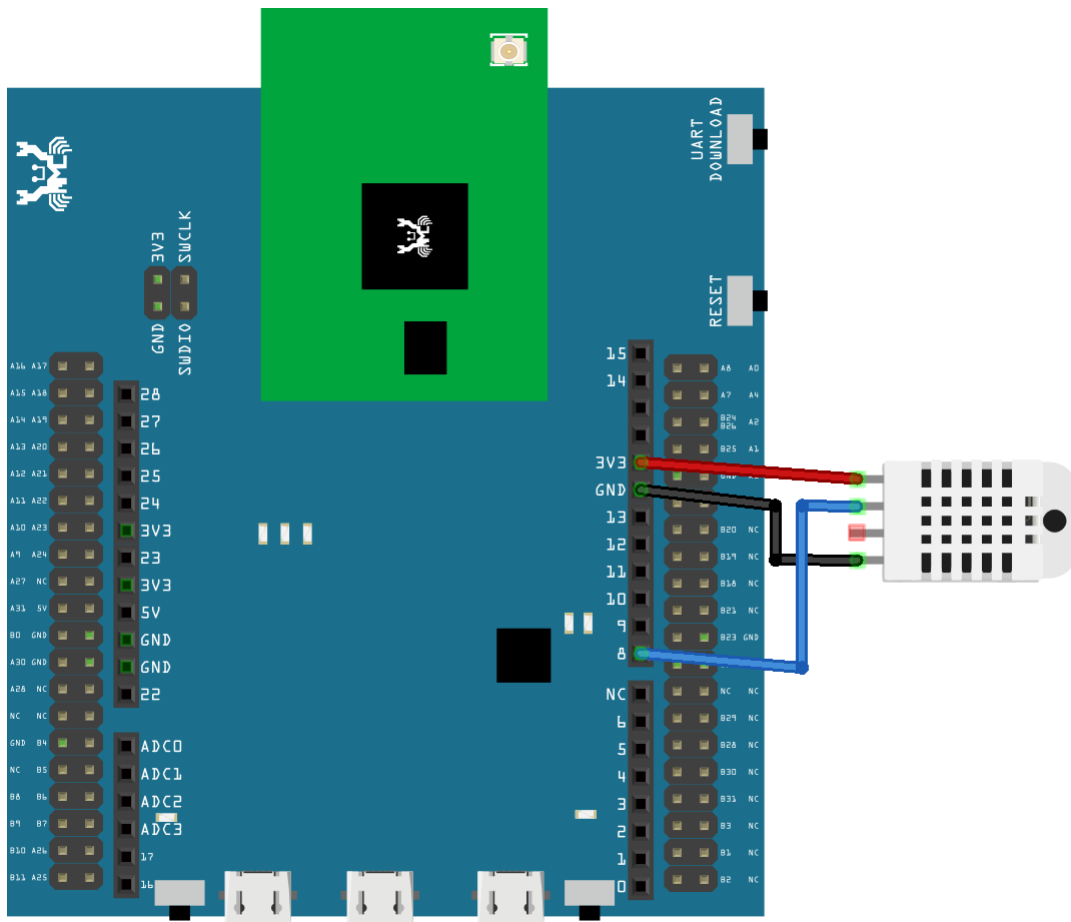

RTL8722DM MINI:

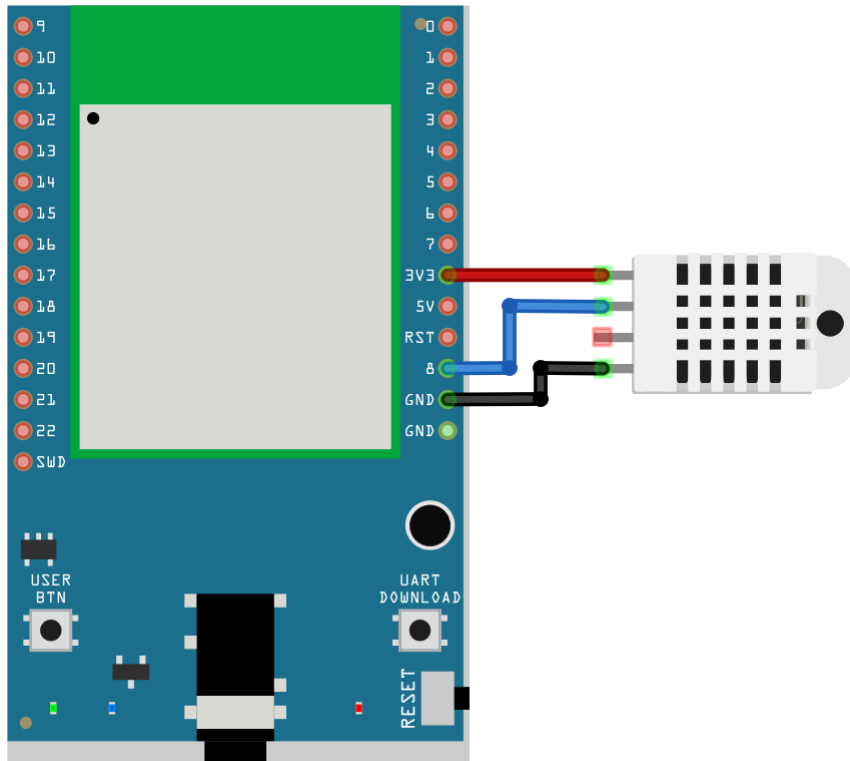

Ensure that a compatible BLE UART app is installed on your smartphone, it is available at:


- Google Play Store:

<https://play.google.com/store/apps/details?id=com.adafruit.bluefruit.le.connecta>>https://play.google.com/store/apps/details?id=de.kai_morich.serial_bluetooth_terminal

- Apple App Store:

<https://apps.apple.com/us/app/bluefruit-connect/id830125974>

Open the example, “Files” -> “Examples” -> “AmebaBLE” -> “DHT_over_BLEUart” .

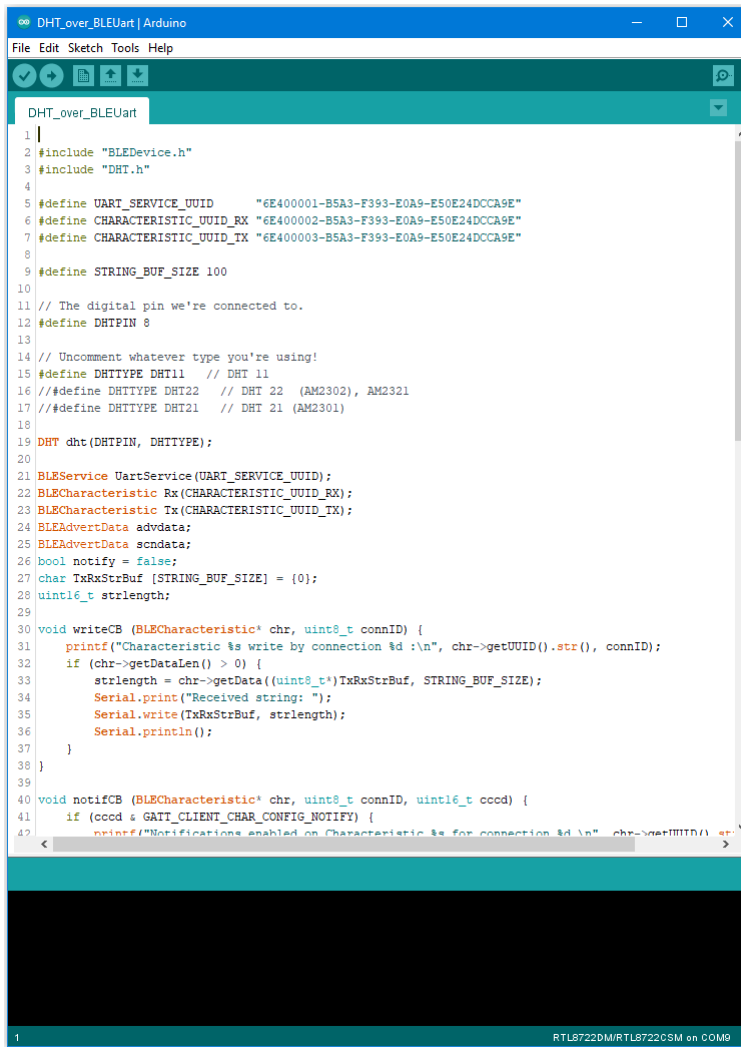


```


1 |
2 #include "BLEDevice.h"
3 #include "DHT.h"
4
5 #define UART_SERVICE_UUID "6E400001-B5A3-F393-E0A9-E50E24DCCA9E"
6 #define CHARACTERISTIC_UUID_RX "6E400002-B5A3-F393-E0A9-E50E24DCCA9E"
7 #define CHARACTERISTIC_UUID_TX "6E400003-B5A3-F393-E0A9-E50E24DCCA9E"
8
9 #define STRING_BUF_SIZE 100
10
11 // The digital pin we're connected to.
12 #define DHTPIN 8
13
14 // Uncomment whatever type you're using!
15 #define DHTTYPE DHT11 // DHT 11
16 // #define DHTTYPE DHT22 // DHT 22 (AM2302), AM2321
17 // #define DHTTYPE DHT21 // DHT 21 (AM2301)
18
19 DHT dht(DHTPIN, DHTTYPE);
20
21 BLEService UartService(UART_SERVICE_UUID);
22 BLECharacteristic Rx(CHARACTERISTIC_UUID_RX);
23 BLECharacteristic Tx(CHARACTERISTIC_UUID_TX);
24 BLEAdvertData advdata;
25 BLEAdvertData scndata;
26 bool notify = false;
27 char TxRxStrBuf [STRING_BUF_SIZE] = {0};
28 uint16_t strlength;
29
30 void writeCB (BLECharacteristic* chr, uint8_t connID) {
31     printf("Characteristic %s write by connection %d :\n", chr->getUUID().str(), connID);
32     if (chr->getLen() > 0) {
33         strlength = chr->getData((uint8_t*)TxRxStrBuf, STRING_BUF_SIZE);
34         Serial.print("Received string: ");
35         Serial.write(TxRxStrBuf, strlength);
36         Serial.println();
37     }
38 }
39
40 void notifyCB (BLECharacteristic* chr, uint8_t connID, uint16_t cccid) {
41     if (cccid & GATT_CLIENT_CHAR_CONFIG_NOTIFY) {
42         printf("Notifications enabled on Characteristic %s for connection %d :\n", chr->getUUID().str(), connID);
43     }
44 }

```



Upload the code and press the reset button on Ameba once the upload is finished.

Open the app on your smartphone, scan and connect to the Ameba board shown as “AMEBA_BLE_DEV” and choose the UART function in the app.

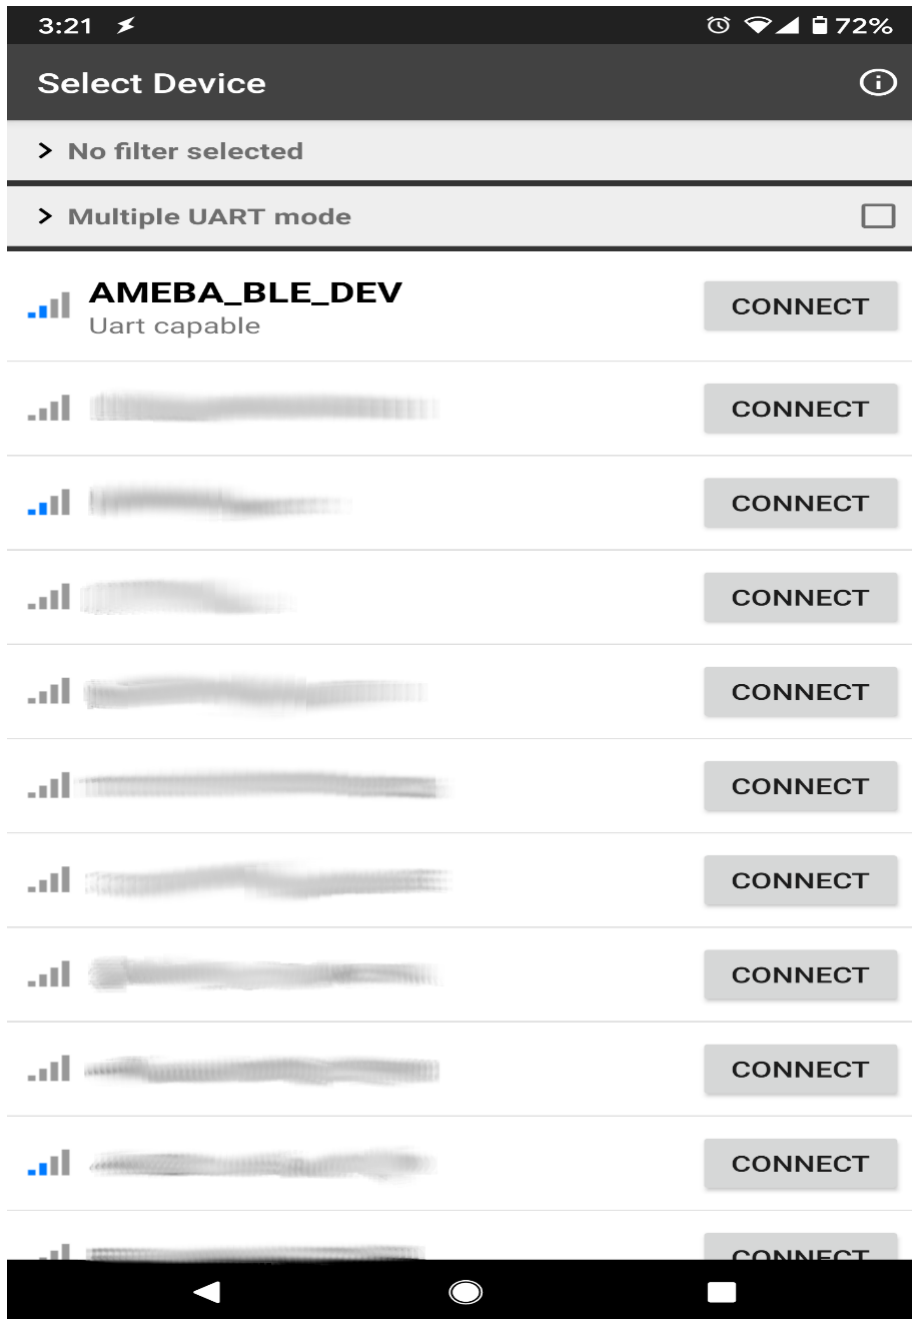

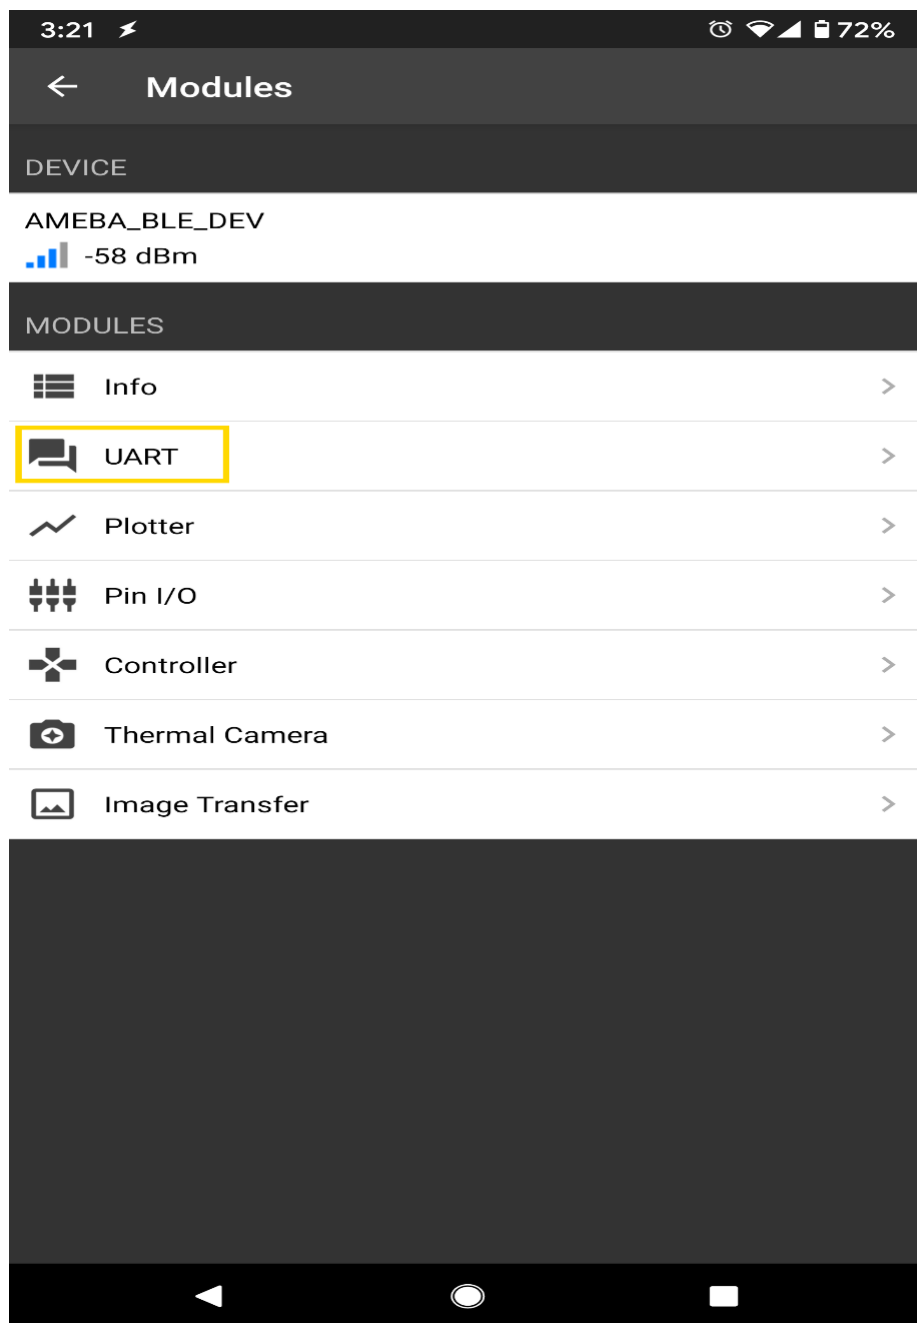

After starting the UART function, notifications should be received every 5 seconds containing the measured temperature and humidity.

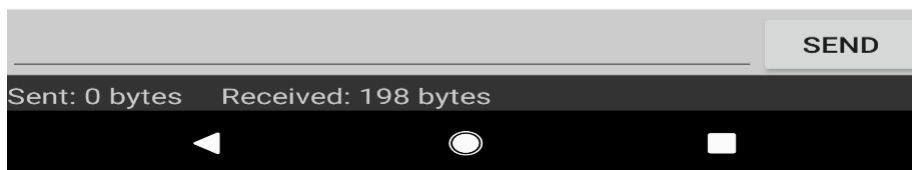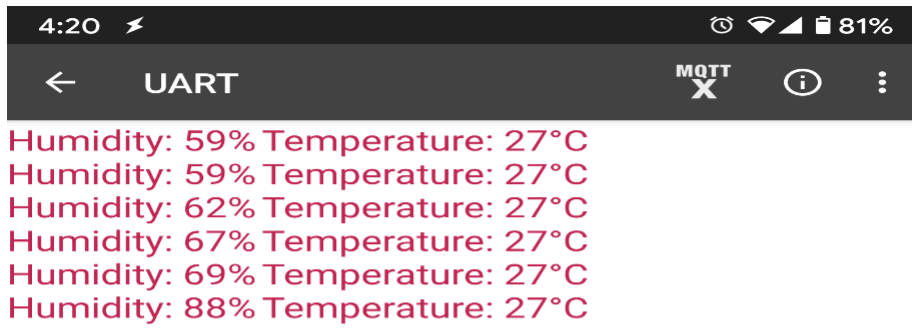

BLE –PWM over BLE UART

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- RGB LED

- Android / iOS smartphone

Example


Introduction

In this example, a smartphone app is used to transmit commands over BLE UART to control the PWM outputs and change the color of a RGB LED. Refer to the other example guides for detailed explanations of the BLE UART service.


Procedure

Connect the RGB LED to the RTL8722 board following the diagram, the common LED pin may need to connect to 3.3V or GND depending on the type of LED (common anode / common cathode).

RTL8722DM / RTL8722CSM:

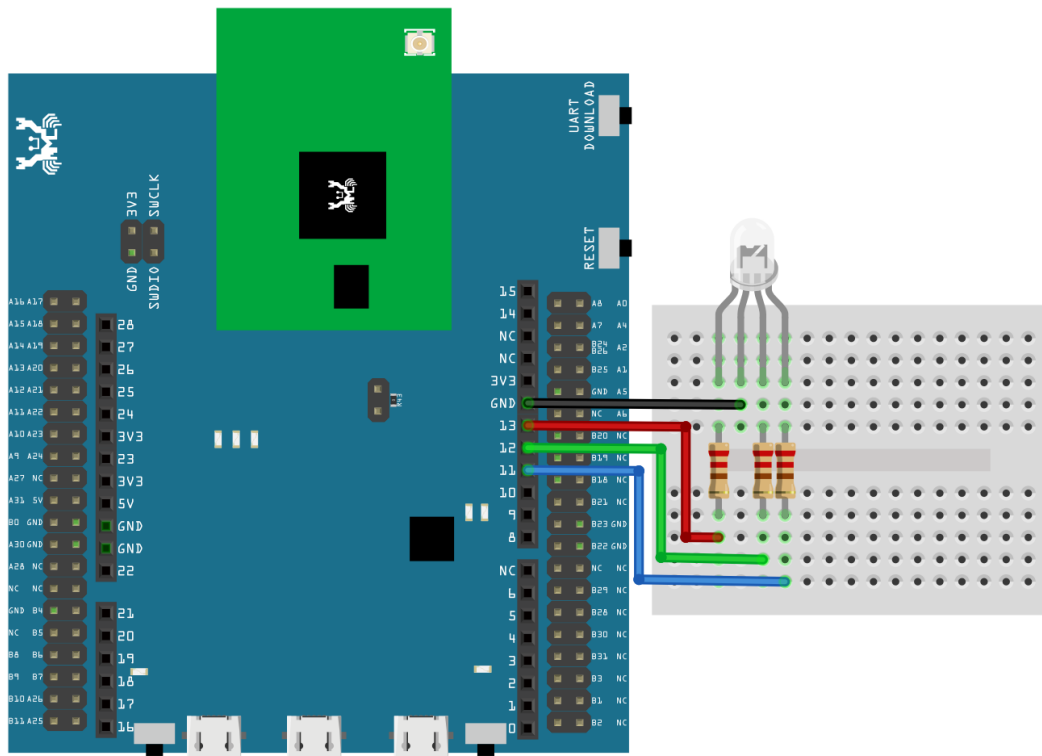

RTL8722DM MINI:

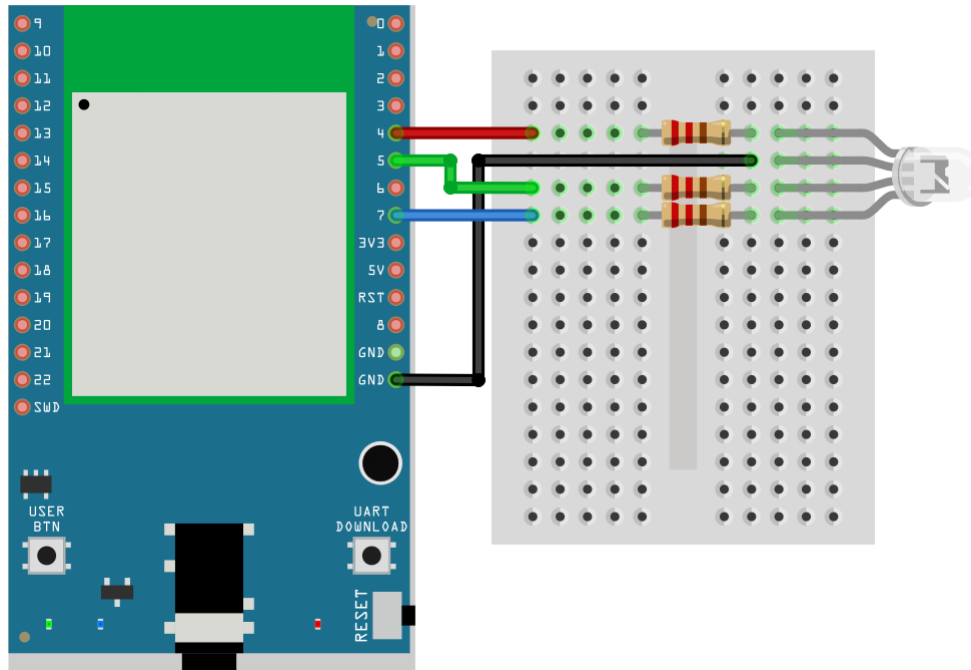

Ensure that the required app is installed on your smartphone, it is available at:

–Google Play Store:


<https://play.google.com/store/apps/details?id=com.adafruit.bluefruit.le.connect>

–Apple App Store:


<https://apps.apple.com/us/app/bluefruit-connect/id830125974>


Open the example, “Files” -> “Examples” -> “AmebaBLE” -> “PWM_over_BLEUart” .


Upload the code and press the reset button on Ameba once the upload is finished.

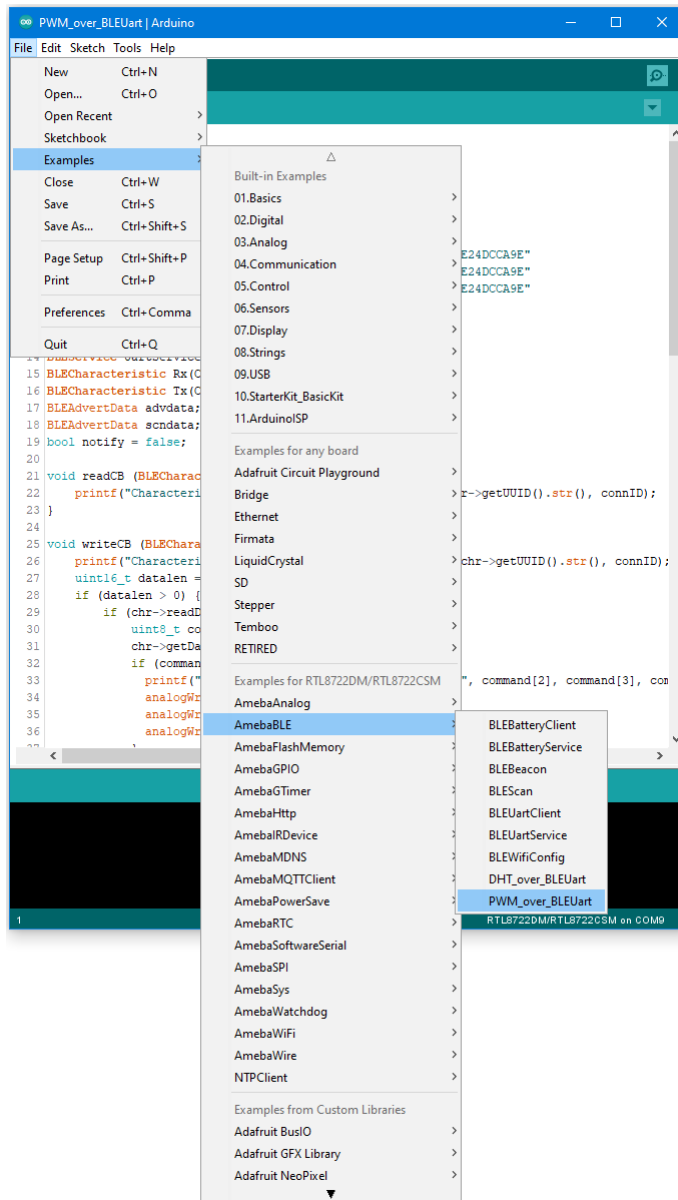


Open the app on your smartphone, scan and connect to the board shown as “AMEBA_BLE_DEV” and choose the controller -> color picker function in the app.

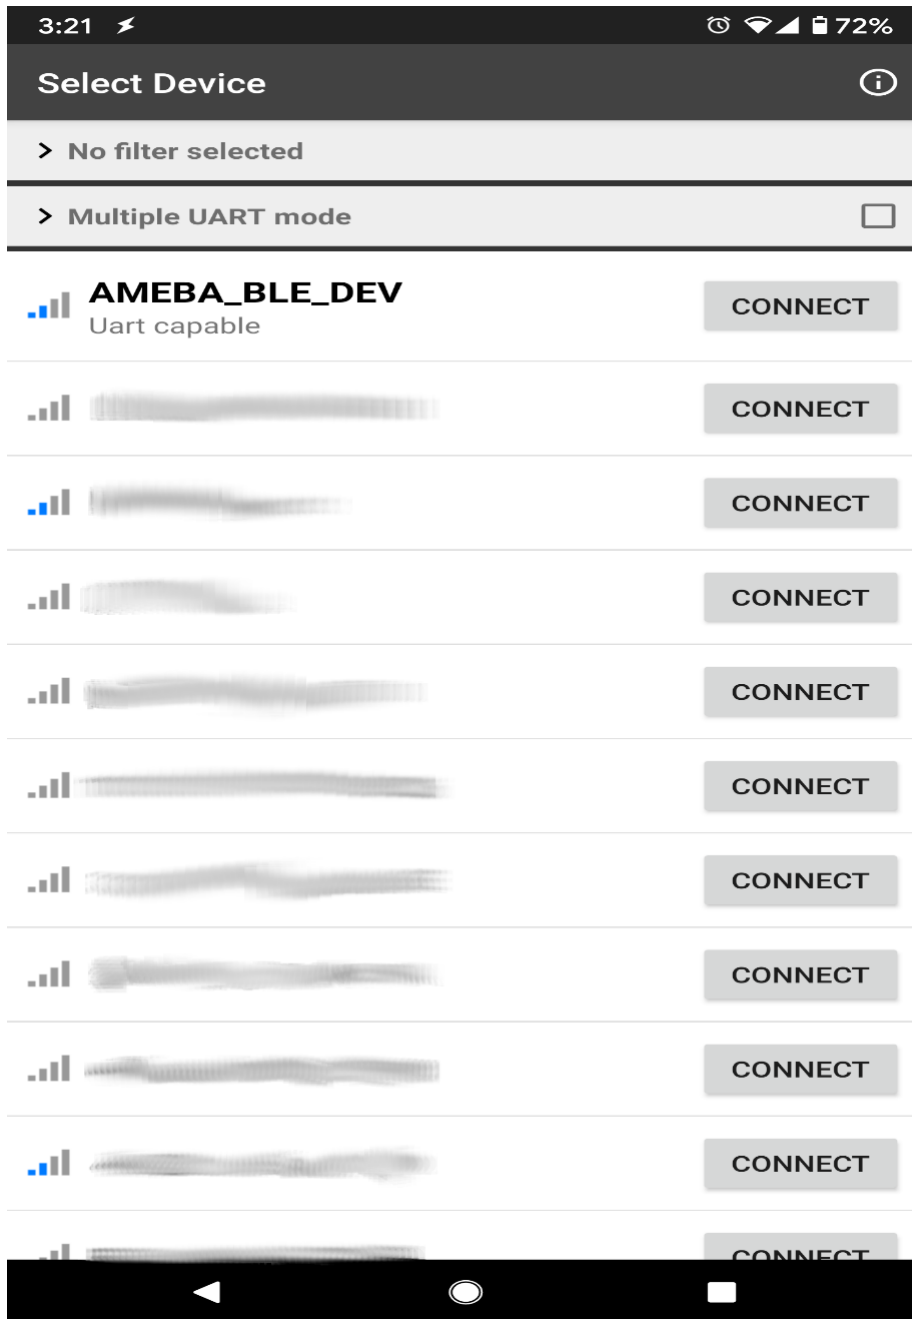

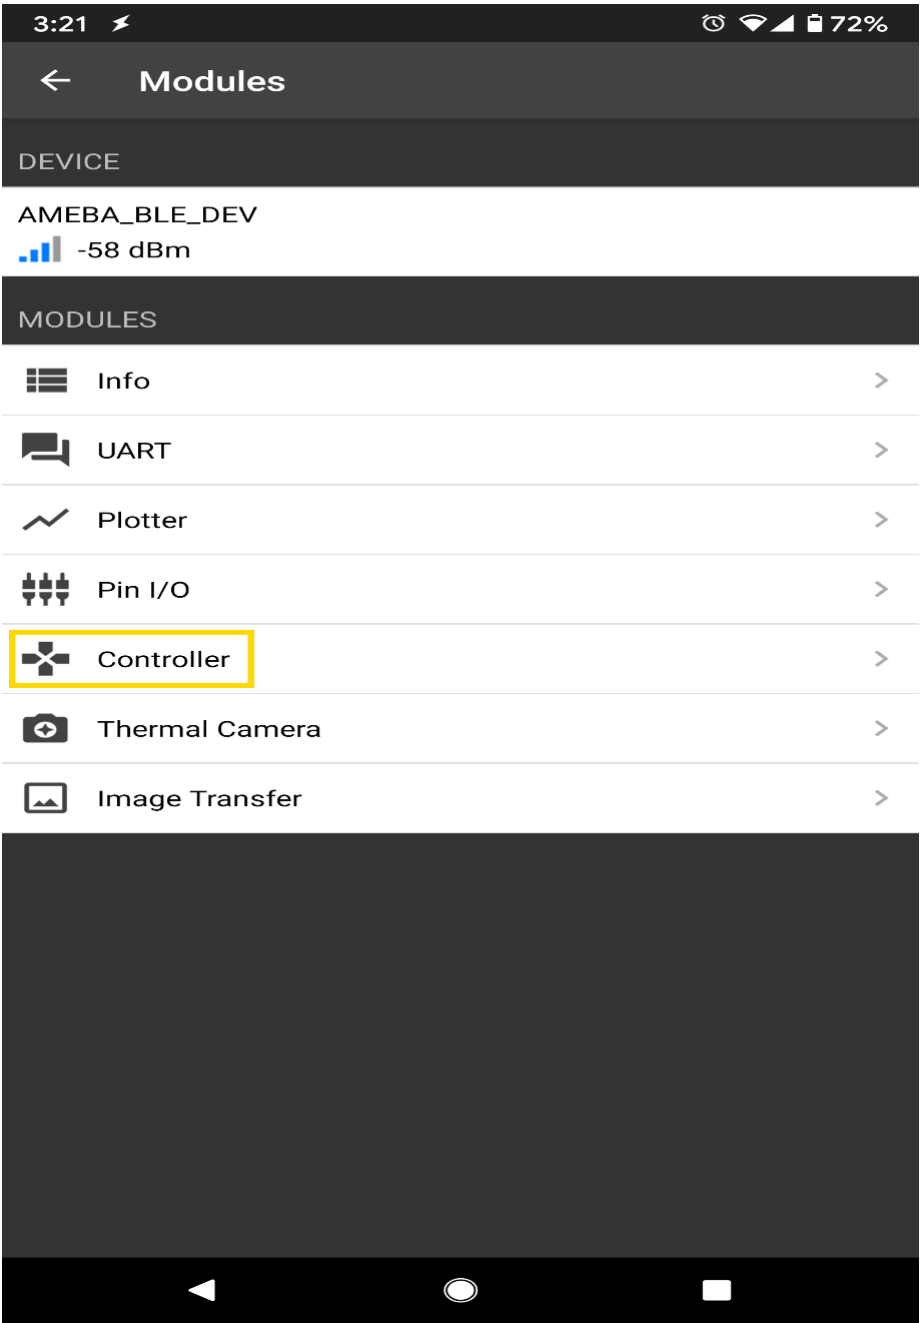

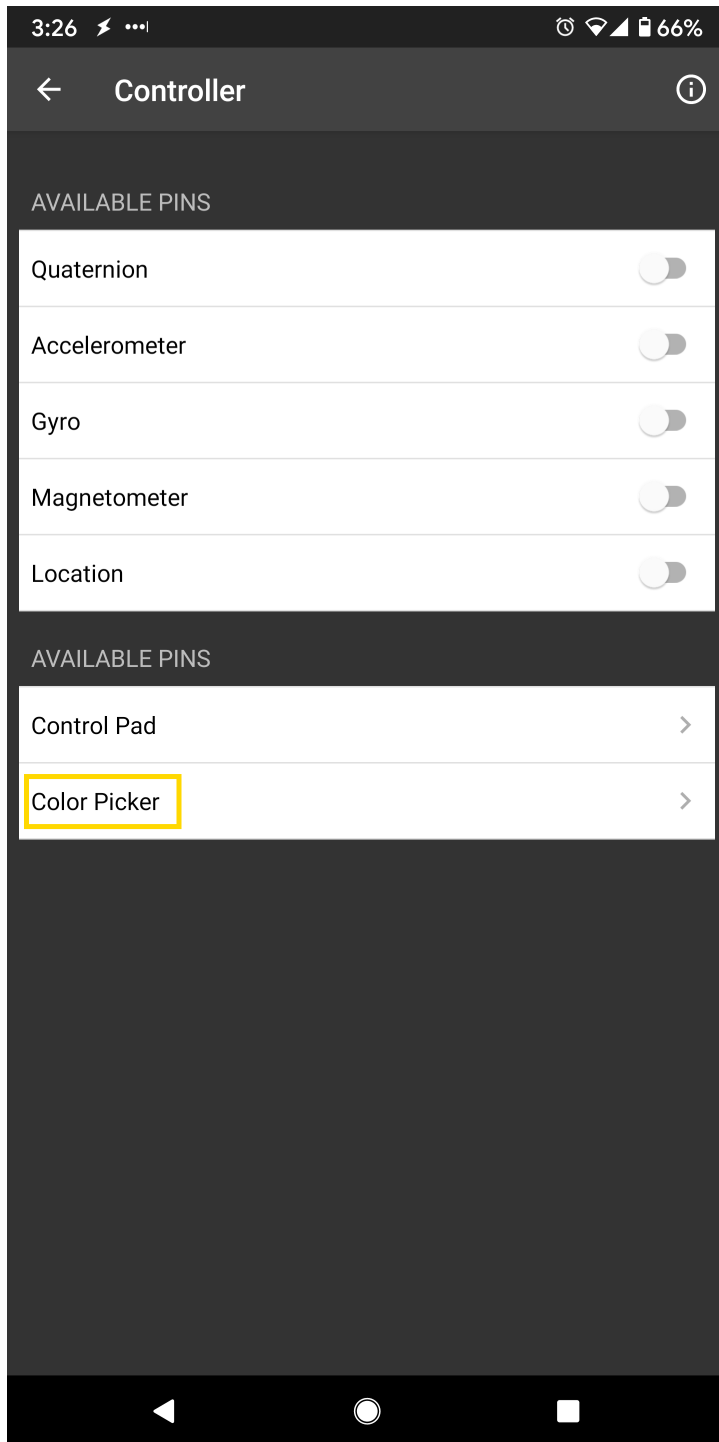

Using the color selection wheel, saturation, and brightness sliders, choose a desired color and click select to send the RGB values to the board. You should see the RGB LED change to the matching color.

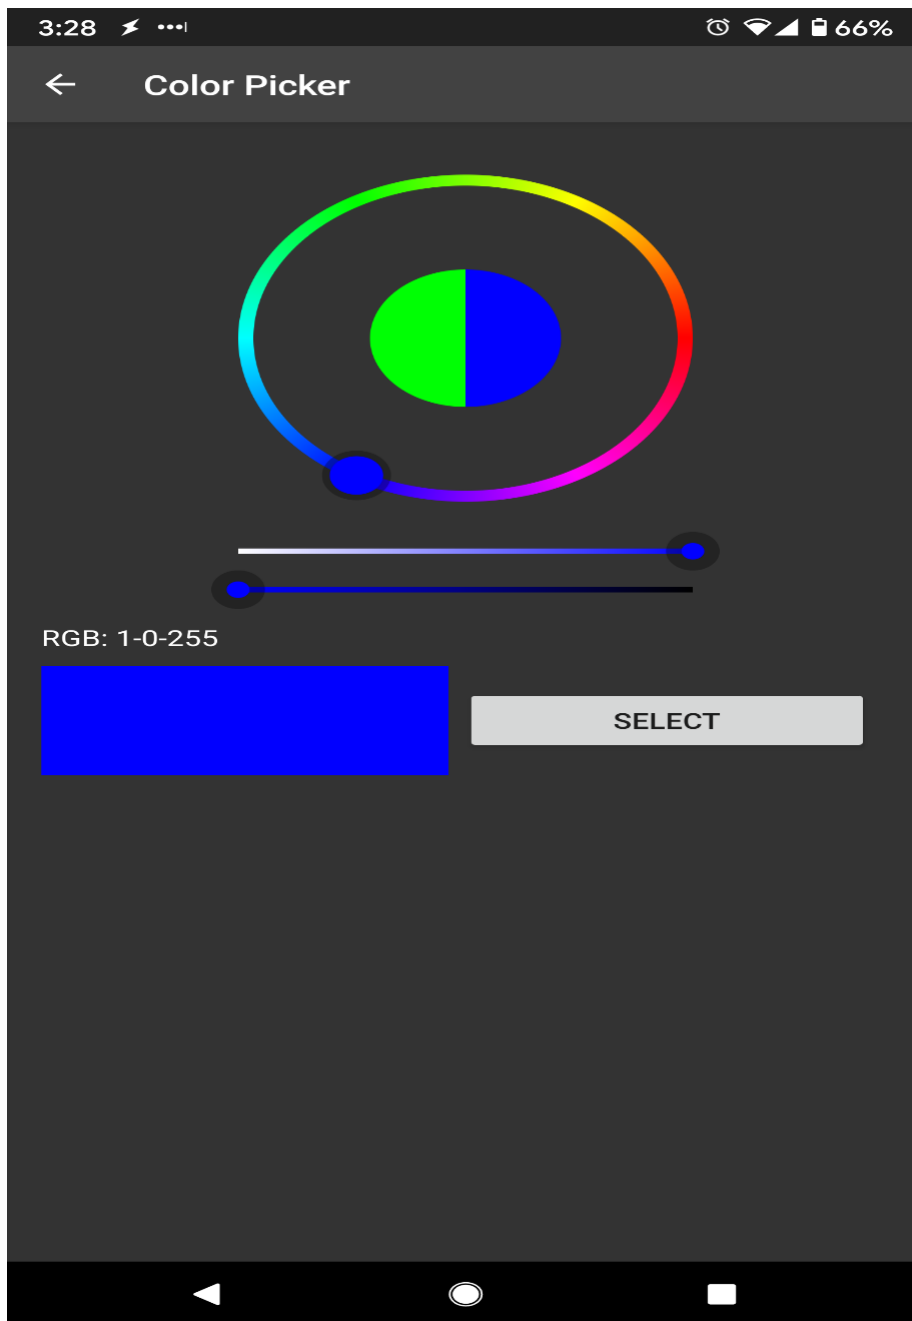

Code Reference

The RGB values are sent as three consecutive bytes prefixed by “!C” characters. The “!” exclamation mark is used to indicate that the following data is a command, and the “C” character is used to indicate that the data is RGB values. The received UART message is checked in the callback function for “!C” first, otherwise it is treated as a regular message and printed to the serial terminal.

Approximate UDP Receive Delay

Materials


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Windows computer connected to same network

Example


This example uses Ameba to receive UDP packets from a computer and calculates the UDP receive delay.

Ameba Preparation

Open the “CalculateUdpReceiveDelay” example in “File” -> “Examples” -> “AmebaWiFi” -> “UDP_Calculation” -> “CalculateUdpReceiveDelay”.

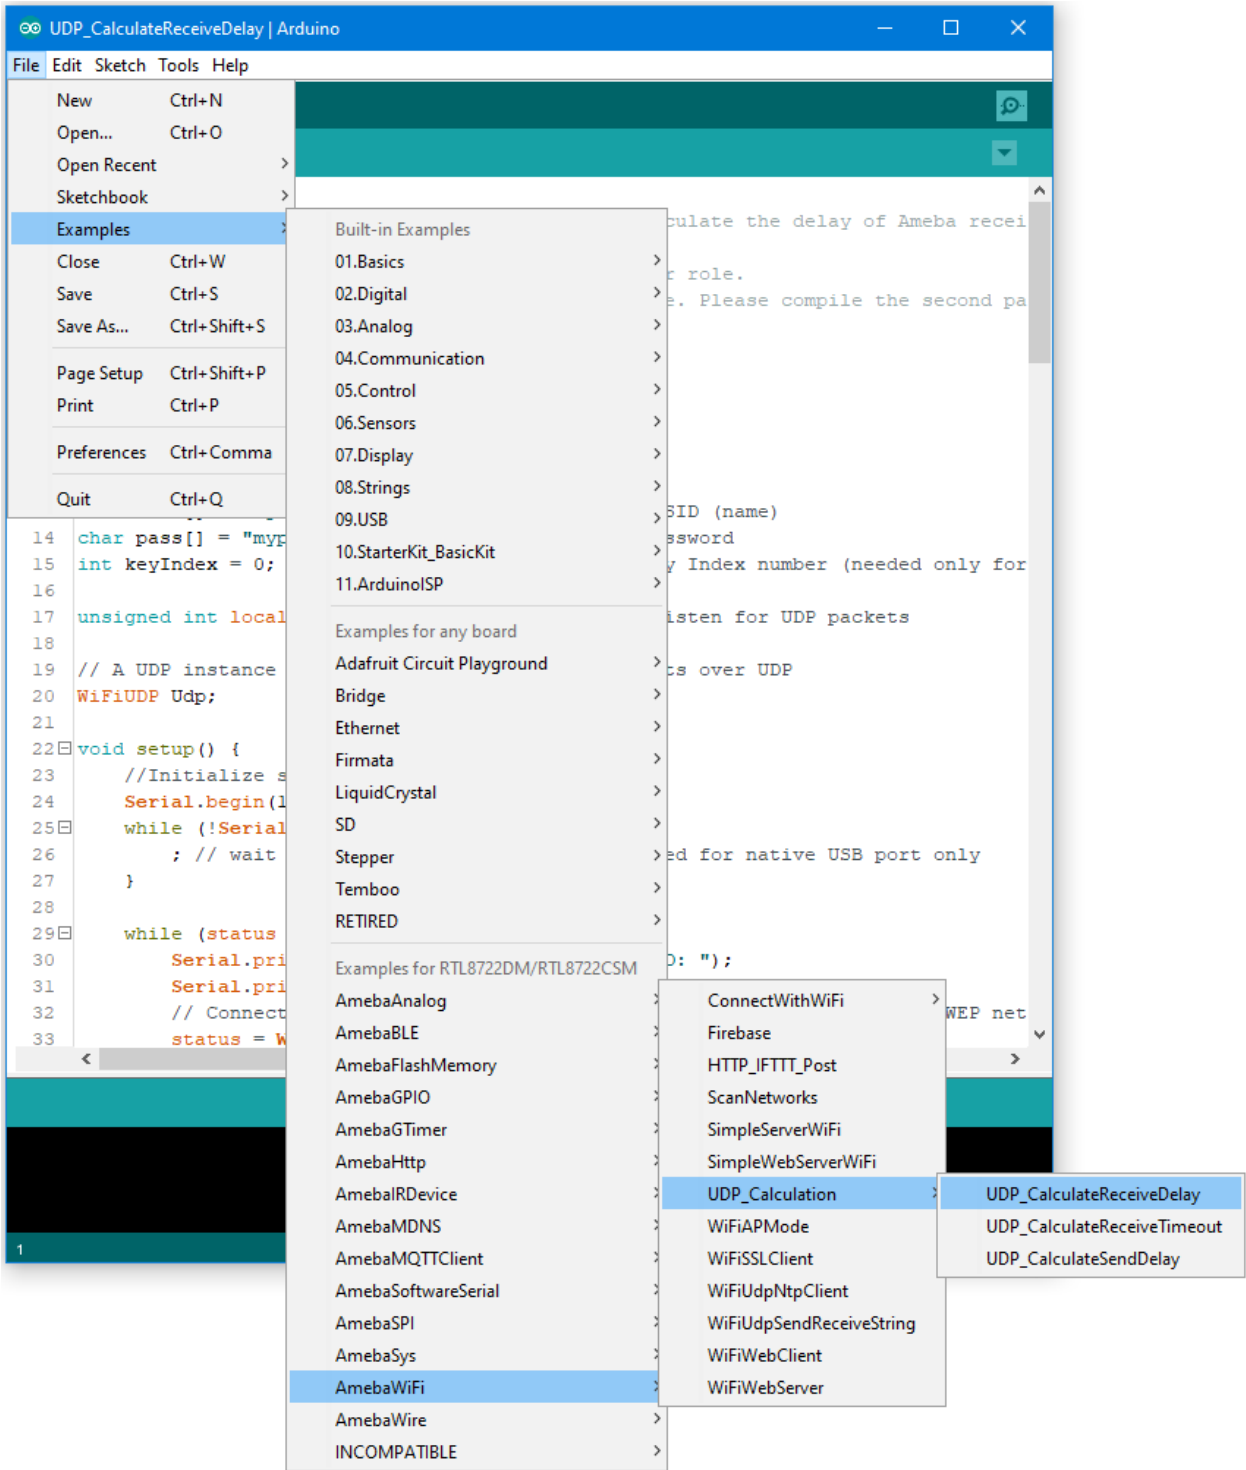

In the sample code, modify the highlighted section to enter the information required (ssid, password, key index) to connect to your WiFi network.

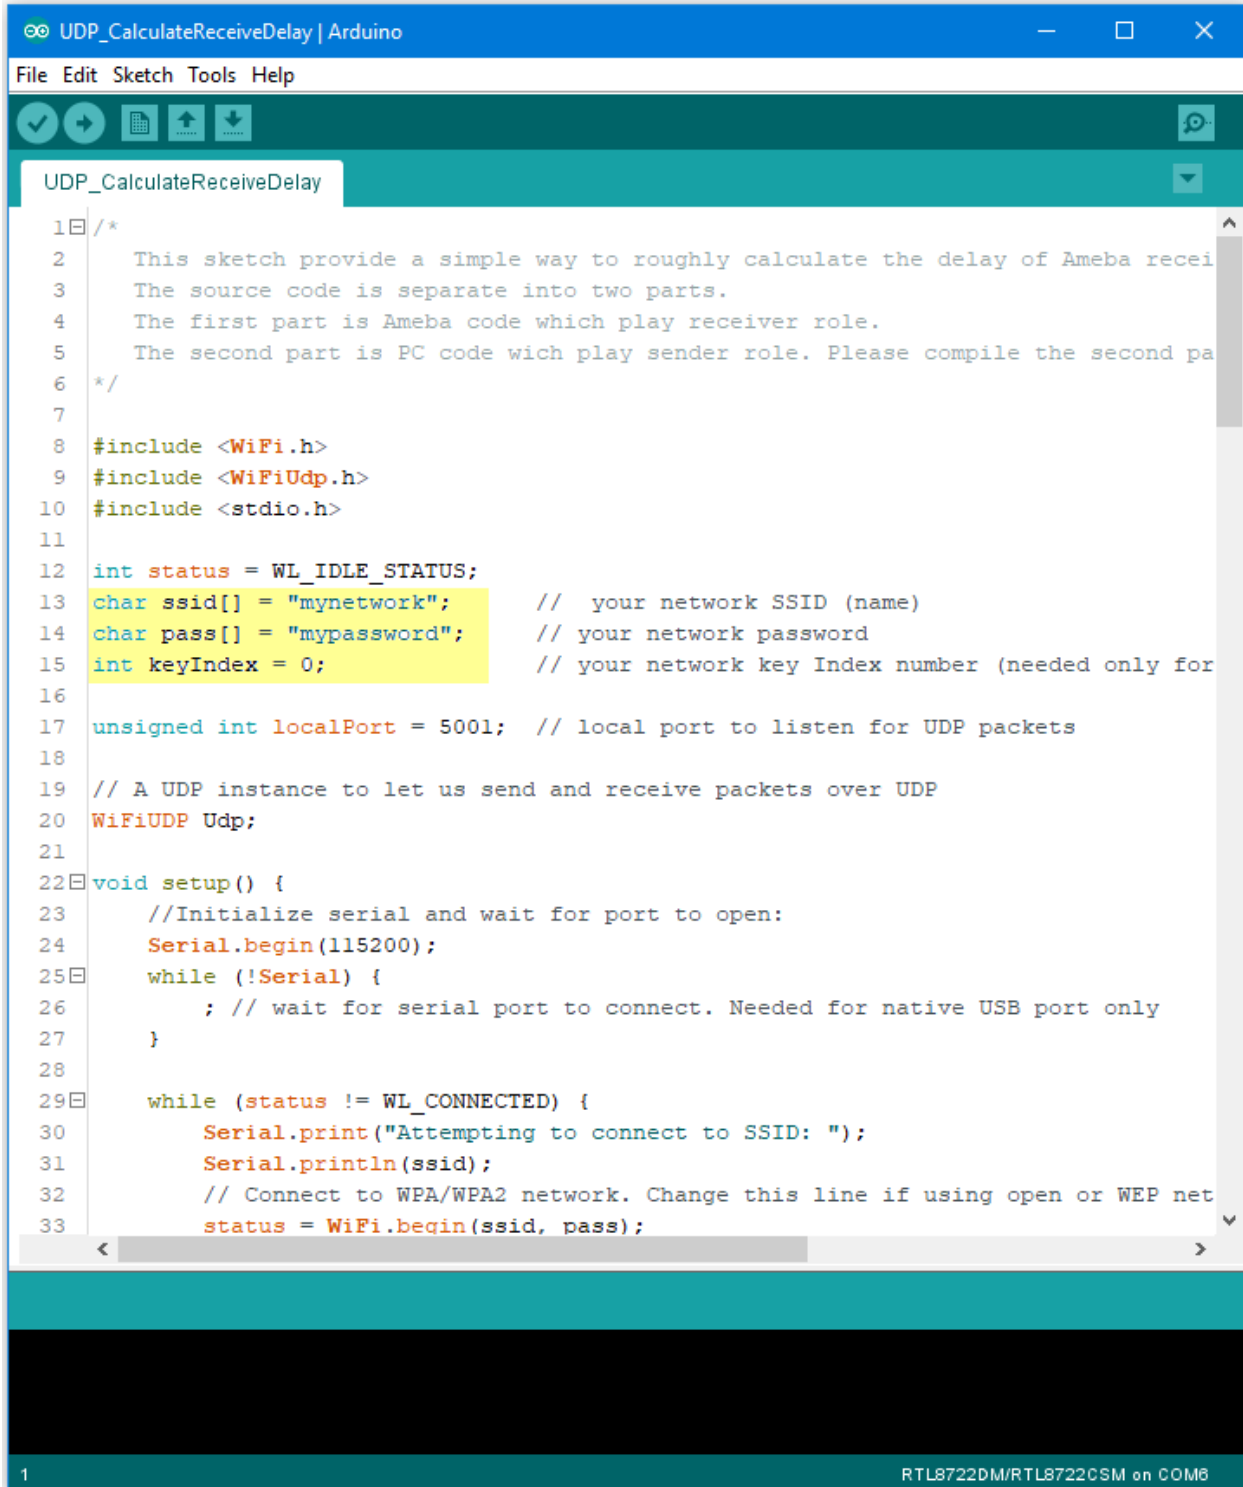

```


1  /*
2   This sketch provide a simple way to roughly calculate the delay of Ameba recei
3   The source code is separate into two parts.
4   The first part is Ameba code which play receiver role.
5   The second part is PC code wich play sender role. Please compile the second pa
6  */
7
8  #include <WiFi.h>
9  #include <WiFiUdp.h>
10 #include <stdio.h>
11
12 int status = WL_IDLE_STATUS;
13 char ssid[] = "mynetwork"; // your network SSID (name)
14 char pass[] = "mypassword"; // your network password
15 int keyIndex = 0; // your network key Index number (needed only for
16
17 unsigned int localPort = 5001; // local port to listen for UDP packets
18
19 // A UDP instance to let us send and receive packets over UDP
20 WiFiUDP Udp;
21
22 void setup() {
23     //Initialize serial and wait for port to open:
24     Serial.begin(115200);
25     while (!Serial) {
26         ; // wait for serial port to connect. Needed for native USB port only
27     }
28
29     while (status != WL_CONNECTED) {
30         Serial.print("Attempting to connect to SSID: ");
31         Serial.println(ssid);
32         // Connect to WPA/WPA2 network. Change this line if using open or WEP net
33         status = WiFi.begin(ssid, pass);

```

1

RTL8722DM/RTL8722CSM on COM8

Upload the code and press the reset button on Ameba once the upload is finished. Open the serial monitor in Arduino IDE and take note of the IP address assigned to Ameba.

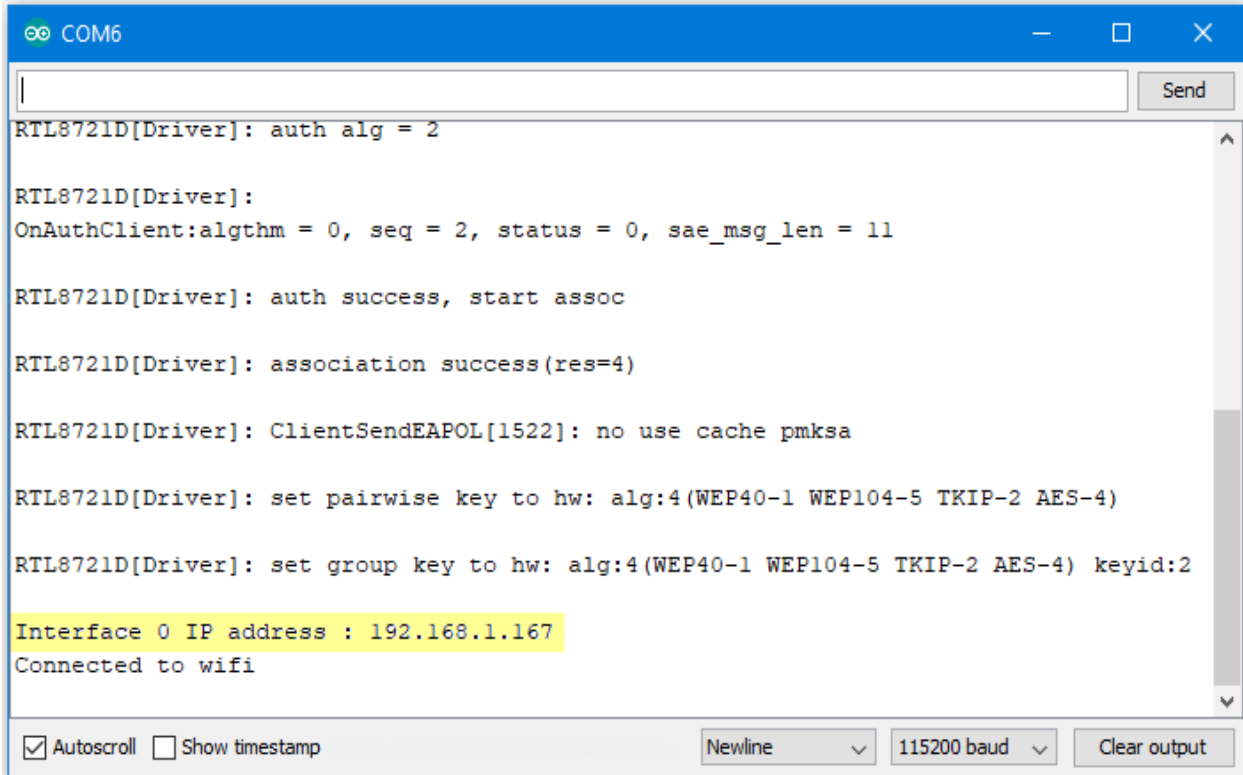

```
COM6
|
Send
RTL8721D[Driver]: auth alg = 2
RTL8721D[Driver]:
OnAuthClient:alghm = 0, seq = 2, status = 0, sae_msg_len = 11
RTL8721D[Driver]: auth success, start assoc
RTL8721D[Driver]: association success(res=4)
RTL8721D[Driver]: ClientSendEAPOL[1522]: no use cache pmksa
RTL8721D[Driver]: set pairwise key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4)
RTL8721D[Driver]: set group key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4) keyid:2
Interface 0 IP address : 192.168.1.167
Connected to wifi
☒ Autoscroll ☐ Show timestamp Newline 115200 baud Clear output
```

Computer Preparation

On the computer, Cygwin will be required to compile the code to send the UDP packets. Cygwin can be downloaded from <https://www.cygwin.com/>

Follow the instructions there to install it. Next, from the “CalculateUdpReceiveDelay” Arduino example, copy the code from the bottom between “#if 0” and “#endif” , into a new text file, change the hostname to the IP address assigned to Ameba, and rename the file to “UdpReceiveDelay.cpp” .

```

1  #include <stdio.h>
2  #include <stdlib.h>
3  #include <string.h>
4  #include <sys/socket.h>
5  #include <netinet/in.h>
6  #include <arpa/inet.h>
7  #include <sys/time.h>
8  #include <unistd.h>
9
10 #define BUFSIZE 1024
11
12 char *hostname = "172.25.24.243";
13 int portno = 5001;
14
15 long base_current_time = 0;
16 long get_current_time_with_ms (void)
17 {
18     struct timeval tv;
19
20     gettimeofday(&tv, NULL);
21
22     long millisecondsSinceEpoch =
23         (long)(tv.tv_sec) * 1000 +
24         (long)(tv.tv_usec) / 1000;
25
26     if (base_current_time == 0) {
27         base_current_time = millisecondsSinceEpoch;
28         return 0;
29     } else {
30         return millisecondsSinceEpoch - base_current_time;
31     }
32 }


```

length: 1,666 lines: 67 Ln: 12 Col: 1 Sel: 0|0 Windows (CR LF) UTF-8 INS

Next, open a Cygwin terminal, change the working directory to the location of “UdpReceiveDelay.cpp”, and use the command “g++ UdpReceiveDelay.cpp -o UdpDelay” to compile the code. A file named “UdpDelay.exe” will be created in the same directory.

Running the Example

Reset the Ameba, wait for the WiFi to connect, and check that the IP address remains the same. On the computer, run the UdpDelay.exe file, and the computer will begin to send packets to Ameba. Once 10000 packets have been received, Ameba will calculate the average delay and print out the result to the serial monitor. It may take up to a few minutes for 10000 packets to be sent.

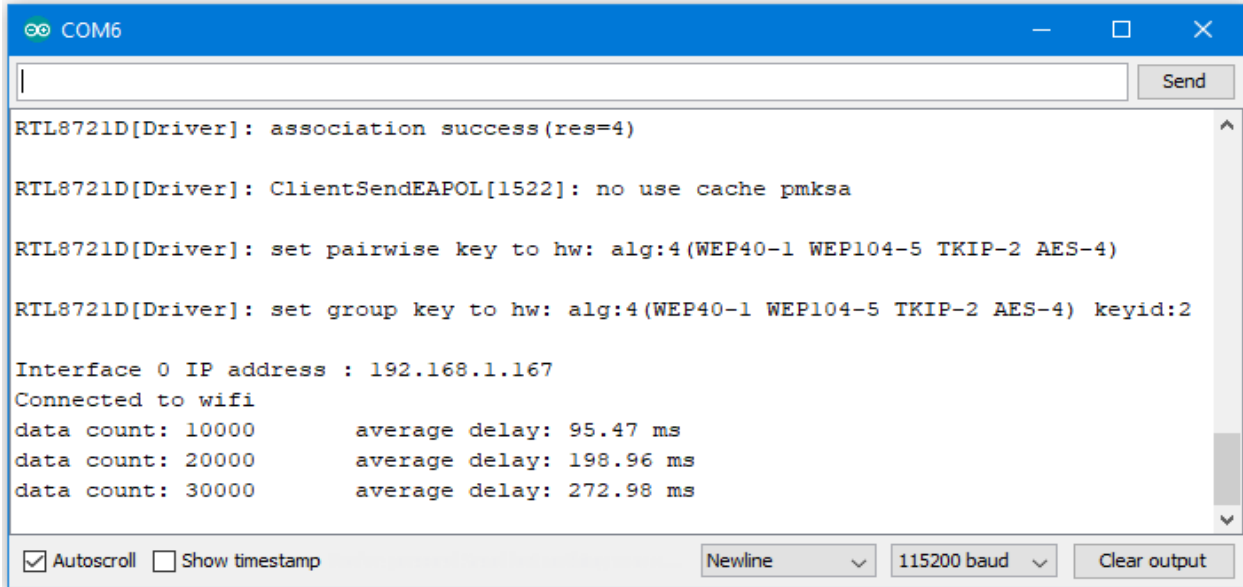

```
COM6

RTL8721D[Driver]: association success(res=4)

RTL8721D[Driver]: ClientSendEAPOL[1522]: no use cache pmksa

RTL8721D[Driver]: set pairwise key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4)

RTL8721D[Driver]: set group key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4) keyid:2

Interface 0 IP address : 192.168.1.167
Connected to wifi
data count: 10000      average delay: 95.47 ms
data count: 20000      average delay: 198.96 ms
data count: 30000      average delay: 272.98 ms

☒ Autoscroll ☐ Show timestamp Newline 115200 baud Clear output
```

Approximate UDP Receive Timeout

Materials


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Windows computer connected to same network

Example


This example uses Ameba to receive UDP packets from a computer and calculates the allowed UDP receive timeout setting.

Ameba Preparation

Open the “CalculateUdpReceiveTimeout” example in “File” -> “Examples” -> “AmebaWiFi” -> “UDP_Calculation ” -> “CalculateUdpReceiveTimeout” .

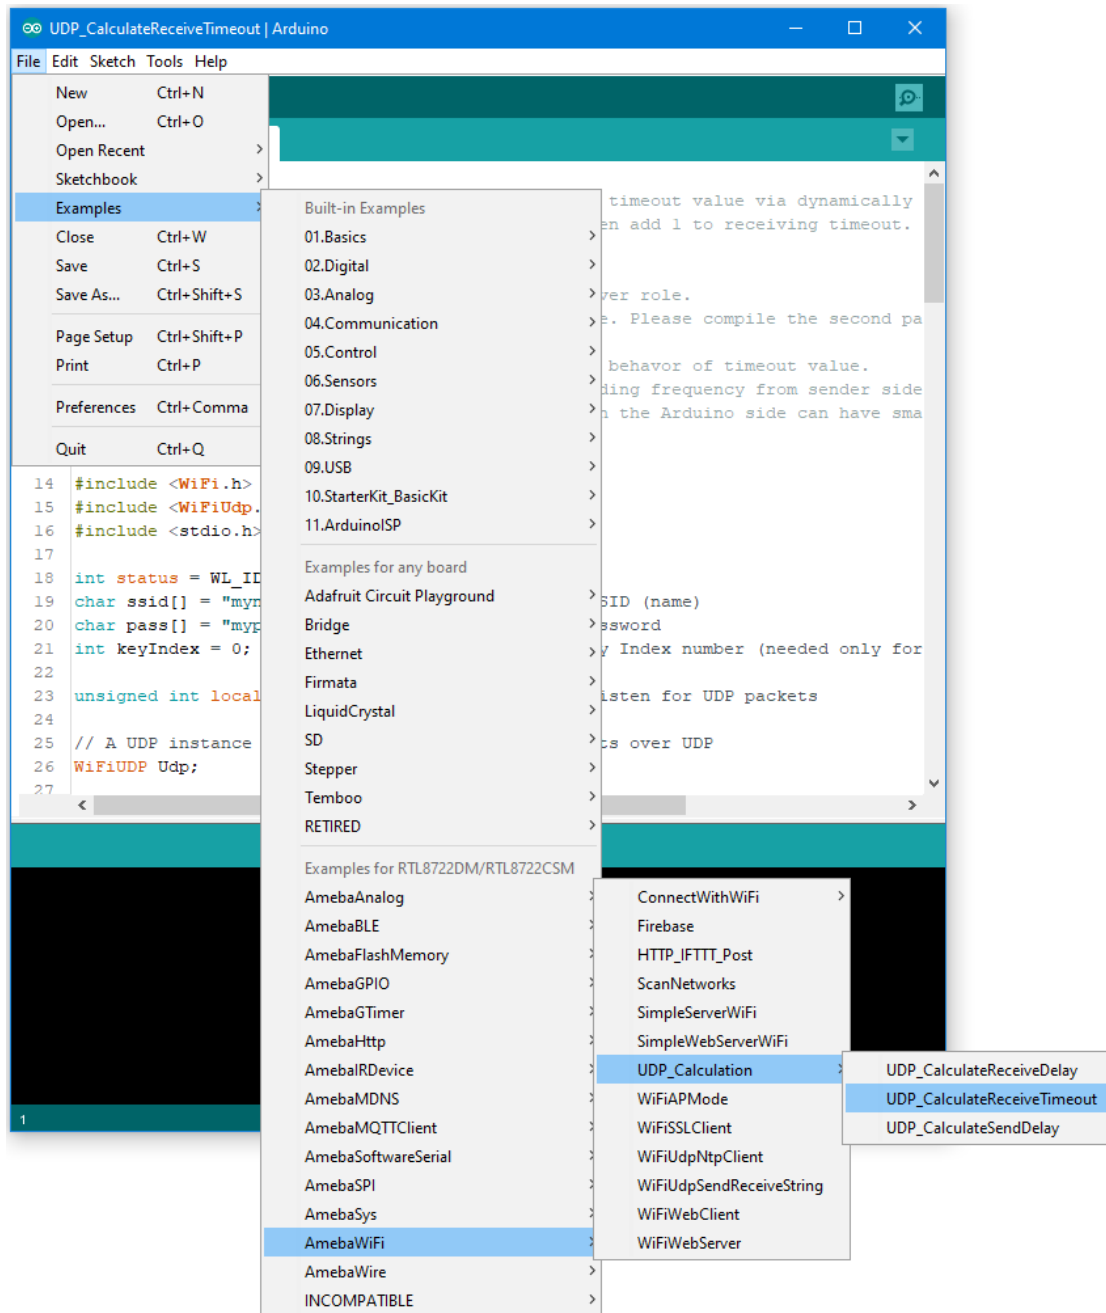

In the sample code, modify the highlighted section to enter the information required (ssid, password, key index) to connect to your WiFi network.

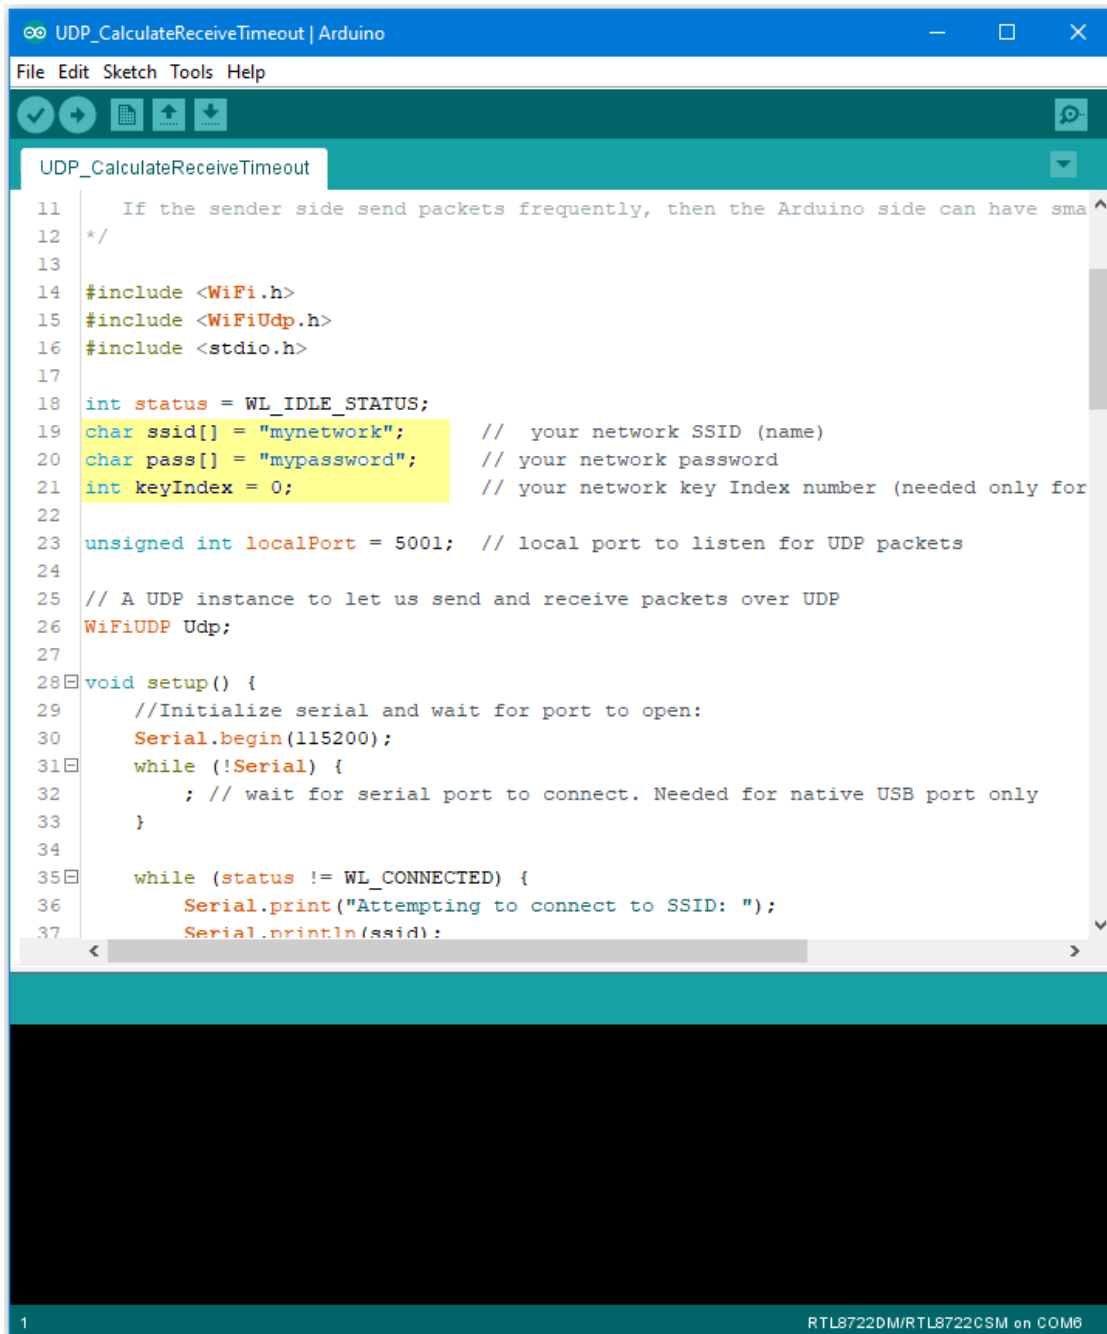


```

11  If the sender side send packets frequently, then the Arduino side can have sma
12  */
13
14  #include <WiFi.h>
15  #include <WiFiUdp.h>
16  #include <stdio.h>
17
18  int status = WL_IDLE_STATUS;
19  char ssid[] = "mynetwork"; // your network SSID (name)
20  char pass[] = "mypassword"; // your network password
21  int keyIndex = 0; // your network key Index number (needed only for
22
23  unsigned int localPort = 5001; // local port to listen for UDP packets
24
25  // A UDP instance to let us send and receive packets over UDP
26  WiFiUDP Udp;
27
28  void setup() {
29      //Initialize serial and wait for port to open:
30      Serial.begin(115200);
31      while (!Serial) {
32          ; // wait for serial port to connect. Needed for native USB port only
33      }
34
35      while (status != WL_CONNECTED) {
36          Serial.print("Attempting to connect to SSID: ");
37          Serial.println(ssid);

```

Upload the code and press the reset button on Ameba once the upload is finished.

Open the serial monitor in Arduino IDE and take note of the IP address assigned to Ameba.

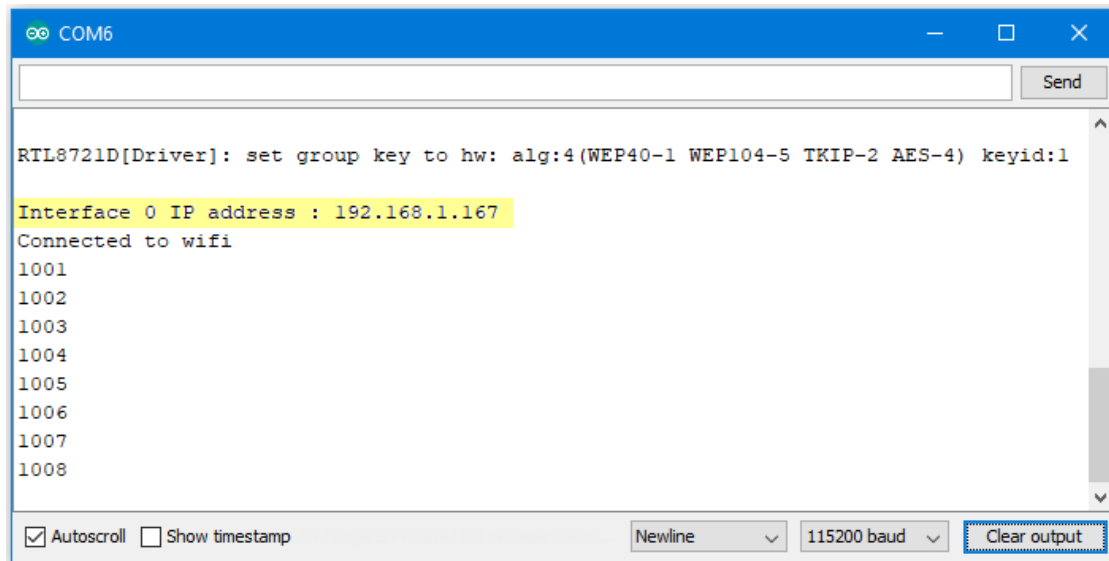

```
COM6

RTL8721D[Driver]: set group key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4) keyid:1
Interface 0 IP address : 192.168.1.167
Connected to wifi
1001
1002
1003
1004
1005
1006
1007
1008

☒ Autoscroll ☐ Show timestamp Newline 115200 baud Clear output
```

Computer Preparation

On the computer, Cygwin will be required to compile the code to send the UDP packets. Cygwin can be downloaded from <https://www.cygwin.com/>

Follow the instructions there to install it. Next, from the “CalculateUdpReceiveTimeout” Arduino example, copy the code from the bottom between “#if 0” and “#endif” , into a new text file, change the hostname to the IP address assigned to Ameba, and rename the file to “UdpReceiveTimeout.cpp” .

```

1  #include <stdio.h>
2  #include <stdlib.h>
3  #include <string.h>
4  #include <sys/socket.h>
5  #include <netinet/in.h>
6  #include <arpa/inet.h>
7  #include <unistd.h>
8
9  #define BUFSIZE 16
10
11 char *hostname = "192.168.1.213";
12 int portno = 5001;
13
14 int main(int argc, char **argv) {
15     int sockfd, n;
16     struct sockaddr_in serveraddr;
17     int serverlen = sizeof(serveraddr);
18     char buf[BUFSIZE];
19     int counter = 0;
20
21     /* socket: create the socket */
22     sockfd = socket(AF_INET, SOCK_DGRAM, 0);
23     if (sockfd < 0) {
24         printf("ERROR opening socket\r\n");
25         return -1;
26     }
27
28     /* build the server's Internet address */
29     memset(&serveraddr, 0, sizeof(serveraddr));
30     serveraddr.sin_family = AF_INET;
31     serveraddr.sin_addr.s_addr = inet_addr(hostname);
32     serveraddr.sin_port = htons(portno);

```

length: 1,246 lines: 49 Ln: 11 Col: 5 Sel: 0|0 Windows (CR LF) UTF-8 INS

Next, open a Cygwin terminal, change the working directory to the location of “UdpReceiveTimeout.cpp”, and use the command “g++ UdpReceiveTimeout.cpp -o UdpTimeout” to compile the code. A file named “UdpTimeout.exe” will be created in the same directory.

Running the Example

Reset the Ameba, wait for the WiFi to connect, and check that the IP address remains the same. On the computer, run the UdpTimeout.exe file, and the computer will begin to send packets continuously to Ameba.

The timeout value is set to 1000ms initially. For each packet received successfully, Ameba decreases the timeout value. The next packet must be received within the timeout period, otherwise Ameba registers a failed packet and increases the timeout value. Open the serial monitor and observe the timeout value converge to a minimum value.

Approximate UDP Sending Delay

Materials


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Windows computer connected to same network

Example

This example uses Ameba to send UDP packets to a computer and calculates the UDP sending delay.


Ameba Preparation

Open the “CalculateUdpSendDelay” example in “File” -> “Examples” -> “AmebaWiFi” -> “UDP_Calculation” -> “CalculateUdpSendDelay”.

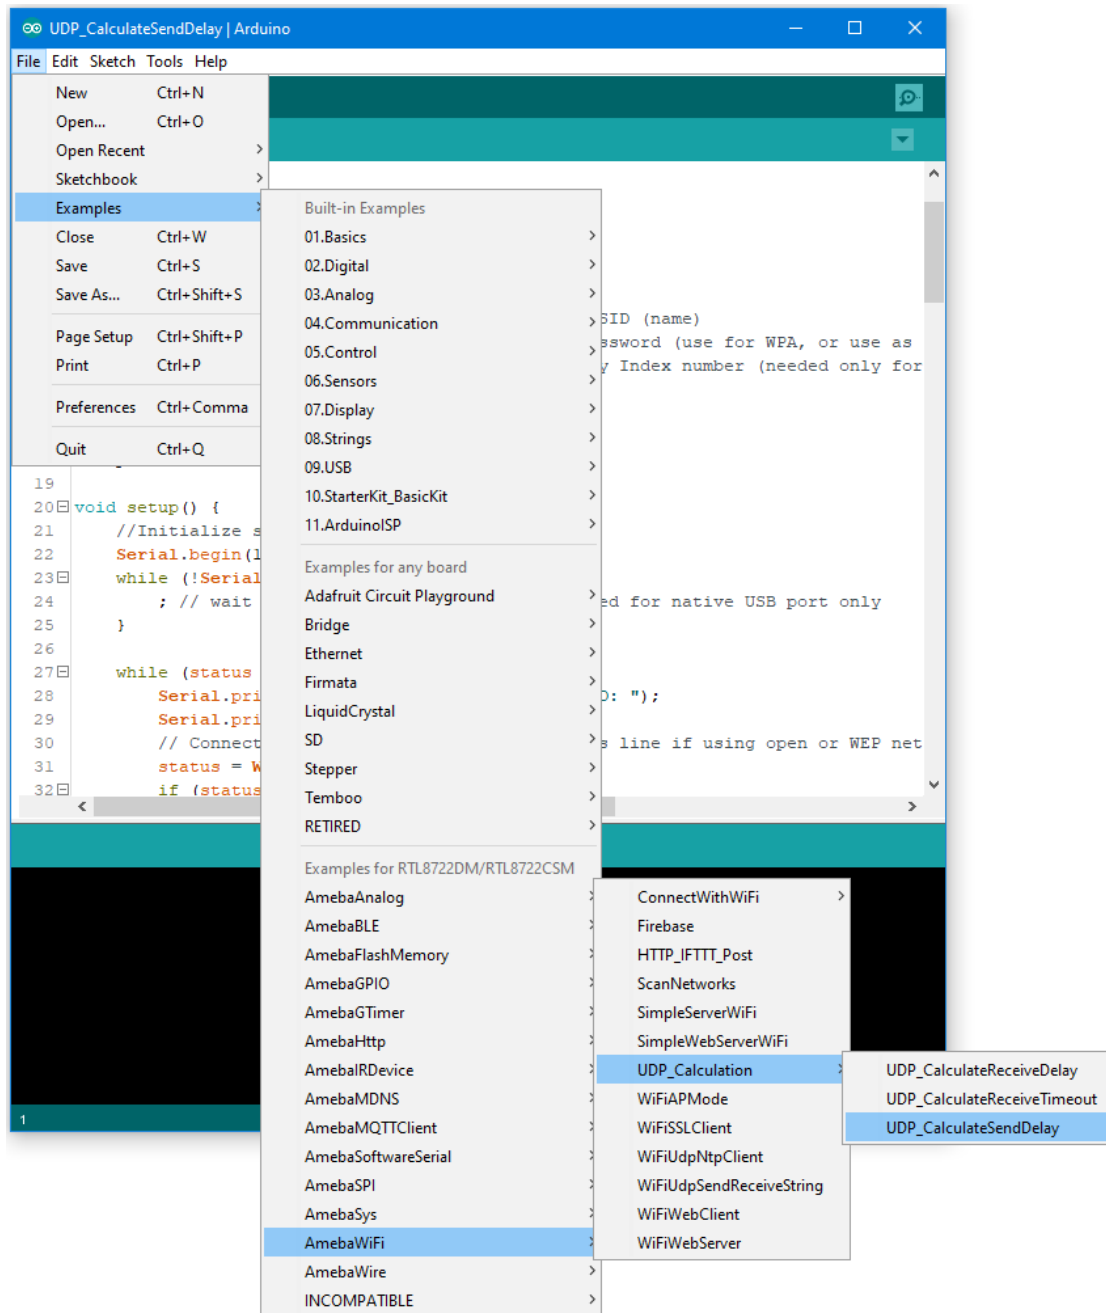

In the sample code, modify the highlighted section to enter the information required (ssid, password, key index) to connect to your WiFi network.

The server variable also needs to be changed to match the IP address of your computer. You can find the IP address using the “ipconfig” command in a terminal window.

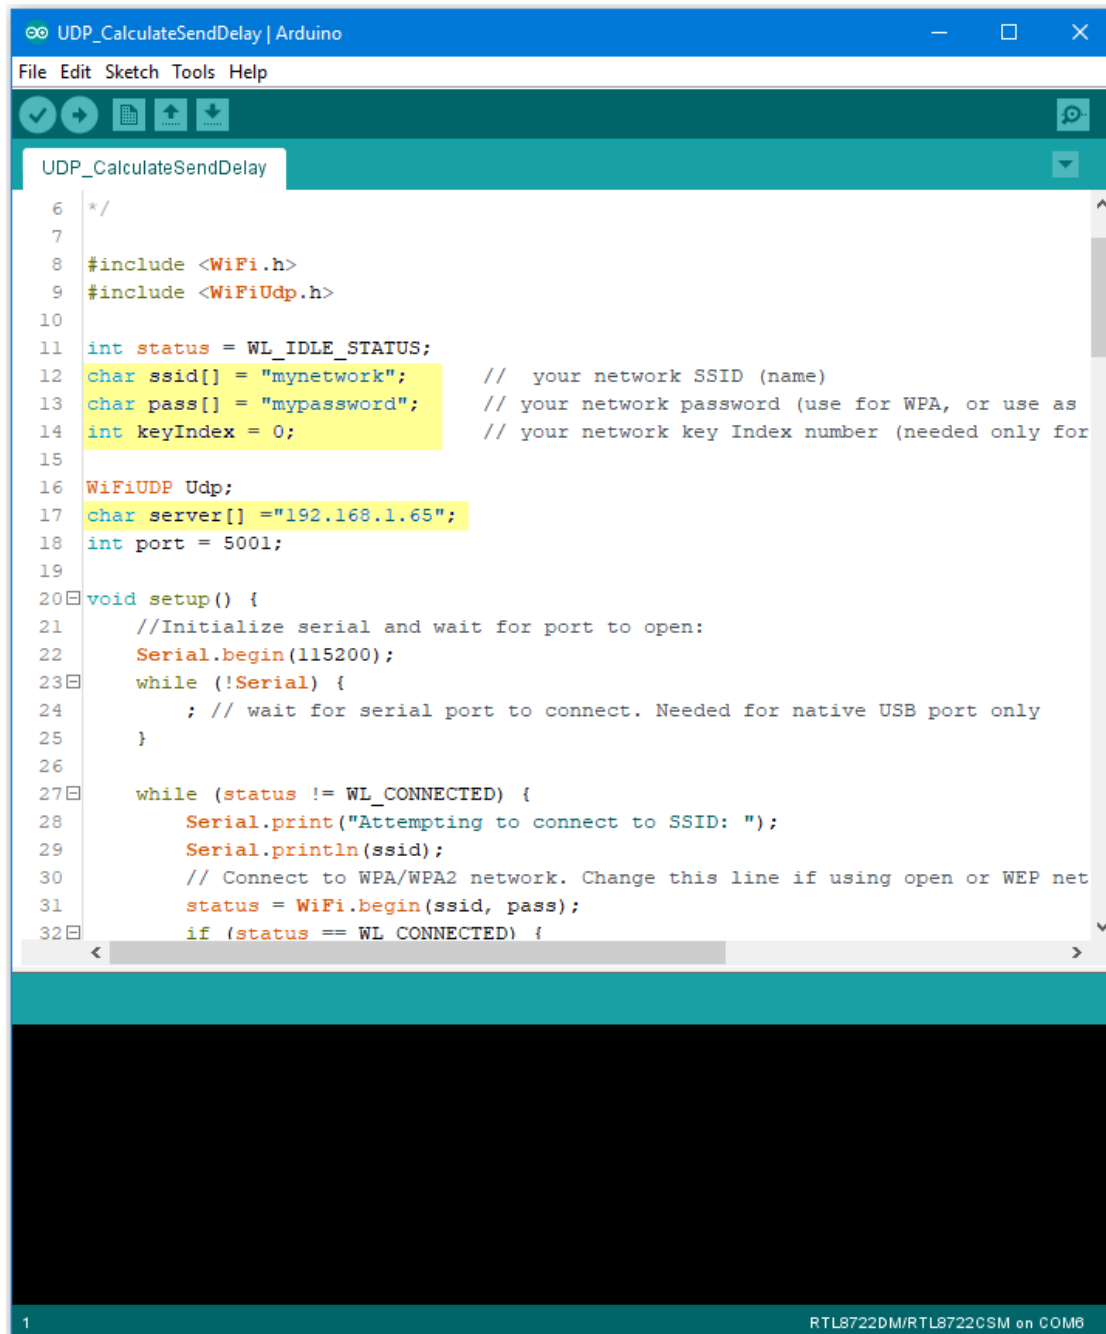

```

UDP_CalculateSendDelay
6  */
7
8  #include <WiFi.h>
9  #include <WiFiUdp.h>
10
11 int status = WL_IDLE_STATUS;
12 char ssid[] = "mynetwork"; // your network SSID (name)
13 char pass[] = "mypassword"; // your network password (use for WPA, or use as
14 int keyIndex = 0; // your network key Index number (needed only for
15
16 WiFiUDP Udp;
17 char server[] = "192.168.1.65";
18 int port = 5001;
19
20 void setup() {
21     //Initialize serial and wait for port to open:
22     Serial.begin(115200);
23     while (!Serial) {
24         ; // wait for serial port to connect. Needed for native USB port only
25     }
26
27     while (status != WL_CONNECTED) {
28         Serial.print("Attempting to connect to SSID: ");
29         Serial.println(ssid);
30         // Connect to WPA/WPA2 network. Change this line if using open or WEP net
31         status = WiFi.begin(ssid, pass);
32         if (status == WL_CONNECTED) {

```

Computer Preparation

On the computer, Cygwin will be required to compile the code to send the UDP packets. Cygwin can be downloaded from <https://www.cygwin.com/>

Follow the instructions there to install it. Next, from the “CalculateUdpSendDelay” Arduino example, copy the code from the bottom between “#if 0” and “#endif”, into a new text file and rename the file to “UdpSendDelay.cpp”.

```

1  #include <stdio.h>
2  #include <stdlib.h>
3  #include <string.h>
4  #include <sys/socket.h>
5  #include <arpa/inet.h>
6  #include <sys/time.h>
7
8  #define BUFSIZE 1024
9  #define PORT 5001
10
11 long get_current_time_with_ms (void)
12 {
13     struct timeval tv;
14
15     gettimeofday(&tv, NULL);
16
17     long millisecondsSinceEpoch =
18         (long) (tv.tv_sec) * 1000 +
19         (long) (tv.tv_usec) / 1000;
20
21     return millisecondsSinceEpoch;
22 }
23
24 long early_diff = 0;
25
26 long ameba_epoch = 0;
27 long sys_epoch = 0;
28
29 long datacount = 0;
30 long total_shift = 0;
31
32 void process_data(char *buf) {

```

length: 2,706 lines: 110 Ln: 110 Col: 2 Sel: 0|0 Windows (CR LF) UTF-8 INS

Next, open a Cygwin terminal, change the working directory to the location of “UdpSendDelay.cpp”, and use the command “g++ UdpSendDelay.cpp -o UdpDelay” to compile the code. A file named “UdpDelay.exe” will be created in the same directory.


Running the Example

First, on the computer, run the UdpDelay.exe file, and the computer will begin to listen for packets from Ameba.

Next, compile and upload the code from the Arduino IDE to Ameba and press the reset button when the upload is complete.

The Ameba will begin to send UDP packets to the computer. Once 10000 packets have been received, the computer will calculate the average delay and print out the result.

It will take some time for 10000 packets to be sent.

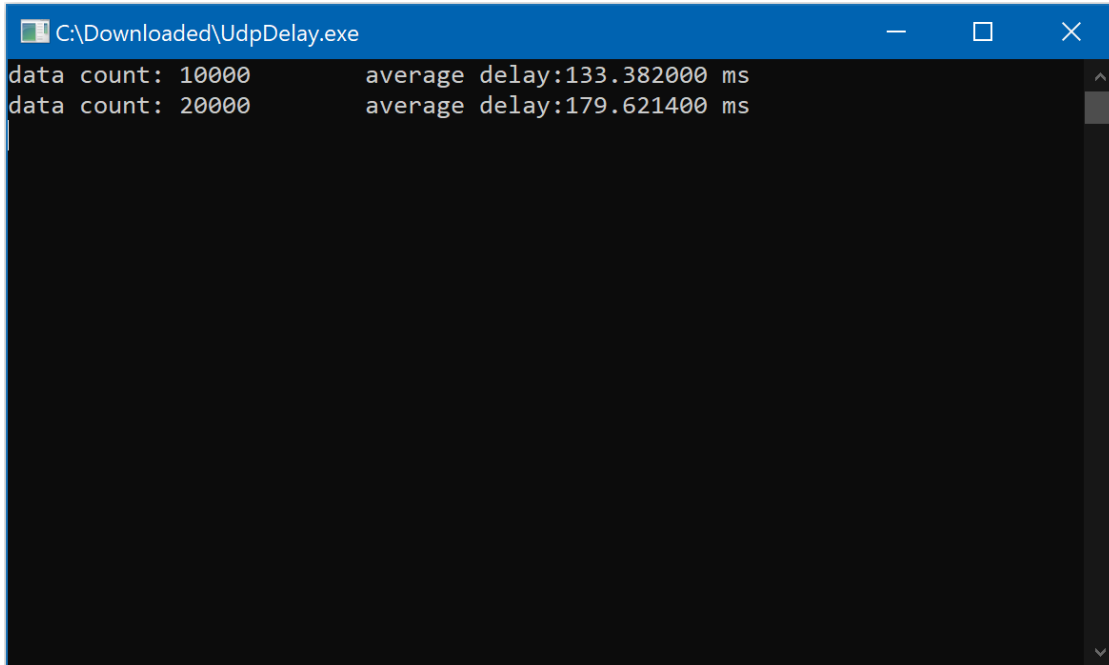

```
C:\Downloaded\UdpDelay.exe
data count: 10000 average delay:133.382000 ms
data count: 20000 average delay:179.621400 ms
```


Google Cloud IoT

Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1

Google Cloud IoT Configuration

1. Select or create a Cloud Platform project In the Google Cloud Console, select an existing project or create a new project. You will need a **Project ID** to use with

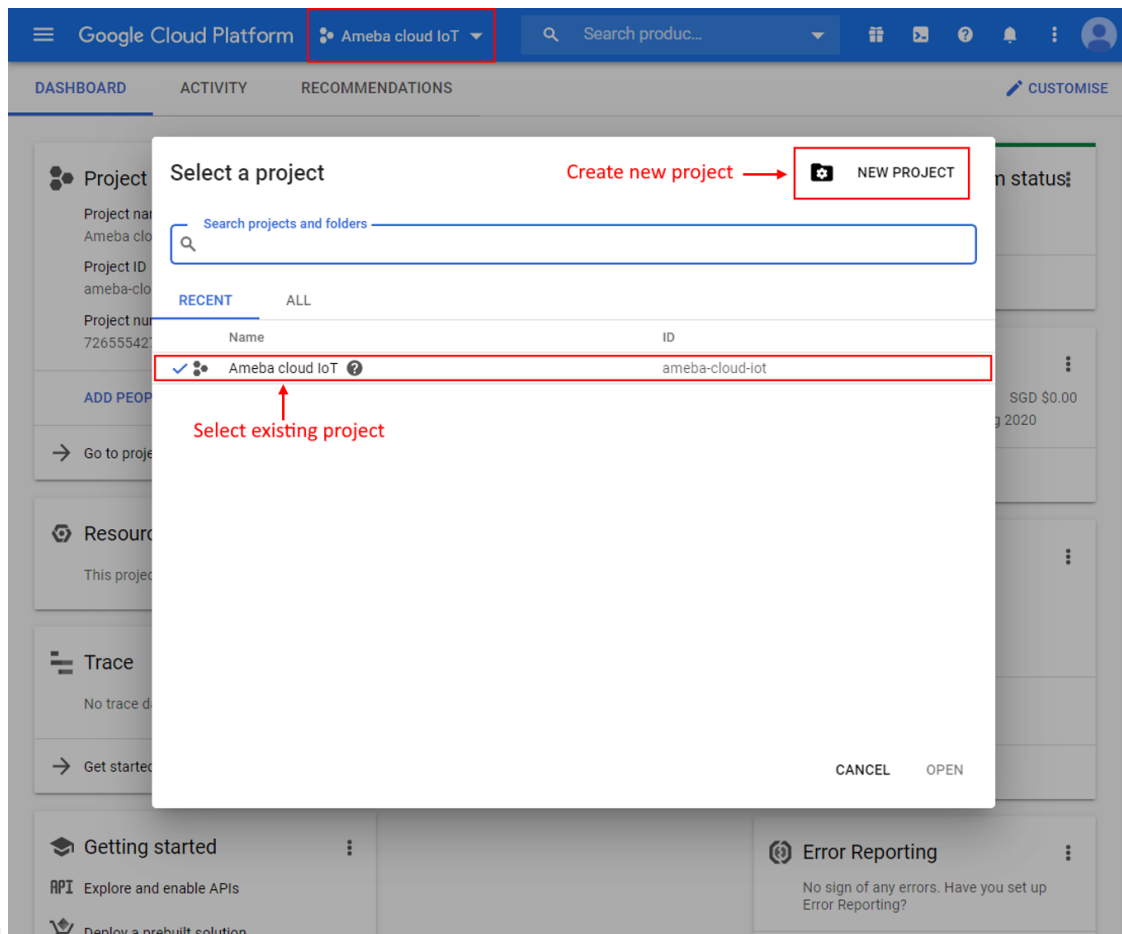

Ameba.


If

creating a new project, enter a project name, and take note of the **Project ID** generated.

The screenshot shows the 'New Project' form in the Google Cloud Platform console. At the top, there is a warning about project quotas. Below the warning, there is a 'Project name' field with the value 'test-project'. Below the name field, there is a 'Project ID' field with the value 'test-project-286902'. Below the ID field, there is a 'Location' field with the value 'No organisation'. At the bottom, there are 'CREATE' and 'CANCEL' buttons. The 'CREATE' button is highlighted.

2.


Enable billing for your project Billing needs to be enabled for your project to use Google Cloud Platform features. Follow the guide in Google cloud documentation to enable billing. <https://cloud.google.com/billing/docs/how-to/modify-project> 3. Enable the Cloud IoT Core API In Google Cloud console, click on the top left menu button and search for IoT

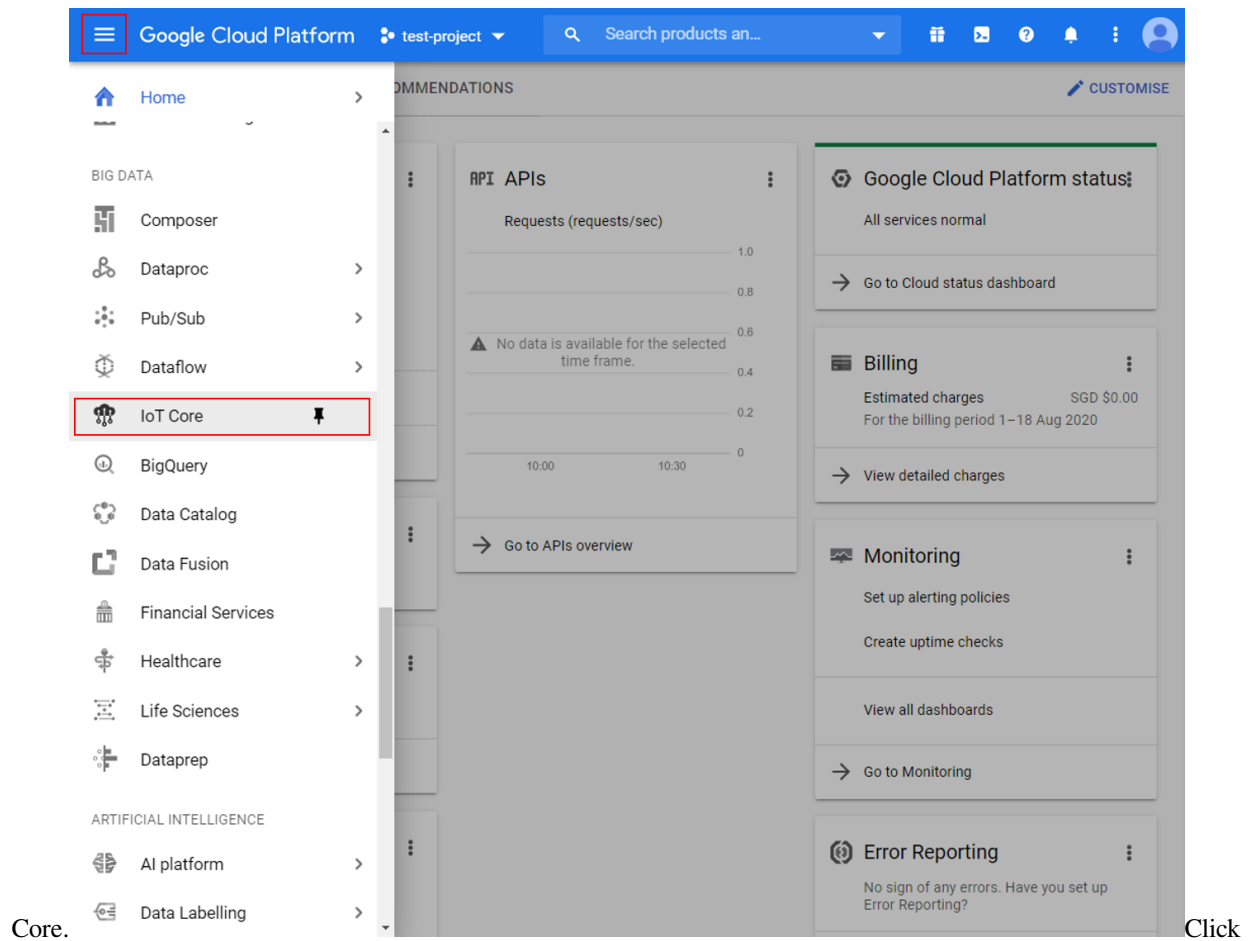

Google Cloud Platform

test-project

Search products an...



Google Cloud IoT API

Google

Registers and manages IoT (Internet of Things) devices that connect to the Google Cloud Platform.

ENABLE

TRY THIS API

OVERVIEW

PRICING

DOCUMENTATION

Overview

Registers and manages IoT (Internet of Things) devices that connect to the Google Cloud Platform.

[Learn more](#)

About Google

Google's mission is to organize the world's information and make it universally accessible and useful. Through products and platforms like Search, Maps, Gmail, Android, Google Play, Chrome and YouTube, Google plays a meaningful role in the daily lives of billions of people.

Additional

Type: [APIs & Tools](#)

Last updated: [2020-08-11](#)

Category: [Big Data](#)


Service name: [cloudiot.googleapis.com](#)


Pricing

Device Data Volume	FREE	TIER 1
--------------------	------	--------


enable to activate Google Cloud IoT API for your project.

Create a Cloud Pub/Sub topic In Google Cloud console, click on the top left menu button and search for

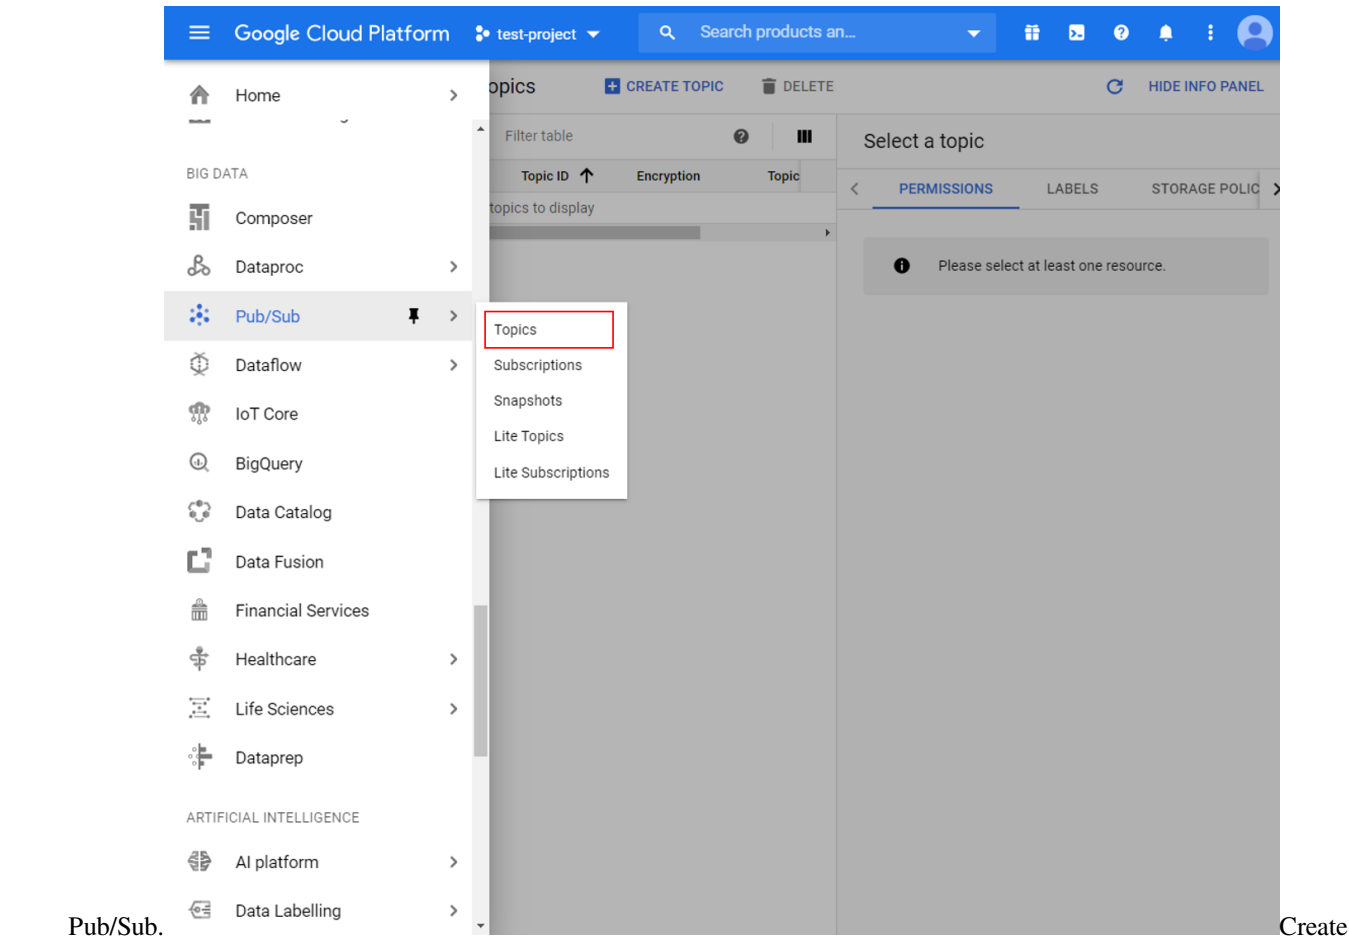


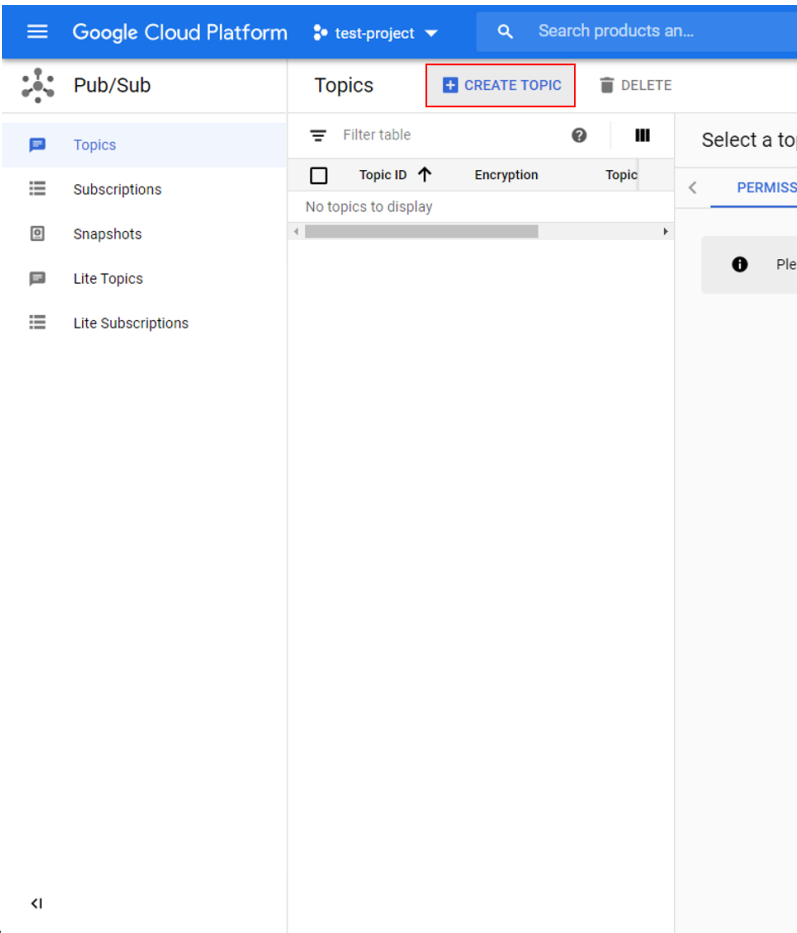

a new topic for your project and give it a suitable topic ID.
the topic is created, go to the permissions tab of the info panel, and add “cloud-iot@system.gserviceaccount.com” with the role of “Pub/Sub Publisher” .

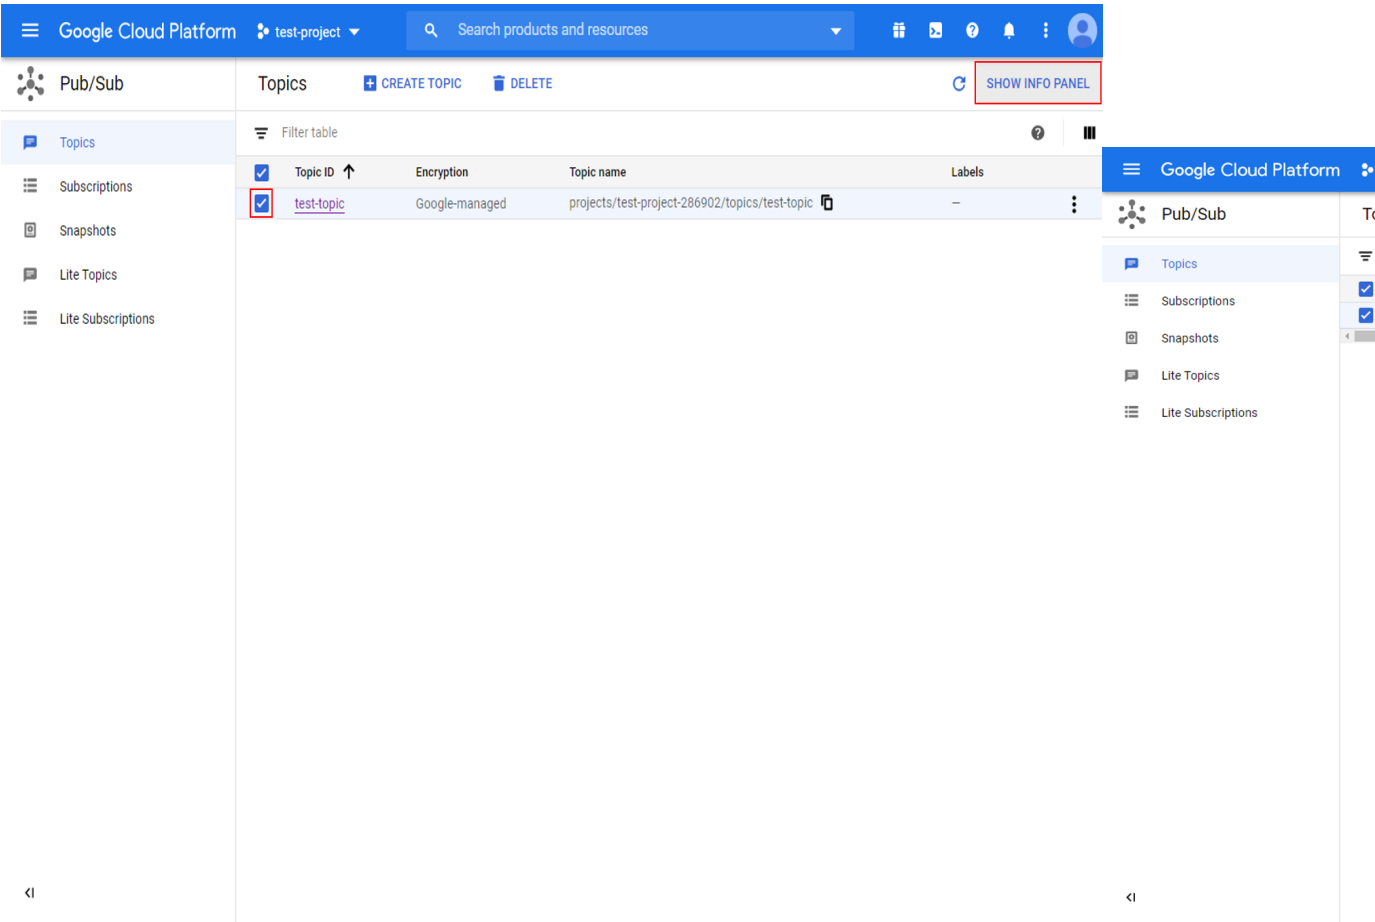


a device registry Go back to the IoT Core settings page and create a new reg-

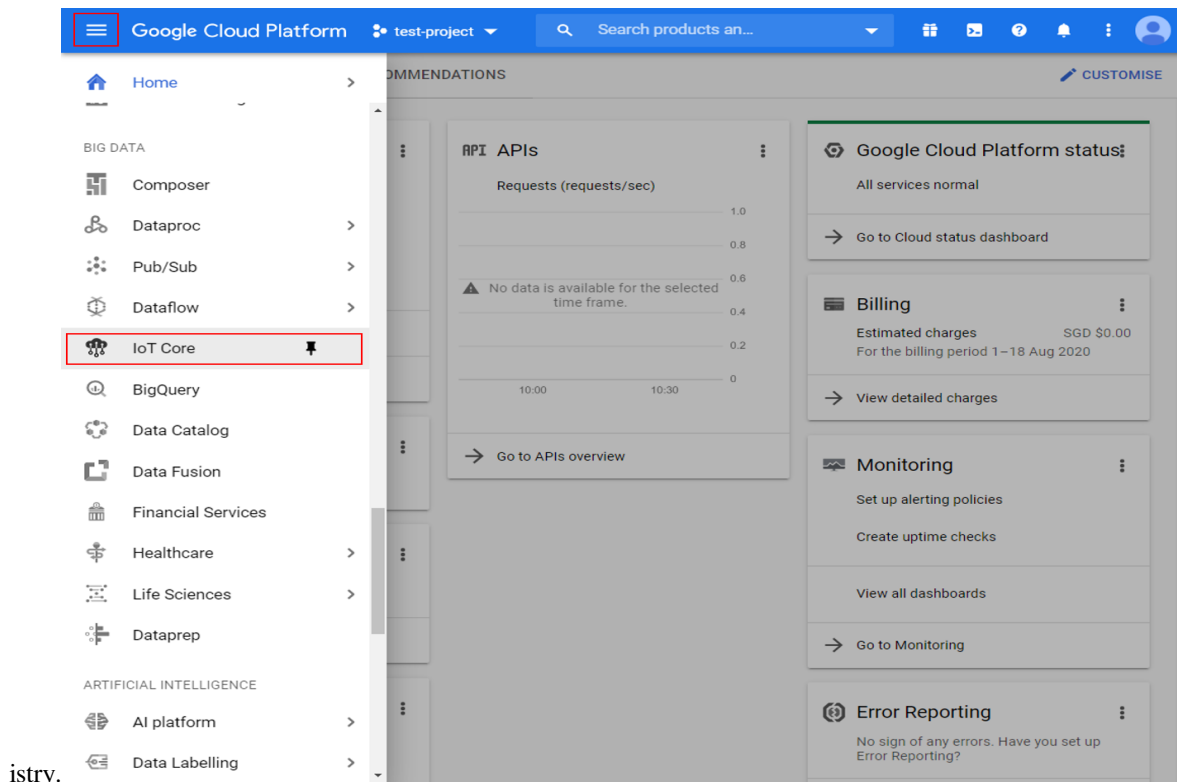

istry.

a suitable **Registry ID** and in which to store data. Remember the ****Registry ID** and **Region** for use with Ameba later. For the Pub/Sub topic, select the topic created in the previous

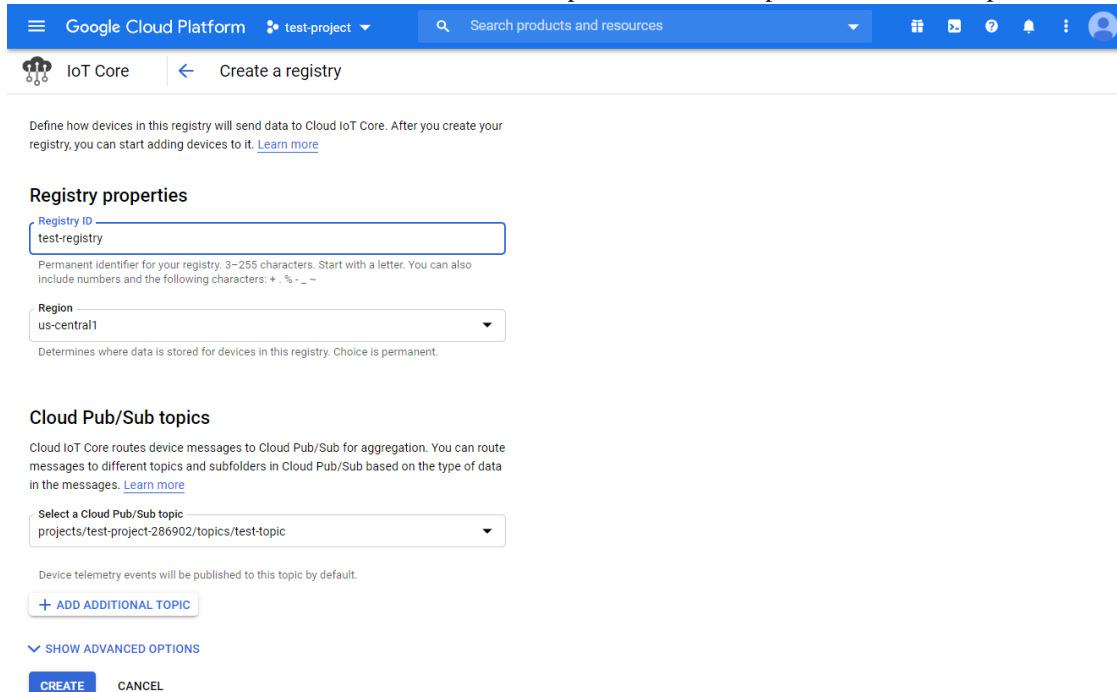


step. 6.

Create a public/private key pair Using Openssl in a terminal in Windows/Linux/MacOs, run the following commands to generate a private and public key pair. Two files will be created by these commands,

“ec_private.pem” containing the private key, and “ec_public.pem” containing the public key.

```
$ openssl ecparam -genkey -name prime256v1 -noout -out ec_private.pem
$ openssl ec -in ec_private.pem -pubout -out ec_public.pem
```

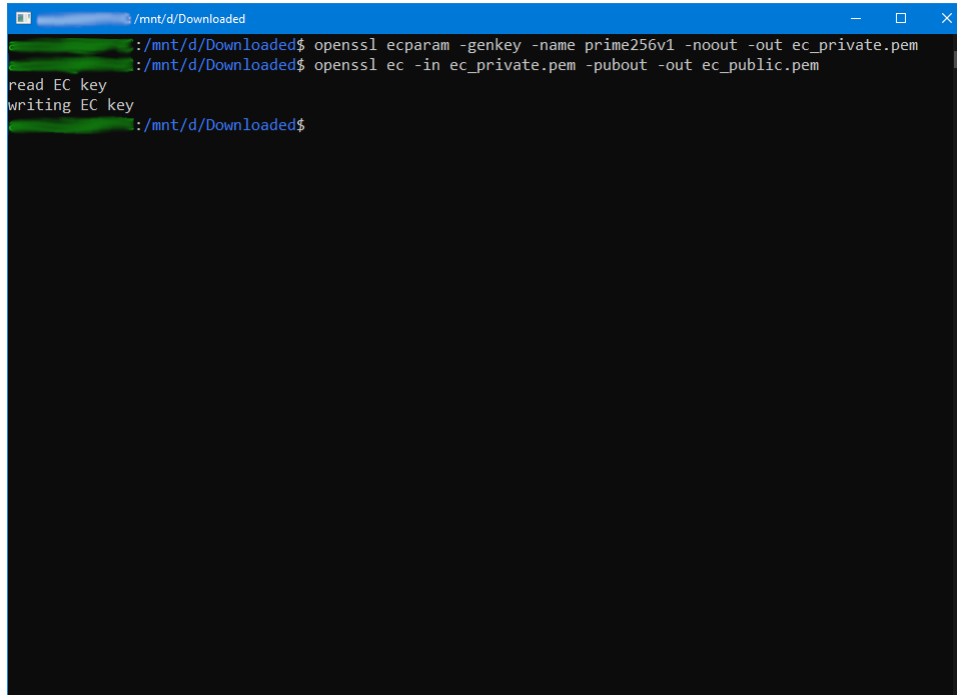A screenshot of a terminal window with a blue title bar. The terminal shows the execution of two OpenSSL commands. The first command generates a private key, and the second command generates a public key from the private key. The output of the second command is highlighted in green. The terminal prompt is `:/mnt/d/Downloaded$`.

```
:/mnt/d/Downloaded$ openssl ecparam -genkey -name prime256v1 -noout -out ec_private.pem
:/mnt/d/Downloaded$ openssl ec -in ec_private.pem -pubout -out ec_public.pem
read EC key
writing EC key
:/mnt/d/Downloaded$
```

Run the next command to extract out the private key, and remember the highlighted string of hexadecimal numbers for use with Ameba later.


```
$ openssl ec -in ec_private.pem -noout -text
```

```


/mnt/d/Downloaded$ openssl ec -in ec_private.pem -noout -text
read EC key
Private-Key: (256 bit)
priv:
    f9:93:86:98:66:b0:f0:34:79:c5:fe:c9:82:50:0d:
    76:f2:ad:c6:2e:23:b9:af:02:c0:1c:d4:11:65:81:
    0a:fb
pub:
    04:29:8f:09:db:9c:d6:e2:b2:05:b8:11:c0:b5:f7:
    90:2a:7c:42:42:3e:db:ec:2d:05:88:b3:8b:14:09:
    9e:de:2d:ec:1b:da:7f:ae:6a:8d:31:55:e1:22:0c:
    d8:94:63:a2:4a:79:09:6f:57:68:76:61:72:9e:e3:
    22:23:93:fd:a6
ASN1 OID: prime256v1
NIST CURVE: P-256
/mnt/d/Downloaded$

```

7. Create a device Go back to the IoT Core settings page and create a new device.

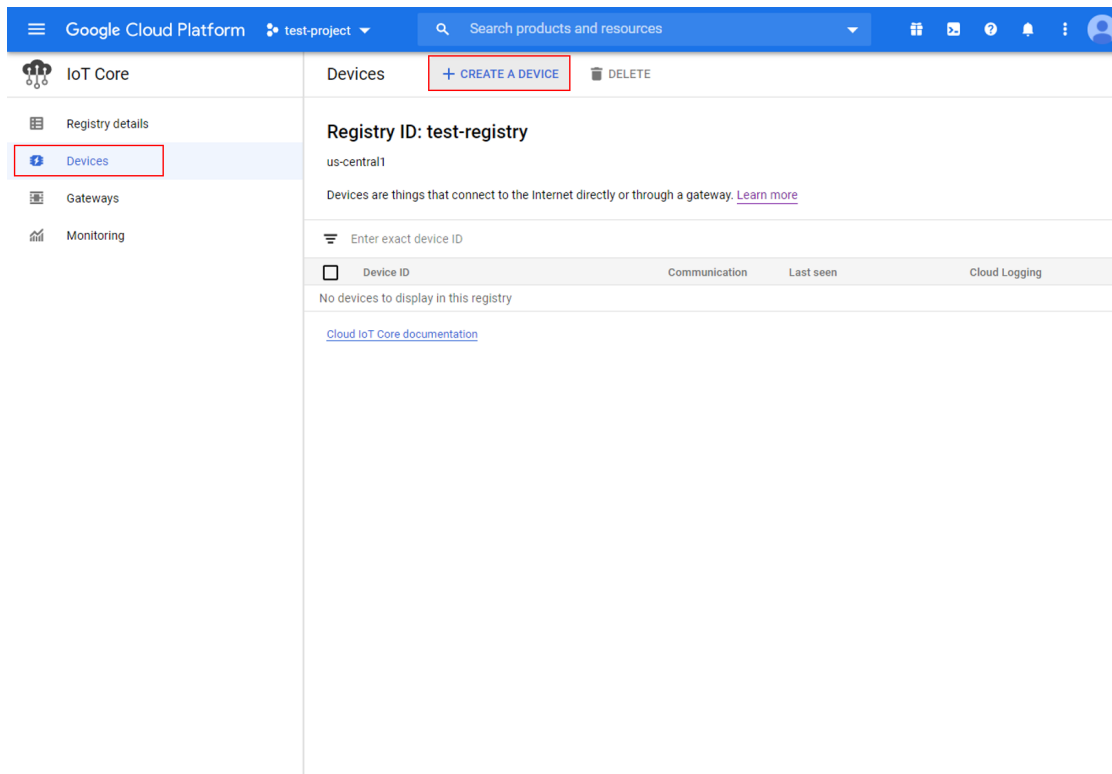

Give the device a suitable **Device ID** and remember it for use with Ameba

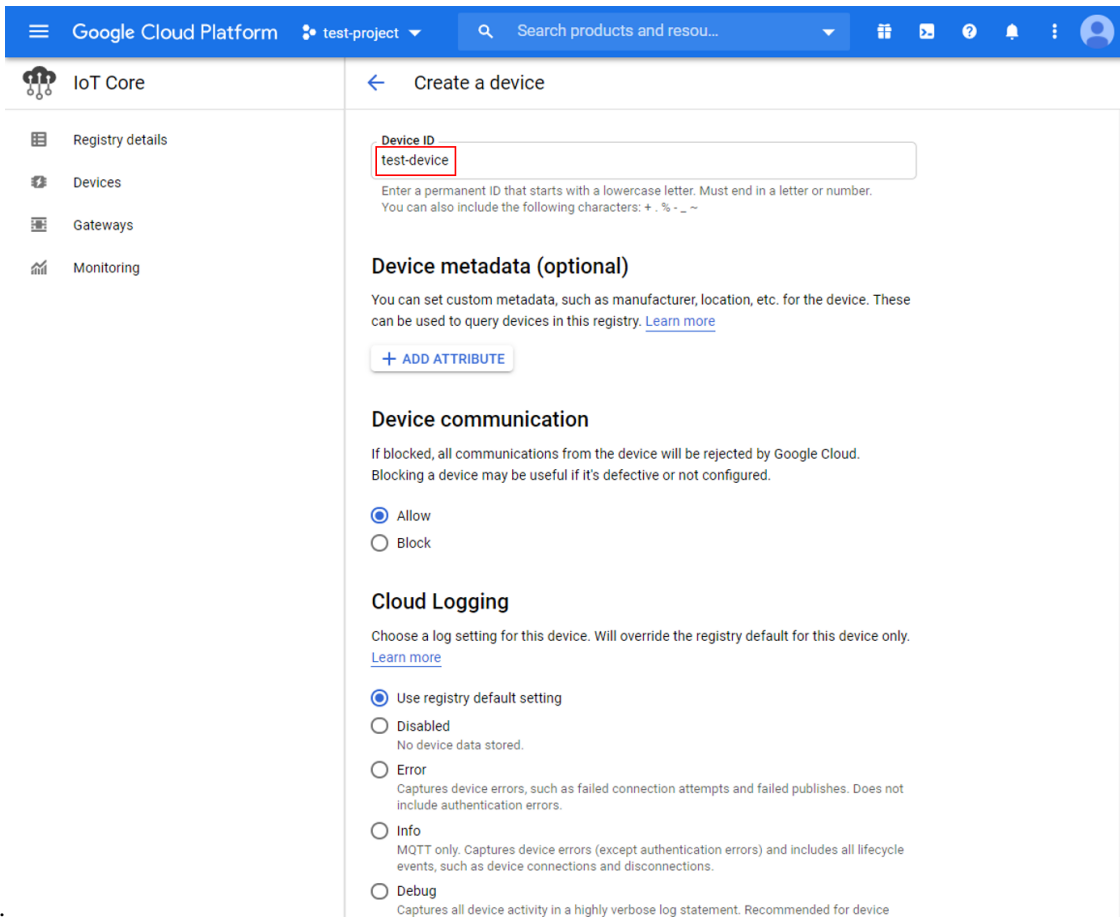

later. In the authentication section of the additional options, upload the previously generated “ec_public.pem” public

Google Cloud Platform

test-project

Search products and resou...

IoT Core

Registry details

Devices

Gateways

Monitoring

Create a device

No device data stored.

Error

Captures device errors, such as failed connection attempts and failed publishes. Does not include authentication errors.

Info

MQTT only. Captures device errors (except authentication errors) and includes all lifecycle events, such as device connections and disconnections.

Debug

Captures all device activity in a highly verbose log statement. Recommended for device troubleshooting.

Authentication (optional)

Specify the public key that will be used to authenticate this device. You can leave the key empty, but devices will not be able to connect to Google Cloud without a key. [Learn more](#)

Input method

Enter manually

Upload

Public key format

ES256

Public key value

ec_public.pem

X

BROWSE

File content must be in PEM format

Public key expiry date (optional)

Expires on:

Date

HKT

COMMUNICATION, CLOUD LOGGING, AUTHENTICATION

CREATE

CANCEL

key. 8.

Create a Cloud Pub/Sub subscription To observe messages sent by Ameba, create a subscription in

Google Cloud Platform

test-project

Search products and resou...

Pub/Sub

Topics

Subscriptions

Snapshots

Lite Topics

Lite Subscriptions

Subscriptions

CREATE SUBSCRIPTION

DELETE

SHOW INFO PANEL

Filter table

Subscription ID

Delivery type

Topic name

Subscription name

Acknowledge deac

No subscriptions to display


Pub/Sub.


Choose

a suitable subscription ID and select the previously created topic.

Example

Open the example in “File” -> “Examples” -> “AmebaMQTTClient” -> “Google_Cloud_IoT” .

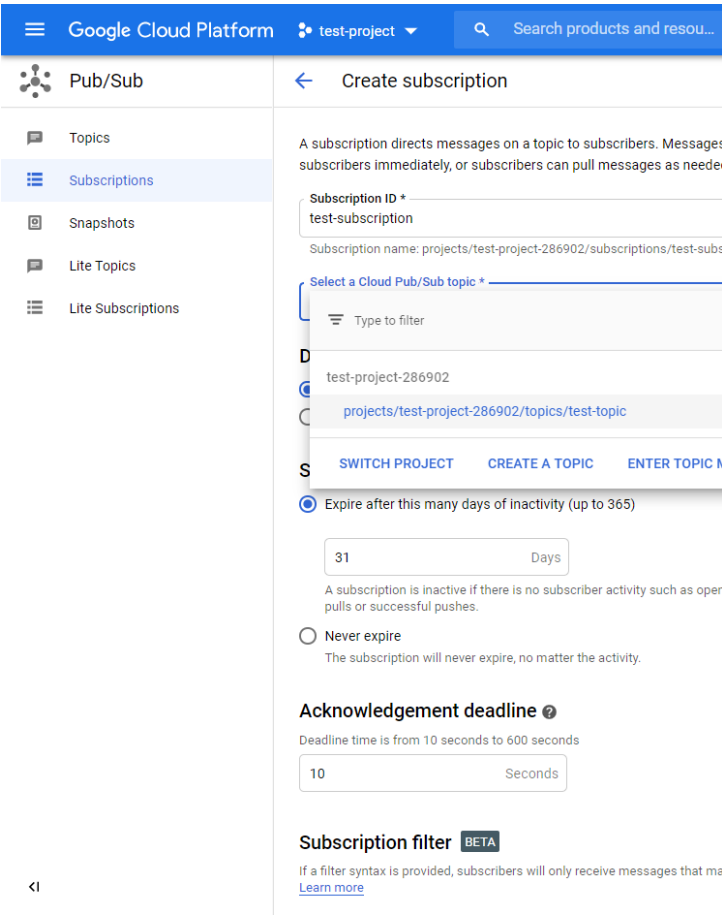

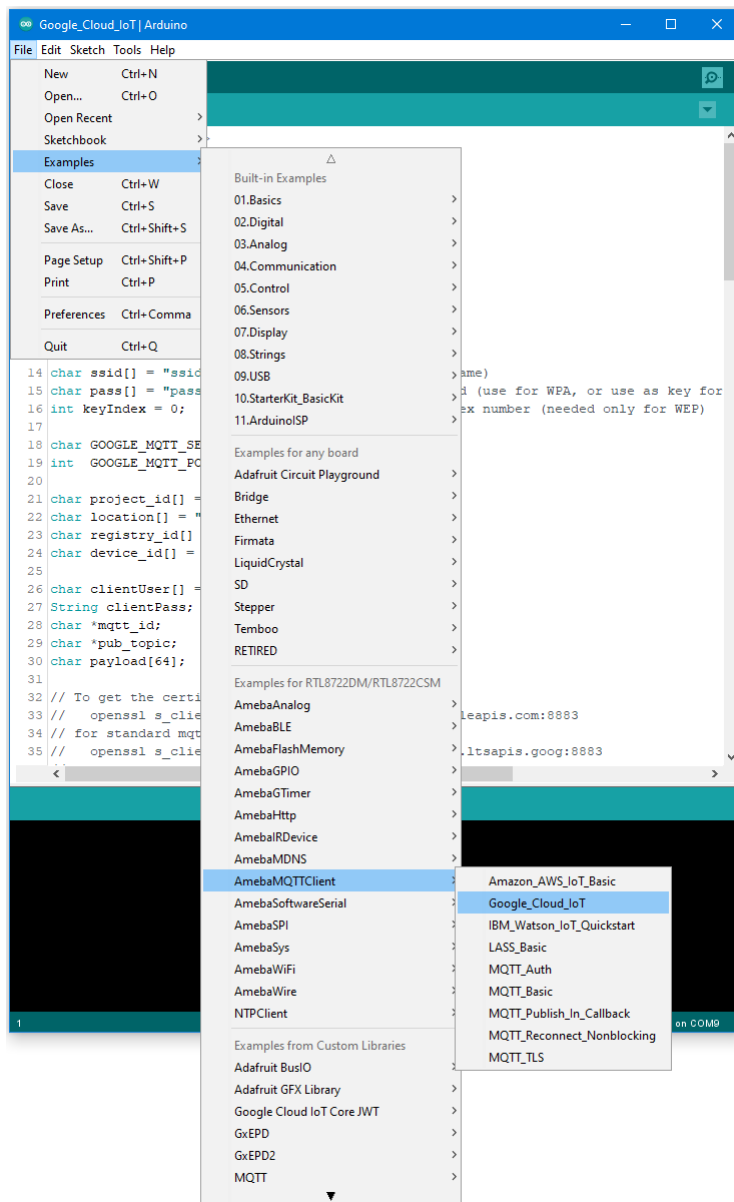

Enter the required information in the highlighted sections below.

```

9  WiFiSSLClient wifiClient;
10 PubSubClient client(wifiClient);
11 WiFiUDP udpClient;
12 NTPClient timeClient(udpClient);
13
14 char ssid[] = "ssid";          // your network SSID (name)
15 char pass[] = "pass";          // your network password (use for WPA, or use as key for
16 int keyIndex = 0;              // your network key Index number (needed only for WEP)
17
18 char GOOGLE_MQTT_SERVER[] = "mqtt.googleapis.com";
19 int  GOOGLE_MQTT_PORT = 8883;
20
21 char project_id[] = "project-id";
22 char location[] = "us-central1";
23 char registry_id[] = "my-registry";
24 char device_id[] = "ameba-device";
25
26 char clientUser[] = "unused";
27 String clientPass;
28 char *mqtt_id;
29 char *pub_topic;
30 char payload[64];
31 NN_DIGIT priv_key[9];
32
33 // To get the private key run (where private-key.pem is the ec private key
34 // used to create the certificate uploaded to google cloud iot):
35 // openssl ec -in <private-key.pem> -noout -text
36 // and copy priv: part.
37 // The key length should be exactly the same as the key length below (32 pairs
38 // of hex digits). If it's bigger and it starts with "00:" delete the "00:". If
39 // it's smaller add "00:" to the start. If it's too big or too small something
40 // is probably wrong with your key.
41 char *private_key_str =
42 "57:e1:c0:3b:e5:cd:2f:42:fb:14:4f:a9:1e:3f:0a:"
43 "65:22:4c:f0:ac:0f:a0:82:e1:73:71:ae:76:70:48:"
44 "68:fe";
45

```

In the yellow section, enter the SSID and password required to connect to your WiFi network. In the green section, enter the Project ID, server Region, Registry ID and Device ID previously configured in Google Cloud console. In the blue section, enter the hexadecimal string previously extracted from the private key. Upload the code and press the reset button on Ameba once the upload is finished. Open the serial monitor and observe as Ameba connects and sends messages to Google Cloud IoT.

```
COM9
Send

RTL8721D[Driver]: auth success, start assoc
RTL8721D[Driver]: association success(res=1)
RTL8721D[Driver]: ClientSendEAPOL[1527]: no use cache pmksa
RTL8721D[Driver]: set pairwise key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4)
RTL8721D[Driver]: set group key to hw: alg:4(WEP40-1 WEP104-5 TKIP-2 AES-4) keyid:2
Interface 0 IP address : 192.168.137.222Connected to wifi
Ready for Publishing
client connecting...
Ready for Publishing
client connecting...
Publishing the payload "This is Ameba's 0 message!!" with len: 27
client publish successfully!!! ret = 1
Publishing the payload "This is Ameba's 1 message!!" with len: 27
client publish successfully!!! ret = 1
Publishing the payload "This is Ameba's 2 message!!" with len: 27
client publish successfully!!! ret = 1
Publishing the payload "This is Ameba's 3 message!!" with len: 27
client publish successfully!!! ret = 1
Publishing the payload "This is Ameba's 4 message!!" with len: 27
client publish successfully!!! ret = 1
Publishing the payload "This is Ameba's 5 message!!" with len: 27
client publish successfully!!! ret = 1
Publishing the payload "This is Ameba's 6 message!!" with len: 27
Autoscroll Show timestamp Newline 115200 baud Clear output
```

In Google Cloud console, go to Pub/Sub

subscriptions, select the previously created subscription, and click view messages. Here you can view the messages sent by

Google Cloud Platform

test-project

Search products and resources

Pub/Sub

Topics

Subscriptions

Snapshots

Lite Topics

Lite Subscriptions

test-subscrip...

EDIT

VIEW MESSAGES

CREATE SNAPSHOT

SHOW INFO PANEL

Subscription details

Subscription name

projects/test-project-286902/subscriptions/test-subscription

Topic name

projects/test-project-286902/topics/test-topic

Unacked message count

10

8

6

4

2

0

15:30 15:45 16:00 16:15

Oldest unacked message age

250.00s

0

15:30 15:45 16:00 16:15

Delivery type

Pull

Subscription expiry

Subscription expires in 31 days if there is no activity.

Acknowledgement deadline

10 Seconds

Subscription filter

-

Message retention duration

7 Days

Retained acknowledged messages

10

Ameba.

Code Reference

In `setup()`, we set up RootCA which is required to form a TLS connection with Google's servers.

```
wifiClient.setRootCA((unsigned char*)rootCABuff);
```

In `loop()`, each loop checks the Internet status and re-connect to it when the environment has a problem.

```
if (WiFi.status() != WL_CONNECTED) {
    while (WiFi.begin(ssid, pass) != WL_CONNECTED)
    {
        delay(1000);
    }
    Serial.println("Connected to wifi");
}
```

To publish messages, `mqtt_id`, `clientPass` and `pub_topic` are required. `mqtt_id` is generated by printing the project ID, server location, registry ID and device ID in the required format:

```
mqtt_id = (char *)malloc(strlen("projects/") + strlen(project_id) + strlen("/locations/us-central1/registries/") + strlen(registry_id) + strlen("/devices/") + strlen(device_id) + 1);
sprintf(mqtt_id, "projects/%s/locations/us-central1/registries/%s/devices/%s", project_id, registry_id, device_id);
```

`clientPass` is generated using a JSON web token (JWT) generator function, which requires the project ID and current time, and signs it with the private key:

```
clientPass = CreateJwt(project_id, timeClient.getEpochTime(), priv_key);
```

`pub_topic` is generated by printing the project ID and topic in the required format:

```
pub_topic = (char *)malloc(strlen("/devices/") + strlen(device_id) + strlen("/events") + 1);
sprintf(pub_topic, "/devices/%s/events", device_id);
```

MQTT Server setting:

```
client.setServer(GOOGLE_MQTT_SERVER, GOOGLE_MQTT_PORT);
client.setPublishQos(MQTTQOS1);
client.waitForAck(true);
```

Connect to google cloud and publish messages:

```
if (client.connect(mqtt_id, clientUser, clientPass.c_str())){
    // ...
}
```



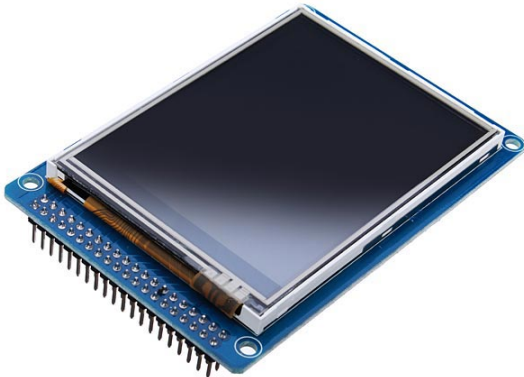

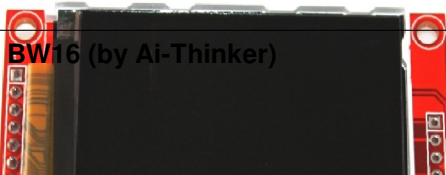
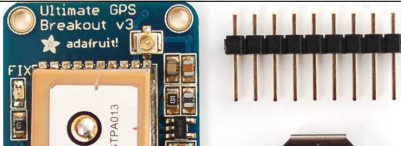
(下页继续)

(续上页)

```
    for(int i = 0; i < count; i++){
        // ...
        sprintf(payload, "This is Ameba's %d message!!", i);
        ret = client.publish(pub_topic, payload);
        // ...
    }
    // ...
    client.disconnect();
}
free(mqtt_id);
free(pub_topic);
```

Components Used

表 8: Components used in Examples

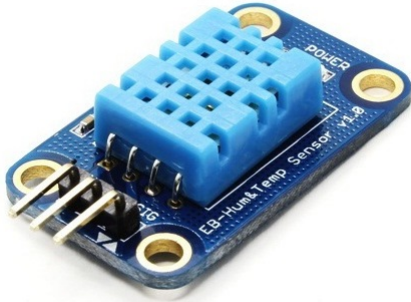	
DHT11_DHT22 Humidity & temperature sensor	HC_SR04 Distance measurement function
	
ILI9341 TFT LCD TFT LCD display with SPI interface	PMS3003/5003 Air quality sensor that detects concentration of micro particulate matters
	 1965

Peripheral Examples

GPIO - Measure The Distance By Ultrasound Module


Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- HC-SR04 Ultrasonic x 1
- Dropping resistor or Level converter

Example

HC-SR04 is a module that uses ultrasound to measure the distance. It looks like a pair of eyes in its appearance, therefore it's often installed onto robot-vehicle or mechanical bugs to be their eyes.

The way it works is that first we “toggle high” the TRIG pin (that is to pull high then pull low). The HC-SR04 would send eight 40kHz sound wave signal and pull high the ECHO pin. When the sound wave returns back, it pull low the ECHO pin.

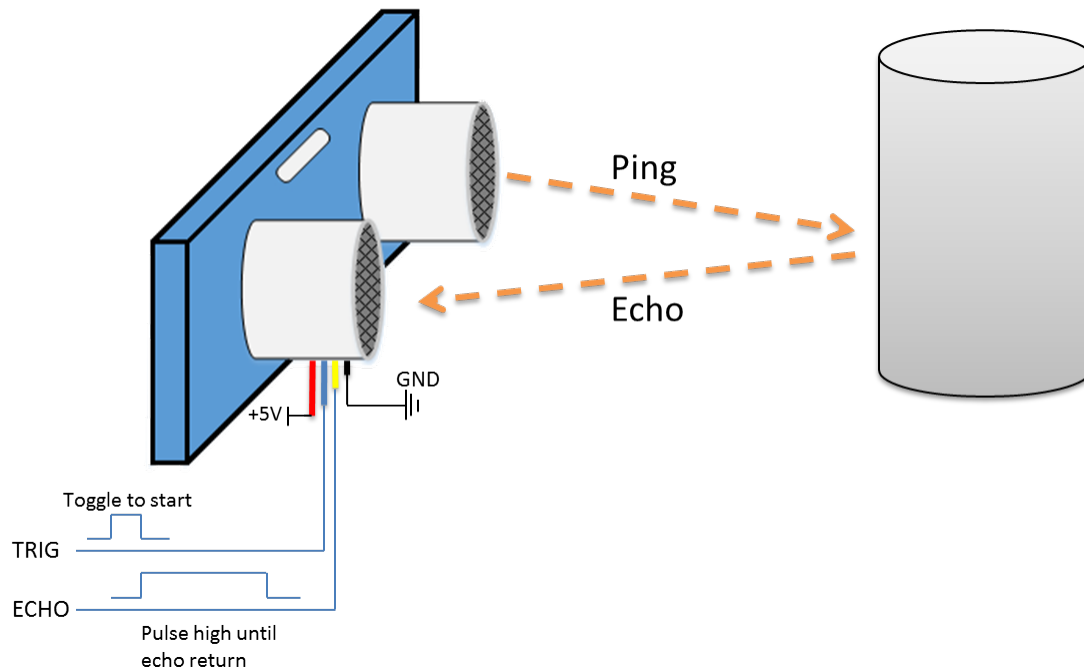


Assume the velocity of sound is 340 m/s, the time it takes for the sound to advance 1 cm in the air is $340 \times 100 \times 10^{-6} =$

29 us.


The sound wave actually travels twice the distance between HC-SR04 and the object, therefore the distance can be calculated by $(\text{time}/29) / 2 = \text{time} / 58$.

The working voltage of HC-SR04 is 5V. When we pull high the ECHO pin to 5V, the voltage might cause damage to the GPIO pin of Ameba. To avoid this situation, we need to drop the voltage as follows:

RTL8722DM / RTL8722CSM Wiring Diagram:

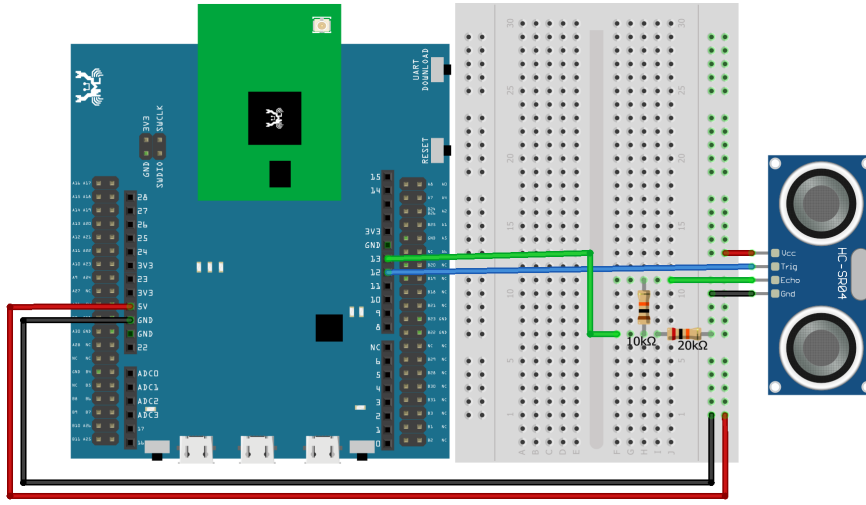


RTL8722DM MINI Wiring Diagram:

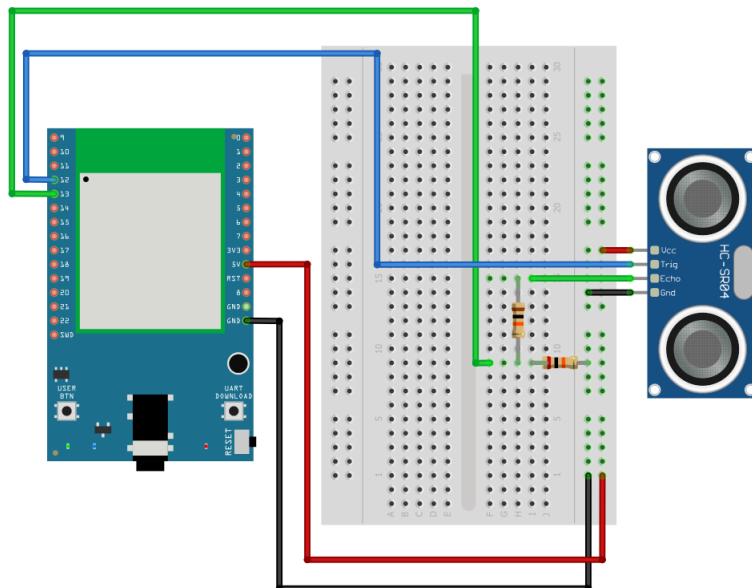


We pick the resistors with resistance 1:2, in the example we use 10kΩ and 20kΩ.

If you do not have resistors in hand, you can use level converter instead. The TXB0108 8 channel level converter is a

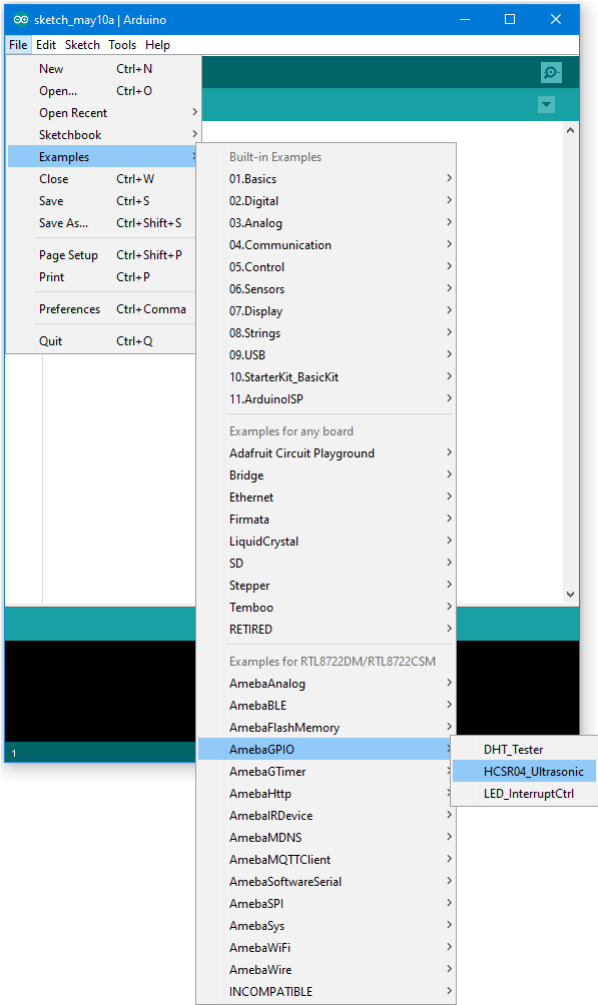

Compile and upload to Ameba, then press the reset button. Open the Serial Monitor, the calculated result is output to serial monitor every 2 seconds.

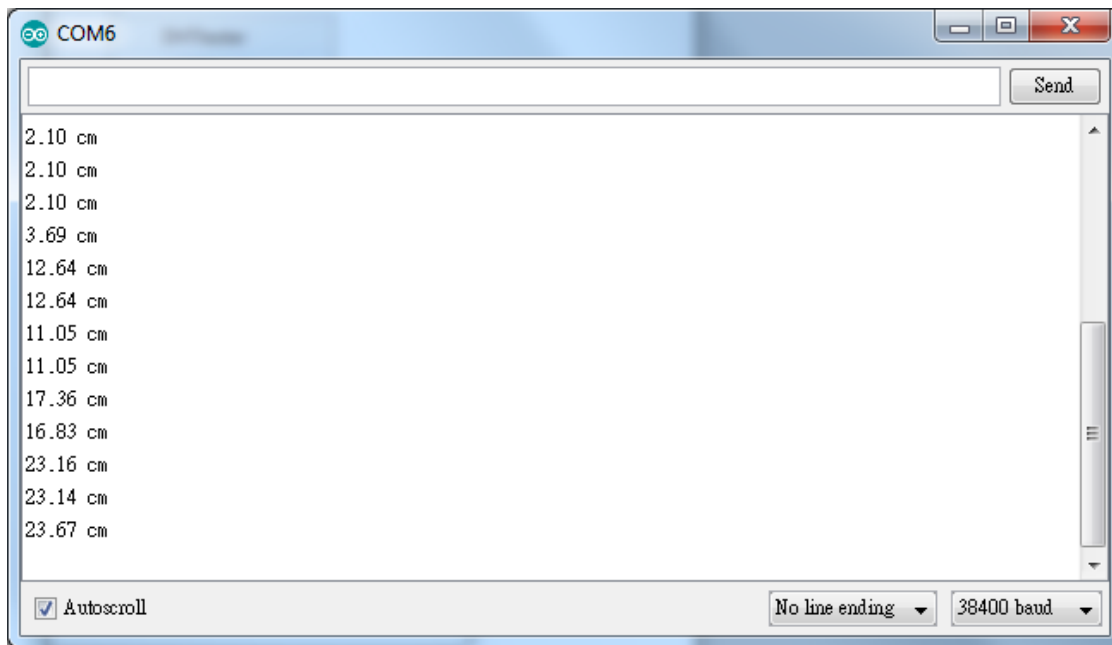

Note that the HCSR04 module uses the reflection of sound wave to calculate the distance, thus the result can be affected by the surface material of the object (e.g., harsh surface tends to cause scattering of sound wave, and soft surface may cause the sound wave to be absorbed).

Code Reference

Before the measurement starts, we need to pull high the TRIG pin for 10us and then pull low. By doing this, we are telling the HC-SR04 that we are about to start the measurement:

```
digitalWrite(trigger_pin, HIGH);  
delayMicroseconds(10);  
digitalWrite(trigger_pin, LOW);
```

Next, use pulseIn to measure the time when the ECHO pin is pulled high.

```
duration = pulseIn (echo_pin, HIGH);
```

Finally, use the formula to calculate the distance.

```
distance = duration / 58;
```

GPIO - Measuring The Temperature And Humidity

Preparation


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- DHT11 or DHT22 or DHT21

Example


DHT11 is a temperature and humidity sensor which operates at voltage 3.3V~5V. At room temperature, the measurable range of the humidity is 20% ~ 90%RH with $\pm 5\%$ RH precision, the measurable range of the temperature is 0 ~ 50°C with $\pm 2^\circ\text{C}$ precision.

Another choice of temperature and humidity sensor is DHT22 sensor, which has better precision. Its measurable range of the humidity is 0%~100%RH with $\pm 5\%$ RH precision, the measurable range of the temperature is -40~125 °C with $\pm 0.2^\circ\text{C}$ precision.

There are 4 pins on the sensor:

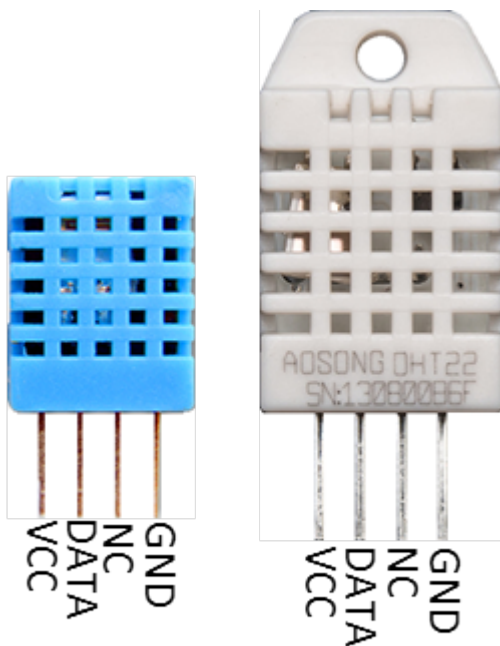


Since one of the 4 pins has no function, there are temperature/humidity sensors with only 3 pins on the market:

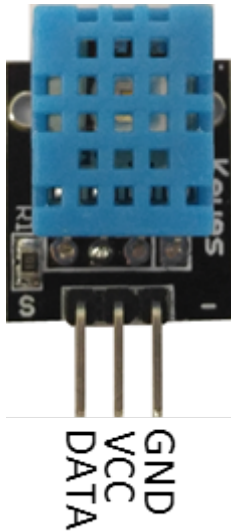


DHT is normally in the sleeping mode. To get the temperature/humidity data, please follow the steps:


1. Awake DHT: Ameba toggles low its DATA pin of GPIO. Now the DATA pin of GPIO serves as digital out to Ameba.
2. DHT response: DHT also toggle low its DATA pin of GPIO. Now the DATA pin of GPIO serves as digital in for Ameba.
3. DHT sends data: DHT sends out the temperature/humidity data (which has size 5 bytes) in a bit by bit manner. To represent each bit, DHT first pull low the DATA GPIO pin for a while and then pull high. If the duration of high is smaller than low, it stands for bit 0. Otherwise it stands for bit 1.

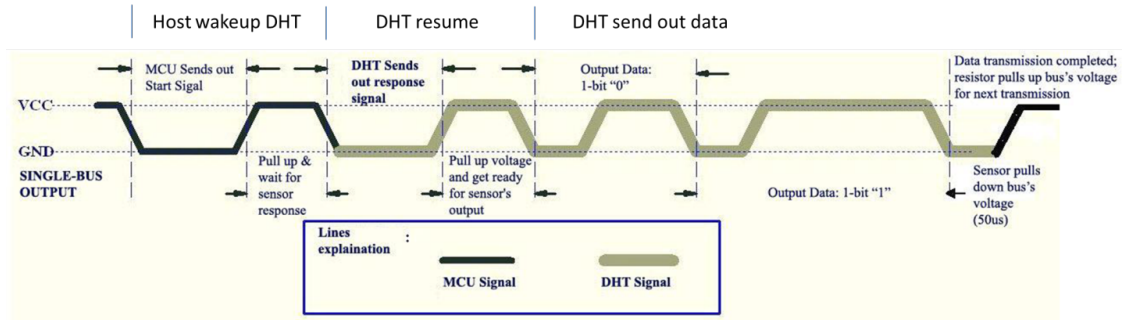


RTL8722DM / RTL8722CSM Wiring Diagram:

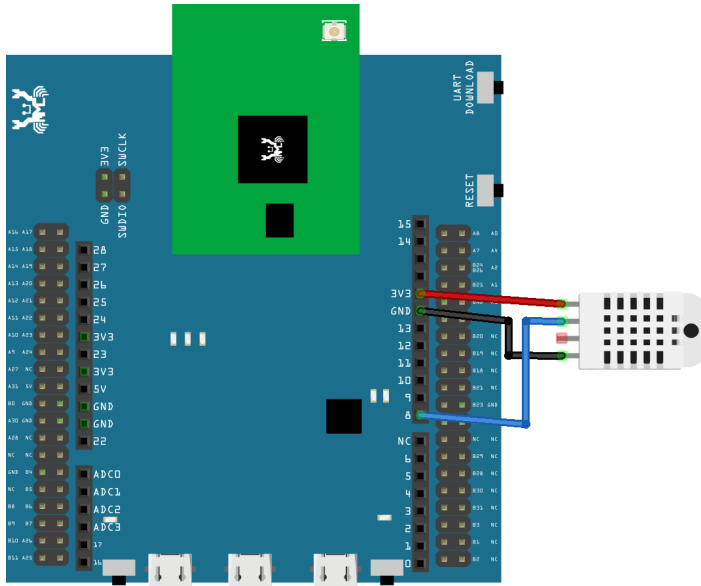

RTL8722DM MINI Wiring Diagram:

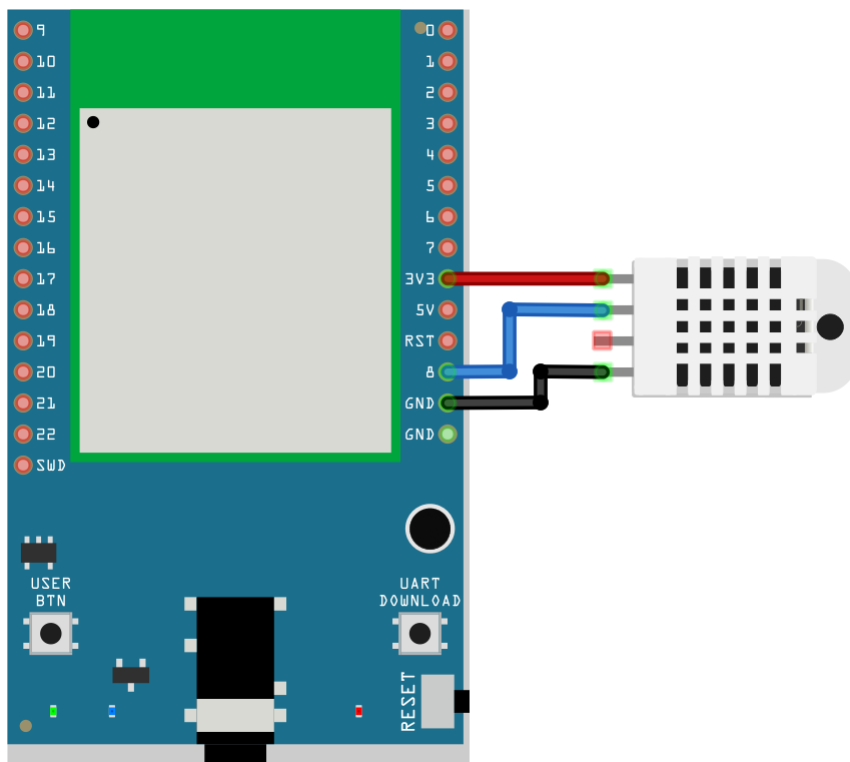

Open the sample code in “Files” -> “Examples” -> “AmebaGPIO” -> “DHT_Tester” . Compile and upload to Ameba, then press the reset button. The result would be shown on the Serial Monitor.

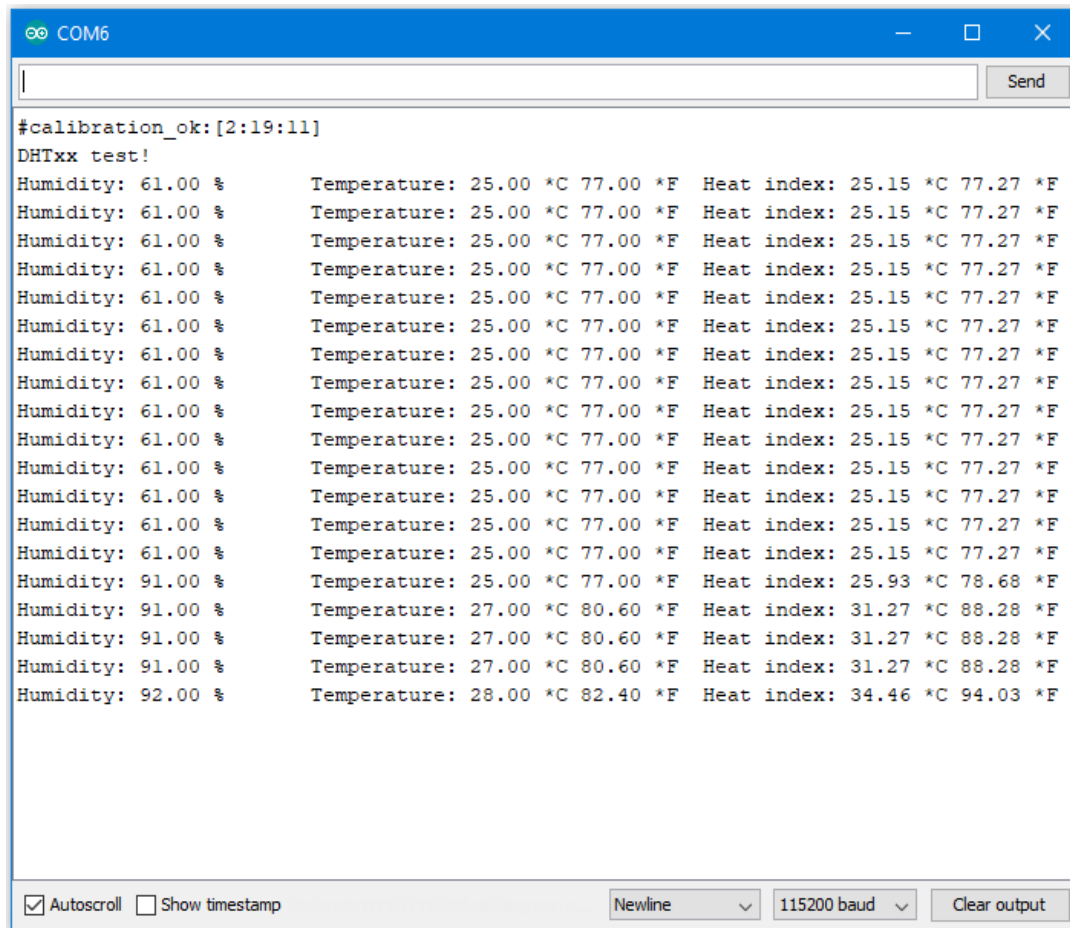

```

COM6
#calibration_ok:[2:19:11]
DHTxx test!
Humidity: 61.00 %      Temperature: 25.00 *C 77.00 *F  Heat index: 25.15 *C 77.27 *F
Humidity: 61.00 %      Temperature: 25.00 *C 77.00 *F  Heat index: 25.15 *C 77.27 *F
Humidity: 61.00 %      Temperature: 25.00 *C 77.00 *F  Heat index: 25.15 *C 77.27 *F
Humidity: 61.00 %      Temperature: 25.00 *C 77.00 *F  Heat index: 25.15 *C 77.27 *F
Humidity: 61.00 %      Temperature: 25.00 *C 77.00 *F  Heat index: 25.15 *C 77.27 *F
Humidity: 61.00 %      Temperature: 25.00 *C 77.00 *F  Heat index: 25.15 *C 77.27 *F
Humidity: 61.00 %      Temperature: 25.00 *C 77.00 *F  Heat index: 25.15 *C 77.27 *F
Humidity: 61.00 %      Temperature: 25.00 *C 77.00 *F  Heat index: 25.15 *C 77.27 *F
Humidity: 61.00 %      Temperature: 25.00 *C 77.00 *F  Heat index: 25.15 *C 77.27 *F
Humidity: 61.00 %      Temperature: 25.00 *C 77.00 *F  Heat index: 25.15 *C 77.27 *F
Humidity: 61.00 %      Temperature: 25.00 *C 77.00 *F  Heat index: 25.15 *C 77.27 *F
Humidity: 61.00 %      Temperature: 25.00 *C 77.00 *F  Heat index: 25.15 *C 77.27 *F
Humidity: 61.00 %      Temperature: 25.00 *C 77.00 *F  Heat index: 25.15 *C 77.27 *F
Humidity: 61.00 %      Temperature: 25.00 *C 77.00 *F  Heat index: 25.15 *C 77.27 *F
Humidity: 91.00 %      Temperature: 25.00 *C 77.00 *F  Heat index: 25.93 *C 78.68 *F
Humidity: 91.00 %      Temperature: 27.00 *C 80.60 *F  Heat index: 31.27 *C 88.28 *F
Humidity: 91.00 %      Temperature: 27.00 *C 80.60 *F  Heat index: 31.27 *C 88.28 *F
Humidity: 91.00 %      Temperature: 27.00 *C 80.60 *F  Heat index: 31.27 *C 88.28 *F
Humidity: 92.00 %      Temperature: 28.00 *C 82.40 *F  Heat index: 34.46 *C 94.03 *F

```

Code Reference

Use `dht.readHumidity()` read the humidity value, and use `dht.readTemperature()` to read the temperature value.

Every time we read the temperature/humidity data, Ameba uses the buffered temperature/humidity data unless it found the data has expired (i.e., has not been updated for over 2 seconds). If the data is expired, Ameba issues a request to DHT to read the latest data.

GPIO - Use GPIO Interrupt To Control LED

Preparation


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- LED x 1
- Button x 1

Example


In this example, we use a button to trigger interrupt and control the LED. When we press and release the button, the LED dims, press and release the button again, and the LED lights. Note that in the Arduino example “Button and LED”, LED only lights when the button is pressed and hold, when we release the button, the LED dims.

Open the example, “Files” -> “Examples” -> “AmebaGPIO” -> “LED_InterruptCtrl”

RTL8722DM / RTL8722CSM Wiring Diagram:

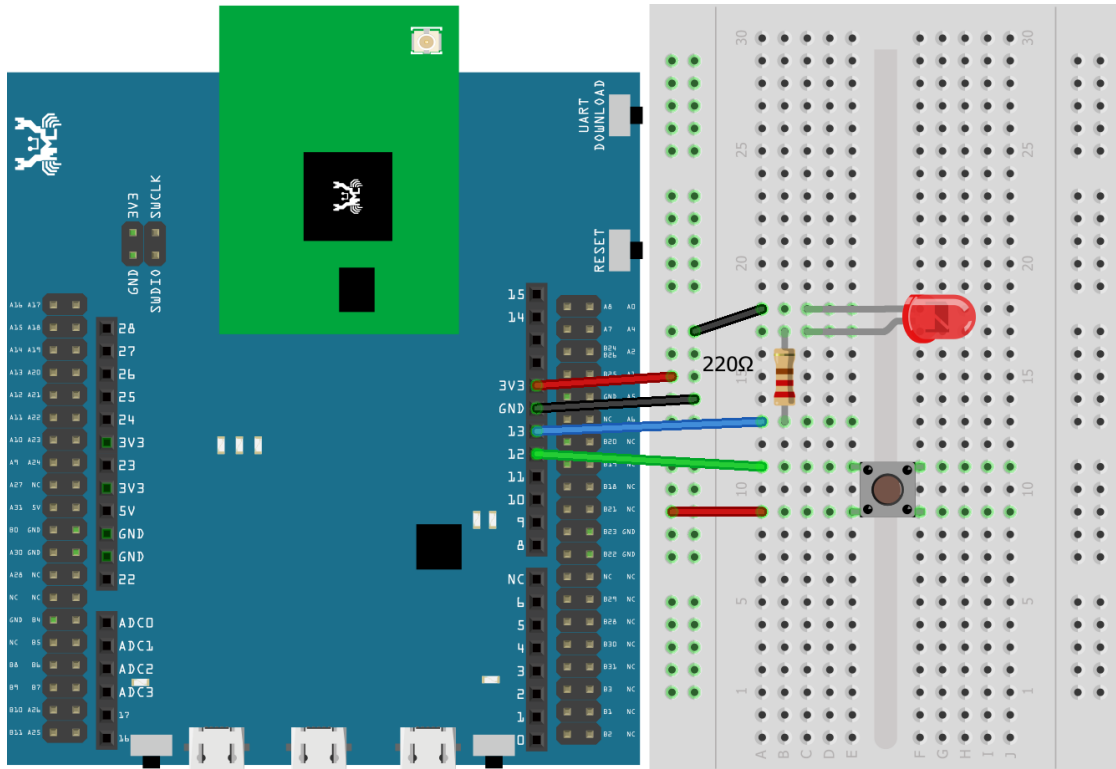

RTL8722DM MINI Wiring Diagram:

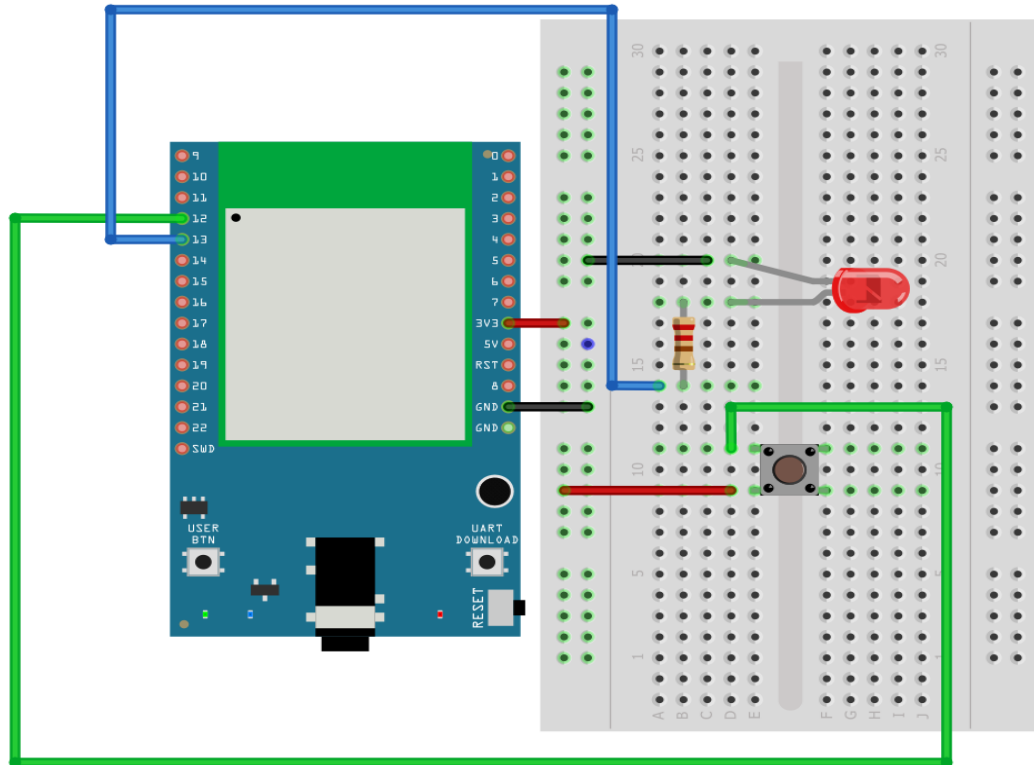

Compile and upload the program, press reset.

The LED lights at first. Press and release the button, then the LED should dim. Press again, then the LED should light.

Code Reference

In

```
setup()
```

we set Pin 12 to

```
INPUT_IRQ_RISE
```

, this means that an interrupt occurs when the voltage of this pin changes from GND to 3V3. Therefore, we connect the other side of the button to 3V3, so as to trigger interrupt event when the button is pressed.

```
pinMode(button, INPUT_IRQ_RISE);
```

On the other hand, we can set pin 12 to

```
INPUT_IRQ_FALL
```

, this means that an interrupt occurs when the voltage of this pin changes from 3V3 to GND. In this case, the other side of the button is connected to GND. Next, we need to specify the function to be executed to handle the interrupt:

```
digitalSetIrqHandler(button, button_handler);
```

The second parameter is a function pointer, with prototype:

```
void button_handler(uint32_t id, uint32_t event)
```

In this handler, every time we press and release the button, we trigger an interrupt, and change the status of the LED.

PWM –Play Music


Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Buzzer x 1

Example

A sound is composed of volume, tone and timbre. Volume is determined by the amplitude of the sound wave. Tone is determined by the frequency of the sound wave. Timbre is determined by the waveform of the sound wave.


In this example, we use PWM to control the buzzer to emit sound with desired tone. As PWM outputs square wave, if we wish to emit tone C4 (frequency=262Hz), we have to make PWM to output square wave with wavelength $1/262 = 3.8\text{ms}$:

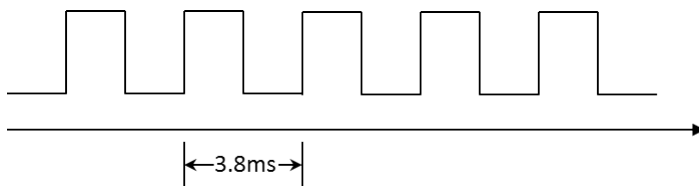


We use PWM to output sound wave with different frequency, so as to play music by the buzzer.

Connect the buzzer to the PWM output pin shown in the following diagrams.

RTL8722DM / RTL8722CSM Wiring Diagram:

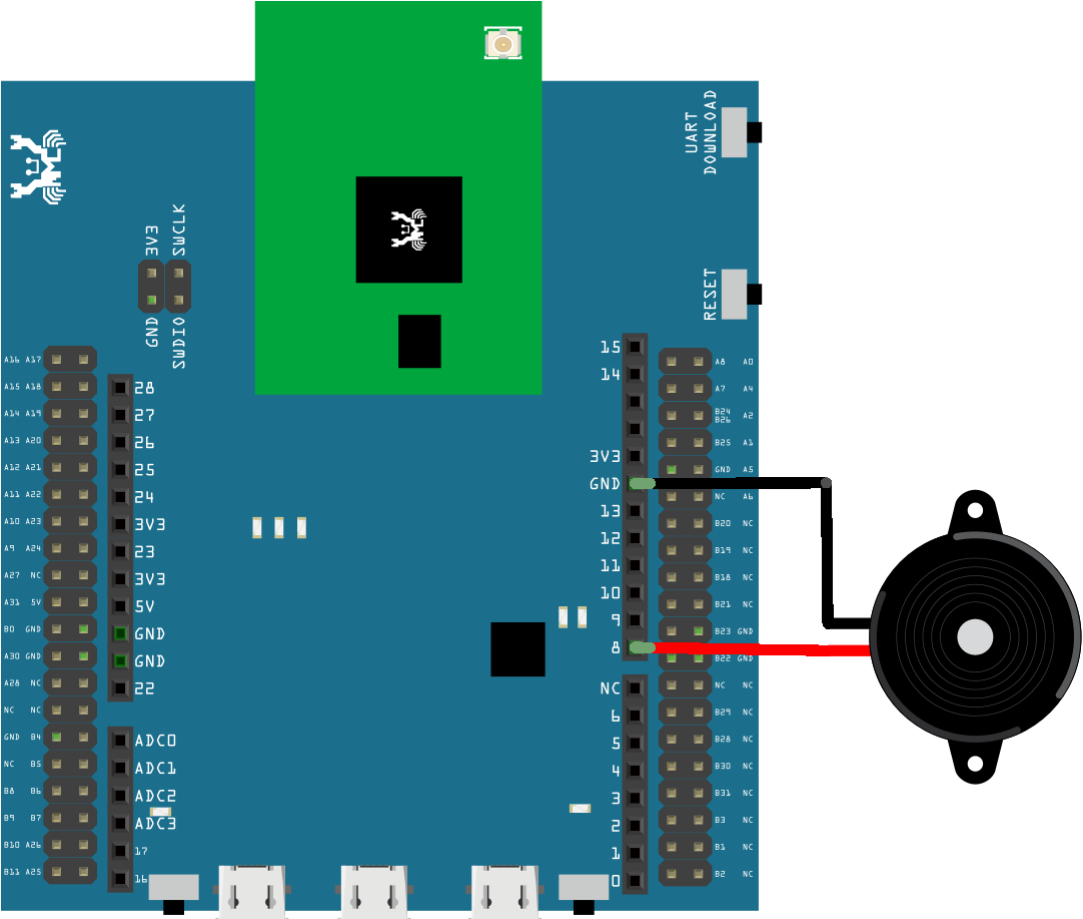

RTL8722DM MINI Wiring Diagram:

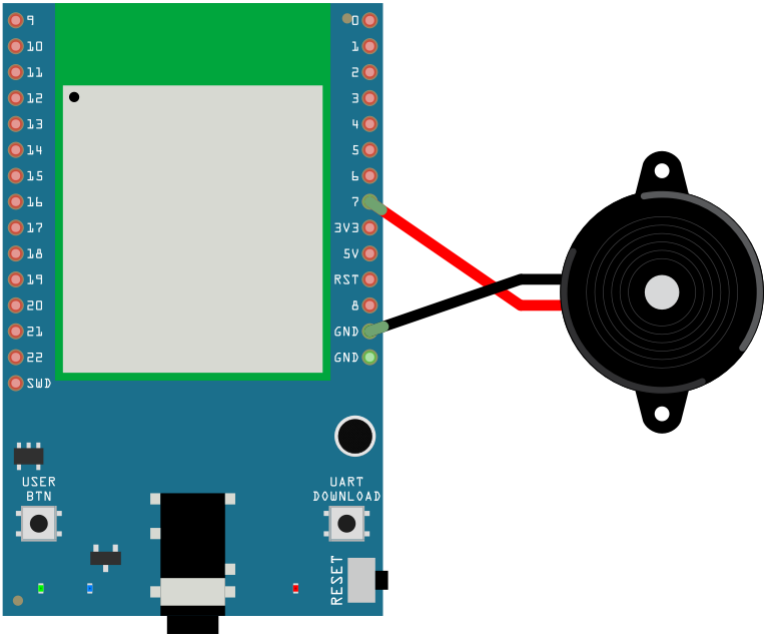

Open the example code in “Examples” -> “AmebaAnalog” -> “TonePlayMelody”

Compile and upload to Ameba, press the reset button. Then you can hear the buzzer playing music.

Code Reference

Ameba implement the tone() and noTone() API of Arduino:

<https://www.arduino.cc/en/Reference/Tone>

<https://www.arduino.cc/en/Reference/NoTone>

In the sample code, we initiate a melody array, which stores the tones to make. Another array, noteDurations, contains the length of each tone, 4 represents quarter note (equals to $3000\text{ms}/4 = 750\text{ms}$, and plus an extra 30% time pause), 8 represents eighth note.

PWM –Using A Servo

Preparation


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Servo x 1 (Ex. Tower Pro SG90)

Example


A typical servo has 3 wires, the red wire is for power, black or brown one should be connected to GND, and the other one is for signal data. We use PWM signal to control the rotation angle of the axis of the servo. The frequency of the signal is 50Hz, that is length 20ms. Each servo defines its pulse bandwidth, which is usually 1ms~2ms.

To control the rotation angle, for example if 1ms-length pulse rotates the axis to degree 0, then 1.5 ms pulse rotates the axis to 90 degrees, and 2 ms pulse rotates the axis to 180 degrees. Furthermore, a servo defines the “dead bandwidth”, which stands for the required minimum difference of the length of two consecutive pulse for the servo to work.

RTL8722DM / RTL8722CSM Wiring Diagram:

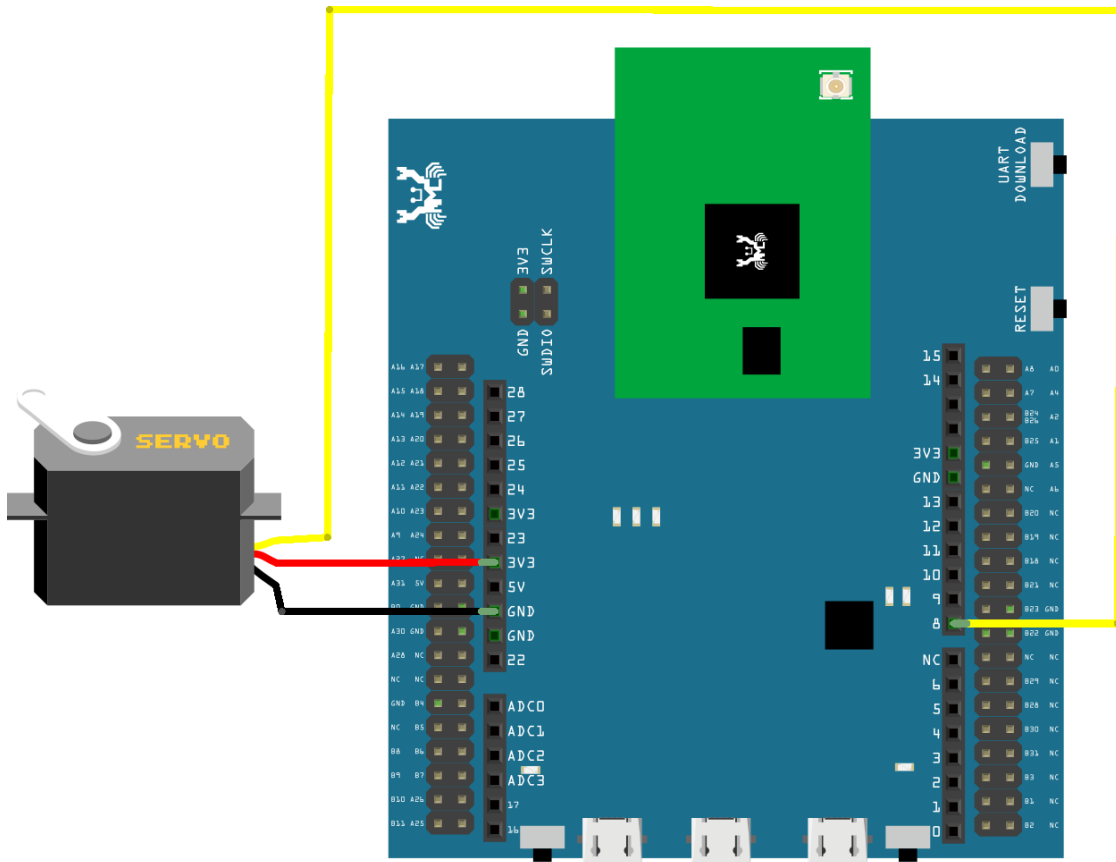

RTL8722DM MINI Wiring Diagram:

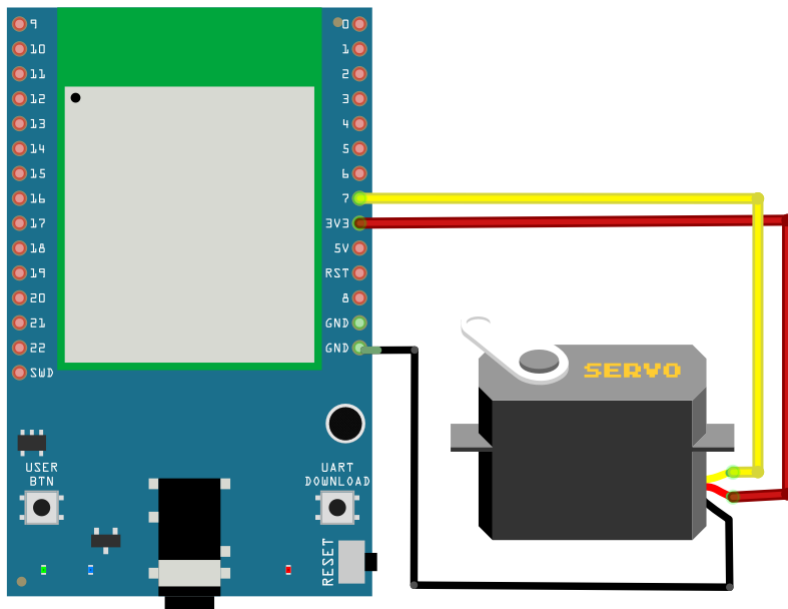

Open the example, “File” -> “Examples” -> “AmebaAnalog” -> “ServoSweep”

This example makes the servo to rotate from degree 0 to 180, and then rotate back to degree 0.

Code Reference

The Servo API of Ameba is similar to the API of Arduino. To distinguish from the original API of Arduino, we name the header file “AmebaServo.h” and the Class “AmebaServo”, the usage is identical to the Arduino API.

The default pulse bandwidth of Arduino Servo is 0.5ms~2.4ms, which is the same as Tower Pro SG90. Therefore, we set the attached pin directly:

```
myservo.attach(9);
```

Next, rotate the axis to desired position:

```
myservo.write(pos);
```

I2C - Communicate with Arduino UNO via I2C

Introduction of I2C

There are two roles in the operation of I2C, one is “master”, the other is “slave”. Only one master is allowed and can be connected to many slaves. Each slave has its unique address, which is used in the communication between master and the slave. I2C uses two pins, one is for data transmission (SDA), the other is for the clock (SCL). Master uses the SCL to inform slave of the upcoming data transmission, and the data is transmitted through SDA. The I2C example was named “Wire” in the Arduino example.

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Arduino UNO x 1

Example


In this example, we use Ameba as the I2C master writer, and use Arduino as the I2C slave receiver.

When the I2C slave receives string sent from I2C master, it prints the received string.

- Setting up Arduino Uno to be I2C Slave

First, select Arduino in the Arduino IDE in “Tools” -> “Board” -> “Arduino Uno”

Open the “Slave Receiver” example in “Examples” -> “Wire” -> “slave_receiver” :

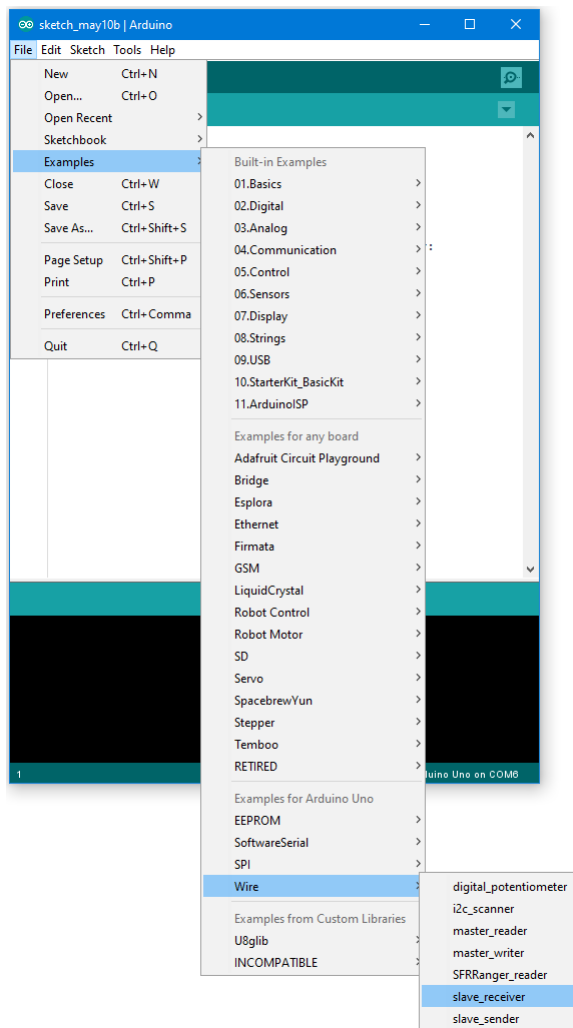


Then click “Sketch” -> “Upload” to compile and upload the example to Arduino Uno.

- Setting up Ameba to be I2C Master

Next, open another window of Arduino IDE, make sure to choose your Ameba development board in the IDE:

“Tools” -> “Board”

Then open the “Master Writer” example in “File” -> “Examples” -> “AmebaWire” -> “MasterWriter”

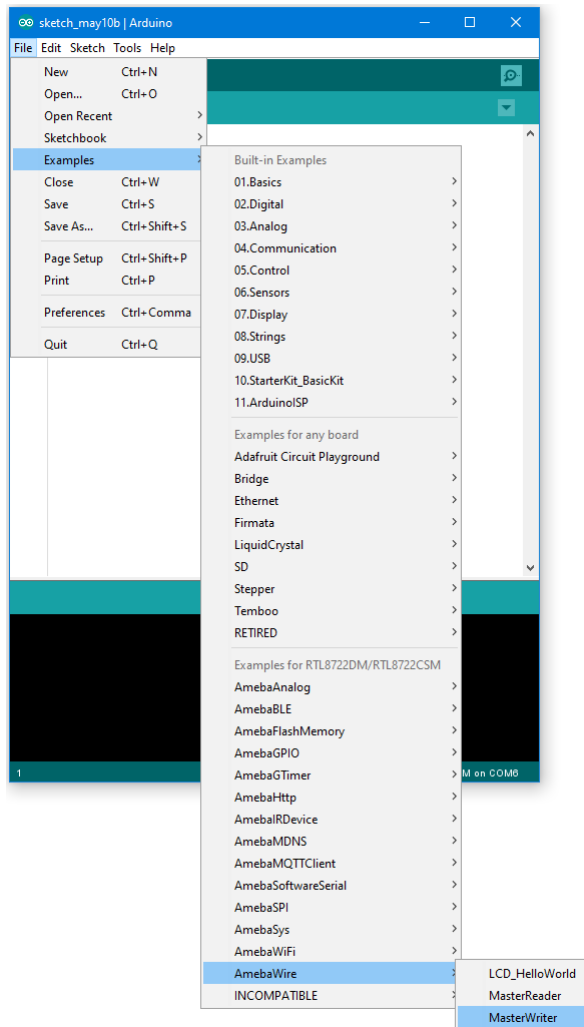


- Wiring


The Arduino example uses A4 as the I2C SDA and A5 as the I2C SCL.

Another important thing is that the GND pins of Arduino and Ameba should be connected to each other.

RTL8722DM / RTL8722CSM Wiring Diagram:

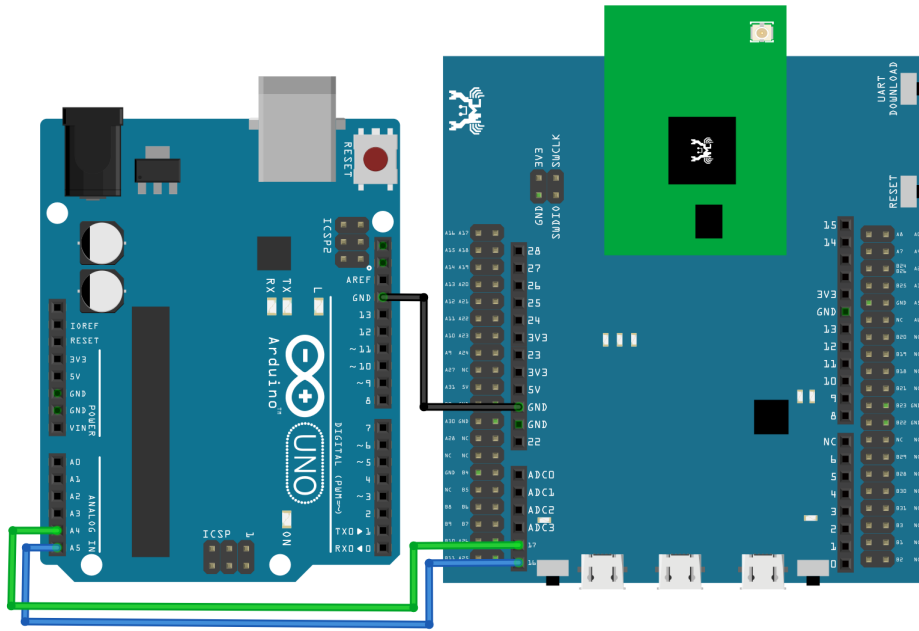

RTL8722DM MINI Wiring Diagram:

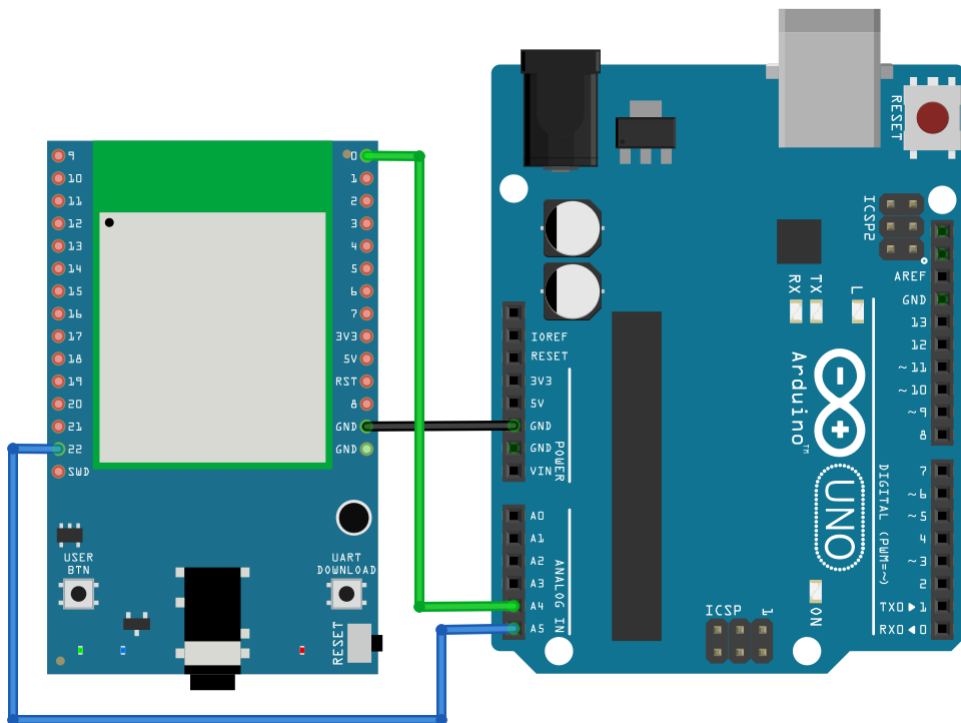


Open the Arduino IDE of the Arduino Uno and open the serial monitor (“Tools” -> “Serial Monitor”).

In the Serial Monitor, you can see the messages printed from Arduino Uno.

Next, press the reset button on Arduino Uno. Now the Arduino Uno is waiting for the connection from I2C Master.

We press the reset button on Ameba to start to send messages. Then observe the serial monitor, you can see the

messages show up every half second.

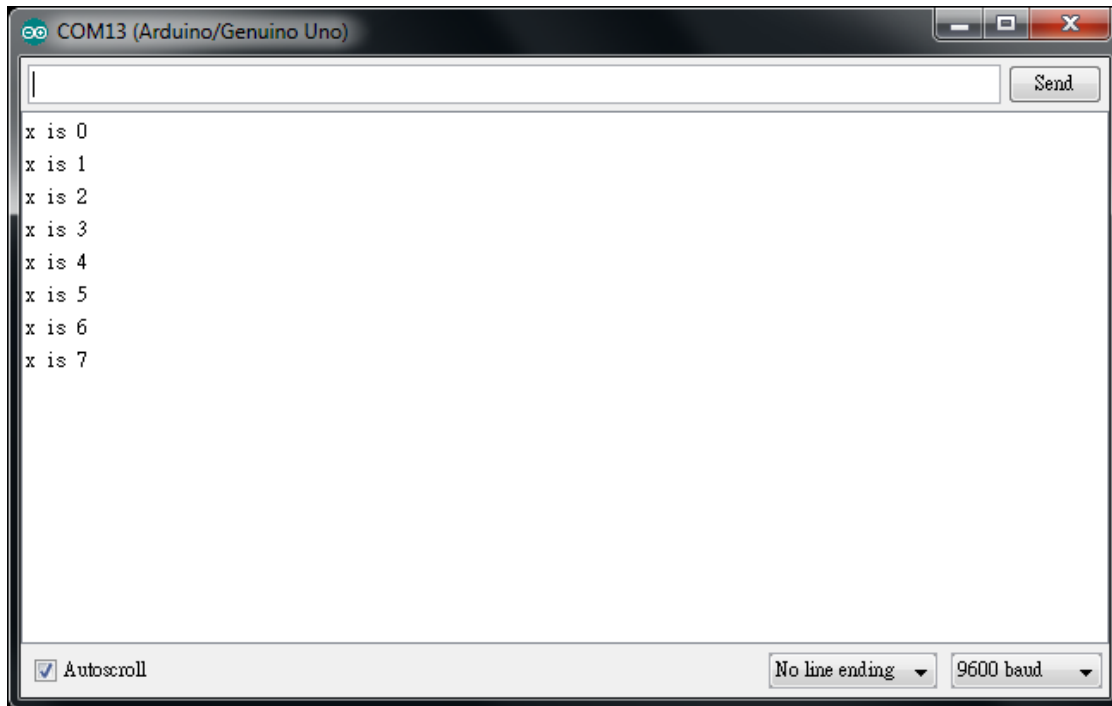

Code Reference

You can find detailed information of this example in the documentation of Arduino:

<https://www.arduino.cc/en/Tutorial/MasterWriter>

First use `Wire.begin()/Wire.begin(address)` to join the I2C bus as a master or slave, in the Master case the address is not required.

<https://www.arduino.cc/en/Reference/WireBegin>

Next, the Master uses `Wire.beginTransmission(address)` to begin a transmission to the I2C slave with the given address:

<https://www.arduino.cc/en/Reference/WireBeginTransmission>

Uses `Wire.write()` to send data, and finally use `Wire.endTransmission()` to end a transmission to a Slave and transmits the bytes that were queued:

<https://www.arduino.cc/en/Reference/WireEndTransmission>


I2C - Display Data On LCD Screen

Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- I2C 2×16 LCD


Example

Normally there are many pins on an LCD display, as shown in below figure.

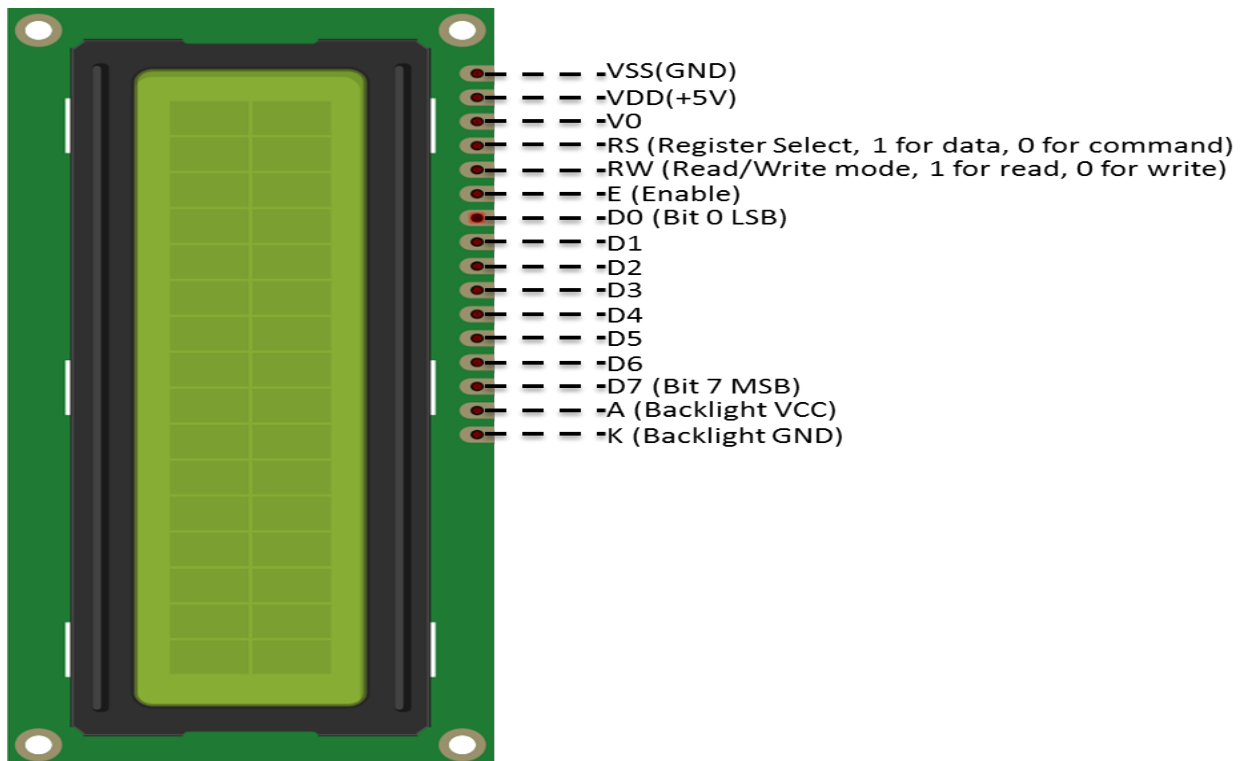


An LCD display can be equipped with an additional processing chip to process the data. The processing chip can connect to a microcontroller using the I2C interface.

RTL8722DM / RTL8722CSM Wiring Diagram:

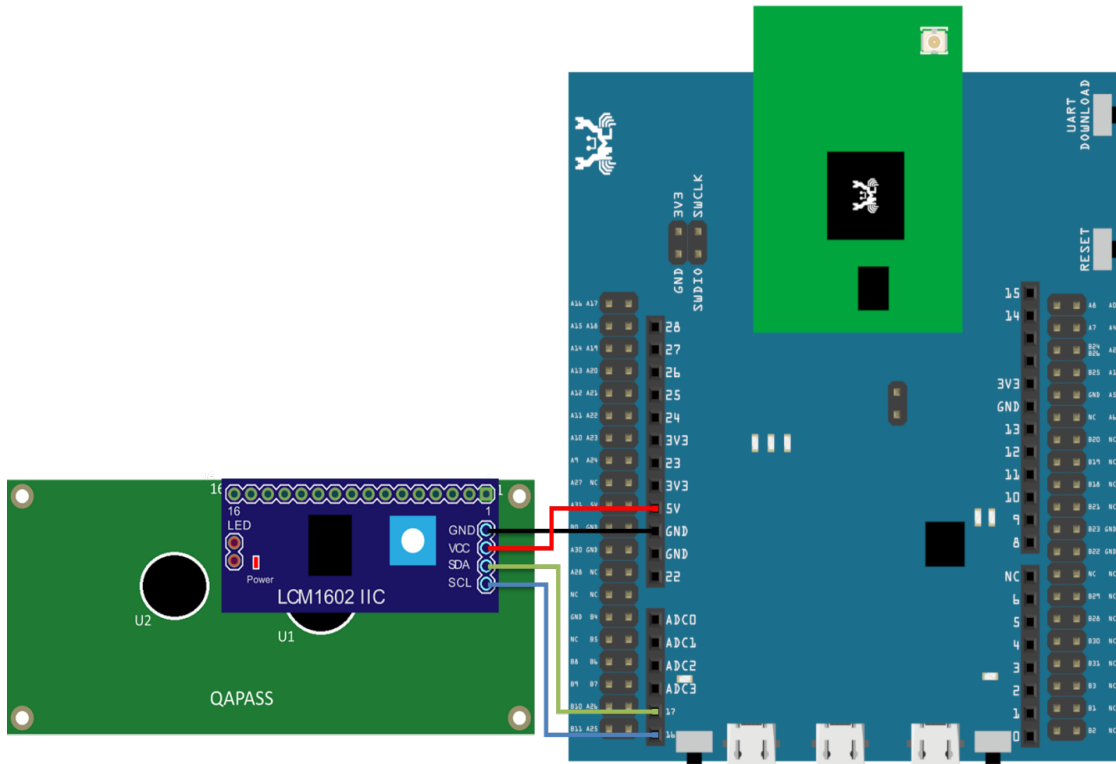

RTL8722DM MINI Wiring Diagram:

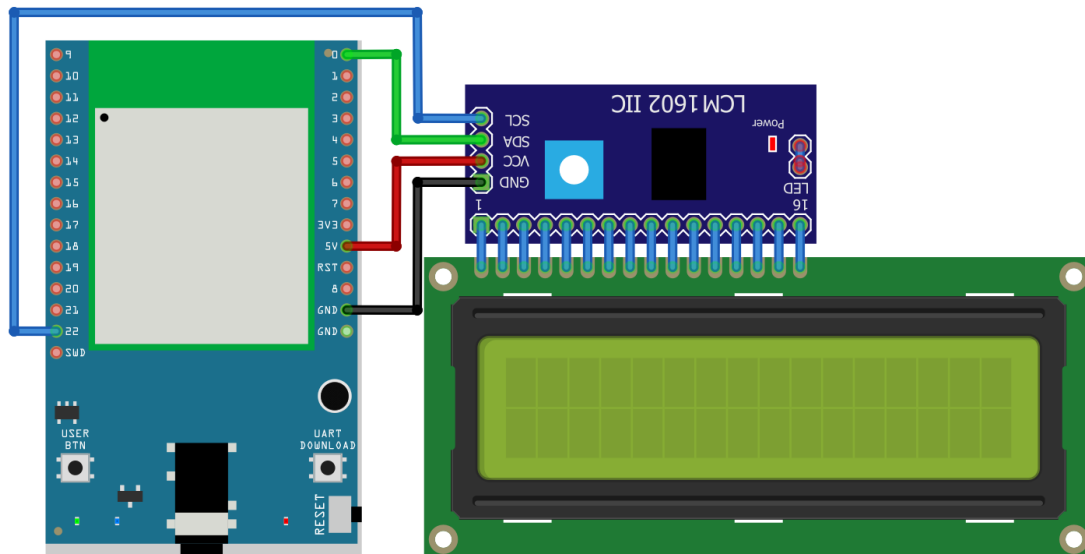


Open the example in “File” -> “Examples” -> “AmebaWire” -> “LCD_HelloWorld” .
 Compile and upload to Ameba, then press the reset button.

Then you can see “Hello World” in the first line, and “Ameba” in the second line displayed on the LCD screen.



After 8 seconds, you can input to the Serial Monitor the string you would like to display on the LCD.

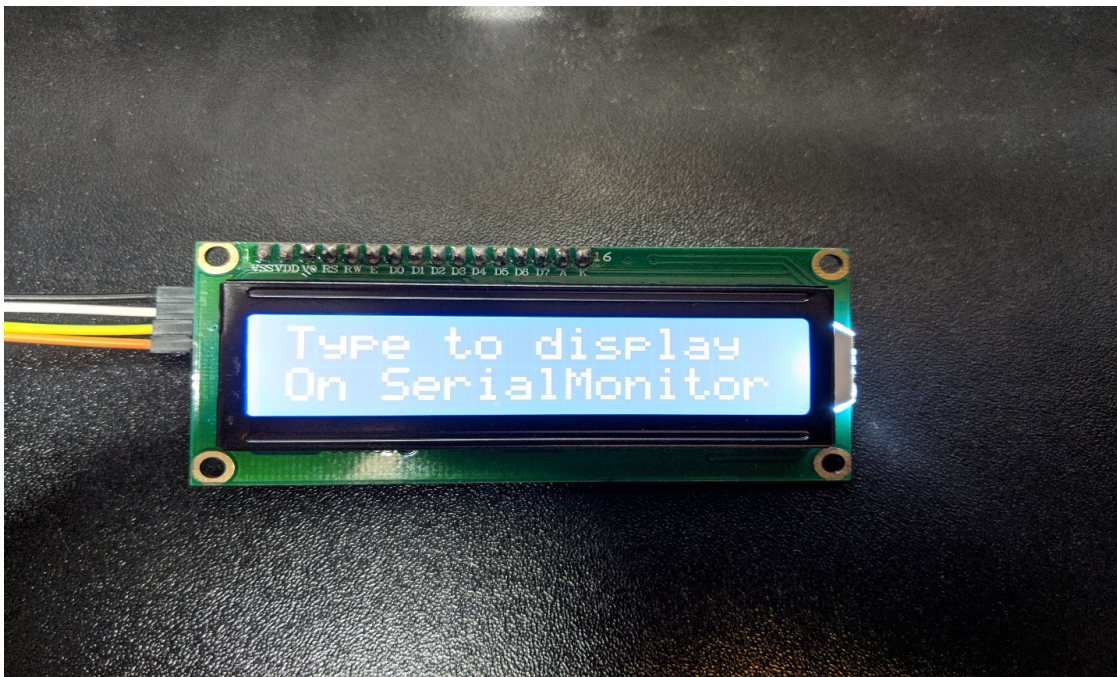

For example, we enter “123456789” and press “Send” :



Code Reference

The required settings of each model of LCD might be different, the constructor we use in this example is:

```
LiquidCrystal_I2C(uint8_t lcd_Addr, uint8_t En, uint8_t Rw, uint8_t Rs,
                  uint8_t d4, uint8_t d5, uint8_t d6, uint8_t d7,
                  uint8_t backlighPin, t_backlighPol pol);
```

And the setting parameters are as follows:

```
LiquidCrystal_I2C lcd(0x27, 2, 1, 0, 4, 5, 6, 7, 3, POSITIVE); // Set the LCD I2C_
↪address
```

The first parameter 0x27 is the address of I2C. Each of the following 8 parameters represents the meaning of each bit in a byte, i.e., En is bit 2, Rw is bit 1, Rs is bit 0, d4 is bit 4, and so forth.

Call `backlight()` to light the screen,

Call `setCursor(0, 0)` to set the position of the cursor.

LCD inherits the Print class, so we can use `lcd.print()` to output string on the screen.

I2C - Use I2C to receive data from Arduino UNO

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Arduino UNO x 1

Example


In the previous example “[I2C –Communicate with Arduino UNO via I2C](#)” , Ameba, the I2C master, transmits data to the Arduino UNO, the I2C slave.

As to this example, Ameba is the I2C master, and receives data from the Arduino UNO, which is the I2C slave.

- **Setting up Arduino Uno to be I2C Slave**

First, select Arduino in the Arduino IDE in “Tools” -> “Board” -> “Arduino Uno” :

Open “Examples” -> “Wire” -> “slave_sender”

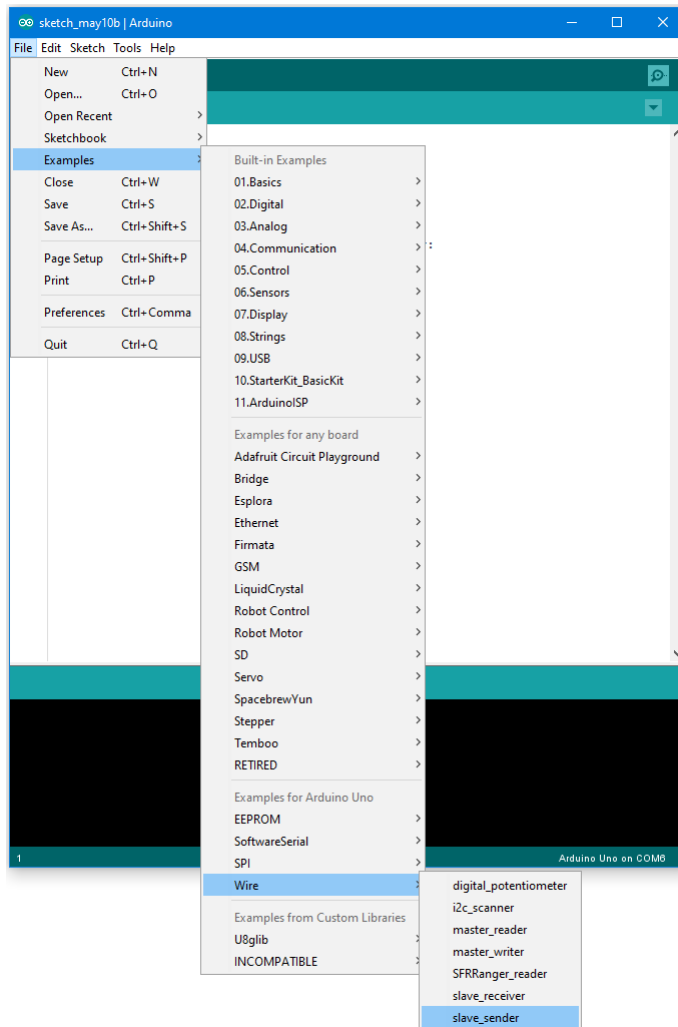


Then click “Sketch” -> “Upload” to compile and upload the example to Arduino Uno.

- **Setting up Ameba to be I2C Master**

Next, open another window of Arduino IDE, make sure to choose your Ameba development board in the IDE: “Tools” -> “Board”

Open “File” -> “Examples” -> “AmebaWire” -> “MasterReader”

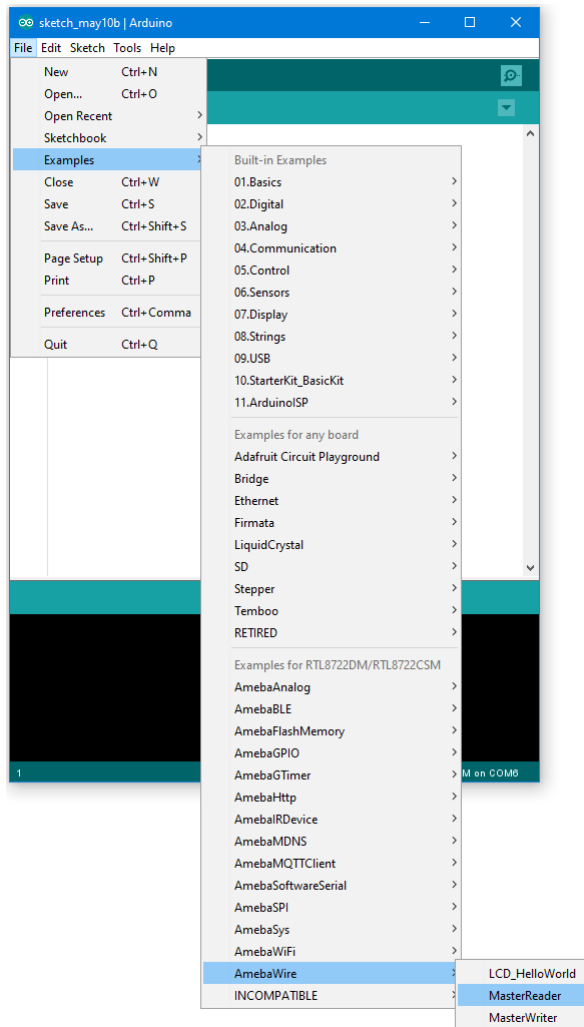


Click “Sketch” -> “Upload” to compile and upload the example to Ameba.

- **Wiring**


The Arduino example uses A4 as the I2C SDA and A5 as the I2C SCL.

Another important thing is that the GND pins of Arduino and Ameba should be connected to each other.

RTL8722DM / RTL8722CSM Wiring Diagram:

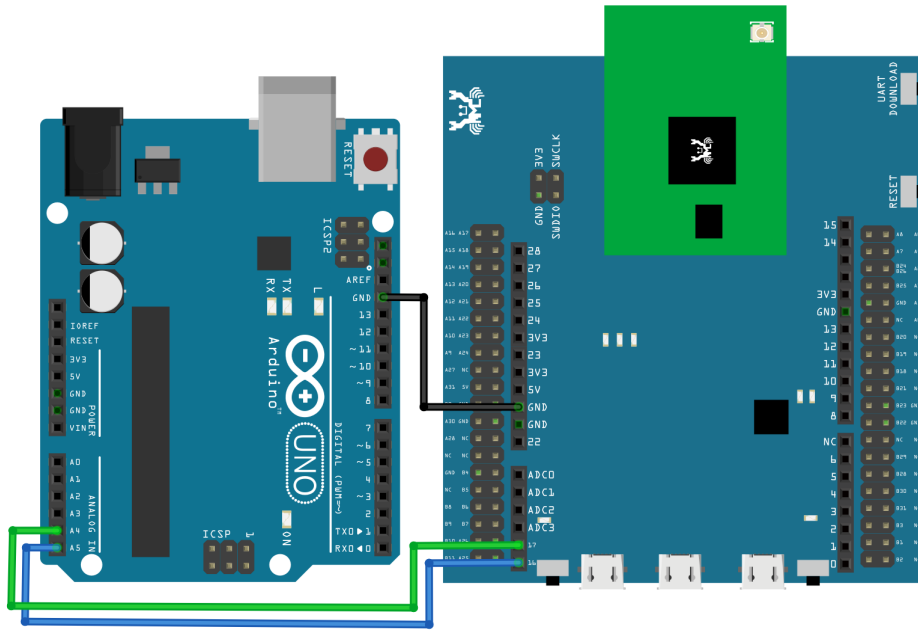


RTL8722DM MINI Wiring Diagram:

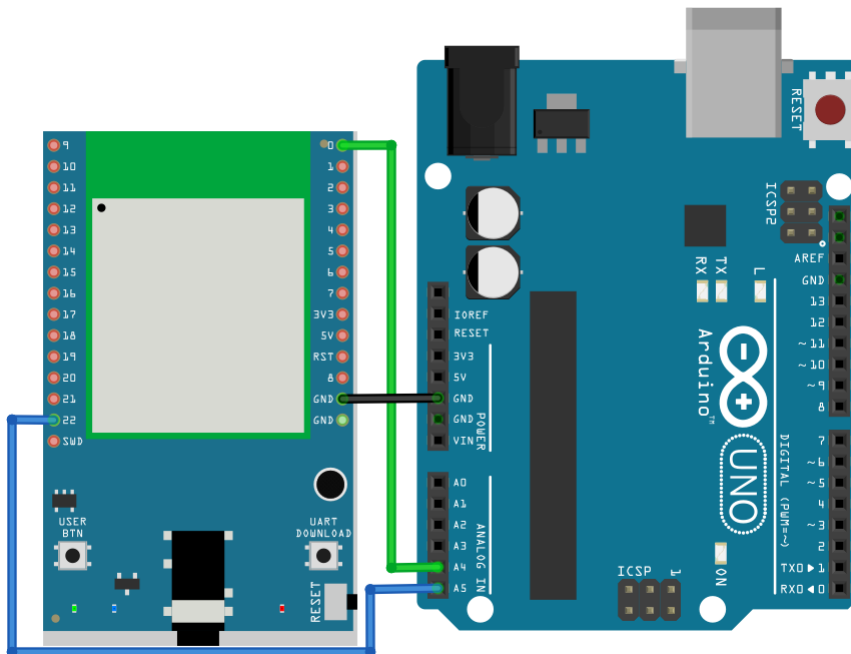

Next, we will observe the data receive by Ameba in the Serial Monitor.

(Note: If you do not know which port the Ameba development board is connected to, please find it in the Device Manager of Windows first. Ameba is connected as “mbed Serial Port”. For example, if you find mbed Serial Port (COM15) means Ameba is connected to port COM15.)

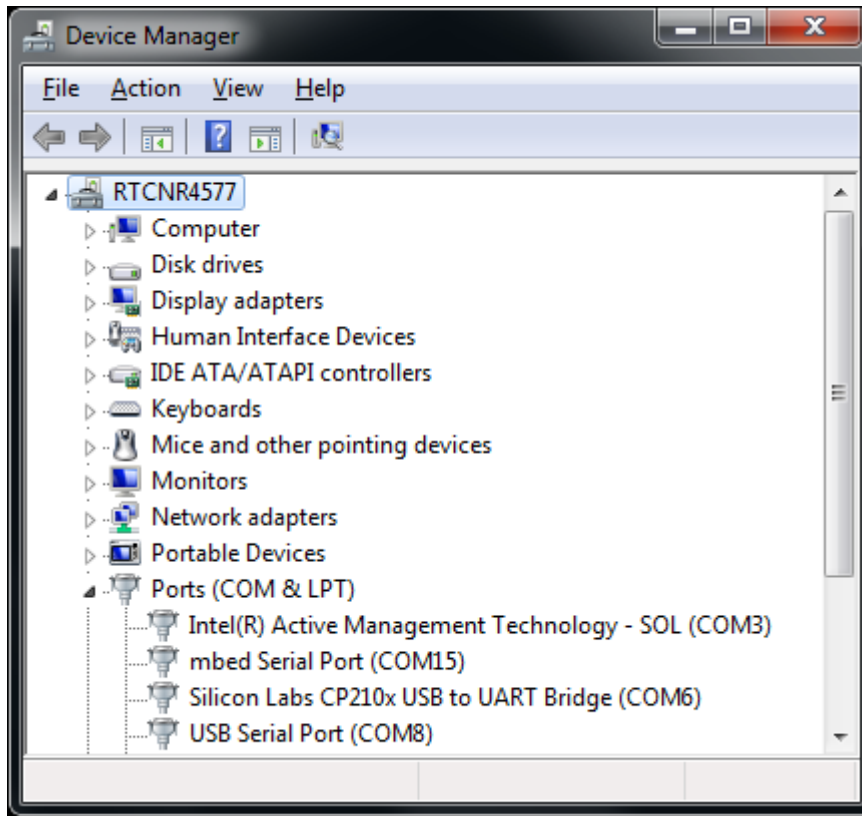


We select the port in “Tools” -> “Port” -> “COM15” (the port connected to Ameba)

Open the Arduino IDE window of the Ameba, go to “Tools” -> “Serial Monitor” to display the messages printed by Ameba.

Press the reset button on Arduino Uno, Arduino Uno now waits for connection from I2C master.

Then press the reset button on Ameba, Ameba will start to receive messages from Arduino Uno. And you can see the “hello ” message printed every half second in serial monitor.

(NOTE: If the message does not show in the Serial Monitor of Ameba, please close and open the serial monitor again.)

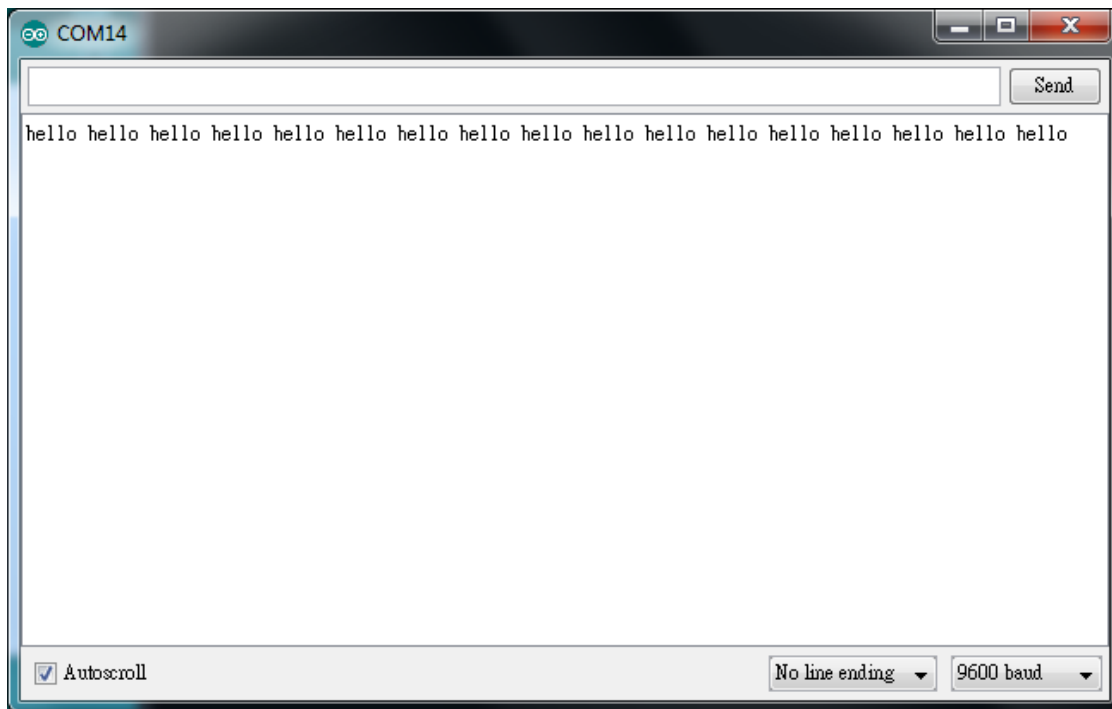

Code Reference

You can find detailed information of this example in the documentation of Arduino:

<https://www.arduino.cc/en/Tutorial/MasterReader>

First use `Wire.begin()` / `Wire.begin(address)` to join the I2C bus as a master or slave, in the Master case the address is not required.

<https://www.arduino.cc/en/Reference/WireBegin>

Next, the Master uses `Wire.requestFrom()` to specify from which Slave to request data.

<https://www.arduino.cc/en/Reference/WireRequestFrom>

UART - Communicate with the computer via UART

Introduction of UART

UART uses two wire, one for transmitting and the other one for receiving, so the data transmission is bidirectional. The communication uses a predefined frequency (baud rate) to transmit data. In Arduino, UART is called “Serial” . There is only one hardware UART on Arduino Uno and it is primarily used to read the log and messages printed by Arduino (so it is also called “Log UART”). If we use the hardware UART for other purposes, the Log UART does not have resources to function. To provide more UART connections, it is possible to use a GPIO pin to simulate the behavior of UART with a software approach, this is called Software Serial. Ameba is equipped with several hardware UART ports, but it is also compatible with the Software Serial library.

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- USB to TTL Adapter x 1

Example


In this example, we use UART to connect USB to TTL adapter to Ameba.

USB to TTL adapter sends data to Ameba, the data would be returned by Ameba, and showed on the screen.

- **Install USB to TTL Adapter**


USB to TTL adapter converts USB to serial interface. Normally, there are at least 4 pins on the adapter, that is 3V3 (or 5V), GND, TX and RX. Generally, installing the driver for the USB to TTL adapter would be required before using it. If the adapter uses the chip of FTDI, Windows will search and install the driver automatically, otherwise, you may need to install corresponding driver yourself.

Afterwards, open device manager. You can find corresponding serial port number of the USB to TTL adapter:

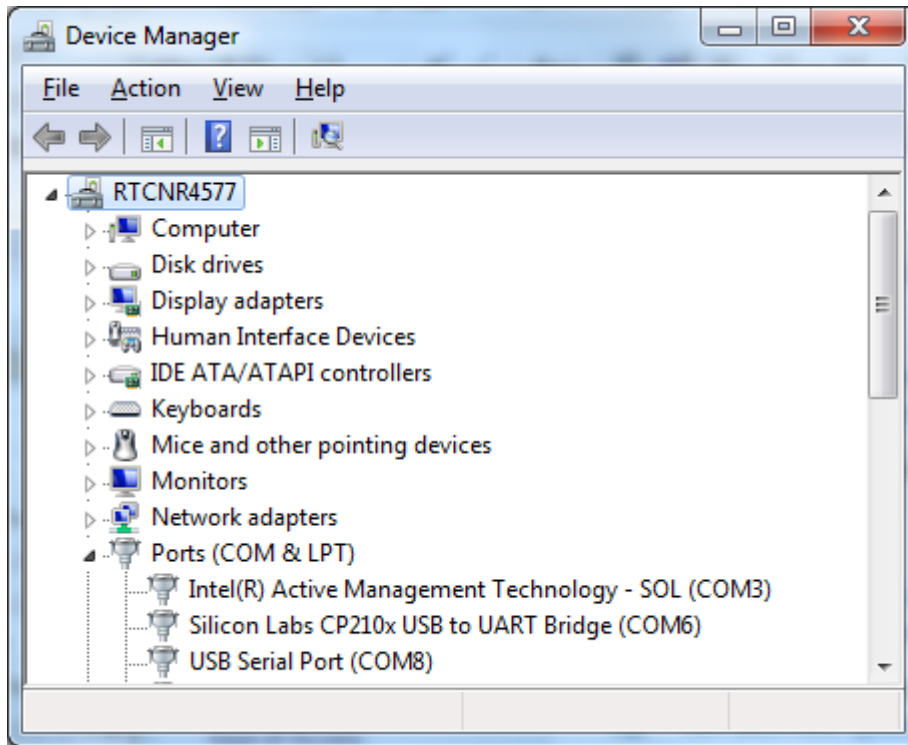


- Executing the Example

Open the "SoftwareSerialExample" example in "File" -> "Examples" -> "AmebaSoftwareSerial"
-> "SoftwareSerial_Basic" :

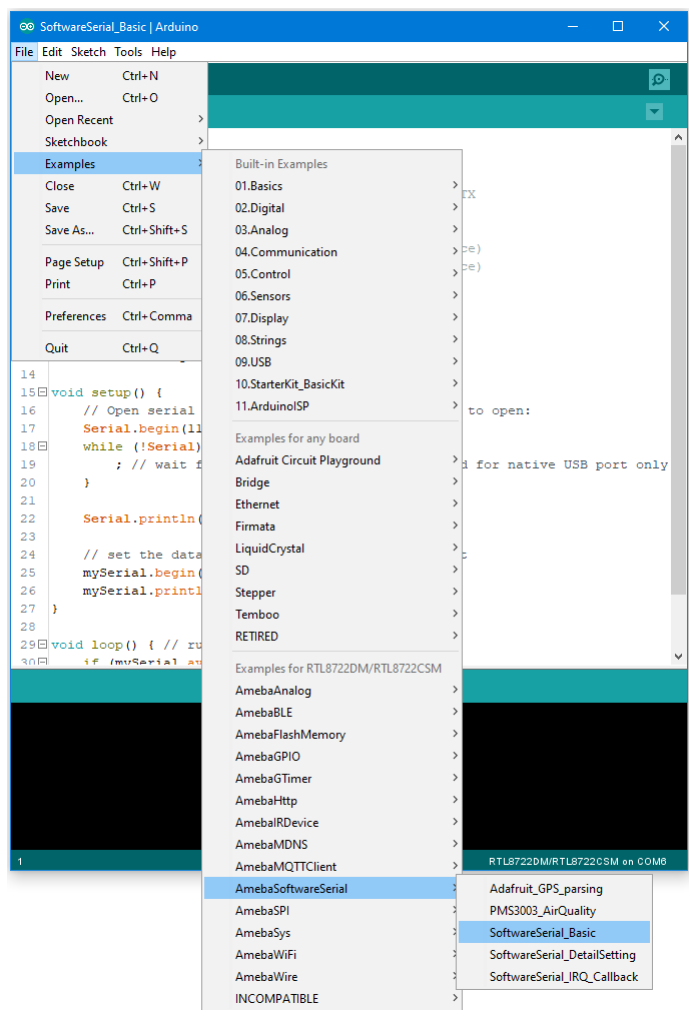


Connect the wire as the following diagrams show. The TX pin of USB to TTL adapter is connected to the RX of Ameba, and the RX pin of USB to TTL adapter is connected to the TX of Ameba.


RTL8722DM / RTL8722CSM Wiring Diagram:

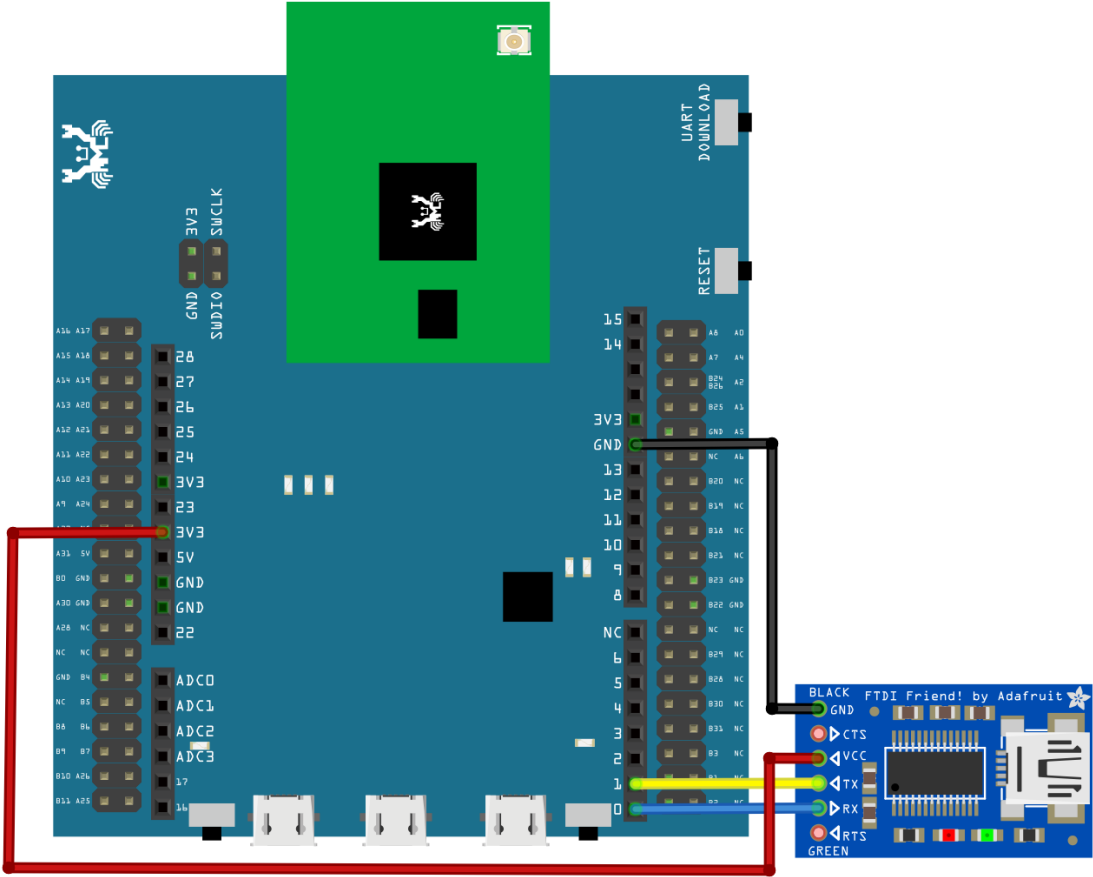


RTL8722DM MINI Wiring Diagram:

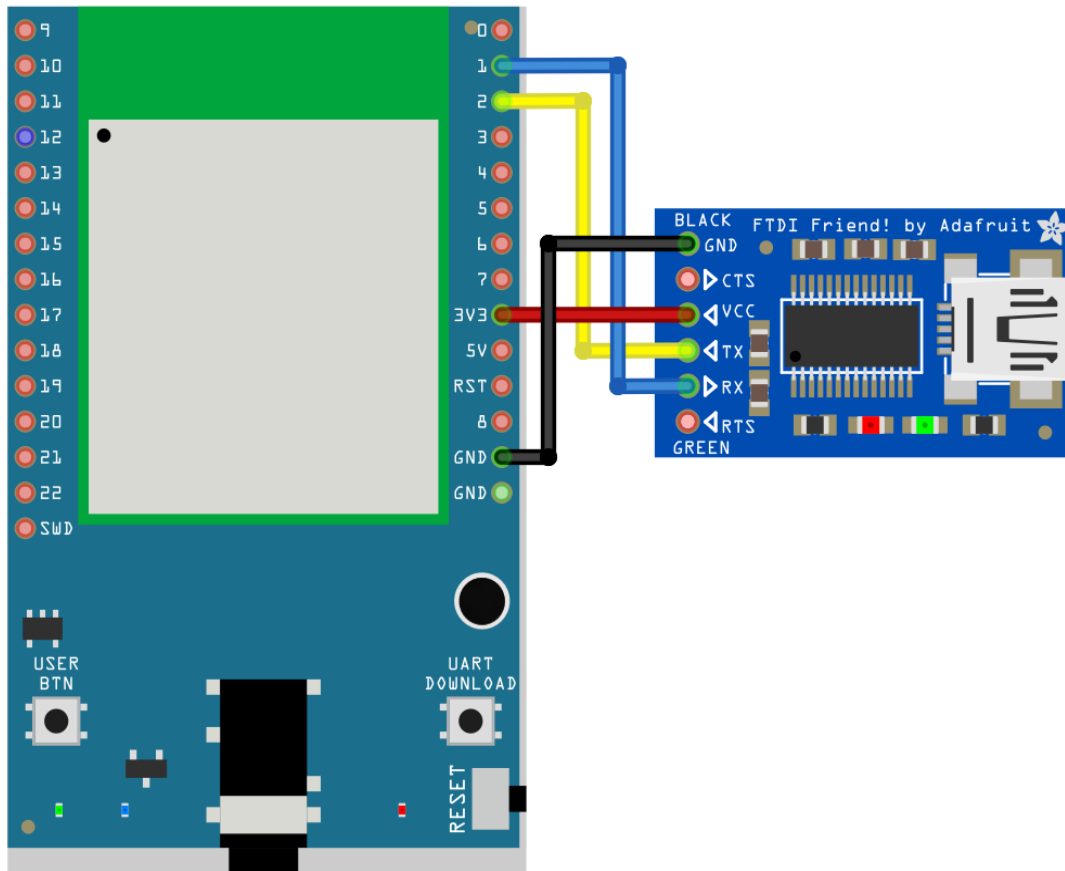


Next, open a serial port terminal, such as Putty or Tera Term. (Putty is used in this example). Open the Putty window, choose “Serial” in connection type, and specify the port number of the USB to TTL adapter (e.g. COM8). In the speed field, fill in the baud rate of this connection. Note that both sides of the connection should use the same baud rate. In this example we set baud rate 4800.

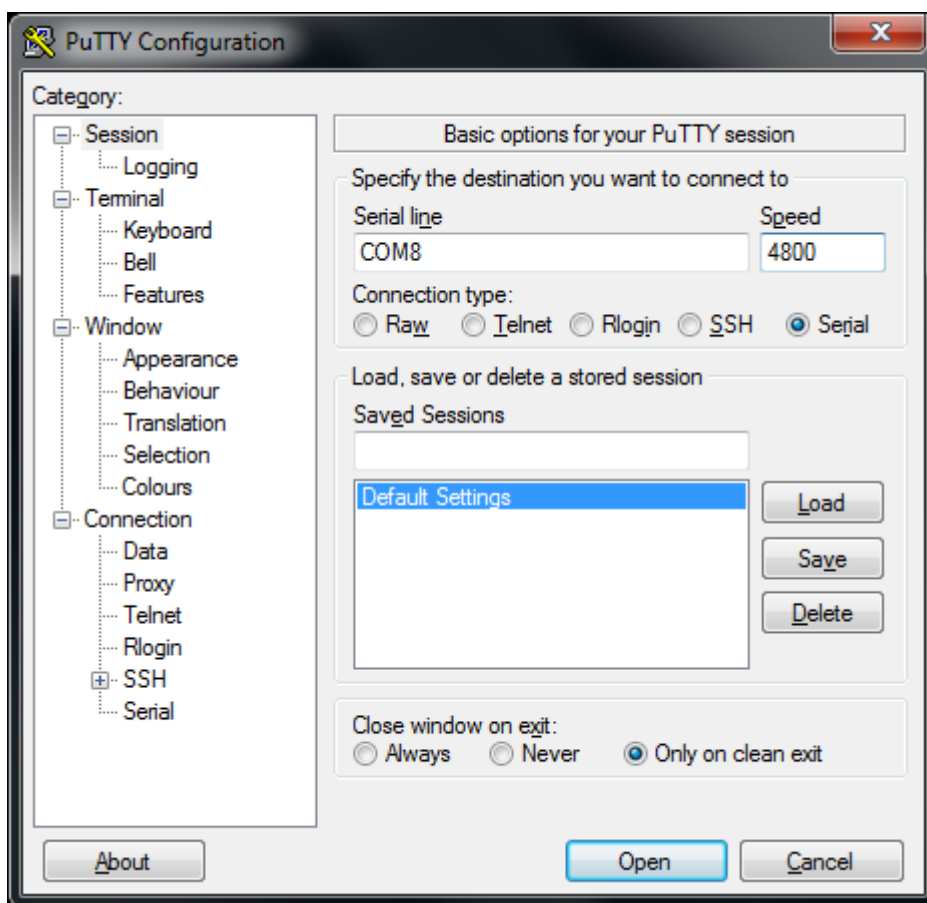

Next, select “Serial” on the left side. Set data bits to 8, stop bits to 1, parity to none, and flow control to none.

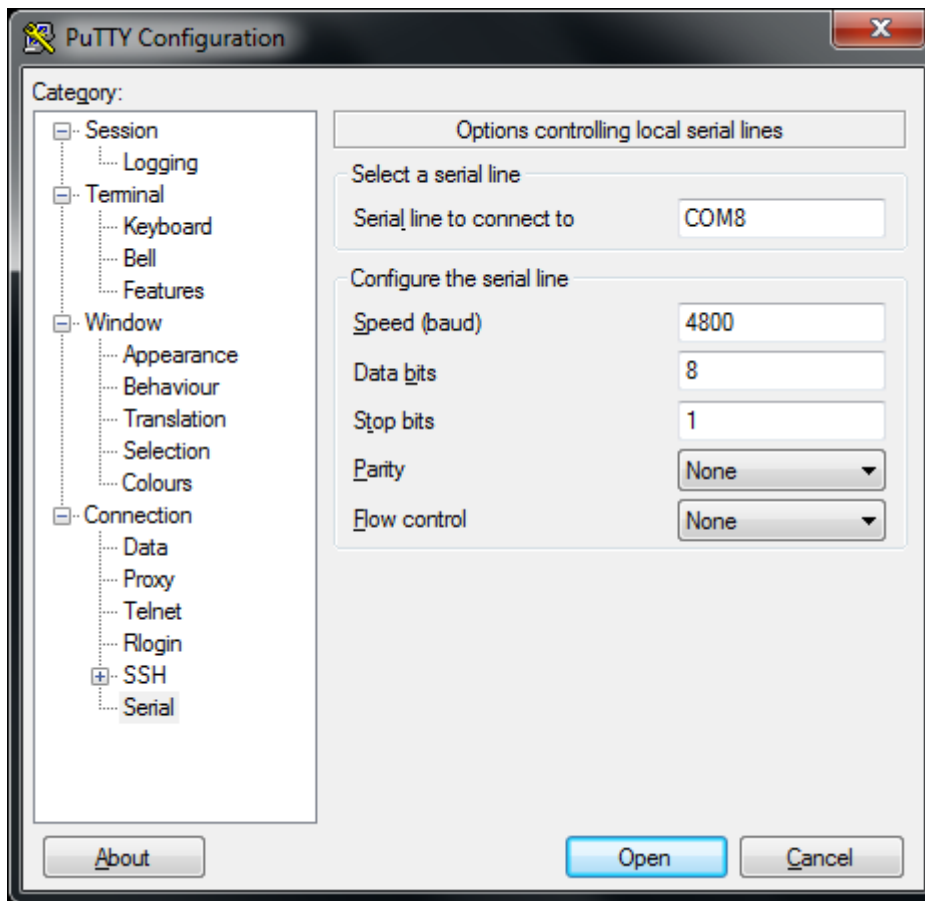

Then click Open and press the reset button on Ameba. You can see the “Hello, world?” message appears in Putty. If characters are typed into Putty, the input characters would be sent to Serial RX of Ameba by TX of USB to TTL Adapter, and returned by Serial TX of Ameba. Finally, RX of USB to TTL Adapter receives the returned characters and prints them in Putty. Therefore, if you insert “I am fine” , you will get something like this:

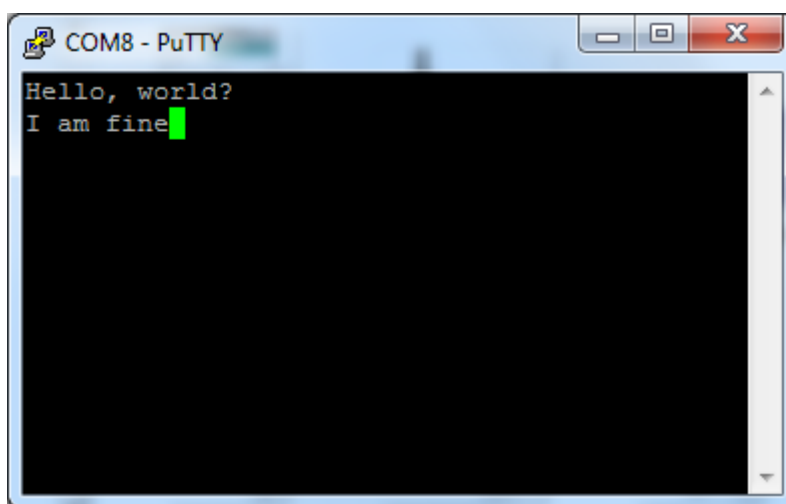

Code Reference

First, use `SoftwareSerial::begin(speed)` to set the baud rate for the serial communication:

<https://www.arduino.cc/en/Reference/SoftwareSerialBegin>

Use `write()` to send data, and use `SoftwareSerial::available()` to get the number of bytes available for reading from a software serial port:

<https://www.arduino.cc/en/Reference/SoftwareSerialAvailable>

If there are data available to read, use `read()` to read from serial port.

UART - Retrieve GPS Position


Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- Adafruit Ultimate GPS Breakout x 1 (Refer to official document)


Example

In this example, we use Adafruit Ultimate GPS Breakout. Its data format is pure text, so we can connect it to USB to TTL Adapter and observe the out-

put.

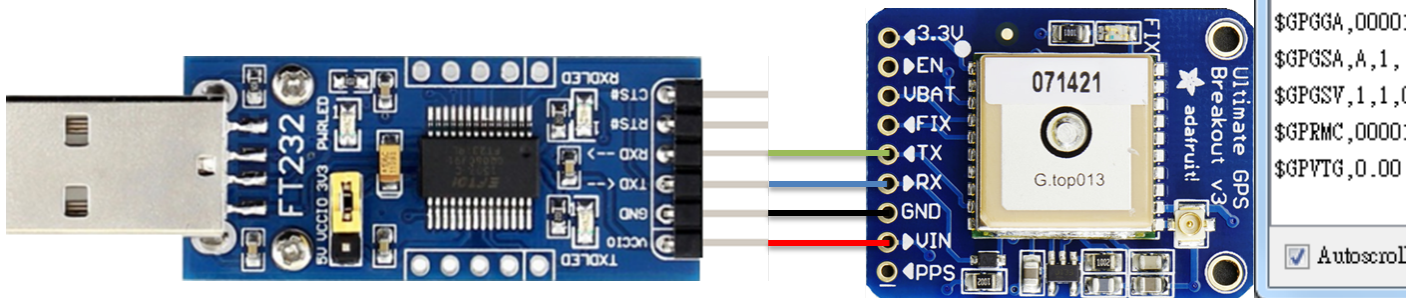

It follows the NMEA sentence format (refer to <http://aprs.gids.nl/nmea/>) The GPS signal is weak in indoor environment. The status that the GPS signal is not received is called “not fix”. Bring the GPS module outdoors, when the GPS signal is “fix”, you would get message similar to the figure below.

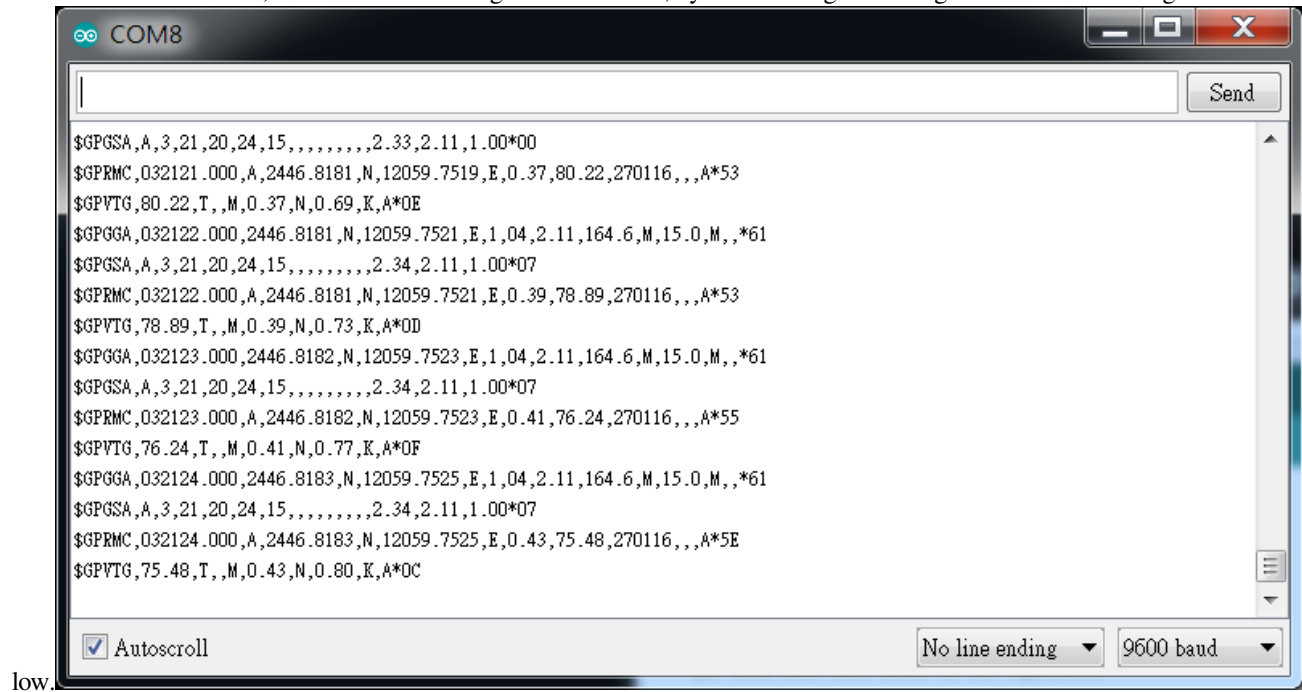

In this example we are only interested in the “\$GPRMC (Global Positioning Recommended Minimum Coordinates)” :
\$GPRMC,032122.000,A,2446.8181,N,12059.7251,E,0.39,78.89,270116,,A*53

Each field is separated by a comma.


- First field is the GMT time (Greenwich Mean Time), that is 032122.000 in this example. The time format is HH:MM:SS.SSS, i.e., 03:21:22.000. Note that the time zone and the daylight-saving time adjustment should be handled on your own.
- Second field represents the status code
 - V: Void (Invalid)
 - A: Active, meaning the GPS signal is fix.
- The third to sixth fields represent the geolocation

In this example, 2446.8181,N represents 24 degrees 46.8181 minutes north latitude, and 12059.7251,E represents 120 degrees 59.7251 minutes east longitude.


We can search **+24 46.8181'** , **+120 59.7251'** in Google map to check whether the position is cor-



- The seventh field is relative speed(knot). 1 knot = 1.852km/hr, in this example the relative speed is 0.39 knot.
- The eighth field is the moving angle, which is calculated by its moving orbit.
- The ninth field is the date with format ddMMyy. In this example, “270116” stands for day 27, January, year 2016.
- The last field is checksum. In the example we have *53 as checksum.

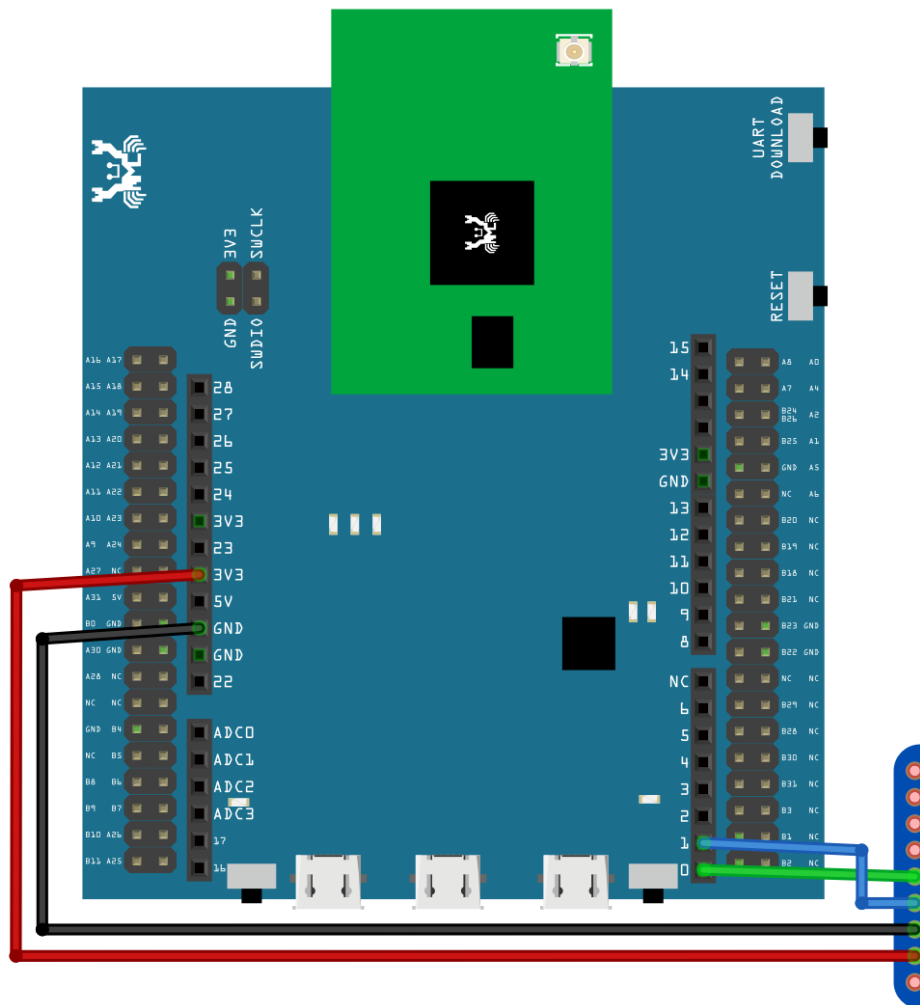


RTL8722DM/RTL8722CSM Wiring Diagram:

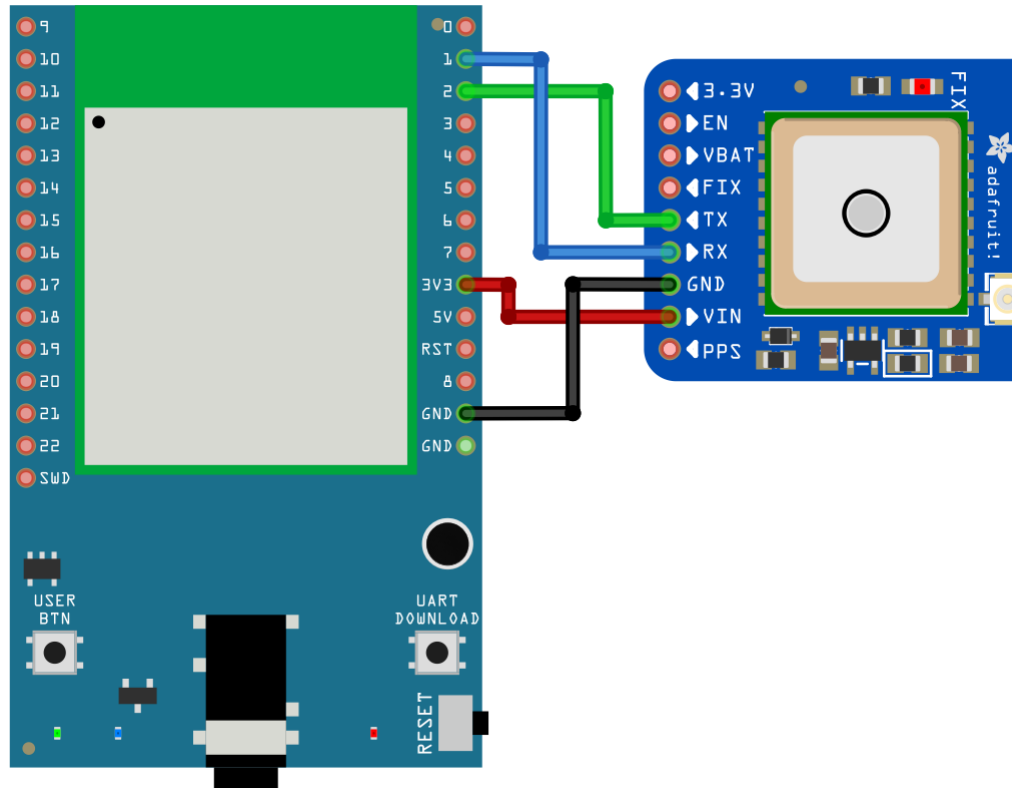**RTL8722DM MINI Wiring Diagram:**

Open the example in “Files” -> “Examples” -> “AmebaSoftwareSerial” -> “Adafruit_GPS_parsing” .

Compile and upload to Ameba, then press the reset button.

The result will be output to Serial Monitor:

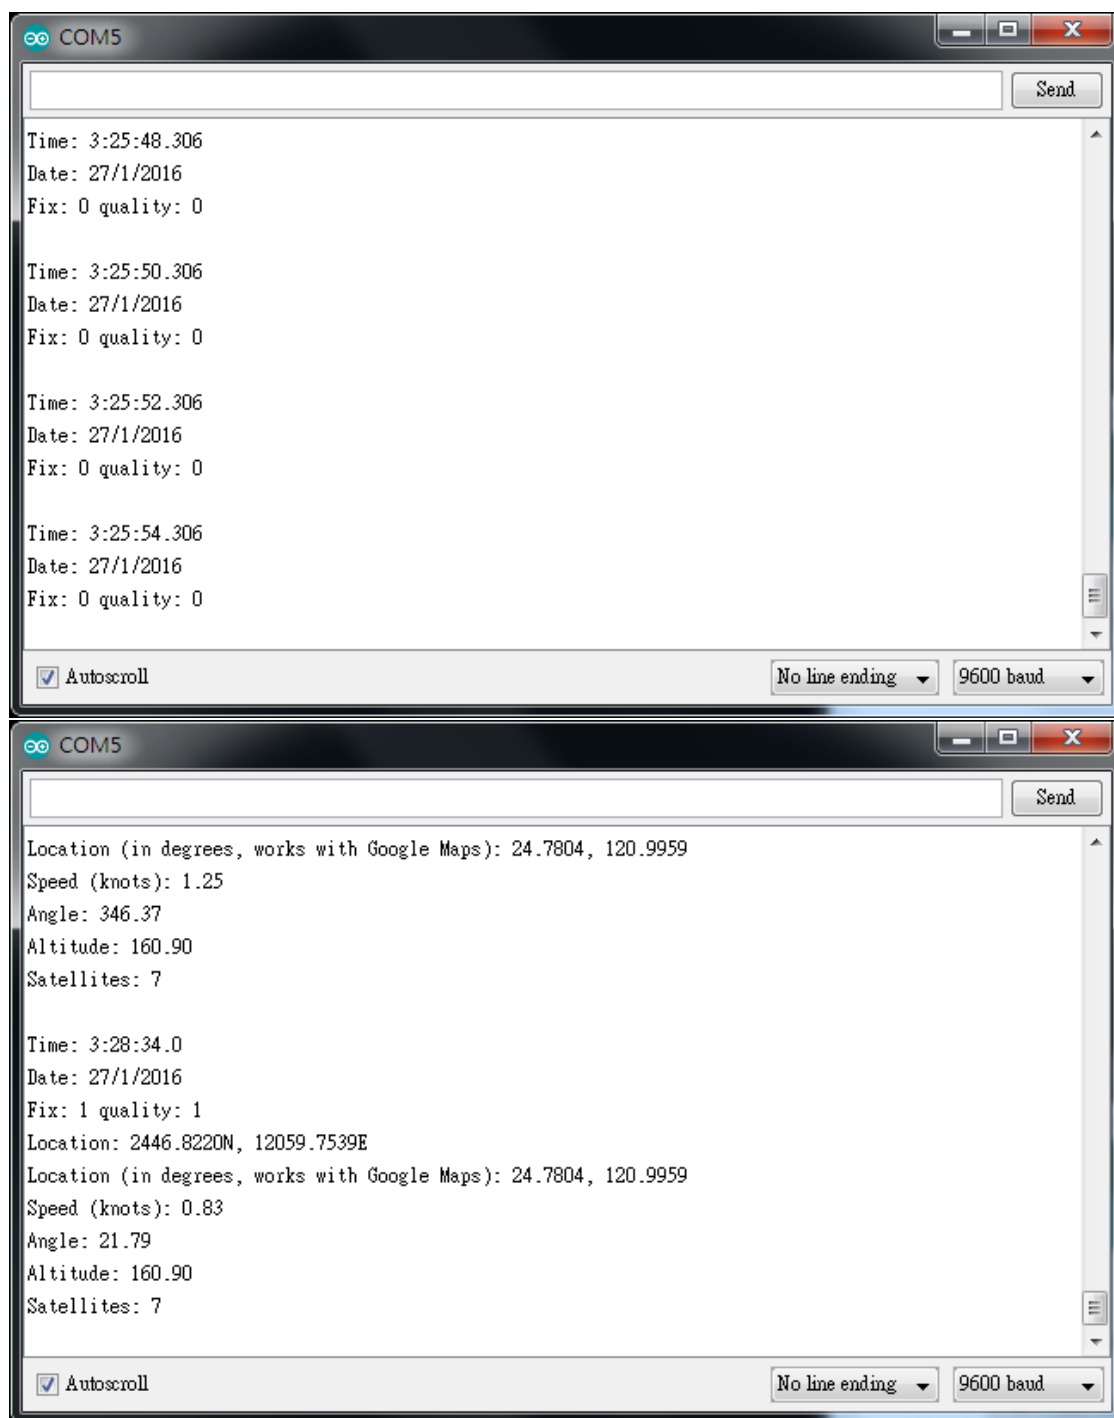

UART –Set Callback Function For UART Communications

Materials


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- USB to TTL Adapter x 1

Example


This example shows how to set a callback function for UART communication to process the UART data.

A USB to TTL adapter is required for this example. Ensure that you have the driver installed and connect it to the Ameba board as shown.


RTL8722DM / RTL8722CSM Wiring Diagram:

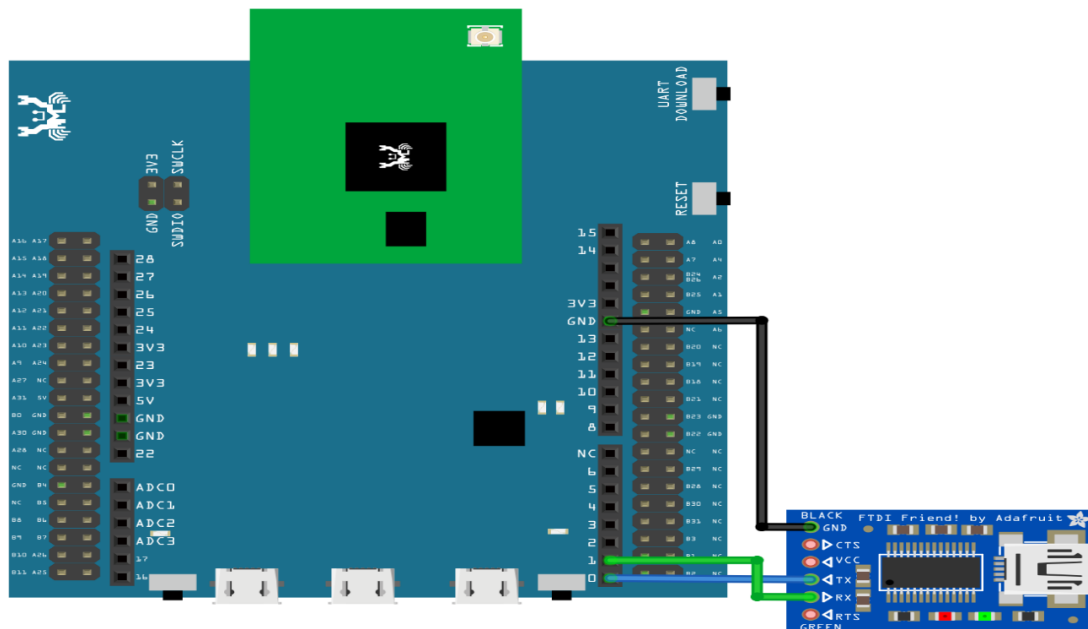

RTL8722DM MINI Wiring Diagram:

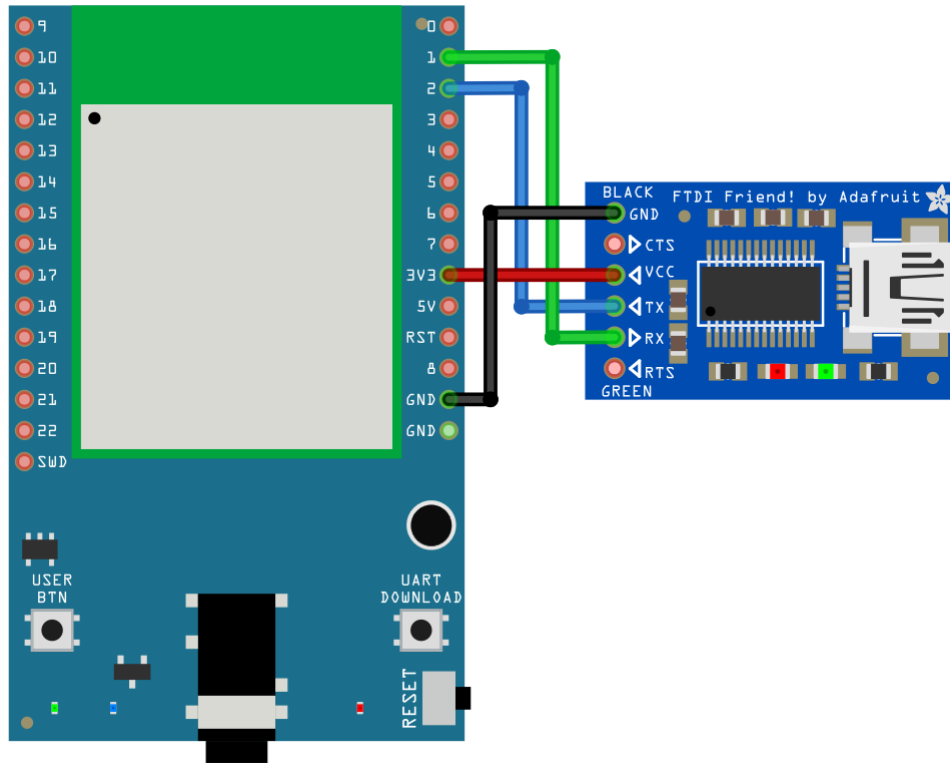


Open the example in “File” -> “Examples” -> “AmebaSoftwareSerial” -> “SoftwareSerial_Irq_Callback”

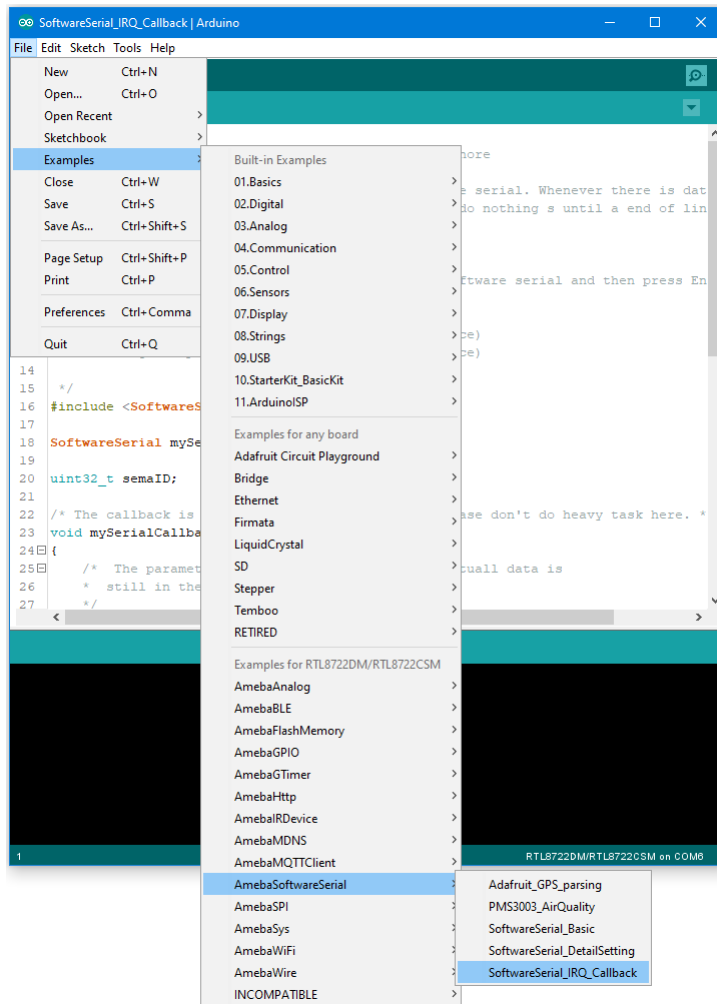


Upload the code and press the reset button on Ameba once the upload is finished.

Next, using a terminal program, such as TeraTerm or PuTTY, open a serial port and configure it according to the settings. Make sure the serial port number corresponds to the USB to TTL adapter.

- Speed: 38400
- Data: 8 bit
- Parity: none
- Stop bits: 1 bit
- Flow control: none

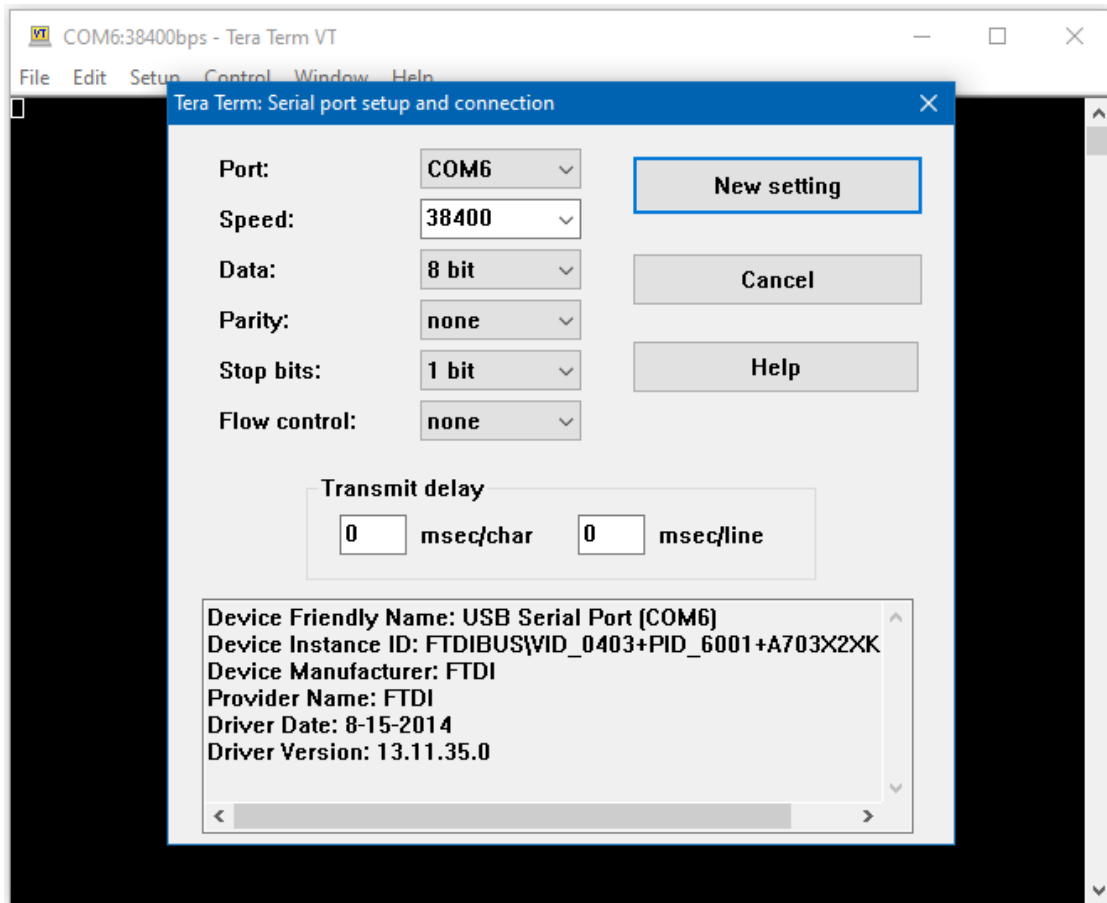

Once the serial port is open, type in the terminal and press the enter key, and you will see the corresponding output.

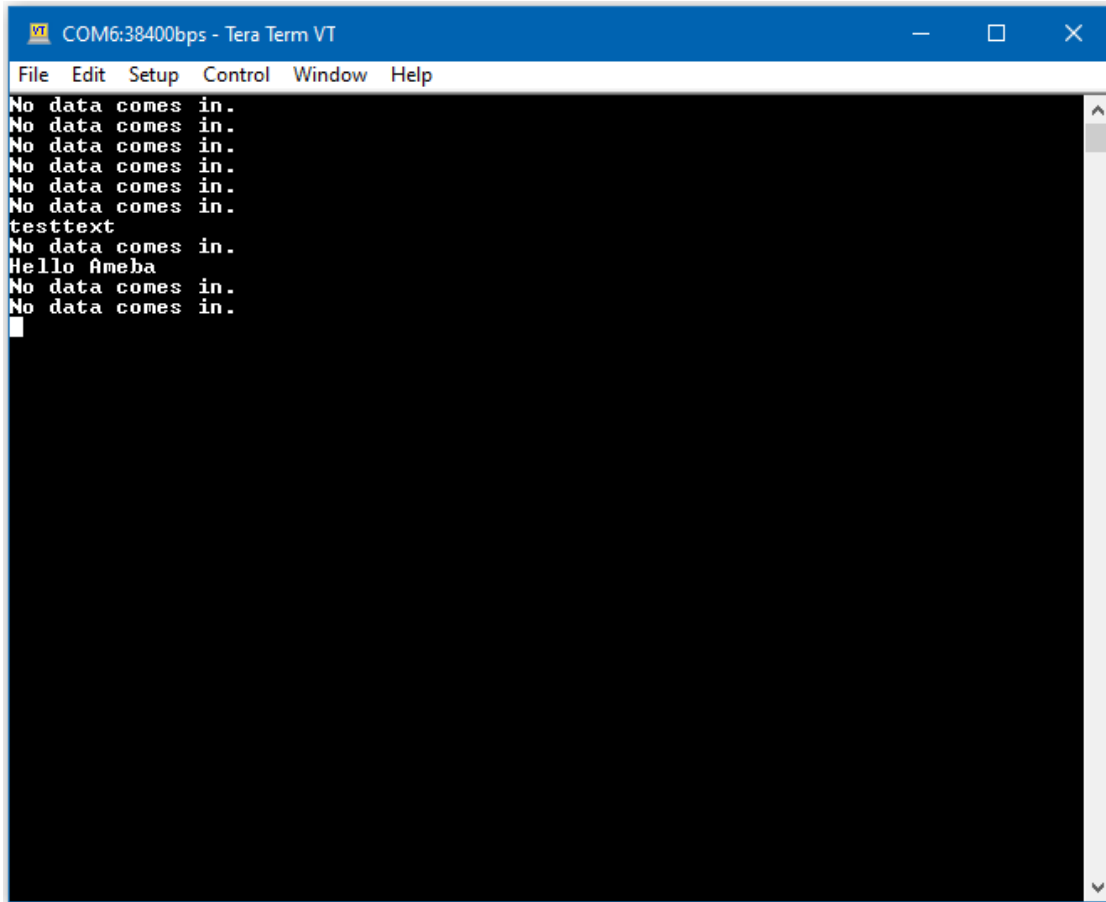A screenshot of a Tera Term VT window titled 'COM6:38400bps - Tera Term VT'. The window has a menu bar with 'File', 'Edit', 'Setup', 'Control', 'Window', and 'Help'. The main area is a black terminal with white text. The text shows a loop of 'No data comes in.' followed by 'testtext', then 'Hello Ameba', and another loop of 'No data comes in.'. A cursor is visible at the end of the last line.

```
COM6:38400bps - Tera Term VT
File Edit Setup Control Window Help
No data comes in.
No data comes in.
No data comes in.
No data comes in.
No data comes in.
No data comes in.
testtext
No data comes in.
Hello Ameba
No data comes in.
No data comes in.
█
```

Code Reference

`mySerial.setAvailableCallback(mySerialCallback)` ; is used to set the function `mySerialCallback` as a callback function for software serial. When a new character is received, the callback function checks if the character corresponds to the enter key, and releases the semaphore if it is true, which in turn allows the main loop to print out all the previously received characters.

PM2.5 Concentration in The Air

Preparation


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- PlanTower PMS3003 or PMS5003 x 1

Example


PMS3003 (or PMS5003) is a sensor of air quality, it can detect the concentration of those 0.3 to 10 micrometer particulate matters in the air. The sensor output its data via UART.

The PMS3003 (or PMS5003) sensor detects the concentration value of PM 1.0, PM 2.5, PM 10. Take PM 2.5 for example, it stands for the fine particles with a diameter of 2.5 micrometers or less.

Open the example in “File”-> “Examples”-> “AmebaSoftwareSerial”-> “PMS3003_AirQuality”

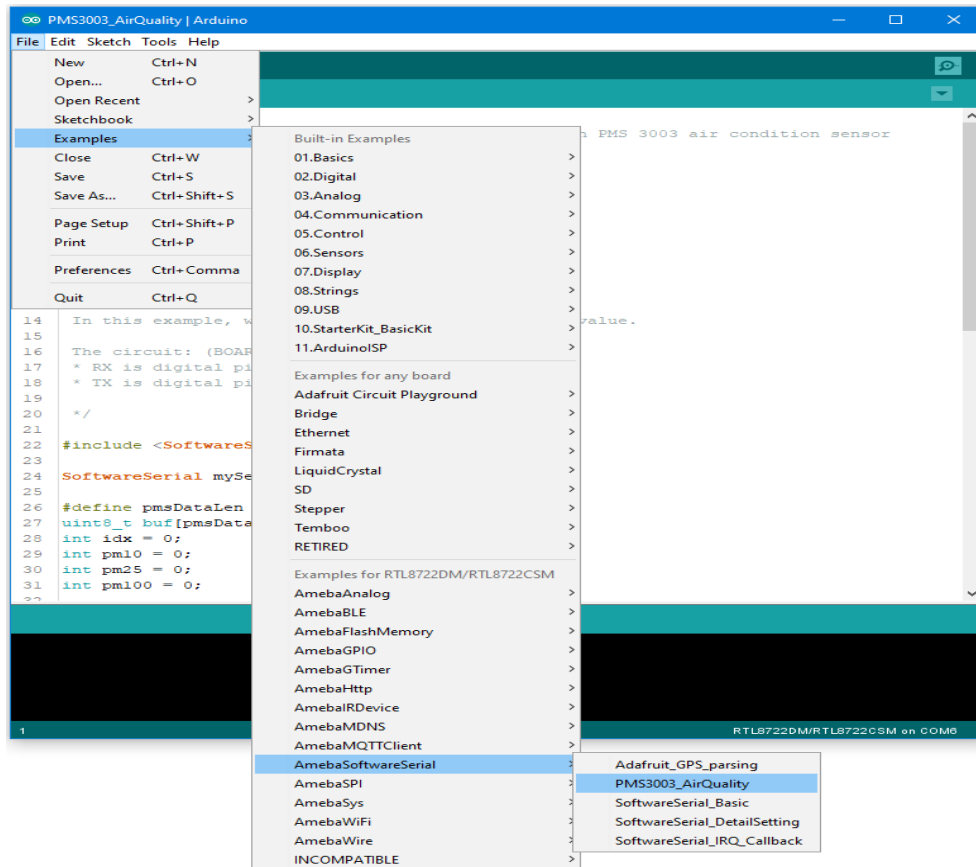

There are 8 pins in PMS3003:

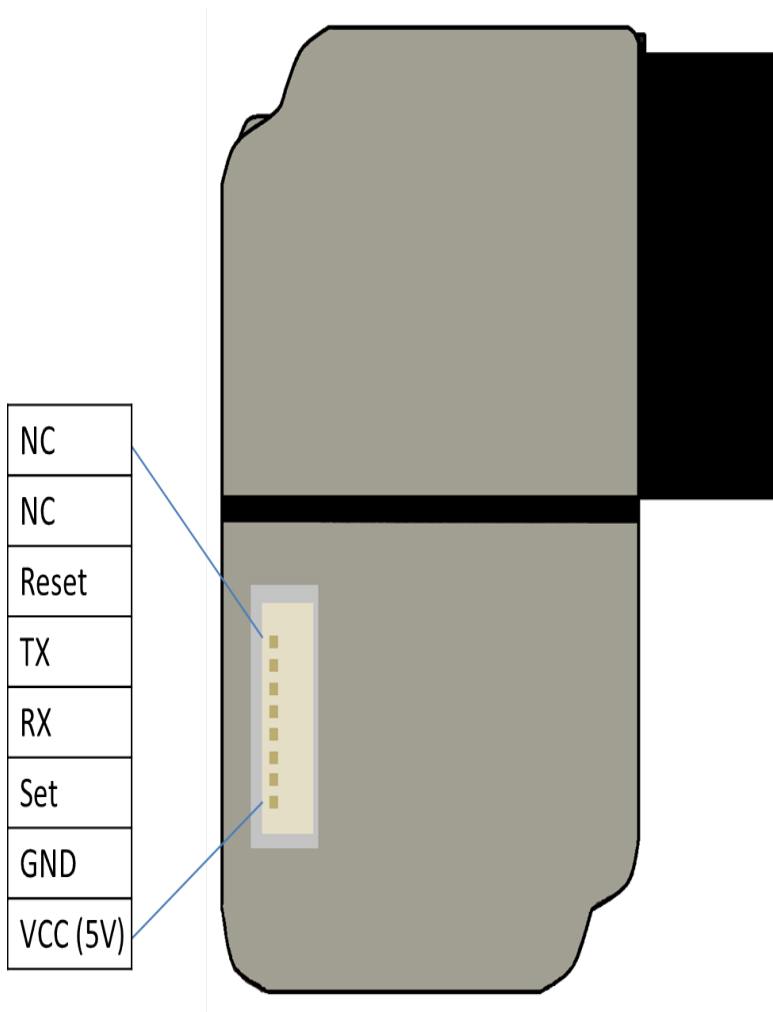


PMS3003 requires 5V power, but the working voltage of its IC is 3.3V. Therefore, the working voltage of Reset, TX, RX, Set are 3.3V as well. If the “Set” pin is pulled to high, the PMS3003 is put to operating mode. If the “Set” pin is pulled low, the PMS3003 is put to standby mode.


TX/RX pins are for UART connection. Under operating mode, PMS3003 outputs the data it reads continuously. Each data is of 32 bytes, please refer to the following article for detailed data format information:

https://www.dfrobot.com/wiki/index.php?title=PM2.5_laser_dust_sensor_SKU:SEN0177_RTL8722

RTL8722DM / RTL8722CSM Wiring Diagram:

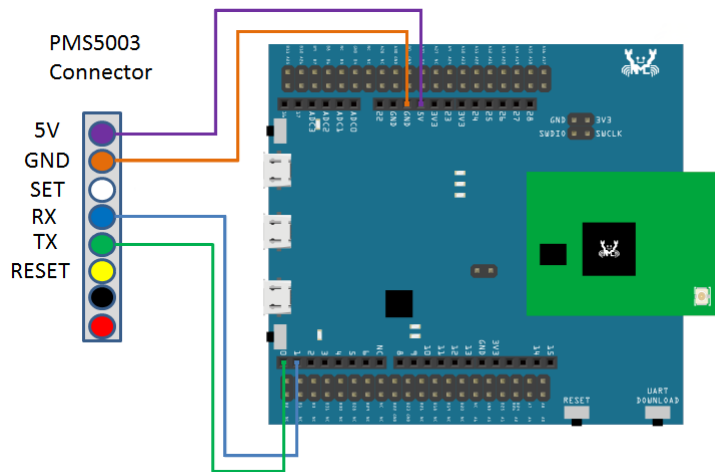


RTL8722DM MINI Wiring Diagram:

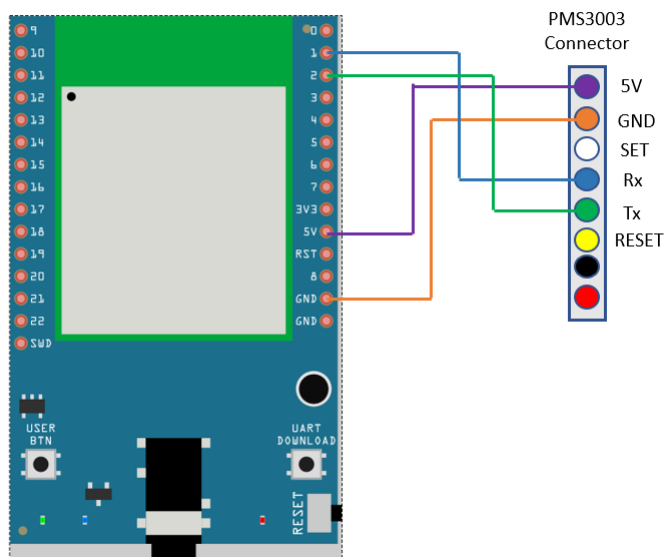

In this example, we do not use the “Set” and “Reset” pins.

Compile the code and upload it to Ameba. After pressing the Reset button, Ameba starts to output the PM 2.5 data to serial monitor.

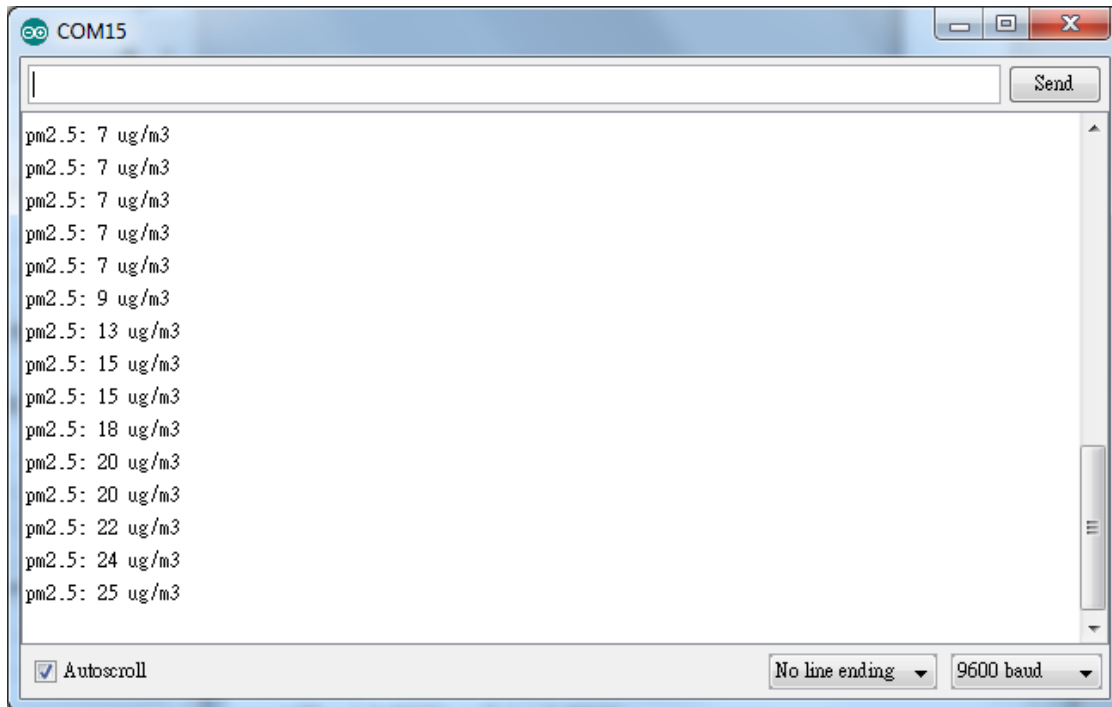

Flash Memory - Store data in FlashEEProm

Preparation


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1

Example

Ameba provides Flash Memory component for data storage and the data can be preserved when the power is off if necessary, e.g., compiled program. To avoid the memory space overlapped with the program on Ameba, the Flash API uses the tail part of the address space, with sector size 4K.


In this example, we store the value of boot times in flash memory. Every time Ameba reboots, it reads the boot times from flash, increases the value by 1, and writes it back to flash memory.

First open the example, “File” -> “Example” -> “AmebaFlashMemory” -> “FlashMemoryBasic”

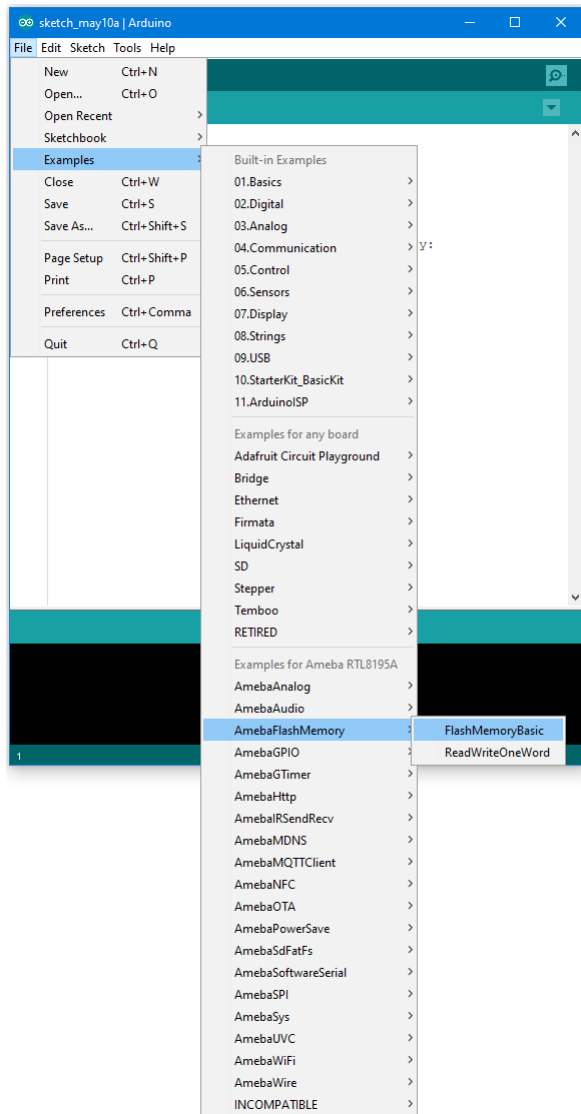

Compile and upload to Ameba, then press the reset button.

Open the Serial Monitor, press the reset button for a few times. Then you can see the boot times value increases.

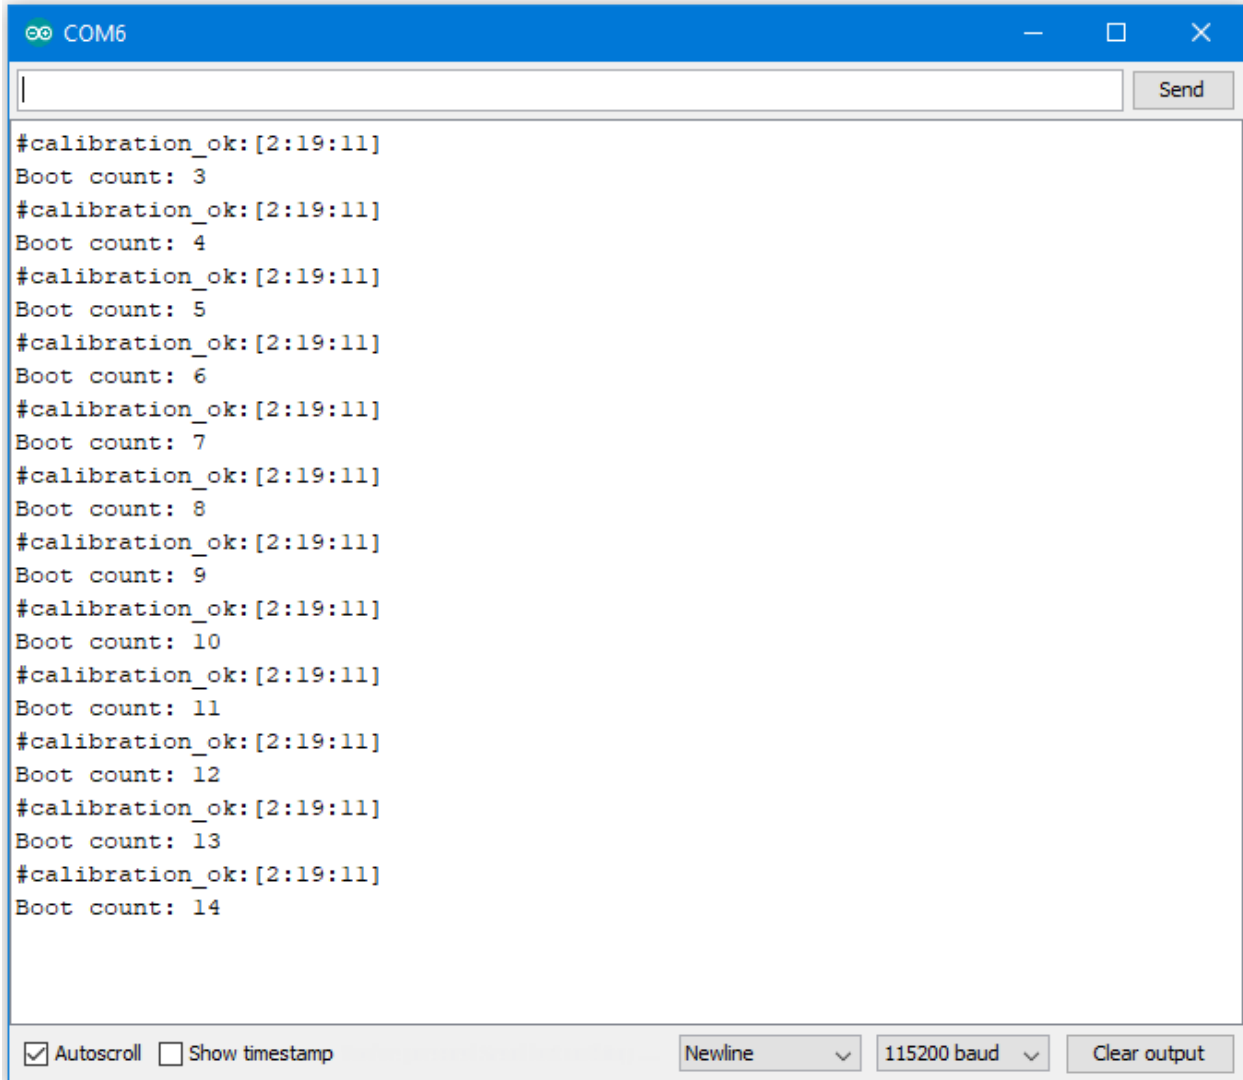

```
#calibration_ok:[2:19:11]
Boot count: 3
#calibration_ok:[2:19:11]
Boot count: 4
#calibration_ok:[2:19:11]
Boot count: 5
#calibration_ok:[2:19:11]
Boot count: 6
#calibration_ok:[2:19:11]
Boot count: 7
#calibration_ok:[2:19:11]
Boot count: 8
#calibration_ok:[2:19:11]
Boot count: 9
#calibration_ok:[2:19:11]
Boot count: 10
#calibration_ok:[2:19:11]
Boot count: 11
#calibration_ok:[2:19:11]
Boot count: 12
#calibration_ok:[2:19:11]
Boot count: 13
#calibration_ok:[2:19:11]
Boot count: 14
```

Code Reference

By default, the Flash Memory API uses address 0xFF000~0xFFFFF to store data.

There is limitation when writing to flash memory. That is, you can not directly write data to the same address you used in last write. To do that correctly, you need erase the sector first. The Flash API of Ameba uses a 4K SRAM to record the user modification and do the erase/write task together.

Use `FlashMemory.read()` to read from Flash memory.

Use `FlashMemory.buf[0] = 0x00;` to manipulate the 4K buf.

Use `FlashMemory.update()` ; to update the data in buf to Flash Memory.

Flash Memory - Use Flash Memory Larger Than 4K

Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1


Example

Flash Memory API uses memory of 4K bytes, which is normally sufficient for most application. However, larger memory can be provided by specifying a specific memory address and required size.

First, open the sample code in “File” -> “Examples” -> “AmebaFlashMemory” -> “ReadWriteOneWord”

In this example, we specify the starting address of flash memory is 0xFC000 and size is 0x4000 (The default starting address is 0xFF000 and size is 0x1000).

Then calculate correct address according to the specified offset and perform read/write operation. In the sample code we use offset 0x3F00, that is, $0xFC000 + 0x3F00 = 0xFFFF00$ in flash. We set the value to 0 at first, then increase by 1 every time Ameba reboots.

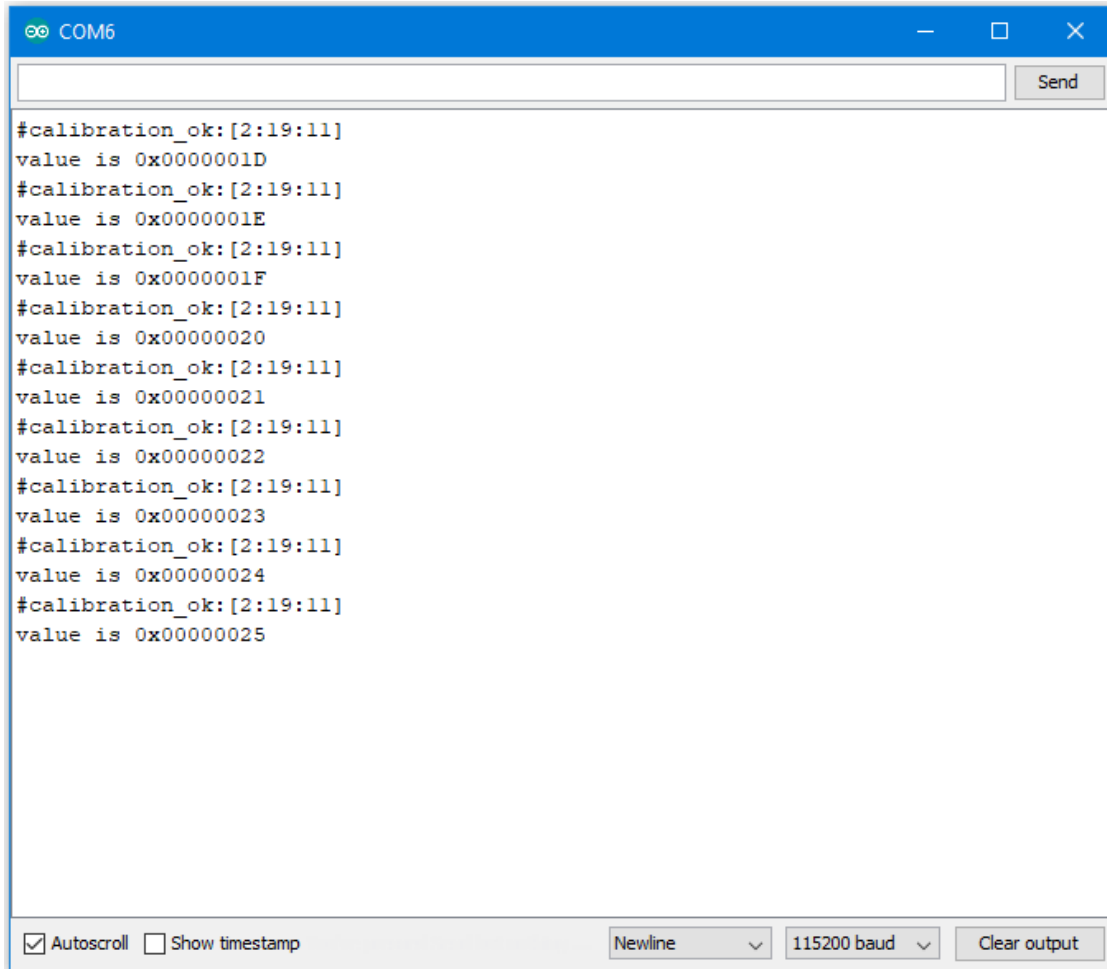

Code Reference

We can use the flash api we used in previous flash memory example, but we need to use `begin()` function to specify the desired starting address and memory size.

```
FlashMemory.begin(0xFC000, 0x4000);
```

Use `readWord()` to read the value stored in a memory address. In the example, we read the value stored in memory offset `0x3F00`, that is `0xFC000 + 0x3F00 = 0xFFFF00`. `readWord()` function reads a 32-bit value and returns it.

```
value = FlashMemory.readWord(0x3F00);
```

Use `writeWord()` to write to a memory address. The first argument is the memory offset, the second argument is the value to write to memory.

```
FlashMemory.writeWord(0x3F00, value);
```

SPI –Print Image And Text On LCD Screen

If you are not familiar with SPI, please read [Introduction to SPI](#) first.

Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- ILI9341 TFT LCD with SPI interface x 1

Example

We have tested the following two models of ILI9341 TFT LCD with SPI interface:

- Adafruit 2.8" TFT LCD (with touch screen)
 - <https://www.adafruit.com/products/1651>
 - <https://learn.adafruit.com/adafruit-2-8-tft-touch-shield-v2?view=all>
- QVGA 2.2" TFT LCD
 - http://www.lcdwiki.com/2.2inch_SPI_Module_ILI9341_SKU:MSP2202

Common pins in ILI9341 TFT LCD with SPI interface:

- MOSI: Standard SPI Pin
- MISO: Standard SPI Pin
- SLK: Standard SPI Pin
- CS: Standard SPI Pin
- RESET: Used to reboot LCD.
- D/C: Data/Command. When it is at Low, the signal transmitted are commands, otherwise the data transmitted are data.
- LED (or BL): Adapt the screen backlight. Can be controlled by PWM or connected to VCC for 100% backlight.
- VCC: Connected to 3V or 5V, depends on its spec.
- GND: Connected to GND.


RTL8722DM / RTL8722CSM and QVGA TFT LCD Wiring Diagram:




Please note that this shield model enables the backlight by default and pin 8 is not for backlight, and the VCC should be connected to 5V.


RTL8722DM / RTL8722CSM and Adafruit 2.8'' TFT LCD touch shield Wiring Diagram:

Please note that this shield model enables the backlight by default and pin 8 is not for backlight, and the VCC should be connected to 5V.

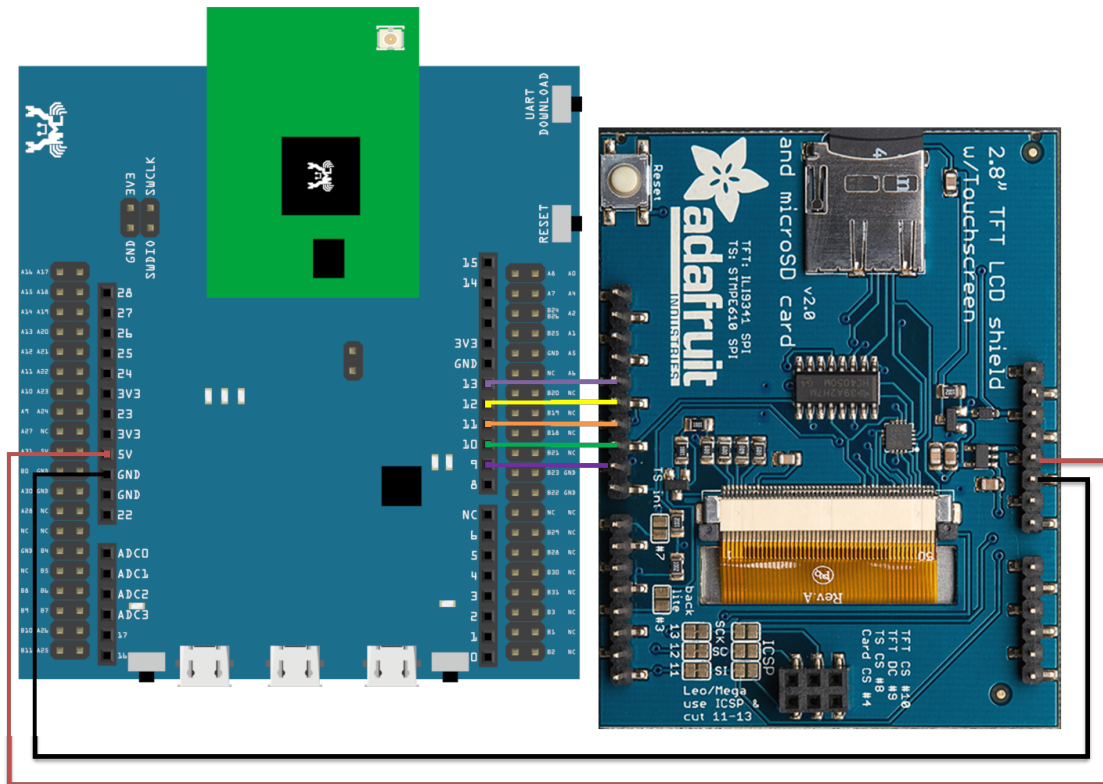**RTL8722DM MINI and Adafruit 2.8'' TFT LCD touch shield Wiring Diagram:**

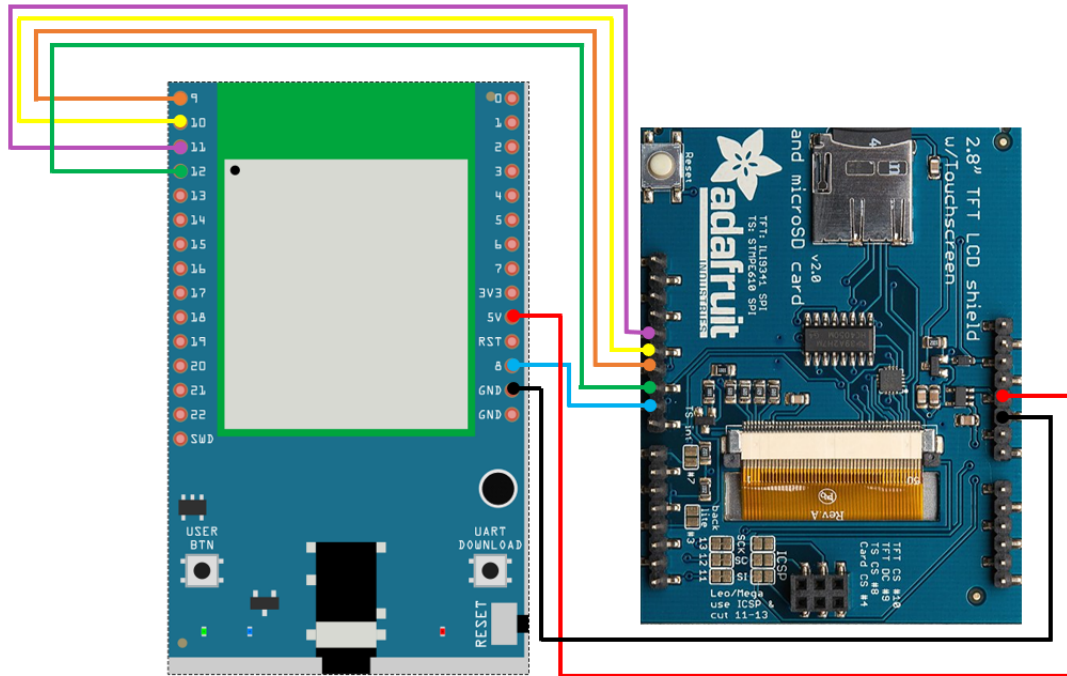


Open the example, “Files” -> “Examples” -> “AmebaSPI” -> “ILI9341_TFT_LCD_basic”

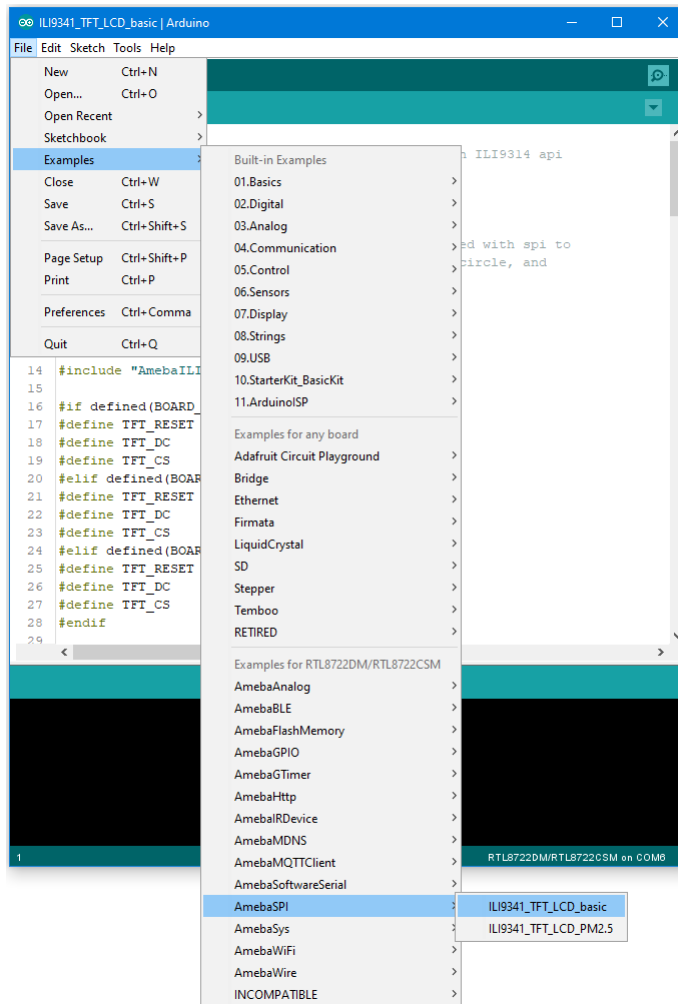

Compile and upload to Ameba, then press the reset button.

Then you can see some display tests appear on the LCD screen, such as displaying different colors, drawing vertical and horizontal lines, drawing circles, etc. ...

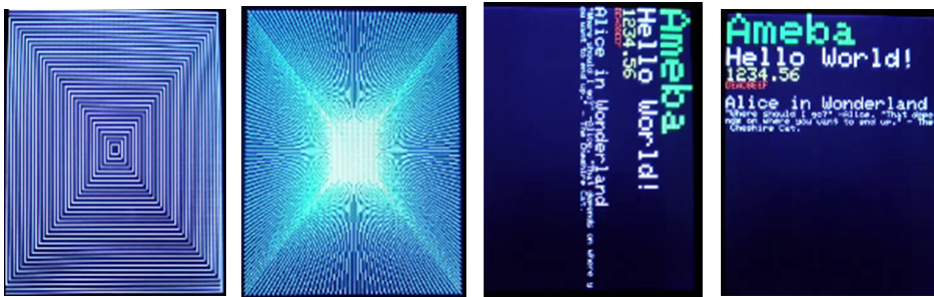

Code Reference

- **RGB 16-bit**

ILI9341 uses RGB 16-bit to display colors. Different from RGB 24-bit, it uses 5 bits for red, 6 bits for green, 5 bits for blue. For example, the RGB 24-bit representation of sky blue is 0x87CEFF, that is in binary:

- Red: 0x87 = B10000111
- Green: 0xCE = B11001110
- Blue: 0xFF = B11111111

and converted to RGB 16-bit:

- Red: B10000
- Green: B110011
- Blue: B11111


Then concatenate them, which forms B1000011001111111 = 0x867F

- **Drawing of ILI9341**

- First you must specify the range of the rectangle to draw, then pass the 2-byte RGB 16-bit color to ILI9341 corresponding to each pixel one by one, in this way ILI9341 fills each color to each pixel.
- You still must specify the drawing range even though the range covers only one pixel.
- From the rules we mentioned above, we can conclude that drawing vertical or horizontal lines are faster than diagonal lines.

- **Printing text on ILI9341**

- In our API, each character is 5×7 but each character is printed to size 6×8 (its right side and below are left blank), so as to separate from next character. For example, the character “A”

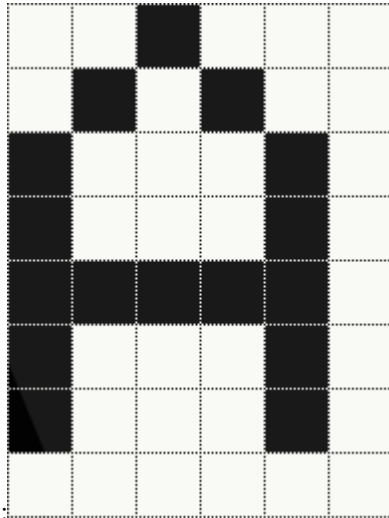

- The font size represents the dot size. For example, if the font size is 2, each dot in the character is a 2×2 rectangle

- **Screen rotation**
 - ILI9341 provides 0, 90, 180, 270 degrees screen rotation.
 - If the original width is 240 and original height is 320, when the screen rotates 90 degrees, the width becomes 320 and the height becomes 240.

SPI –Show PM2.5 Concentration On ILI9341 TFT LCD

If you are not familiar with SPI, please read [Introduction to SPI](#) first.

Preparation


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- ILI9341 TFT LCD with SPI interface x 1
- Plantower PMS3003 or PMS5003 x 1

Example


This example extends previous PM2.5 example to show the PM2.5 concentration on the LCD.

RTL8722DM / RTL8722CSM and QVGA TFT LCD Wiring Diagram:


(Note: PMS3003/PMS5003 sensor requires 5V voltage)

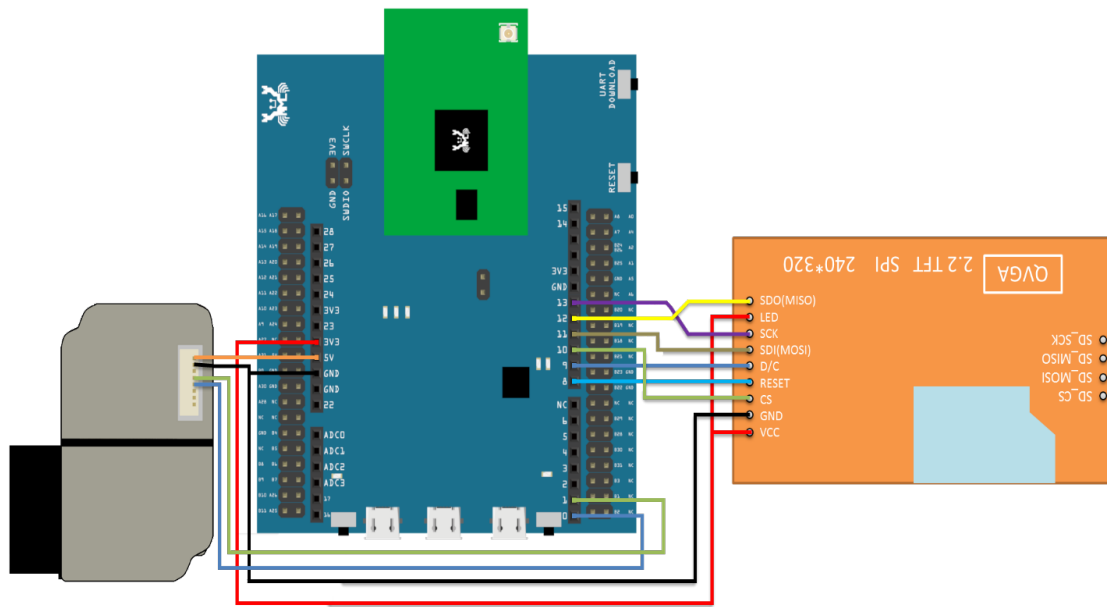


RTL8722DM MINI and QVGA TFT LCD Wiring Diagram:

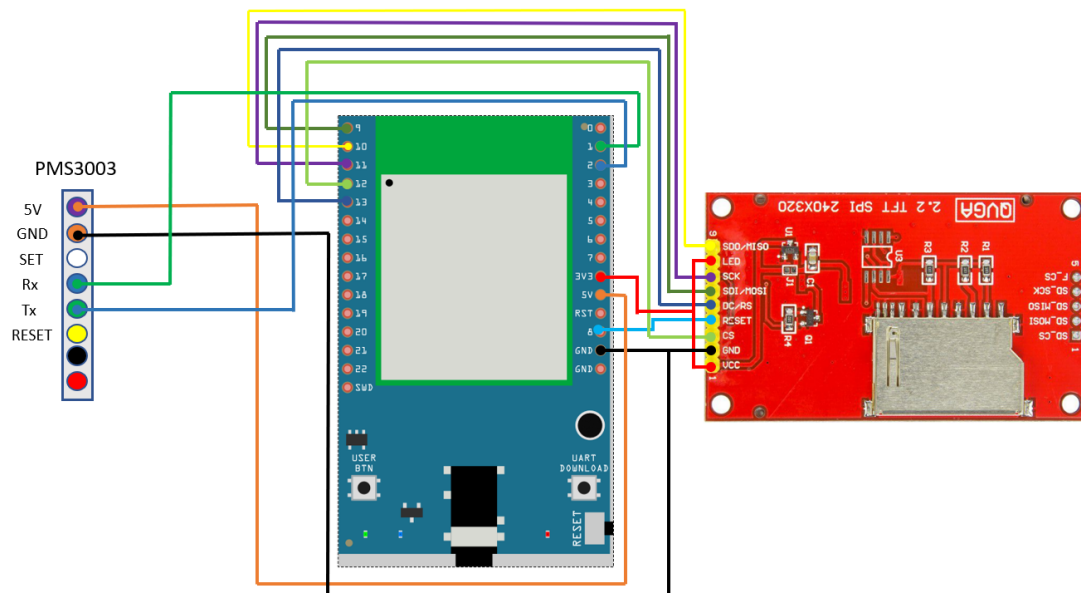


RTL8722DM / RTL8722CSM and Adafruit 2.8" TFT LCD Wiring Diagram:

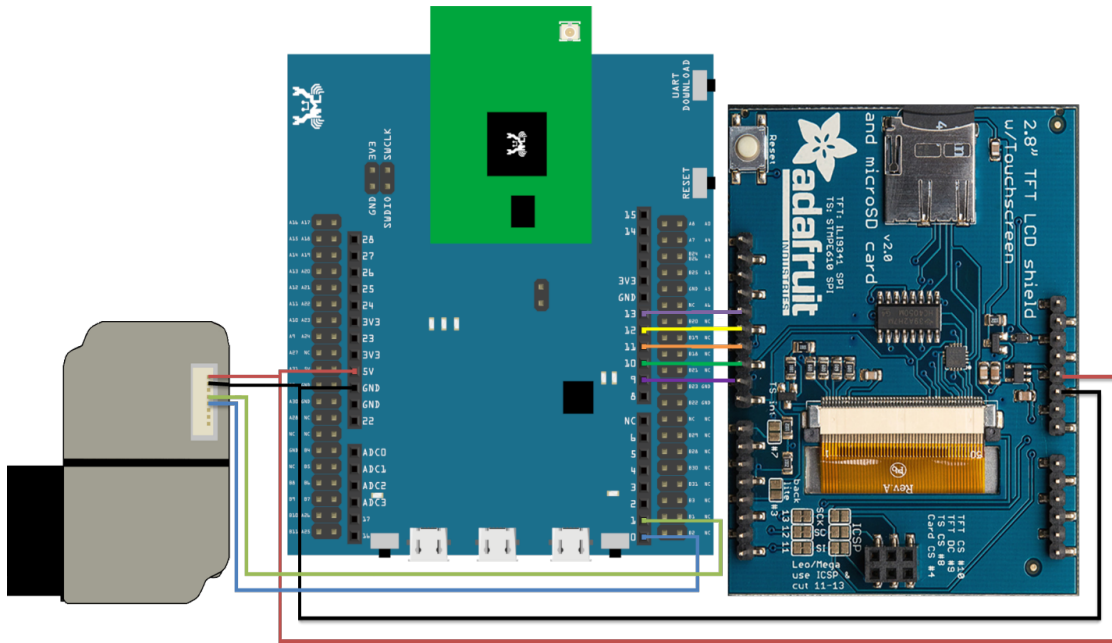

RTL8722DM MINI and and Adafruit 2.8" TFT LCD Wiring Diagram:

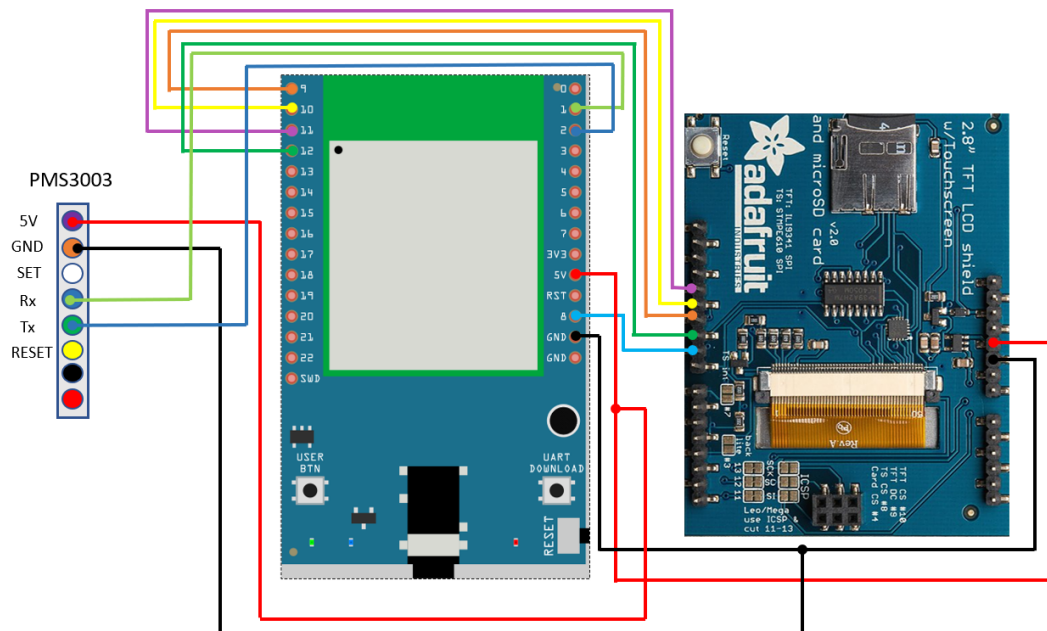


Open the example, "Files" -> "Examples" -> "AmebaSPI" -> "PM25_on_ILI9341_TFT_LCD"

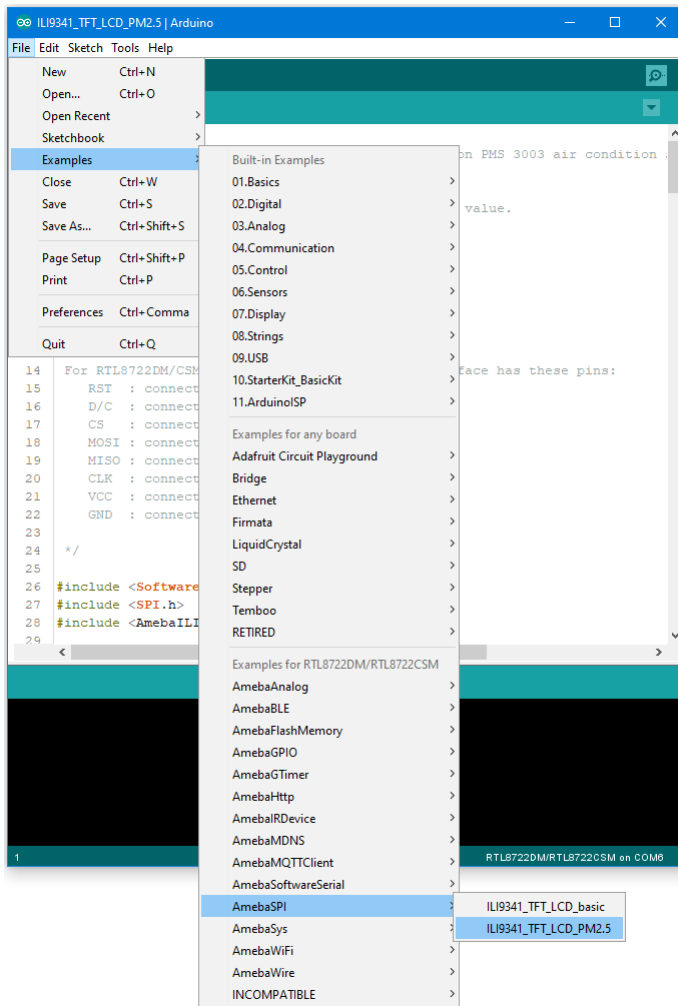

Compile and upload to Ameba, then press the reset button.

Then you can see the concentration value of PM1.0, PM2.5 and PM10 on the LCD.

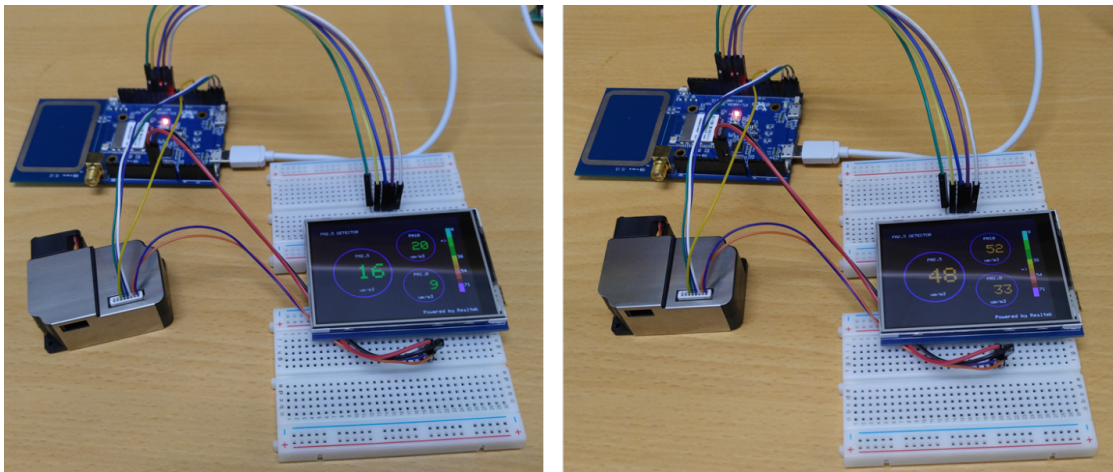

Code Reference

In this example, first rotate the screen by 90 degrees, and draw the static components such as the circles, the measuring scale, and the title text. After the concentration value is detected, it is printed inside the circle.

Timer - Using The Periodic GTimer

Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] / [RTL8720DN(BW16)] x 1

Example

Ameba provides 4 hardware GTimer for users to use. The timers' resolutions are at microseconds scale.

The timer can be set to be periodic or for single use. The periodic timers reset periodically, and the single-use timers do not.

Open the example, “File” -> “Examples” -> “AmebaGTimer” -> “TimerPeriodical” .
Compile and upload to Ameba, and press reset.

In the Serial Monitor, you can see the counter value is increased periodically.

Code Reference

The first argument of begin() is the timer id (0~3).

The second argument is the value of the timer (in microseconds). In the example, we fill in 1000000us = 1s.

The third argument specifies the function to call when the time is up. In the example, we call the “myhandler” function to increase the counter value by 1 and print the counter value to serial monitor.

```
GTimer.begin(0, 1 * 1000 * 1000, myhandler);
```

The GTimer is periodic by default, therefore “myhandler” function is called every second. When we want to stop the GTimer, use stop():

```
GTimer.stop(0);
```

Timer - Using The Single-Use GTimer

Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] / [RTL8720DN(BW16)] x 1

Example

In this example, we will use 4 One-Time GTimer, and pass user data to each timer.

Open the example “File” -> “Examples” -> “AmebaGTimer” -> “TimerOneshot” . Compile and upload to Ameba, and press reset. Then you can see the 4 timer log printed to the serial monitor in series.

Code Reference

The first argument of begin() is the Timer ID (0~3). The second argument is the value of the timer (in microseconds). In the example, we fill in 1000000us = 1s. The third argument specifies the function to call when the time is up. The fourth argument is to set whether this timer is a periodic timer, we use “false” here to begin a single-use timer. The fifth argument is the user data, we give 0 here to represent that this is timer 0.

```
GTimer.begin(0, 1 * 1000 * 1000, myhandler, false, 0);
```

Next, we set up the second timer, which has timer value 2 seconds, and user data 1. And other timers are set similarly.

```
GTimer.begin(1, 2 * 1000 * 1000, myhandler, false, 1);
```

In myhandler function, we print the user data to serial monitor. Since the 4 timers are separately set to count for 1, 2, 3, 4 seconds, from 1 second to 4 second, the user data of each timer are printed on the serial monitor in order. After 4 second, no log will be printed.

Power Save Deep Sleep Mode

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1


Example

Introduction

Ameba-D supports two low power modes which are deepsleep mode and sleep mode. Deepsleep mode turns off more power domain than sleep mode. The power consumptions of DeepSleep Mode is around 7uA to 8uA compare to normal state around 22mA. This example describes how to enter deepsleep mode and configure wakeup source.

Procedure

Open “File” -> “Examples” -> “AmebaPowerSave” -> “DeepSleepMode”

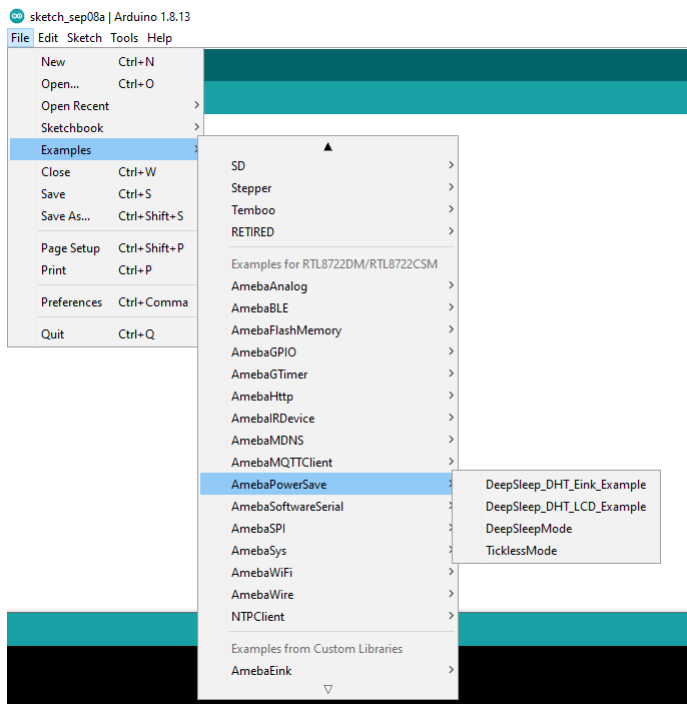

Set condition values as picture below.

DS_WAKEUP_SOURCE is used to set the wake-up source, user can chose 3 wake up sources now,


```
AON timer (SET_DS_AON_TIMER_WAKEUP);
AON pins (SET_DS_AON_WAKEPIN_WAKEUP);
RTC timer (SET_DS_RTC_WAKEUP);
```

AON timer can be set from 0 to 32760000 range (unit ms) by AON_TIMER_SLEEP_DURATION

There are 4 pins can be set as AON pins and active high for wake-up, D16, D17, D26 and D27. The AON pin can be set by SET_DS_AON_WAKEPIN_WAKEUPPIN

RTC timer wake-up system by set alarm. The alarm has 4 values, day, hour, min and sec. All 4 values can be set by

DS_RTC_ALARM_DAY, DS_RTC_ALARM_HOUR, DS_RTC_ALARM_MIN, and DS_RTC_ALARM_SEC

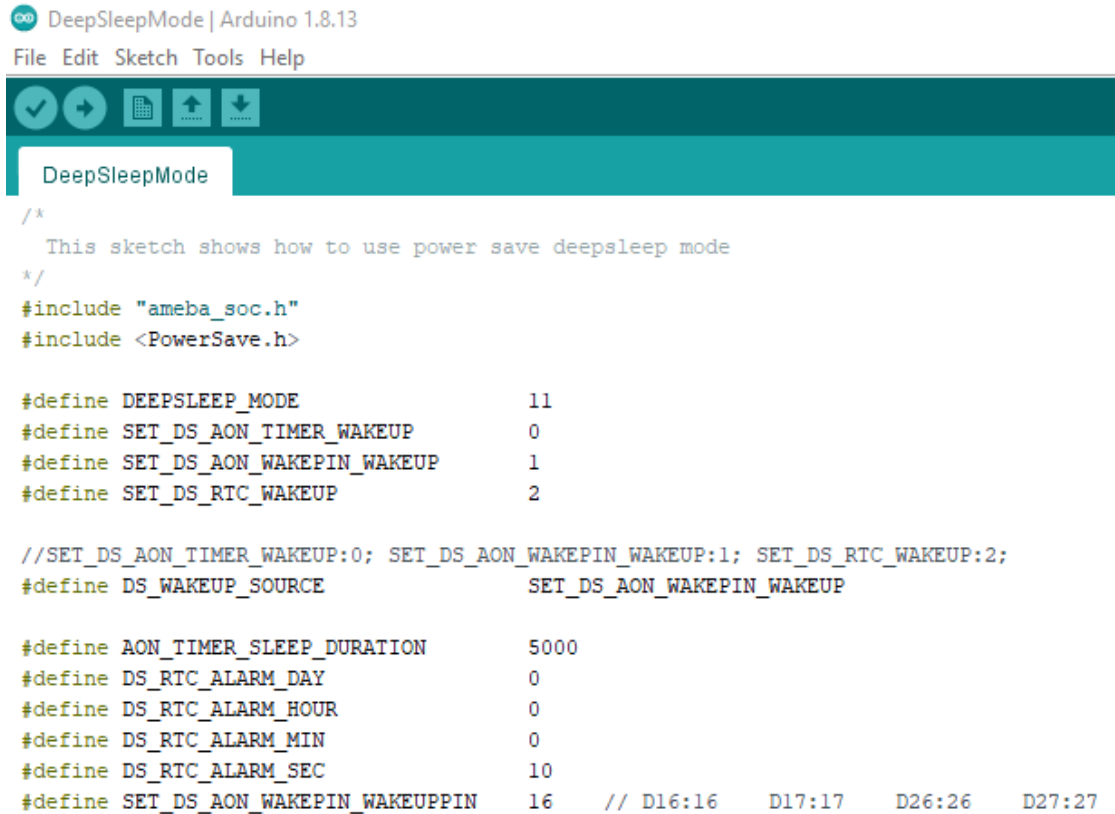

```

/*
   DeepSleepMode | Arduino 1.8.13
   File Edit Sketch Tools Help

   This sketch shows how to use power save deepsleep mode
*/
#include "ameba_soc.h"
#include <PowerSave.h>


#define DEEPSLEEP_MODE          11
#define SET_DS_AON_TIMER_WAKEUP 0
#define SET_DS_AON_WAKEPIN_WAKEUP 1
#define SET_DS_RTC_WAKEUP       2

//SET_DS_AON_TIMER_WAKEUP:0; SET_DS_AON_WAKEPIN_WAKEUP:1; SET_DS_RTC_WAKEUP:2;
#define DS_WAKEUP_SOURCE        SET_DS_AON_WAKEPIN_WAKEUP

#define AON_TIMER_SLEEP_DURATION 5000
#define DS_RTC_ALARM_DAY        0
#define DS_RTC_ALARM_HOUR       0
#define DS_RTC_ALARM_MIN        0
#define DS_RTC_ALARM_SEC        10
#define SET_DS_AON_WAKEPIN_WAKEUPPIN 16 // D16:16 D17:17 D26:26 D27:27

```


When finished the condition values setting, system will run and switch between normal and deepsleep mode controlled by wakeup source. Serial Monitor displays the switching log.

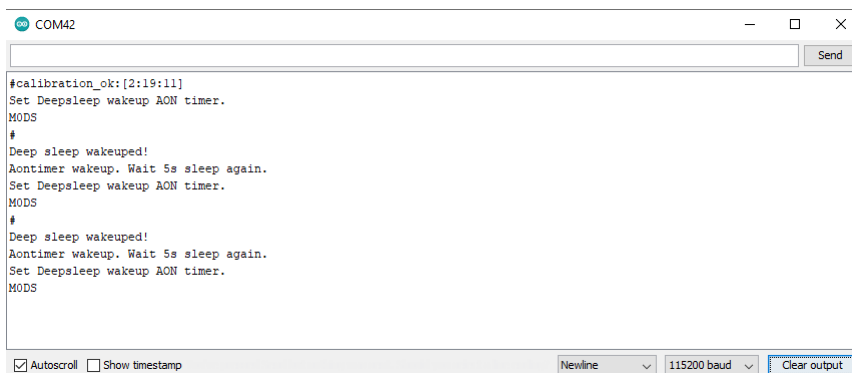

```

COM42
#calibration_ok:[2:19:11]
Set Deepsleep wakeup AON timer.
MODS
#
Deep sleep wakeupt!
Aontimer wakeup. Wait 5s sleep again.
Set Deepsleep wakeup AON timer.
MODS
#
Deep sleep wakeupt!
Aontimer wakeup. Wait 5s sleep again.
Set Deepsleep wakeup AON timer.
MODS

```

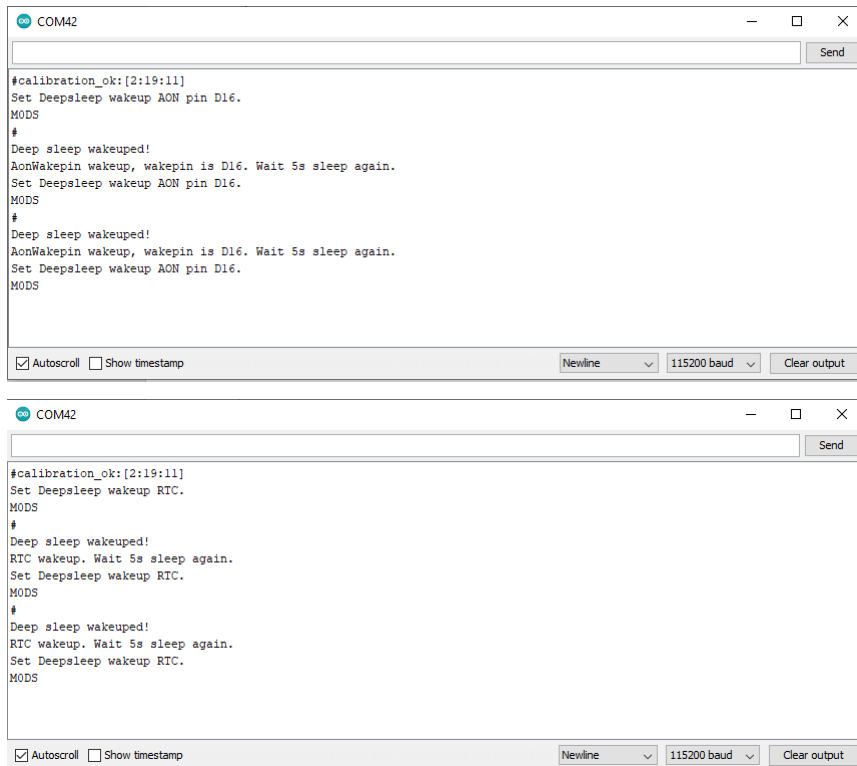

```
#calibration_ok:[2:19:11]
Set Deepsleep wakeup AON pin D16.
MODS
#
Deep sleep wakeupe!
AonWakepin wakeup, wakepin is D16. Wait 5s sleep again.
Set Deepsleep wakeup AON pin D16.
MODS
#
Deep sleep wakeupe!
AonWakepin wakeup, wakepin is D16. Wait 5s sleep again.
Set Deepsleep wakeup AON pin D16.
MODS

#calibration_ok:[2:19:11]
Set Deepsleep wakeup RTC.
MODS
#
Deep sleep wakeupe!
RTC wakeup. Wait 5s sleep again.
Set Deepsleep wakeup RTC.
MODS
#
Deep sleep wakeupe!
RTC wakeup. Wait 5s sleep again.
Set Deepsleep wakeup RTC.
MODS
```

Code Reference

Please refer to the [API Documents](#) PowerSave section for detail description of all API.

Power Save Deep Sleep DHT Eink

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- DHT11 or DHT22 or DHT21 x 1
- LCD I2C screen x 1

Example

Introduction

Ameba-D supports low power modes which are deepsleep mode. Deepsleep mode turns off most of the system power domain. The power consumptions of core module in DeepSleep Mode is around 7uA to 8uA compare to normal state around 22mA. This example gives demo of system switch between “working” and “sleep” (power save).Using DHT


sensor to read data and display on Eink screen when system is awake. After 5 seconds system auto enter DeepSleep Mode for power save. System will wake up by wakeup source.(Aon timer, Aon Pins or RTC timer).

Procedure

Download the Eink zip library, AmebaEink.zip, at

https://github.com/ambiot/ambd_arduino/tree/master/Arduino_zip_libraries. Then install the AmebaEink.zip.

Open “File” -> “Examples” -> “AmebaPowerSave” -> “DeepSleep_DHT_Eink_Example”

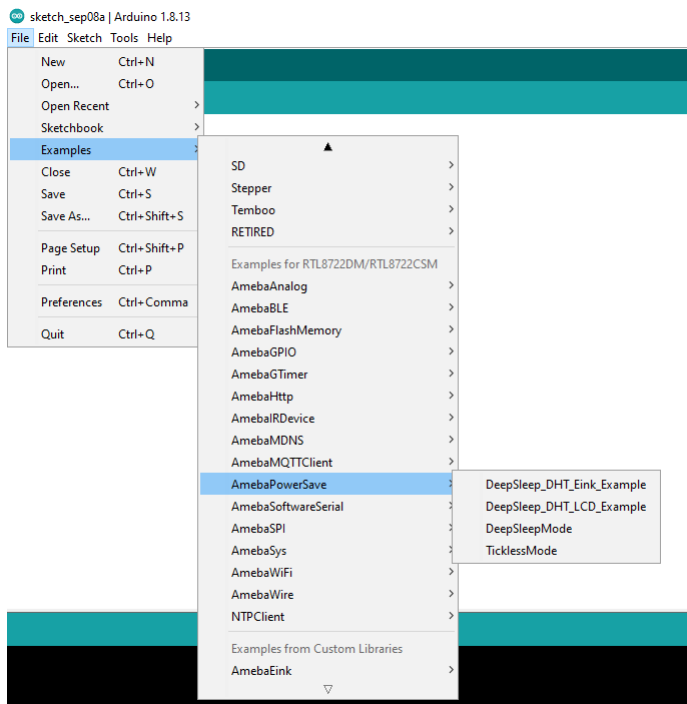

Set condition values as picture below.

DS_WAKEUP_SOURCE is used to set the wake-up source, user can chose 3 wake up sources now,

```
AON timer (SET_DS_AON_TIMER_WAKEUP);
AON pins (SET_DS_AON_WAKEPIN_WAKEUP);
RTC timer (SET_DS_RTC_WAKEUP);
```


AON timer can be set from 0 to 32760000 range (unit ms) by AON_TIMER_SLEEP_DURATION

There are 4 pins can be set as AON pins and active high for wake-up, D16, D17, D26 and D27. The AON pin can be set by SET_DS_AON_WAKEPIN_WAKEUPPIN

RTC timer wake-up system by set alarm. The alarm has 4 values, day, hour, min and sec. All 4 values can be set by DS_RTC_ALARM_DAY, DS_RTC_ALARM_HOUR, DS_RTC_ALARM_MIN, and DS_RTC_ALARM_SEC

DHTPIN is used to set DHT sensor data pin. User can choose any GPIO pins.

DHTTYPE is used to set DHT sensor type. (DHT11, DHT22 and DHT33)

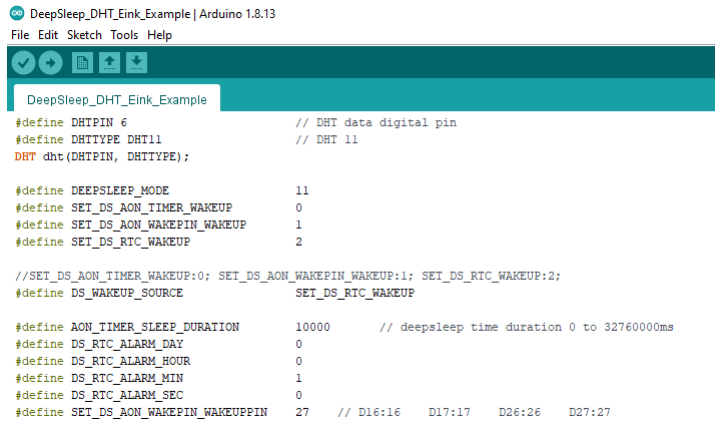

```
DeepSleep_DHT_Eink_Example | Arduino 1.8.13
File Edit Sketch Tools Help

DeepSleep_DHT_Eink_Example

#define DHTPIN 6           // DHT data digital pin
#define DHTTYPE DHT11      // DHT 11
DHT dht(DHTPIN, DHTTYPE);

#define DEEPSLEEP_MODE     11
#define SET_DS_AON_TIMER_WAKEUP 0
#define SET_DS_AON_WAKEPIN_WAKEUP 1
#define SET_DS_RTC_WAKEUP 2

//SET_DS_AON_TIMER_WAKEUP:0; SET_DS_AON_WAKEPIN_WAKEUP:1; SET_DS_RTC_WAKEUP:2;
#define DS_WAKEUP_SOURCE    SET_DS_RTC_WAKEUP

#define AON_TIMER_SLEEP_DURATION 10000 // deepsleep time duration 0 to 32760000ms
#define DS_RTC_ALARM_DAY 0
#define DS_RTC_ALARM_HOUR 0
#define DS_RTC_ALARM_MIN 1
#define DS_RTC_ALARM_SEC 0
#define SET_DS_AON_WAKEPIN_WAKEUPPIN 27 // D16:16 D17:17 D26:26 D27:27
```

When finished the condition values setting, system will run and switch between normal working mode and deepsleep mode controlled by wakeup source. Eink screen will display the temperature and humidity data measured from DHT sensor when system is awake.

Code Reference

Please refer to the [API Documents](#) PowerSave section for detail description of all API.

Power Save Deep Sleep DHT LCD

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1
- DHT11 or DHT22 or DHT21 x 1
- LCD I2C screen x 1


Example

Introduction

Ameba-D supports low power modes which are deepsleep mode. Deepsleep mode turns off most of the system power domain. The power consumptions of core module in DeepSleep Mode is around 7uA to 8uA compare to normal state around 22mA. This example gives demo of system switch between “working” and “sleep” (power save).Using DHT sensor to read data and display on LCD screen when system is awake. After 5 seconds system auto enter DeepSleep Mode for power save. System will wake up by wakeup source.(Aon timer, Aon Pins or RTC timer).

Procedure

Open “File” -> “Examples” -> “AmebaPowerSave” -> “DeepSleep_DHT_LCD_Example”

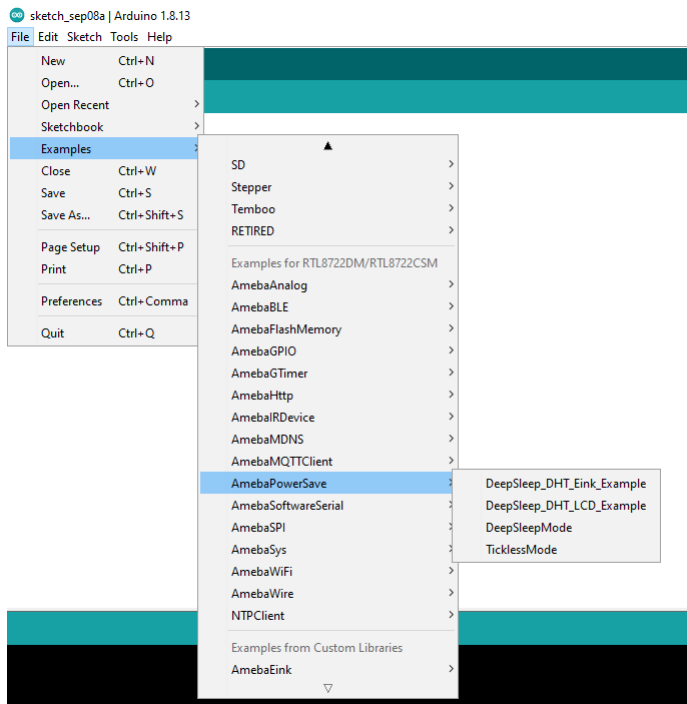

Set condition values as picture below.

DS_WAKEUP_SOURCE is used to set the wake-up source, user can chose 3 wake up sources now,

```
AON timer (SET_DS_AON_TIMER_WAKEUP);
AON pins (SET_DS_AON_WAKEPIN_WAKEUP);
RTC timer (SET_DS_RTC_WAKEUP);
```


AON timer can be set from 0 to 32760000 range (unit ms) by AON_TIMER_SLEEP_DURATION

There are 4 pins can be set as AON pins and active high for wake-up, D16, D17, D26 and D27. The AON pin can be set by SET_DS_AON_WAKEPIN_WAKEUPPIN

RTC timer wake-up system by set alarm. The alarm has 4 values, day, hour, min and sec. All 4 values can be set by DS_RTC_ALARM_DAY, DS_RTC_ALARM_HOUR, DS_RTC_ALARM_MIN, and DS_RTC_ALARM_SEC

DHTPIN is used to set DHT sensor data pin. User can choose any GPIO pins.

DHTTYPE is used to set DHT sensor type. (DHT11, DHT22 and DHT33)

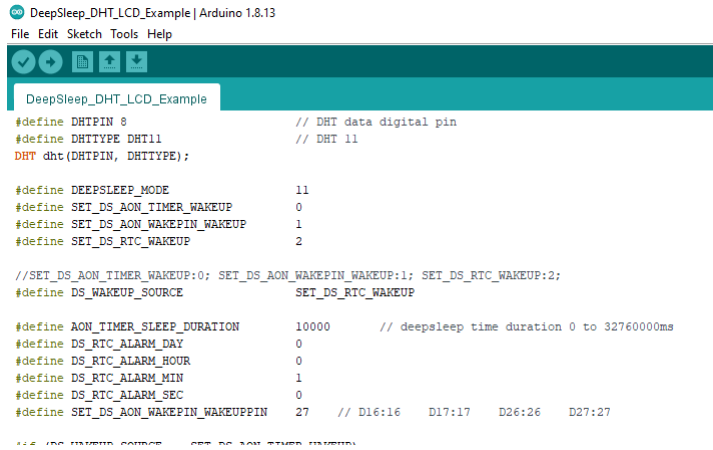

```

DeepSleep_DHT_LCD_Example | Arduino 1.8.13
File Edit Sketch Tools Help

#define DHTPIN 8 // DHT data digital pin
#define DHTTYPE DHT11 // DHT 11
DHT dht(DHTPIN, DHTTYPE);

#define DEEPSLEEP_MODE 11
#define SET_DS_AON_TIMER_WAKEUP 0
#define SET_DS_AON_WAKEPIN_WAKEUP 1
#define SET_DS_RTC_WAKEUP 2

//SET_DS_AON_TIMER_WAKEUP:0; SET_DS_AON_WAKEPIN_WAKEUP:1; SET_DS_RTC_WAKEUP:2;
#define DS_WAKEUP_SOURCE SET_DS_RTC_WAKEUP

#define AON_TIMER_SLEEP_DURATION 10000 // deepsleep time duration 0 to 32760000ms
#define DS_RTC_ALARM_DAY 0
#define DS_RTC_ALARM_HOUR 0
#define DS_RTC_ALARM_MIN 1
#define DS_RTC_ALARM_SEC 0
#define SET_DS_AON_WAKEPIN_WAKEUPPIN 27 // D16:16 D17:17 D26:26 D27:27

```

When finished the condition values setting, system will run and switch between normal working mode and deepsleep mode controlled by wakeup source. LCD screen will display the temperature and humidity data measured from DHT sensor when system is awake.

Code Reference

Please refer to the [API Documents](#) PowerSave section for detail description of all API.

Power Save Tickless Mode

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1


Example

Introduction

Ameba-D supports two low power modes which are deepsleep mode and sleep mode. The power consumptions of Tickless Sleep Mode is around 28uA to 30uA compare to normal state around 15mA. This example describes how to use freertos tickless with uart interruptable interface.

Procedure

Open “File” -> “Examples” -> “AmebaPowerSave” -> “TicklessMode”

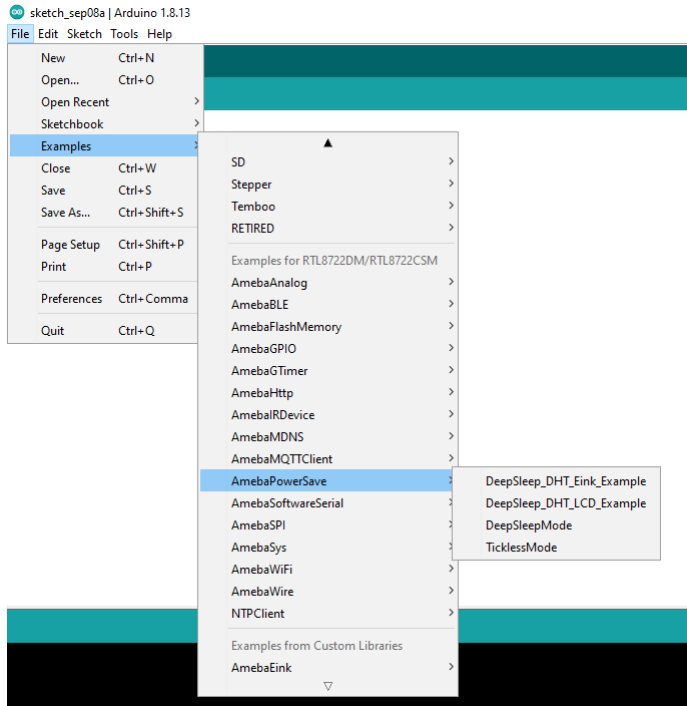

Set condition values as picture below.

DS_WAKEUP_SOURCE is used to set the wake-up source, user can chose 3 wake up sources now,

```
AON timer (SET_DS_AON_TIMER_WAKEUP);
AON pins (SET_DS_AON_WAKEPIN_WAKEUP);
RTC timer (SET_DS_RTC_WAKEUP);
```

AON timer can be set from 0 to 32760000 range (unit ms) by AON_TIMER_SLEEP_DURATION

There are 4 pins can be set as AON pins and active high for wake-up, D16, D17, D26 and D27. The AON pin can be set by SET_DS_AON_WAKEPIN_WAKEUPPIN

RTC timer wake-up system by set alarm. The alarm has 4 values, day, hour, min and sec. All 4 values can be set by DS_RTC_ALARM_DAY, DS_RTC_ALARM_HOUR, DS_RTC_ALARM_MIN, and DS_RTC_ALARM_SEC

There are 4 pins can be set as AON pins and active high for wake-up, D16, D17, D26 and D27. The AON pin can be set by SET_TL_AON_WAKEPIN_WAKEUP

TL_SYSACTIVE_TIME is for setting time duration of the system to keep alive. (unit ms)

TicklessMode | Arduino 1.8.13

File Edit Sketch Tools Help

```

TicklessMode

/*
 * This sketch shows how to use power save tickless mode
 */
#include "ameba_soc.h"
#include <PowerSave.h>

#define TICKLESS_MODE                22
#define SET_TL_UART_WAKEUP           0
#define SET_TL_RTC_WAKEUP             1
#define SET_TL_AON_WAKEPIN_WAKEUP    16 // D16:16    D17:17    D26:26    D27:27

//SET_TL_UART_WAKEUP:0; SET_TL_RTC_WAKEUP:1; SET_TL_AON_WAKEPIN_WAKEUP:16 or 17 or 26 or 27;
#define TL_WAKEUP_SOURCE              SET_TL_UART_WAKEUP

#define TL_SYSACTIVE_TIME             5000
#define TL_RTC_ALARM_DAY              0
#define TL_RTC_ALARM_HOUR             0
#define TL_RTC_ALARM_MIN              0
#define TL_RTC_ALARM_SEC              10

```

```

COM42
#calibration_ok:[2:19:11]
Set Tickless wakeup LOGUART.

System suspend. Tickless mode enabled.

Tickless mode resume. Wait 5s enter tickless again.
Set Tickless wakeup LOGUART.

System suspend. Tickless mode enabled.

Tickless mode resume. Wait 5s enter tickless again.
Set Tickless wakeup LOGUART.

System suspend. Tickless mode enabled.

Autoscroll Show timestamp Newline 115200 baud Clear output

```

```

COM42
#calibration_ok:[2:19:11]
Set Tickless wakeup RTC.

System suspend. Tickless mode enabled.

Tickless mode resume. Wait 5s enter tickless again.
Set Tickless wakeup RTC.


System suspend. Tickless mode enabled.

Tickless mode resume. Wait 5s enter tickless again.
Set Tickless wakeup RTC.

System suspend. Tickless mode enabled.

Autoscroll Show timestamp Newline 115200 baud Clear output

```

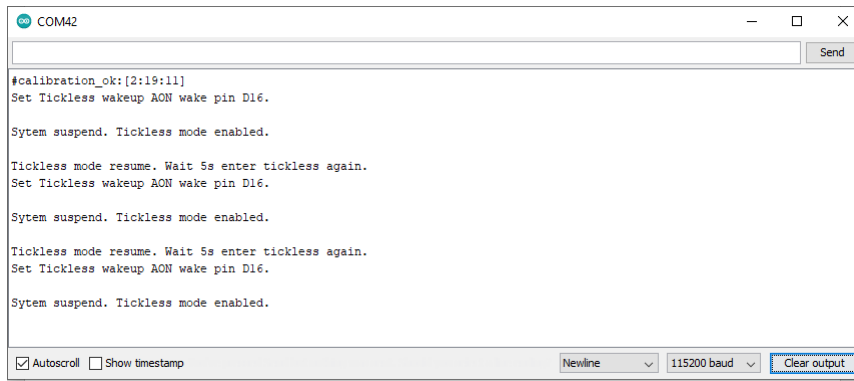

```
#calibration_ok:[2:19:11]
Set Tickless wakeup AON wake pin D16.

Sytem suspend. Tickless mode enabled.

Tickless mode resume. Wait 5s enter tickless again.
Set Tickless wakeup AON wake pin D16.

Sytem suspend. Tickless mode enabled.

Tickless mode resume. Wait 5s enter tickless again.
Set Tickless wakeup AON wake pin D16.

Sytem suspend. Tickless mode enabled.
```

Code Reference

Please refer to the [API Documents](#) PowerSave section for detail description of all API.


Use NTPClient Library To Obtain Local Time

Preparation

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1

Example

In this example, we use an NTP client to sync with NTP servers using UDP and keep track of time locally. Open the example. “File” -> “Examples” -> “NTPClient” -> “Advanced”

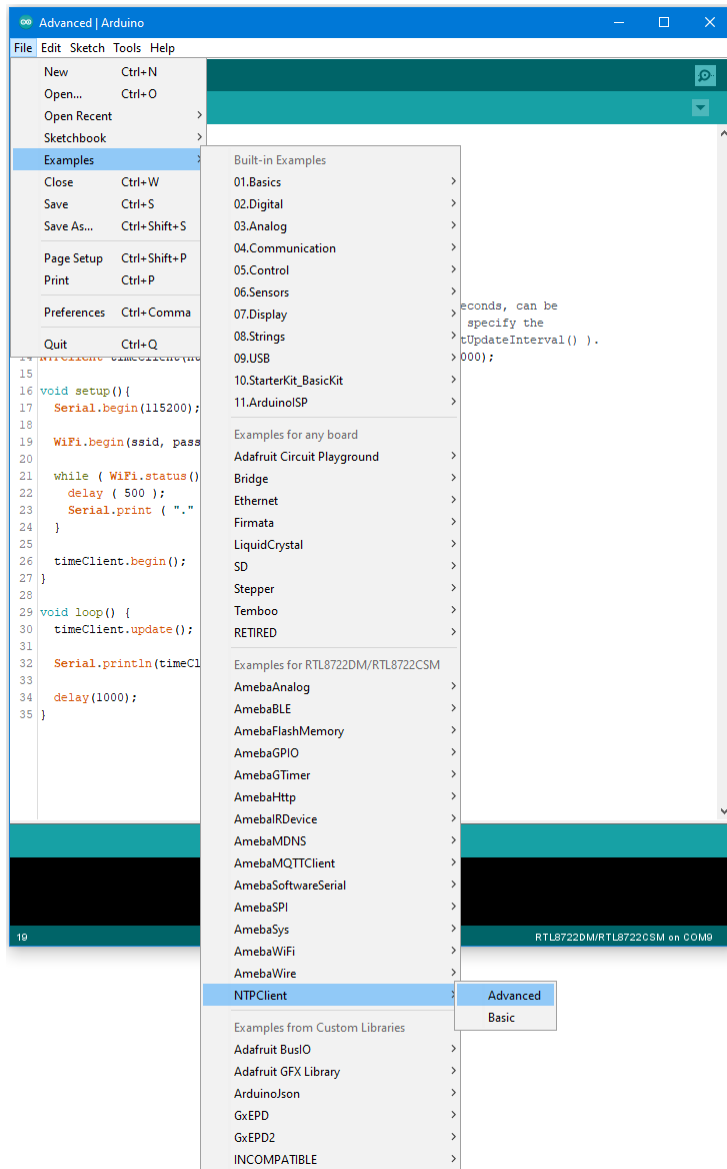


Modify the highlighted code section (ssid, password) to connect to your WiFi network.



```
1 #include <NTPClient.h>
2 #include <WiFi.h>
3 #include <WiFiUdp.h>
4
5 char ssid[] = "<SSID>";
6 char pass[] = "<PASS>";
7
8
9 WiFiUDP ntpUDP;
10
11 // You can specify the time server pool and the offset (in seconds, can be
12 // changed later with setTimeOffset() ). Additionally you can specify the
13 // update interval (in milliseconds, can be changed using setUpdateInterval() ).
14 NTPClient timeClient(ntpUDP, "europe.pool.ntp.org", 3600, 60000);
15
16 void setup() {
17   Serial.begin(115200);
18
19   WiFi.begin(ssid, pass);
20
21   while ( WiFi.status() != WL_CONNECTED ) {
22     delay ( 500 );
23     Serial.print ( "." );
24   }
25
26   timeClient.begin();
27 }
28
29 void loop() {
30   timeClient.update();
31
32   Serial.println(timeClient.getFormattedTime());
33
34   delay(1000);
35 }
```

19 RTL8722DM/RTL8722CSM on COM9

Compile the code and upload it to Ameba. After pressing the Reset button, Ameba connects to WiFi, gets the UTC time from the NTP server, and prints out the current time with time zone offset to the serial monitor.

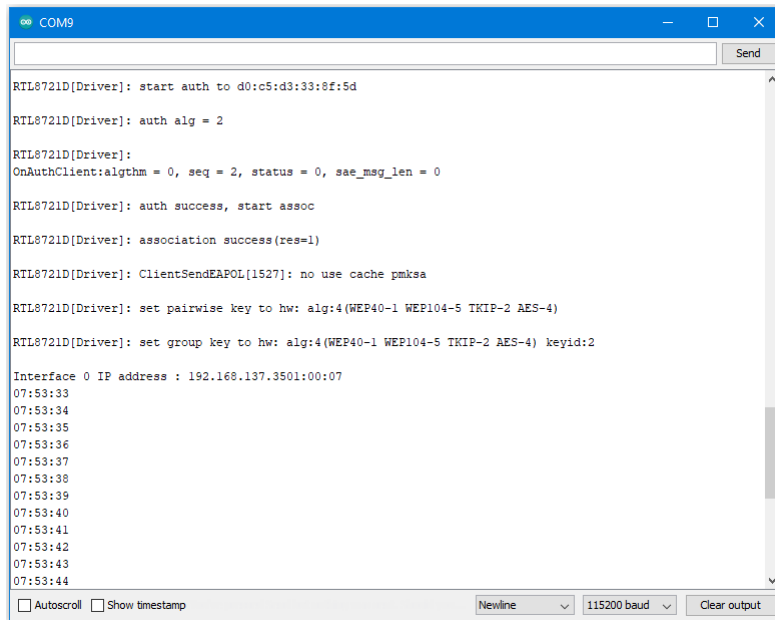

Code Reference

Configure NTP client:

The NTPClient needs to use a UDP client for communications. A WiFiUDP client is declared and passed to the NTPClient constructor, along with an NTP server address, time zone offset in seconds, and update interval in milliseconds. If detailed configuration is not needed, just passing in the UDP client is also sufficient, refer to the “NTPClient” -> “Basic” example.

```
WiFiUDP ntpUDP;
NTPClient timeClient(ntpUDP, "europe.pool.ntp.org", 3600, 60000);
```

Start NTP client:

After connecting to WiFi, the NTPClient is started using the `begin()` function, which causes the client to sync with the NTP server and get the UTC time.

```
WiFiUDP ntpUDP;
timeClient.begin();
```

Get local time:

`getFormattedTime()` is used to format the received UTC time into the local time zone. `update()` is called every loop so that the NTPClient will sync with the NTP server once every update interval.

```
timeClient.update();  
timeClient.getFormattedTime();
```

Transmit IR NEC Raw Data And Decode

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 2
- Grove –Infrared Emitter x1 (Figure 1)
- Grove –Infrared Receiver x1 (Figure 2)

Example

In this example, we use two Ameba RTL8722 modules that connecting with an infrared (IR) Emitter and an IR Receiver separately to transmit and receive IR NEC Raw data.



Figure 1: Grove –Infrared Receiver

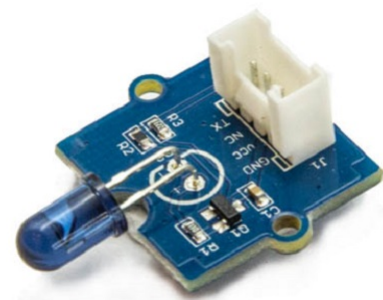


Figure 2: Grove –Infrared Emitter

On the transmission side, the transmitter will send IR NEC raw data. The raw data can be seen as consecutive durations of “marks” and “spaces” (Figure 3) in microseconds (us).

- Mark: a specific period of sending pulses
- Space: a specific period of sending nothing

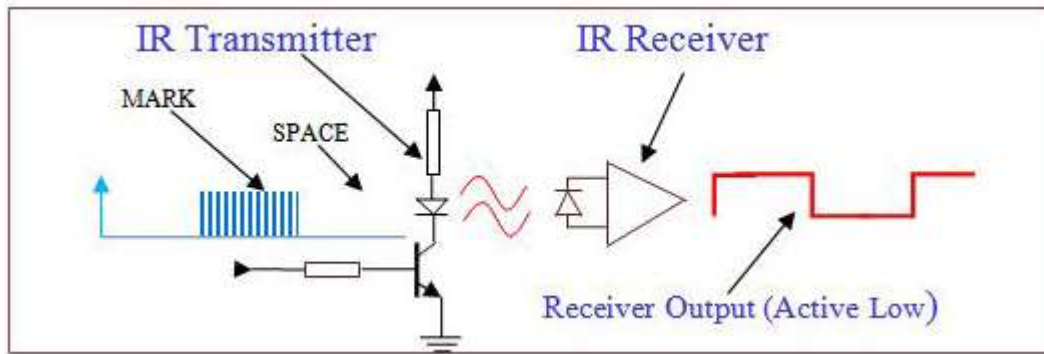


Figure 3: A typical IR transmission and reception setup implementation

For more details, please refer to SB-Projects' topic of [IR Remote Control Theory](#) to learn the theory of IR remote controls operation and a collection of IR protocol descriptions. In this example, we are going to use NEC (Now Renesas, also known as Japanese Format) as the transmission protocol.

NEC Features

- 8-bit address and 8-bit command length.
- Extended mode available, doubling the address size.
- Address and command are transmitted twice for reliability.
- Pulse distance modulation.
- The carrier frequency of 38kHz.
- Bit time of 1.125ms or 2.25ms.

Modulation

NEC protocol uses Pulse Distance Encoding of the bits for data communication (Figure 4). A logical “1” is represented by total duration of 2250us, with 560us of “marks” and (2250-560) us of “spaces” . While logical ” 0” is represented by total duration of 1120us, with 560us “marks” and (1120-560) us of “spaces” .

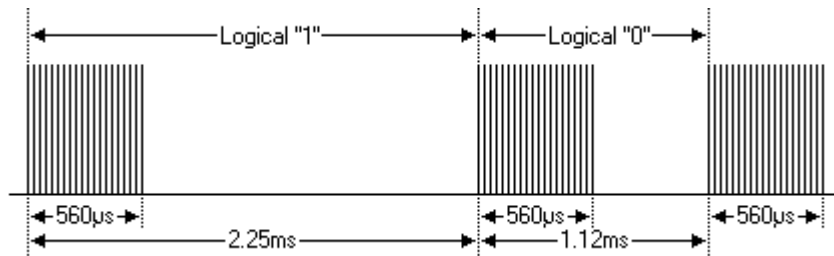


Figure 4: Modulation of NEC

Since a total number of 32-bit data together with the header and the end-bit will be transferred (Figure 5). If we separate the data in the time-frame (in us), there will be $(2 + 32) \times 2 + 1 = 69$ “marks” / “spaces” to be transmitted (Figure 6), which forms the raw NEC data we would like to transmit in our Arduino “*.ino” file. This part of the code can be modified by users. Details of how to obtain raw data code for your remote devices, you may refer to [Ken Shirriff's blog](#), where it provides multiple libraries provided online.

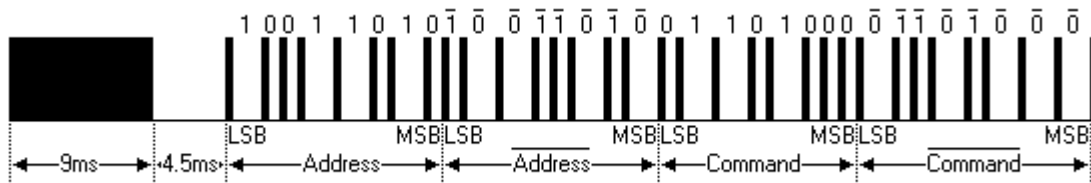


Figure 5: Sample of a Full NEC Data (in logic1 or 0)

```

9000, 4500, // starting bit
560, 560, 560, 560, 560, 1690, 560, 560, 560, 560, 560, 560, 560, 560, 560, // address
560, 1690, 560, 1690, 560, 560, 560, 1690, 560, 1690, 560, 1690, 560, 1690, 560, 1690, // ~address
560, 560, 560, 560, 560, 560, 560, 1690, 560, 560, 560, 560, 560, 560, 560, // data
560, 1690, 560, 1690, 560, 1690, 560, 560, 560, 1690, 560, 1690, 560, 1690, 560, 1690, //~data
560 // stoping bit

```

Figure 6: Sample of a Full NEC RAW Data (in us)

Figure 7 and 8 shows the pin configuration of IR Emitter and Receiver with Ameba RTL8722 board.

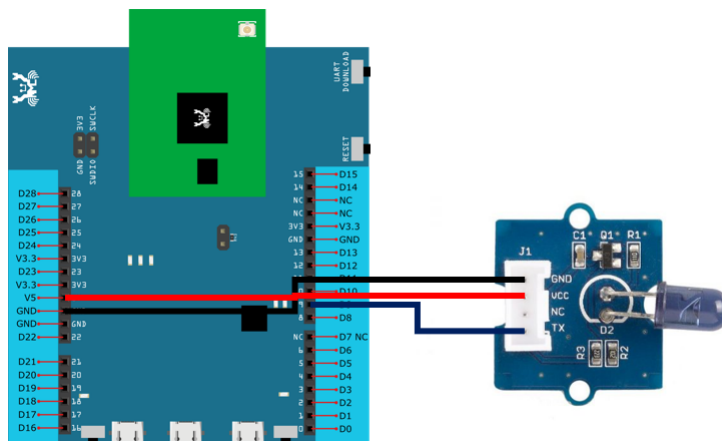


Figure 7: Pin configuration of IR Emitter and Ameba RTL8722

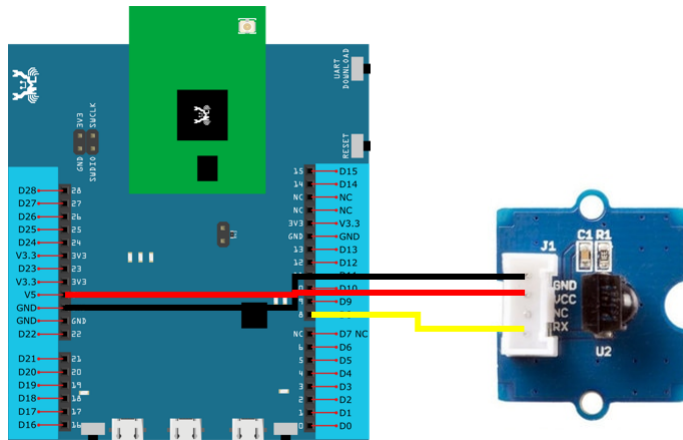


Figure 8: Pin configuration of the IR Receiver and Ameba RTL8722

Figure 9 and Figure 10 shows the pin configuration of IR Emitter and Receiver with Ameba RTL8722DM MINI.

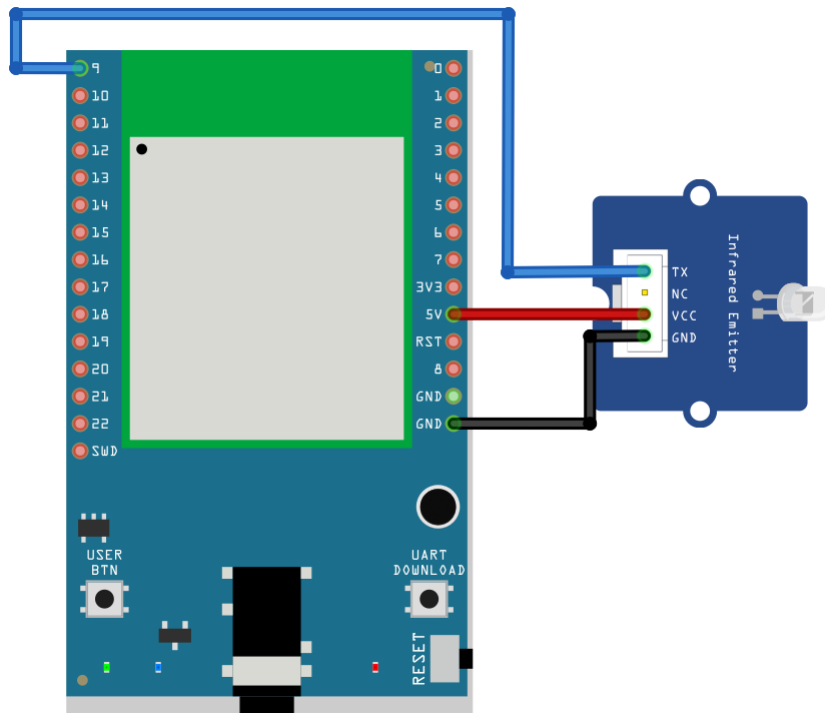


Figure 9: Pin configuration of IR Emitter and Ameba RTL8722DM MINI

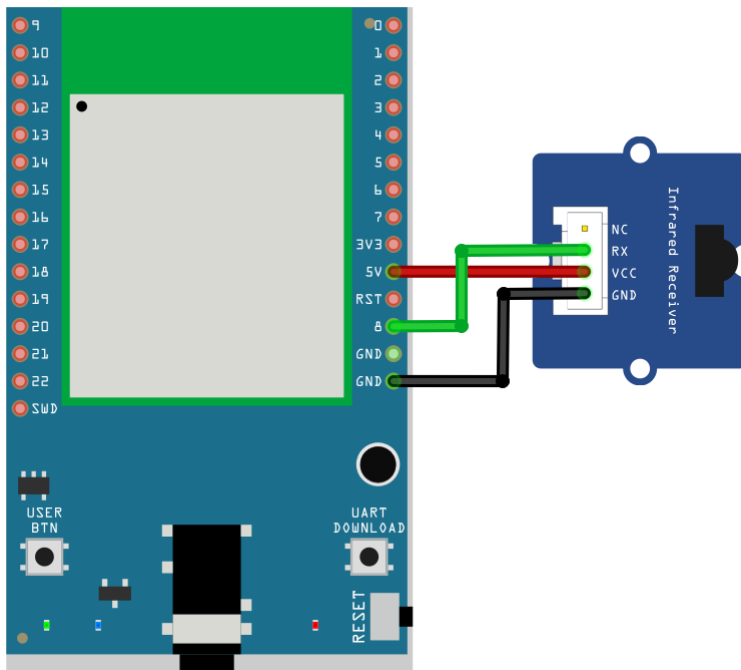


Figure 10: Pin configuration of the IR receiver and Ameba RTL8722DM MINI

After the connection is being set up correctly, we will move to the coding part for this example. First, make sure the correct Ameba development board is selected in Arduino IDE: “Tools” -> “Board” .

Open the “IRSendRAW” example in “File” -> “Examples” -> “AmebaIRDevice” -> “IRSendRAW” (Figure 11) and upload to 1st board connected with IR Emitter:

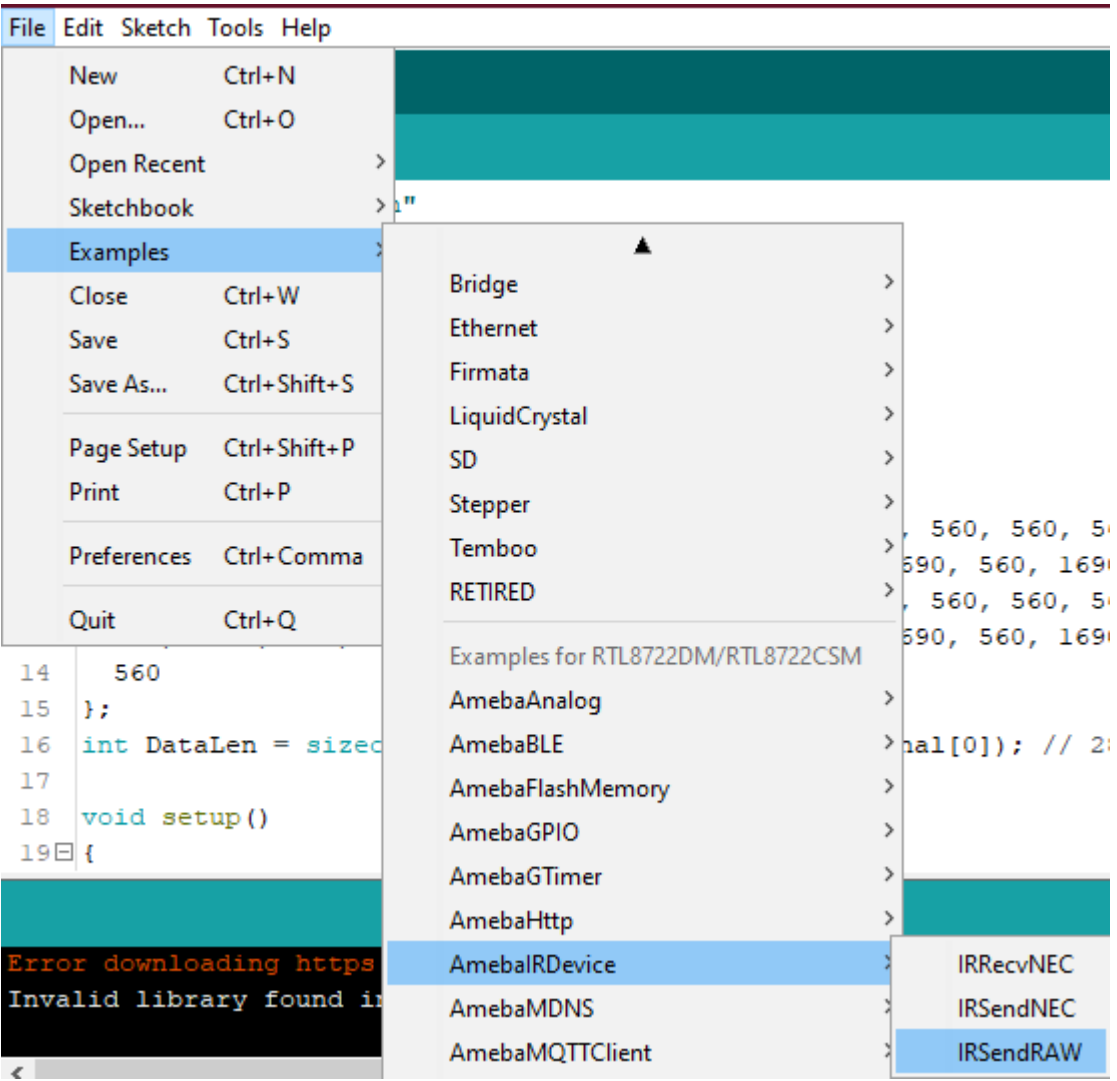


Figure 11: Example Location of IRSendRaw and IRRecvNEC

After successfully upload the sample code for IRSendRaw, you might need to upload the IRRecvNEC example for the 2nd board connected with IR Receiver from “File” -> “Examples” -> “AmebaIRDevice” -> “IRRecvNEC” .

After opening the serial monitor on the IR Receiver side and press the reset buttons on two boards, the data “48” will be received every 3 seconds (due to the delays () function, not compulsory to wait). After decoding the signal from the receiving Pin D8 and transmitting Pin D9 with Logic Analyser and Pulse View (Figure 10), the result is also shown as “48” after decoding the receiving data with IR NEC Protocol.

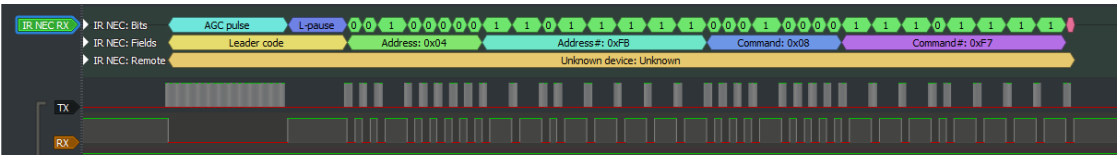


Figure 10: Pulse View results from sending and receiving pin

Code Reference

[1] Seeed Official website for Grove –Infrared Receiver

https://wiki.seeedstudio.com/Grove-Infrared_Receiver/

[2] Seed Official website for Grove –Infrared Emitter

https://wiki.seeedstudio.com/Grove-Infrared_Emitter/

[3] Ken SHirriff' s blog on A Multi-Protocol Infrared Remote Library for the Arduino

<http://www.righ.to.com/2009/08/multi-protocol-infrared-remote-library.html>

[4] SB-Projects: IR Remote Control Project

<https://www.sbprojects.net/knowledge/ir/index.php>

A Simple RTC Example

Materials

- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1


Example

This example demonstrates how to use the RTC library methods. This function describes how to use the RTC API. The RTC function is implemented by an independent BCD timer/counter.


Select the correct Ameba development board from the Arduino IDE: “Tools” -> “Board” .

Then open the “RTC” example from:

"File" -> "Examples" -> "AmebaRTC" -> "RTC":

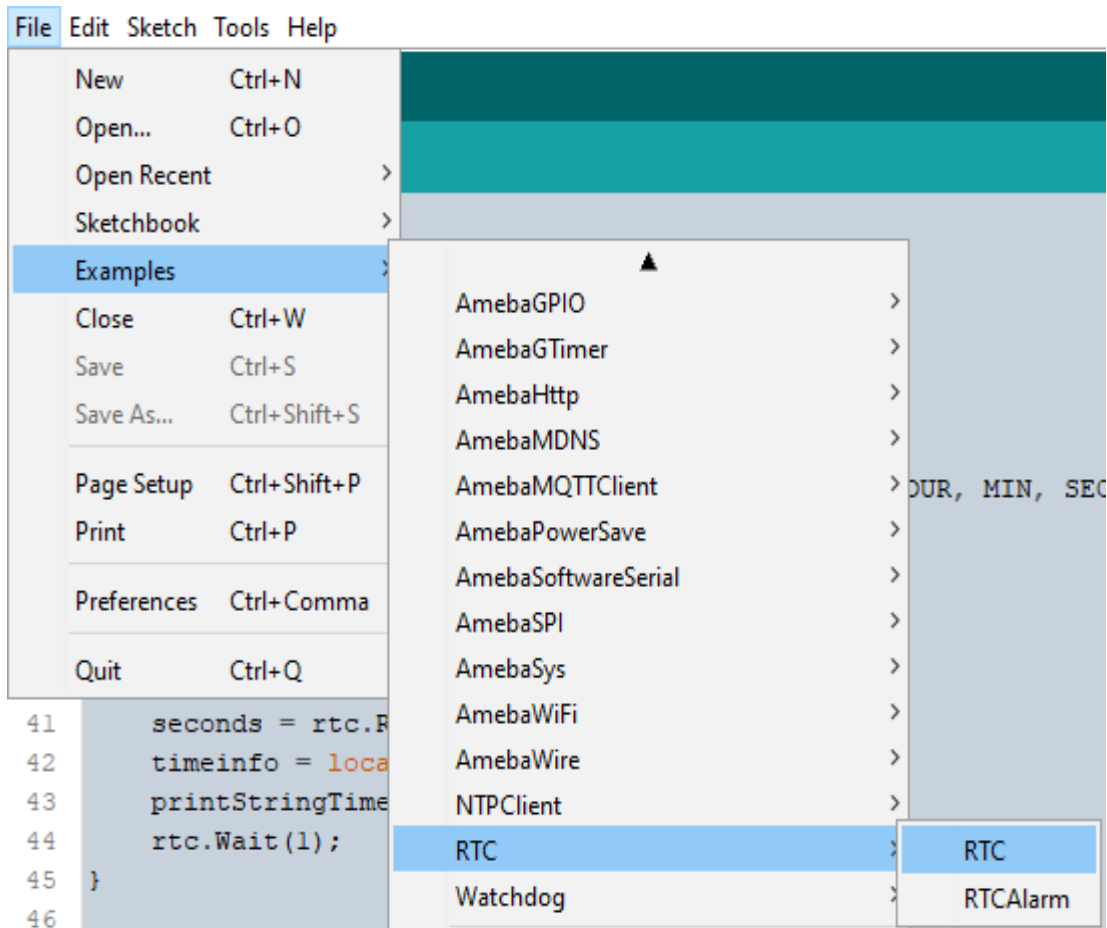

Upon successfully upload the sample code and press the reset button, this example will print out time information since the user initialized time every second in the Serial Monitor.

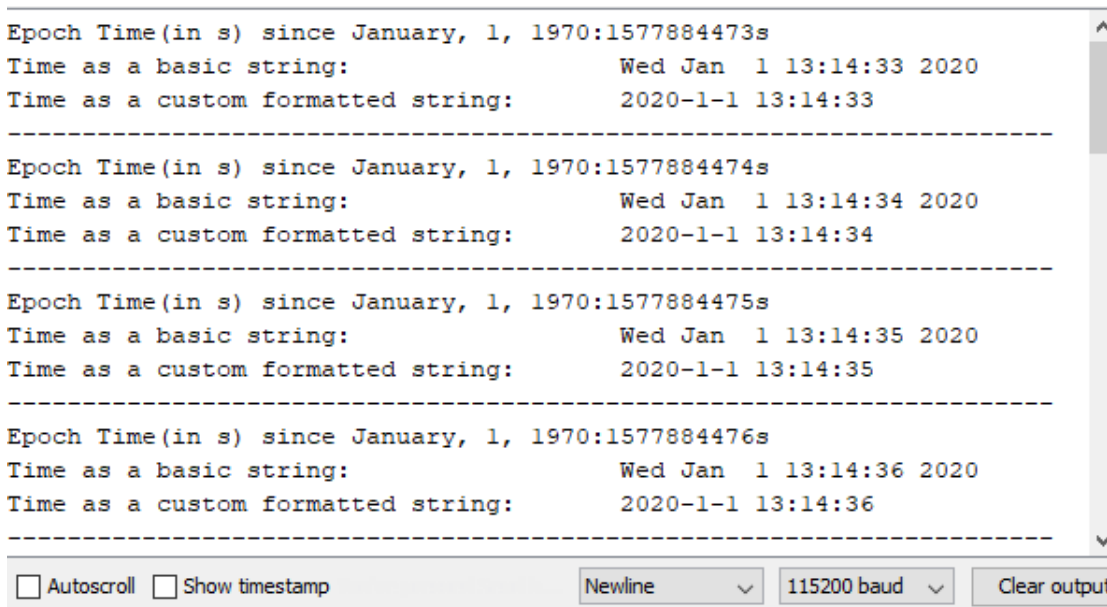

Code Reference

[1] Simple RTC example from Arduino Tutorials:

<https://www.arduino.cc/en/Tutorial/SimpleRTC>

A Simple RTC Alarm

Materials


- AmebaD [RTL8722DM / RTL8722CSM / RTL8722DM MINI] x 1

Example


This example demonstrates how to use the RTC library methods to create a RTC Alarm, so that to do some tasks when an alarm is matched. In particular, the RTC time is set at 16:00:00 and an alarm at 16:00:10. When the time matches, “Alarm Match” information will be printed on the serial monitor.

First, select the correct Ameba development board from the Arduino IDE: “Tools” -> “Board” .

Then open the “RTCArm” example from: “File” -> “Examples” -> “RTC” -> “RTCArm” :

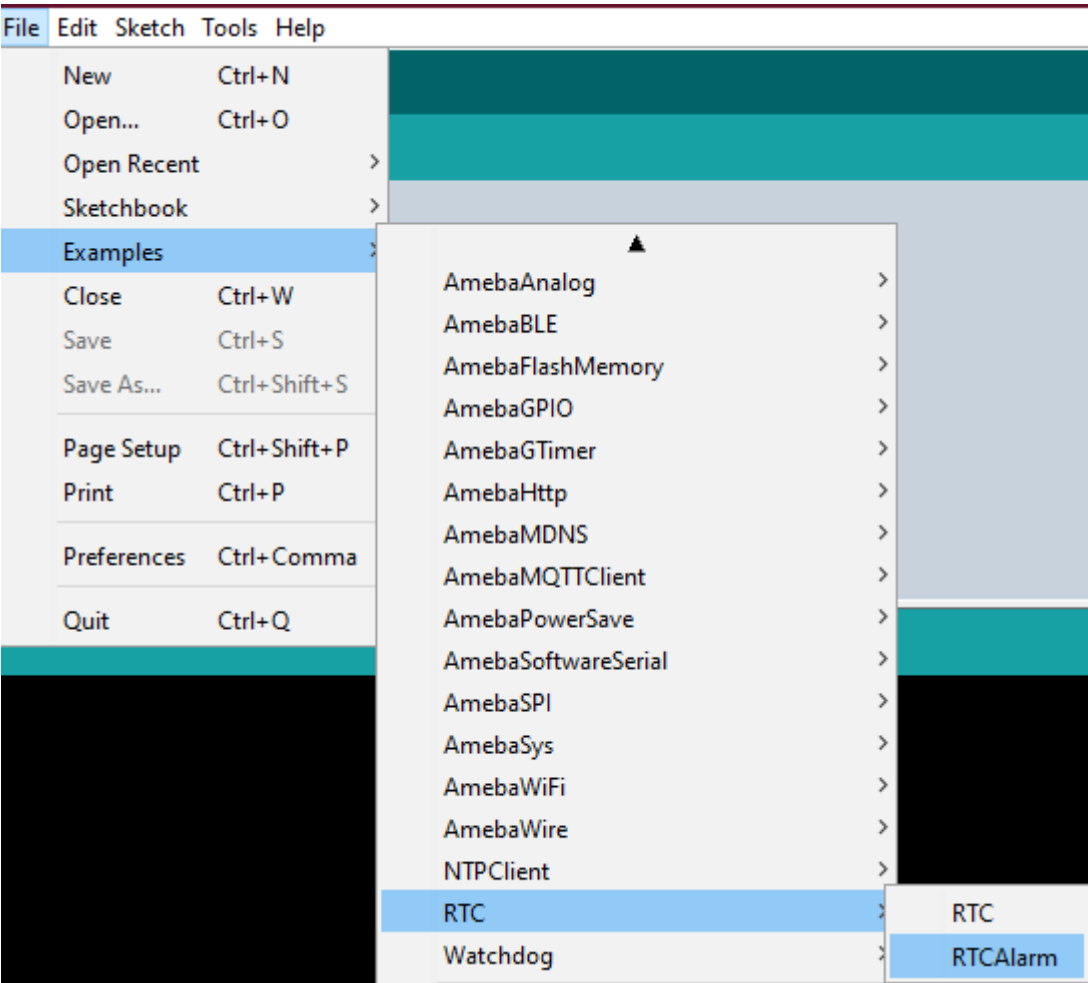

In the example, the RTC time is set at 16:00:00 and an alarm is set at 16:00:10. Upon successfully upload the sample code and press the reset button. When the alarm time (10 seconds) is reached the attached interrupt function will print the following information: “Alarm Matched!” showing in this figure below.

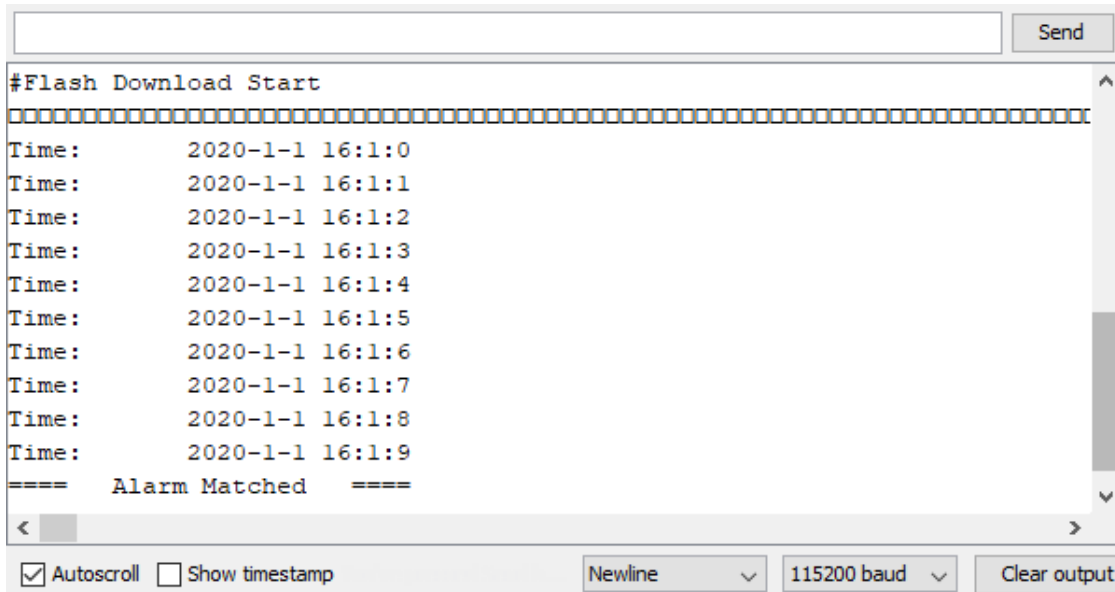

```

#Flash Download Start
=====
Time:      2020-1-1 16:1:0
Time:      2020-1-1 16:1:1
Time:      2020-1-1 16:1:2
Time:      2020-1-1 16:1:3
Time:      2020-1-1 16:1:4
Time:      2020-1-1 16:1:5
Time:      2020-1-1 16:1:6
Time:      2020-1-1 16:1:7
Time:      2020-1-1 16:1:8
Time:      2020-1-1 16:1:9
====  Alarm Matched  ====

```

Autoscroll ☒ Show timestamp ☐ Newline 115200 baud Clear output

Watchdog Timer Simple Example

Preparation

- AmebaD RTL8722CSM/RTL8722DM/RTL8722DM MINI Board x 1


Example

In this example, we will use this simple watchdog timer example runs on the Ameba RTL8722 module to illustrate how to use the watchdog API. Before we get into the details of the example, let's briefly go through the definition of Watchdog as well as its working principles.

Watchdog

Watchdog Timer (WDT) is a hardware timer that is used to detect the occurrence of a software fault, then automatically generates a system reset or a watchdog interrupt on the expiry of a programmed period.

In layman terms, imagine in the situation while your micro-controller is confused in an infinity loop, or any case like the micro-controller hang while performing some tasks. The normal troubleshooting method would be to press the reset button and jump out of the infinity loop. However, is it practically impossible to do press on the button all time, therefore, the watchdog timer that embedded inside the micro-controller would help with this situation.

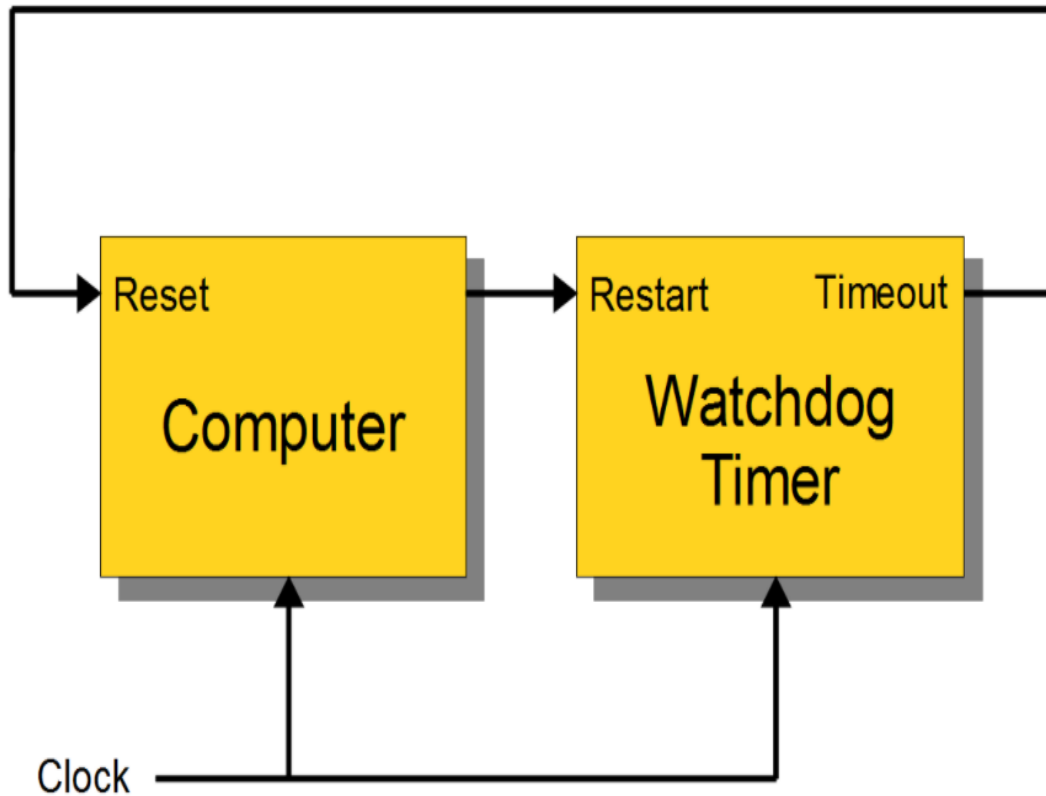

Feed the Dog

If you have a dog in your home. You need to feed that dog at a regular interval. if you can't feed one day, it will bite you! And likewise, this is the working logic behind the watchdog timer.


In our example, we created 2 tasks that contain some loop that runs repeatedly, one is called "Small_Task" and the other is called "Big_Task". We are enabling the watchdog timer is loaded with an initial value (5 seconds) greater than the total delay in the "Small_Task", but shorter than the "Big_Task".

For the successful case, the watchdog is being refreshed/feed within 5 seconds, however, for the failed case, the loop is under processing and the watchdog is not being fresh after 5 seconds, which triggers the watchdog (dog barks), an interrupt is generated to reset the processor. Likewise, the watchdog timer protects the micro-controller from the hanging case.


Then we move to the coding part for this example, for this example, you will only need the RTL8722CSM/RTL8722DM/RTL8722DM MINI Board itself.

Firstly, make sure the correct Ameba development board is selected in Arduino IDE: "Tools" -> "Board" ->

“RTL8722CSM/RTL8722DM” (or “RTL8722DM MINI”). Then open the “Watchdog Timer” example in “File” -> “Examples” -> “AmebaWatchdog” -> “Watchdog Timer” :

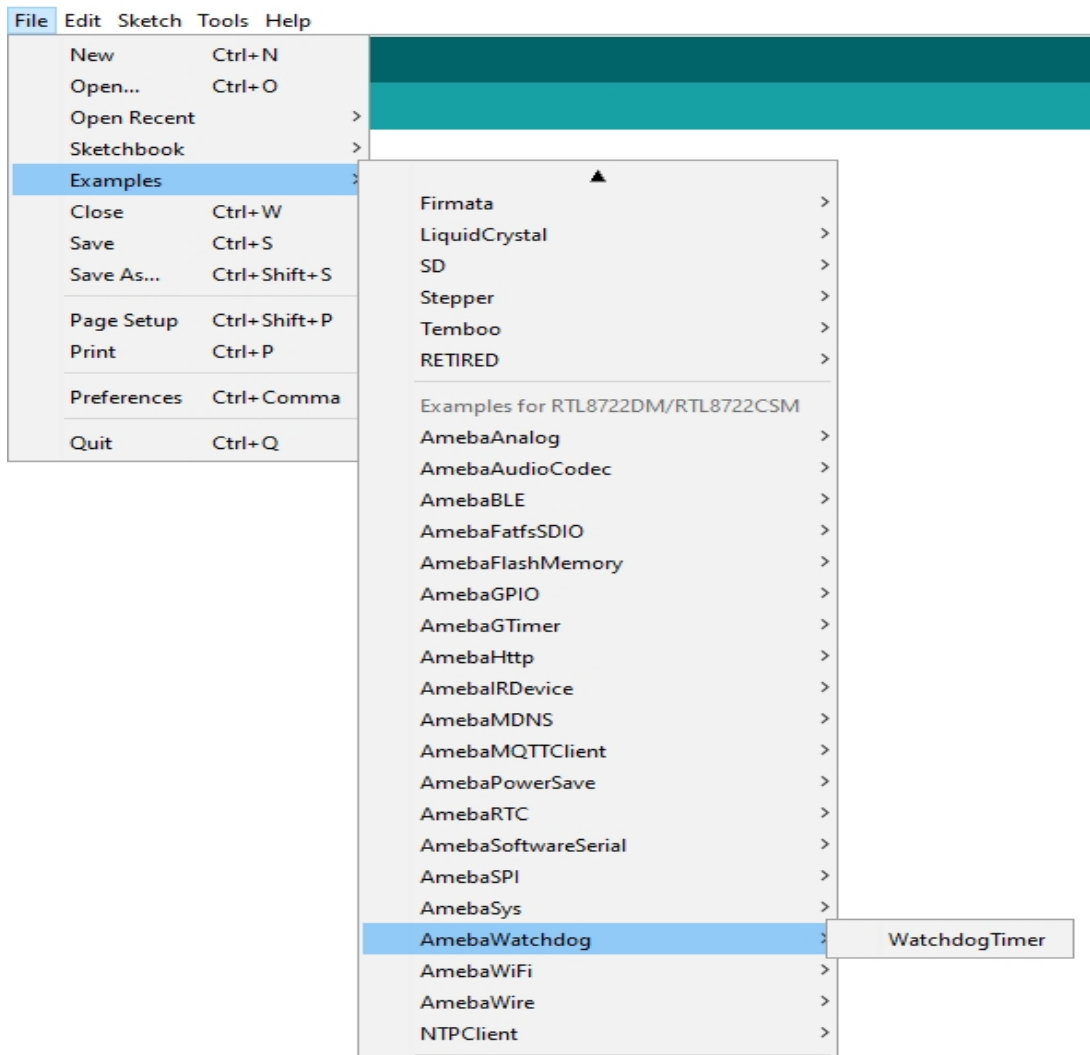

Upon successfully upload the sample code, open the serial monitor, and press the reset button. You will find that the “Small_Task” can refresh the watchdog within the 5 seconds (initialized in the watchdog timer). However, the “Big_Task” will not be able to refresh the watchdog within 5 seconds, which the watchdog “barks” then the microcontroller reset.

 COM10

```
#calibration_ok:[2:19:11]
.....doing small task.....
Small_Task finished refresh watchdog.
.....doing big task, up to 10.....
doing dummy task #1
doing dummy task #2
doing dummy task #3
doing dummy task #4
doing dummy task #5
#calibration_ok:[2:19:11]
.....doing small task.....
Small_Task finished refresh watchdog.
.....doing big task, up to 10.....
doing dummy task #1
doing dummy task #2
doing dummy task #3
doing dummy task #4
doing dummy task #5
#calibration_ok:[2:19:11]
.....doing small task.....
Small_Task finished refresh watchdog.
.....doing big task, up to 10.....
doing dummy task #1
doing dummy task #2
doing dummy task #3
doing dummy task #4
doing dummy task #5
#calibration_ok:[2:19:11]
.....doing small task.....
Small_Task finished refresh watchdog.
.....doing big task, up to 10.....
doing dummy task #1
```

 COM10

```
#calibration_ok:[2:19:11]
.....doing small task.....
Small_Task finished refresh watchdog.
.....doing big task, up to 10.....
doing dummy task #1
doing dummy task #2
doing dummy task #3
doing dummy task #4
doing dummy task #5
watchdog barks!!!
doing dummy task #6
doing dummy task #7
doing dummy task #8
doing dummy task #9
doing dummy task #10
Big_Task finished refresh watchdog.
```

1.3.4 API Documents

RTL8722DM ARDUINO Online API Documents

Analog

Class AmebaServo

AmebaServo Class

Description

Defines a class of manipulating servo motors connected to Arduino pins.

Syntax

```
class AmebaServo
```

Members

Public Constructors	
AmebaServo::AmebaServo	Constructs an AmebaServo object.
Public Methods	
AmebaServo::attach	Attach the given pin to the next free channel.
AmebaServo::detach	Detach the servo.
AmebaServo::write	Write value, if the value is < 200 it's treated as an angle, otherwise as pulse-width in microseconds.
AmebaServo::writeMicroseconds	Write pulse width in microseconds.
AmebaServo::read	Output current pulse width as an angle between 0 and 180 degrees.
AmebaServo::readMicroseconds	Output current pulse width in microseconds for this servo.
AmebaServo::attached	Check if the servo is attached.

AmebaServo::attach

Description

Attach the given pin to the next free channel, sets pinMode (including minimum and maximum values for writes), returns channel number, or 0 if failure.

Syntax

```
uint8_t attach(int pin);  
  
uint8_t attach(int pin, int min, int max);
```

Parameters

pin: The Arduino pin number to be attached.

min: Minimum values for writes.

max: Maximum values for writes.

Returns

The function returns channel number or 0

Example Code

Example: ServoSweep

The code demos servo motor sweeping from 0 degrees to 180 degrees then sweep back to 0 degrees in the step of 1 degree.

列表 3: ServoSweep.ino

```

1  /* Sweep
2  by BARRAGAN < http://barraganstudio.com >
3  This example code is in the public domain.
4  modified 8 Nov 2013
5  by Scott Fitzgerald
6  http://www.arduino.cc/en/Tutorial/Sweep
7  refined 2016/03/18 by Realtek
8  */
9
10 #include "AmebaServo.h"
11
12 // create servo object to control a servo
13 // 4 servo objects can be created correspond to PWM pins
14
15 AmebaServo myservo;
16
17 // variable to store the servo position
18 int pos = 0;
19
20 void setup() {
21   #if defined(BOARD_RTL8195A)
22     // attaches the servo on pin 9 to the servo object
23     myservo.attach(9);
24   #elif defined(BOARD_RTL8710)
25     // attaches the servo on pin 13 to the servo object
26     myservo.attach(13);
27   #elif defined(BOARD_RTL8721D)
28     // attaches the servo on pin 8 to the servo object
29     myservo.attach(8);
30   #else
31     // attaches the servo on pin 9 to the servo object
32     myservo.attach(9);
33   #endif
34 }
35
36 void loop() {
37   // goes from 0 degrees to 180 degrees in steps of 1 degree
38   for (pos = 0; pos <= 180; pos += 1) {
39     // tell servo to go to position in variable 'pos'
40     myservo.write(pos);
41     // waits 15ms for the servo to reach the position
42     delay(15);

```

(下页继续)

(续上页)

```
43     }  
44     // goes from 180 degrees to 0 degrees  
45     for (pos = 180; pos >= 0; pos -= 1) {  
46         // tell servo to go to position in variable 'pos'  
47         myservo.write(pos);  
48         // waits 15ms for the servo to reach the position  
49         delay(15);  
50     }  
51 }
```

Notes and Warnings

Every time must include the header file “AmebaServo.h” in front of the project to use the class function.

AmebaServo::detach

Description

Detach the servo.

Syntax

```
void AmebaServo::detach(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Every time must include the header file “AmebaServo.h” in front of the project to use the class function.

AmebaServo::write

Description

Write an integer value to the function, if the value is < 200, it’ s being treated as an angle, otherwise as pulse-width in microseconds.

Syntax

```
void AmebaServo::write(int value);
```

Parameters

value: The value < 200 its treated as an angle; otherwise as pulse width in microseconds.

Returns

The function returns nothing.

Example Code

Example: ServoSweep

The code demos servo motor sweeping from 0 degrees to 180 degrees then sweep back to 0 degrees in the step of 1 degree. Please refer to code in “AmebaServo:: attach” section.

Notes and Warnings

Every time must include the header file “AmebaServo.h” in front of the project to use the class function.

AmebaServo::writeMicroseconds**Description**

Write pulse width to the servo in microseconds.

Syntax

```
void AmebaServo::writeMicroseconds(int value);
```

Parameters

value: Write value the pulse width in microseconds.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Every time must include the header file “AmebaServo.h” in front of the project to use the class function.

AmebaServo::read**Description**

The function reads current pulse width and returns as an angle between 0 and 180 degrees.

Syntax

```
int AmebaServo::read(void);
```

Parameters

The function requires no input parameter.

Returns

The pulse width as an angle between 0 ~ 180 degrees.

Example Code

NA

Notes and Warnings

Every time must include the header file “AmebaServo.h” in front of the project to use the class function.

AmebaServo::readMicroseconds

Description

The function returns a Boolean value “true” if this servo is attached, otherwise returns “false” .

Syntax

```
int AmebaServo::readMicroseconds(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns current servo pulse width in microseconds.

Example Code

NA

Notes and Warnings

Every time must include the header file “AmebaServo.h” in front of the project to use the class function.

AmebaServo::attached

Description

It returns true if this servo is attached, otherwise false.

Syntax

```
bool AmebaServo::attached(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns a Boolean value as true or false.

Example Code

Example: ServoSweep

The code demos servo motor sweeping from 0 degrees to 180 degrees then sweep back to 0 degrees in the step of 1 degree. Please refer to code in “AmebaServo:: attach” section.

Notes and Warnings

Every time must include the header file “AmebaServo.h” in front of the project to use the class function.

AudioCodec

Class AudioCodec

Description

A class used for general control and management of the hardware audio codec functions.

Syntax

```
class AudioCodec
```

Members

Public Constructors

The public constructor should not be used as this class is intended to be a singleton class. Access member functions using the object instance named Codec.

Public Methods

AudioCodec::begin	Configure and start the audio codec for transmit and receive operation
AudioCodec::end	Stop all audio codec operation
Au- dioCodec::getBufferSize	Get the byte size of a single page of the audio codec buffer
AudioCodec::setSampleRate	Configure the audio codec transmit and receive sampling rate
AudioCodec::setBitDepth	Configure the audio codec transmit and receive bit depth (bits per sample)
Au- dioCodec::setChannelCount	Configure the audio codec transmit and receive channel count
Au- dioCodec::setInputMicType	Configure for analog or digital input microphone type
Au- dioCodec::setInputLRMux	Configure input left right channel multiplexing
AudioCodec::setDMicBoost	Configure boost gain for digital microphone input
AudioCodec::setAMicBoost	Configure boost gain for analog microphone input
AudioCodec::setADCGain	Configure gain of ADC used to acquire analog input
AudioCodec::muteInput	Mute input audio data stream
Au- dioCodec::setOutputVolume	Configure output audio volume
AudioCodec::muteOutput	Mute output audio
AudioCodec::writeAvailable	Check for free buffer page available for data write
AudioCodec::writeDataPage	Write audio data to an available buffer page
AudioCodec::readAvailable	Check for buffer page with new data available for read
AudioCodec::readDataPage	Read audio data from a ready buffer page
Au- dioCodec::setWriteCallback	Set a callback function to be notified when a free buffer page is available for write
Au- dioCodec::setReadCallback	Set a callback function to be notified when a buffer page with new data is available for read

AudioCodec::begin**Description**

Configure and start the audio codec for transmit and receive operation.

Syntax

```
void begin(bool input, bool output);
```

Parameters

input: enable audio codec data input

output: enable audio codec data output

Returns

The function returns nothing.

Example Code

Example: BasicInputOutput

Notes and Warnings

AudioCodec::end

Description

Stop all audio codec operation.

Syntax

```
void end();
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

AudioCodec::getBufferPageSize

Description

Get the byte size of a single page of the audio codec buffer.

Syntax

```
uint32_t getBufferPageSize();
```

Parameters

The function requires no input parameter.

Returns

The size of a audio codec buffer page, in number of bytes.

Example Code

NA

Notes and Warnings

The AudioCodec class includes a transmit and receive buffer to store audio sample data while transferring to and from the DAC output and ADC input. The buffer is divided into pages of fixed size, and audio data can be read and written

one page at a time. Depending on the configured bit depth (bits per audio sample) and channel count, a buffer page may contain a different number of audio samples.

AudioCodec::setSampleRate

Description

Configure the audio codec transmit and receive sampling rate.

Syntax

```
void setSampleRate(uint32_t sampleRate);
```

Parameters

sampleRate: desired audio codec sampling rate in Hz. Default value of 48000. Supported values: 8000, 16000, 32000, 44100, 48000, 88200, 96000.

Returns

The function returns nothing.

Example Code

Example: BasicInputOutput

Notes and Warnings

High sample rates above 48000Hz will require frequent buffer reads and writes to keep up with the large amount of data input and output. If there is insufficient processing time dedicated to this task, audio quality will be degraded.

AudioCodec::setBitDepth

Description

Configure the audio codec transmit and receive bit depth (bits per sample).

Syntax

```
void setBitDepth(uint8_t bitDepth);
```

Parameters

bitDepth: desired number of bits per sample. Default value of 16. Supported values: 8, 16, 24.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Setting a bit depth of 24 bits per sample will require 32 bits (4 bytes) of buffer space for storing each sample, with the most significant byte ignored.

AudioCodec::setChannelCount

Description

Configure the audio codec transmit and receive channel count.

Syntax

```
void setChannelCount(uint8_t monoStereo);
```

Parameters

monoStereo: number of channels. Default value of 1. Supported values: 1, 2.

Returns

The function returns nothing.

Example Code

Example: BasicInputOutput

Notes and Warnings

AudioCodec::setInputMicType

Description

Configure for analog or digital input microphone type.

Syntax

```
Void setInputMicType(Mic_Type micType);
```

Parameters

micType: Input microphone type. Default value ANALOGMIC. Valid values:

- ANALOGMIC –microphone with an analog output
- PDMMIC –digital microphone with a PDM output

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

For analog single-ended output, connect to PA_4 for the left channel and PA_2 for the right channel.

For digital PDM output, connect the PDM clock to PB_1 and PDM data to PB_2.

AudioCodec::setInputLRMux

Description

Configure input left right channel multiplexing.

Syntax

```
void setInputLRMux(uint32_t mux);
```

Parameters

mux: desired left right audio channel multiplexing setting. Default value RX_CH_LR. Valid values:

- RX_CH_LR
- RX_CH_RL
- RX_CH_LL
- RX_CH_RR

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

In mono channel mode, both RX_CH_LR and RX_CH_LL will result in the audio codec sampling input data from the left channel microphone. Similarly, both RX_CH_RL and RX_CH_RR will result in the audio codec sampling input data from the right channel microphone.

In stereo channel mode, RX_CH_RL will switch the positions of input data sampled from the microphones. RX_CH_RR and RX_CH_LL will result in duplicated samples from the right and left microphones respectively.** **

AudioCodec::setDMicBoost**Description**

Configure boost gain for digital microphone input.

Syntax

```
void setDMicBoost(uint32_t leftBoost, uint32_t rightBoost);
```

Parameters

leftBoost: boost gain for left channel digital microphone input

rightBoost: boost gain for right channel digital microphone input

Valid boost gain values:

- 0 : 0dB
- 1 : 12dB
- 2 : 24dB

- 3 : 36dB

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings**AudioCodec::setAMicBoost****Description**

Configure boost gain for analog microphone input.

Syntax

```
void setAMicBoost(uint32_t leftBoost, uint32_t rightBoost);
```

Parameters

leftBoost: boost gain for left channel analog microphone input

rightBoost: boost gain for right channel analog microphone input

Valid boost gain values:

- 0 : 0dB
- 1 : 20dB
- 2 : 30dB
- 3 : 40dB

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Only use this function if additional gain is required after using setADCGain function.

AudioCodec::setADCGain**Description**

Configure gain of ADC used to acquire analog input.

Syntax

```
void setADCGain(uint32_t leftGain, uint32_t rightGain);
```

Parameters

leftGain: Gain for left channel ADC

rightGain: Gain for right channel ADC

Valid value range is from 0x00 to 0x7f. Gain increases by 0.375dB for every increment in value:

- 0x00 : -17.625dB
- 0x01 : -17.25dB
- 0x2f : 0dB
- 0x30 : 0.375dB
- 0x7f : 30dB

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

AudioCodec::muteInput

Description

Mute input audio data stream.

Syntax

```
void muteInput(uint8_t leftMute, uint8_t rightMute);
```

Parameters

leftMute: 1 to mute left channel input, 0 to unmute

rightMute: 1 to mute right channel input, 0 to unmute

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

AudioCodec::setOutputVolume

Description

Configure output audio volume.

Syntax

```
void setOutputVolume(uint8_t leftVol, uint8_t rightVol);
```

Parameters

leftVol: left channel output volume

rightVol: right channel output volume

Valid value ranges from 0 to 100, corresponding to a volume of -65.625dB to 0dB.

Returns

The function returns nothing.

Example Code

Example: BasicInputOutput

Notes and Warnings**AudioCodec::muteOutput****Description**

Mute output audio.

Syntax

```
void muteOutput(uint8_t leftMute, uint8_t rightMute);
```

Parameters

leftMute: 1 to mute left channel output, 0 to unmute

rightMute: 1 to mute right channel output, 0 to unmute

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings**AudioCodec::writeAvaliable****Description**

Check for free buffer page available for data write.

Syntax

```
bool writeAvaliable();
```

Parameters

The function requires no input parameter.

Returns

Returns true if there is a buffer page that is available for writing data into. Returns false if all buffer pages are full.

Example Code

Example: BasicInputOutput

Notes and Warnings**AudioCodec::writeDataPage****Description**

Write audio data to an available buffer page.

Syntax

```
uint32_t writeDataPage(int8_t* src, uint32_t len);  
uint32_t writeDataPage(int16_t* src, uint32_t len);
```

Parameters

src: pointer to array containing audio samples to write to audio codec.

len: number of audio samples in array.

Returns

The function returns the number of audio samples written to the audio codec.

Example Code

Example: BasicInputOutput

Notes and Warnings**AudioCodec::readAvaliable****Description**

Check for buffer page with new data available for read.

Syntax

```
bool readAvaliable();
```

Parameters

The function requires no input parameter.

Returns

Returns true if there is a buffer page with new data that is ready for reading data from. Returns false if all buffer pages are empty.

Example Code

Example: BasicInputOutput

Notes and Warnings**AudioCodec::readDataPage****Description**

Read audio data from a ready buffer page.

Syntax

```
uint32_t readDataPage(int8_t* dst, uint32_t len);  
uint32_t readDataPage(int16_t* dst, uint32_t len);
```

Parameters

dst: pointer to array to contain audio samples read from audio codec.

len: number of audio samples to read.

Returns

The function returns the number of audio samples read from the audio codec.

Example Code

Example: BasicInputOutput

Notes and Warnings**AudioCodec::setWriteCallback****Description**

Set a callback function to be notified when a free buffer page is available for write.

Syntax

```
void setWriteCallback(void (writeCB)(**void*));
```

Parameters

writeCB: function to be called when a buffer page becomes available for data write. Takes no arguments and returns nothing

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

After starting the audio codec with `AudioCodec::begin()`, the callback function will be called each time the audio codec finishes outputting the data in a buffer page.

AudioCodec::setReadCallback

Description

Set a callback function to be notified when a buffer page with new data is available for read.

Syntax

```
void setReadCallback(void (readCB)(**void*));
```

Parameters

`readCB`: function to be called when a buffer page with new data becomes available for data read. Takes no arguments and returns nothing

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

After starting the audio codec with `AudioCodec::begin()`, the callback function will be called each time the audio codec fills up a buffer page with newly acquired audio samples.

Class FFT

Description

A class used for performing FFT calculations with real-number inputs and outputs.

Syntax

```
class FFT
```

Members

Public Constructors

FFT::FFT	Create an instance of the FFT class
----------	-------------------------------------

Public Methods

FFT::setWindow	Configure the window function used in FFT calculations
FFT::calculate	Calculate FFT for an input array of values
FFT::getFrequencyBins	Get the FFT output frequency bins
FFT::getFFTSIZE	Get the size of FFT output for a given input size

FFT::FFT

Description

Create a FFT class object.

Syntax

```
void FFT();
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: FFT

Notes and Warnings

FFT::setWindow

Description

Configure the window function used in FFT calculations.

Syntax

```
void setWindow(FFTWindow_t window, uint16_t sampleCount);
```

Parameters

window: The window function to be used in FFT calculations. Valid values: None, Hann, Hamming.

sampleCount: Number of sample datapoints in the input.

Returns

The function returns nothing.

Example Code

Example: FFT

Notes and Warnings

The window function is used to reduce the effects of discontinuities that occur when the input signal has frequencies that do not fit an integer number of periods in the sample datapoints.

More information on FFTs and window functions can be seen at:

<https://download.ni.com/evaluation/pxi/Understanding%20FFTs%20and%20Windowing.pdf>

https://en.wikipedia.org/wiki/Window_function

FFT::Calculate

Description

Calculate FFT for an input array of values.

Syntax

```
void calculate(float* inputBuf, float* outputBuf, uint16_t sampleCount);
```

```
void calculate(int16_t* inputBuf, float* outputBuf, uint16_t sampleCount);
```

Parameters

inputBuf: pointer to an array of sampleCount size, containing input sample datapoints, in float or uint16_t format.

outputBuf: pointer to a float array of sampleCount/2 size, for containing FFT output.

sampleCount: number of sample datapoints in the input array, valid values: 16, 32, 64, 128, 256, 512, 1024, 2048.

Returns

The function returns nothing.

Example Code

Example:FFT

Notes and Warnings

Large sample counts will require a longer time for FFT calculations, but will also return a result with higher frequency resolution.

FFT::getFrequencyBins

Description

Get the FFT output frequency bins.

Syntax

```
void getFrequencyBins(uint16_t* outputBuf, uint16_t sampleCount, uint32_t sampleRate);
```

Parameters

outputBuf: pointer to a uint16_t array of sampleCount/2 size, for containing the calculated center frequency of each FFT output element.

Returns

The function returns nothing.

Example Code

Example: FFT

Notes and Warnings NA

—

FFT::getFFTSIZE

Description

Get the size of FFT output for a given input size.

Syntax

```
uint16_t getFFTSIZE(uint16_t sampleCount);
```

Parameters

sampleCount: number of input sample datapoints.

Returns

The function returns the FFT output size for the given sampleCount, which is sampleCount/2.

Example Code

NA

Notes and Warnings NA

Class PlaybackWav

Description

A class used for control and playback of .wav file format audio data.

Syntax

```
class PlaybackWav
```

Members

Public Constructors

PlaybackWav::PlaybackWav	Create an instance of the PlaybackWav class
--------------------------	---

Public Methods

PlaybackWav::openFile	Open a .wav file for playback
PlaybackWav::closeFile	Close a previously opened file
PlaybackWav::fileOpened	Check if a .wav file is already opened
PlaybackWav::getSampleRate	Get the sample rate of the .wav file
PlaybackWav::getChannelCount	Get the number of audio channels in the .wav file
PlaybackWav::getBitDepth	Get the bit depth of each sample in the .wav file
PlaybackWav::getLengthMillis	Get the playback length of the .wav file in milliseconds
PlaybackWav::getPositionMillis	Get the current playback position in milliseconds
PlaybackWav::setPositionMillis	Set the current playback position in milliseconds
PlaybackWav::millisToBytes	Convert a playback duration to equivalent number of bytes
PlaybackWav::bytesToMillis	Convert number of bytes to an equivalent playback duration
PlaybackWav::readAudioData	Read audio data from the .wav file

PlaybackWav::PlaybackWav

Description

Create a PlaybackWav class object.

Syntax

```
void PlaybackWav(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

PlaybackWav::fileOpened

Description

Check if a .wav file is already opened.

Syntax

```
bool fileOpened(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns true if a .wav file is already open, false otherwise.

Example Code

Example: RecordPlaybackWav

Notes and Warnings

NA

PlaybackWav::getSampleRate**Description**

Get the sample rate of the .wav file.

Syntax

```
uint32_t getSampleRate(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns sampling rate encoded in the .wav file header.

Example Code

Example: PlaybackWavFile

Notes and Warnings

NA

PlaybackWav::getChannelCount**Description**

Get the number of audio channels in the .wav file.

Syntax

```
uint16_t getChannelCount(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns channel count encoded in the .wav file header.

Example Code

Example: PlaybackWavFile

Notes and Warnings

NA

PlaybackWav::getBitDepth

Description

Get the bit depth of each sample in the .wav file.

Syntax

```
uint16_t getBitDepth(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns bit depth encoded in the .wav file header.

Example Code

Example: PlaybackWavFile

Notes and Warnings

NA

PlaybackWav::getLengthMillis

Description

Get the playback length of the .wav file in milliseconds.

Syntax

```
uint32_t getLengthMillis(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns the total playback length of the currently open .wav file in milliseconds.

Example Code

Example: PlaybackWavFile

Notes and Warnings

NA

PlaybackWav::getPositionMillis

Description

Get the current playback position in milliseconds.

Syntax

```
uint32_t getPositionMillis(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns the current playback position of the currently open .wav file in milliseconds.

Example Code

Example: PlaybackWavFile

Notes and Warnings

NA

PlaybackWav::setPositionMillis

Description

Set the current playback position in milliseconds.

Syntax

```
void setPositionMillis(uint32_t pos);
```

Parameters

pos: The desired playback position expressed in milliseconds.

Returns

The function returns nothing.

Example Code

Example: PlaybackWavFile

Notes and Warnings

Any changes to playback position will only take effect on the next call to PlaybackWav::readAudioData. If the desired playback position is beyond the total playback length of the file, the playback position will be set to the end of file, and no audio data will be output on subsequent data reads.

PlaybackWav::millisToBytes

Description

Convert a playback duration to equivalent number of bytes.

Syntax

```
uint32_t millisToBytes(uint32_t ms);
```

Parameters

ms: playback duration in milliseconds.

Returns

The function returns the number of bytes that is equivalent to the input playback duration, converted using the current sample rate, number of channels and bit depth.

Example Code

NA

Notes and Warnings

NA

PlaybackWav::bytesToMillis

Description

Convert number of bytes to an equivalent playback duration.

Syntax

```
uint32_t bytesToMillis(uint32_t bytes);
```

Parameters

bytes: playback duration in number of bytes.

Returns

The function returns the time duration in milliseconds that is equivalent to the input number of bytes, converted using the current sample rate, number of channels and bit depth.

Example Code

NA

Notes and Warnings

NA

PlaybackWav::readAudioData

Description

Read audio data from the .wav file.

Syntax

- `uint32_t readAudioData(int8_t* dst, uint32_t len);`
- `uint32_t readAudioData(int16_t* dst, uint32_t len);`

Parameters

- `dst`: pointer to array to store data read from .wav file.
- `len`: number of audio samples to read from .wav file.

Returns

The function returns number of audio samples read.

Example Code

Example: `PlaybackWavFile`

Notes and Warnings

NA

Class RecordWav**Description**

A class used for control and recording of .wav file format audio data.

Syntax

`class RecordWav`

Members**Public Constructors**

<code>RecordWav::RecordWav</code>	Create an instance of the <code>RecordWav</code> class
-----------------------------------	--

Public Methods

RecordWav::openFile	Open a .wav file for playback
RecordWav::closeFile	Close a previously opened file
RecordWav::fileOpened	Check if a .wav file is already opened
RecordWav::setSampleRate	Get the sample rate of the .wav file
RecordWav::setChannelCount	Set the number of audio channels in the .wav file
RecordWav::setBitDepth	Set the bit depth of each sample in the .wav file
RecordWav::getLengthMillis	Get the current record length of the .wav file in milliseconds
RecordWav::millisToBytes	Convert a playback duration to equivalent number of bytes
RecordWav::bytesToMillis	Convert number of bytes to an equivalent playback duration
RecordWav::writeAudioData	Write audio data to the .wav file

RecordWav::RecordWav

Description

Create a RecordWav class object.

Syntax

```
void RecordWav(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: RecordWavFile

Notes and Warnings

NA

RecordWav::openFile

Description

Open a .wav file for recording.

Syntax

```
void openFile(const char* absFilepath);
```

Parameters

absFilepath: the filepath of the .wav file to open.

Returns

The function returns nothing.

Example Code

Example: RecordWavFile

Notes and Warnings

NA

RecordWav::closeFile**Description**

Close a previously opened file.

Syntax

```
void closeFile(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: RecordWavFile

Notes and Warnings

Any open .wav files should be closed after recording is complete, otherwise, loss of recorded audio data may occur.

RecordWav::fileOpened**Description**

Check if a .wav file is already opened.

Syntax

```
bool fileOpened(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns true if a .wav file is already open, false otherwise.

Example Code

Example: RecordWavFile

Notes and Warnings

NA

RecordWav::setSampleRate

Description

Set the recording sample rate of the .wav file.

Syntax

```
void setSampleRate(uint32_t sampleRate);
```

Parameters

sampleRate: The desired recording sample rate.

Returns

The function returns nothing.

Example Code

Example: RecordWavFile

Notes and Warnings

NA

RecordWav::setChannelCount

Description

Set the number of recording audio channels in the .wav file.

Syntax

```
void setChannelCount(uint16_t channelCount);
```

Parameters

channelCount: number of recording audio channels.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

RecordWav::setBitDepth**Description**

Set the recording bit depth of each sample in the .wav file.

Syntax

```
void setBitDepth(uint16_t bitDepth);
```

Parameters

bitDepth: number of bits per sample.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

RecordWav::getLengthMillis**Description**

Get the current recorded length of the .wav file in milliseconds.

Syntax

```
uint32_t getLengthMillis(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns the current recorded length of the currently open .wav file in milliseconds.

Example Code

NA

Notes and Warnings

NA

RecordWav::millisToBytes**Description**

Convert a playback duration to equivalent number of bytes.

Syntax

```
uint32_t millisToBytes(uint32_t ms);
```

Parameters

ms: playback duration in milliseconds.

Returns

The function returns the number of bytes that is equivalent to the input playback duration, converted using the current sample rate, number of channels and bit depth.

Example Code

NA

Notes and Warnings

NA

RecordWav::bytesToMillis**Description**

Convert number of bytes to an equivalent playback duration.

Syntax

```
uint32_t bytesToMillis(uint32_t bytes);
```

Parameters

bytes: playback duration in number of bytes.

Returns

The function returns the time duration in milliseconds that is equivalent to the input number of bytes, converted using the current sample rate, number of channels and bit depth.

Example Code

NA

Notes and Warnings

NA

RecordWav::writeAudioData**Description**

Write audio data to the .wav file.

Syntax

```
uint32_t writeAudioData(int8_t* src, uint32_t len); uint32_t writeAudioData(int16_t* src, uint32_t len);
```

Parameters

src: pointer to array containing data to write to .wav file. len: number of audio samples to write to .wav file.

Returns

The function returns number of audio samples written.

Example Code

Example: RecordWavFile

Notes and Warnings

NA

BLE**Class BLEAddr****BLEAddr Class****Description**

A class used for managing Bluetooth addresses.

Syntax

```
class BLEAddr
```

Members

Public Constructors	
BLEAddr::BLEAddr	Constructs a BLEAddr object
Public Methods	
BLEAddr::str	Get the Bluetooth address represented as a formatted string
BLEAddr::data	Get the Bluetooth address represented as an integer array

BLEAddr::BLEAddr**Description**

Constructs a BLEAddr object.

Syntax

```
BLEAddr::BLEAddr(void);  
BLEAddr::BLEAddr(uint8_t (&addr)[6]);  
BLEAddr::BLEAddr(const char* str);
```

Parameters

addr: An array of 6 bytes containing the desired Bluetooth address.

str: A character string representing the desired Bluetooth address.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

When expressed as a string, the Bluetooth address should be written as 6 bytes in hexadecimal format, using a colon “:” to separate the bytes is acceptable (example –00:11:22:33:EE:FF).

BLEAddr::str**Description**

Get the Bluetooth address represented as a formatted string.

Syntax

```
const char* str(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns a pointer to a character string containing the hexadecimal representation of the Bluetooth address.

Example Code

Example: BLEScan

Notes and Warnings

The Bluetooth address expressed as a string will be written as 6 bytes in hexadecimal format, with a colon “:” separating the bytes (example –00:11:22:33:EE:FF).

BLEAddr::data**Description**

Get the Bluetooth address represented as an integer array.

Syntax

```
uint8_t* data(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns a pointer to a 6 byte array containing the Bluetooth address.

Example Code

NA

Notes and Warnings

The Bluetooth address is stored with MSB at array index [5].

Class BLEAdvert

BLEAdvert Class

Description

A class used for managing BLE advertising settings.

Syntax

```
class BLEAdvert
```

Members

Public Constructors
No public constructor is available as this class is intended to be a singleton class. You can get a pointer to this class using BLEDevice::configAdvert().

Public Methods	
BLEAdvert::updateAdvertParams	Update the current BLE advertisement settings to the lower Bluetooth stack
BLEAdvert::startAdv	Start BLE advertising
BLEAdvert::stopAdv	Stop BLE advertising
BLEAdvert::setAdvType	Set the BLE advertising type
BLEAdvert::setMinInterval	Set the BLE advertising minimum interval
BLEAdvert::setMaxInterval	Set the BLE advertising maximum interval
BLEAdvert::setAdvData	Set BLE advertising data
BLEAdvert::setScanRspData	Set BLE scan response data

BLEAdvert::updateAdvertParams

Description

Update the lower Bluetooth stack with the current advertising settings.

Syntax

```
void updateAdvertParams(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Please use the other class member functions to set the BLE advertising parameters first before using this function.

BLEAdvert::startAdv**Description**

Start BLE advertising.

Syntax

```
void startAdv(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

This function is provided for flexibility in controlling and updating BLE advertising parameters. You should avoid using this function to directly start the BLE advertising process without first registering the necessary callback and handler functions. Call `BLEDevice::beginPeripheral()` to register the necessary functions and start advertising for the first time.

BLEAdvert::stopAdv

Description

Stop BLE advertising.

Syntax

```
void stopAdv(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

This function is provided for flexibility in controlling and updating BLE advertising parameters. You should avoid using this function to directly stop the BLE advertising process. Call `BLEDevice::end()` to stop advertising and free up used resources.

BLEAdvert::setAdvType

Description

Set the BLE advertising type.

Syntax

```
void setAdvType(uint8_t advType);
```

Parameters

advType: the desired advertisement type. Valid values:

- 0 = GAP_ADTYPE_ADV_IND : connectable undirected advertisement
- 1 = GAP_ADTYPE_ADV_HDC_DIRECT_IND : connectable high duty cycle directed
- 2 = GAP_ADTYPE_ADV_SCAN_IND : scannable undirected advertisement
- 3 = GAP_ADTYPE_ADV_NONCONN_IND : Non-connectable undirected advertisement
- 4 = GAP_ADTYPE_ADV_LDC_DIRECT_IND : connectable low duty cycle directed advertisement

Returns

The function returns nothing.

Example Code

Example: BLEBatteryService

Notes and Warnings

Call this function with the GAP_ADTYPE_ADV_IND argument if connection requests should be allowed, and GAP_ADTYPE_ADV_NONCONN_IND if all connection requests should be rejected.

BLEAdvert::setMinInterval**Description**

Set the minimum BLE advertising interval.

Syntax

```
void setMinInterval(uint16_t minInt_ms);
```

Parameters

minInt_ms: the desired advertisement minimum interval, expressed in milliseconds. The valid values for the interval are from 20ms to 10240ms.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

BLE advertisements will repeat with an interval between the set minimum and maximum intervals. Set a shorter interval for the BLE device to be discovered rapidly and set a longer interval to conserve power.

BLEAdvert::setMaxInterval

Description

Set the maximum BLE advertising interval.

Syntax

```
void setMaxInterval(uint16_t minInt_ms);
```

Parameters

minInt_ms: the desired advertisement maximum interval, expressed in milliseconds. The valid values for the interval are from 20ms to 10240ms.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

BLE advertisements will repeat with an interval between the set minimum and maximum intervals. Set a shorter interval for the BLE device to be discovered rapidly and set a longer interval to conserve power.

BLEAdvert::setAdvData**Description**

Set BLE advertising data.

Syntax

```
void setAdvData(BLEAdvertData adData);  
void setAdvData(uint8_t* pData, uint8_t size);
```

Parameters

adData: scan response data formatted in a BLEAdvertData class object

pData: pointer to a byte array containing the required scan response data.

size: number of bytes the scan response data contains, maximum of 31 bytes.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

N/A

BLEAdvert::setScanRspData**Description**

Set BLE scan response data.

Syntax

```
void setScanRspData(BLEAdvertData adData);  
void setScanRspData(uint8_t* pData, uint8_t size);
```

Parameters

adData: scan response data formatted in a BLEAdvertData class object

pData: pointer to a byte array containing the required scan response data.

size: number of bytes the scan response data contains, maximum of 31 bytes.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

N/A

Class BLEAdvertData

BLEAdvertData Class

Description

A class used for managing BLE advertising data.

Syntax

```
class BLEAdvertData
```

Members

Public Constructors	
BLEAdvertData::BLEAdvertData	Constructs a BLEAdvertData object

Public Methods	
BLEAdvertData::clear	Clear all advertising data
BLEAdvertData::addData	Add binary advertising data
BLEAdvertData::addFlags	Add flags to advertising data
BLEAdvertData::addPartialServices	Add partial services to advertising data
BLEAdvertData::addCompleteServices	Add complete services to advertising data
BLEAdvertData::addAppearance	Add device appearance to advertising data
BLEAdvertData::addShortName	Add short device name to advertising data
BLEAdvertData::addCompleteName	Add complete device name to advertising data
BLEAdvertData::parseScanInfo	Parse advertising data received from a scan
BLEAdvertData::hasFlags	Check if received data includes advertising flags
BLEAdvertData::hasUUID	Check if received data includes UUIDs
BLEAdvertData::hasName	Check if received data includes device name
BLEAdvertData::hasManufacturer	Check if received data includes manufacturer data
BLEAdvertData::getAdvType	Get advertising type of received data
BLEAdvertData::getAddrType	Get Bluetooth address type of received data
BLEAdvertData::getAddr	Get Bluetooth address of received data
BLEAdvertData::getRSSI	Get RSSI of received data
BLEAdvertData::getFlags	Get advertising flags of received data
BLEAdvertData::getServiceCount	Get number of advertised services in received data
BLEAdvertData::getServiceList	Get array of advertised services in received data
BLEAdvertData::getName	Get advertised device name in received data
BLEAdvertData::getTxPower	Get advertised transmission power in received data
BLEAdvertData::getAppearance	Get advertised device appearance in received data
BLEAdvertData::getManufacturer	Get advertised manufacturer in received data
BLEAdvertData::getManufacturerDataLength	Get length of manufacturer data in received data
BLEAdvertData::getManufacturerData	Get advertised manufacturer data in received data

BLEAdvertData::BLEAdvertData

Description

Constructs a BLEAdvertData object.

Syntax

```
BLEAdvertData::BLEAdvertData(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

This class is used for managing BLE advertising data for two primary uses. First is to assemble advertising data for broadcasting as advertising packets. Second is to process and split up the advertising data received from a scan into separate types.

BLEAdvertData::clear

Description

Clear all advertising data currently saved in class object.

Syntax

```
void clear(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEAdvertData::addData

Description

Add binary advertising data.

Syntax

```
void addData(const uint8_t* data, uint8_t size);
```

Parameters

data: pointer to array containing desired advertising data.

size: number of bytes in array.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

This function is provided for flexibility in adding BLE advertising data. Other functions should be used for adding advertising data if possible, as this function does not perform any checks on the validity of the data.

BLEAdvertData::addFlags

Description

Add flags to advertising data.

Syntax

```
uint8_t addFlags(uint8_t flags);
```

Parameters

flags: desired flags to add to advertising data. Valid values:

- GAP_ADTYPE_FLAGS_LIMITED
- GAP_ADTYPE_FLAGS_GENERAL
- GAP_ADTYPE_FLAGS_BREDR_NOT_SUPPORTED
- GAP_ADTYPE_FLAGS_SIMULTANEOUS_LE_BREDR_CONTROLLER
- GAP_ADTYPE_FLAGS_SIMULTANEOUS_LE_BREDR_HOST

Returns

Current total size of advertising data.

Example Code

Example: BLEBatteryService

Notes and Warnings

NA

BLEAdvertData::addPartialServices

Description

Add partial list of service UUIDs to advertising data.

Syntax

```
uint8_t addPartialServices(BLEUUID uuid);
```

Parameters

uuid: the desired UUID contained in BLEUUID class object.

Returns

Current total size of advertising data.

Example Code

NA

Notes and Warnings

NA

BLEAdvertData::addCompleteServices**Description**

Add complete list of service UUIDs to advertising data.

Syntax

```
uint8_t addCompleteServices(BLEUUID uuid);  
uint8_t addCompleteServices(uint8_t uuidBitLength);
```

Parameters

uuid: the desired UUID contained in BLEUUID class object.

uuidBitLength: UUID bit length for which a blank entry is to be added. Valid values: 16, 32, 128.

Returns

Current total size of advertising data.

Example Code

Example: BLEBatteryService

Notes and Warnings

uuidBitLength is used when it is desired to add a blank entry to the advertisement data, used to indicate that no services with UUIDs of a certain length are available.

BLEAdvertData::addAppearance

Description

Add device appearance to advertising data.

Syntax

```
uint8_t addAppearance(uint16_t appearance);
```

Parameters

appearance: the desired device appearance.

Returns

Current total size of advertising data.

Example Code

NA

Notes and Warnings

Refer to Bluetooth specifications for a full list of device appearance values.

BLEAdvertData::addShortName

Description

Add shortened device name to advertising data.

Syntax

```
uint8_t addShortName(const char* str);
```

Parameters

str: character string containing desired device name.

Returns

Current total size of advertising data.

Example Code

NA

Notes and Warnings

NA

BLEAdvertData::addCompleteName**Description**

Add complete device name to advertising data.

Syntax

```
uint8_t addCompleteName(const char* str);
```

Parameters

str: character string containing desired device name.

Returns

Current total size of advertising data.

Example Code

Example: BLEBatteryService

Notes and Warnings

NA

BLEAdvertData::parseScanInfo**Description**

Parse advertising data received from a scan.

Syntax

```
void parseScanInfo(T_LE_CB_DATA *p_data);
```

Parameters

p_data: pointer to advertising data received from a Bluetooth scan.

Returns

The function returns nothing.

Example Code

Example: BLEBatteryClient

Notes and Warnings

Advertising data fields of parsed receive data can be access using member functions starting with “has” and “get” .

BLEAdvertData::hasFlags

Description

Check if received data includes advertising flags.

Syntax

```
bool hasFlags(void);
```

Parameters

The function requires no input parameter.

Returns

True if flags are present in received advertising data.

Example Code

NA

Notes and Warnings

NA

BLEAdvertData::hasUUID**Description**

Check if received data includes service UUIDs.

Syntax

```
bool hasUUID(void);
```

Parameters

The function requires no input parameter.

Returns

True if service UUIDs are present in received advertising data.

Example Code

NA

Notes and Warnings

NA

BLEAdvertData::hasName**Description**

Check if received data includes device name.

Syntax

```
bool hasName(void);
```

Parameters

The function requires no input parameter.

Returns

True if device name is present in received advertising data.

Example Code

Example: BLEBatteryClient

Notes and Warnings

NA

BLEAdvertData::hasManufacturer

Description

Check if received data includes manufacturer specific data.

Syntax

```
bool hasManufacturer(void);
```

Parameters

The function requires no input parameter.

Returns

True if manufacturer specific data is present in received advertising data.

Example Code

NA

Notes and Warnings

NA

BLEAdvertData::getAdvType**Description**

Get advertising type of received data.

Syntax

```
T_GAP_ADV_EVT_TYPE getAdvType(void);
```

Parameters

The function requires no input parameter.

Returns

Advertising type of received advertising data.

Example Code

NA

Notes and Warnings

Possible types:

- GAP_ADV_EVT_TYPE_UNDIRECTED
- GAP_ADV_EVT_TYPE_DIRECTED
- GAP_ADV_EVT_TYPE_SCANNABLE
- GAP_ADV_EVT_TYPE_NON_CONNECTABLE
- GAP_ADV_EVT_TYPE_SCAN_RSP

BLEAdvertData::getAddrType**Description**

Get Bluetooth address type of received data.

Syntax

```
T_GAP_REMOTE_ADDR_TYPE getAddrType(void);
```

Parameters

The function requires no input parameter.

Returns

Bluetooth address type of received data.

Example Code

NA

Notes and Warnings

Possible types:

- GAP_REMOTE_ADDR_LE_PUBLIC
- GAP_REMOTE_ADDR_LE_RANDOM

BLEAdvertData::getRSSI

Description

Get received signal strength indicator (RSSI) of received data.

Syntax

```
Int8_t getRSSI(void);
```

Parameters

The function requires no input parameter.

Returns

Received signal strength.

Example Code

NA

Notes and Warnings

NA

BLEAdvertData::getFlags**Description**

Get advertising flags of received data.

Syntax

```
uint8_t getFlags(void);
```

Parameters

The function requires no input parameter.

Returns

Advertising flags present in received advertising data, expressed as a single byte.

Example Code

NA

Notes and Warnings

NA

BLEAdvertData::getServiceCount**Description**

Get number of advertised services in received data.

Syntax

```
uint8_t getServiceCount(void);
```

Parameters

The function requires no input parameter.

Returns

Number of advertised service UUIDs in received data.

Example Code

Example: BLEBatteryClient

Notes and Warnings

NA

BLEAdvertData::getServiceList

Description

Get list of advertised service UUIDs in received data.

Syntax

```
BLEUUID* getServiceList(void);
```

Parameters

The function requires no input parameter.

Returns

Pointer to a BLEUUID array containing all advertised service UUIDs.

Example Code

Example: BLEBatteryClient

Notes and Warnings

NA

BLEAdvertData::getName**Description**

Get advertised device name in received data.

Syntax

```
String getName(void);
```

Parameters

The function requires no input parameter.

Returns

Advertised device name contained in a String class object.

Example Code

Example: BLEBatteryClient

Notes and Warnings

NA

BLEAdvertData::getTxPower**Description**

Get advertised transmission power in received data.

Syntax

```
int8_t getTxPower(void);
```

Parameters

The function requires no input parameter.

Returns

Advertised transmission power.

Example Code

NA

Notes and Warnings

NA

BLEAdvertData::getAppearance

Description

Get advertised device appearance in received data.

Syntax

```
uint16_t getAppearance(void);
```

Parameters

The function requires no input parameter.

Returns

Advertised device appearance.

Example Code

NA

Notes and Warnings

Refer to Bluetooth specifications for full list of device appearance values.

BLEAdvertData::getManufacturer**Description**

Get advertised manufacturer in received data.

Syntax

```
uint16_t getManufacturer(void);
```

Parameters

The function requires no input parameter.

Returns

Advertised manufacturer.

Example Code

NA

Notes and Warnings

Refer to Bluetooth specifications for full list of manufacturer codes.

BLEAdvertData::getManufacturerDataLength**Description**

Get length of manufacturer data in received data.

Syntax

```
uint8_t getManufacturerDataLength(void);
```

Parameters

The function requires no input parameter.

Returns

Number of bytes of manufacturer data present in received advertising data.

Example Code

NA

Notes and Warnings

NA

BLEAdvertData::getManufacturerData

Description

Get manufacturer data in received data.

Syntax

```
uint8_t* getManufacturerData(void);
```

Parameters

The function requires no input parameter.

Returns

Pointer to array containing manufacturer data.

Example Code

NA

Notes and Warnings

NA

Class BLEBeacon

iBeacon Class

Description

A class used for managing iBeacon BLE advertising data.

Syntax

```
class iBeacon
```

Members

Public Constructors	
iBeacon::iBeacon	Create an instance of iBeacon advertising data
Public Methods	
iBeacon::getManufacturerId	Get current manufacturer ID value
iBeacon::getUUID	Get current UUID value
iBeacon::getMajor	Get current Major value
iBeacon::getMinor	Get current Minor value
iBeacon::getRSSI	Get current RSSI value
iBeacon::setManufacturerId	Set manufacturer ID value
iBeacon::setUUID	Set UUID value
iBeacon::setMajor	Set Major value
iBeacon::setMinor	Set Minor value
iBeacon::setRSSI	Set RSSI value
iBeacon::getAdvData	Get current advertising data
iBeacon::getScanRsp	Get current scan response data

altBeacon Class

Description

A class used for managing altBeacon BLE advertising data.

Syntax

```
class altBeacon
```

Members

Public Constructors	
altBeacon::altBeacon	Create an instance of altBeacon advertising data
Public Methods	
altBeacon::getManufacturerId	Get current manufacturer ID value
altBeacon::getUUID	Get current UUID value
altBeacon::getMajor	Get current Major value
altBeacon::getMinor	Get current Minor value
altBeacon::getRSSI	Get current RSSI value
altBeacon::getRSVD	Get current Reserved value
altBeacon::setManufacturerId	Set manufacturer ID value
altBeacon::setUUID	Set UUID value
altBeacon::setMajor	Set Major value
altBeacon::setMinor	Set Minor value
altBeacon::setRSSI	Set RSSI value
altBeacon::setRSVD	Set Reserved value
altBeacon::getAdvData	Get current advertising data
altBeacon::getScanRsp	Get current scan response data

iBeacon::iBeacon

Description

Create an iBeacon object.

Syntax

```
void iBeacon(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Include “BLEBeacon.h” to use this class function.

altBeacon::altBeacon**Description**

Create an altBeacon object.

Syntax

```
void altBeacon(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Include “BLEBeacon.h” to use this class function.

iBeacon::getManufacturerId**altBeacon::getManufacturerId****Description**

Get current Manufacturer ID value.

Syntax

```
uint16_t getManufacturerId(void);
```

Parameters

The function requires no input parameter.

Returns

A 16-bit unsigned integer containing the current Company ID.

Example Code

NA

Notes and Warnings

Refer to <https://www.bluetooth.com/specifications/assigned-numbers/company-identifiers/> for the full list of assigned Bluetooth company identifiers.

iBeacon::getUUID

altBeacon::getUUID

Description

Get the current UUID value.

Syntax

```
void getUUID(uint8_t* UUID);
```

Parameters

UUID: pointer to a 16 element uint8_t array, current UUID will be copied into the array.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

UUID is a 128-bit number used to uniquely identify a beacon. It is commonly expressed as a 32-character hexadecimal string. UUIDs can be generated at <https://www.uuidgenerator.net/>.

iBeacon::getMajor

altBeacon::getMajor

Description

Get current Major value.

Syntax

```
uint16_t getMajor(void);
```

Parameters

The function requires no input parameter.

Returns

A 16-bit unsigned integer containing the current Major value.

Example Code

NA

Notes and Warnings

Major and Minor are values used for customizing beacons. These can be set to any value. Refer to <https://developer.apple.com/ibeacon/> or <https://altbeacon.org/> for more information.

iBeacon::getMinor

altBeacon::getMinor

Description

Get current Minor value.

Syntax

```
uint16_t getMinor(void);
```

Parameters

The function requires no input parameter.

Returns

A 16-bit unsigned integer containing the current Minor value.

Example Code

NA

Notes and Warnings

Major and Minor are values used for customizing beacons. These can be set to any value. Refer to <https://developer.apple.com/ibeacon/> or <https://altbeacon.org/> for more information.

iBeacon::getRSSI

altBeacon::getRSSI

Description

Get the current RSSI value.

Syntax

```
int8_t getRSSI(void);
```

Parameters

The function requires no input parameter.

Returns

An 8-bit signed integer containing the currently set RSSI value.

Example Code

NA

Notes and Warnings

The beacon RSSI value is the received signal strength at 1 meter. This can be used to estimate the distance to the beacon. Refer to <https://developer.apple.com/ibeacon/> or <https://altbeacon.org/> for more information.

iBeacon::setManufacturerId**altBeacon::setManufacturerId****Description**

Set Manufacturer ID value.

Syntax

```
void setManufacturerId(uint16_t id);
```

Parameters

id: desired Manufacturer ID

Returns

The function returns nothing.

Example Code

Example: BLEBeacon

Notes and Warnings

Refer to <https://www.bluetooth.com/specifications/assigned-numbers/company-identifiers/> for the full list of assigned Bluetooth company identifiers.

iBeacon::setUUID

altBeacon::setUUID

Description

Set UUID value.

Syntax

```
void setUUID(uint8_t* UUID);
```

```
void setUUID(const char* UUID);
```

Parameters

uint8_t* UUID: pointer to a 16 element uint8_t array containing the desired UUID

const char* UUID: desired UUID expressed as a character string

Returns

The function returns nothing.

Example Code

Example: BLEBeacon

Notes and Warnings

UUID is a 128-bit number used to uniquely identify a beacon. It is commonly expressed as a 32-character hexadecimal string. UUIDs can be generated at <https://www.uuidgenerator.net/>.

iBeacon::setMajor

altBeacon::setMajor

Description

Set Major value.

Syntax

```
void setMajor(uint16_t major);
```

Parameters

major: desired Major value

Returns

The function returns nothing.

Example Code

Example: BLEBeacon

Notes and Warnings

Major and Minor are values used for customizing beacons. These can be set to any value. Refer to <https://developer.apple.com/ibeacon/> or <https://altbeacon.org/> for more information.

iBeacon::setMinor**altBeacon::setMinor****Description**

Set Minor value.

Syntax

```
void setMinor(uint16_t minor);
```

Parameters

minor: desired Minor value

Returns

The function returns nothing.

Example Code

Example: BLEBeacon

Notes and Warnings

Major and Minor are values used for customizing beacons. These can be set to any value. Refer to <https://developer.apple.com/ibeacon/> or <https://altbeacon.org/> for more information.

iBeacon::setRSSI

altBeacon::setRSSI

Description

Set RSSI value.

Syntax

```
void setRSSI(int8_t RSSI);
```

Parameters

RSSI: desired RSSI value

Returns

The function returns nothing.

Example Code

Example: BLEBeacon

Notes and Warnings

The beacon RSSI value is the received signal strength at 1 meter. This can be used to estimate the distance to the beacon. Refer to <https://developer.apple.com/ibeacon/> or <https://altbeacon.org/> for more information.

iBeacon::getAdvData

altBeacon::getAdvData

Description

Get current beacon advertising data.

Syntax

```
uint8_t* getAdvData(void);
```

Parameters

The function requires no input parameter.

Returns

A uint8_t pointer to the structure containing beacon advertising data.

Example Code

NA

Notes and Warnings

Avoid changing the beacon data through the returned pointer, use the member functions instead.

iBeacon::getScanRsp**altBeacon::getScanRsp****Description**

Get current beacon advertising scan response data.

Syntax

```
uint8_t* getScanRsp(void);
```

Parameters

The function requires no input parameter.

Returns

A uint8_t pointer to the structure containing beacon advertising scan response data.

Example Code

NA

Notes and Warnings

Avoid changing the beacon data through the returned pointer, use the member functions instead.

altBeacon::getRSVD

Description

Get current Reserved value.

Syntax

```
uint8_t getRSVD(void);
```

Parameters

The function requires no input parameter.

Returns

An 8-bit unsigned integer containing the current Reserved value.

Example Code

NA

Notes and Warnings

Reserved for use by the manufacturer to implement special features. The interpretation of this value is to be defined by the manufacturer and is to be evaluated based on the MFG ID value. Refer to <https://altbeacon.org/> for more information.

altBeacon::setRSVD

Description

Set Reserved value.

Syntax

```
void setRSVD(uint8_t rsvd);
```

Parameters

rsvd: desired Reserved value

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Reserved for use by the manufacturer to implement special features. The interpretation of this value is to be defined by the manufacturer and is to be evaluated based on the MFG ID value. Refer to <https://altbeacon.org/> for more information.

Class BLECharacteristic

BLECharacteristic Class

Description

A class used for creating and managing BLE GATT characteristics.

Syntax

```
class BLECharacteristic
```

Members

Public Constructors	
BLEC haracteristic::BLECharacteristic	Constructs a BLECharacteristic object
Public Methods	
BLECharacteristic::setUUID	Set the characteristic UUID
BLECharacteristic::getUUID	Get the characteristic UUID
BLECharacteristic::setBufferLen	Set the size of the internal data buffer
BLECharacteristic::getBufferLen	Get the current size of the internal data buffer
BLECharacteristic::setReadProperty	Get the current size of the internal data bufferSet the characteristic r
BLECharacteristic::setWriteProperty	Set the characteristic write property
BLEC haracteristic::setNotifyProperty	Set the characteristic notify property
BLECha racteristic::setIndicateProperty	Set the characteristic indicate property
BLECharacteristic::setProperties	Set the characteristic properties
BLECharacteristic::getProperties	Get the characteristic properties
BLECharacteristic::readString	Read the characteristic data buffer as a String object
BLECharacteristic::readData8	Read the characteristic data buffer as an unsigned 8-bit integer
BLECharacteristic::readData16	Read the characteristic data buffer as an unsigned 16-bit integer
BLECharacteristic::readData32	Read the characteristic data buffer as an unsigned 32-bit integer
BLECharacteristic::writeString	Write data to the characteristic data buffer as a String object or char
BLECharacteristic::writeData8	Write data to the characteristic data buffer as an unsigned 8-bit integ
BLECharacteristic::writeData16	Write data to the characteristic data buffer as an unsigned 16-bit inte
BLECharacteristic::writeData32	Write data to the characteristic data buffer as an unsigned 16-bit inte
BLECharacteristic::setData	Write data to the characteristic data buffer
BLECharacteristic::getData	Read data from the characteristic data buffer
BLECharacteristic::getDataBuff	Get a pointer to the characteristic data buffer
BLECharacteristic::getDataLen	Get the number of bytes of data in the characteristic data buffer
BLECharacteristic::notify	Send a notification to a connected device
BLECharacteristic::indicate	Send an indication to a connected device
BLEC haracteristic::setUserDescriptor	Add a user description descriptor to characteristic
BLECha racteristic::setFormatDescriptor	Add a data format descriptor to characteristic
BLECharacteristic::Add a data format descriptor to characteristic	Set a user function as a read callback
BLECharacteristic::setWriteCallback	Set a user function as a write callback
BLECharacteristic::setCCCDCallback	Set a user function as a CCCD write callback

BLECharacteristic::BLECharacteristic**Description**

Constructs a BLECharacteristic object.

Syntax

```
BLECharacteristic::BLECharacteristic(BLEUUID uuid);  
BLECharacteristic::BLECharacteristic(const char* uuid);
```

Parameters

uuid: characteristic UUID, expressed as a BLEUUID class object or a character array

Returns

The function returns nothing.

Example Code

Example: BLEUartService

Notes and Warnings

NA

BLECharacteristic::setUUID**Description**

Set the characteristic UUID.

Syntax

```
void setUUID(BLEUUID uuid);
```

Parameters

uuid: the new characteristic UUID, expressed with a BLEUUID class object

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLECharacteristic::getUUID

Description

Get the characteristic UUID.

Syntax

```
BLEUUID getUUID();
```

Parameters

The function requires no input parameter.

Returns

The function returns the characteristic UUID in a BLEUUID class object.

Example Code

NA

Notes and Warnings

NA

BLECharacteristic::setBufferLen

Description

Set the size of the internal data buffer of the characteristic.

Syntax

```
void setBufferLen(uint16_t max_len);
```

Parameters

max_len: number of bytes to resize the internal buffer to

Returns

The function returns nothing.

Example Code

Example: BLEUartService

Notes and Warnings

Characteristic data buffer has a default size of 20 bytes and can be increased up to 230 bytes.

BLECharacteristic::getBufferLen

Description

Get the size of the characteristic internal buffer.

Syntax

```
uint16_t getBufferLen();
```

Parameters

The function requires no input parameter.

Returns

The function returns the currently set internal buffer size.

Example Code

NA

Notes and Warnings

NA

BLECharacteristic::setReadProperty

Description

Set the characteristic read property.

Syntax

```
void setReadProperty(bool value);
```

Parameters

value: TRUE to allow connected devices to read characteristic data

Returns

The function returns nothing.

Example Code

Example: BLEBatteryService

Notes and Warnings

NA

BLECharacteristic::setWriteProperty

Description

Set the characteristic write property.

Syntax

```
void setWriteProperty(bool value);
```

Parameters

value: TRUE to allow connected devices to write characteristic data

Returns

The function returns nothing.

Example Code

Example: BLEUartService

Notes and Warnings

NA

BLECharacteristic::setNotifyProperty**Description**

Set the characteristic notify property.

Syntax

```
void setNotifyProperty(bool value);
```

Parameters

value: TRUE to allow connected devices to enable receiving characteristic data notifications.

Returns

The function returns nothing.

Example Code

Example: BLEUartService

Notes and Warnings

Enabling this property will add a CCCD descriptor to the characteristic.

BLECharacteristic::setIndicateProperty**Description**

Set the characteristic indicate property.

Syntax

```
void setIndicateProperty(bool value);
```

Parameters

value: TRUE to allow connected devices to enable receiving characteristic data indications.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Enabling this property will add a CCCD descriptor to the characteristic.

BLECharacteristic::setProperties

Description

Set the characteristic properties.

Syntax

```
void setProperties(uint8_t value);
```

Parameters

value: desired characteristic properties

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLECharacteristic::getProperties

Description

Get the currently set characteristic properties.

Syntax

```
uint8_t getProperties();
```

Parameters

The function requires no input parameter.

Returns

The function returns the currently set characteristic properties expressed as an unsigned 8-bit integer.

Example Code

NA

Notes and Warnings

NA

BLECharacteristic::readString

Description

Read the data in the characteristic internal buffer, expressed as a String class object.

Syntax

```
String readString();
```

Parameters

The function requires no input parameter.

Returns

The function returns the data in the characteristic internal buffer expressed as a String class object.

Example Code

Example: BLEUartService

Notes and Warnings

Non-ASCII data may result in unexpected characters in the string.

BLECharacteristic::readData8

Description

Read the data in the characteristic internal buffer, expressed as an unsigned 8-bit integer.

Syntax

```
uint8_t readData8();
```

Parameters

The function requires no input parameter.

Returns

The function returns the data in the characteristic internal buffer expressed as a uint8_t value.

Example Code

NA

Notes and Warnings

NA

BLECharacteristic::readData16

Description

Read the data in the characteristic internal buffer, expressed as an unsigned 16-bit integer.

Syntax

```
uint16_t readData16();
```

Parameters

The function requires no input parameter.

Returns

The function returns the data in the characteristic internal buffer expressed as a uint16_t value.

Example Code

NA

Notes and Warnings

NA

BLECharacteristic::readData32**Description**

Read the data in the characteristic internal buffer, expressed as an unsigned 32-bit integer.

Syntax

```
uint32_t readData32();
```

Parameters

The function requires no input parameter.

Returns

The function returns the data in the characteristic internal buffer expressed as a uint32_t value.

Example Code

NA

Notes and Warnings

NA

BLECharacteristic::readData32

Description

Write data to the characteristic data buffer as a String object or character array.

Syntax

```
bool writeString(String str);  
bool writeString(const char* str);
```

Parameters

str: the data to write to the characteristic buffer, expressed as a String class object or a char array.

Returns

The function returns TRUE if write data is successful.

Example Code

Example: BLEUartService

Notes and Warnings

NA

BLECharacteristic::writeData8

Description

Write data to the characteristic data buffer as an unsigned 8-bit integer.

Syntax

```
bool writeData8(uint8_t num);
```

Parameters

num: the data to write to the characteristic buffer expressed as an unsigned 8-bit integer.

Returns

The function returns TRUE if write data is successful.

Example Code

Example: BLEBatteryService

Notes and Warnings

NA

BLECharacteristic::writeData16**Description**

Write data to the characteristic data buffer as an unsigned 16-bit integer.

Syntax

```
bool writeData16(uint16_t num);
```

Parameters

num: the data to write to the characteristic buffer expressed as an unsigned 16-bit integer.

Returns

The function returns TRUE if write data is successful.

Example Code

NA

Notes and Warnings

NA

BLECharacteristic::writeData32

Description

Write data to the characteristic data buffer as a 32-bit integer.

Syntax

```
bool writeData32(uint32_t num);
```

```
bool writeData32(int num);
```

Parameters

num: the data to write to the characteristic buffer expressed as a 32-bit integer.

Returns

The function returns TRUE if write data is successful.

Example Code

NA

Notes and Warnings

NA

BLECharacteristic::setData

Description

Write data to the characteristic data buffer.

Syntax

```
bool setData(uint8_t* data, uint16_t datalen);
```

Parameters

data: pointer to byte array containing desired data

datalen: number of bytes of data to write

Returns

The function returns TRUE if write data is successful.

Example Code

NA

Notes and Warnings

NA

BLECharacteristic::getData

Description

Read data from the characteristic data buffer.

Syntax

```
uint16_t getData(uint8_t* data, uint16_t datalen);
```

Parameters

data: pointer to byte array to save data read from buffer

datalen: number of bytes of data to read

Returns

The function returns the number of bytes read.

Example Code

NA

Notes and Warnings

If the data buffer contains less data than requested, it will only read the available number of bytes of data.

BLECharacteristic::getDataBuff

Description

Get a pointer to the characteristic data buffer.

Syntax

```
uint8_t* getDataBuff();
```

Parameters

The function requires no input parameter.

Returns

The function returns a pointer to the uint8_t array used as the characteristic internal buffer.

Example Code

NA

Notes and Warnings

NA

BLECharacteristic::getDataLen

Description

Get the number of bytes of data in the characteristic data buffer.

Syntax

```
uint16_t getDataLen
```

Parameters

The function requires no input parameter.

Returns

The function returns the number of bytes of data in the internal buffer.

Example Code

NA

Notes and Warnings

NA

BLECharacteristic::notify**Description**

Send a notification to a connected device.

Syntax

```
void notify(uint8_t conn_id);
```

Parameters

conn_id: the connection ID for the device to send a notification to.

Returns

The function returns nothing.

Example Code

Example: BLEUartService

Notes and Warnings

NA

BLECharacteristic::indicate**Description**

Send an indication to a connected device.

Syntax

```
void indicate(uint8_t conn_id);
```

Parameters

conn_id: the connection ID for the device to send an indication to.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLECharacteristic::setUserDescriptor

Description

Add a user description descriptor attribute (UUID 0x2901) to the characteristic.

Syntax

```
void setUserDescriptor(const char* description);
```

Parameters

description: the desired user description string expressed in a char array.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLECharacteristic::setFormatDescriptor**Description**

Add a data format descriptor attribute (UUID 0x2904) to the characteristic.

Syntax

```
void setFormatDescriptor(uint8_t format, uint8_t exponent, uint16_t unit, uint16_t description);
```

Parameters

format: refer to <https://www.bluetooth.com/specifications/assigned-numbers/format-types/> for the valid values and associated format types.

exponent: base-10 exponent to be applied to characteristic data value.

unit: refer to <https://btprodspecificationrefs.blob.core.windows.net/assigned-values/16-bit%20UUID%20Numbers%20Document.pdf> for the valid values and associated units.

descriptor: refer to <https://www.bluetooth.com/specifications/assigned-numbers/gatt-namespace-descriptors/> for the valid values and associated descriptors.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLECharacteristic::setReadCallback**Description**

Set a user function to be called when the characteristic data is read by a connected device.

Syntax

```
void setReadCallback(void (*fCallback) (BLECharacteristic* chr, uint8_t conn_id));
```

Parameters

fCallback: A user callback function that returns void and takes two arguments.

chr: pointer to BLECharacteristic object containing data read

conn_id: connection ID of connected device that read characteristic data

Returns

The function returns nothing.

Example Code

Example: BLEBatteryService

Notes and Warnings

NA

BLECharacteristic::setWriteCallback

Description

Set a user function to be called when the characteristic data is written by a connected device.

Syntax

```
void setWriteCallback(void (*fCallback) (BLECharacteristic* chr, uint8_t conn_id));
```

Parameters

fCallback: A user callback function that returns void and takes two arguments.

chr: pointer to BLECharacteristic object containing written data.

conn_id: connection ID of connected device that wrote characteristic data.

Returns

The function returns nothing.

Example Code

Example: BLEUartService

Notes and Warnings

NA

BLECharacteristic::setCCCDCallback**Description**

Set a user function to be called when a connected device modifies the characteristic CCCD to enable or disable notifications or indications.

Syntax

```
void setCCCDCallback(void (*fCallback) (BLECharacteristic* chr, uint8_t conn_id, uint16_t ccc_bits));
```

Parameters

fCallback: A user callback function that returns void and takes two arguments.

chr: pointer to BLECharacteristic object containing written data.

conn_id: connection ID of connected device that wrote characteristic data.

ccc_bits: the new CCCD data bits after modification by the connected device

Returns

The function returns nothing.

Example Code

Example: BLEUartService

Notes and Warnings

NA

Class BLEClient

BLEClient Class

Description

A class used for discovering and accessing BLE GATT services on a connected remote device.

Syntax

```
class BLEClient
```

Members

Public Constructors
No public constructor is available for this class. You can get a pointer to an instance of this class using BLEDevice::addClient().

Public Methods	
BLEClient::connected	Check if the corresponding remote device for the client is connected
BLEClient::discoverServices	Start service discovery process for connected device
BLEClient::discoveryDone	Determine if service discovery process has been completed
BLEClient::printServices	Format and print discovered services to serial port
BLEClient::getService	Get a specific service on the remote device
BLEClient::getConnId	
BLEClient::getClientId	Get corresponding client ID
BLEClient::setDisconnectCallback	Set a user function to be called when the remote device is disconnected

BLEClient::connected

Description

Check if the remote device associated with the client is still connected.

Syntax

```
bool connected();
```

Parameters

The function requires no input parameter.

Returns

The function returns TRUE if the remote device is connected.

Example Code

NA

Notes and Warnings

NA

BLEClient::discoverServices**Description**

Start the service discovery process for the connected remote device.

Syntax

```
void discoverServices();
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: BLEUartClient

Notes and Warnings

NA

BLEClient::discoveryDone

Description

Check if the service discovery process has been completed.

Syntax

```
bool discoveryDone();
```

Parameters

The function requires no input parameter.

Returns

The function returns TRUE if the service discovery process has been completed successfully, FALSE if the service discovery process failed, is still in progress, or has yet to start.

Example Code

Example: BLEUartClient

Notes and Warnings

NA

BLEClient::printServices

Description

Print out a formatted list of discovered services to the serial port.

Syntax

```
void printServices();
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEClient::getService**Description**

Get a service with the specified UUID on the remote device.

Syntax

```
BLERemoteService* getService(const char* uuid);
```

```
BLERemoteService* getService(BLEUUID uuid);
```

Parameters

uuid: the desired service UUID, expressed as a character array or a BLEUUID object.

Returns

The function returns the found service as a BLERemoteService object pointer, otherwise nullptr is returned if a service with the UUID is not found.

Example Code

Example: BLEUartClient

Notes and Warnings

NA

BLEClient::getConnId

Description

Get the connection ID associated with the remote device.

Syntax

```
uint8_t getConnId;
```

Parameters

The function requires no input parameter.

Returns

The function returns the connection ID for the connected remote device.

Example Code

NA

Notes and Warnings

NA

BLEClient::getClientId

Description

Get the client ID for the BLEClient object.

Syntax

```
T_CLIENT_ID getClientId();
```

Parameters

The function requires no input parameter.

Returns

The function returns the BLEClient object's client ID.

Example Code

NA

Notes and Warnings

The client ID is used when calling internal GATT client API.

BLEClient::setDisconnectCallback**Description**

Set a user function as a callback function when the remote device is disconnected.

Syntax

```
void setDisconnectCallback(void (*fCallback) (BLEClient* client));
```

Parameters

fCallback: A user callback function that returns void and takes one argument.

client: A pointer to the BLEClient object corresponding to the disconnected remote device

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

The user callback function will be called after the remote device has disconnected, before the characteristics, services and client associated with the remote device are deleted.

Class BLEConnect

BLEConnect Class

Description

A class used for managing BLE connection settings.

Syntax

```
class BLEConnect
```

Members

Public Constructors
No public constructor is available as this class is intended to be a singleton class. You can get a pointer to this class using BLEDevice::configConnection.

Public Methods	
BLEConnect::connect	Connect to a target BLE device
BLEConnect::disconnect	Disconnect from a target BLE device
BLEConnect::setScanInterval	Set the BLE scanning interval when connecting
BLEConnect::setScanWindow	Set the BLE scanning window when connecting
BLEConnect::setConnInterval	Set the BLE connection interval duration
BLEConnect::setConnLatency	Set the BLE connection slave latency
BLEConnect::setConnTimeout	Set the BLE connection timeout value
BLEConnect::updateConnParams	Send new BLE connection parameters to a connected device
BLEConnect::getConnInfo	Get connection information
BLEConnect::getConnAddr	Get the Bluetooth address for a certain connection
BLEConnect::getConnId	Get the connection ID for a certain device

BLEConnect::connect

Description

Connect to a target BLE device.

Syntax

```
bool connect(char* btAddr, T_GAP_REMOTE_ADDR_TYPE destAddrType, uint16_t scanTimeout);
```

```
bool connect(uint8_t (&btAddr)[6], T_GAP_REMOTE_ADDR_TYPE destAddrType, uint16_t scanTimeout);  
bool connect(BLEAdvertData targetDevice, uint16_t scanTimeout);  
bool connect(BLEAddr destAddr, T_GAP_REMOTE_ADDR_TYPE destAddrType, uint16_t scanTimeout);
```

Parameters

char* btAddr: target device Bluetooth address expressed as a character string.

uint8_t (&btAddr): target device Bluetooth address contained in a 6 byte array.

destAddr: target device Bluetooth address contained in BLEAddr class object.

targetDevice: advertising data packet scanned from target device.

destAddrType: Bluetooth address type of target device. Valid values:

–GAP_REMOTE_ADDR_LE_PUBLIC

–GAP_REMOTE_ADDR_LE_RANDOM

scan timeout: duration in milliseconds for which to look for target device before giving up.

Returns

True if connection successful, false if connection failed.

Example Code

Example: BLEBatteryClient

Notes and Warnings

NA

BLEConnect::disconnect

Description

Disconnect from a target BLE device.

Syntax

```
bool disconnect(uint8_t connId);
```

Parameters

connId: connection ID for target device.

Returns

True if operation successful, false if otherwise.

Example Code

NA

Notes and Warnings

NA

BLEConnect::setScanInterval

Description

Set the BLE scan interval when searching for a target device to connect to.

Syntax

```
void setScanInterval(uint16_t scanInt_ms);
```

Parameters

scanInt_ms: scan interval in milliseconds. Value range of 3 to 10240.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEConnect::setScanWindow

Description

Set the BLE scan window when searching for a target device to connect to.

Syntax

```
void setScanWindow(uint16_t scanWindow_ms);
```

Parameters

scanWindow_ms: scan window in milliseconds. Value range of 3 to 10240.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEConnect::setConnInterval

Description

Set the BLE connection interval value.

Syntax

```
void setConnInterval(uint16_t min_ms, uint16_t max_ms);
```

Parameters

min_ms: minimum acceptable connection interval in milliseconds. Value range of 8 to 4000.

max_ms: maximum acceptable connection interval in milliseconds. Value range of 8 to 4000.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

The BLE connection interval defines the period between successive connection events between a connected central and peripheral device. Even if there is no data to exchange, a connection event is required to maintain the connection. max_ms should be larger than or equal to min_ms.

BLEConnect::setConnLatency

Description

Set the BLE connection slave latency value.

Syntax

```
void setConnLatency(uint16_t latency);
```

Parameters

latency: Connection slave latency value. Value range of 0 to 499.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

The BLE connection slave latency defines the number of successive connection events a connected peripheral device can ignore without being considered as disconnected by the central device.

BLEConnect::setConnTimeout**Description**

Set the BLE connection timeout value.

Syntax

```
void setConnTimeout(uint16_t timeout_ms);
```

Parameters

timeout_ms: connection timeout in milliseconds. Value range of 100 to 32000.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

The BLE connection timeout defines the duration after a failed connection events before a peripheral or central device considers the connection broken.

BLEConnect::updateConnParams**Description**

Update a connected device with new connection parameters.

Syntax

```
void updateConnParams(uint8_t conn_id);
```

Parameters

conn_id: connection ID of target device to update connection parameters.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Update a connected device with previously set connection interval, slave latency and timeout values. The connected device may reject the new values if it is unable to conform to them.

BLEConnect::getConnInfo

Description

Get connection information.

Syntax

```
bool getConnInfo(uint8_t connId, T_GAP_CONN_INFO *pConnInfo);
```

Parameters

connId: connection ID to get connection information from.

pConnInfo: pointer to T_GAP_CONN_INFO structure to store obtained connection information.

Returns

True if operation success, false if operation failed.

Example Code

NA

Notes and Warnings

NA

BLEConnect::getConnAddr**Description**

Get the Bluetooth address for a certain connection.

Syntax

```
bool getConnAddr(uint8_t connId, uint8_t* addr, uint8_t* addrType);
```

Parameters

connId: connection ID to get address information for

addr: pointer to 6 byte array to store retrieved Bluetooth address

addrType: pointer to uint8_t variable to store retrieved Bluetooth address type

Returns

True if operation success, false if operation failed.

Example Code

NA

Notes and Warnings

NA

BLEConnect::getConnId**Description**

Get the connection ID for a certain device.

Syntax

```
int8_t getConnId(char* btAddr, uint8_t addrType);
```

```
int8_t getConnId(uint8_t* btAddr, uint8_t addrType);
```

```
int8_t getConnId(BLEAdvertData targetDevice);
```

Parameters

char* btAddr: target device Bluetooth address expressed as a character string.

uint8_t* btAddr: pointer to a 6 byte array containing target device Bluetooth address.

targetDevice: advertising data packet scanned from target device.

addrType: Bluetooth address type of target device. Valid values:

–GAP_REMOTE_ADDR_LE_PUBLIC

–GAP_REMOTE_ADDR_LE_RANDOM

Returns

The function returns the requested connection ID. Returns -1 if failed to obtain connection ID.

Example Code

Example: BLEBatteryClient

Notes and Warnings

NA

Class BLEDevice

BLEDevice Class

Description

A class used for general control and management of BLE functions.

Syntax

class BLEDevice

Members

Public Constructors
The public constructor should not be used as this class is intended to be a singleton class. Access member functions using the object instance named BLE.

Public Methods	
BLEDevice::init	Allocate resources required for BLE functionality
BLEDevice::deinit	Free resources used by BLE functionality
BLEDevice::connected	Check if a BLE device is connected
BLEDevice::setDeviceName	Set BLE GAP device name
BLEDevice::setDeviceAppearance	Set BLE GAP device appearance
BLEDevice::configAdvert	Configure BLE advertising parameters
BLEDevice::configScan	Configure BLE scan parameters
BLEDevice::setScanCallback	Set callback function for BLE scans
BLEDevice::beginCentral	Start BLE stack in central mode
BLEDevice::beginPeripheral	Start BLE stack in peripheral mode
BLEDevice::end	Stop BLE stack
BLEDevice::configServer	Configure BLE stack for services
BLEDevice::addService	Add a service to the BLE stack
BLEDevice::configClient	Configure BLE stack for clients
BLEDevice::addClient	Add a client to the BLE stack
BLEDevice::getLocalAddr	Get local device Bluetooth address

BLEDevice::init**Description**

Allocate resources required for BLE functionality.

Syntax

```
void init(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: BLEBatteryService

Notes and Warnings

Call this member function first before using any other member functions in the BLEDevice class.

BLEDevice::deinit

Description

Free up resources used for BLE functionality.

Syntax

```
void deinit(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Call this member function last after all other BLE operations are stopped.

BLEDevice::connected

Description

Check if a BLE device is connected.

Syntax

```
bool connected(void);
```

Parameters

The function requires no input parameter.

Returns

TRUE if another BLE device is connected, FALSE if no BLE device is connected.

Example Code

NA

Notes and Warnings

NA

BLEDevice::setDeviceName**Description**

Set the BLE GAP device name.

Syntax

```
void setDeviceName(String devName);
```

Parameters

devName: desired device name contained in an Arduino String object

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

The GAP device name has a maximum length of 39 characters. Other devices can see this name after a BLE connection is established. This name is separate and different from the device name sent in a BLE advertisement, the names should be the same but are not required.

BLEDevice::setDeviceAppearance

Description

Set the BLE GAP device appearance.

Syntax

```
void setDeviceAppearance(uint16_t devAppearance);
```

Parameters

devAppearance: desired device appearance expressed as a 16-bit unsigned integer.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Refer to Bluetooth SIG assigned device appearances at <https://www.bluetooth.com/specifications/gatt/characteristics/>.

BLEDevice::configAdvert

Description

Configure BLE advertising parameters.

Syntax

```
BLEAdvert* configAdvert(void);
```

Parameters

The function requires no input parameter.

Returns

A pointer to a BLEAdvert class instance for configuring BLE advertising parameters.

Example Code

Example: BLEBatteryService

Notes and Warnings

Use this member function instead of creating a BLEAdvert class instance manually.

BLEDevice::configScan**Description**

Configure BLE scanning parameters.

Syntax

```
BLEScan* configScan(void);
```

Parameters

The function requires no input parameter.

Returns

A pointer to a BLEScan class instance for configuring BLE scanning parameters.

Example Code

Example: BLEScan

```
#include "BLEDevice.h"

#include "BLEScan.h"

int dataCount = 0;

void scanFunction(T_LE_CB_DATA* p_data) {
    printf("\nScan Data %drn" , ++dataCount);
    BLE.configScan()->printScanInfo(p_data);
}

void setup() {
    BLE.init();

    BLE.configScan()->setScanMode(GAP_SCAN_MODE_ACTIVE);
    BLE.configScan()->setScanInterval(500); // Start a scan every 500ms
    BLE.configScan()->setScanWindow(250); // Each scan lasts for 250ms
    // Provide a callback function to process scan data.
    // If no function is provided, default BLEScan::printScanInfo is used
    BLE.setScanCallback(scanFunction);
    BLE.beginCentral(0);
    BLE.configScan()->startScan(5000); // Repeat scans for 5 seconds, then stop
}

void loop() {
}
```

Notes and Warnings

Use this member function instead of creating a BLEScan class instance manually.

BLEDevice::setScanCallback

Description

Set a callback function for processing BLE scan results.

Syntax


```
void setScanCallback(void (scanCB)(T_LE_CB_DATA));
```

Parameters

scanCB: a function that returns nothing and takes in a scan data pointer of type T_LE_CB_DATA*

Returns

The function returns nothing.

Example Code

Example: BLEScan

Notes and Warnings

Use this member function to set a callback function that will be called for each BLE device scan result found.

BLEDevice::beginCentral

Description

Start the BLE stack in central mode.

Syntax

```
void beginCentral(uint8_t connCount);
```

Parameters

connCount: maximum number of allowed connected devices. If no argument is provided, default to maximum allowed connected devices for specific board.

Returns

The function returns nothing.

Example Code

Example: BLEScan

The function returns nothing.

Notes and Warnings

Use this member function to start the device in BLE central mode, after other BLE parameters are set correctly.

BLEDevice::beginPeripheral

Description

Start the BLE stack in peripheral mode.

Syntax

```
void beginPeripheral(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: BLEBatteryService

Notes and Warnings

Use this member function to start the device in BLE peripheral mode, after other BLE parameters are set correctly.

BLEDevice::end

Description

Stop the BLE stack.

Syntax

```
void end(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Use this member function to stop the device operating in either BLE peripheral mode or BLE central mode.

BLEDevice::configServer**Description**

Configure the BLE stack for services.

Syntax

```
void configServer(uint8_t maxServiceCount);
```

Parameters

maxServiceCount: Maximum number of services that will run on the device

Returns

The function returns nothing.

Example Code

Example: BLEBatteryService

Notes and Warnings

Use this member function before adding any service to the BLE stack.

BLEDevice::addService

Description

Add a new service to the BLE stack.

Syntax

```
void addService(BLEService& newService);
```

Parameters

newService: the service to be added, defined using a BLEService class object.

Returns

The function returns nothing.

Example Code

Example: BLEBatteryService

Notes and Warnings

N/A

BLEDevice::configClient

Description

Configure the BLE stack for clients.

Syntax

```
void configClient();
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: BLEBatteryClient

Notes and Warnings

Use this member function before adding any client to the BLE stack.

BLEDevice::addClient**Description**

Add a new client to the BLE stack.

Syntax

```
BLEClient* addClient(uint8_t connId);
```

Parameters

connId: the connection ID of the connected device to create a client for.

Returns

The function returns a pointer to a BLEClient class object, corresponding to the device with the specified connection ID, which can be used to access the services and characteristics on the connected device.

Example Code

Example: BLEBatteryClient

Notes and Warnings

Only one client should be added per connected device.

The BLEClient object and any service, characteristic, descriptor associated with the connected device will be deleted when the device is disconnected.

BLEDevice::getLocalAddr

Description

Get local device Bluetooth address.

Syntax

```
void getLocalAddr(uint8_t (&addr)[GAP_BD_ADDR_LEN]);
```

Parameters

addr: 6 byte array to store local device Bluetooth address.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Local device address is only available after starting in central or peripheral mode. This function will return all zeros for the address if central or peripheral mode is not in operation.

Class BLEHIDDevice

BLEHIDDevice Class

Description

A class used for creating and managing HID over GATT Profile (HOGP) services.

Syntax

class BLEHIDDevice

Members

Public Constructors
The public constructor should not be used as this class is intended to be a singleton class. Access member functions using the object instance named BLEHIDDev.

Public Methods	
BLEHIDDevice::init	Initialize the HID Device Profile by creating the required services
BLEHIDDevice::setNumOutputReport	Configure the number of HID output reports
BLEHIDDevice::setNumInputReport	Configure the number of HID input reports
BLEHIDDevice::setReportMap	Configure the HID report map
BLEHIDDevice::inputReport	Send a HID input report
BLEHIDDevice::setOutputReportCallback	Set a user callback function for receiving HID output reports
BLEHIDDevice::bootKeyboardReport	Send a HID boot keyboard input report
BLEHIDDevice::setHidInfo	Set HID info of the HID service
BLEHIDDevice::setBattLevel	Set battery level info of the Battery service
BLEHIDDevice::setPNPInfo	Set PNP information of the Device Information service
BLEHIDDevice::setManufacturerString	Set manufacturer information of the Device Information service
BLEHIDDevice::setModelString	Set model information of the Device Information service
BLEHIDDevice::hidService	Get reference to HID service
BLEHIDDevice::devInfoService	Get reference to Device Information service
BLEHIDDevice::battService	Get reference to Battery service

BLEHIDDevice::init

Description

Initialize the HID Device profile by creating the required services.

Syntax

void init(void);

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: BLEHIDGamepad

Notes and Warnings

The HID Device object should be initialized before any HID reports can be sent.

BLEHIDDevice::setNumOutputReport

Description

Configure the number of HID output reports.

Syntax

```
void setNumOutputReport (uint8_t numOutputReports);
```

Parameters

numOutputReports: number of output reports

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

The number of output reports should be configured before BLEHIDDevice init() function is called.

BLEHIDDevice::setNumInputReport

Description

Configure the number of HID input reports.

Syntax

```
void setNumInputReport (uint8_t numInputReports);
```

Parameters

numInputReports: number of input reports

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

The number of input reports should be configured before BLEHIDDevice init() function is called.

BLEHIDDevice::setReportMap**Description**

Configure the HID report map characteristic with a HID report descriptor.

Syntax

```
void setReportMap (uint8_t* report_map, uint16_t len);
```

Parameters

report_map: pointer to HID report descriptor

len: HID report descriptor length in bytes

Returns

The function returns nothing.

Example Code

Example: BLEHIDGamepad

Notes and Warnings

The HID report map characteristic can only be configured after BLEHIDDevice init() function is called.

BLEHIDDevice::inputReport

Description

Send a HID input report.

Syntax

```
void inputReport (uint8_t reportID, uint8_t* data, uint16_t len, uint8_t conn_id);
```

Parameters

reportID: HID report ID of input report

data: pointer to HID input report data to send

len: length of HID input report data in bytes

conn_id: connection ID of device to send HID report to

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

HID input reports can only be sent after BLEHIDDevice init() function has been called.

BLEHIDDevice::setOutputReportCallback

Description

Set a user callback function for receiving HID output report data.

Syntax

```
void setOutputReportCallback (uint8_t reportID, void (*fCallback) (BLECharacteristic* chr, uint8_t conn_id));
```

Parameters

reportID: HID report ID of output report to link callback function with

chr: BLECharacteristic class object containing received HID output report data

conn_id: connection ID of device which sent HID report data

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Setting a user callback function for output reports can only occur after BLEHIDDevice init() function has been called.

BLEHIDDevice::bootKeyboardReport**Description**

Send a HID boot keyboard input report.

Syntax

```
void bootKeyboardReport (uint8_t* data, uint16_t len, uint8_t conn_id);
```

Parameters

data: pointer to HID input report data to send

len: length of HID input report data in bytes

conn_id: connection ID of device to send HID report to

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

By default, the HID service Protocol Mode characteristic has boot mode disabled. To send boot keyboard input reports, the Protocol Mode characteristic needs to have boot mode enabled.

BLEHIDDevice::setHidInfo

Description

Set data of the HID Info characteristic of the HID service.

Syntax

```
void setHidInfo (uint16_t bcd, uint8_t country, uint8_t flags);
```

Parameters

bcd: 16-bit unsigned integer representing version number of base USB HID Specification implemented by HID Device

country: 8-bit integer identifying country HID Device hardware is localized for. Most hardware is not localized (value 0x00).

flags: Bit flags indicating remote-wake capability and advertising when bonded but not connected.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

For detailed information on the characteristic, refer to Bluetooth SIG HID Service specifications.

BLEHIDDevice::setBattLevel**Description**

Set battery level data of the Battery service.

Syntax

```
void setBattLevel (uint8_t level);
```

Parameters

level: battery level expressed as % of full charge

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Battery level is set to 100% by default. For detailed information refer to Bluetooth SIG Battery service specifications.

BLEHIDDevice::setPNPInfo**Description**

Set PNP data of the Device Information service.

Syntax

```
void setPNPInfo (uint8_t sig, uint16_t vid, uint16_t pid, uint16_t version);
```

Parameters

sig: The Vendor ID Source field designates which organization assigned the value used in the Vendor ID field value.

vid: The Vendor ID field is intended to uniquely identify the vendor of the device.

pid: The Product ID field is intended to distinguish between different products made by the vendor.

version: The Product Version field is a numeric expression identifying the device release number in Binary-Coded Decimal.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

By default, sig and vid are configured to indicate Realtek as the vendor. For detailed information refer to Bluetooth SIG Device Information service specifications.

BLEHIDDevice::setManufacturerString

Description

Set manufacturer information of the Device Information service.

Syntax

```
void setManufacturerString (const char* manufacturer);
```

Parameters

manufacturer: pointer to character string containing manufacturer name info.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Manufacturer is set to “Realtek” by default. For detailed information refer to Bluetooth SIG Device Information service specifications.

BLEHIDDevice::setModelString**Description**

Set model information of the Device Information service.

Syntax

```
void setModelString (const char* model);
```

Parameters

model: pointer to character string containing device model info.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Model is set to “Ameba_BLE_HID” by default. For detailed information refer to Bluetooth SIG Device Information service specifications.

BLEHIDDevice::hidService**Description**

Get reference to HID service

Syntax

```
BLEService& hidService ();
```

Parameters

The function requires no input parameter.

Returns

The function returns a reference to the BLEService class object for the HID service.

Example Code

Example: BLEHIDMouse

Notes and Warnings

NA

BLEHIDDevice::devInfoService

Description

Get reference to Device Information service

Syntax

```
BLEService& devInfoService ();
```

Parameters

The function requires no input parameter.

Returns

The function returns a reference to the BLEService class object for the Device Information service.

Example Code

Example: BLEHIDMouse

Notes and Warnings

NA

BLEHIDDevice::battService

Description

Get reference to Battery service

Syntax

```
BLEService& battService ();
```

Parameters

The function requires no input parameter.

Returns

The function returns a reference to the BLEService class object for the Battery service.

Example Code

Example: BLEHIDMouse

Notes and Warnings

NA

Class BLEHIDGamepad

BLEHIDGamepad Class

Description

A class used for creating and managing a BLE HID Gamepad.

Syntax

```
class BLEHIDGamepad
```

Members

Public Constructors	
BLEHIDGame pad::BLEHIDGamepad	Constructs a BLEHIDGamepad object
Public Methods	
BLEHIDGamepad::setReportID	Set HID report ID for the HID Gamepad
BLEHIDGamepad::gamepadReport	Send a HID Gamepad report
BLEHIDGamepad::buttonPress	Send a HID Gamepad report indicating buttons pressed
BLEHIDGamepad::buttonRelease	Send a HID Gamepad report indicating buttons released
BLEHIDGamepad::buttonReleaseAll	Send a HID Gamepad report indicating no buttons pressed
BLEHIDGamepad::setHat	Send a HID Gamepad report indicating hat switch position
BLEHIDGamepad::setAxes	Send a HID Gamepad report indicating position of all axes
BLEHIDGamepad::setLeftStick	Send a HID Gamepad report indicating position of axes corresponding to left analog stick
BLEHIDGamepad::setRightStick	Send a HID Gamepad report indicating position of axes corresponding to right analog stick
BLEHIDGamepad::setTriggers	Send a HID Gamepad report indicating position of axes corresponding to triggers

BLEHIDGamepad::BLEHIDGamepad

Description

Constructs a BLE object

Syntax

```
BLEHIDGamepad::BLEHIDGamepad();
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: BLEHIDGamepad

Notes and Warnings

By default, the BLEHIDGamepad class assumes the HID report descriptor implements a gamepad device with 16 buttons, 6 16-bit axes and an 8-direction hat switch. This class will not work if a different gamepad report descriptor is implemented.

BLEHIDGamepad::setReportID

Description

Set HID report ID for the HID Gamepad.

Syntax

```
void setReportID (uint8_t reportID);
```

Parameters

reportID: The report ID for the gamepad device, corresponding to the HID report descriptor.

Returns

The function returns nothing.

Example Code

Example: BLEHIDGamepad

Notes and Warnings

HID report ID should start at 1. Some systems may consider a report ID of 0 as invalid.

BLEHIDGamepad::gamepadReport

Description

Send a HID Gamepad report.

Syntax

```
void gamepadReport (hid_gamepad_report_t* report);  
void gamepadReport (uint16_t buttons, uint8_t hat, int16_t x, int16_t y, int16_t z, int16_t Rz, int16_t Rx, int16_t Ry);
```

Parameters

report: pointer to gamepad report structure containing data on all inputs

buttons: bitmap indicating state of each button. 1 = pressed, 0 = released.

hat: position of hat switch. Valid values:

–GAMEPAD_HAT_CENTERED = 0

–GAMEPAD_HAT_UP = 1

–GAMEPAD_HAT_UP_RIGHT = 2

–GAMEPAD_HAT_RIGHT = 3

–GAMEPAD_HAT_DOWN_RIGHT = 4

–GAMEPAD_HAT_DOWN = 5

–GAMEPAD_HAT_DOWN_LEFT = 6

–GAMEPAD_HAT_LEFT = 7

–GAMEPAD_HAT_UP_LEFT = 8

x: position of x axis. Integer value from -32767 to 32767.

y: position of y axis. Integer value from -32767 to 32767.

z: position of z axis. Integer value from -32767 to 32767.

Rz: position of Rz axis. Integer value from -32767 to 32767.

Rx: position of Rx axis. Integer value from -32767 to 32767.

Ry: position of Ry axis. Integer value from -32767 to 32767.

Returns

The function returns nothing.

Example Code

Example: BLEHIDGamepad

Notes and Warnings

NA

BLEHIDGamepad::buttonPress**Description**

Send a HID Gamepad report indicating buttons pressed.

Syntax

```
void buttonPress (uint16_t buttons);
```

Parameters

buttons: bitmap indicating buttons pressed. 1 = pressed.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEHIDGamepad::buttonRelease**Description**

Send a HID Gamepad report indicating buttons released.

Syntax

```
void buttonRelease (uint16_t buttons);
```

Parameters

buttons: bitmap indicating buttons released. 1 = released.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEHIDGamepad::buttonReleaseAll

Description

Send a HID Gamepad report indicating no buttons pressed.

Syntax

```
void buttonReleaseAll (void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: BLEHIDGamepad

Notes and Warnings

NA

BLEHIDGamepad::setHat

Description

Send a HID Gamepad report indicating hat switch position.

Syntax

```
void setHat (uint8_t hat);
```

Parameters

hat: position of hat switch. Valid values:

- GAMEPAD_HAT_CENTERED = 0
- GAMEPAD_HAT_UP = 1
- GAMEPAD_HAT_UP_RIGHT = 2
- GAMEPAD_HAT_RIGHT = 3
- GAMEPAD_HAT_DOWN_RIGHT = 4
- GAMEPAD_HAT_DOWN = 5
- GAMEPAD_HAT_DOWN_LEFT = 6
- GAMEPAD_HAT_LEFT = 7
- GAMEPAD_HAT_UP_LEFT = 8

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEHIDGamepad::setAxes

Description

Send a HID Gamepad report indicating position of all axes.

Syntax

```
void setAxes (int16_t x, int16_t y, int16_t z, int16_t Rz, int16_t Rx, int16_t Ry);
```

Parameters

x: position of x axis. Integer value from -32767 to 32767.

y: position of y axis. Integer value from -32767 to 32767.

z: position of z axis. Integer value from -32767 to 32767.

Rz: position of Rz axis. Integer value from -32767 to 32767.

Rx: position of Rx axis. Integer value from -32767 to 32767.

Ry: position of Ry axis. Integer value from -32767 to 32767.

Returns

The function returns nothing.

Example Code

Example: BLEHIDGamepad

Notes and Warnings

NA

BLEHIDGamepad::setLeftStick

Description

Send a HID Gamepad report indicating position of axes corresponding to left analog stick.

Syntax

```
void setLeftStick (int16_t x, int16_t y);
```


Parameters

x: position of x axis. Integer value from -32767 to 32767.

y: position of y axis. Integer value from -32767 to 32767.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEHIDGamepad::setRightStick**Description**

Send a HID Gamepad report indicating position of axes corresponding to right analog stick.

Syntax

```
void setLeftStick (int16_t z, int16_t Rz);
```

Parameters

z: position of z axis. Integer value from -32767 to 32767.

Rz: position of Rz axis. Integer value from -32767 to 32767.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEHIDGamepad::setTriggers

Description

Send a HID Gamepad report indicating position of axes corresponding to triggers.

Syntax

```
void setTriggers (int16_t Rx, int16_t Ry);
```

Parameters

Rx: position of Rx axis. Integer value from -32767 to 32767.

Ry: position of Ry axis. Integer value from -32767 to 32767.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

Class BLEHIDKeyboard

BLEHIDKeyboard Class

Description

A class used for creating and managing a BLE HID Keyboard.

Syntax

```
class BLEHIDKeyboard
```

Members

Public Constructors	
BLEHIDKeyboard ard::BLEHIDKeyboard	Constructs a BLEHIDKeyboard object
Public Methods	
BLEHIDKeyboard::setReportID	Set HID report ID for the HID Keyboard and HID consumer control
BLEHIDKeyboard::consumerReport	Send a HID Consumer report
BLEHIDKeyboard::keyboardReport	Send a HID Keyboard report
BLEHIDKeyboard::consumerPress	Send a HID Consumer report indicating button pressed
BLEHIDKeyboard::consumerRelease	Send a HID Consumer report indicating button released
BLEHIDKeyboard::keypress	Send a HID Keyboard report indicating keys pressed
BLEHIDKeyboard::keyRelease	Send a HID Keyboard report indicating keys released
BLEHIDKeyboard::keyReleaseAll	Send a HID Keyboard report indicating no keys pressed
BLEHIDKeyboard::keyCharPress	Send a HID Keyboard report indicating keys pressed to output an ASCII character
BLEHIDKeyboard::keySequence	Send a HID Keyboard report indicating keys pressed to output an ASCII string

BLEHIDKeyboard::BLEHIDKeyboard

Description

Constructs a BLEHIDKeyboard object.

Syntax

```
BLEHIDKeyboard::BLEHIDKeyboard();
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: BLEHIDKeyboard

Notes and Warnings

NA

BLEHIDKeyboard::setReportID

Description

Set HID report ID for the HID Keyboard and HID consumer control.

Syntax

```
void setReportID (uint8_t reportIDKeyboard, uint8_t reportIDConsumer);
```

Parameters

reportIDKeyboard: The report ID for the HID keyboard device, corresponding to the HID report descriptor.

reportIDConsumer: The report ID for the HID consumer control device, corresponding to the HID report descriptor.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEHIDKeyboard::consumerReport

Description

Send a HID Consumer report.

Syntax

```
void consumerReport (uint16_t usage_code);
```

Parameters

usage_code: HID consumer control usage code for the button pressed.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEHIDKeyboard::keyboardReport

Description

Send a HID Keyboard report.

Syntax

```
void keyboardReport (void);  
void keyboardReport (uint8_t modifiers, uint8_t keycode[6]);
```

Parameters

modifiers: bitmap indicating key modifiers pressed (CTRL, ALT, SHIFT).
keycode: byte array indicating keys pressed.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEHIDKeyboard::consumerPress

Description

Send a HID Consumer report indicating button pressed.

Syntax

```
void consumerPress (uint16_t usage_code);
```

Parameters

usage_code: HID consumer control usage code for the button pressed.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEHIDKeyboard::consumerRelease

Description

Send a HID Consumer report indicating button released.

Syntax

```
void consumerRelease (void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEHIDKeyboard::keypress**Description**

Send a HID Keyboard report indicating keys pressed.

Syntax

```
void keyPress (uint16_t key);
```

Parameters

key: HID keycode for key pressed, value ranges from 0x00 to 0xE7.

Returns

The function returns nothing.

Example Code

Example: BLEHIDKeyboard

Notes and Warnings

NA

BLEHIDKeyboard::keyRelease**Description**

Send a HID Keyboard report indicating keys released.

Syntax

```
void keyRelease (uint16_t key);
```

Parameters

key: HID keycode for key pressed, value ranges from 0x00 to 0xE7.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEHIDKeyboard::keyReleaseAll

Description

Send a HID Keyboard report indicating no keys pressed.

Syntax

```
void keyReleaseAll(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: BLEHIDKeyboard

Notes and Warnings

NA

BLEHIDKeyboard::keyCharPress

Description

Send a HID Keyboard report indicating keys pressed to output an ASCII character.

Syntax

```
void keyCharPress (char ch);
```

Parameters

ch: ASCII character to output.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEHIDKeyboard::keySequence

Description

Send a HID Keyboard report indicating keys pressed to output an ASCII string.

Syntax

```
void keySequence (const char* str, uint16_t delayTime);  
void keySequence (String str, uint16_t delayTime);
```

Parameters

str: pointer to character string to output

str: String object containing character string to output

delayTime: time delay between key press and release, in milliseconds. Default value of 5.

Returns

The function returns nothing.

Example Code

Example: BLEHIDKeyboard

Notes and Warnings

NA

Class BLEHIDMouse**BLEHIDMouse Class****Description**

A class used for creating and managing a BLE HID Mouse.

Syntax

```
class BLEHIDMouse
```

Members

Public Constructors	
BLE HIDMouse::BLEHIDMouse	Constructs a BLEHIDMouse object
Public Methods	
BLE HIDMouse::setReportID	Set HID report ID for the HID Mouse
BLE HIDMouse::mouseReport	Send a HID Mouse report
BL EHIDMouse::mousePress	Send a HID Mouse report indicating buttons pressed
BLEH IDMouse::mouseRelease	Send a HID Mouse report indicating buttons released
BLEHIDM ouse::mouseReleaseAll	Send a HID Mouse report indicating no buttons pressed
B LEHIDMouse::mouseMove	Send a HID Mouse report indicating mouse movement
BLE HIDMouse::mouseScroll	Send a HID Mouse report indicating mouse scroll wheel movement

BLEHIDMouse::BLEHIDMouse

Description

Constructs a BLEHIDMouse object.

Syntax

```
BLEHIDMouse::BLEHIDMouse();
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: BLEHIDMouse

Notes and Warnings

NA

BLEHIDMouse::setReportID

Description

Set HID report ID for the HID Mouse.

Syntax

```
void setReportID (uint8_t reportID);
```

Parameters

reportID: The report ID for the HID mouse device, corresponding to the HID report descriptor.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEHIDMouse::mouseReport

Description

Send a HID Mouse report.

Syntax

```
void mouseReport (hid_mouse_report_t* report);  
void mouseReport (uint8_t buttons, int8_t x, int8_t y, int8_t scroll);
```

Parameters

report: pointer to mouse report structure containing data on mouse inputs

buttons: bitmap indicating state of each button. 1 = pressed, 0 = released.

x: mouse x-axis movement. Integer value from -127 to 127.

y: mouse y-axis movement. Integer value from -127 to 127.

scroll: mouse scroll wheel movement. Integer value from -127 to 127.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEHIDMouse::mousePress

Description

Send a HID Mouse report indicating buttons pressed.

Syntax

```
void mousePress (uint8_t buttons);
```

Parameters

buttons: bitmap indicating buttons pressed. 1 = pressed.

Returns

The function returns nothing.

Example Code

Example: BLEHIDMouse

Notes and Warnings

NA

BLEHIDMouse::mouseRelease

Description

Send a HID Mouse report indicating buttons released.

Syntax

```
void mouseRelease (uint8_t buttons);
```

Parameters

buttons: bitmap indicating buttons released. 1 = released.

Returns

The function returns nothing.

Example Code

Example: BLEHIDMouse

Notes and Warnings

NA

BLEHIDMouse::mouseReleaseAll

Description

Send a HID Mouse report indicating no buttons pressed.

Syntax

```
void mouseReleaseAll(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEHIDMouse::mouseMove

Description

Send a HID Mouse report indicating mouse movement.

Syntax

```
void mouseMove (int8_t x, int8_t y);
```

Parameters

x: mouse x-axis movement. Integer value from -127 to 127.

y: mouse y-axis movement. Integer value from -127 to 127.

Returns

The function returns nothing.

Example Code

Example: BLEHIDMouse

Notes and Warnings

NA

BLEHIDMouse::mouseScroll**Description**

Send a HID Mouse report indicating mouse scroll wheel movement.

Syntax

```
void mouseScroll (int8_t scroll);
```

Parameters

scroll: mouse scroll wheel movement. Integer value from -127 to 127.

Returns

The function returns nothing.

Example Code

Example: BLEHIDMouse

Notes and Warnings

NA

Class BLERemoteCharacteristic

BLERemoteCharacteristic Class

Description

A class used for managing BLE GATT characteristics on connected remote devices.

Syntax

```
class BLERemoteCharacteristic
```

Members

Public Constructors
No public constructor is available for this class. You can get a pointer to an instance of this class using BLERemoteService::getCharacteristic().

Public Methods	
BLERemoteCharacteristic::getDescriptor	Get a specific descriptor on the remote device
BLERemoteCharacteristic::getUUID	Get the characteristic UUID
BLERemoteCharacteristic::setBufferLen	Set the size of the internal data buffer
BLERemoteCharacteristic::getBufferLen	Get the current size of the internal data buffer
BLERemoteCharacteristic::canRead	Determine if characteristic has read property enabled
BLERemoteCharacteristic::canWrite	Determine if characteristic has write property enabled
BLERemoteCharacteristic::canNotify	Determine if characteristic has notify property enabled
BLERemoteCharacteristic::canIndicate	Determine if characteristic has indicate property enabled
BLERemoteCharacteristic::getProperties	Get the characteristic properties
BLERemoteCharacteristic::readString	Read the characteristic data buffer as a String object
BLERemoteCharacteristic::readData8	Read the characteristic data buffer as an unsigned 8-bit integer
BLERemoteCharacteristic::readData16	Read the characteristic data buffer as an unsigned 16-bit integer
BLERemoteCharacteristic::readData32	Read the characteristic data buffer as an unsigned 32-bit integer
BLERemoteCharacteristic::writeString	Write data to the characteristic as a String object or character array
BLERemoteCharacteristic::writeData8	Write data to the characteristic as an unsigned 8-bit integer
BLERemoteCharacteristic::writeData16	Write data to the characteristic as an unsigned 16-bit integer
BLERemoteCharacteristic::writeData32	Write data to the characteristic as an unsigned 16-bit integer
BLERemoteCharacteristic::setData	Write data to the characteristic
BLERemoteCharacteristic::getData	Read data from the characteristic
BLERemoteCharacteristic::enableNotifyIndicate	Enable notification or indication for the characteristic
BLERemoteCharacteristic::disableNotifyIndicate	Disable notification and indication for the characteristic
BLERemoteCharacteristic::setNotifyCallback	Set a user function as a notification callback

BLERemoteCharacteristic::getDescriptor

Description

Get a descriptor with the specified UUID on the remote device.

Syntax

```
BLERemoteDescriptor* getDescriptor(const char* uuid);
```

```
BLERemoteDescriptor* getDescriptor(BLEUUID uuid);
```

Parameters

uuid: the desired descriptor UUID, expressed as a character array or a BLEUUID object

Returns

The function returns the found descriptor as a BLERemoteDescriptor object pointer, otherwise nullptr is returned if a descriptor with the UUID is not found.

Example Code

NA

Notes and Warnings

NA

BLERemoteCharacteristic::getUUID

Description

Get the characteristic UUID.

Syntax

```
BLEUUID getUUID();
```

Parameters

The function requires no input parameter.

Returns

The function returns the characteristic UUID as a BLEUUID class object.

Example Code

NA

Notes and Warnings

NA

BLERemoteCharacteristic::setBufferLen

Description

Set the size of the internal data buffer of the characteristic.

Syntax

```
void setBufferLen(uint16_t max_len);
```

Parameters

max_len: number of bytes to resize the internal buffer to.

Returns

The function returns nothing.

Example Code

Example: BLEUartClient

Notes and Warnings

Characteristic data buffer has a default size of 20 bytes and can be increased up to 230 bytes.

BLERemoteCharacteristic::getBufferLen

Description

Get the size of the characteristic internal buffer.

Syntax

```
uint16_t getBufferLen();
```

Parameters

The function requires no input parameter.

Returns

The function returns the currently set internal buffer size.

Example Code

NA

Notes and Warnings

NA

BLERemoteCharacteristic::canRead

Description

Determine if characteristic has read property enabled.

Syntax

```
bool canRead();
```

Parameters

The function requires no input parameter.

Returns

The function returns TRUE if the read property for the characteristic is enabled.

Example Code

NA

Notes and Warnings

NA

BLERemoteCharacteristic::canWrite

Description

Determine if characteristic has write property enabled.

Syntax

```
bool canWrite();
```

Parameters

The function requires no input parameter.

Returns

The function returns TRUE if the write property for the characteristic is enabled.

Example Code

NA

Notes and Warnings

NA

BLERemoteCharacteristic::canNotify**Description**

Determine if characteristic has notify property enabled.

Syntax

```
bool canNotify();
```

Parameters

The function requires no input parameter.

Returns

The function returns TRUE if the notify property for the characteristic is enabled.

Example Code

NA

Notes and Warnings

NA

BLERemoteCharacteristic::canIndicate

Description

Determine if characteristic has indicate property enabled.

Syntax

```
bool canIndicate();
```

Parameters

The function requires no input parameter.

Returns

The function returns TRUE if the indicate property for the characteristic is enabled.

Example Code

NA

Notes and Warnings

NA

BLERemoteCharacteristic::getProperties

Description

Get the characteristic properties.

Syntax

```
uint16_t getProperties();
```

Parameters

The function requires no input parameter.

Returns

The function returns the characteristic properties.

Example Code

NA

Notes and Warnings

NA

BLERemoteCharacteristic::readString**Description**

Request for characteristic data from the remote device and read the data in the buffer, expressed as a String class object.

Syntax

```
String readString();
```

Parameters

The function requires no input parameter.

Returns

The function returns the data in the characteristic buffer expressed as a String class object.

Example Code

Example: BLEUartClient

Notes and Warnings

NA

BLERemoteCharacteristic::readData8

Description

Request for characteristic data from the remote device and read the data in the buffer, expressed as an unsigned 8-bit integer.

Syntax

```
uint8_t readData8();
```

Parameters

The function requires no input parameter.

Returns

The function returns the data in the characteristic buffer expressed as a uint8_t value.

Example Code

Example: BLEBatteryClient

Notes and Warnings

NA

BLERemoteCharacteristic::readData16

Description

Request for characteristic data from the remote device and read the data in the buffer, expressed as an unsigned 16-bit integer.

Syntax

```
uint16_t readData16();
```

Parameters

The function requires no input parameter.

Returns

The function returns the data in the characteristic buffer expressed as a uint16_t value.

Example Code

NA

Notes and Warnings

NA

BLERemoteCharacteristic::readData32**Description**

Request for characteristic data from the remote device and read the data in the buffer, expressed as an unsigned 32-bit integer.

Syntax

```
uint32_t readData32();
```

Parameters

The function requires no input parameter.

Returns

The function returns the data in the characteristic buffer expressed as a uint32_t value.

Example Code

NA

Notes and Warnings

NA

BLERemoteCharacteristic::writeString

Description

Write data to the remote device characteristic as a String object or character array.

Syntax

```
bool writeString(String str);  
bool writeString(const char* str);
```

Parameters

str: the data to write to the remote characteristic, expressed as a String class object or a char array.

Returns

The function returns TRUE if write data is successful.

Example Code

NA

Notes and Warnings

NA

BLERemoteCharacteristic::writeData8

Description

Write data to the remote device characteristic as an unsigned 8-bit integer.

Syntax

```
bool writeData8(uint8_t num);
```

Parameters

num: the data to write to the characteristic buffer expressed as an unsigned 8-bit integer.

Returns

The function returns TRUE if write data is successful.

Example Code

NA

Notes and Warnings

NA

BLERemoteCharacteristic::writeData16**Description**

Write data to the remote device characteristic as an unsigned 16-bit integer.

Syntax

```
bool writeData16(uint16_t num);
```

Parameters

num: the data to write to the characteristic buffer expressed as an unsigned 16-bit integer.

Returns

The function returns TRUE if write data is successful.

Example Code

NA

Notes and Warnings

NA

BLERemoteCharacteristic::writeData32

Description

Write data to the remote device characteristic as a 32-bit integer.

Syntax

```
bool writeData32(uint32_t num);
```

```
bool writeData32(int num);
```

Parameters

num: the data to write to the characteristic buffer expressed as a 32-bit integer.

Returns

The function returns TRUE if write data is successful.

Example Code

NA

Notes and Warnings

NA

BLERemoteCharacteristic::setData

Description

Write data to the remote device characteristic.

Syntax

```
bool setData(uint8_t* data, uint16_t datalen);
```

Parameters

data: pointer to byte array containing desired data

datalen: number of bytes of data to write

Returns

The function returns TRUE if write data is successful.

Example Code

NA

Notes and Warnings

NA

BLERemoteCharacteristic::getData**Description**

Request for characteristic data from the remote device and read the data in the buffer.

Syntax

```
uint16_t getData(uint8_t* data, uint16_t datalen);
```

Parameters

data: pointer to byte array to save data read from buffer

datalen: number of bytes of data to read

Returns

The function returns the number of bytes read.

Example Code

NA

Notes and Warnings

If the data buffer contains less data than requested, it will only read the available number of bytes of data.

BLERemoteCharacteristic::enableNotifyIndicate

Description

Enable the remote device to send notifications or indications for the characteristic.

Syntax

```
void enableNotifyIndicate(bool notify = 1);
```

Parameters

notify: TRUE to enable notifications, FALSE to enable indications.

Returns

The function returns nothing.

Example Code

Example: BLEUartClient

Notes and Warnings

NA

BLERemoteCharacteristic::disableNotifyIndicate

Description

Disable receiving notifications and indications for the characteristic from the remote device.

Syntax

```
void disableNotifyIndicate();
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLERemoteCharacteristic::setNotifyCallback**Description**

Set a user function to be called when the characteristic receives a notification from the remote device.

Syntax

```
void setNotifyCallback(void (*fCallback) (BLERemoteCharacteristic* chr, uint8_t* data, uint16_t length));
```

Parameters

fCallback: A user callback function that returns void and takes three arguments.

chr: pointer to BLERemoteCharacteristic object associated with notification.

data: pointer to byte array containing notification data.

length: number of bytes of notification data in array.

Returns

The function returns nothing.

Example Code

Example: BLEUartClient

Notes and Warnings

NA

Class BLERemoteDescriptor

BLERemoteDescriptor Class

Description

A class used for managing BLE GATT descriptors on connected remote devices.

Syntax

```
class BLERemoteDescriptor
```

Members

Public Constructors
No public constructor is available for this class. You can get a pointer to an instance of this class using BLERemoteCharacteristic::getDescriptor().

Public Methods	
BLERemoteDescriptor::getUUID	Get the descriptor UUID
BLERemoteDescriptor::setBufferLen	Set the size of the internal data buffer
BLERemoteDescriptor::getBufferLen	Get the current size of the internal data buffer
BLERemoteDescriptor::readString	Read the descriptor data buffer as a String object
BLERemoteDescriptor::readData8	Read the descriptor data buffer as an unsigned 8-bit integer
BLERemoteDescriptor::readData16	Read the descriptor data buffer as an unsigned 16-bit integer
BLERemoteDescriptor::readData32	Read the descriptor data buffer as an unsigned 32-bit integer
BLERemoteDescriptor::writeString	Write data to the descriptor as a String object or character array
BLERemoteDescriptor::writeData8	Write data to the descriptor as an unsigned 8-bit integer
BLERemoteDescriptor::writeData16	Write data to the descriptor as an unsigned 16-bit integer
BLERemoteDescriptor::writeData32	Write data to the descriptor as an unsigned 16-bit integer
BLERemoteDescriptor::setData	Write data to the descriptor
BLERemoteDescriptor::getData	Read data from the descriptor

BLERemoteDescriptor::getUUID**Description**

Get the descriptor UUID.

Syntax

```
BLEUUID getUUID();
```

Parameters

The function requires no input parameter.

Returns

The function returns the descriptor UUID as a BLEUUID class object.

Example Code

NA

Notes and Warnings

NA

BLERemoteDescriptor::setBufferLen**Description**

Set the size of the internal data buffer of the descriptor.

Syntax

```
void setBufferLen(uint16_t max_len);
```

Parameters

max_len: number of bytes to resize the internal buffer to.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Descriptor data buffer has a default size of 20 bytes and can be increased up to 230 bytes.

BLERemoteDescriptor::getBufferLen

Description

Get the size of the descriptor internal buffer.

Syntax

```
uint16_t getBufferLen();
```

Parameters

The function requires no input parameter.

Returns

The function returns the currently set internal buffer size.

Example Code

NA

Notes and Warnings

NA

BLERemoteDescriptor::readString

Description

Request for descriptor data from the remote device and read the data in the buffer, expressed as a String class object.

Syntax

```
String readString();
```

Parameters

The function requires no input parameter.

Returns

The function returns the data in the descriptor buffer expressed as a String class object.

Example Code

NA

Notes and Warnings

NA

BLERemoteDescriptor::readData8**Description**

Request for descriptor data from the remote device and read the data in the buffer, expressed as an unsigned 8-bit integer.

Syntax

```
uint8_t readData8();
```

Parameters

The function requires no input parameter.

Returns

The function returns the data in the descriptor buffer expressed as a uint8_t value.

Example Code

NA

Notes and Warnings

NA

BLERemoteDescriptor::readData16

Description

Request for descriptor data from the remote device and read the data in the buffer, expressed as an unsigned 16-bit integer.

Syntax

```
uint16_t readData16();
```

Parameters

The function requires no input parameter.

Returns

The function returns the data in the descriptor buffer expressed as a uint16_t value.

Example Code

NA

Notes and Warnings

NA

BLERemoteDescriptor::readData32

Description

Request for descriptor data from the remote device and read the data in the buffer, expressed as an unsigned 32-bit integer.

Syntax

```
uint32_t readData32();
```

Parameters

The function requires no input parameter.

Returns

The function returns the data in the descriptor buffer expressed as a uint32_t value.

Example Code

NA

Notes and Warnings

NA

BLERemoteDescriptor::writeString**Description**

Write data to the remote device descriptor as a String object or character array.

Syntax

```
bool writeString(String str);  
bool writeString(const char* str);
```

Parameters

str: the data to write to the remote descriptor, expressed as a String class object or a char array.

Returns

The function returns TRUE if write data is successful.

Example Code

NA

Notes and Warnings

NA

BLERemoteDescriptor::writeData8

Description

Write data to the remote device descriptor as an unsigned 8-bit integer.

Syntax

```
bool writeData8(uint8_t num);
```

Parameters

num: the data to write to the descriptor buffer expressed as an unsigned 8-bit integer.

Returns

The function returns TRUE if write data is successful.

Example Code

NA

Notes and Warnings

NA

BLERemoteDescriptor::writeData16

Description

Write data to the remote device descriptor as an unsigned 16-bit integer.

Syntax

```
bool writeData16(uint16_t num);
```

Parameters

num: the data to write to the descriptor buffer expressed as an unsigned 16-bit integer.

Returns

The function returns TRUE if write data is successful.

Example Code

NA

Notes and Warnings

NA

BLERemoteDescriptor::writeData32**Description**

Write data to the remote device descriptor as a 32-bit integer.

Syntax

```
bool writeData32(uint32_t num);  
bool writeData32(int num);
```

Parameters

num: the data to write to the descriptor buffer expressed as a 32-bit integer.

Returns

The function returns TRUE if write data is successful.

Example Code

NA

Notes and Warnings

NA

BLERemoteDescriptor::setData

Description

Write data to the remote device descriptor.

Syntax

```
bool setData(uint8_t* data, uint16_t datalen);
```

Parameters

data: pointer to byte array containing desired data

datalen: number of bytes of data to write

Returns

The function returns TRUE if write data is successful.

Example Code

NA

Notes and Warnings

NA

BLERemoteDescriptor::getData

Description

Request for descriptor data from the remote device and read the data in the buffer.

Syntax

```
uint16_t getData(uint8_t* data, uint16_t datalen);
```

Parameters

data: pointer to byte array to save data read from buffer

datalen: number of bytes of data to read

Returns

The function returns the number of bytes read.

Example Code

NA

Notes and Warnings

If the data buffer contains less data than requested, it will only read the available number of bytes of data.

Class BLERemoteService**BLERemoteService Class****Description**

A class used for managing BLE GATT services on connected remote devices.

Syntax

```
class BLERemoteService
```

Members

Public Constructors

No public constructor is available for this class. You can get a pointer to an instance of this class using BLE-Client::getService().

Public Methods	
BLERemoteService::getUUID	Get the service UUID
BLE RemoteService::getCharacteristic	Get a specific characteristic on the remote device

BLERemoteService::getUUID**Description**

Get the service UUID.

Syntax

```
BLEUUID getUUID();
```

Parameters

The function requires no input parameter.

Returns

The function returns the service UUID as a BLEUUID class object.

Example Code

NA

Notes and Warnings

NA

BLERemoteService::getCharacteristic**Description**

Get a characteristic with the specified UUID on the remote device.

Syntax

BLERemoteCharacteristic* getCharacteristic (const char* uuid);
BLERemoteCharacteristic* getCharacteristic (BLEUUID uuid);

Parameters

uuid: the desired characteristic UUID, expressed as a character array or a BLEUUID object.

Returns

The function returns the found characteristic as a BLERemoteCharacteristic object pointer, otherwise nullptr is returned if a characteristic with the UUID is not found.

Example Code

Example: BLEUartClient

Notes and Warnings

NA

Class BLEScan

BLEScan Class

Description

A class used for managing BLE scanning settings.

Syntax

class BLEScan

Members

Public Constructors
No public constructor is available as this class is intended to be a singleton class. You can get a pointer to this class using BLEDevice::configScan

Public Methods	
BLEScan::updateScanParams	Update the current BLE advertisement settings to the lower Bluetooth stack
BLEScan::startScan	Start a BLE scan
BLEScan::stopScan	Stop a BLE scan
BLEScan::setScanMode	Set the BLE scanning mode
BLEScan::setScanInterval	Set the BLE scanning interval
BLEScan::setScanWindow	Set the BLE scanning window
BLEScan::setScanDuplicateFilter	Set the BLE scan duplicate filter
BLEScan::scanInProgress	Check if a scan is currently in progress
BLEScan::printScanInfo	Print out scanned information

BLEScan::updateScanParams

Description

Update the lower Bluetooth stack with the current scan settings.

Syntax

```
void updateScanParams(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: BLEScan

Notes and Warnings

Stop any scans in progress first before using this function.

BLEScan::startScan

Description

Start BLE scanning.

Syntax

```
void startScan();  
void startScan(uint32_t scanDuration_ms);
```

Parameters

scanDuration: BLE scan will stop after scanDuration milliseconds.

Returns

The function returns nothing.

Example Code

Example: BLEScan

Notes and Warnings

Set the scan parameters first before starting a scan. BLE scans will occur continuously for the duration set with BLEDevice::setScanWindow() and will repeat with a time interval set with BLEDevice::setScanInterval(). Call this member function without an argument to start scanning until BLEDevice::stopScan() is called.

BLEScan::stopScan**Description**

Stop BLE scanning.

Syntax

```
void stopScan(void);
```

Parameters

The function requires no input paramter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEScan::setScanMode

Description

Set the BLE scan mode.

Syntax

```
void setScanMode(uint8_t scanMode);
```

Parameters

scanMode: GAP_SCAN_MODE_PASSIVE for passive scanning, GAP_SCAN_MODE_ACTIVE for active scanning

Returns

The function returns nothing.

Example Code

Example: BLEScan

Notes and Warnings

Active scanning will request for scan response packets after discovering an advertising device. Passive scanning will only capture advertising data packets.

BLEScan::setScanInterval

Description

Set the BLE scan interval.

Syntax

```
void setScanInterval(uint16_t scanInt_ms);
```

Parameters

scanInt_ms: scan interval in milliseconds. Value range of 3 to 10240.

Returns

The function returns nothing.

Example Code

Example: BLEScan

Notes and Warnings

A BLE scan will repeat with a time interval set with this member function.

BLEScan::setScanWindow

Description

Set the BLE scan window.

Syntax

```
void setScanWindow(uint16_t scanWindow_ms);
```

Parameters

scanWindow_ms: scan window in milliseconds. Value range of 3 to 10240.

Returns

The function returns nothing.

Example Code

Example: BLEScan

Notes and Warnings

A BLE scan will scan continuously for a window duration set with this member function. The scan window should be less than or equal to the scan interval.

BLEScan::setScanDuplicateFilter

Description

Set the scan duplicate filter.

Syntax

```
void setScanDuplicateFilter(bool dupeFilter);
```

Parameters

dupeFilter: TRUE to enable duplicate filtering.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Enabling duplicate filters will ignore scan results for devices already discovered previously.

BLEScan::scanInProgress**Description**

Set the scan duplicate filter.

Syntax

```
bool scanInProgress(void);
```

Parameters

The function requires no input paramter.

Returns

TRUE if BLE scanning is in progress.

Example Code

NA

Notes and Warnings

NA

BLEScan::printScanInfo**Description**

Parse and print out scanned information.

Syntax

```
void printScanInfo(T_LE_CB_DATA* p_data);
```

Parameters

p_data: pointer to scan data of type T_LE_CB_DATA*

Returns

The function returns nothing.

Example Code

Example: BLEScan

Notes and Warnings

Use this member function to parse the various fields of received advertisement data packets and print the results out to the serial monitor.

Class BLEService**BLEService Class****Description**

A class used for creating and managing BLE GATT services.

Syntax

```
class BLEService
```

Members

Public Constructors	
BLEService::BLEService	Constructs a BLEService object
Public Methods	
BLEService::setUUID	Set service UUID
BLEService::getUUID	Get service UUID
BLEService::addCharacteristic	Add a characteristic to service
BLEService::getCharacteristic	Get a previously added characteristic

BLEService::BLEService**Description**

Constructs a BLEService object.

Syntax

```
BLEService::BLEService(BLEUUID uuid);  
BLEService::BLEService(const char* uuid);
```

Parameters

uuid: service UUID, expressed as a BLEUUID class object or a character array

Returns

The function returns nothing.

Example Code

Example: BLEUartService

Notes and Warnings

NA

BLEService::setUUID**Description**

Set the service UUID.

Syntax

```
void setUUID(BLEUUID uuid);
```

Parameters

uuid: service UUID, expressed as a BLEUUID class object.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEService::getUUID

Description

Get the service UUID.

Syntax

```
BLEUUID getUUID();
```

Parameters

The function requires no input parameter.

Returns

The function returns the service UUID in a BLEUUID class object.

Example Code

NA

Notes and Warnings

NA

BLEService::addCharacteristic

Description

Add a characteristic to the service.

Syntax

```
void addCharacteristic(BLECharacteristic& newChar);
```

Parameters

newChar: the BLECharacteristic to add to the service.

Returns

The function returns nothing.

Example Code

Example: BLEUartService

Notes and Warnings

NA

BLEService::getCharacteristic**Description**

Get a previously added characteristic.

Syntax

```
BLECharacteristic* getCharacteristic(uint8_t charIndex);
```

Parameters

charIndex: position index of characteristic.

Returns

The function returns a pointer to the BLECharacteristic at the requested position index.

Example Code

NA

Notes and Warnings

NA

Class BLEUUID

BLEUUID Class

Description

A class used for creating and managing UUIDs.

Syntax

```
class BLEUUID
```

Members

Public Constructors	
BLEUUID::BLEUUID	Create a UUID object
Public Methods	
BLEUUID::str	Get the character string representation of UUID
BLEUUID::data	Get the binary representation of UUID
BLEUUID::length	Get the length of UUID

BLEUUID::BLEUUID

Description

Create a UUID object from a UUID character string

Syntax

```
BLEUUID();  
BLEUUID(const char* str);  
BLEUUID(uint8_t* data, uint8_t length);
```

Parameters

str: UUID character string used to created object

data: pointer to byte array containing the desired UUID

length: number of bytes in array containing the desired UUID. Valid values of 2, 4 or 16

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings**BLEUUID::str****Description**

Get the character string representation of UUID

Syntax

```
const char* str(void);
```

Parameters

The function requires no input parameter.

Returns

Pointer to a character string representation of the UUID

Example Code

NA

Notes and Warnings**BLEUUID::data**

Description

Get the binary representation of UUID

Syntax

```
const uint8_t* data(void);
```

Parameters

The function requires no input parameter.

Returns

Pointer to an unsigned 8-bit integer array containing the UUID expressed in binary form

Example Code

NA

Notes and Warnings

Returned pointer is of const uint8_t* type and will not allow changing of the data.

BLEUUID::length

Description

Get the length of UUID

Syntax

```
uint8_t length(void);
```

Parameters

The function requires no input parameter.

Returns

Length of the UUID, in terms of bytes

Example Code

NA

Notes and Warnings

A 4-character UUID will be 16 bits / 2 bytes long.
A 32-character UUID will be 128 bits / 16 bytes long.

Class BLEWifiConfigService

BLEWifiConfigService Class

Description

A class used for managing a BLE WiFi configuration service running on the device.

Syntax

class BLEWifiConfigService

Members

Public Constructors	
BLEWifiCon figService::BLEWifiConfigService	Only one instance of this class should be created

Public Methods	
BLEWifiConfigService::begin	Start background thread to process WiFi configuration commands
BLEWifiConfigService::end	Stop background thread processing WiFi configuration commands
BLEWifiConfigService::addService	Add the service to the BLE stack
BLEWifiConfigService::advData	Get advertising data correctly formatted for WiFi configuration service

BLEWifiConfigService::BLEWifiConfigService

Description

Create an instance of the BLEWifiConfigService object.

Syntax

```
void BLEWifiConfigService ();
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: BLEWifiConfig

Notes and Warnings

Only one instance of this class / service should be created.

BLEWifiConfigService::begin

Description

Start background thread to process WiFi configuration commands.

Syntax

```
void begin();
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: BLEWifiConfig

Notes and Warnings

NA

BLEWifiConfigService::end**Description**

Stop background thread processing WiFi configuration commands.

Syntax

```
void end();
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

BLEWifiConfigService::addService**Description**

Add the WiFi configuration service to the BLE stack.

Syntax

```
void addService();
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: BLEWifiConfig

Notes and Warnings

NA

BLEWifiConfigService::advData

Description

Get advertising data correctly formatted for WiFi configuration service.

Syntax

```
BLEAdvertData advData();
```

Parameters

The function requires no input parameter.

Returns

The function returns a BLEAdvertData object that contains the required advertising data fields for the WiFi configuration service to work.

Example Code

Example: BLEWifiConfig

Notes and Warnings

The advertisement data needs to be correctly formatted for the corresponding smartphone app to recognise the device. WiFi configuration service advertisement data requires the local BT address, and should be called only after peripheral mode is started and may also require stopping and restarting the advertising process.

EPDIF

Class EpdIF

EpdIf Class

Description

A class used to control the electronic paper display internal functions.

Syntax

```
class EpdIf
```

Members

Public Constructors

A public constructor should not be used as this class is intended to be a singleton class. Access member functions using the object instance named EpdIf.

Public Methods

EpdIf::EPD_Dis_Part	Put an image buffer to the frame memory, but not updating the display
EpdIf::EPD_SetFrame	Put display data to the frame memory, usually used for setup text display functions
EpdIf::EPD_SetRAMValue_BaseMap	To read image data stored in the RAM, but not display on the screen
EpdIf::EPD_SetFrameMemory	To read image data stored in the buffer, but not display on the screen
EpdIf::EPD_UpdateDisplay	Update the display
EpdIf::EPD_ClearScreen_White	Clear the frame memory with the White color, but not updating the display
EpdIf::EPD_ClearScreen_Black	Clear the frame memory with the Black color, but not updating the display
EpdIf::EPD_Busy	Wait until the Busy pin goes to low, which is the idle state
EpdIf::EPD_Reset	Used for the Epaper module reset. Often used to awaken the module in deep sleep
EpdIf::EPD_Sleep	After this command is transmitted, the chip would enter the deep-sleep mode to save power

EpdIf:: EPD_Dis_Part

Description

Put an image buffer to the frame memory, but not updating the display.

Syntax

```
void EPD_Dis_Part(unsigned int x_start, unsigned int y_start, const unsigned char* datas, unsigned int PART_COLUMN, unsigned int PART_LINE);
```

Parameters

x_start: starting position of the x-axis

y_start: starting position of the y-axis

datas: data to be displayed on the e-paper module

PART_COLUMN: height of the display area

PART_LINE: width of the display area

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

EpdIf:: EPD_SetFrame

Description

Put display data to the frame memory, usually used for setup text display functions.

Syntax

```
void EPD_SetFrame(const unsigned char* image_buffer, int x, int y, int image_width, int image_height);
```

Parameters

image_buffer: the buffer which stores the data to be displayed on the e-paper module, usually used to display texts.

x: starting position of the x-axis

y: starting position of the y-axis

image_width: width of the display area

image_height: height of the display area

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

EpdIf:: EPD_SetRAMValue_BaseMap**Description**

To read image data stored in the RAM, but not display on the screen.

Syntax

```
void EPD_SetRAMValue_BaseMap(const unsigned char* datas);
```

Parameters

datas: contains the black and white information that forms the image stored in RAM

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

EpdIf:: EPD_SetFrameMemory

Description

To read image data stored in the buffer but not display on the screen.

Syntax

```
void EPD_SetFrameMemory(const unsigned char* image_buffer);
```

Parameters

image_buffer: the buffer where stores the image data in hexadecimal numbers

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

EpdIf:: EPD_UpdateDisplay

Description

Update the ePaper display module. Always combined used with functions set the frames.

Syntax

```
void EPD_UpdateDisplay(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

There are 2 memory areas embedded in the e-paper display but once this function is called, then the next action of SetFrameMemory or ClearScreen will set the other memory area.

EpdIf:: EPD_ClearScreen_White**Description**

Clear the frame memory with the White color.

Syntax

```
void EpdIf::EPD_ClearScreen_White(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

If the users want to see the actual display on the e-paper screen, the function EPD_UpdateDisplay() is required to be added behind this code.

EpdIf:: EPD_ClearScreen_Black

Description

Clear the frame memory with the Black color.

Syntax

```
void EpdIf::EPD_ClearScreen_Black(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

If the users want to see the actual display on the e-paper screen, the function EPD_UpdateDisplay() is required to be added behind this code.

EpdIf:: EPD_Busy

Description

Wait until the busy_pin goes to low, which is the idle state.

Syntax

```
void EpdIf::EPD_Busy(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

If the users want to see the actual display on the e-paper screen, the function EPD_UpdateDisplay() is required to be added behind this code.

EpdIf:: EPD_Reset**Description**

This command will let the E-paper module reset, it is often used to awaken the module in while it' s in the deep sleep mode, you will find more details in the function EpdIf:: EPD_Sleep().

Syntax

```
void EpdIf::EPD_Reset(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

EpdIf::EPD_Sleep

Description

After this command is transmitted, the chip would enter the deep-sleep mode to save power. The deep sleep mode would return to standby by hardware reset. You can use EPD:: Init() to awaken the E-paper module.

Syntax

```
void EpdIf::EPD_Sleep(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

FatfsSDCard

Class SdFatFs

Description

Defines a class of SD FAT File system.

Syntax

```
class SdFatFs
```

Members

Public Constructors

SdFatFs::SdFatFs Constructs a SdFatFs object

SdFatFs::~~SdFatFs Destructs a SdFatFs object

Public Methods

SdFatFs::begin	Initialize SD FAT File System
SdFatFs::end	Deinitialize SD FAT File System
SdFatFs::*getRootPath	Get the root path of the SD FAT File System
SdFatFs::readDir	List items under a specific folder
SdFatFs::mkdir	Create folder
SdFatFs::rm	Remove folder or file
SdFatFs::isDir	Check if a specific path is a directory
SdFatFs::isFile	Check if a specific path is a file
SdFatFs::getLastModTime	Get the last modified time for a file or directory
SdFatFs::setLastModTime	Set the last modified time for a file or directory
SdFatFs::status	Return the current status of SD
SdFatFs::open	Open a file

SdFatFs::begin

Description

Initialize SD FAT File System.

Syntax

```
int SdFatFs::begin(void);
```

Parameters

The function requires no input parameter.

Returns

Returns “0” if success, else returns a negative value.

Example Code

Example: create_folder; file_read_write; get_file_attribute; last_modified_time; list_root_files.

Notes and Warnings

Include “SdFatFs.h” to use the class function.

SdFatFs::end

Description

De-initialize SD FAT File System.

Syntax

```
int SdFatFs::end(void);
```

Parameters

The function requires no input parameter.

Returns

Returns “0” if success, else returns a negative value.

Example Code

Example: create_folder; file_read_write; get_file_attribute; last_modified_time; list_root_files.

Notes and Warnings

Include “SdFatFs.h” to use the class function.

SdFatFs::*getRootPath

Description

Get the root path of the SD FAT File System. The logical volume character is starting from ‘0’, so the root path would like “0:” .

Syntax

```
char *SdFatFs::getRootPath(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns the root path.

Example Code

Example: create_folder; file_read_write; get_file_attribute; last_modified_time; list_root_files.

Notes and Warnings

Include “SdFatFs.h” to use the class function.

SdFatFs::readDir**Description**

List items under a specific folder. List items under a specific folder and store the result in the buffer that user specified. Each item is separated by ‘0’ .

Syntax

```
int SdFatFs::readDir(char *path, char *result_buf, unsigned int bufsize);
```

Parameters

path: The absolute directory path to be listed.

result_buf: The buffer to be stored results.

bufsize: The size of result_buf. If results exceed this size, then the results larger than this size would be discarded.

Returns

Returns “0” if success, else returns a negative value.

Example Code

Example: get_file_attribute; list_root_files

Notes and Warnings

Include “SdFatFs.h” to use the class function.

SdFatFs::mkdir

Description

Create folder.

Syntax

```
int SdFatFs::mkdir(char *absolute_path);
```

Parameters

absolute_path: The absolute directory path to be created

Returns

Returns “0” if success, else returns a negative value.

Example Code

Example: create_folder

Notes and Warnings

Include “SdFatFs.h” to use the class function.

SdFatFs::rm

Description

Remove folder or file.

Syntax

```
int SdFatFs::rm(char *absolute_path);
```

Parameters

absolute_path: The absolute directory or file path to be deleted

Returns

Returns “0” if success, else returns a negative value.

Example Code

NA

Notes and Warnings

Include “SdFatFs.h” to use the class function.

SdFatFs::isDir**Description**

Check if a specific path is a directory.

Syntax

```
unsigned char SdFatFs::isDir(char *absolute_path);
```

Parameters

absolute_path: The absolute path to be queried

Returns

The function returns “1” if it is a directory, else returns “0” .

Example Code

Example: get_file_attribute

Notes and Warnings

Include “SdFatFs.h” to use the class function.

SdFatFs::isFile

Description

Check if a specific path is a file.

Syntax

```
unsigned char SdFatFs::isFile(char *absolute_path);
```

Parameters

absolute_path: The absolute path to be queried

Returns

The function returns “1” if it is a directory, else returns “0” .

Example Code

Example: get_file_attribute

Notes and Warnings

Include “SdFatFs.h” to use the class function.

SdFatFs::getLastModTime

Description

Get the last modified time for a file or directory.

Syntax

```
int SdFatFs::getLastModTime(char *absolute_path, uint16_t *year, uint16_t *month, uint16_t *date, uint16_t *hour, uint16_t *minute, uint16_t *second);
```

Parameters

absolute_path: The absolute path to be queried.

year: The value of the year.

month: The value of the month.

date: The value of the date.

hour: The value of an hour.

minute: The value of a minute.

second: field “second” contains no valid information in the current version.

Returns

The function returns “0” if success, otherwise returns a negative value for failure.

Example Code

Example: last_modified_time

Notes and Warnings

Include “SdFatFs.h” to use the class function.

SdFatFs::setLastModTime

Description

Set the last modified time for a file or directory. Ameba doesn't have built-in RTC. So we manually change file/directory last modified time.

Syntax

```
int SdFatFs::setLastModTime(char *absolute_path, uint16_t year, uint16_t month, uint16_t date, uint16_t hour,
uint16_t minute, uint16_t second);
```

Parameters

absolute_path: The absolute path to be queried.

year: The value of the year.

month: The value of the month.

date: The value of the date.

hour: The value of an hour.

minute: The value of a minute.

second: field “second” contains no valid information in the current version.

Returns

The function returns “0” if success, otherwise returns a negative value for failure.

Example Code

Example: last_modified_time

Notes and Warnings

Include “SdFatFs.h” to use the class function.

SdFatFs::open

Description

Open a file.

Syntax

```
SdFatFile SdFatFs::open(char *absolute_path);
```

Parameters

absolute_path: The path to a file.

Returns

The file object is an instance of SdFatFile.

Example Code

Example: create_folder; file_read_write; get_file_attribute; last_modified_time; list_root_files.

Notes and Warnings

Include “SdFatFs.h” to use the class function.

SdFatFs::status

Description

Return the current status of SD.

Syntax

```
int SdFatFs::status(void);
```

Parameters

The function requires no input parameter.

Returns

Function returns “1” if ready to use, else return “0” if the status is inactivating or abnormal.

Example Code

NA.

Notes and Warnings

Include “SdFatFs.h” to use the class function.

Class SdFatFile**Description**

Defines a class of SD FAT File.

Syntax

```
class SdFatFile
```

Members

Public Constructors	
SdFatFile::SdFatFile	Constructs a SdFatFile object
SdFatFile::~SdFatFile	Destructs a SdFatFile object
Public Methods	
SdFatFile::write	Write 1 byte/bytes to file
SdFatFile::read	Read 1 byte/bytes from the file
SdFatFile::peek	Read 1 byte from file without move curser
SdFatFile::available	Check if the cursor is at EOF (End-Of-File)
SdFatFile::bool	Check if file is opened
SdFatFile::seek	Change cursor to a specific position
SdFatFile::close	Close file

SdFatFile::write

Description

Write 1 byte or bytes to the file.

Syntax

```
size_t SdFatFile::write(uint8_t c);
```

```
size_t SdFatFile::write(const uint8_t *buf, size_t size);
```

Parameters

c: The character to be written.

buf: The buffer to be written.

size: The length of buffer to be written.

Returns

The function returns the number of byte count that has been successfully written to the file.

Example Code

NA.

Notes and Warnings

Include “SdFatFile.h” to use the class function.

SdFatFile:: read**Description**

Read 1 byte or bytes from the file.

Syntax

```
int SdFatFile::read(void);
```

```
int SdFatFile::read(void *buf, uint16_t nbyte);
```

Parameters

buf: The buffer to store the content.

nbyte: The buffer size. (Or can be regarded as the desired length to read).

Returns

The function returns a read character or the read size of the buffer.

Example Code

```
1. #include "FatFs_SD.h"
2.
3. char dirname[] = "testdir" ;
4. char filename[] = "test.txt" ;
5. char write_content[] = "hello world!" ;
6.
7. FatFsSD fs;
8.
9. void setup() {
10. char buf[128];
11. char absolute_filename[128];
12.
13. fs.begin();
14.
```

```
15. sprintf(absolute_filename, "%s%s", fs.getRootPath(), dirname);
16. fs.mkdir(absolute_filename);
17. printf( "create dir at \" %s\"rn" , absolute_filename);
18.
19. sprintf(absolute_filename, "%s%s/%s", fs.getRootPath(), dirname, filename);
20. SdFatFile file = fs.open(absolute_filename);
21. file.println(write_content);
22. file.close();
23. printf( "create file at \" %s\"rn" , absolute_filename);
24.
25. printf( "read back from \" %s\"rn" , absolute_filename);
26. file = fs.open(absolute_filename);
27.
28. memset(buf, 0, sizeof(buf));
29. file.read(buf, sizeof(buf));
30.
31. file.close();
32. printf( "==== content ====rn" );
33. printf( "%s" , buf);
34. printf( "==== end ====rn" );
35.
36. fs.end();
37. }
38.
39. void loop() {
40. delay(1000);
41. }
42.
```

Example: create_folder;

This example shows how to create a folder and open a file under it.

```
1. #include "FatFs_SD.h"
2.
3. char filename[] = "test.txt" ;
4. char write_content[] = "hello world!" ;
5.
6. FatFsSD fs;
7.
8. void setup() {
9.   char buf[128];
10.  char absolute_filename[128];
11.
12.  fs.begin();
13.
14.  printf( "write something to \" %s\"rn" , filename);
15.  sprintf(absolute_filename, "%s%s" , fs.getRootPath(), filename);
16.  SdFatFile file = fs.open(absolute_filename);
17.
18.  file.println(write_content);
19.
20.  file.close();
21.  printf( "write finishrn" );
22.
23.  printf( "read back from \" %s\"rn" , filename);
24.  file = fs.open(absolute_filename);
25.
26.  memset(buf, 0, sizeof(buf));
27.  file.read(buf, sizeof(buf));
28.
```

```
29. file.close();
30. printf( "==== content ====rn" );
31. printf( "%s" , buf);
32. printf( "==== end ====rn" );
33.
34. fs.end();
35. }
36.
37. void loop() {
38. delay(1000);
39. }
40.
```

Example: file_read_write;

This example shows how to open/close files and perform read/write to it.

Notes and Warnings

Include “SdFatFile.h” to use the class function.

SdFatFile:: peek

Description

Read one byte from the file without moving the curser.

Syntax

```
int SdFatFile::peek(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns the read character as an integer number.

Example Code

NA

Notes and Warnings

Include “SdFatFile.h” to use the class function.

SdFatFile:: available

Description

Check if the cursor is at EOF.

Syntax

```
int SdFatFile::available(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns “0” if the cursor is at EOF, else returns “1” .

Example Code

NA

Notes and Warnings

Include “SdFatFile.h” to use the class function.

SdFatFile:: flush

Description

It is a nop. This is an inherited function from class Stream. And it does not affect SD File.

Syntax

```
void SdFatFile::flush(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Include “SdFatFile.h” to use the class function.

SdFatFile:: seek

Description

Change cursor to a specific position.

Syntax

```
int SdFatFile::seek(uint32_t pos);
```

Parameters

pos: The desired position.

Returns

The function returns 0 if success otherwise returns a negative value.

Example Code

NA

Notes and Warnings

Include “SdFatFile.h” in order to use the class function.

SdFatFile:: close

Description

Close file.

Syntax

```
int SdFatFile::close(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns 0 if runs successfully otherwise it returns a negative value.

Example Code

Example: last_modified_time;

The example shows how to get and set last modified time of a file.

Example: create_folder;

This example shows how to create a folder and open a file under it. The details of the code can be found in the section of SdFatFile:: read.

Example: file_read_write;

This example shows how to open/close files and perform read/write to it. The details of the code can be found in the section of SdFatFile:: read.

1. #include <FatFs_SD.h>
- 2.
3. FatFsSD fs;
- 4.
5. char filename[] = “test.txt” ;

```
6.
7. void setup() {
8.   char absolute_filename[128];
9.
10.  uint16_t year = 2021;
11.  uint16_t month = 4;
12.  uint16_t date = 4;
13.  uint16_t hour = 12;
14.  uint16_t minute = 12;
15.  uint16_t second = 12;
16.
17.  fs.begin();
18.
19.  sprintf(absolute_filename, "%s%s", fs.getRootPath(), filename);
20.  SdFatFile file = fs.open(absolute_filename);
21.  file.close();
22.
23.  fs.setLastModTime(absolute_filename, year, month, date, hour, minute, second);
24.
25.  fs.getLastModTime(absolute_filename, &year, &month, &date, &hour, &minute, &second);
26.  printf( "filename: \"%s\" \r\n" , absolute_filename);
27.  printf( "time mod: %04d/%02d/%02d %02d:%02d:%02drn" , year, month, date, hour, minute, second);
28.
29.  fs.end();
30. }
31.
32. void loop() {
33.   delay(1000);
34. }
35.
```

Notes and Warnings

Include “SdFatFile.h” in order to use the class function.

FlashMemory

Class EpdIF

FlashMemoryClass Class

Description

Defines a class of Flash memory API

Syntax

class FlashMemoryClass

Members

Public Constructors	
FlashMemoryClass::FlashMemoryClass	Constructs a FlashMemoryClass object
FlashMemoryClass::~FlashMemoryClass	Deconstructs a FlashMemoryClass object
Public Methods	
FlashMemoryClass::begin	Initialize/Re-initialize the base address and size
FlashMemoryClass::read	Read the content to buf
FlashMemoryClass::update	Write buf back to flash memory
FlashMemoryClass::readWord	Read 4 bytes from flash memory
FlashMemoryClass::writeWord	Write 4 bytes into flash memory
FlashMemoryClass::buf_size	The buf size
FlashMemoryClass::*buf	The buf to be operated

FlashMemoryClass::FlashMemoryClass

Description

Constructs a FlashMemoryClass object.

Syntax

FlashMemoryClass(unsigned int _base_address, unsigned int _buf_size);

Parameters

_base_address: The base address to operate.

_buf_size: The buf size for mirror a copy to reduce flash memory operation

Returns

The function returns nothing.

Example Code

Example: FleshMemory_Basic

This example demonstrates the basic use of flash memory. Since boot count is stored in flash, each time upon device boot up, the boot count will be read from the flash, add one, then write back to the flash. Ameba's flash memory can be edit in a unit of a sector which has the size of 4K bytes.

Direct read from flash memory is allowed. To write data into flash memory, each bit on flash memory can only change from '1' to '0' and it cannot change from '0' to '1'. To make sure the data are correctly written we do erase the flash memory sector before write data on it.

```
#include <FlashMemory.h>
```

```
void setup() {  
  FlashMemory.read();  
  if (FlashMemory.buf[0] == 0xFF) {  
    FlashMemory.buf[0] = 0x00;  
    FlashMemory.update();  
    Serial.println( "write count to 0" );  
  } else {  
    FlashMemory.buf[0]++;  
    FlashMemory.update();  
    Serial.print( "Boot count: ");  
    Serial.println(FlashMemory.buf[0]);  
  }  
}
```



```
}  
  
void loop() {  
  delay(1000);  
}
```

Example: ReadWriteOneWord

This example shows how to request flash memory larger than default 0x4000, and read/write one specific word (32-bit).

```
#include <FlashMemory.h>  
  
void setup() {  
  unsigned int value;  
  
  /* request flash size 0x4000 from 0xFC000 */  
  FlashMemory.begin(0xFC000, 0x4000);  
  
  /* read one word (32-bit) from 0xFC000 plus offset 0x3F00 */  
  value = FlashMemory.readWord(0x3F00);  
  printf( "value is 0x%08Xrn" , value);  
  
  if (value == 0xFFFFFFFF) {  
    value = 0;  
  } else {  
    value++;  
  }  
  
  /* write one word (32-bit) to 0xFC000 plus offset 0x3F00 */  
  FlashMemory.writeWord(0x3F00, value);  
}  
  
void loop() {  
  // put your main code here, to run repeatedly:  
}
```

Notes and Warnings

Include "FlashMemory.h" to use the class function.

FlashMemoryClass::begin

Description

Initialize/Re-initialize the base address and size. The base address shell aligns with the size of 0x1000. And the size shell is multiple of 0x1000.

Syntax

```
void begin(unsigned int _base_address, unsigned int _buf_size);
```

Parameters

_base_address: The base address

_buf_size: The desired work size

Returns

The function returns nothing.

Example Code

Example: FleshMemory_Basic

This example demonstrates the basic use of flash memory. Since boot count is stored in flash, each time upon device boot up, the boot count will be read from the flash, add one, then write back to the flash. Ameba's flash memory can be edit in a unit of a sector which has the size of 4K bytes.

Example: ReadWriteOneWord

This example shows how to request flash memory larger than default 0x4000, and read/write one specific word (32-bit). Details of the example codes can be found in the previous section of “FlashMemoryClass:: FlashMemoryClass” .

Notes and Warnings

Include “FlashMemory.h” to use the class function.

FlashMemoryClass::read

Description

Read the content to buf. Read flash memory into the buf. The size would be 0x1000.

Syntax

```
void read(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: FleshMemory_Basic

This example demonstrates the basic use of flash memory. Since boot count is stored in flash, each time upon device boot up, the boot count will be read from the flash, add one, then write back to the flash. Ameba's flash memory can be edit in a unit of a sector which has the size of 4K bytes.

Details of the example codes can be found in the previous section of “FlashMemoryClass:: FlashMemoryClass” .

Notes and Warnings

Include “FlashMemory.h” to use the class function.

FlashMemoryClass::update**Description**

Write buf back to flash memory. Write flash memory with the content of the buffer. The size is 0x1000.

Syntax

```
void update(bool erase = true);
```

Parameters

erase: By default, it is true and erases flash memory before writing to it

Returns

The function returns nothing.

Example Code

Example: `FleshMemory_Basic`

This example demonstrates the basic use of flash memory. Since boot count is stored in flash, each time upon device boot up, the boot count will be read from the flash, add one, then write back to the flash. Ameba's flash memory can be edit in a unit of a sector which has the size of 4K bytes.

Details of the example codes can be found in the previous section of `"FlashMemoryClass:: FlashMemoryClass"` .

Notes and Warnings

Include `"FlashMemory.h"` to use the class function.

FlashMemoryClass::readWord**Description**

Read 4 bytes from flash memory. Read 4 byte from specific offset based on base address.

Syntax

```
unsigned int readWord(unsigned int offset);
```

Parameters

offset: The offset according to the base address

Returns

The read data with a size of 4 bytes

Example Code

Example: `ReadWriteOneWord`

This example shows how to request flash memory larger than default 0x4000, and read/write one specific word (32-bit).

Details of the example codes can be found in the previous section of `"FlashMemoryClass:: FlashMemoryClass"` .

Notes and Warnings

Include `"FlashMemory.h"` to use the class function.

FlashMemoryClass::writeWord

Description

Write 4 bytes into flash memory. It will try to write 4 bytes first. If the read data differ from the write data, then we buffer the sector of flash memory, erase it, and write correct data back to it.

Syntax

```
void writeWord(unsigned int offset, unsigned int data);
```

Parameters

offset: The offset according to the base address

data: The data to be written

Returns

The function returns nothing.

Example Code

Example: ReadWriteOneWord

This example shows how to request flash memory larger than default 0x4000, and read/write one specific word (32-bit).

Details of the example codes can be found in the previous section of “FlashMemoryClass:: FlashMemoryClass” .

Notes and Warnings

Include “FlashMemory.h” to use the class function.

FlashMemoryClass::buf_size

Description

The buf size (It can be regarded as work size).

Syntax

```
unsigned int buf_size;
```

Example Code

Example: FlashMemory_Basic

This example demonstrates the basic use of flash memory. Since boot count is stored in flash, each time upon device boot up, the boot count will be read from the flash, add one, then write back to the flash. Ameba's flash memory can be edit in a unit of a sector which has the size of 4K bytes.

Details of the example codes can be found in the previous section of “FlashMemoryClass:: FlashMemoryClass” .

Notes and Warnings

Include “FlashMemory.h” to use the class function.

FlashMemoryClass::*buf

Description

The buf to be operated. Modify buf won't change the content of the buf. It needs an update to write back to flash memory.

Syntax

```
unsigned char *buf;
```

Example Code

NA

Notes and Warnings

Include “FlashMemory.h” to use the class function.

GPIO

Class DHT

DHT Class

Description

Defines a class of using DHT temperature & humidity sensors

Syntax

```
class DHT
```

Members

Public Constructors	
DHT::DHT	Constructs a DHT object
Public Methods	
DHT::begin	Initialize the DHT sensor
DHT::readTemperature	Read temperature(Fahrenheit or Celcius) from the DHT sensor
DHT::convertCtoF	Convert a value from Celcius to Fahrenheit
DHT::convertFtoC	Convert a value from Fahrenheit to Celcius
DHT::readHumidity	Read humidity(%) from the DHT sensor
DHT::computeHeatIndex	Compute the HeatIndex from the readings (Using both Rothfusz and Steadman' s equations)
DHT::read	Check if the sensor is readable

DHT::DHT

Description

Constructs a DHT object.

Syntax

```
DHT::DHT(uint8_t pin, uint8_t type, uint8_t count)
```

Parameters

pin: The Arduino digital PIN connected

type: The DHT sensor type(DHT11, DHT22, or DHT21)

count: The count is now ignored as the DHT reading algorithm adjusts itself based on the speed of the processor

Returns

The function returns nothing.

Example Code

Example:DHTTester

The code demos basic testing for various DHT humidity & temperature sensors.

Notes and Warnings

Every time must include the header file “DHT.h” in front of the project to use the class function.

```
// Example testing sketch for various DHT humidity/temperature sensors
// Written by ladyada, public domain

#include "DHT.h"

// The digital pin we're connected to.

#define DHTPIN 8

// Uncomment whatever type you're using!

#define DHTTYPE DHT11 // DHT 11

// #define DHTTYPE DHT22 // DHT 22 (AM2302), AM2321
// #define DHTTYPE DHT21 // DHT 21 (AM2301)

// Connect pin 1 (on the left) of the sensor to +5V

// NOTE: If using a board with 3.3V logic like an Arduino Due connect pin 1
// to 3.3V instead of 5V!

// Connect pin 2 of the sensor to whatever your DHTPIN is

// Connect pin 4 (on the right) of the sensor to GROUND

// Connect a 10K resistor from pin 2 (data) to pin 1 (power) of the sensor

// Initialize DHT sensor.

// Note that older versions of this library took an optional third parameter to
// tweak the timings for faster processors. This parameter is no longer needed
```



```

// as the current DHT reading algorithm adjusts itself to work on faster procs.
DHT dht(DHTPIN, DHTTYPE);

void setup() {
  Serial.begin(115200);
  Serial.println( "DHTxx test!" );
  dht.begin();
}

void loop() {
  // Wait a few seconds between measurements.
  delay(2000);

  // Reading temperature or humidity takes about 250 milliseconds!
  // Sensor readings may also be up to 2 seconds 'old' (its a very slow sensor)

  float h = dht.readHumidity();

  // Read temperature as Celsius (the default)
  float t = dht.readTemperature();

  // Read temperature as Fahrenheit (isFahrenheit = true)
  float f = dht.readTemperature(true);

  // Check if any reads failed and exit early (to try again).
  if (isnan(h) || isnan(t) || isnan(f)) {
    Serial.println( "Failed to read from DHT sensor!" );
    return;
  }

  // Compute heat index in Fahrenheit (the default)
  float hif = dht.computeHeatIndex(f, h);

  // Compute heat index in Celsius (isFahreheit = false)
  float hic = dht.computeHeatIndex(t, h, false);

  Serial.print( "Humidity:  ");
  Serial.print(h);
  Serial.print(" %t" );

  Serial.print( "Temperature:  ");

```

```
Serial.print(t);  
Serial.print(" *C ");  
Serial.print(f);  
Serial.print(" *Ft" );  
Serial.print( "Heat index: " );  
Serial.print(hic);  
Serial.print(" *C ");  
Serial.print(hif);  
Serial.println(" *F" );  
}
```

DHT::begin

Description

Initialize the DHT sensor.

Syntax

```
void DHT::begin(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: DHTTester

The code demos basic testing for various DHT humidity & temperature sensors. Please refer to code in the “DHT: DHT” section.

Notes and Warnings

Every time must include the header file “DHT.h” in front of the project to use the class function.

DHT::readTemperature

Description

Read temperature(Fahrenheit or Celcius) from the DHT sensor.

Syntax

```
float DHT::readTemperature(bool S, bool force);
```

Parameters

S: Temperature scale, True is Fahrenheit and False is Celcius

force: Index of checking sensor readability, default is False

Returns

The function returns the current temperature as a float value.

Example Code

Example: DHTTester

The code demos basic testing for various DHT humidity & temperature sensors. Please refer to code in the “DHT: DHT” section.

Notes and Warnings

Every time must include the header file “DHT.h” in front of the project to use the class function.

DHT::convertCtoF

Description

Convert a value from Celcius to Fahrenheit.

Syntax

```
float DHT::convertCtoF(float c);
```

Parameters

c: The value in Celcius

Returns

The function returns the temperature in Fahrenheit as a float number.

Example Code

Example: DHTTester

The code demos basic testing for various DHT humidity & temperature sensors. Please refer to code in the “DHT: DHT” section.

Notes and Warnings

Every time must include the header file “DHT.h” in front of the project to use the class function.

DHT::convertFtoC

Description

Convert a value from Fahrenheit to Celcius.

Syntax

```
float DHT::convertFtoC(float f);
```

Parameters

f: The value in Fahrenheit

Returns

The function returns the temperature in Celcius as a float number.

Example Code

Example: DHTTester

The code demos basic testing for various DHT humidity & temperature sensors. Please refer to code in the “DHT: DHT” section.

Notes and Warnings

Every time must include the header file “DHT.h” in front of the project to use the class function.

DHT::computeHeatIndex

Description

Compute the HeatIndex from the readings (Using both Rothfusz and Steadman’ s equations). More details refer to http://www.wpc.ncep.noaa.gov/html/heatindex_equation.shtml .

Syntax

float DHT::computeHeatIndex(float temperature, float percentHumidity, bool isFahrenheit);

Parameters

temperature: The temperature value

percentHumidity: The humidity percent value

isFahrenheit: True, temperature value in Fahrenheit (Default); False, temperature value in Celcius

Returns

The function returns the heat index in Fahrenheit or Celsius as a float value.

Example Code

Example: DHTTester

The code demos basic testing for various DHT humidity & temperature sensors. Please refer to code in the “DHT: DHT” section.

Notes and Warnings

Every time must include the header file “DHT.h” in front of the project to use the class function.

DHT::readHumidity

Description

Reading temperature or humidity from the DHT sensor and return as a float value(%).

Syntax

```
float DHT::readHumidity(bool force);
```

Parameters

force: Ignored.

Returns

The function returns current humidity in a float number (in %).

Example Code

Example: DHTTester

The code demos basic testing for various DHT humidity & temperature sensors. Please refer to code in the “DHT: DHT” section.

Notes and Warnings

Every time must include the header file “DHT.h” in front of the project to use the class function. Reading temperature or humidity takes about 250 milliseconds! Sensor readings may also be up to 2 seconds.

DHT::read

Description

Check if the sensor is readable.

Syntax

```
boolean DHT::read(bool force);
```

Parameters

force: Index of whether checking the sensor was read less than two seconds ago or not. False, checking; True, not checking.

Returns

Return the last correct measurement of the sensor. False, low means not readable; True, high means readable.

Example Code

Example: DHTTester

The code demos basic testing for various DHT humidity & temperature sensors. Please refer to code in the “DHT: DHT” section.

Notes and Warnings

Every time must include the header file “DHT.h” in front of the project to use the class function.

Class HttpClient**InterruptLock Class****Description**

Defines a class of turning off/on interrupts temporarily

Syntax

```
class InterruptLock
```

Members

Public Constructors	
InterruptLock::InterruptLock	Constructs a InterruptLock object
InterruptLock::~~ InterruptLock	Deconstructs a InterruptLock object

GTimer

Class EpdIF

GTimerClass Class

Description

GTimer is a hardware timer and this class is to operate it. The GTimer occupy same resource as PWM. Please make sure the timer is not conflict with you PWM index.

Syntax

```
class GTimerClass
```

Members

Public Constructors	
GTimerClass::GTimerClass	Constructs a GTimerClass object
Public Methods	
GTimerClass::begin	Initialize a timer and start it immediately
GTimerClass::stop	Stop a specific timer
GTimerClass::reload	Reload a specific timer
GTimerClass::read_us	Read current countdown value

GTimerClass::begin

Description

Initialize a timer and start it immediately.

Syntax

```
void GTimerClass::begin(uint32_t timerid, uint32_t duration_us, void (*handler)(uint32_t), bool periodical, uint32_t userdata);
```

Parameters

timerid: There are 5 valid GTimer with timer id 0~4.

duration_us: The duration of the timer. The time unit is microsecond and the precision is 32768Hz.

periodical: By default, the timer would keep periodically countdown and reload which means the handler would periodically be invoked.

userdata: The user data brings to the handler.

Returns

The function returns nothing.

Example Code

Example: TimerOneshot

```
/*  
  
This sketch shows how to use several hardware timers in invoke handler only once for each timer.  
  
*/  
  
#include <GTimer.h>  
  
void myhandler(uint32_t data) {  
  Serial.print( "I am timer!" );  
  Serial.println(data);  
}  
  
void setup() {  
  // Open serial communications and wait for port to open:  
  Serial.begin(115200);  
  
  while (!Serial) {  
    ; // wait for serial port to connect. Needed for native USB port only  
  }  
  
  // timerid 0, period 1s, invoke myhandler, invoke only once, user data is 0  
  GTimer.begin(0, 1 * 1000 * 1000, myhandler, false, 0);  
  
  // timerid 1, period 2s, invoke myhandler, invoke only once, user data is 1  
  GTimer.begin(1, 2 * 1000 * 1000, myhandler, false, 1);  
  
  GTimer.begin(2, 3 * 1000 * 1000, myhandler, false, 2);  
  
  GTimer.begin(3, 4 * 1000 * 1000, myhandler, false, 3);  
}
```

```
void loop() {  
  delay(1000);  
}
```

Example: TimerPeriodical

```
/*
```

This sketch shows how to use hardware timer and invoke interrupt handler periodically

```
*/
```

```
#include <GTimer.h>
```

```
int counter = 0;
```

```
void myhandler(uint32_t data) {
```

```
  counter++;
```

```
  Serial.print( "counter: ");
```

```
  Serial.println(counter);
```

```
  if (counter >= 10) {
```

```
    Serial.println( "stop timer" );
```

```
    GTimer.stop(0);
```

```
  }
```

```
}
```

```
void setup() {
```

```
  // Open serial communications and wait for port to open:
```

```
  Serial.begin(115200);
```

```
  while (!Serial) {
```

```
    ; // wait for serial port to connect. Needed for native USB port only
```

```
  }
```

```
  // timerid 0, period 1s, invoke myhandler
```

```
  GTimer.begin(0, (1 * 1000 * 1000), myhandler);
```

```
}
```

```
void loop() {
```

```
  delay(1000);
```

```
}
```

Notes and Warnings

Include “GTimer.h” to use the class function.

GTimerClass::stop**Description**

Stop a specific timer

Syntax

```
void GTimerClass::stop(uint32_t timerid);
```

Parameters

timerid: Stop the timer with this timer id

Returns

The function returns nothing.

Example Code

Example: TimerPeriodical, please refer to GTimerClass:: begin for more details.

Notes and Warnings

Include “GTimer.h” to use the class function.

GTimerClass::reload**Description**

Reload a specific timer. The GTimer is a countdown timer. Reload it would make it discard the current countdown value and restart countdown based on the duration.

Syntax

```
void GTimerClass::reload(uint32_t timerid, uint32_t duration_us);
```

Parameters

timerid: The timer to be modified

duration_us: The updated duration in unit of microseconds

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Include “GTimer.h” to use the class function.

GTimerClass::read_us

Description

Read the current countdown value

Syntax

```
uint64_t GTimerClass::read_us(uint32_t timerid);
```

Parameters

timerid: The timer to be read

Returns

The function returns the current countdown value.

Example Code

NA

Notes and Warnings

Include “GTimer.h” to use the class function.

Http

Class HttpClient

HttpClient Class

Description

Defines a class of using HttpClient

Syntax

class HttpClient

Members

Public Constructors	
HttpClient::HttpClient	Constructs a HttpClient object
Public Methods	
HttpClient::beginRequest	Start a more complex request
HttpClient::endRequest	End a more complex request
HttpClient::get	Connect to the server and start to send a GET request
HttpClient::post	Connect to the server and start to send a POST request
HttpClient::put	Connect to the server and start to send a PUT request
HttpClient::startRequest	Connect to the server and start to send the request
HttpClient::sendHeader	Send an additional header line
HttpClient::sendBasicAuth	Send a basic authentication header
HttpClient::finishRequest	Finish sending the HTTP request
HttpClient::responseStatusCode	Get the HTTP status code contained in the response
HttpClient::readHeader	Read the next character of the response headers
HttpClient::skipResponseHeaders	Skip any response headers to get to the body
HttpClient::endOfHeadersReached	Test whether all of the response headers have been consumed
HttpClient::endOfBodyReached	Test whether the end of the body has been reached
HttpClient::contentLength	Return the length of the body

HttpClient::HttpClient

Description

Constructs a HttpClient object. If Macro “PROXY_ENABLED” is defined, currently disabled as introduces a dependency on DNS.h in Ethernet.

Syntax

```
HttpClient::HttpClient(Client& aClient, const char* aProxy = NULL, uint16_t aProxyPort = 0);
```

```
HttpClient::HttpClient(Client& aClient);
```

Parameters

aClient: The object of class WiFiClient.

aProxy: The proxy name. The default proxy name is “NULL” .

aProxyPort: The proxy port. The default value for the proxy port is 0.

Returns

The function returns nothing.

Example Code

Example: SimpleHttpExample

The example demonstrate how to download the content from URL indicated in kHostname[].

```
#include <HttpClient.h>
```

```
#include <WiFi.h>
```

```
#include <WiFiClient.h>
```

```
char ssid[] = “YourNetwork” ;// your network SSID (name)
```

```
char pass[] = “password” ;// your network password (use for WPA, or use as key for WEP)
```

```
int keyIndex = 0; // your network key Index number (needed only for WEP)
```

```
// Name of the server we want to connect to
```

```
const char kHostname[] = “www.google.com” ;
```

```
const char kPath[] = “/” ;
```

```
// Number of milliseconds to wait without receiving any data before we give up
```

```
const int kNetworkTimeout = 30*1000;

// Number of milliseconds to wait if no data is available before trying again

const int kNetworkDelay = 1000;

int status = WL_IDLE_STATUS;

void setup() {
  Serial.begin(9600);

  while ( status != WL_CONNECTED) {
    Serial.print( "Attempting to connect to SSID: ");
    Serial.println(ssid);
    status = WiFi.begin(ssid, pass);
    // wait 10 seconds for connection:
    delay(10000);
  }
  Serial.println( "Connected to wifi" );
  printWifiStatus();
}

void loop() {
  int err =0;
  WiFiClient c;
  HttpClient http(c);
  err = http.get(kHostname, kPath);
  if (err == 0)
  {
    Serial.println( "startedRequest ok" );
    err = http.responseStatusCode();
    if (err >= 0)
    {
      Serial.print( "Got status code: ");
      Serial.println(err);
      // Usually you'd check that the response code is 200 or a
```

```
// similar "success" code (200-299) before carrying on,

// but we' ll print out whatever response we get

err = http.skipResponseHeaders();

if (err >= 0)

{

int bodyLen = http.contentLength();

Serial.print( "Content length is: ");

Serial.println(bodyLen);

Serial.println();

Serial.println( "Body returned follows:" );

// Now we' ve got to the body, so we can print it out

unsigned long timeoutStart = millis();

char c;

// Whilst we haven' t timed out & haven' t reached the end of the body

while ( (http.connected() || http.available()) &&

((millis() - timeoutStart) < kNetworkTimeout) )

{

if (http.available())

{

c = http.read();

// Print out this character

Serial.print(c);

bodyLen--;

// We read something, reset the timeout counter

timeoutStart = millis();

}

else

{

// We haven' t got any data, so let' s pause to allow some to arrive

delay(kNetworkDelay);
```



```
}  
}  
}  
else  
{  
  Serial.print( "Failed to skip response headers: ");  
  Serial.println(err);  
}  
}  
else  
{  
  Serial.print( "Getting response failed: ");  
  Serial.println(err);  
}  
}  
else  
{  
  Serial.print( "Connect failed: ");  
  Serial.println(err);  
}  
http.stop();  
// And just stop, now that we' ve tried a download  
while(1);  
}  
void printWifiStatus() {  
  // print the SSID of the network you' re attached to:  
  Serial.print( "SSID: ");  
  Serial.println(WiFi.SSID());  
  // print your WiFi shield' s IP address:  
  IPAddress ip = WiFi.localIP();
```

```
Serial.print( "IP Address: ");  
Serial.println(ip);  
  
// print the received signal strength:  
  
long rssi = WiFi.RSSI();  
Serial.print( "signal strength (RSSI):" );  
Serial.print(rssi);  
Serial.println(" dBm" );  
  
}
```

Notes and Warnings

Include "HttpClient.h" to use the class function.

HttpClient::beginRequest

Description

Start a more complex request. Use this when you need to send additional headers in the request, but you will also need to call endRequest() when you are finished.

Syntax

```
void HttpClient::beginRequest(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: SimpleHttpExample

The example demonstrates how to download the content from the URL indicated in kHostname[]. Details of the code can be found in the previous section of HttpClient: HttpClient.

Notes and Warnings

Include “HttpClient.h” to use the class function.

HttpClient::endRequest

Description

End a more complex request. Use this when you need to have sent additional headers in the request, but you will also need to call beginRequest() at the start.

Syntax

```
void HttpClient::endRequest(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: SimpleHttpExample

The example demonstrates how to download the content from the URL indicated in kHostname[]. Details of the code can be found in the previous section of HttpClient:: HttpClient.

Notes and Warnings

Include “HttpClient.h” to use the class function.

HttpClient::get

Description

Connect to the server and start to send a “GET” request. If the input parameter contains “aServerAddress” , the connection will not perform a DNS lookup and just purely connect to the given IP address.

Syntax

```
int HttpClient::get(const char* aServerName, uint16_t aServerPort, const char* aURLPath, const char* aUserAgent = NULL);  
int HttpClient::get(const char* aServerName, const char* aURLPath, const char* aUserAgent = NULL);  
int HttpClient::get(const IPAddress& aServerAddress, const char* aServerName, uint16_t aServerPort, const char* aURLPath, const char* aUserAgent = NULL);  
int HttpClient::get(const IPAddress& aServerAddress, const char* aServerName, const char* aURLPath, const char* aUserAgent = NULL);
```

Parameters

aServerName: The name of the server being connected to. If aServerName is “NULL” , the “Host” header line will not be sent.

aServerPort: The port on which server connected.

aURLPath: The URL to request.

aUserAgent: User-Agent string to be sent. If aUserAgent indicated as “NULL” , the default user-agent kUserAgent will be sent.

aServerAddress: IP address of the server to connect to.

Returns

Return 0 if successful, otherwise indicates an error occurs.

Example Code

Example: SimpleHttpExample

The example demonstrates how to download the content from the URL indicated in kHostname[]. Details of the code can be found in the previous section of HttpClient:: HttpClient.

Notes and Warnings

Include “HttpClient.h” to use the class function.

HttpClient::post

Description

Connect to the server and start to send a “POST” request. If the input parameter has “aServerAddress” , connects doesn’t perform a DNS lookup and just connects to the given IP address.

Syntax

```
int HttpClient::post(const char* aServerName, uint16_t aServerPort, const char* aURLPath, const char* aUserAgent = NULL);  
int HttpClient::post(const char* aServerName, const char* aURLPath, const char* aUserAgent = NULL);  
int HttpClient::post(const IPAddress& aServerAddress, const char* aServerName, uint16_t aServerPort, const char* aURLPath, const char* aUserAgent = NULL);  
int HttpClient::post(const IPAddress& aServerAddress, const char* aServerName, const char* aURLPath, const char* aUserAgent = NULL);
```

Parameters

aServerName: Name of the server being connected to. If NULL, the “Host” header line won’t be sent.

aServerPort: Port to connect to on the server.

aURLPath: Url to request.

aUserAgent: User-Agent string to be sent. If aUserAgent indicated as “NULL” , the default user-agent kUserAgent will be sent.

aServerAddress: IP address of the server to connect to.

Returns

Return 0 if successful, otherwise indicates an error occurs.

Example Code

Example: SimpleHttpExample

The example demonstrates how to download the content from the URL indicated in kHostname[]. Details of the code can be found in the previous section of HttpClient:: HttpClient.

Notes and Warnings

Include “HttpClient.h” to use the class function.

HttpClient::put**Description**

Connect to the server and start to send a PUT request. If the input parameter has “aServerAddress” , connects doesn’t perform a DNS lookup and just connects to the given IP address.

Syntax

```
int HttpClient::put(const char* aServerName, uint16_t aServerPort, const char* aURLPath, const char* aUserAgent = NULL);  
int HttpClient::put(const char* aServerName, const char* aURLPath, const char* aUserAgent = NULL);  
int HttpClient::put(const IPAddress& aServerAddress, const char* aServerName, uint16_t aServerPort, const char* aURLPath, const char* aUserAgent = NULL);  
int HttpClient::put(const IPAddress& aServerAddress, const char* aServerName, const char* aURLPath, const char* aUserAgent = NULL);
```

Parameters

aServerName: Name of the server being connected to. If NULL, the “Host” header line won’t be sent.

aServerPort: Port to connect to on the server.

aURLPath: Url to request.

aUserAgent: User-Agent string to be sent. If aUserAgent indicated as “NULL” , the default user-agent kUserAgent will be sent.

aServerAddress: IP address of the server to connect to.

Returns

Return 0 if successful, otherwise indicates an error occurs.

Example Code

Example: SimpleHttpExample

The example demonstrates how to download the content from the URL indicated in kHostname[]. Details of the code can be found in the previous section of HttpClient:: HttpClient.

Notes and Warnings

Include “HttpClient.h” to use the class function.

HttpClient::startRequest**Description**

Connect to the server and start to send the request.

Syntax

```
int HttpClient::startRequest(const char* aServerName, uint16_t aServerPort, const char* aURLPath, const char*
aHttpMethod, const char* aUserAgent);
int HttpClient::startRequest(const IPAddress& aServerAddress, const char* aServerName, uint16_t aServerPort, const
char* aURLPath, const char* aHttpMethod, const char* aUserAgent);
```

Parameters

aServerAddress: IP address of the server to connect to.

aServerName: Name of the server being connected to. If NULL, the “Host” header line won’t be sent.

aServerPort: Port to connect to on the server.

aURLPath: Url to request.

aHttpMethod: Type of HTTP request to make, e.g. “GET” , “POST” , etc.

aUserAgent: User-Agent string to send. If NULL the default user-agent kUserAgent will be sent.

Returns

Return 0 if successful, else error.

Example Code

Example: SimpleHttpExample

The example demonstrates how to download the content from the URL indicated in kHostname[]. Details of the code can be found in the previous section of HttpClient:: HttpClient.

Notes and Warnings

Include “HttpClient.h” to use the class function.

HttpClient::sendHeader

Description

The function sends an additional header line.

The function void HttpClient:: sendHeader(const char* aHeader);can only be called in between the calls to startRequest and finishRequest.

The other 2 functions void HttpClient::sendHeader(const char* aHeaderName, const char* aHeaderValue); and void HttpClient::sendHeader(const char* aHeaderName, const int aHeaderValue); are alternate form the previous one, which takes the header name and content as separately (as strings or integer). For example, to send an XXXXXX header, user might call sendHeader(“XXXXXX” , “Something”) or sendHeader(“XXXXXX” , 123).And the call will add the “: ” in the log to separate different header in the case of multiple headers.

Syntax

```
void HttpClient::sendHeader(const char* aHeader);  
void HttpClient::sendHeader(const char* aHeaderName, const char* aHeaderValue);  
void HttpClient::sendHeader(const char* aHeaderName, const int aHeaderValue);
```

Parameters

aHeader: Header line to send, in its entirety (but without the trailing CRLF. E.g. “Authorization: Basic YQDDCAIGES” .

aHeaderName: Type of header being sent.

aHeaderValue: Value for that header.

Returns

The function returns nothing.

Example Code

Example: SimpleHttpExample

The example demonstrates how to download the content from the URL indicated in kHostname[]. Details of the code can be found in the previous section of HttpClient:: HttpClient.

Notes and Warnings

Include “HttpClient.h” to use the class function.

HttpClient::sendBasicAuth

Description

The function sends a basic authentication header which will encode the given username and password, and send them in a suitable header line for doing Basic Authentication.

Syntax

```
void HttpClient::sendBasicAuth(const char* aUser, const char* aPassword);
```

Parameters

aUser: Username for the authorization.

aPassword: Password for the user aUser.

Returns

The function returns nothing.

Example Code

Example: SimpleHttpExample

The example demonstrates how to download the content from the URL indicated in kHostname[]. Details of the code can be found in the previous section of HttpClient:: HttpClient.

Notes and Warnings

Include “HttpClient.h” to use the class function.

HttpClient::finishRequest

Description

Finish sending the HTTP request. The function sends a blank line to signify the end of the request.

Syntax

```
void HttpClient::finishRequest(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: SimpleHttpExample

The example demonstrates how to download the content from the URL indicated in kHostname[]. Details of the code can be found in the previous section of HttpClient:: HttpClient.

Notes and Warnings

Include “HttpClient.h” to use the class function.

HttpClient::responseStatusCode

Description

Get the HTTP status code contained in the response. For example, “200” for successful requests, “404” for file not found, etc.

Syntax

```
int HttpClient::responseStatusCode(void);
```

Parameters

The function requires no input parameter.

Returns

Return 0 if successful, else error.

Example Code

Example: SimpleHttpExample

The example demonstrates how to download the content from the URL indicated in kHostname[]. Details of the code can be found in the previous section of HttpClient: HttpClient.

Notes and Warnings

Include “HttpClient.h” to use the class function.

HttpClient::readHeader

Description

The function reads the next character of the response headers. This functions the same as read() but to be used when reading through the headers which are slightly less efficient. The user might check whether the end of the headers has been reached by calling endOfHeadersReached(), although after that point this will still return data as read() would.

Syntax

```
int HttpClient::readHeader(void);
```

Parameters

The function requires no input parameter.

Returns

Return the next character of the response headers.

Example Code

Example: SimpleHttpExample

The example demonstrates how to download the content from the URL indicated in kHostname[]. Details of the code can be found in the previous section of HttpClient: HttpClient.

Notes and Warnings

Include “HttpClient.h” to use the class function.

HttpClient::skipResponseHeaders**Description**

Skip any response headers to get to the body. Use this if you don't want to do any special processing of the headers returned in the response. You can also use it after you've found all of the headers you're interested in, and just want to get on with processing the body.

Syntax

```
int HttpClient::skipResponseHeaders(void);
```

Parameters

The function requires no input parameter.

Returns

Return 0 if successful, else error.

Example Code

Example: SimpleHttpExample

The example demonstrates how to download the content from the URL indicated in kHostname[]. Details of the code can be found in the previous section of HttpClient:: HttpClient.

Notes and Warnings

Include “HttpClient.h” to use the class function.

HttpClient::endOfHeadersReached

Description

Test whether all of the response headers have been consumed.

Syntax

```
bool HttpClient::endOfHeadersReached(void);
```

Parameters

The function requires no input parameter.

Returns

Return true if we are now processing the response body, else false.

Example Code

Example: SimpleHttpExample

The example demonstrates how to download the content from the URL indicated in kHostname[]. Details of the code can be found in the previous section of HttpClient:: HttpClient.

Notes and Warnings

Include “HttpClient.h” to use the class function.

HttpClient::endOfBodyReached

Description

Test whether the end of the body has been reached. It only works if the Content-Length header was returned by the server.

Syntax

```
bool HttpClient::endOfBodyReached(void);
```

Parameters

The function requires no input parameter.

Returns

Return true if we are now at the end of the body, else false.

Example Code

Example: SimpleHttpExample

The example demonstrates how to download the content from the URL indicated in kHostname[]. Details of the code can be found in the previous section of HttpClient:: HttpClient.

Notes and Warnings

Include “HttpClient.h” to use the class function.

HttpClient::contentLength**Description**

The function returns the length of the body.

Syntax

```
int HttpClient::contentLength(void);
```

Parameters

The function requires no input parameter.

Returns

Return Length of the body, in bytes, or kNoContentLengthHeader if no Content-Length header was returned by the server.

Example Code

Example: SimpleHttpExample

The example demonstrates how to download the content from the URL indicated in kHostname[]. Details of the code can be found in the previous section of HttpClient:: HttpClient.

Notes and Warnings

Include “HttpClient.h” to use the class function.

IRDevice

Class HttpClient

IRDevice Class

Description

A class used for managing, sending, and receiving data using IR.

Syntax

```
class IRDevice
```

Members

Public Constructors	
A public constructor should not be used as this class is intended to be a singleton class. Access member functions using the object instance named IR.	

Public Methods	
IRDevice::getFreq	Get the current IR modulation frequency
IRDevice::begin	Allocate resources and start the IR device with a custom frequency
IRDevice::end	Stop the IR device operations and free up resources
IRDevice::send	Send IR raw data
IRDevice::beginNEC	Allocate resources and start the IR device with a frequency suitable for the NEC protocol
IRDevice::sendNEC	Send data using the NEC protocol
IRDevice::recvNEC	Receive data using the NEC protocol

IRDevice::getFreq

Description

Get the current IR modulation frequency.

Syntax

```
uint32_t getFreq(void);
```

Parameters

The function requires no input parameter.

Returns

Currently set IR modulation frequency in Hertz.

Example Code

NA

Notes and Warnings

NA

IRDevice::begin

Description

Allocate resources and start the IR device with a custom frequency.

Syntax

```
void begin(uint8_t receivePin, uint8_t transmitPin, uint32_t irMode, uint32_t freq);
```

Parameters

receivePin: pin on which IR sensor is connected. Hardware IR receiver is available at pins 3, 8, 17.

transmitPin: pin on which IR LED is connected. Hardware IR transmitter is available at pins 6, 9, 16.

irMode: transmit or receive mode. Valid values: IR_MODE_TX, IR_MODE_RX

freq: IR modulation frequency in Hertz

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

IR device can only operate in either transmit or receive mode.

IRDevice::end

Description

Stop the IR device operations and free up resources.

Syntax

```
void end(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

IRDevice::send**Description**

Send IR raw data.

Syntax

```
void send(const unsigned int buf[ ], uint16_t len);
```

Parameters

buf[] : IR raw signals (in us) in an array form.

len: total length of the IR raw signal array.

Returns

The function returns nothing.

Example Code

```
#include "IRDevice.h"
```

```
// User defined txPin, rxPin and carrier frequency
```

```
#define IR_RX_PIN 8
```

```
#define IR_TX_PIN 9
```

```
#define CARRIER_FREQ 38000
```

```
unsigned int irRawSignal[] = {
```

```
9000, 4500, // starting bit

560, 560, 560, 560, 560, 1690, 560, 560, 560, 560, 560, 560, 560, 560, 560, // address 00100000 : 4

560, 1690, 560, 1690, 560, 560, 560, 1690, 560, 1690, 560, 1690, 560, 1690, 560, 1690, // ~ address 11011111

560, 560, 560, 560, 560, 560, 560, 1690, 560, 560, 560, 560, 560, 560, 560, 560, // data 00010000 : 8

560, 1690, 560, 1690, 560, 1690, 560, 560, 560, 1690, 560, 1690, 560, 1690, 560, 1690, //~ data 11101111

560 // stoping bit

};

int DataLen = sizeof(irRawSignal) / sizeof(irRawSignal[0]); // 284/ 4 = 71

void setup()

{

Serial.begin(115200);

IR.begin(IR_RX_PIN, IR_TX_PIN, IR_MODE_TX, CARRIER_FREQ);

}

void loop()

{

IR.send(irRawSignal, DataLen);

Serial.println( "Finished Sending NEC Raw Data..." );

delay(3000);

}
```

Notes and Warnings

IR Raw Data array contains information in the form of consecutive microseconds (us). For more details, please refer to:
<http://www.righ.to.com/2009/08/multi-protocol-infrared-remote-library.html>.

IRDevice::beginNEC

Description

Allocate resources and start the IR device with a frequency suitable for the NEC protocol.

Syntax

```
void beginNEC(uint8_t receivePin, uint8_t transmitPin, uint32_t irMode);
```

Parameters

receivePin: pin on which IR sensor is connected. Hardware IR receiver is available at pins 3, 8, 17.

transmitPin: pin on which IR LED is connected. Hardware IR transmitter is available at pins 6, 9, 16.

irMode: transmit or receive mode. Valid values: IR_MODE_TX, IR_MODE_RX

Returns

The function returns nothing.

Example Code

Example: IRRecvNEC

```
#include "IRDevice.h"

uint8_t adr = 0;

uint8_t cmd = 0;

void setup() {
  //Initialize serial and wait for port to open:
  Serial.begin(115200);

  while (!Serial) {
    ; // wait for serial port to connect. Needed for native USB port only
  }

  IR.beginNEC(8, 9, IR_MODE_RX); // configure for NEC IR protocol
}

void loop() {
  if (IR.recvNEC(adr, cmd, 1000)) {
    Serial.print( "Received ");
    Serial.print(adr);
    Serial.print(cmd);
    Serial.println();
  } else {
```

```
Serial.println( "Received nothing, timed out" );  
  
}  
  
//IR.end();  
  
}
```

Notes and Warnings

IR device can only operate in either transmit or receive mode. Refer to <https://techdocs.altium.com/display/FPGA/NEC+Infrared+Transmission+Protocol> for the NEC protocol.

IRDevice::sendNEC

Description

Send data using the NEC protocol.

Syntax

```
void sendNEC(uint8_t adr, uint8_t cmd);
```

Parameters

adr: 8-bit address to transmit

cmd: 8-bit command to transmit

Returns

The function returns nothing.

Example Code

Example: IRSendNEC

```
#include "IRDevice.h"
```

```
uint8_t adr = 0;
```

```
uint8_t cmd = 0;
```

```
void setup() {
```

```
//Initialize serial and wait for port to open:
Serial.begin(115200);
while (!Serial) {
; // wait for serial port to connect. Needed for native USB port only
}
IR.beginNEC(8, 9, IR_MODE_TX); // configure for NEC IR protocol
}
void loop() {
if (cmd++ >=255) {
adr++;
}
IR.sendNEC(adr, cmd);
Serial.print( "Sent ");
Serial.print(adr);
Serial.print(cmd);
Serial.println();
//IR.end(); // Call this method to stop IR device and free up the pins for other uses
}
```

Notes and Warnings

IR device can only operate in either transmit or receive mode. Refer to <https://techdocs.altium.com/display/FPGA/NEC+Infrared+Transmission+Protocol> for the NEC protocol.

IRDevice::recvNEC

Description

Receive data using the NEC protocol.

Syntax

```
void recvNEC(uint8_t& adr, uint8_t& cmd uint32_t timeout);
```

Parameters

adr: variable to store received NEC address

cmd: variable to store received NEC command

timeout: time duration to wait for an incoming transmission

Returns

The function returns “1” if data has been received, returns “0” if no data has been received.

Example Code

Example: IRRecvNEC

Details of the code can be found in the previous section of IRDevice::beginNEC.

Notes and Warnings

IR device can only operate in either transmit or receive mode. Refer to <https://techdocs.altium.com/display/FPGA/NEC+Infrared+Transmission+Protocol> for the NEC protocol.

MDNS

Class HttpClient

MDNSClass Class

Description

A class used for registering and removing MDNS service records.

Syntax

```
class MDNSClass
```

Members

Public Constructors	
The public constructor should not be used as this class is intended to be a singleton class. Access member functions using the object instance named MDNS.	

Public Methods	
MDNSClass::begin	Start MDNS operations
MDNSClass::end	Stop MDNS operations
MDNSClass::registerService	Add a service record
MDNSClass::deregisterService	Remove service record
MDNSClass::updateService	Update service record

MDNSClass::begin

Description

Start MDNS operations to begin responding to MDNS queries.

Syntax

```
void begin(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: mDNS_On_Arduino_IDE

This example shows how to register Ameba as a service that can be recognized by Arduino IDE. If both of the PC runs Arduino IDE and the Ameba board are connecting to the same local network. Then you can find Ameba in “Tools” -> “Port” -> “Arduino at 192.168.1.238 (Ameba RTL8195A), which means the Arduino IDE find Ameba via mDNS.

```
#include <WiFi.h>
```

```
#include <AmebaMDNS.h>
```

```
char ssid[] = “yourNetwork” ;// your network SSID (name)
```

```
char pass[] = “secretPassword” ;// your network password
```

```
MDNSService service( “MyAmeba” , “_arduino._tcp” , “local” , 5000);
```

```
void setup() {
```

```
printf( "Try to connect to %srn" , ssid);

while (WiFi.begin(ssid, pass) != WL_CONNECTED) {

printf( "Failed. Wait 1s and retry...rn" );

delay(1000);

}

printf( "Connected to %srn" , ssid);

service.addTxtRecord( "board" , strlen( "ameba_rtl8195a" ), "ameba_rtl8195a" );

service.addTxtRecord( "auth_upload" , strlen( "no" ), "no" );

service.addTxtRecord( "tcp_check" , strlen( "no" ), "no" );

service.addTxtRecord( "ssh_upload" , strlen( "no" ), "no" );

printf( "Start mDNS servicern" );

MDNS.begin();

printf( "register mDNS servicern" );

MDNS.registerService(service);

}

void loop() {

// put your main code here, to run repeatedly:

delay(1000);

}
```

Notes and Warnings

Include "AmebaMDNS.h" to use the class function.

MDNSClass::end

Description

Stop MDNS operations and stop responding to MDNS queries.

Syntax

```
void end(void);
```


Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Include “AmebaMDNS.h” to use the class function.

MDNSClass::registerService**Description**

Add a service record to be included in MDNS responses.

Syntax

```
void register service(MDNSService service);
```

Parameters

service: MDNSService class object with required MDNS service data

Returns

The function returns nothing.

Example Code

Example: mDNS_On_Arduino_IDE

Details of the code can be found in the previous section of MDNSClass:: begin.

Notes and Warnings

Include “AmebaMDNS.h” to use the class function.

MDNSClass::deregisterService

Description

Remove a service record from MDNS responses.

Syntax

```
void deregisterService(MDNSService service);
```

Parameters

service: MDNSService class object to be removed

Returns

The function returns nothing.

Example Code

Example: mDNS_On_Arduino_IDE

Details of the code can be found in the previous section of MDNSClass:: begin.

Notes and Warnings

Include “AmebaMDNS.h” to use the class function.

MDNSClass::updateService

Description

Update a service record.

Syntax

```
void updateService(MDNSService service, unsigned int ttl);
```

Parameters

service: MDNSService class object to be updated

ttl: time-to-live(TTL) for service

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Include “AmebaMDNS.h” to use the class function.

Class HttpClient

MDNSService Class

Description

A class used for creating MDNS service records.

Syntax

class MDNSService

Members

Public Constructors	
MDNSService::MDNSService	Create a MDNS service record
Public Methods	
MDNSService::addTxtRecord	Add text to MDNS service record

MDNSService::MDNSService

Description

Create a MDNS service record.

Syntax

MDNSService(char* name, char* service_type, char* domain, unsigned short port, int bufsize);

Parameters

name: device name

service_type: MDNS service type

domain: host domain

port: network port

bufsize: size of buffer for MDNS text record

Returns

The function returns nothing.

Example Code

Example: mDNS_On_Arduino_IDE

Notes and Warnings

Include “AmebaMDNS.h” to use the class function.

MDNSService::addTxtRecord

Description

Add text to MDNS service record.

Syntax

```
int addTextRecord(char* key, int value_len, char* value);
```

Parameters

key: record type expressed as character string

value_len: length of value string

value: record value expressed as character string

Returns

0 if add record successful

Example Code

Example: mDNS_On_Arduino_IDE

Notes and Warnings

Include “AmebaMDNS.h” to use the class function.

MQTTClient**Class PMUClass****PubSubClient Class****Description**

Defines a class of MQTT implementation for Ameba.

Syntax

```
class PubSubClient
```

Members

Public Constructors	
PubSubClient::PubSubClient	Constructs a PubSubClient object
Public Methods	
PubSubClient::setServer	Set MQTT server address and port
PubSubClient::setCallback	Set callback function
PubSubClient::setClient	Set WiFi client
PubSubClient::setStream	Set data stream
PubSubClient::connect	Attempt to connect to server
PubSubClient::disconnect	Disconnect from current session
PubSubClient::publish	Publish a message to server
PubSubClient::publish_P	Same as above
PubSubClient::subscribe	Subscribe to a topic
PubSubClient::unsubscribe	Unsubscribe to a topic
PubSubClient::loop	Keep MQTT session alive and process any queuing tasks
PubSubClient::connected	Check if client still connected
PubSubClient::state	Return connection state

PubSubClient::PubSubClient

Description

Constructs a PubSubClient object and, if applicable, sets server address, port, callback function, data stream and wifi client.

Syntax

```
PubSubClient::PubSubClient();
PubSubClient::PubSubClient(Client& client);
PubSubClient::PubSubClient(IPAddress, uint16_t, Client& client);
PubSubClient::PubSubClient(IPAddress, uint16_t, Client& client, Stream&);
PubSubClient::PubSubClient(IPAddress, uint16_t, MQTT_CALLBACK_SIGNATURE, Client& client);
PubSubClient::PubSubClient(IPAddress, uint16_t, MQTT_CALLBACK_SIGNATURE, Client& client, Stream&);
PubSubClient::PubSubClient(uint8_t *, uint16_t, Client& client);
PubSubClient::PubSubClient(uint8_t *, uint16_t, Client& client, Stream&);
PubSubClient::PubSubClient(uint8_t *, uint16_t, MQTT_CALLBACK_SIGNATURE, Client& client);
PubSubClient::PubSubClient(uint8_t *, uint16_t, MQTT_CALLBACK_SIGNATURE, Client& client, Stream&);
PubSubClient::PubSubClient(const char*, uint16_t, Client& client);
PubSubClient::PubSubClient(const char*, uint16_t, Client& client, Stream&);
PubSubClient::PubSubClient(const char*, uint16_t, MQTT_CALLBACK_SIGNATURE, Client& client);
```

```
PubSubClient::PubSubClient(const char*, uint16_t, MQTT_CALLBACK_SIGNATURE, Client& client, Stream&);
```

Parameters

client: the network client to use, for example WiFiClient

IPAddress: MQTT server address

port: port for MQTT, usually 1883 for unencrypted connection

MQTT_CALLBACK_SIGNATURE: callback function for MQTT

Stream: a stream to write received messages to

Returns

The function returns nothing.

Example Code

Example: MQTT_Basic

```
#include <WiFi.h>

#include <PubSubClient.h>

// Update these with values suitable for your network.

char ssid[] = "yourNetwork" ; // your network SSID (name)

char pass[] = "secretPassword" ; // your network password

int status = WL_IDLE_STATUS; // the Wifi radio's status

char mqttServer[] = "test.mosquitto.org" ;

char clientId[] = "amebaClient" ;

char publishTopic[] = "outTopic" ;

char publishPayload[] = "hello world" ;

char subscribeTopic[] = "inTopic" ;

void callback(char* topic, byte* payload, unsigned int length) {

  Serial.print( "Message arrived [ ");

  Serial.print(topic);

  Serial.print(" ] ");

  for (int i=0;i<length;i++) {
```

```
Serial.print((char)payload[i]);  
  
}  
  
Serial.println();  
  
}  
  
WiFiClient wifiClient;  
  
PubSubClient client(wifiClient);  
  
void reconnect() {  
  // Loop until we' re reconnected  
  
  while (!client.connected()) {  
  
    Serial.print( "Attempting MQTT connection..." );  
  
    // Attempt to connect  
  
    if (client.connect(clientId)) {  
  
      Serial.println( "connected" );  
  
      // Once connected, publish an announcement...  
  
      client.publish(publishTopic, publishPayload);  
  
      // ...and resubscribe  
  
      client.subscribe(subscribeTopic);  
  
    } else {  
  
      Serial.print( "failed, rc=" );  
  
      Serial.print(client.state());  
  
      Serial.println(" try again in 5 seconds" );  
  
      // Wait 5 seconds before retrying  
  
      delay(5000);  
  
    }  
  
  }  
  
}  
  
void setup()  
{  
  
  Serial.begin(38400);  
  
  while (status != WL_CONNECTED) {
```



```
Serial.print( "Attempting to connect to SSID: ");
Serial.println(ssid);
// Connect to WPA/WPA2 network. Change this line if using open or WEP network:
status = WiFi.begin(ssid, pass);
// wait 10 seconds for connection:
delay(10000);
}
client.setServer(mqttServer, 1883);
client.setCallback(callback);
// Allow the hardware to sort itself out
delay(1500);
}
void loop()
{
if (!client.connected()) {
reconnect();
}
client.loop();
}
```

Notes and Warnings

PubSubClient::PubSubClient(Client& client) would suffice for normal MQTT connection

PubSubClient::setServer

Description

Sets the server details.

Syntax

PubSubClient& PubSubClient::setServer(uint8_t * ip, uint16_t port)

PubSubClient& PubSubClient::setServer(IPAddress ip, uint16_t port)

PubSubClient& PubSubClient::setServer(const char * domain, uint16_t port)

Parameters

ip: the address of the server

port: the port to connect to, default 1883

domain: the address of the server

Returns

The client instance, allowing the function to be chained

Example Code

Example: MQTT_Basic

Notes and Warnings

NA

PubSubClient::setCallback

Description

Sets the message callback function.

Syntax

PubSubClient& PubSubClient::setCallback(MQTT_CALLBACK_SIGNATURE)

Parameters

MQTT_CALLBACK_SIGNATURE: a pointer to a message callback function called when a message arrives for a subscription created by this client.

Returns

The client instance, allowing the function to be chained.

Example Code

Example: MQTT_Basic

Notes and Warnings

NA

PubSubClient::setClient

Description

Sets the network client instance to use.

Syntax

```
PubSubClient& PubSubClient::setClient(Client& client)
```

Parameters

client: the network client to use, for example WiFiClient

Returns

The client instance, allowing the function to be chained

Example Code

NA

Notes and Warnings

NA

PubSubClient::setStream

Description

Sets the stream to write received messages to.

Syntax

```
PubSubClient& PubSubClient::setStream(Stream& stream)
```

Parameters

stream: a stream to write received messages to

Returns

The client instance, allowing the function to be chained.

Example Code

NA

Notes and Warnings

NA

PubSubClient::connect

Description

Connects the client to the server.

Syntax

```
boolean PubSubClient::connect(const char *id)
```

```
boolean PubSubClient::connect(const char *id, const char *user, const char *pass)
```

```
boolean PubSubClient::connect(const char *id, const char* willTopic, uint8_t willQos, boolean willRetain, const char* willMessage)
```

```
boolean PubSubClient::connect(const char *id, const char *user, const char *pass, const char* willTopic, uint8_t willQos, boolean willRetain, const char* willMessage)
```

Parameters

id: Client ID, a unique string identifier

user: Username for authentication, default NULL

pass: Password for authentication, default NULL

willTopic: the topic to be used by the will message

willQoS: the quality of service to be used by the will message

willRetain: whether the will should be published with the retain flag

willMessage: the payload of the will message

Returns

True –connection succeeded

False –connection failed

Example Code

Example: MQTT_Basic

Notes and Warnings

Client ID is required and should always be unique else connection might be rejected by the server.

PubSubClient::disconnect**Description**

Disconnect the client

Syntax

```
void PubSubClient::disconnect(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

PubSubClient::publish

Description

Publishes a message to the specified topic.

Syntax

`boolean PubSubClient::publish(const char* topic, const char* payload)`

`boolean PubSubClient::publish(const char* topic, const char* payload, boolean retained)`

`boolean PubSubClient::publish(const char* topic, const uint8_t* payload, unsigned int plength)`

`boolean PubSubClient::publish(const char* topic, const uint8_t* payload, unsigned int plength, boolean retained)`

Parameters

topic: the topic to publish to

payload: the message to publish

plength: the length of the payload. Required if payload is a byte[]

retained: whether the message should be retained

–false –not retained

–true –retained

Returns

False –publish failed, either connection lost or message too large

True –publish succeeded

Example Code

Example: MQTT_Basic

Notes and Warnings

Default max packet size is 128 bytes.

PubSubClient::publish_P

Description

Publishes a message stored in PROGMEM to the specified topic.

Syntax

boolean PubSubClient::publish_P(const char* topic, const uint8_t* payload, unsigned int plength, boolean retained)

Parameters

topic: the topic to publish to

payload: the message to publish

plength: the length of the payload. Required if payload is a byte[]

retained: whether the message should be retained

–false –not retained

–true –retained

Returns

False –publish failed, either connection lost or message too large

True –publish succeeded

Example Code

NA

Notes and Warnings

NA

PubSubClient::subscribe

Description

Subscribes to messages published to the specified topic.

Syntax

boolean PubSubClient::subscribe(const char* topic)

boolean PubSubClient::subscribe(const char* topic, uint8_t qos)

Parameters

topic: the topic to subscribe to

qos: the qos to subscribe at

Returns

False –sending the subscribe failed, either connection lost or message too large

True –sending the subscribe succeeded

Example Code

Example: MQTT_Basic

Notes and Warnings

NA

PubSubClient::unsubscribe

Description

Unsubscribes from the specified topic.

Syntax

boolean PubSubClient::unsubscribe(const char* topic)

Parameters

topic: the topic to unsubscribe to

Returns

False –sending the unsubscribe failed, either connection lost or message too large

True –sending the unsubscribe succeeded

Example Code

NA

Notes and Warnings

NA

PubSubClient::loop

Description

A must method called regularly to allow the client to process incoming messages and maintain its connection to the server.

Syntax

```
boolean PubSubClient::loop(void)
```

Parameters

The function requires no input parameter.

Returns

False –the client is no longer connected

True –the client is still connected

Example Code

Example: MQTT_Basic

Notes and Warnings

A required method that should not be blocked for too long.

PubSubClient::connected**Description**

Checks whether the client is connected to the server.

Syntax

```
boolean PubSubClient::connected(void)
```

Parameters

The function requires no input parameter.

Returns

False –the client is not connected

True –the client is connected

Example Code

Example: MQTT_Basic

Notes and Warnings

NA

PubSubClient::state

Description

Returns the current state of the client. If a connection attempt fails, this can be used to get more information about the failure.

All of the values have corresponding constants defined in PubSubClient.h.

Syntax

int PubSubClient::state(void)

Parameters

The function requires no input parameter.

Returns

-4 : MQTT_CONNECTION_TIMEOUT –the server didn’ t respond within the keepalive time

-3 : MQTT_CONNECTION_LOST –the network connection was broken

-2 : MQTT_CONNECT_FAILED –the network connection failed

-1 : MQTT_DISCONNECTED –the client is disconnected cleanly

0 : MQTT_CONNECTED –the client is connected

1 : MQTT_CONNECT_BAD_PROTOCOL –the server doesn’ t support the requested version of MQTT

2 : MQTT_CONNECT_BAD_CLIENT_ID –the server rejected the client identifier

3 : MQTT_CONNECT_UNAVAILABLE –the server was unable to accept the connection

4 : MQTT_CONNECT_BAD_CREDENTIALS –the username/password were rejected

5 : MQTT_CONNECT_UNAUTHORIZED –the client was not authorized to connect

Example Code

Example: MQTT_Basic

Notes and Warnings

NA

Readme

The Ameba MQTT related APIs and examples are works based on the [PubSubClient libraries](#) written by Nicholas O'Leary

These include,

- `PubSubClient.cpp`
- `PubSubClient.h`

These libraries are under MIT License.

NTPClient

Readme

The NTPClient library is based on the NTPClient library written by Fabrice Weinberg, which can be found at <https://github.com/arduino-libraries/NTPClient>.

These include,

- `NTPClient.cpp`
- `NTPClient.h`

These libraries are licensed under MIT License.

PowerSave

Class PMUClass

PMUClass Class

Description

Defines a class of using Power Save API

Syntax

```
class PMUClass
```

Members

Public Constructors	
PMUClass::PMUClass	Constructs a PMUClass object
Public Methods	
PMUCLASS::begin	Initialize the PMUCLASS and select sleep mode
PMUCLASS::AONTimerDuration	Set the duration of AON Timer
PMUCLASS::AONTimerCmd	Disable the AON Timer for power save usage
PMUCLASS::RTCWakeSetup	Set up RTC Timer for power save usage
PMUCLASS::enable	Enable power save deep sleep mode
PMUCLASS::AONWakeReason	Check AON wakeup source
PMUCLASS::WakePinCheck	Check AON GPIO pin wakeup source
PMUCLASS::AONWakeClear	Clear all the AON wakeup source
PMUCLASS::DsleepWakeStatusGet	Check if deepsleep mode is set
PMUCLASS::TL_sysactive_time	Tickless mode system active time
PMUCLASS::TL_wakelock	Tickless mode wake lock, select acquire of release
PMUCLASS::DS_AON_TIMER_WAKEUP	Return the Wakeup source
PMUCLASS::DS_RTC_WAKEUP	Return the Wakeup source
PMUCLASS::TL_UART_WAKEUP	Return the Wakeup source
PMUCLASS::TL_RTC_WAKEUP	Return the Wakeup source
PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA12	Return the Wakeup source
PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA13	Return the Wakeup source
PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA14	Return the Wakeup source
PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA15	Return the Wakeup source
PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA16	Return the Wakeup source
PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA17	Return the Wakeup source
PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA18	Return the Wakeup source
PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA19	Return the Wakeup source
PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA20	Return the Wakeup source
PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA21	Return the Wakeup source
PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA25	Return the Wakeup source
PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA26	Return the Wakeup source

PMUCLASS::PMUCLASS

Description

Constructs a PMUCLASS object.

Syntax

```
PMUCLASS::PMUCLASS(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::begin

Description

Initialize the PMUCLASS and select sleep mode.

Syntax

```
void PMUClass::begin(uint32_t sleep_mode);
```

Parameters

sleep_mode: Selection value, “11” enters the DeepSleep Mode, “22” enters the Tickless Mode

Returns

The function returns nothing.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::AONTimerDuration

Description

Set the duration of AON Timer

Syntax

```
void PMUClass::AONTimerDuration(uint32_t duration_ms);
```

Parameters

duration_ms: Timer duration between 0 to 32760000ms.

Returns

The function returns nothing.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::AONTimerCmd

Description

Disable the AON timer for power save usage.

Syntax

```
void PMUClass::AONTimerCmd(void);
```

Parameters

c: The value in Celcius.

Returns

The function returns nothing.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::RTCWakeSetup

Description

Set up the RTC timer for power save usage.

Syntax

```
void PMUClass::RTCWakeSetu(uint32_t duration_d, uint32_t duration_h, uint32_t duration_m, uint32_t duration_s);
```

Parameters

duration_d: Set alarm for number of days from 0.

duration_h: Set alarm for number of hours from 0.

duration_m: Set alarm for number of minutes from 0.

duration_s: Set alarm for number of seconds from 0.

Returns

The function returns nothing.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::enable

Description

Enable power save deep sleep mode

Syntax

```
void PMUClass::enable(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::AONWakeReason

Description

Check the AON wakeup source

Syntax

```
uint32_t PMUClass::AONWakeReason(void);
```

Parameters

The function requires no input parameter.

Returns

Returns the value of wakeup deepsleep source. “11” for AON pin, “22” for AON timer, “33” for RTC timer and “0” for none.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::WakePinCheck

Description

Check which AON GPIO pins are the wakeup source

Syntax

```
int PMUClass::WakePinCheck(void);
```

Parameters

The function requires no input parameter.

Returns

Return the pin number for indicating Arduino pin names.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::AONWakeClear

Description

Clear all AON Wakeup source.

Syntax

```
void PMUClass::AONWakeClear(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::DsleepWakeStatusGet

Description

Check if deepsleep mode is set.

Syntax

```
bool PMUClass::DsleepWakeStatusGet(void);
```

Parameters

The function requires no input parameter.

Returns

Return TRUE when enter DeepSleep Mode or FALSE for negative.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::TL_sysactive_time

Description

Tickless mode system active time.

Syntax

```
void PMUClass::TL_sysactive_time(uint32_t duration_ms);
```

Parameters

duration_ms: Set the duration of system active time. The unit is in milliseconds.

Returns

The function returns nothing.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::TL_wakelock

Description

Tickless mode wake lock, select acquire or release.

Syntax

```
void PMUClass::TL_wakelock(uint32_t select_lock);
```

Parameters

select_lock: Wake lock selection value, “1” for acquire or “0” for release.

Returns

The function returns nothing.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::DS_AON_TIMER_WAKEUP**Description**

Return the Wakeup source for DeepSleep Mode.

Syntax

```
void PMUClass::DS_AON_TIMER_WAKEUP(void);
```

Parameters

The function requires no input parameter.

Returns

This function returns AON Timer as the wakeup source and output it on the Serial monitor.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::DS_RTC_WAKEUP

Description

Return the Wakeup source for DeepSleep Mode.

Syntax

```
void PMUClass::DS_RTC_WAKEUP(void);
```

Parameters

The function requires no input parameter.

Returns

This function returns RTC as the wakeup source and output it on the Serial monitor.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::TL_UART_WAKEUP

Description

Return the Wakeup source for Tickless Mode.

Syntax

```
void PMUClass::TL_UART_WAKEUP(void);
```

Parameters

The function requires no input parameter.

Returns

This function returns LOGUART as the wakeup source and output it on the Serial monitor.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::TL_RTC_WAKEUP**Description**

Return the Wakeup source for Tickless Mode.

Syntax

```
void PMUClass::TL_RTC_WAKEUP(void);
```

Parameters

The function requires no input parameter.

Returns

This function returns RTC as the wakeup source and output it on the Serial monitor.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA12**Description**

Return the Wakeup source.

Syntax

```
void PMUClass::AON_WAKEPIN_WAKEUP_GPIOA12(void);
```

Parameters

The function requires no input parameter.

Returns

This function returns AON GPIOA12 pin as the wakeup source and output it on the Serial monitor.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA13

Description

Return the Wakeup source.

Syntax

```
void PMUClass::AON_WAKEPIN_WAKEUP_GPIOA13(void);
```

Parameters

The function requires no input parameter.

Returns

This function returns AON GPIOA13 pin as the wakeup source and output it on the Serial monitor.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA14

Description

Return the Wakeup source.

Syntax

```
void PMUClass::AON_WAKEPIN_WAKEUP_GPIOA14(void);
```

Parameters

The function requires no input parameter.

Returns

This function returns AON GPIOA14 pin as the wakeup source and output it on the Serial monitor.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA15

Description

Return the Wakeup source.

Syntax

```
void PMUClass::AON_WAKEPIN_WAKEUP_GPIOA15(void);
```

Parameters

The function requires no input parameter.

Returns

This function returns AON GPIOA15 pin as the wakeup source and output it on the Serial monitor.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA16

Description

Return the Wakeup source.

Syntax

```
void PMUClass::AON_WAKEPIN_WAKEUP_GPIOA16(void);
```

Parameters

The function requires no input parameter.

Returns

This function returns AON GPIOA16 pin as the wakeup source and output it on the Serial monitor.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA17

Description

Return the Wakeup source.

Syntax

```
void PMUClass::AON_WAKEPIN_WAKEUP_GPIOA17(void);
```

Parameters

The function requires no input parameter.

Returns

This function returns AON GPIOA17 pin as the wakeup source and output it on the Serial monitor.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA18**Description**

Return the Wakeup source.

Syntax

```
void PMUClass::AON_WAKEPIN_WAKEUP_GPIOA18(void);
```

Parameters

The function requires no input parameter.

Returns

This function returns AON GPIOA18 pin as the wakeup source and output it on the Serial monitor.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA19

Description

Return the Wakeup source.

Syntax

```
void PMUClass::AON_WAKEPIN_WAKEUP_GPIOA19(void);
```

Parameters

The function requires no input parameter.

Returns

This function returns AON GPIOA19 pin as the wakeup source and output it on the Serial monitor.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA20

Description

Return the Wakeup source.

Syntax

```
void PMUClass::AON_WAKEPIN_WAKEUP_GPIOA20(void);
```

Parameters

The function requires no input parameter.

Returns

This function returns AON GPIOA20 pin as the wakeup source and output it on the Serial monitor.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA21**Description**

Return the Wakeup source.

Syntax

```
void PMUClass::AON_WAKEPIN_WAKEUP_GPIOA21(void);
```

Parameters

The function requires no input parameter.

Returns

This function returns AON GPIOA21 pin as the wakeup source and output it on the Serial monitor.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA25**Description**

Return the Wakeup source.

Syntax

```
void PMUClass::AON_WAKEPIN_WAKEUP_GPIOA25(void);
```

Parameters

The function requires no input parameter.

Returns

This function returns AON GPIOA25 pin as the wakeup source and output it on the Serial monitor.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

PMUCLASS::AON_WAKEPIN_WAKEUP_GPIOA26

Description

Return the Wakeup source.

Syntax

```
void PMUClass::AON_WAKEPIN_WAKEUP_GPIOA26(void);
```

Parameters

The function requires no input parameter.

Returns

This function returns AON GPIOA26 pin as the wakeup source and output it on the Serial monitor.

Example Code

Example: DeepSleep_DHT_Eink_Example; DeepSleep_DHT_LCD_Example; DeepSleepMode; TicklessMode;

Notes and Warnings

Include “PMUCLASS.h” in order to use the class function.

RTC

Class RTC

RTC Class

Description

A class used for displaying date and time and alarm configuration using RTC, the independent BCD (Binary-Coded-Decimal) timer.

Syntax

```
class RTC
```

Members

Public Constructors	
A public constructor should not be used as this class is intended to be a singleton class. Access member functions using the object instance named RTC.	

Public Methods	
RTC:: Init	Initializes the RTC device, including the Clock, the RTC registers, and other functions
RTC:: DeInit	Deinitialize the RTC device
RTC:: Write	Set the specified timestamp in seconds to RTC
RTC:: Read	Get the current timestamp in seconds from RTC
RTC:: Wait	Wait for 1 second
RTC:: SetEpoch	Convert human-readable time to epoch time

RTC::Init

Description

Initializes the RTC device, including the Clock, the RTC registers, and other functions.

Syntax

```
void RTC::Init(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: RTC

```
/*
 * This function describes how to use the RTC API.
 * The RTC function is implemented by an independent BCD timer/counter.
 * This example will print out the time information every second.
 */

#include <stdio.h>
#include <time.h>
#include "rtc.h"
#define YEAR 2020
#define MONTH 9
#define DAY 10
#define HOUR 20
#define MIN 30
#define SEC 40

/* Create an rtc object */
RTC rtc;

int32_t seconds;

struct tm *timeinfo;

void setup() {
  Serial.begin(115200);
  rtc.Init(); // initialize RTC
}
```



```

void loop() {
    // step 1: convert user time to epoch
    int epochTime = humanReadableToEpoch(YEAR, MONTH, DAY, HOUR, MIN, SEC);

    // step 2: write epoch time to rtc
    rtc.Write(epochTime);

    while (1) {
        seconds = rtc.Read();

        printf( "Epoch Time (in s) since January 1, 1970 = %dsn" , seconds);

        printf( "Time as a basic string = %s" , ctime(&seconds));

        timeinfo = localtime(&seconds);

        printf( "Time as a custom formatted string = %d-%d-%d %d:%d:%dn" ,
            (timeinfo->tm_year + 1900), (timeinfo->tm_mon + 1), timeinfo->tm_mday, timeinfo->tm_hour,
            timeinfo->tm_min, timeinfo->tm_sec);

        Serial.println();

        rtc.wait(1);
    }
}

// convert human readable time to epoch time
int humanReadableToEpoch(int year, int month, int day, int hour, int min, int sec) {
    struct tm t;
    time_t t_of_day;

    t.tm_year = year - 1900; // Year - 1970
    t.tm_mon = month - 1; // Month, where 0 = jan
    t.tm_mday = day; // Day of the month
    t.tm_hour = hour;
    t.tm_min = min;
    t.tm_sec = sec;

    t.tm_isdst = -1; // Is DST on? 1 = yes, 0 = no, -1 = unknown
    t_of_day = mktime(&t);

    // printf( "seconds since the Epoch: %dn" , (long)t_of_day);

```

```
return t_of_day;  
}
```

Notes and Warnings

NA

RTC::DeInit

Description

Deinitializes the RTC device.

Syntax

```
void RTC::DeInit(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: RTC

Details of the code can be found in the previous section of RTC:: Init.

Notes and Warnings

NA

RTC:: Write

Description

Set the specified timestamp in seconds to RTC. Seconds from 1970.1.1 00:00:00 (YEAR.MONTH.DAY, HOUR: MIN: SECONDS) to specified date and time which is to be set.

Syntax

```
void RTC::Write(int t);
```

Parameters

Parameters

t: Seconds from 1970.1.1 00:00:00 (YEAR.MONTH.DAY, HOUR: MIN: SECONDS) to specified date and time which is to be set.

Returns

The function returns nothing.

Example Code

Example: RTC

Details of the code can be found in the previous section of RTC:: Init.

Notes and Warnings

NA

RTC::Read**Description**

Get the current timestamp in seconds from RTC. The current timestamp in seconds which is calculated from 1970.1.1 00:00:00 (YEAR.MONTH.DAY, HOUR: MIN: SECONDS).

Syntax

```
int32_t RTC::Read(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns the current timestamp in seconds which is calculated from 1970.1.1 00:00:00 (YEAR.MONTH.DAY, HOUR: MIN: SECONDS).

Example Code

Example: RTC

Details of the code can be found in the previous section of RTC:: Init.

Notes and Warnings

NA

RTC:: Wait

Description

Send IR raw data.

Syntax

```
void RTC::wait(float s);
```

Parameters

s: unit microseconds (1 us)

Returns

The function returns nothing.

Example Code

Example: RTC

Details of the code can be found in the previous section of RTC:: Init.

Notes and Warnings

NA

RTC:: SetEpoch

Description

Convert human-readable time to epoch time

Syntax

```
int RTC:: SetEpoch(int year, int month, int day, int hour, int min, int sec);
```

Parameters

year: user input year

month: user input month

day: user input day

hour: user input hour

min: user input minutes

sec: user input seconds

Returns

The function returns epoch time in seconds for RTC use.

Example Code

Example: RTC

Details of the code can be found in the previous section of RTC:: Init.

Notes and Warnings

NA

SoftwareSerial**Class Adafruit_GPS****Adafruit_GPS Class****Description**

Defines a class to use GPS module on Ameba.

Syntax

```
class Adafruit_GPS
```

Members

Public Constructors	
Adafruit_GPS::Adafruit_GPS	Constructs an Adafruit_GPS object
Public Methods	
Adafruit_GPS::begin	Initialize serial communication
*Adafruit_GPS:: lastNMEA	Returns the last NMEA line received and unsets the received flag
Adafruit_GPS:: newNMEAreceived	Check to see if a new NMEA line has been received
Adafruit_GPS:: common_init	Initialization code used by all constructor types
Adafruit_GPS:: sendCommand	Send a command to the GPS device
Adafruit_GPS:: pause	Pause/unpause receiving new data
Adafruit_GPS:: parseHex	Read a Hex value and return the decimal equivalent
Adafruit_GPS:: read	Read one character from the GPS device
Adafruit_GPS:: parse	Parse an NMEA string
Adafruit_GPS:: wakeup	Wake the sensor up
Adafruit_GPS:: standby	Standby Mode Switches
Adafruit_GPS::waitForSentence	Wait for a specified sentence from the device
Adafruit_GPS::LOCUS_StartLogger	Start the LOCUS logger
Adafruit_GPS::LOCUS_StopLogger	Stop the LOCUS logger
Adafruit_GPS::LOCUS_ReadStatus	Read the logger status

Adafruit_GPS::Adafruit_GPS

Description

Constructs an Adafruit_GPS object and initialize serial using a SoftSerial object.

Syntax

```
Adafruit_GPS::Adafruit_GPS(SoftwareSerial *ser)
```

```
Adafruit_GPS::Adafruit_GPS(HardwareSerial *ser)
```

Parameters

ser: a Serial instance

Returns

The function returns nothing.

Example Code

Example: Adafruit_GPS_parsing

This example code from Adafruit demonstrates GPS modules using MTK3329/MTK3339 driver. This code shows how to listen to the GPS module in an interrupt which allows the program to have more ‘freedom’ –just parse when a new NMEA sentence is available! Then access data when desired.

```
#include <Adafruit_GPS.h>

#include <SoftwareSerial.h>

// If you’ re using a GPS module:

// Connect the GPS Power pin to 3.3V

// Connect the GPS Ground pin to ground

// Connect the GPS TX (transmit) pin to Digital 0

// Connect the GPS RX (receive) pin to Digital 1

#if defined(BOARD_RTL8195A)

SoftwareSerial mySerial(0, 1);

#elif defined(BOARD_RTL8710)

SoftwareSerial mySerial(17, 5); // RTL8710 need change GPS TX/RX to pin 17 and 5

#else

SoftwareSerial mySerial(0, 1);

#endif

Adafruit_GPS GPS(&mySerial);

// Set GPSECHO to ‘false’ to turn off echoing the GPS data to the Serial console

// Set to ‘true’ if you want to debug and listen to the raw GPS sentences.

#define GPSECHO false

void setup()

{

Serial.begin(38400);

Serial.println( “Adafruit GPS library basic test!” );

// 9600 NMEA is the default baud rate for Adafruit MTK GPS’ s- some use 4800

GPS.begin(9600);

// uncomment this line to turn on RMC (recommended minimum) and GGA (fix data) including altitude
```

```
GPS.sendCommand(PMTK_SET_NMEA_OUTPUT_RMCGGA);

// uncomment this line to turn on only the "minimum recommended" data
//GPS.sendCommand(PMTK_SET_NMEA_OUTPUT_RMONLY);

// For parsing data, we don't suggest using anything but either RMC only or RMC+GGA since
// the parser doesn't care about other sentences at this time

// Set the update rate

GPS.sendCommand(PMTK_SET_NMEA_UPDATE_1HZ); // 1 Hz update rate

// For the parsing code to work nicely and have time to sort thru the data, and
// print it out we don't suggest using anything higher than 1 Hz

// Request updates on antenna status, comment out to keep quiet
GPS.sendCommand(PGCMD_ANTENNA);

delay(1000);

// Ask for firmware version

mySerial.println(PMTK_Q_RELEASE);

}

uint32_t timer = millis();

void loop() // run over and over again
{
    // in case you are not using the interrupt above, you'll
    // need to "hand query" the GPS, not suggested :(
    // read data from the GPS in the "main loop"

    char c = GPS.read();

    // if you want to debug, this is a good time to do it!

    if (GPSECHO)
    if (c) Serial.print(c);

    // if a sentence is received, we can check the checksum, parse it...
    if (GPS.newNMEAreceived()) {
        // a tricky thing here is if we print the NMEA sentence, or data
        // we end up not listening and catching other sentences!
        // so be very wary if using OUTPUT_ALLDATA and trying to print out data
```



```

//Serial.println(GPS.lastNMEA()); // this also sets the newNMEAreceived() flag to false
if (!GPS.parse(GPS.lastNMEA())) // this also sets the newNMEAreceived() flag to false
return; // we can fail to parse a sentence in which case we should just wait for another
}

// if millis() or timer wraps around, we'll just reset it
if (timer > millis()) timer = millis();

// approximately every 2 seconds or so, print out the current stats
if (millis() - timer > 2000) {
timer = millis(); // reset the timer

Serial.print(" nTime: ");
Serial.print(GPS.hour, DEC); Serial.print( ':' );
Serial.print(GPS.minute, DEC); Serial.print( ':' );
Serial.print(GPS.seconds, DEC); Serial.print( '.' );
Serial.println(GPS.milliseconds);
Serial.print( "Date: ");
Serial.print(GPS.day, DEC); Serial.print( '/' );
Serial.print(GPS.month, DEC); Serial.print( "/20" );
Serial.println(GPS.year, DEC);
Serial.print( "Fix: "); Serial.print((int)GPS.fix);
Serial.print(" quality: "); Serial.println((int)GPS.fixquality);
if (GPS.fix) {
Serial.print( "Location: ");
Serial.print(GPS.latitude, 4); Serial.print(GPS.lat);
Serial.print(" , ");
Serial.print(GPS.longitude, 4); Serial.println(GPS.lon);
Serial.print( "Location (in degrees, works with Google Maps): ");
Serial.print(GPS.latitudeDegrees, 4);
Serial.print(" , ");
Serial.println(GPS.longitudeDegrees, 4);
Serial.print( "Speed (knots): "); Serial.println(GPS.speed);
}
}

```

```
Serial.print( "Angle: "); Serial.println(GPS.angle);  
Serial.print( "Altitude: "); Serial.println(GPS.altitude);  
Serial.print( "Satellites: "); Serial.println((int)GPS.satellites);  
}  
}  
}
```

Notes and Warnings

IMPORTANT: SoftSerial is using hardware serial so pin mapping cannot be altered.

Adafruit_GPS::begin

Description

Initialize serial communication

Syntax

```
void Adafruit_GPS::begin(uint16_t baud)
```

Parameters

baud: serial baud rate

Returns

The function returns nothing.

Example Code

Example: Adafruit_GPS_parsing

The details of the code can be found in the previous section of Adafruit_GPS:: Adafruit_GPS.

Notes and Warnings

NA

Adafruit_GPS::lastNMEA*Description**

Returns the last NMEA line received and unsets the received flag

Syntax

```
char *Adafruit_GPS::lastNMEA(void)
```

Parameters

The function requires no input parameter.

Returns

Pointer to the last line string

Example Code

Example: Adafruit_GPS_parsing

The details of the code can be found in the previous section of Adafruit_GPS:: Adafruit_GPS.

Notes and Warnings

NA

Adafruit_GPS::newNMEAreceived**Description**

Check to see if a new NMEA line has been received

Syntax

```
boolean Adafruit_GPS::newNMEAreceived(void)
```

Parameters

The function requires no input parameter.

Returns

True if received, false if not

Example Code

Example: Adafruit_GPS_parsing

The details of the code can be found in the previous section of Adafruit_GPS:: Adafruit_GPS.

Notes and Warnings

NA

Adafruit_GPS::common_init

Description

Initialization code used by all constructor types

Syntax

```
void Adafruit_GPS::common_init(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

Adafruit_GPS::sendCommand

Description

Send a command to the GPS device

Syntax

```
void Adafruit_GPS::sendCommand(const char *str)
```

Parameters

str: Pointer to a string holding the command to send

Returns

The function returns nothing.

Example Code

Example: Adafruit_GPS_parsing

The details of the code can be found in the previous section of Adafruit_GPS:: Adafruit_GPS.

Notes and Warnings

NA

Adafruit_GPS::pause

Description

Pause/unpause receiving new data

Syntax

```
void Adafruit_GPS::pause(boolean p)
```

Parameters

p: True = pause, false = unpause

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

Adafruit_GPS::parseHex

Description

Read a Hex value and return the decimal equivalent

Syntax

```
uint8_t Adafruit_GPS::parseHex(char c)
```

Parameters

c: Hex value

Returns

The decimal equivalent of the Hex value

Example Code

NA

Notes and Warnings

NA

Adafruit_GPS::read

Description

Read one character from the GPS device

Syntax

```
char Adafruit_GPS::read(void)
```

Parameters

The function requires no input parameter.

Returns

The character that we received, or 0 if nothing was available

Example Code

Example: Adafruit_GPS_parsing

The details of the code can be found in the previous section of Adafruit_GPS:: Adafruit_GPS.

Notes and Warnings

NA

Adafruit_GPS::parse**Description**

Parse an NMEA string

Syntax

```
boolean Adafruit_GPS::parse(char *nmea)
```

Parameters

nmea: an NMEA string

Returns

True if we parsed it, false if it has invalid data

Example Code

Example: Adafruit_GPS_parsing

Notes and Warnings

NA

Adafruit_GPS::wakeup

Description

Wake the sensor up

Syntax

boolean Adafruit_GPS::wakeup(void)

Parameters

The function requires no input parameter.

Returns

True if woken up, false if not in standby or failed to wake

Example Code

NA

Notes and Warnings

NA

Adafruit_GPS::standby

Description

Standby Mode Switches

Syntax

```
boolean Adafruit_GPS::standby(void)
```

Parameters

The function requires no input parameter.

Returns

False if already in standby, true if it entered standby

Example Code

NA

Notes and Warnings

NA

Adafruit_GPS::waitForSentence**Description**

Wait for a specified sentence from the device

Syntax

```
boolean Adafruit_GPS::waitForSentence(const char *wait4me, uint8_t max)
```

Parameters

wait4me: Pointer to a string holding the desired response

max: How long to wait, default is MAXWAITSENTENCE

Returns

True if we got what we wanted, false otherwise

Example Code

NA

Notes and Warnings

NA

Adafruit_GPS::LOCUS_StartLogger

Description

Start the LOCUS logger

Syntax

boolean Adafruit_GPS::LOCUS_StartLogger(void)

Parameters

The function requires no input parameter.

Returns

True on success, false if it failed

Example Code

NA

Notes and Warnings

NA

Adafruit_GPS::LOCUS_StopLogger

Description

Stop the LOCUS logger

Syntax

```
boolean Adafruit_GPS::LOCUS_StopLogger(void)
```

Parameters

The function requires no input parameter.

Returns

True on success, false if it failed

Example Code

NA

Notes and Warnings

NA

Adafruit_GPS::LOCUS_ReadStatus**Description**

Read the logger status

Syntax

```
boolean Adafruit_GPS::LOCUS_ReadStatus(void)
```

Parameters

The function requires no input parameter.

Returns

True if we read the data, false if there was no response

Example Code

NA

Notes and Warnings

NA

Class HttpClient**PMS3003 Class****Description**

Defines a class to work with PMS3003 air quality sensor on Ameba.

Syntax

```
class PMS3003
```

Members

Public Constructors	
PMS3003::PMS3003	Constructs a PMS3003 object
Public Methods	
PMS3003::begin	Initialize hardware UART
PMS3003::end	Free allocated space thus stopping UART
PMS3003::get_pm1p0_cf1	Get PM1.0 under correction factor = 1
PMS3003:: get_pm2p5_cf1	Get PM2.5 under correction factor = 1
PMS3003:: get_pm10_cf1	Get PM10 under correction factor = 1
PMS3003:: get_pm1p0_air	Get PM1.0 air quality
PMS3003:: get_pm2p5_air	Get PM2.5 air quality
PMS3003:: get_pm10_air	Get PM10 air quality
PMS3003:update_cache	Updates the cache memory
PMS3003::pms3003_handle_interrupt	Set up the serial event handler

PMS3003::PMS3003**Description**

Constructs a PMS3003 object and initialize the pin mapping.

Syntax

```
PMS3003::PMS3003(int _rx, int _tx, int _set, int _reset)
```

Parameters

_rx: RX pin of UART

_tx: TX pin of UART

_set: Set pin

_reset: Reset pin

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

PMS3003::begin**Description**

Initialize hardware UART and allocate space for serial buffer

Syntax

```
void PMS3003::begin(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

PMS3003::end

Description

Free serial buffer space and stop UART

Syntax

```
void PMS3003::end(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

PMS3003::get_pm1p0_cf1

Description

Get PM1.0 under correction factor = 1

Syntax

```
int PMS3003::get_pm1p0_cf1(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns the value “pm1p0_cf1” as an integer.

Example Code

NA

Notes and Warnings

NA

PMS3003::get_pm2p5_cf1**Description**

Get PM2.5 under correction factor = 1

Syntax

```
int PMS3003::get_pm2p5_cf1(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns the value of “pm2p5_cf1” as an integer.

Example Code

NA

Notes and Warnings

NA

PMS3003::get_pm10_cf1

Description

Get PM10 under correction factor = 1

Syntax

```
int PMS3003::get_pm10_cf1(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns the value of “pm10_cf1” as an integer.

Example Code

NA

Notes and Warnings

NA

PMS3003::get_pm1p0_air

Description

Get PM1.0 air quality

Syntax

```
int PMS3003::get_pm1p0_air(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns the value of “pm1p0_air” as an integer.

Example Code

NA

Notes and Warnings

NA

PMS3003::get_pm2p5_air**Description**

Get PM2.5 air quality

Syntax

```
int PMS3003::get_pm2p5_air(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns the value of “pm2p5_air” as an integer.

Example Code

NA

Notes and Warnings

NA

PMS3003::get_pm10_air

Description

Get PM10 air quality

Syntax

```
int PMS3003::get_pm10_air(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns the value of “pm10_air” as an integer.

Example Code

NA

Notes and Warnings

NA

PMS3003::pms3003_handle_interrupt

Description

Set up the serial event handler

Syntax

```
void pms3003_handle_interrupt(uint32_t id, uint32_t event)
```

Parameters

id: device identifier

event: Serial event for handling incoming data

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

PMS3003::update_cache**Description**

Serves the function of updating cache memory. One package has 32 bytes. Illustrate the formate by using below raw data: 42 4d 00 1c 00 1b 00 21 00 29 00 1a 00 21 00 29 2b fb 04 be 00 6b 00 10 00 04 00 04 67 00 04 46

42 4d : header signature

00 1c : frame length, 0x001c = 28 bytes (not include header and this field)

00 1b : PM1.0 under CF=1

00 21 : PM2.5 under CF=1

00 29 : PM10 under CF=1

00 1a : PM1.0 under air

00 21 : PM2.5 under air

00 29 : PM10 under air

2b fb : number of pariticle, diameter size 0.3 um in 0.1 liter air

04 be : number of pariticle, diameter size 0.5 um in 0.1 liter air

00 6b : number of pariticle, diameter size 1.0 um in 0.1 liter air

00 10 : number of pariticle, diameter size 2.5 um in 0.1 liter air

00 04 : number of pariticle, diameter size 5.0 um in 0.1 liter air

00 04 : number of pariticle, diameter size 10 um in 0.1 liter air

67 : serial number

00 : error code

04 46 :

checksum,0x42+0x4d+0x00+0x1c+0x00+0x1b+0x00+0x21+0x00+0x29+0x00+0x1a+0x00+0x21+0x00+0x29+
0x2b+0xfb+0x04+0xbe+0x00+0x6b+0x00+0x10+0x00+0x04+0x00+0x04+0x67+0x00 = 0x0446

Syntax

```
void PMS3003::update_cache(void)
```

Parameters

The function requires no input parameters.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

Class SoftwareSerial

SoftwareSerial Class

Description

Defines a class of software serial implementation for Ameba.

Syntax

```
class SoftwareSerial
```

Members

Public Constructors	
SoftwareSerial::SoftwareSerial	Constructs a SoftwareSerial object
Public Methods	
SoftwareSerial::begin	Sets the speed (baud rate) for the serial communication
SoftwareSerial::listen	Enables the selected software serial port to listen
SoftwareSerial::end	Same as stopListening
SoftwareSerial::stopListening	Stop listening on the port
SoftwareSerial::peek	Return a character that was received on the RX pin of the software serial port
SoftwareSerial::write	Prints data to the transmit pin of the software serial port as raw bytes
SoftwareSerial::read	Return a character that was received on the RX pin of the software serial port
SoftwareSerial::available	Get the number of bytes (characters) available for reading from a software serial port
SoftwareSerial::flush	Flush the received buffer
SoftwareSerial::setBufferSize	Set buffer size
SoftwareSerial::setAvailableCallback	Set available callback
SoftwareSerial::handle_interrupt	Private methods handles interrupt

SoftwareSerial::SoftwareSerial

Description

Constructs a SoftwareSerial object and sets RX and TX pin, and inverse logic.

Syntax

```
SoftwareSerial::SoftwareSerial(uint8_t receivePin, uint8_t transmitPin, bool inverse_logic /* = false */)

```

Parameters

receivePin: the pin on which to receive serial data

transmitPin: the pin on which to transmit serial data

inverse_logic: is used to invert the sense of incoming bits

Returns

The function returns nothing.

Example Code

Example: SoftwareSerialExample

The example demonstrates a software serial test, it receives from serial RX and sends it to serial TX.

```
/*  
  
The circuit: (BOARD RTL8195A)  
  
* RX is digital pin 0 (connect to TX of other devices)  
* TX is digital pin 1 (connect to RX of other devices)  
  
*/  
  
#include <SoftwareSerial.h>  
  
#if defined(BOARD_RTL8195A)  
  
SoftwareSerial mySerial(0, 1); // RX, TX  
  
#elif defined(BOARD_RTL8710)  
  
SoftwareSerial mySerial(17, 5); // RX, TX  
  
#else  
  
SoftwareSerial mySerial(0, 1); // RX, TX  
  
#endif  
  
void setup() {  
  
  // Open serial communications and wait for port to open:  
  Serial.begin(57600);  
  
  while (!Serial) {  
  
    ; // wait for serial port to connect. Needed for native USB port only  
  
  }  
  
  Serial.println( "Goodnight moon!" );  
  
  // set the data rate for the SoftwareSerial port  
  mySerial.begin(4800);  
  
  mySerial.println( "Hello, world?" );  
  
}  
  
void loop() { // run over and over  
  
  if (mySerial.available()) {  
  
    mySerial.write(mySerial.read());  
  
  }  
  
}
```

```
}
```

Notes and Warnings

Software Serial is using hardware serial thus DO NOT change the default pins

SoftwareSerial::begin

Description

Sets the speed (baud rate) for the serial communication

Syntax

```
void SoftwareSerial::begin(long speed)
```

```
void SoftwareSerial::begin(long speed, int data_bits, int parity, int stop_bits)
```

```
void SoftwareSerial::begin(long speed, int data_bits, int parity, int stop_bits, int flowctrl, int rtsPin, int ctsPin)
```

Parameters

speed: the baud rate

data_bits: number of data bits, 8 bits(default) or 7 bits

stop_bits: number of stop bits, 1 bit(default), 1.5 bits or 2 bits

flowctrl: flow control pin

rtsPin: request to send pin

ctsPin: clear to send pin

Returns

The function returns nothing.

Example Code

Example: SoftwareSerialExample

The example demonstrates a software serial test, it receives from serial RX and sends it to serial TX. Details of the code can be found in the previous section of SoftwareSerial_Basic:: SoftwareSerial.

Notes and Warnings

NA

SoftwareSerial::listen

Description

Enables the selected software serial port to listen

Syntax

```
bool SoftwareSerial::listen(void)
```

Parameters

The function requires no input parameter.

Returns

Returns true if it replaces another

Example Code

NA

Notes and Warnings

NA

SoftwareSerial::end

Description

Same as stopListening

Syntax

```
void SoftwareSerial::end(void)
```


Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

SoftwareSerial::isListening**Description**

Tests to see if requested software serial port is actively listening

Syntax

```
bool SoftwareSerial::isListening(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns “True” if the port is listening.

Example Code

NA

Notes and Warnings

NA

SoftwareSerial::stopListening

Description

Stop listening on the port

Syntax

```
bool SoftwareSerial::stopListening(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns “True” if listening on the port is stopped.

Example Code

NA

Notes and Warnings

NA

SoftwareSerial::peek

Description

Return a character that was received on the RX pin of the software serial port

Syntax

```
int SoftwareSerial::peek(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns the character read, or returns “-1” if none is available.

Example Code

NA

Notes and Warnings

NA

SoftwareSerial::write

Description

Prints data to the transmit pin of the software serial port as raw bytes

Syntax

```
size_t SoftwareSerial::write(uint8_t b)
```

Parameters

b: byte to be written

Returns

The function returns the number of bytes written.

Example Code

Example: SoftwareSerialExample

The example demonstrates a software serial test, it receives from serial RX and sends it to serial TX. Details of the code can be found in the previous section of SoftwareSerial:: SoftwareSerial.

Notes and Warnings

NA

SoftwareSerial::read

Description

Return a character that was received on the RX pin of the software serial port

Syntax

```
int SoftwareSerial::read(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns the character read, or -1 if none is available.

Example Code

Example: SoftwareSerialExample

The example demonstrates a software serial test, it receives from serial RX and sends it to serial TX. Details of the code can be found in the previous section of SoftwareSerial: SoftwareSerial.

Notes and Warnings

NA

SoftwareSerial::available

Description

Get the number of bytes available for reading from a software serial port

Syntax

```
int SoftwareSerial::available(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns the number of bytes available to read.

Example Code

Example: SoftwareSerialExample

The example demonstrates a software serial test, it receives from serial RX and sends it to serial TX. Details of the code can be found in the previous section of SoftwareSerial:: SoftwareSerial.

Notes and Warnings

NA

SoftwareSerial::flush**Description**

Flush the received buffer

Syntax

```
void SoftwareSerial::flush(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

SoftwareSerial::setBufferSize

Description

Set buffer size

Syntax

```
void SoftwareSerial::setBufferSize(uint32_t buffer_size)
```

Parameters

buffer_size: the size of the serial buffer

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

SoftwareSerial::setAvailableCallback

Description

Set available callback

Syntax

```
void SoftwareSerial::setAvailableCallback(void (*callback)(char c))
```

Parameters

*callback: user-defined serial callback function

Returns

The function returns nothing.

Example Code

Example: SoftwareSerialIrqCallback

This example demonstrates the software serial testing using IRQ callback and semaphore. Set callback function “mySerialCallback” to software serial. Whenever there is data comes in, “mySerialCallback” is invoked. In this sketch, it does nothing until the end of the line. And then it sends a semaphore. The loop() uses a non-busy loop to wait for the semaphore. To test this sketch, you need to type something on software serial and then press Enter.

```

/*
The circuit: (BOARD RTL8195A)
RX is digital pin 0 (connect to TX of other devices)
TX is digital pin 1 (connect to RX of other devices)
*/

#include <SoftwareSerial.h>

#if defined(BOARD_RTL8195A)
SoftwareSerial mySerial(0, 1); // RX, TX
#elif defined(BOARD_RTL8710)
SoftwareSerial mySerial(17, 5); // RX, TX
#else
SoftwareSerial mySerial(0, 1); // RX, TX
#endif

uint32_t semaID;

// The callback is hooking at UART IRQ handler and please don't do heavy task here.

void mySerialCallback(char c)

```

```
{  
/* The parameter c is only for peeking. The actual data is  
* still in the buffer of SoftwareSerial.  
*/  
  
if (c == 'r' || c == 'n' ) {  
  os_semaphore_release(semaID);  
}  
}  
  
void setup() {  
  // use 1 count for binary semaphore  
  semaID = os_semaphore_create(1);  
  
  // There is a token in the semaphore, clear it.  
  os_semaphore_wait(semaID, 0xFFFFFFFF);  
  
  // set the data rate for the SoftwareSerial port  
  mySerial.begin(38400);  
  mySerial.setAvailableCallback(mySerialCallback);  
}  
  
void loop() { // run over and over  
  // wait semaphore for 5s timeout  
  if (os_semaphore_wait(semaID, 5 * 1000)) {  
    // we got data before timeout  
    while(mySerial.available()) {  
      mySerial.print((char)mySerial.read());  
    }  
    mySerial.println();  
  } else {  
    mySerial.println( "No data comes in." );  
  }  
}
```


Notes and Warnings

NA

SoftwareSerial::handle_interrupt**Description**

A private method handles the interrupt

Syntax

```
void handle_interrupt(uint32_t id, uint32_t event)
```

Parameters

id: the interrupt id

event: interrupt event

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

Readme

The Ameba Software Serial related APIs and examples are works based on libraries formerly known as `NewSoftSerial.h` by Mikal Hart (<http://arduiniiana.org/libraries/newsoftserial>).

These include,

- `SoftwareSerial.cpp`
- `SoftwareSerial.h`

These libraries are under GNU Lesser General Public License.

The Ameba GPS related APIs and examples are works based on Adafruit GPS library written by Limor Fried/Ladyada for Adafruit Industries (<http://www.adafruit.com/products/746>).

These include,

- `Adafruit_GPS.cpp`
- `Adafruit_GPS.h`

These libraries are under BSD License.

SPI

Class AmebaILI9341

AmebaILI9341 Class

Description

Defines a class to use ILI9341 TFT SPI display for Ameba.

Syntax

```
class AmebaILI9341
```

Members

Public Constructors	
AmebaILI9341::AmebaILI9341	Constructs an AmebaILI9341 object
Public Methods	
AmebaILI9341::begin	Initialize SPI, pin mapping and screen configuration
AmebaILI9341::setAddress	Initialize image size and position
AmebaILI9341::writecommand	SPI transfer a command
AmebaILI9341::writedata	SPI transfer a piece of data
AmebaILI9341::setRotation	Set screen orientation
AmebaILI9341::fillScreen	Fill the screen with a color
AmebaILI9341::clr	Clear screen
AmebaILI9341::fillRectangle	Fill a rectangular space with a color
AmebaILI9341::drawPixel	Turn on a pixel on the screen
AmebaILI9341::drawChar	To print a character on the screen
AmebaILI9341::drawLine	Draw line on the screen
AmebaILI9341::drawRectangle	Draw a rectangle on the screen
AmebaILI9341::drawCircle	Draw a circle on the screen
AmebaILI9341::write	Same as drawChar
AmebaILI9341::getWidth	Return the width 240
AmebaILI9341::getHeight	Return the height 320
AmebaILI9341::setCursor	Set cursor to the desired position
AmebaILI9341::setForeground	Set foreground color
AmebaILI9341::setBackground	Set background color
AmebaILI9341::setFontSize	Set character font size
AmebaILI9341::reset	Reset pin to High or Low

AmebaILI9341::AmebaILI9341

Description

Constructs an AmebaILI9341 object and set CS, DC and RESET pins .

Syntax

```
AmebaILI9341::AmebaILI9341(int csPin, int dcPin, int resetPin)
```

Parameters

csPin: pin for Chip Select dcPin: pin for Data/Command resetPin: pin for Reset

Returns

The function returns nothing.

Example Code

Example: : PM25_ON_ILI9341_TFT_LCD

This example demonstrates how to read pm2.5 value on PMS 3003 air-condition sensor and display it on ILI9341 TFT LCD.

/*

PMS 3003 pin map is as follow:

PIN1 :VCC, connect to 5V

PIN2 :GND

PIN3 :SET, 0:Standby mode, 1:operating mode

PIN4 :RXD :Serial RX

PIN5 :TXD :Serial TX

PIN6 :RESET

PIN7 :NC

PIN8 :NC

In this example, we only use Serial to get PM 2.5 value.

The circuit:

* RX is digital pin 0 (connect to TX of PMS 3003)

* TX is digital pin 1 (connect to RX of PMS 3003)

For RTL8195A ILI9341 TFT LCD with SPI interface has these pins:

D/C : connect to pin 9

CS : connect to pin 10

MOSI : connect to pin 11

MISO : connect to pin 12

CLK : connect to pin 13

VCC : connect to 3V3

GND : connect to GND

*/

#include "SoftwareSerial.h"

#include "SPI.h"

#include "AmebaILI9341.h"

#if defined(BOARD_RTL8195A)

SoftwareSerial mySerial(0, 1); // RX, TX

```

#define TFT_RESET 8

#define TFT_DC 9

#define TFT_CS 10

#elif defined(BOARD_RTL8710)

SoftwareSerial mySerial(17, 5); // RX, TX

// IMPORTANT: Due to limit pin, we do not connect TFT_RESET pin.

#define TFT_RESET 0xFFFFFFFF

#define TFT_DC 2

#define TFT_CS 10

#endif

AmebaILI9341 tft = AmebaILI9341(TFT_CS, TFT_DC, TFT_RESET);

#define ILI9341_SPI_FREQUENCY 20000000

#define pmsDataLen 32

uint8_t buf[pmsDataLen];

int idx = 0;

int pm10 = 0;

int last_pm25 = 0;

int pm25 = 0;

int pm100 = 0;

uint16_t pm25color[] = {

0x9FF3,

0x37E0,

0x3660,

0xFFE0,

0xFE60,

0xFCC0,

0xFB2C,

0xF800,

0x9800,

0xC99F

```

```
};

void setup() {
  Serial.begin(57600);

  mySerial.begin(9600); // PMS 3003 UART has baud rate 9600

  SPI.setDefaultFrequency(ILI9341_SPI_FREQUENCY);

  tft.begin();

  drawPictureFrames();
}

void loop() { // run over and over

  uint8_t c;

  idx = 0;

  memset(buf, 0, pmsDataLen);

  while (true) {

    while (c != 0x42) {

      while (!mySerial.available());

      c = mySerial.read();

    }

    while (!mySerial.available());

    c = mySerial.read();

    if (c == 0x4d) {

      // now we got a correct header

      buf[idx++] = 0x42;

      buf[idx++] = 0x4d;

      break;

    }

  }

  while (idx != pmsDataLen) {

    while (!mySerial.available());

    buf[idx++] = mySerial.read();

  }

}
```

```
pm10 = ( buf[10] << 8 ) | buf[11];
last_pm25 = pm25;
pm25 = ( buf[12] << 8 ) | buf[13];
pm100 = ( buf[14] << 8 ) | buf[15];
updateValueToTftScreen();
}

void drawPictureFrames() {
tft.setRotation(1);

tft.clr();

tft.setFontSize(1);
// Upper title
tft.setFontSize(1);
tft.setCursor(20,20);
tft.print( "PM2.5 DETECTOR" );
// PM 2.5 Circle Frame
tft.drawCircle(100,130,60, ILI9341_BLUE);
tft.drawCircle(100,130,61, ILI9341_BLUE);
tft.setFontSize(1);
tft.setCursor(90,85);
tft.print( "PM2.5" );
tft.setFontSize(1);
tft.setCursor(90,170);
tft.print( "um/m3" );
// PM 10 Circle Frame
tft.drawCircle(220,70,40, ILI9341_BLUE);
tft.setFontSize(1);
tft.setCursor(210,40);
tft.print( "PM10" );
tft.setFontSize(1);
tft.setCursor(205,95);
```

```
tft.print( "um/m3" );
// PM 1.0 Circle Frame
tft.drawCircle(220,170,40, ILI9341_BLUE);
tft.setFontSize(1);
tft.setCursor(205,140);
tft.print( "PM1.0" );
tft.setFontSize(1);
tft.setCursor(205,195);
tft.print( "um/m3" );
// right side bar, referenced from: http://taqm.epa.gov.tw/taqm/tw/
tft.fillRect(290, 30+ 0*2, 10, 12*2, pm25color[0]); // 0~11
tft.fillRect(290, 30+12*2, 10, 12*2, pm25color[1]); // 12-23
tft.fillRect(290, 30+24*2, 10, 12*2, pm25color[2]); // 24-35
tft.fillRect(290, 30+36*2, 10, 6*2, pm25color[3]); // 36-41
tft.fillRect(290, 30+42*2, 10, 6*2, pm25color[4]); // 42-47
tft.fillRect(290, 30+48*2, 10, 6*2, pm25color[5]); // 48-53
tft.fillRect(290, 30+54*2, 10, 6*2, pm25color[6]); // 54-58
tft.fillRect(290, 30+59*2, 10, 6*2, pm25color[7]); // 59-64
tft.fillRect(290, 30+65*2, 10, 6*2, pm25color[8]); // 65-70
tft.fillRect(290, 30+71*2, 10, 10*2, pm25color[9]); // >=71
tft.setCursor(302, 30);
tft.setFontSize(1);
tft.print( "0" );
tft.setCursor(302, 30+36*2);
tft.print( "36" );
tft.setCursor(302, 30+54*2);
tft.print( "54" );
tft.setCursor(302, 30+71*2);
tft.print( "71" );
// bottom right text
```



```
tft.setCursor(210,230);
tft.setFontSize(1);
tft.print( "Powered by Realtek" );
updateValueToTftScreen();
}

void updateValueToTftScreen() {
tft.setCursor(60, 111);
tft.setFontSize(5);
tft.setForeground( getPm25Color(pm25) );
if (pm25 < 10) {
tft.print(" ");
} else if (pm25 < 100) {
tft.print(" ");
}
tft.print(pm25);
tft.setCursor(195,60);
tft.setFontSize(3);
if (pm100 < 10) {
tft.print(" ");
} else if (pm100 < 100) {
tft.print(" ");
}
tft.print(pm100);
tft.setCursor(198,160);
if (pm10 < 10) {
tft.print(" ");
} else if (pm10 < 100) {
tft.print(" ");
}
tft.print(pm10);
```

```
tft.setFontSize(1);

tft.setForeground(ILI9341_WHITE);

if (last_pm25 > 80) {
tft.fillRect(275, 80*2+30-3, 12, 8, ILI9341_BLACK);
} else {
tft.fillRect(275, last_pm25*2+30-3, 12, 8, ILI9341_BLACK);
}

if (pm25 > 80) {
tft.setCursor(275, 80*2+30-3);
} else {
tft.setCursor(275, pm25*2+30-3);
}

tft.print( "=>" );
}

uint16_t getPm25Color(int v) {
if (v < 12) {
return pm25color[0];
} else if (v < 24) {
return pm25color[1];
} else if (v < 36) {
return pm25color[2];
} else if (v < 42) {
return pm25color[3];
} else if (v < 48) {
return pm25color[4];
} else if (v < 54) {
return pm25color[5];
} else if (v < 59) {
return pm25color[6];
} else if (v < 65) {
```

```
return pm25color[7];  
} else if (v < 71) {  
return pm25color[8];  
} else {  
return pm25color[9];  
}  
}
```

Notes and Warnings

NA

AmebaILI9341::begin

Description

Initialize hardware SPI, pin mapping and screen configuration

Syntax

```
void AmebaILI9341::begin(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: PM25_ON_ILI9341_TFT_LCD

Details of the code are given in the previous section of AmebaILI9341:: AmebaILI9341.

Notes and Warnings

This method is required to run first before other operations on the display.

AmebaILI9341::setAddress

Description

Initialize image size and positioning on the display

Syntax

```
void AmebaILI9341::setAddress(uint16_t x0, uint16_t y0, uint16_t x1, uint16_t y1)
```

Parameters

x0: leftmost coordinate of the image y0: top coordinate of the image x1: rightmost coordinate of the image y1: bottom coordinate of the image

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Do not use this to set the cursor, use the “setCursor” method instead.

AmebaILI9341::writecommand

Description

Write a single-byte command to display

Syntax

```
void AmebaILI9341::writecommand(uint8_t command)
```

Parameters

command: a single byte command

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

AmebaILI9341::writedata

Description

Write 1 byte of data to display

Syntax

```
void AmebaILI9341::writedata(uint8_t data)
```

Parameters

data: 1 byte data

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Only use this method to write 1 byte at a time.

AmebaILI9341::setRotation**Description**

Setting screen orientation, “0” for no rotation, “1” for 90 degrees rotation and so on so forth.

Syntax

void AmebaILI9341::setRotation(uint8_t m)/span> **Parameters**

m: one of the 4 rotation modes -> “0” for no rotation, “1” for 90⁰, “2” for 180⁰, “3” for 270⁰

Returns

The function returns nothing.

Example Code

Example: PM25_ON_ILI9341_TFT_LCD

Details of the code are given in the previous section of AmebaILI9341:: AmebaILI9341.

Notes and Warnings

if m=4, it’ s equivalent to mode 0, and m=5 for mode 1, m=6 for mode 2 so on so forth.

AmebaILI9341::fillScreen**Description**

Fill the entire screen with one color

Syntax

void AmebaILI9341::fillScreen(uint16_t color)

Parameters

color: a 16-bit color reference defined in AmebaILI9341.h

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Refer to AmebaILI9341.h for available colors.

AmebaILI9341::clr

Description

Fill the entire screen with a certain background-color

Syntax

```
void AmebaILI9341::clr(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: PM25_ON_ILI9341_TFT_LCD

Details of the code are given in the previous section of AmebaILI9341:: AmebaILI9341

Notes and Warnings

background-color can be set by calling setBackground method.

AmebaILI9341::fillRectangle

Description

Fill a rectangular space with a color on the screen

Syntax

```
void AmebaILI9341::fillRectangle(int16_t x, int16_t y, int16_t w, int16_t h, uint16_t color)
```

Parameters

x: leftmost coordinate of the image y: top coordinate of the image w: width of the image h: height of the image color: the color of the image

Returns

The function returns nothing.

Example Code

Example: PM25_ON_ILI9341_TFT_LCD

Details of the code are given in the previous section of AmebaILI9341:: AmebaILI9341.

Notes and Warnings

NA

AmebaILI9341::drawPixel

Description

Turn on a pixel on the screen

Syntax

```
void AmebaILI9341::drawPixel(int16_t x, int16_t y, uint16_t color)
```

Parameters

x: leftmost coordinate of the image y: top coordinate of the image color: the color of the image

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

AmebaILI9341::drawChar**Description**

Draw character on the screen

Syntax

```
void AmebaILI9341::drawChar(unsigned char c) void AmebaILI9341::drawChar(int16_t x, int16_t y, unsigned char c, uint16_t _fontcolor, uint16_t _background, uint8_t _fontsize)
```

Parameters

x: leftmost coordinate of the image y: top coordinate of the image c: a character _fontcolor: font color _background: background color _fontsize: font size

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

In the actual example, the Print method is used to print a string of character on the screen instead of using this method.

AmebaILI9341::drawLine**Description**

Draw a straight line on the screen

Syntax

```
void AmebaILI9341::drawLine(int16_t x0, int16_t y0, int16_t x1, int16_t y1) void AmebaILI9341::drawLine(int16_t x0, int16_t y0, int16_t x1, int16_t y1, uint16_t color)
```

Parameters

x0: leftmost coordinate of the image y0: top coordinate of the image x1: leftmost coordinate of the image y1: top coordinate of the image color: the color of the image

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

AmebaILI9341::drawRectangle**Description**

Draw a rectangular shape on the screen

Syntax

```
void AmebaILI9341::drawRectangle(int16_t x, int16_t y, int16_t w, int16_t h) void AmebaILI9341::drawRectangle(int16_t x, int16_t y, int16_t w, int16_t h, uint16_t color)
```

Parameters

x: leftmost coordinate of the image y: top coordinate of the image w: width of the image h: height of the image color: the color of the image

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

AmebaILI9341::drawCircle**Description**

Draw a circular shape on the screen

Syntax

```
void AmebaILI9341::drawCircle(int16_t x0, int16_t y0, int16_t r) void AmebaILI9341::drawCircle(int16_t x0, int16_t y0, int16_t r, uint16_t color)
```


Parameters

x0: leftmost coordinate of the image y0: top coordinate of the image r: radius of the image color: the color of the image

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Include “AmebaServo.h” to use the class function.

AmebaILI9341::write**Description**

Same as drawChar, write a character on the screen

Syntax

```
size_t AmebaILI9341::write(uint8_t c)
```

Parameters

c: a character to be written on the screen

Returns

Number of bytes written

Example Code

NA

Notes and Warnings

This an inherited method from Print class and is seldom used.

AmebaILI9341::getWidth**Description**

Get the width of the image

Syntax

```
int16_t AmebaILI9341::getWidth(void)
```

Parameters

The function requires no input parameter.

Returns

Width of the image

Example Code

NA

Notes and Warnings

NA

AmebaILI9341::getHeight

Description

Get the height of the image

Syntax

```
int16_t AmebaILI9341::getHeight(void)
```

Parameters

The function requires no input parameter.

Returns

Height of the image

Example Code

NA

Notes and Warnings

NA

AmebaILI9341::setCursor

Description

Set the cursor to a specific position on the screen

Syntax

```
void AmebaILI9341::setCursor(int16_t x, int16_t y)
```

Parameters

x: coordinate on the x-axis y: coordinate on the y-axis

Returns

The function returns nothing.

Example Code

Example: PM25_ON_ILI9341_TFT_LCD

Details of the code are given in the previous section of AmebaILI9341:: AmebaILI9341.

Notes and Warnings

NA

AmebaILI9341::setForeground

Description

Set foreground color

Syntax

```
void AmebaILI9341::setForeground(uint16_t color)
```

Parameters

color: one of the colors available in AmebaILI9341.h

Returns

The function returns nothing.

Example Code

Example: PM25_ON_ILI9341_TFT_LCD

Details of the code are given in the previous section of AmebaILI9341:: AmebaILI9341.

Notes and Warnings

NA

AmebaILI9341::setBackground

Description

Set background color

Syntax

```
void AmebaILI9341::setBackground(uint16_t _background)
```

Parameters

_background: one of the colors available in AmebaILI9341.h

Returns

The function returns nothing.

Example Code

Example: PM25_ON_ILI9341_TFT_LCD

Details of the code are given in the previous section of AmebaILI9341:: AmebaILI9341.

Notes and Warnings

NA

AmebaILI9341::setFontSize

Description

Set the font size of the characters printed on the screen.

Syntax

```
void AmebaILI9341::setFontSize(uint8_t size)
```

Parameters

size: font size, default 1 for smallest, 5 for largest font size

Returns

The function returns nothing.

Example Code

Example: PM25_ON_ILI9341_TFT_LCD

Details of the code are given in the previous section of AmebaILI9341:: AmebaILI9341.

Notes and Warnings

NA

AmebaILI9341::reset

Description

Reset the pin to High or Low

Syntax

```
void AmebaILI9341::reset(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

Class SPISettings_SPIClass

SPISettings Class

Description

Defines a class to set SPI parameters.

Syntax

class SPISettings

Members

Public Constructors	
SPISettings::SPISettings	Create a SPISettings object and set SPI clock speed, bit order and data mode

SPISettings::SPISettings

Description

Construct an object and configure SPI parameters —clock speed, bit order and data model to the preferred default value.

Syntax

SPISettings YourObject(uint32_t clock, BitOrder bitOrder, uint8_t dataMode);

Parameters

clock: SPI clock speed, default is 4000000

bitOrder: order of bit stream, MSB first or LSB first, default is MSBFIRST

dataMode: There are 4 modes -> SPI_MODE0~3, default is SPI_MODE0

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

This class seldom used alone, it is always used with `beginTransaction()` as a parameter in `SPIClass`.

SPIClass Class

Description

Defines a class of SPI implementation for Ameba.

Syntax

```
class SPIClass
```

Members

Public Constructors	
<code>SPIClass::SPIClass</code>	Constructs an SPI object
Public Methods	
<code>SPIClass::transfer</code>	Transfer data through SPI
<code>SPIClass::transfer16</code>	Transfer a 16-bits data through SPI
<code>SPIClass::beginTransaction</code>	Set slave select pin and SPI initial settings
<code>SPIClass::endTransaction</code>	Stop SPI transaction
<code>SPIClass::begin</code>	Associate each SPI pin to Ameba pin using ameba HAL APIs
<code>SPIClass::end</code>	Stop SPI master mode
<code>SPIClass::setBitOrder</code>	Set MSB first or LSB first
<code>SPIClass::setDataMode</code>	Set to one of the four data modes
<code>SPIClass::setClockDivider</code>	Set to correct clock speed (no effect on Ameba)
<code>SPIClass::setDefaultFrequency</code>	Set default SPI frequency

SPIClass::SPIClass

Description

Construct an SPI object, create a pointer to the object, and attach “MOSI, MISO, CLK, and SS” to each pin on Ameba.

Syntax

```
SPIClass(void *pSpiObj, int mosi, int miso, int clk, int ss);
```

Parameters

pSpiObj: SPI pointer to the object

mosi: master out slave in

miso: master in slave out

clk: clock

ss: slave select

Returns

The function returns nothing.

Example Code

```
SPIClass SPI((void *)&spi_obj0), 11, 12, 13, 10);
```

Notes and Warnings

2 SPI objects are created in the library for 2 different hardware SPI on Ameba (if applicable), use “SPI” for first hardware SPI and “SPI1” for the second.

SPIClass::transfer**Description**

Calling HAL API to send data in the buffer to the slave

Syntax

```
byte SPIClass::transfer (byte _pin, uint8_t _data, SPITransferMode _mode);
```

```
byte SPIClass::transfer (uint8_t _data, SPITransferMode _mode);
```

```
void SPIClass::transfer (byte _pin, void *_buf, size_t _count, SPITransferMode _mode);
```

```
void SPIClass::transfer (void *_buf, size_t _count, SPITransferMode _mode);
```

Parameters

_pin: Slave select pin

_data: Actual data being sent over

_mode: SPI transfer mode

_count: number of bytes of data

_buf: data buffer

Returns

Void or “0” in case of error, “d” in case success

Example Code

NA

Notes and Warnings

NA

SPIClass::transfer16

Description

Same as “transfer” method above except data being of 16-bits.

Syntax

```
uint16_t SPIClass::transfer16(byte _pin, uint16_t _data, SPITransferMode _mode)
```

```
uint16_t SPIClass::transfer16(uint16_t _data, SPITransferMode _mode)
```

Parameters

_pin: Slave select pin

_data: Actual data being sent over

_mode: SPI transfer mode

Returns

The data being transferred

Example Code

NA

Notes and Warnings

NA

SPIClass::beginTransaction**Description**

Set slave select pin and initialize SPI with default settings using SPISettings class.

Syntax

```
void SPIClass::beginTransaction(uint8_t pin, SPISettings settings)
```

```
void SPIClass::beginTransaction(SPISettings settings)
```

Parameters

pin: slave select pin

settings: an object of SPISettings class

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Refer to SPISettings class for details of the initial settings.

SPIClass::endTransaction**Description**

Set slave select pin to 1 and stop SPI transaction.

Syntax

```
void SPIClass::endTransaction(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

SPIClass::begin

Description

Calling HAL APIs to initialize SPI pins to physical Ameba pins and set SPI format and frequency

Syntax

```
void SPIClass::begin(void)
```

```
void SPIClass::begin(int ss)
```

Parameters

void or ss: slave select

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

This is a required method to use SPI on Ameba.

SPIClass::end

Description

Free hardware SPI from any activity.

Syntax

```
void SPIClass::end(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

SPIClass::setBitOrder

Description

A specific method to set bit order to either MSB first or LSB first and set slave select pin.

Syntax

```
void SPIClass::setBitOrder(uint8_t _pin, BitOrder _bitOrder)
void SPIClass::setBitOrder(BitOrder _order)
```

Parameters

_pin: slave select
_bitOrder: bit order -> either MSB first or LSB first
_order: same as above

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

SPIClass::setDataMode

Description

A specific method to set data mode to one of the 4 modes (default: SPI_MODE0) and set slave select pin.

Syntax

```
void SPIClass::setDataMode(uint8_t _pin, uint8_t _mode)
void SPIClass::setDataMode(uint8_t _mode)
```

Parameters

_pin: slave select
_mode: one of the 4 modes (default: SPI_MODE0)

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

SPIClass::setClockDivider**Description**

A specific method to set to divider in order to get correct clock speed

Syntax

```
void SPIClass::setClockDivider(uint8_t _pin, uint8_t _divider)
```

```
void SPIClass::setClockDivider(uint8_t _div)
```

Parameters

_pin: slave select

_divider: clock divider

_div: same as above

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

This function does not affect the Ameba board.

SPIClass::setDefaultFrequency

Description

A specific method to set default SPI frequency

Syntax

```
void SPIClass::setDefaultFrequency(int _frequency)
```

Parameters

_frequency: the default SPI frequency

Returns

The function returns nothing.

Example Code

Example: PM25_on_ILI9341_TFT_LCD

Details of the code are given in the previous section of AmebaILI9341:: AmebaILI9341.

Notes and Warnings

Take note that defaultFrequency = _frequency.

Readme

The Ameba SPI related APIs and examples are works based on SPI Master library for arduino written by Cristian Maglie <c.maglie@arduino.cc> and Paul Stoffregen <paul@pjrc.com> (Transaction API).

These include,

SPI.cpp

SPI.h

These libraries are under GNU Lesser General Public License, version 2.1.

Sys

Wiring_OS_API

Wiring OS API

Description

A wrapper to CMSIS (Cortex Microcontroller Software Interface Standard) OS API which serve as a RTOS to create multi-threaded application with real-time behaviour.

Syntax

NA

Members

Public Methods	
os_thread_create_arduino	Create a thread and add it to Active Threads and set it to state READY
os_thread_get_id_arduino	Return the thread ID of the current running thread
os_thread_terminate_arduino	Terminate execution of a thread and remove it from Active Threads
os_thread_yield_arduino	Pass control to next thread that is in state READY
os_thread_set_priority_arduino	Change priority of an active thread
os_thread_get_priority_arduino	Get current priority of an active thread
os_signal_set_arduino	Set the specified Signal Flags of an active thread
os_signal_clear_arduino	Clear the specified Signal Flags of an active thread
os_signal_wait_arduino	Wait for one or more Signal Flags to become signaled for the current RUNNING thread
os_timer_create_arduino	Create a timer
os_timer_start_arduino	Start or restart a timer
os_timer_stop_arduino	Stop the timer
os_timer_delete_arduino	Delete a timer that was created by os_timer_create
os_semaphore_create_arduino	Create and Initialize a Semaphore object used for managing resources
os_semaphore_wait_arduino	Wait until a Semaphore token becomes available
os_semaphore_release_arduino	Release a Semaphore token
os_semaphore_delete_arduino	Delete a Semaphore that was created by os_semaphore_create
os_get_free_heap_size_arduino	Return the available heap memory space when called

os_thread_create_arduino

Description

Create a thread and add it to Active Threads and set it to state READY.

Syntax

```
uint32_t os_thread_create_arduino (void (*task)(const void *argument), void *argument, int priority, uint32_t stack_size);
```

Parameters

task: task Function pointer which is the thread body. It should not run into the end of function unless os_thread_terminate is invoked

argument: the data pointer which brings to task

priority: The underlying os is FreeRTOS. It executes tasks with highest priority which are not in idle state.

stack_size: The stack_size is used as memory heap only for this task.

Returns

The thread id which is used in thread operation and signalling.

Example Code

NA

Notes and Warnings

NA

os_thread_get_id_arduino

Description

Return the thread ID of the current running thread

Syntax

```
uint32_t os_thread_get_id_arduino (void);
```

Parameters

The function requires no input parameter.

Returns

Current thread id which calls `os_thread_get_id`.

Example Code

NA

Notes and Warnings

NA

`os_thread_terminate_arduino`**Description**

Terminate execution of a thread and remove it from Active Threads

Syntax

```
uint32_t os_thread_terminate_arduino (uint32_t thread_id);
```

Parameters

`thread_id`: Terminate the thread with specific `thread_id`

Returns

`os_status` code

Example Code

NA

Notes and Warnings

Thread should not ended without terminate first.

os_thread_yield_arduino

Description

Pass control to next thread that is in state READY

Syntax

```
uint32_t os_thread_yield_arduino (void);
```

Parameters

The function requires no input parameter.

Returns

os_status code

Example Code

NA

Notes and Warnings

By default, the minimal execution unit is 1 millisecond. In a scenario that if a thread with smaller want to handout execution right to a thread with higher priority immediately without waiting for the ending of current 1 millisecond, then invoke os_thread_yield can transfer exection right to OS' s idle task and check which is the next execution thread.

os_thread_set_priority_arduino

Description

Change priority of an active thread

Syntax

```
uint32_t os_thread_set_priority_arduino (uint32_t thread_id, int priority);
```

Parameters

thread_id: The target thread with the thread id to be changed
priority: The updated priority

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

os_thread_get_priority_arduino**Description**

Get current priority of an active thread

Syntax

```
uint32_t os_thread_get_priority_arduino (uint32_t thread_id);
```

Parameters

thread_id: The target thread with the thread id to be searched

Returns

os_priority

Example Code

NA

Notes and Warnings

NA

os_signal_set_arduino

Description

Set the specified Signal Flags of an active thread

Syntax

```
int32_t os_signal_set_arduino (uint32_t thread_id, int32_t signals);
```

Parameters

thread_id: Send signal to a thread with the thread id

signals: the signals to be send

Returns

os_status code

Example Code

NA

Notes and Warnings

NA

os_signal_clear_arduino

Description

Clear the specified Signal Flags of an active thread

Syntax

```
int32_t os_signal_clear_arduino (uint32_t thread_id, int32_t signals);
```

Parameters

thread_id: Clear signal to a thread with the thread id

signals: The signals to be clear

Returns

os_status code

Example Code

NA

Notes and Warnings

NA

os_signal_wait_arduino**Description**

Wait for one or more Signal Flags to become signaled for the current RUNNING thread

Syntax

```
os_event_t os_signal_wait_arduino (int32_t signals, uint32_t millisec);
```

Parameters

signals: the signals to be wait

millisec: the timeout value if no signal comes in. Fill in 0xFFFFFFFF for infinite wait

Returns

os_status code

Example Code

NA

Notes and Warnings

NA

os_timer_create_arduino

Description

Create a timer

Syntax

```
uint32_t os_timer_create_arduino (void (*callback)(void const *argument), uint8_t isPeriodic, void *argument);
```

Parameters

callback: The function to be invoke when timer timeout

isPeriodic: OS_TIMER_ONCE or OS_TIMER_PERIODIC

argument: The argument that is bring into callback function

Returns

timer id

Example Code

NA

Notes and Warnings

NA

os_timer_start_arduino

Description

Start or restart a timer

Syntax

```
uint32_t os_timer_start_arduino (uint32_t timer_id, uint32_t millisec);
```

Parameters

timer_id: The timer id obtained from by os_timer_create

millisec: The delays after timer starts

Returns

os_status code

Example Code

NA

Notes and Warnings

NA

os_timer_stop_arduino**Description**

Stop the timer

Syntax

```
uint32_t os_timer_stop_arduino (uint32_t timer_id);
```

Parameters

timer_id: The timer id obtained from by os_timer_create

Returns

os_status code

Example Code

NA

Notes and Warnings

NA

os_timer_delete_arduino

Description

Delete a timer that was created by os_timer_create

Syntax

```
uint32_t os_timer_delete_arduino (uint32_t timer_id);
```

Parameters

timer_id: The timer id obtained from by os_timer_create

Returns

os_status code

Example Code

NA

Notes and Warnings

NA

os_semaphore_create_arduino

Description

Create and Initialize a Semaphore object used for managing resources

Syntax

```
uint32_t os_semaphore_create_arduino (int32_t count);
```

Parameters

count: The number of available resources

Returns

semaphore ID

Example Code

NA

Notes and Warnings

NA

os_semaphore_wait_arduino**Description**

Wait until a Semaphore token becomes available

Syntax

```
int32_t os_semaphore_wait_arduino (uint32_t semaphore_id, uint32_t millisec);
```

Parameters

semaphore_id: semaphore id obtained from os_semaphore_create

millisec: timeout value

Returns

os_status code

Example Code

NA

Notes and Warnings

NA

os_semaphore_release_arduino

Description

Release a Semaphore token

Syntax

```
uint32_t os_semaphore_release_arduino (uint32_t semaphore_id);
```

Parameters

semaphore_id: semaphore id obtained from os_semaphore_create

Returns

os_status code

Example Code

NA

Notes and Warnings

NA

os_semaphore_delete_arduino

Description

Delete a Semaphore that was created by os_semaphore_create

Syntax

```
uint32_t os_semaphore_delete_arduino (uint32_t semaphore_id);
```

Parameters

semaphore_id: semaphore id obtained from os_semaphore_create

Returns

os_status code

Example Code

NA

Notes and Warnings

NA

os_get_free_heap_size_arduino**Description**

Return the available heap memory space when called

Syntax

```
size_t os_get_free_heap_size_arduino(void);
```

Parameters

The function requires no input parameter.

Returns

current free heap size

Example Code

Example: MemInfo

Notes and WarningsNA

WDT**Class WDT****WDT Class****Description**

A class used for initializing, starting, stopping watchdog timer.

Syntax

```
class WDT
```

Members

Public Constructors	
A public constructor should not be used as this class is intended to be a singleton class. Access member functions using the object instance named WDT.	

Public Methods	
WDT:: InitWatchdog	Initializes the watchdog, include time setting, and mode register
WDT:: StartWatchdog	Start the watchdog counting
WDT:: StopWatchdog	Stop the watchdog counting
WDT:: RefreshWatchdog	Refresh the watchdog counting to prevent WDT timeout
WDT:: InitWatchdogIRQ	Switch the watchdog timer to interrupt mode and register a watchdog timer timeout interrupt handler

WDT:: InitWatchdog**Description**

Initializes the watchdog, include time setting, and mode register.

Syntax

```
void InitWatchdog(uint32_t timeout_ms);
```

Parameters

timeout_ms: the watch-dog timer timeout value in millisecond (ms). The default action after watchdog timer timeout is to reset the whole system.

Returns

The function returns nothing.

Example Code

Example: WatchdogTimer

```
/*
 * This example describes how to use watchdog api.
 * In this example, watchdog is setup to 5s timeout.
 * Watchdog won't bark if we refresh it before timeout in smallTask.
 * The timer is also reloaded after refresh.
 * Otherwise, while running bigTask, watchdog will restart system in default or call callback function if registered.
 */
#include "wdt.h"

#define RUN_CALLBACK_IF_WATCHDOG_BARKS (0)

WDT wdt;

void setup() {
  Serial.begin(115200);

  wdt.InitWatchdog(5000); // setup 5s watchdog

  #if RUN_CALLBACK_IF_WATCHDOG_BARKS

  wdt.InitWatchdogIRQ(my_watchdog_irq_handler, 0);

  #else

  // system would restart in default when watchdog barks

  #endif
```

```
wdt.StartWatchdog(); // enable watchdog timer

successfulTask();

failedTask();

while (1)

;

}

void loop() {

}

void successfulTask(void) {

Serial.println(" ... doing small task ... ");

for (int i = 0; i < 50000000; i++) // dummy task

asm(" nop" );

Serial.println( "refresh watchdogn" );

wdt.RefreshWatchdog();

}

/*

* Doing this task will lead to failed refresh the

* watchdog timer within the time limits of 5 seconds

*/

void failedTask(void) {

Serial.println(" ... doing big task ... ");

for (int i = 0; i < 10; i++) {

Serial.print( "doing dummy task #" );

Serial.println(i, DEC);

for (int j = 0; j < 50000000; j++) // dummy task

asm(" nop" );

}

Serial.println( "refresh watchdogn" );

wdt.RefreshWatchdog();

}
```

```
void my_watchdog_irq_handler(uint32_t id) {  
    printf( "watchdog barks!!!rn" );  
    WDG_Cmd(DISABLE);  
}
```

Notes and Warnings

NA

WDT:: StartWatchdog

Description

Start the watchdog counting.

Syntax

```
void StartWatchdog(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: WatchdogTimer

You may refer to the code in previous section of WDT::InitWatchdog.

Notes and Warnings

NA

WDT:: StopWatchdog

Description

Stop the watchdog counting.

Syntax

```
void StopWatchdog(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: WatchdogTimer

You may refer to the code in previous section of WDT::InitWatchdog.

Notes and Warnings

NA

WDT:: RefreshWatchdog

Description

Refresh the watchdog counting to prevent WDT timeout.

Syntax

```
void RefreshWatchdog(void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: WatchdogTimer

You may refer to the code in previous section of WDT::InitWatchdog.

Notes and Warnings

NA

WDT:: InitWatchdogIRQ**Description**

Switch the watchdog timer to interrupt mode and register a watchdog timer timeout interrupt handler. The interrupt handler will be called when the watchdog timer is timeout.

Syntax

```
void WDT::InitWatchdogIRQ(wdt_irq_handler handler, uint32_t id)
```

Parameters

handler: the callback function for WDT timeout interrupt.

id: the parameter for the callback function

Returns

The function returns nothing.

Example Code

Example: WatchdogTimer

You may refer to the code in previous section of WDT::InitWatchdog.

Notes and Warnings

NA

WiFi

Class WiFi

WiFiClass Class

Description

Defines a class of WiFi and network implementation for Ameba.

Syntax

```
class WiFiClass
```

Members

Public Constructors	
WiFiClass::WiFiClass	Constructs a WiFiClass object and initializes the WiFi libraries and network settings
Public Methods	
WiFi- Class::firmwareVersion	Get firmware version
WiFiClass:: begin	Start Wifi connection for OPEN networks
WiFiClass:: config	Configure network IP settings
WiFiClass:: setDNS	Set the DNS server IP address to use
WiFiClass:: disconnect	Disconnect from the network
WiFiClass:: macAddress	Get the interface MAC address
WiFiClass:: localIP	Get the interface IP address
WiFiClass:: subnetMask	Get the interface subnet mask address
WiFiClass:: gatewayIP	Get the gateway IP address
WiFiClass:: SSID	Return the current SSID associated with the network
WiFiClass:: BSSID	Return the current BSSID associated with the network
WiFiClass:: RSSI	Return the current RSSI (Received Signal Strength in dBm) associated with the network
WiFiClass:: encryption- Type	Return the Encryption Type associated with the network
WiFiClass:: scanNetworks	Start scan WiFi networks available
WiFiClass:: SSID	Return the SSID discovered during the network scan
WiFiClass:: encryption- Type	Return the encryption type of the networks discovered during the scanNetworks
WiFiClass:: encryption- TypeEx	Return the security type and encryption type of the networks discovered during the scanNetworks
WiFiClass:: RSSI	Return the RSSI of the networks discovered during the scanNetworks
WiFiClass:: status	Return Connection status
WiFiClass:: hostByName	Resolve the given hostname to an IP address
WiFiClass:: apbegin	Start AP mode
WiFiClass:: disablePower- Save	Disable power-saving mode

WiFiClass::WiFiClass

Description

Constructs a WiFiClass object and initializes the WiFi libraries and network settings.

Syntax

```
WiFiClass::WiFiClass()
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

An instance of WiFiClass is created as WiFi inside WiFi.h and is extern for direct use.

WiFiClass::firmwareVersion

Description

Get firmware version

Syntax

```
char* WiFiClass::firmwareVersion()
```

Parameters

The function requires no input parameter.

Returns

WiFi firmware version

Example Code

Example: ConnectWithWPA

This example demos how to connect to an unencrypted WiFi network, and prints the MAC address of the Wifi shield, the IP address obtained, and other network details.

```
#include <WiFi.h>
```

```
// char ssid[] = "yourNetwork" ; // your network SSID (name)

// char pass[] = "secretPassword" ; // your network password

char ssid[] = "SINGTEL-D45F" ; // your network SSID (name)

char pass[] = "mooxuteeth" ; // your network key

int status = WL_IDLE_STATUS; // the Wifi radio's status

void setup() {

//Initialize serial and wait for port to open:

Serial.begin(9600);

while (!Serial) {

; // wait for serial port to connect. Needed for native USB port only

}

// check for the presence of the shield:

if (WiFi.status() == WL_NO_SHIELD) {

Serial.println( "WiFi shield not present" );

// don't continue:

while (true);

}

String fv = WiFi.firmwareVersion();

if (fv != "1.1.0" ) {

Serial.println( "Please upgrade the firmware" );

}

// attempt to connect to Wifi network:

while (status != WL_CONNECTED) {

Serial.print( "Attempting to connect to WPA SSID: ");

Serial.println(ssid);

// Connect to WPA/WPA2 network:

status = WiFi.begin(ssid, pass);

// wait 10 seconds for connection:

delay(10000);

}
```

```
// you' re connected now, so print out the data:

Serial.print( "You' re connected to the network" );

printCurrentNet();

printWifiData();

}

void loop() {

// check the network connection once every 10 seconds:

delay(10000);

printCurrentNet();

}

void printWifiData() {

// print your WiFi shield' s IP address:

IPAddress ip = WiFi.localIP();

Serial.print( "IP Address: ");

Serial.println(ip);

Serial.println(ip);

// print your MAC address:

byte mac[6];

WiFi.macAddress(mac);

Serial.print( "MAC address: ");

Serial.print(mac[0], HEX);

Serial.print( ":" );

Serial.print(mac[1], HEX);

Serial.print( ":" );

Serial.print(mac[2], HEX);

Serial.print( ":" );

Serial.print(mac[3], HEX);

Serial.print( ":" );

Serial.print(mac[4], HEX);

Serial.print( ":" );
```

```
Serial.println(mac[5], HEX);
}

void printCurrentNet() {
// print the SSID of the network you' re attached to:
Serial.print( "SSID: ");
Serial.println(WiFi.SSID());

// print the MAC address of the router you' re attached to:
byte bssid[6];
WiFi.BSSID(bssid);
Serial.print( "BSSID: ");
Serial.print(bssid[5], HEX);
Serial.print( ":" );
Serial.print(bssid[4], HEX);
Serial.print( ":" );
Serial.print(bssid[3], HEX);
Serial.print( ":" );
Serial.print(bssid[2], HEX);
Serial.print( ":" );
Serial.print(bssid[1], HEX);
Serial.print( ":" );
Serial.println(bssid[0], HEX);

// print the received signal strength:
long rssi = WiFi.RSSI();
Serial.print( "signal strength (RSSI):" );
Serial.println(rssi);

// print the encryption type:
byte encryption = WiFi.encryptionType();
Serial.print( "Encryption Type:" );
Serial.println(encryption, HEX);
Serial.println();
```

```
}
```

Notes and Warnings

NA

WiFiClass::begin

Description

Start Wifi connection for OPEN networks

Syntax

```
int WiFiClass::begin(char* ssid)
int WiFiClass::begin(char* ssid, uint8_t key_idx, const char *key)
int WiFiClass::begin(char* ssid, const char *passphrase)
```

Parameters

ssid: Pointer to the SSID string

key_idx: The key index to set. Valid values are 0-3.

key: Key input buffer.

passphrase: Passphrase. Valid characters in a passphrase must be between ASCII 32-126 (decimal).

Returns

WiFi status

Example Code

Example: ConnectWithWPA

This example demos how to connect to an unencrypted WiFi network, and prints the MAC address of the Wifi shield, the IP address obtained, and other network details. The details of the code can be found in the previous section of `WiFiClass::firmwareVersion`.

Notes and Warnings

NA

WiFiClass::config

Description

Configure network settings for the WiFi network

Syntax

```
void WiFiClass::config(IPAddress local_ip)
void WiFiClass::config(IPAddress local_ip, IPAddress dns_server)
void WiFiClass::config(IPAddress local_ip, IPAddress dns_server, IPAddress gateway)
void WiFiClass::config(IPAddress local_ip, IPAddress dns_server, IPAddress gateway, IPAddress subnet)
```

Parameters

local_ip: Local device IP address to use on the network
dns_server: IP address of the DNS server to use
gateway: IP address of the gateway device on the network
subnet: Subnet mask for the network, expressed as a IP address

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

This will disable the DHCP client when connecting to a network, and will require the network accepts a static IP. The configured IP addresses will also apply to AP mode, but the DHCP server will not be disabled in AP mode.

WiFiClass::setDNS

Description

Configure the IP address of the DNS server to use

Syntax

```
void WiFiClass::setDNS(IPAddress dns_server1)
void WiFiClass::setDNS(IPAddress dns_server1, IPAddress dns_server2)
```

Parameters

dns_server1: IP address of DNS server to use

dns_server2: IP address of DNS server to use

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

WiFiClass::disconnect

Description

Disconnect from the network

Syntax

```
int WiFiClass::disconnect()
```

Parameters

The function requires no input parameter.

Returns

The function returns one value of `wl_status_t` enum as an integer.

Example Code

NA

Notes and Warnings

NA

WiFiClass::macAddress**Description**

Get the interface MAC address

Syntax

```
uint8_t* WiFiClass::macAddress(uint8_t* mac)
```

Parameters

mac: an array to store MAC address

Returns

The function returns a pointer to uint8_t array with length WL_MAC_ADDR_LENGTH.

Example Code

Example: ConnectWithWPA

This example demos how to connect to an unencrypted WiFi network, and prints the MAC address of the Wifi shield, the IP address obtained, and other network details. The details of the code can be found in the previous section of `WiFiClass::firmwareVersion`.

Notes and Warnings

NA

WiFiClass::localIP**Description**

Get the interface IP address

Syntax

IPAddress WiFiClass::localIP()

Parameters

The function requires no input parameter.

Returns

Ip address value

Example Code

Example: ConnectWithWPA

This example demos how to connect to an unencrypted WiFi network, and prints the MAC address of the Wifi shield, the IP address obtained, and other network details. The details of the code can be found in the previous section of WiFiClass:: firmwareVersion.

Notes and Warnings

NA

WiFiClass::subnetMask

Description

Get the interface subnet mask address

Syntax

IPAddress WiFiClass::subnetMask()

Parameters

The function requires no input parameter.

Returns

subnet mask address value

Example Code

Example: ConnectNoEncryption

This example demonstrates how to connect to an unencrypted WiFi network and prints the MAC address of the WiFi shield, the IP address obtained, and other network details.

```
#include <WiFi.h>

char ssid[] = "SINGTEL-D45F_5G" ;// the name of your network
int status = WL_IDLE_STATUS; // the Wifi radio's status

void setup() {
  //Initialize serial and wait for port to open:
  Serial.begin(9600);

  while (!Serial) {
    ; // wait for serial port to connect. Needed for native USB port only
  }

  // check for the presence of the shield:
  if (WiFi.status() == WL_NO_SHIELD) {
    Serial.println( "WiFi shield not present" );
    // don't continue:
    while (true);
  }

  String fv = WiFi.firmwareVersion();
  if (fv != "1.1.0" ) {
    Serial.println( "Please upgrade the firmware" );
  }

  // attempt to connect to Wifi network:
  while (status != WL_CONNECTED) {
    Serial.print( "Attempting to connect to open SSID: ");
    Serial.println(ssid);
    status = WiFi.begin(ssid);

    // wait 10 seconds for connection:
    delay(10000);
  }
```

```
// you' re connected now, so print out the data:

Serial.print( "You' re connected to the network" );

printCurrentNet();

printWifiData();

}

void loop() {

// check the network connection once every 10 seconds:

delay(10000);

printCurrentNet();

}

void printWifiData() {

// print your WiFi shield' s IP address:

IPAddress ip = WiFi.localIP();

Serial.print( "IP Address: ");

Serial.println(ip);

Serial.println(ip);

// print your MAC address:

byte mac[6];

WiFi.macAddress(mac);

Serial.print( "MAC address: ");

Serial.print(mac[0], HEX);

Serial.print( ":" );

Serial.print(mac[1], HEX);

Serial.print( ":" );

Serial.print(mac[2], HEX);

Serial.print( ":" );

Serial.print(mac[3], HEX);

Serial.print( ":" );

Serial.print(mac[4], HEX);

Serial.print( ":" );
```

```
Serial.println(mac[5], HEX);

// print your subnet mask:
IPAddress subnet = WiFi.subnetMask();

Serial.print( "NetMask:  ");
Serial.println(subnet);

// print your gateway address:
IPAddress gateway = WiFi.gatewayIP();

Serial.print( "Gateway:  ");
Serial.println(gateway);
}

void printCurrentNet() {
// print the SSID of the network you' re attached to:
Serial.print( "SSID:  ");
Serial.println(WiFi.SSID());

// print the MAC address of the router you' re attached to:
byte bssid[6];
WiFi.BSSID(bssid);
Serial.print( "BSSID:  ");
Serial.print(bssid[5], HEX);
Serial.print( ":" );
Serial.print(bssid[4], HEX);
Serial.print( ":" );
Serial.print(bssid[3], HEX);
Serial.print( ":" );
Serial.print(bssid[2], HEX);
Serial.print( ":" );
Serial.print(bssid[1], HEX);
Serial.print( ":" );
Serial.println(bssid[0], HEX);

// print the received signal strength:
```

```
long rssi = WiFi.RSSI();  
Serial.print( "signal strength (RSSI):" );  
Serial.println(rssi);  
  
// print the encryption type:  
byte encryption = WiFi.encryptionType();  
Serial.print( "Encryption Type:" );  
Serial.println(encryption, HEX);  
}
```

Notes and Warnings

NA

WiFiClass::gatewayIP

Description

Get the gateway IP address

Syntax

```
IPAddress WiFiClass::gatewayIP()
```

Parameters

The function requires no input parameter.

Returns

The function returns the value of the gateway IP address.

Example Code

Example: ConnectNoEncryption

This example demonstrates how to connect to an unencrypted WiFi network and prints the MAC address of the WiFi shield, the IP address obtained, and other network details. Details of the code can be found in the section of `WiFiClass::subnetMask`.

Notes and Warnings

NA

WiFiClass::SSID**Description**

Return the current SSID associated with the network

Syntax

```
char* WiFiClass::SSID()
```

Parameters

The function requires no input parameter.

Returns

The function returns current SSID associate with the network.

Example Code

Example: ConnectWithWPA

This example demos how to connect to an unencrypted WiFi network, and prints the MAC address of the Wifi shield, the IP address obtained, and other network details. The details of the code can be found in the previous section of `WiFiClass::firmwareVersion`.

Notes and Warnings

NA

WiFiClass::BSSID**Description**

Return the current BSSID associated with the network

Syntax

uint8_t* WiFiClass::BSSID(uint8_t* bssid)

Parameters

bssid: an array to store bssid

Returns

pointer to uint8_t array with length WL_MAC_ADDR_LENGTH

Example Code

Example: ConnectWithWPA

This example demos how to connect to an unencrypted WiFi network, and prints the MAC address of the Wifi shield, the IP address obtained, and other network details. The details of the code can be found in the previous section of WiFiClass:: firmwareVersion.

Notes and Warnings

NA

WiFiClass::RSSI

Description

Return the current RSSI (Received Signal Strength in dBm) associated with the network

Syntax

int32_t WiFiClass::RSSI()

Parameters

The function requires no input parameter.

Returns

The function returns a signed-value signal strength

Example Code

Example: ConnectWithWPA

This example demos how to connect to an unencrypted WiFi network, and prints the MAC address of the Wifi shield, the IP address obtained, and other network details. The details of the code can be found in the previous section of `WiFiClass::firmwareVersion`.

Notes and Warnings

NA

WiFiClass::encryptionType

Description

Return the Encryption Type associated with the network

Syntax

```
uint8_t WiFiClass::encryptionType()
```

Parameters

The function requires no input parameter.

Returns

The function returns one unsigned integer value of `wl_enc_type` enum.

Example Code

Example: ConnectWithWPA

Notes and Warnings

NA

WiFiClass::scanNetworks

Description

Start scan WiFi networks available

Syntax

```
int8_t WiFiClass::scanNetworks()
```

Parameters

The function requires no input parameter.

Returns

The function returns the number of discovered networks as an integer.

Example Code

Example: ScanNetworks

This example prints the Wifi shield's MAC address, and scans for available Wifi networks using the Wifi shield. Every ten seconds, it scans again. It doesn't connect to any network, so no encryption scheme is specified.

```
#include <WiFi.h>
```

```
void setup() {
```

```
//Initialize serial and wait for port to open:
```

```
Serial.begin(9600);
```

```
while (!Serial) {
```

```
; // wait for serial port to connect. Needed for native USB port only
```

```
}
```

```
// check for the presence of the shield:
```

```
if (WiFi.status() == WL_NO_SHIELD) {
```

```
Serial.println( "WiFi shield not present" );
```

```
// don't continue:
```

```
while (true);
```

```
}
```

```
String fv = WiFi.firmwareVersion();
```

```
if (fv != "1.1.0" ) {
```

```
Serial.println( "Please upgrade the firmware" );
```

```
}
```

```
// Print WiFi MAC address:

printMacAddress();

}

void loop() {

// scan for existing networks:

Serial.println( "Scanning available networks..." );

listNetworks();

delay(10000);

}

void printMacAddress() {

// the MAC address of your Wifi shield

byte mac[6];

// print your MAC address:

WiFi.macAddress(mac);

Serial.print( "MAC: ");

Serial.print(mac[0], HEX);

Serial.print( ":" );

Serial.print(mac[1], HEX);

Serial.print( ":" );

Serial.print(mac[2], HEX);

Serial.print( ":" );

Serial.print(mac[3], HEX);

Serial.print( ":" );

Serial.print(mac[4], HEX);

Serial.print( ":" );

Serial.println(mac[5], HEX);

}

void listNetworks() {

// scan for nearby networks:

Serial.println(" * Scan Networks *" );
```

```
int numSsid = WiFi.scanNetworks();

if (numSsid == -1) {
  Serial.println( "Couldn' t get a wifi connection" );
  while (true);
}

// print the list of networks seen:
Serial.print( "number of available networks:" );
Serial.println(numSsid);

// print the network number and name for each network found:
for (int thisNet = 0; thisNet < numSsid; thisNet++) {
  Serial.print(thisNet);
  Serial.print(" ) ");
  Serial.print(WiFi.SSID(thisNet));
  Serial.print(" tSignal: ");
  Serial.print(WiFi.RSSI(thisNet));
  Serial.print(" dBm" );
  Serial.print(" tEncryptionRaw: ");
  printEncryptionTypeEx(WiFi.encryptionTypeEx(thisNet));
  Serial.print(" tEncryption: ");
  printEncryptionType(WiFi.encryptionType(thisNet));
}
}

void printEncryptionTypeEx(uint32_t thisType) {
  /* Arduino wifi api use encryption type to mapping to security type.
  * This function demonstrate how to get more richful information of security type.
  */

  switch (thisType) {
  case SECURITY_OPEN:
    Serial.print( "Open" );
    break;
```

```
case SECURITY_WEP_PSK:
Serial.print( "WEP" );
break;

case SECURITY_WPA_TKIP_PSK:
Serial.print( "WPA TKIP" );
break;

case SECURITY_WPA_AES_PSK:
Serial.print( "WPA AES" );
break;

case SECURITY_WPA2_AES_PSK:
Serial.print( "WPA2 AES" );
break;

case SECURITY_WPA2_TKIP_PSK:
Serial.print( "WPA2 TKIP" );
break;

case SECURITY_WPA2_MIXED_PSK:
Serial.print( "WPA2 Mixed" );
break;

case SECURITY_WPA_WPA2_MIXED:
Serial.print( "WPA/WPA2 AES" );
break;
}
}

void printEncryptionType(int thisType) {
// read the encryption type and print out the name:
switch (thisType) {

case ENC_TYPE_WEP:
Serial.println( "WEP" );
break;

case ENC_TYPE_TKIP:
```

```
Serial.println( "WPA" );  
  
break;  
  
case ENC_TYPE_CCMP:  
Serial.println( "WPA2" );  
  
break;  
  
case ENC_TYPE_NONE:  
Serial.println( "None" );  
  
break;  
  
case ENC_TYPE_AUTO:  
Serial.println( "Auto" );  
  
break;  
  
}  
  
}
```

Notes and Warnings

NA

WiFiClass::SSID

Description

Return the SSID discovered during the network scan

Syntax

```
char* WiFiClass::SSID(uint8_t networkItem)
```

Parameters

networkItem: specify from which network item want to get the information

Returns

The function returns ssid string of the specified item on the networks scanned a list.

Example Code

Example: ScanNetworks

This example prints the Wifi shield's MAC address, and scans for available Wifi networks using the Wifi shield. Every ten seconds, it scans again. It doesn't connect to any network, so no encryption scheme is specified. The details of the code can be found in the previous section of `WiFiClass::scanNetworks`.

Notes and Warnings

NA

WiFiClass::encryptionType**Description**

Return the encryption type of the networks discovered during the `scanNetworks`

Syntax

```
uint8_t WiFiClass::encryptionType(uint8_t networkItem)
```

Parameters

networkItem: specify from which network item want to get the information

Returns

encryption type (enum `wl_enc_type`) of the specified item on the networks scanned a list

Example Code

Example: ScanNetworks

This example prints the Wifi shield's MAC address, and scans for available Wifi networks using the Wifi shield. Every ten seconds, it scans again. It doesn't connect to any network, so no encryption scheme is specified. The details of the code can be found in the previous section of `WiFiClass::scanNetworks`.

Notes and Warnings

NA

WiFiClass::encryptionTypeEx

Description

Return the security type and encryption type of the networks discovered during the scanNetworks

Syntax

```
uint32_t WiFiClass::encryptionTypeEx(uint8_t networkItem)
```

Parameters

networkItem: specify from which network item want to get the information

Returns

security and encryption type of the specified item on the networks scanned a list

Example Code

Example: ScanNetworks

This example prints the Wifi shield's MAC address, and scans for available Wifi networks using the Wifi shield. Every ten seconds, it scans again. It doesn't connect to any network, so no encryption scheme is specified. The details of the code can be found in the previous section of WiFiClass:: scanNetworks.

Notes and Warnings

NA

WiFiClass::RSSI

Description

Return the RSSI of the networks discovered during the scanNetworks

Syntax

```
int32_t WiFiClass::RSSI(uint8_t networkItem)
```

Parameters

networkItem: specify from which network item want to get the information

Returns

signed value of RSSI of the specified item on the networks scanned a list

Example Code

Example: ScanNetworks

This example prints the Wifi shield's MAC address, and scans for available Wifi networks using the Wifi shield. Every ten seconds, it scans again. It doesn't connect to any network, so no encryption scheme is specified. The details of the code can be found in the previous section of `WiFiClass::scanNetworks`.

Notes and Warnings

NA

WiFiClass::status**Description**

Return Connection status

Syntax

```
uint8_t WiFiClass::status()
```

Parameters

The function requires no input parameter.

Returns

The function returns one of the values defined in `wl_status_t` as an unsigned integer.

Example Code

Example: ConnectWithWPA

This example demos how to connect to an unencrypted WiFi network, and prints the MAC address of the Wifi shield, the IP address obtained, and other network details. The details of the code can be found in the previous section of `WiFiClass::firmwareVersion`.

Notes and Warnings

NA

WiFiClass::hostByName

Description

Resolve the given hostname to an IP address

Syntax

```
int WiFiClass::hostByName(const char* aHostname, IPAddress& aResult)
```

Parameters

aHostname: Name to be resolved

aResult: IPAddress structure to store the returned IP address

Returns

The function returns “1” if aIPAddrString was successfully converted to an IP address,else otherwise, it will return as an error code.

Example Code

NA

Notes and Warnings

NA

WiFiClass::apbegin

Description

Start AP mode

Syntax

```
int WiFiClass::apbegin(char* ssid, char* channel)
```

```
int WiFiClass::apbegin(char* ssid, char* password, char* channel)
```

Parameters

ssid: SSID of the AP network

channel: AP' s channel, default 1

password: AP' s password

Returns

The function will return the WiFi status.

Example Code

Example: WiFiAPMode

#include

```

char ssid[] = "yourNetwork" ;//Set the AP' s SSID

char pass[] = "Password" ;//Set the AP' s password

char channel[] = "1" ;//Set the AP' s channel

int status = WL_IDLE_STATUS; // the Wifi radio' s status

void setup() {

//Initialize serial and wait for port to open:

Serial.begin(9600);

while (!Serial) {

; // wait for serial port to connect. Needed for native USB port only

}

// check for the presence of the shield:

if (WiFi.status() == WL_NO_SHIELD) {

Serial.println( "WiFi shield not present" );

while (true);

}

String fv = WiFi.firmwareVersion();

if (fv != "1.1.0" ) {

Serial.println( "Please upgrade the firmware" );

}

```

```
// attempt to start AP:

while (status != WL_CONNECTED) {

Serial.print( "Attempting to start AP with SSID: ");

Serial.println(ssid);

status = WiFi.apbegin(ssid, pass, channel);

delay(10000);

}

//AP MODE already started:

Serial.println( "AP mode already started" );

Serial.println();

printWifiData();

printCurrentNet();

}

void loop() {

// check the network connection once every 10 seconds:

delay(10000);

printCurrentNet();

}

void printWifiData() {

// print your WiFi shield's IP address:

IPAddress ip = WiFi.localIP();

Serial.print( "IP Address: ");

Serial.println(ip);

// print your subnet mask:

IPAddress subnet = WiFi.subnetMask();

Serial.print( "NetMask: ");

Serial.println(subnet);

// print your gateway address:

IPAddress gateway = WiFi.gatewayIP();

Serial.print( "Gateway: ");
```

```
Serial.println(gateway);

Serial.println();

}

void printCurrentNet() {
// print the SSID of the AP:
Serial.print( "SSID: ");
Serial.println(WiFi.SSID());
// print the MAC address of AP:
byte bssid[6];
WiFi.BSSID(bssid);
Serial.print( "BSSID: ");
Serial.print(bssid[0], HEX);
Serial.print( ":" );
Serial.print(bssid[1], HEX);
Serial.print( ":" );
Serial.print(bssid[2], HEX);
Serial.print( ":" );
Serial.print(bssid[3], HEX);
Serial.print( ":" );
Serial.print(bssid[4], HEX);
Serial.print( ":" );
Serial.println(bssid[5], HEX);
// print the encryption type:
byte encryption = WiFi.encryptionType();
Serial.print( "Encryption Type:" );
Serial.println(encryption, HEX);
Serial.println();
}
```

Notes and Warnings

NA

WiFiClass::disablePowerSave

Description

Disable power-saving mode

Syntax

```
int WiFiClass::disablePowerSave()
```

Parameters

The function requires no input parameter.

Returns

1 if disable success, 0 if failed

Example Code

NA

Notes and Warnings

NA

Class WiFiClient

WiFiClient Class

Description

Defines a class of WiFi Client implementation for Ameba.

Syntax

```
class WiFiClient
```


Members

Public Constructors	
WiFiClient::WiFiClient	Constructs a WiFiClient instance that connects to the specified IP address and port.
Public Methods	
WiFiClient::connect	Connect to the IP address and port
WiFiClient::write	Write a single byte into the packet
WiFiClient::available	Number of bytes remaining in the current packet
WiFiClient::read	Read a single byte from the current packet
WiFiClient:: peek	Return the next byte from the current packet without moving on to the next byte
WiFiClient:: flush	Finish reading the current packet
WiFiClient::stop	Stop client connection
WiFiClient::connected	Check if client is connected, return 1 if connected, 0 if not
WiFiClient::setRecvTimeout	Set receiving timeout

WiFiClient::WiFiClient

Description

Constructs a WiFiClient instance that connects to the specified IP address and port.

Syntax

```
WiFiClient::WiFiClient()
```

```
WiFiClient::WiFiClient(uint8_t sock)
```

Parameters

sock: socket state, default -1.

Returns

The function returns nothing.

Example Code

Example: WiFiWebClient

```
#include <WiFi.h>
```

```
char ssid[] = "yourNetwork" ; // your network SSID (name)
```

```
char pass[] = "password" ; // your network password (use for WPA, or use as key for WEP)

int keyIndex = 0; // your network key Index number (needed only for WEP)

int status = WL_IDLE_STATUS;

//IPAddress server(64,233,189,94); // numeric IP for Google (no DNS)

char server[] = "www.google.com" ; // name address for Google (using DNS)

WiFiClient client;

void setup() {

//Initialize serial and wait for port to open:

Serial.begin(9600);

while (!Serial) {

;

}

// check for the presence of the shield:

if (WiFi.status() == WL_NO_SHIELD) {

Serial.println( "WiFi shield not present" );

// don' t continue:

while (true);

}

String fv = WiFi.firmwareVersion();

if (fv != "1.1.0" ) {

Serial.println( "Please upgrade the firmware" );

}

// attempt to connect to Wifi network:

while (status != WL_CONNECTED) {

Serial.print( "Attempting to connect to SSID: ");

Serial.println(ssid);

// Connect to WPA/WPA2 network. Change this line if using open or WEP network:

status = WiFi.begin(ssid, pass);

// wait 10 seconds for connection:

delay(10000);
```

```
}  
  
Serial.println( "Connected to wifi" );  
printWifiStatus();  
  
Serial.println(" nStarting connection to server..." );  
  
// if you get a connection, report back via serial:  
  
if (client.connect(server, 80)) {  
  
  Serial.println( "connected to server" );  
  
  // Make a HTTP request:  
  
  client.println( "GET /search?q=ameba HTTP/1.1" );  
  client.println( "Host: www.google.com" );  
  client.println( "Connection: close" );  
  
  client.println();  
  
}  
  
void loop() {  
  
  // if there are incoming bytes available  
  
  // from the server, read them and print them:  
  
  while (client.available()) {  
  
    char c = client.read();  
  
    Serial.write(c);  
  
  }  
  
  // if the server' s disconnected, stop the client:  
  
  if (!client.connected()) {  
  
    Serial.println();  
  
    Serial.println( "disconnecting from server." );  
  
    client.stop();  
  
    // do nothing forevermore:  
  
    while (true);  
  
  }  
  
}
```

```
void printWifiStatus() {  
  // print the SSID of the network you're attached to:  
  Serial.print( "SSID: ");  
  Serial.println(WiFi.SSID());  
  // print your WiFi shield's IP address:  
  IPAddress ip = WiFi.localIP();  
  Serial.print( "IP Address: ");  
  Serial.println(ip);  
  // print the received signal strength:  
  long rssi = WiFi.RSSI();  
  Serial.print( "signal strength (RSSI):" );  
  Serial.print(rssi);  
  Serial.println(" dBm" );  
}
```

Notes and Warnings

NA

WiFiClient::connect

Description

Connect to the IP address and port

Syntax

```
int WiFiClient::connect(IPAddress ip, uint16_t port)  
int WiFiClient::connect(const char *host, uint16_t port)
```

Parameters

ip: IP address

host: Host name

port: the port to listen on

Returns

Returns “1” : if successful

Returns “0” : if failed

Example Code

Example: WiFiWebClient

The details of the example are explained in the previous section of WiFiClient:: WiFiClient.

Notes and Warnings

NA

WiFiClient::write**Description**

Write a single byte into the packet

Syntax

size_t WiFiClient::write(uint8_t byte)

size_t WiFiClient::write(const uint8_t *buf, size_t size)

Parameters

byte: the outgoing byte

buf: the outgoing message

size: the size of the buffer

Returns

The function returns single byte into the packet or returns bytes size from buffer into the packet.

Example Code

NA

Notes and Warnings

NA

WiFiClient::available

Description

Number of bytes remaining in the current packet

Syntax

```
int WiFiClient::available(void)
```

Parameters

The function requires no input parameter.

Returns

- Function returns the number of bytes available in the current packet

Function returns 0: if no data available

Example Code

Example: WiFiWebClient

The details of the example are explained in the previous section of WiFiClient:: WiFiClient.

Notes and Warnings

NA

WiFiClient::read

Description

Read a single byte from the current packet

Syntax

```
int WiFiClient::read()  
int WiFiClient::read(unsigned char* buf, size_t size)  
int WiFiClient::read(char *buf, size_t size)
```

Parameters

buf: buffer to hold incoming packets (char*)
size: maximum size of the buffer (int)

Returns

size: the size of the buffer
-1: if no buffer is available

Example Code

Example: WiFiWebClient

The details of the example are explained in the previous section of WiFiClient:: WiFiClient.

Notes and Warnings

NA

WiFiClient::peek**Description**

Return the next byte from the current packet without moving on to the next byte

Syntax

```
int WiFiClient::peek(void)
```

Parameters

The function requires no input parameter.

Returns

b: the next byte or character

-1: if none is available

Example Code

NA

Notes and Warnings

NA

WiFiClient::flush

Description

Finish reading the current packet

Syntax

```
void WiFiClient::flush(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

WiFiClient::stop

Description

Disconnect from the server. Stop client connection

Syntax

```
void WiFiClient::stop(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: WiFiWebClient

The details of the example are explained in the previous section of WiFiClient:: WiFiClient.

Notes and Warnings

NA

WiFiClient::connected**Description**

Check if client is connected, return 1 if connected, 0 if not.

Syntax

```
uint8_t WiFiClient::connected(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns “1” if connected, returns “0” if not connected.

Example Code

Example: WiFiWebClient

The details of the example are explained in the previous section of WiFiClient:: WiFiClient.

Notes and Warnings

NA

WiFiClient::setRecvTimeout

Description

Set receiving timeout

Syntax

int WiFiClient::setRecvTimeout(int timeout)

Parameters

timeout: timeout in seconds

Returns

0

Example Code

NA

Notes and Warnings

NA

Class WiFiServer

WiFiServer Class

Description

Defines a class of WiFi server implementation for Ameba.

Syntax

class WiFiServer

Members

Public Constructors	
WiFiServer::WiFiServer	Constructs a WiFiServer object and creates a server that listens for incoming connections on the specified port
Public Methods	
WiFiServer::available	Gets a client that is connected to the server and has data available for reading. The connection persists when the returned client object goes out of scope; you can close it by calling the client.stop()
WiFiServer::begin	Tells the server to begin listening for incoming connections
WiFiServer::write	Write data to all the clients connected to a server

WiFiServer::WiFiServer

Description

Constructs a WiFiServer object and creates a server that listens for incoming connections on the specified port.

Syntax

WiFiServer::WiFiServer(uint16_t port)

Parameters

port: The port number being connected to.

Returns

The function returns nothing.

Example Code

Example: SimpleServerWiFi

```
#include <WiFi.h>

char ssid[] = "yourNetwork" ; // your network SSID (name)

char pass[] = "secretPassword" ; // your network password

int keyIndex = 0; // your network key Index number (needed only for WEP)

int status = WL_IDLE_STATUS;

WiFiServer server(5000);

void setup() {

  Serial.begin(9600); // initialize serial communication

  pinMode(9, OUTPUT); // set the LED pin mode

  // check for the presence of the shield:

  if (WiFi.status() == WL_NO_SHIELD) {

    Serial.println( "WiFi shield not present" );

    while (true); // don't continue

  }

  String fv = WiFi.firmwareVersion();

  if ( fv != "1.1.0" )

    Serial.println( "Please upgrade the firmware" );

  // attempt to connect to Wifi network:

  while ( status != WL_CONNECTED) {

    Serial.print( "Attempting to connect to Network named: ");

    Serial.println(ssid); // print the network name (SSID);

    // Connect to WPA/WPA2 network. Change this line if using open or WEP network:

    status = WiFi.begin(ssid, pass);

    // wait 10 seconds for connection:
```

```

delay(10000);
}

server.begin(); // start the tcp server on port 5000

printWifiStatus(); // you're connected now, so print out the status
}

char buffer[256];

void loop() {
  WiFiClient client = server.available();

  while (client.connected()) {
    memset(buffer, 0, 256);

    int n = client.read((uint8_t*)&buffer[0], sizeof(buffer));

    if (n > 0) {
      for (int i=0; i<n; i++) {
        Serial.print(buffer[i]);
      }

      n = client.write(buffer, n);

      if (n <= 0) break;
    }
  }

  client.stop();
}

void printWifiStatus() {
  // print the SSID of the network you're attached to:
  Serial.print( "SSID: ");
  Serial.println(WiFi.SSID());

  // print your WiFi shield's IP address:
  IPAddress ip = WiFi.localIP();
  Serial.print( "IP Address: ");
  Serial.println(ip);

  // print the received signal strength:

```

```
long rssi = WiFi.RSSI();  
Serial.print( "signal strength (RSSI):" );  
Serial.print(rssi);  
Serial.println(" dBm" );  
}
```

Notes and Warnings

NA

WiFiServer::available**Description**

Gets a client that is connected to the server and has data available for reading. The connection persists when the returned client object goes out of scope; you can close it by calling the client.stop().

Syntax

WiFiClient WiFiServer::available(uint8_t* status)

Parameters

status: WiFi availability status

Returns

A Client object; if no Client has data available for reading, this object will evaluate to false in an if-statement

Example Code

Example: SimpleServerWiFi

Details of the code can be found in the previous section of WiFiServer:: WiFiServer.

Notes and Warnings

NA

WiFiServer::begin

Description

Tells the server to begin listening for incoming connections

Syntax

```
void WiFiServer::begin(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: SimpleServerWiFi

Details of the code can be found in the previous section of WiFiServer:: WiFiServer.

Notes and Warnings

NA

WiFiServer::write

Description

Write data to all the clients connected to a server

Syntax

```
size_t WiFiServer::write(uint8_t b)
size_t WiFiServer::write(const uint8_t *buf, size_t size)
```

Parameters

b: byte to be written

buf: data buffer

size: Size of the data in the buffer

Returns

The function returns the number of bytes written. It is not necessary to read this.

Example Code

Example: SimpleServerWiFi

Details of the code can be found in the previous section of WiFiServer:: WiFiServer.

Notes and Warnings

NA

Class WiFiSSLClient

WiFiSSLClient Class

Description

Defines a class of WiFi Secure Socket Layer Client implementation for Ameba.

Syntax

```
class WiFiSSLClient
```

Members

Public Constructors	
WiFiSSLClient::WiFiSSLClient	Constructs a WiFiSSLClient instance that always connects in SSL to the specified IP address and port
Public Methods	
WiFiSSLClient::connect	Connect to the IP address and port
WiFiSSLClient::write	Write a single byte into the packet
WiFiSSLClient::available	Number of bytes remaining in the current packet
WiFiSSLClient::read	Read a single byte from the current packet
WiFiSSLClient:: peek	Return the next byte from the current packet without moving on to the next byte
WiFiSSLClient:: flush	Finish reading the current packet
WiFiSSLClient::stop	Stop SSL client connection
WiFiSSLClient::connected	Check if SSL client is connected, return 1 if connected, 0 if not
WiFiSSLClient:: setRootCA	Set Root CA for authentication
WiFiSSLClient:: set-ClientCertificate	Set certificate of the client
WiFiSSLClient::setRecvTimeout	Set receiving timeout
WiFiSSLClient::setPreSharedKey	Set the pre shared key (PSK) to use for authentication

WiFiSSLClient::WiFiSSLClient

Description

Constructs a WiFiSSLClient instance that always connects in SSL to the specified IP address and port.

Syntax

```
WiFiSSLClient::WiFiSSLClient(void)
WiFiSSLClient::WiFiSSLClient(uint8_t sock)
```

Parameters

sock: socket state, default -1

Returns

The function returns nothing.

Example Code

Example: WiFiSSLClient

#include

```
char ssid[] = "yourNetwork" ;// your network SSID (name)

char pass[] = "secretPassword" ;// your network password (use for WPA, or WEP)

int keyIndex = 0; // your network key Index number (needed only for WEP)

int status = WL_IDLE_STATUS;

char server[] = "www.google.com" ;// name address for Google (using DNS)

//unsigned char test_client_key[] = "" ;//For the usage of verifying client
//unsigned char test_client_cert[] = "" ;//For the usage of verifying client
//unsigned char test_ca_cert[] = "" ;//For the usage of verifying server

WiFiSSLClient client;

void setup() {

//Initialize serial and wait for port to open:

Serial.begin(9600);

while (!Serial) {

; // wait for serial port to connect. Needed for native USB port only

}

// check for the presence of the shield:

if (WiFi.status() == WL_NO_SHIELD) {

Serial.println( "WiFi shield not present" );

// don' t continue:

while (true);

}

// attempt to connect to Wifi network:

while (status != WL_CONNECTED) {

Serial.print( "Attempting to connect to SSID: ");

Serial.println(ssid);

// Connect to WPA/WPA2 network. Change this line if using open or WEP network:

status = WiFi.begin(ssid,pass);

// wait 10 seconds for connection:

delay(10000);
```

```
}

Serial.println( "Connected to wifi" );

printWifiStatus();

Serial.println(" nStarting connection to server..." );

// if you get a connection, report back via serial:

if (client.connect(server, 443)) { //client.connect(server, 443, test_ca_cert, test_client_cert, test_client_key)

Serial.println( "connected to server" );

// Make a HTTP request:

client.println( "GET /search?q=realtek HTTP/1.0" );

client.println( "Host: www.google.com" );

client.println( "Connection: close" );

client.println();

}

else

Serial.println( "connected to server failed" );

}

void loop() {

// if there are incoming bytes available

// from the server, read them and print them:

while (client.available()) {

char c = client.read();

Serial.write(c);

}

// if the server' s disconnected, stop the client:

if (!client.connected()) {

Serial.println();

Serial.println( "disconnecting from server." );

client.stop();

// do nothing forevermore:

while (true);
```

```
}  
}  
  
void printWifiStatus() {  
  // print the SSID of the network you're attached to:  
  Serial.print( "SSID: ");  
  Serial.println(WiFi.SSID());  
  
  // print your WiFi shield's IP address:  
  IPAddress ip = WiFi.localIP();  
  Serial.print( "IP Address: ");  
  Serial.println(ip);  
  
  // print your MAC address:  
  byte mac[6];  
  WiFi.macAddress(mac);  
  Serial.print( "MAC address: ");  
  Serial.print(mac[0], HEX);  
  Serial.print( ":" );  
  Serial.print(mac[1], HEX);  
  Serial.print( ":" );  
  Serial.print(mac[2], HEX);  
  Serial.print( ":" );  
  Serial.print(mac[3], HEX);  
  Serial.print( ":" );  
  Serial.print(mac[4], HEX);  
  Serial.print( ":" );  
  Serial.println(mac[5], HEX);  
  
  // print the received signal strength:  
  long rssi = WiFi.RSSI();  
  Serial.print( "signal strength (RSSI):" );  
  Serial.print(rssi);  
  Serial.println(" dBm" );  
}
```

```
}
```

Notes and Warnings

NA

WiFiSSLClient::connect

Description

Connect to the IP address and port.

Syntax

```
int WiFiSSLClient::connect(IPAddress ip, uint16_t port)
```

```
int WiFiSSLClient::connect(const char *host, uint16_t port)
```

```
int WiFiSSLClient::connect(const char* host, uint16_t port, unsigned char* rootCABuff, unsigned char* cli_cert, unsigned char* cli_key)
```

```
int WiFiSSLClient::connect(IPAddress ip, uint16_t port, unsigned char* rootCABuff, unsigned char* cli_cert, unsigned char* cli_key)
```

Parameters

ip: IP address

host: Host name

port: the port to listen on

rootCABuff: buffer that store root CA

cli_cert: buffer that store client certificate

cli_key buffer that store client key pair

Returns

1: if successful

0: if failed

Example Code

Example: WiFiSSLClient

Details of the code can be found in the previous section of WiFiSSLClient:: WiFiSSLClient.

Notes and Warnings

NA

WiFiSSLClient::write

Description

Write a single byte into the packet

Syntax

```
size_t WiFiSSLClient::write(uint8_t byte)
```

```
size_t WiFiSSLClient::write(const uint8_t *buf, size_t size)
```

Parameters

byte: the outgoing byte

buf: the outgoing message

size: the size of the buffer

Returns

The function returns single -byte into the packet or turns bytes size from the buffer into the packet.

Example Code

NA

Notes and Warnings

NA

WiFiSSLClient::available

Description

Number of bytes remaining in the current packet

Syntax

```
int WiFiSSLClient::available(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns the number of bytes available in the current packet; else return “0:” if no data available.

Example Code

Example: WiFiSSLClient

Details of the code can be found in the previous section of WiFiSSLClient:: WiFiSSLClient.

Notes and Warnings

NA

WiFiSSLClient::read

Description

Read a single byte from the current packet

Syntax

```
int WiFiSSLClient::read()
```

```
int WiFiSSLClient::read(unsigned char* buf, size_t size)
```

Parameters

buf: buffer to hold incoming packets (char*)

size: maximum size of the buffer (int)

Returns

size: the size of the buffer

-1: if no buffer is available

Example Code

Example: WiFiSSLClient

Details of the code can be found in the previous section of WiFiSSLClient:: WiFiSSLClient.

Notes and Warnings

NA

WiFiSSLClient::peek

Description

Return the next byte from the current packet without moving on to the next byte.

Syntax

```
int WiFiSSLClient::peek(void)
```

Parameters

The function requires no input parameter.

Returns

b: the next byte or character

-1: if none is available

Example Code

NA

Notes and Warnings

NA

WiFiSSLClient::flush

Description

Finish reading the current packet

Syntax

void WiFiSSLClient::flush(void)

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

WiFiSSLClient::stop**Description**

Disconnect from the server. Stop SSL client connection

Syntax

void WiFiSSLClient::stop(void)

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: WiFiSSLClient

Details of the code can be found in the previous section of WiFiSSLClient:: WiFiSSLClient.

Notes and Warnings

NA

WiFiSSLClient::connected

Description

Check if SSL client is connected, return 1 if connected, 0 if not.

Syntax

```
uint8_t WiFiSSLClient::connected(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns “1” if connected, returns “0” if not connected.

Example Code

Example: WiFiSSLClient

Details of the code can be found in the previous section of WiFiSSLClient:: WiFiSSLClient.

Notes and Warnings

NA

WiFiSSLClient::setRootCA

Description

Set Root CA for authentication

Syntax

```
void WiFiSSLClient::setRootCA(unsigned char *rootCA)
```

Parameters

rootCA: a string of rootCA

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

WiFiSSLClient::setClientCertificate**Description**

Set certificate of client

Syntax

```
void WiFiSSLClient::setClientCertificate(unsigned char *client_ca, unsigned char *private_key)
```

Parameters

client_ca: Client certificate

private_key: client's private key pair

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

WiFiSSLClient::setRecvTimeout

Description

Set receiving timeout

Syntax

```
int WiFiSSLClient::setRecvTimeout(int timeout)
```

Parameters

timeout: timeout in seconds

Returns

The function returns “0” .

Example Code

NA

Notes and Warnings

NA

WiFiSSLClient::setPreSharedKey

Description

Set the pre shared key (PSK) to use for authentication

Syntax

```
void WiFiSSLClient::setPreSharedKey(unsigned char *pskIdent, unsigned char *psKey)
```

Parameters

pskIdent: identity for PSK

psKey: Pre shared key

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

Do not set a root CA and client certificate if PSK should be used for authentication. If root CA, client certificate and PSK are all set, certificate based authentication will be used.

Class WiFiUdp**WiFiUDP Class****Description**

Defines a class of WiFi UDP implementation for Ameba.

Syntax

```
class WiFiUDP
```

Members

Public Constructors	
WiFiUDP::WiFiUDP	Constructs a WiFiUDP instance of the WiFi UDP class that can send and receive UDP messages
Public Methods	
WiFiUDP:: begin	initialize, start listening on the specified port. Returns 1 if successful, 0 if there are no sockets available to use
WiFiUDP:: stop	Finish with the UDP socket
WiFiUDP:: beginPacket	Start building up a packet to send to the remote host-specific in IP and port
WiFiUDP:: endPacket	Finish off this packet and send it
WiFiUDP:: write	Write a single byte into the packet
WiFiUDP:: writeImmediately	Send packet immediately from the buffer
WiFiUDP:: parsePacket	Start processing the next available incoming packet
WiFiUDP::available	Number of bytes remaining in the current packet
WiFiUDP::read	Read a single byte from the current packet
WiFiUDP:: peek	Return the next byte from the current packet without moving on to the next byte
WiFiUDP:: flush	Finish reading the current packet
WiFiUDP:: remoteIP	Return the IP address of the host who sent the current incoming packet
WiFiUDP:: remotePort	Return the port of the host who sent the current incoming packet
WiFiUDP:: setRecvTimeout	Set receiving timeout

WiFiUDP::WiFiUDP

Description

Constructs a WiFiUDP instance of the WiFi UDP class that can send and receive UDP messages.

Syntax

```
WiFiUDP::WiFiUDP(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: WiFiUdpSendReceiveString

This example demonstrates WiFi UDP send and receive string. This sketch waits for a UDP packet on a local port using a WiFi shield. When a packet is received an Acknowledge packet is sent to the client on port remotePort.

```
#include <WiFi.h>

#include <WiFiUdp.h>

int status = WL_IDLE_STATUS;

char ssid[] = "yourNetwork" ; // your network SSID (name)

char pass[] = "secretPassword" ; // your network password (use for WPA, or use as key for WEP)

int keyIndex = 0; // your network key Index number (needed only for WEP)

unsigned int localPort = 2390; // local port to listen on

char packetBuffer[255]; //buffer to hold incoming packet

char ReplyBuffer[] = "acknowledged" ; // a string to send back

WiFiUDP Udp;

void setup() {

//Initialize serial and wait for port to open:

Serial.begin(9600);

while (!Serial) {

; // wait for serial port to connect. Needed for native USB port only

}

// check for the presence of the shield:

if (WiFi.status() == WL_NO_SHIELD) {

Serial.println( "WiFi shield not present" );

// don't continue:

while (true);

}

String fv = WiFi.firmwareVersion();

if (fv != "1.1.0" ) {

Serial.println( "Please upgrade the firmware" );

}

}
```

```
// attempt to connect to Wifi network:

while (status != WL_CONNECTED) {

Serial.print( "Attempting to connect to SSID: ");

Serial.println(ssid);

// Connect to WPA/WPA2 network. Change this line if using open or WEP network:

status = WiFi.begin(ssid,pass);

// wait 10 seconds for connection:

delay(10000);

}

Serial.println( "Connected to wifi" );

printWifiStatus();

Serial.println(" Starting connection to server..." );

// if you get a connection, report back via serial:

Udp.begin(localPort);

}

void loop() {

// if there's data available, read a packet

int packetSize = Udp.parsePacket();

if (packetSize) {

Serial.print( "Received packet of size ");

Serial.println(packetSize);

Serial.print( "From ");

IPAddress remoteIp = Udp.remoteIP();

Serial.print(remoteIp);

Serial.print(" , port ");

Serial.println(Udp.remotePort());

// read the packet into packetBuffer

int len = Udp.read(packetBuffer, 255);

if (len > 0) {

packetBuffer[len] = 0;
```



```

}

Serial.println( "Contents:" );

Serial.println(packetBuffer);

// send a reply, to the IP address and port that sent us the packet we received
Udp.beginPacket(Udp.remoteIP(), Udp.remotePort());

Udp.write(ReplyBuffer);

Udp.endPacket();

}

}

void printWifiStatus() {
// print the SSID of the network you' re attached to:
Serial.print( "SSID: ");
Serial.println(WiFi.SSID());

// print your WiFi shield' s IP address:
IPAddress ip = WiFi.localIP();
Serial.print( "IP Address: ");
Serial.println(ip);

// print the received signal strength:
long rssi = WiFi.RSSI();
Serial.print( "signal strength (RSSI):" );
Serial.print(rssi);
Serial.println(" dBm" );
}

```

Notes and Warnings

This constructor does not take in any parameter, thus use another method to set up the IP address and port number.

WiFiUDP::begin

Description

Initialize, start listening on the specified port. Returns 1 if successful, 0 if there are no sockets available to use.

Syntax

```
uint8_t WiFiUDP::begin(uint16_t port)
```

Parameters

port: the local port to listen on

Returns

1: if successful

0: if there are no sockets available to use

Example Code

Example: WiFiUdpSendReceiveString

This example demonstrates WiFi UDP send and receive string. This sketch waits for a UDP packet on a local port using a WiFi shield. When a packet is received an Acknowledge packet is sent to the client on port remotePort. The detail of the code can be found in WiFiUDP:: WiFiUDP.

Notes and Warnings

NA

WiFiUDP::stop

Description

Disconnect from the server. Release any resource being used during the UDP session.

Syntax

```
void WiFiUDP::stop(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

WiFiUDP::beginPacket**Description**

Start building up a packet to send to the remote host-specific in IP and port.

Syntax

```
int WiFiUDP::beginPacket(const char *host, uint16_t port)
```

```
int WiFiUDP::beginPacket(IPAddress ip, uint16_t port)
```

Parameters

host: hostname

port: port number

ip: IP address

Returns

1: if successful

0: if there was a problem with the supplied IP address or port

Example Code

Example: WiFiUdpSendReceiveString

This example demonstrates WiFi UDP send and receive string. This sketch waits for a UDP packet on a local port using a WiFi shield. When a packet is received an Acknowledge packet is sent to the client on port remotePort. The detail of the code can be found in WiFiUDP:: WiFiUDP.

Notes and Warnings

NA

WiFiUDP::endPacket

Description

Finish off this packet and send it

Syntax

```
int WiFiUDP::endPacket(void)
```

Parameters

The function requires no input parameter.

Returns

1: if the packet was sent successfully

0: if there was an error

Example Code

Example: WiFiUdpSendReceiveString

This example demonstrates WiFi UDP send and receive string. This sketch waits for a UDP packet on a local port using a WiFi shield. When a packet is received an Acknowledge packet is sent to the client on port remotePort. The detail of the code can be found in WiFiUDP:: WiFiUDP.

Notes and Warnings

NA

WiFiUDP::write

Description

Write a single byte into the packet.

Syntax

```
size_t WiFiUDP::write(uint8_t byte)
```

```
size_t WiFiUDP::write(const uint8_t *buffer, size_t size)
```

Parameters

byte: the outgoing byte

buffer: the outgoing message

size: the size of the buffer

Returns

single-byte into the packet

bytes size from the buffer into the packet

Example Code

Example: WiFiUdpSendReceiveString

This example demonstrates WiFi UDP send and receive string. This sketch waits for a UDP packet on a local port using a WiFi shield. When a packet is received an Acknowledge packet is sent to the client on port remotePort. The detail of the code can be found in WiFiUDP:: WiFiUDP.

Notes and Warnings

NA

WiFiUDP::writeImmediately**Description**

Send packet immediately from the buffer

Syntax

```
size_t WiFiUDP::writeImmediately(const uint8_t *buffer, size_t size)
```

Parameters

buffer: the outgoing message

size: the size of the buffer

Returns

single-byte into the packet

bytes size from the buffer into the packet

Example Code

NA

Notes and Warnings

NA

WiFiUDP::parsePacket

Description

Start processing the next available incoming packet

Syntax

```
int WiFiUDP::parsePacket(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns the size of the packet in bytes or returns “0:” if no packets are available.

Example Code

Example: WiFiUdpSendReceiveString

Notes and Warnings

NA

WiFiUDP::available**Description**

Number of bytes remaining in the current packet.

Syntax

```
int WiFiUDP::available(void)
```

Parameters

The function requires no input parameter.

Returns

the number of bytes available in the current packet

0: if parsePacket hasn't been called yet

Example Code

NA

Notes and Warnings

NA

WiFiUDP::read**Description**

Read a single byte from the current packet

Syntax

```
int WiFiUDP::read()
```

```
int WiFiUDP::read(unsigned char* buffer, size_t len)
```

Parameters

buffer: buffer to hold incoming packets (char*)

len: maximum size of the buffer (int)

Returns

size: the size of the buffer

-1: if no buffer is available

Example Code

Example: WiFiUdpSendReceiveString

his example demonstrates WiFi UDP send and receive string. This sketch waits for a UDP packet on a local port using a WiFi shield. When a packet is received an Acknowledge packet is sent to the client on port remotePort. The detail of the code can be found in WiFiUDP:: WiFiUDP.

Notes and Warnings

NA

WiFiUDP::peek

Description

Return the next byte from the current packet without moving on to the next byte

Syntax

```
int WiFiUDP::peek(void)
```

Parameters

The function requires no input parameter.

Returns

b: the next byte or character

-1: if none is available

Example Code

NA

Notes and Warnings

NA

WiFiUDP::flush**Description**

Finish reading the current packet

Syntax

```
void WiFiUDP::flush(void)
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

WiFiUDP::remoteIP**Description**

Return the IP address of the host who sent the current incoming packet

Syntax

IPAddress WiFiUDP::remoteIP(void)

Parameters

The function requires no input parameter.

Returns

IP address connecting to

Example Code

Example: WiFiUdpSendReceiveString

This example demonstrates WiFi UDP send and receive string. This sketch waits for a UDP packet on a local port using a WiFi shield. When a packet is received an Acknowledge packet is sent to the client on port remotePort. The detail of the code can be found in WiFiUDP:: WiFiUDP.

Notes and Warnings

NA

WiFiUDP::remotePort

Description

Return the port of the host who sent the current incoming packet

Syntax

uint16_t WiFiUDP::remotePort(void)

Parameters

The function requires no input parameter.

Returns

The remote port connecting to

Example Code

Example: WiFiUdpSendReceiveString

This example demonstrates WiFi UDP send and receive string. This sketch waits for a UDP packet on a local port using a WiFi shield. When a packet is received an Acknowledge packet is sent to the client on port remotePort. The detail of the code can be found in WiFiUDP:: WiFiUDP.

Notes and Warnings

NA

WiFiUDP::setRecvTimeout**Description**

Set receiving timeout

Syntax

```
void WiFiUDP::setRecvTimeout(int timeout)
```

Parameters

timeout in seconds

Returns

The function returns nothing.

Example Code

NA

Notes and Warnings

NA

Readme

The Ameba WiFi related APIs and examples are works based on Arduino WiFi shield libraries (<https://www.arduino.cc/en/Reference/WiFi>).

These include,

- `WiFi.cpp`
- `WiFi.h`
- `WiFiServer.cpp`
- `WiFiServer.h`
- `WiFiUdp.cpp`
- `WiFiUdp.h`

These libraries are under GNU Lesser General Public License, either version 2.1 of the License, or (at your option) any later version.

Wire

Class TwoWire

TwoWire Class

Description

Defines a class of I2C API

Syntax

```
class TwoWire
```

Members

Public Constructors	
TwoWire::TwoWire	Constructs a TwoWire object
Public Methods	
TwoWire::begin	Initialize I2C master/slave
TwoWire::setClock	Set I2C frequency
TwoWire::beginTransaction	Begin I2C transmission
TwoWire::endTransmission	End I2C transmission
TwoWire::requestFrom	Set I2C requestFrom
TwoWire::write	Write data to I2C
TwoWire::available	Check if I2C is available
TwoWire::read	Read data from I2C
TwoWire::peek	Read peek from I2C
TwoWire::flush	Do nothing, use, and transmission(..) to force data transfer
TwoWire::onReceive	Callback function when I2C on receive
TwoWire::onRequest	Callback function when I2C on request

TwoWire::TwoWire**Description**

Constructs a TwoWire object.

Syntax

```
TwoWire::TwoWire (uint32_t dwSDAPin, uint32_t dwSCLPin);
```

Parameters

dwSDAPin: The Arduino PIN to be set as an SDA pin.

dwSCLPin: The Arduino PIN to be set as an SCL pin.

Returns

The function returns nothing.

Example Code

Example: MasterWriter

This example demonstrates the use of the wire library writes to an I2C/TWI slave device.

```
#include <Wire.h>

void setup() {
  Wire.begin(); // join i2c bus (address optional for master)
}

byte x = 0;

void loop() {
  Wire.beginTransmission(8); // transmit to device #8
  Wire.write( "x is "); // sends five bytes
  Wire.write(x); // sends one byte
  Wire.endTransmission(); // stop transmitting
  x++;
  delay(500);
}
```

Example: MasterReader

```
#include <Wire.h>

void setup() {
  Wire.begin(); // join i2c bus (address optional for master)
  Serial.begin(9600); // start serial for output
}

void loop() {
  Wire.requestFrom(8, 6); // request 6 bytes from slave device #8
  while (Wire.available()) { // slave may send less than requested
    char c = Wire.read(); // receive a byte as character
    Serial.print(c); // print the character
  }
  delay(500);
}
```

This example demonstrates the use of the wire library reads data from an I2C/TWI slave device.

Notes and Warnings

Include “Wire.h” to use the class function.

TwoWire::begin

Description

Initialize I2C master/slave.

Syntax

```
void TwoWire::begin (void);  
void TwoWire::begin (uint8_t address = 0);  
void TwoWire::begin (int address);
```

Parameters

void: Set the I2C master mode.

address: Set the I2C master mode with slave address value.

Returns

The function returns nothing.

Example Code

Example: MasterReader; MasterWriter

The details of the code can be found in the previous section of TwoWire:: TwoWire.

Notes and Warnings

Include “Wire.h” to use the class function.

TwoWire::setClock

Description

Set I2C frequency.

Syntax

```
void TwoWire::setClock(uint32_t frequency);
```

Parameters

frequency: The frequency values.

Returns

The function returns nothing.

Example Code

Example: MasterReader; MasterWriter

The details of the code can be found in the previous section of TwoWire:: TwoWire.

Notes and Warnings

Include “Wire.h” to use the class function.

TwoWire::beginTransmission

Description

Begin I2C transmission.

Syntax

```
void TwoWire::beginTransmission (uint8_t address);
```

```
void TwoWire::beginTransmission (int address);
```

Parameters

address: The transmission address.

Returns

The function returns nothing.

Example Code

Example: MasterReader; MasterWriter

The details of the code can be found in the previous section of TwoWire:: TwoWire.

Notes and Warnings

Include “Wire.h” to use the class function.

TwoWire::endTransmission

Description

End I2C transmission. Originally, ‘endTransmission’ was an f(void) function. It has been modified to take one parameter indicating whether or not a STOP should be performed on the bus. Calling endTransmission(false) allows a sketch to perform a repeated start.

WARNING: Nothing in the library keeps track of whether the bus tenure has been properly ended with a STOP. It is very possible to leave the bus in a hung state if no call to endTransmission(true) is made. Some I2C devices will behave oddly if they do not see a STOP.

If the input parameter is void, this provides backward compatibility with the original definition, and expected behavior, of endTransmission.

Syntax

```
uint8_t TwoWire::endTransmission (uint8_t sendStop);
```

```
uint8_t TwoWire::endTransmission (void);
```

Parameters

sendStop: True to end the transmission

Returns

Return 0 if successful, else error.

Example Code

Example: MasterReader; MasterWriter

The details of the code can be found in the previous section of TwoWire:: TwoWire.

Notes and Warnings

Include “Wire.h” to use the class function.

TwoWire::requestFrom

Description

Set I2C requestFrom.

Syntax

```
uint8_t TwoWire::requestFrom (uint8_t address, uint8_t quantity, uint8_t sendStop);  
uint8_t TwoWire::requestFrom (uint8_t address, uint8_t quantity);  
uint8_t TwoWire::requestFrom(int address, int quantity);  
uint8_t TwoWire::requestFrom (int address, int quantity, int sendStop);
```

Parameters

address: I2C read address.

quantity: I2C read quantity.

sendStop: True to end the transmission.

Returns

Return 0 if successful, else error.

Example Code

Example: MasterReader; MasterWriter

The details of the code can be found in the previous section of TwoWire:: TwoWire.

Notes and Warnings

Include “Wire.h” to use the class function.

TwoWire::write

Description

Write data to I2C.

Syntax

```
size_t TwoWire::write (uint8_t data);  
size_t TwoWire::write (const uint8_t *data, size_t quantity);
```

Parameters

data: The data to be transmitted.

quantity: The quantity of data.

Returns

Return 0 if successful, else error.

Example Code

Example: MasterReader; MasterWriter

The details of the code can be found in the previous section of TwoWire:: TwoWire.

Notes and Warnings

Include “Wire.h” to use the class function.

TwoWire::available

Description

Check if I2C is available.

Syntax

```
int TwoWire::available (void);
```

Parameters

The function requires no input parameter.

Returns

Return 0 if successful, else error.

Example Code

Example: MasterReader; MasterWriter

The details of the code can be found in the previous section of TwoWire:: TwoWire.

Notes and Warnings

Include “Wire.h” to use the class function.

TwoWire::read

Description

Read data from I2C

Syntax

```
int TwoWire::read (void);
```

Parameters

The function requires no input parameter.

Returns

The read data from the receive buffer.

Example Code

Example: MasterReader; MasterWriter

The details of the code can be found in the previous section of TwoWire:: TwoWire.

Notes and Warnings

Include “Wire.h” to use the class function.

TwoWire::peek**Description**

Read peek from I2C.

Syntax

```
int TwoWire::peek (void);
```

Parameters

The function requires no input parameter.

Returns

The peek data read from the receive buffer.

Example Code

Example: MasterReader; MasterWriter

The details of the code can be found in the previous section of TwoWire:: TwoWire.

Notes and Warnings

Include “Wire.h” to use the class function.

TwoWire::flush**Description**

Do nothing, use endTransmission(..) to force data transfer.

Syntax

```
void TwoWire::flush (void);
```

Parameters

The function requires no input parameter.

Returns

The function returns nothing.

Example Code

Example: MasterReader; MasterWriter

Notes and Warnings

Include “Wire.h” in order to use the class function.

TwoWire::onReceive

Description

Callback function when I2C on receive.

Syntax

```
void TwoWire::onReceive (void(*function)(int));
```

Parameters

function: The callback function.

Returns

The function returns nothing.

Example Code

Example: MasterReader; MasterWriter

The details of the code can be found in the previous section of TwoWire:: TwoWire.

Notes and Warnings

Include “Wire.h” to use the class function.

TwoWire::onRequest

Description

Callback function when I2C on request.

Syntax

```
void TwoWire::onRequest (void(*function)(void));
```

Parameters

function: The callback function

Returns

The function returns nothing.

Example Code

Example: MasterReader; MasterWriter

The details of the code can be found in the previous section of TwoWire:: TwoWire.

Notes and Warnings

Include “Wire.h” to use the class function.

Wire_Readme

The Ameba LCD related api and example are works based on “New LiquidCrystal library” (<https://bitbucket.org/fmalpartida/new-liquidcrystal/>).

These include,

LCD.h

LCD.cpp

I2CIO.h

I2CIO.cpp

LiquidCrystal_I2C.h

LiquidCrystal_I2C.cpp

examples/LcdHelloWorld/LcdHelloWorld.ino

These files inherit the licence of “New LiquidCrystal Library” which are under a Creative Commons Attribution-ShareAlike 3.0 Unported License. CC BY-SA 3.0.

1.3.5 Resources

Links

- [AmebaD Arduino Github](#)
- [Arduino Website](#)

1.3.6 Support

FAQ

Where to buy Ameba RTL8722DM Board?

Refer to [Purchase link](#).

Which Bluetooth standards are supported by RTL8722CSM/RTL8722DM?

Both boards support BLE 5.0. Classic Bluetooth (BR/EDR) is not supported.

Which BLE roles are supported?

RTL8722CSM/RTL8722DM can operate as either a BLE Central or BLE Peripheral device.

Are all pins on RTL8722CSM/RTL8722DM usable?

No, those marked NC are not connected to any pin and thus unusable.

Is XIP (execute in place) supported on RTL8722CSM/RTL8722DM?

Yes, it is supported.

Does RTL8722CSM support 5G WiFi?

No. Only RTL8722DM supports dual band 2.4G + 5G WiFi. RTL8722CSM only supports single band 2.4G WiFi.

How to enter the download mode?

Press and hold the UART DOWNLOAD button. Then Press the RESET button and release both UART DOWNLOAD and RESET buttons.

Trouble shooting

RTL8722CSM/RTL8722DM cannot be found as a Bluetooth device.

Please make sure the antenna is connected properly. Check your code for the correct Bluetooth configurations.

My code is not behaving as I expected.

Try to debug your program using `printf()` and `Serial.print()` statements. If the issue persists, you can ask for help at [Forums](#)

Why is there no output on my serial terminal after connecting to RTL8722CSM/RTL8722DM UART?

RTL8722CSM/RTL8722DM is by default configured at 115200 baudrate, please check if your serial terminal is configured to 115200.

My program is not being downloaded into RTL8722CSM/RTL8722DM?

Please follow the procedure for the correct downloading:

1. Enter the download mode. The on-board Green LED will blink when entered download mode.
 2. When downloading the image into board the on-board Red LED will blink
 3. After a successful download, you will see log like this “All images sent successfully” .
-

Sometimes WiFi signal is weak?

The default antenna for RTL8722CSM/RTL8722DM uses the I-Pex Connector. Please change/connect the I-Pex Connector antenna.

Why is my board not powering up?

Please make sure the connector J38 beside resistor R43 is connected. The connector is used to link the power to IC.

If you have driver issue to connect board to your computer?

Please go to <https://ftdichip.com/drivers/> for USB driver.

CHAPTER 2

MicroPython SDK

欢迎来到 Ameba MicroPython 线上文档



2.1 快速入门手册

2.1.1 Ameba MicroPython: 适用于 RTL8722DM 的快速入门手册


环境配置

AmebaD RTL8722CSM/RTL8722DM MicroPython SDK 目前支持 Windows 10 和 Linux 操作系统。

AmebaD RTL8722CSM/RTL8722DM 介绍

Ameba 是一个易于编程的微控制器平台，可用于开发各种物联网应用程序。AmebaD 有各种外围接口，包括 WiFi, BLE, GPIO, I2C, UART, SPI, PWM, ADC。通过这些接口，AmebaD 可以连接 LED、开关、压力计、湿度计、PM2.5 粉尘传感器等电子组件。


Ameba 所收集的数据可以通过 WiFi 无线上传，并被智能设备上的应用程序使用，实现物联网的应用。

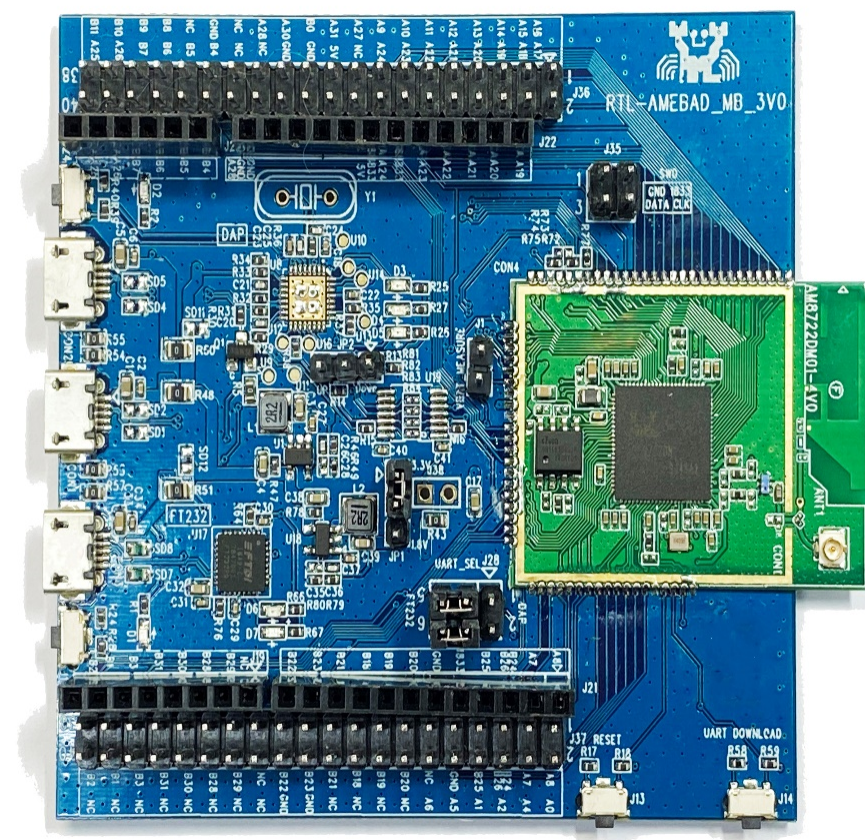


AmebaD 和 Arduino Uno 的尺寸类似，如上图所示，并且 AmebaD 上的引脚与 Arduino Uno 兼容。

AmebaD 使用 Micro USB 来供电，这在许多智能设备中很常见。

AmebaD 的引脚图和功能请参考下图和表格。

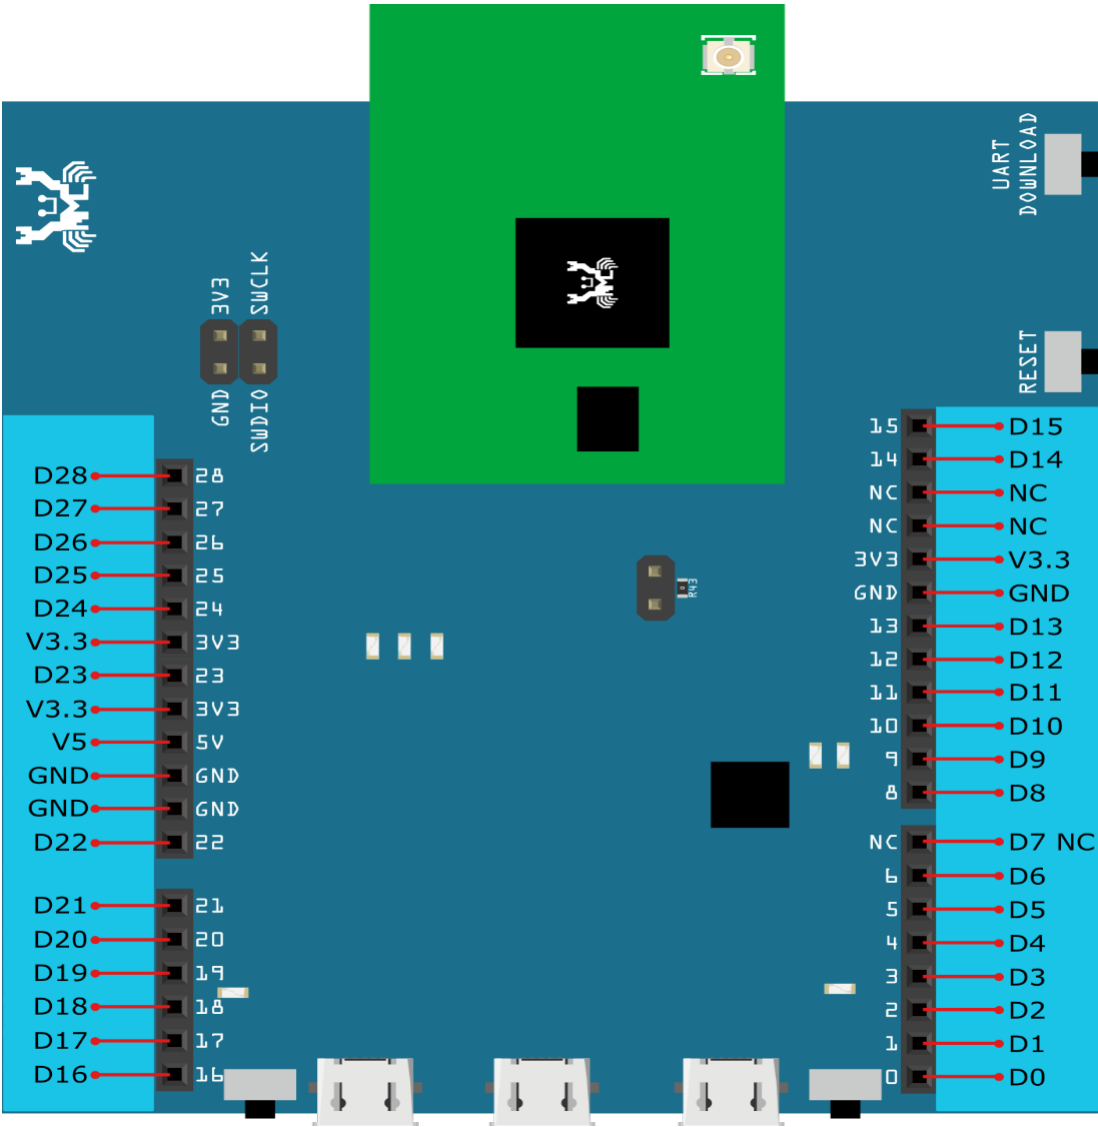

	引脚名	GPIO	ADC	PWM	UART	SPI	I2C
D00	GPIOB_2	✓	ADC5		UART3_RX(b)		
D01	GPIOB_1	✓	ADC4		UART3_TX(b)		
D02	GPIOB_3	✓	ADC6				
D03	GPIOB_31	✓					
D04	GPIOB_30	✓					
D05	GPIOB_28	✓					
D06	GPIOB_29	✓					
D07	NC						
D08	GPIOB_22	✓		PWM14			
D09	GPIOB_23	✓		PWM15			
D10	GPIOB_21	✓		PWM13	UART0_RTS(b)	SPI0_CS	
D11	GPIOB_18	✓		PWM10	UART0_RX(b)	SPI0_MOSI	
D12	GPIOB_19	✓		PWM11	UART0_TX(b)	SPI0_MISO	
D13	GPIOB_20	✓		PWM12	UART0_CTS(b)	SPI0_CLK	
D14	GPIOA_7	✓			UART2_TX(log)		
D15	GPIOA_8	✓			UART2_RX(log)		
D16	GPIOA_25	✓		PWM4	UART3_RX(a)		I2C0_SCL
D17	GPIOA_26	✓		PWM5	UART3_TX(a)		I2C0_SDA
D18	GPIOB_7	✓	ADC3	PWM17		SPI1_CS	
D19	GPIOB_6	✓	ADC2			SPI1_CLK	
D20	GPIOB_5	✓	ADC1	PWM9		SPI1_MISO	
D21	GPIOB_4	✓	ADC0	PWM8		SPI1_MOSI	
D22	GPIOA_28	✓					
D23	GPIOA_24	✓		PWM3	UART0_CTS(a)		I2C1_SDA
D24	GPIOA_23	✓		PWM2	UART0_RTS(a)		I2C1_SCL
D25	GPIOA_22	✓			UART0_RX(a)		
D26	GPIOA_21	✓			UART0_TX(a)		
D27	GPIOA_20	✓					
D28	GPIOA_19	✓					

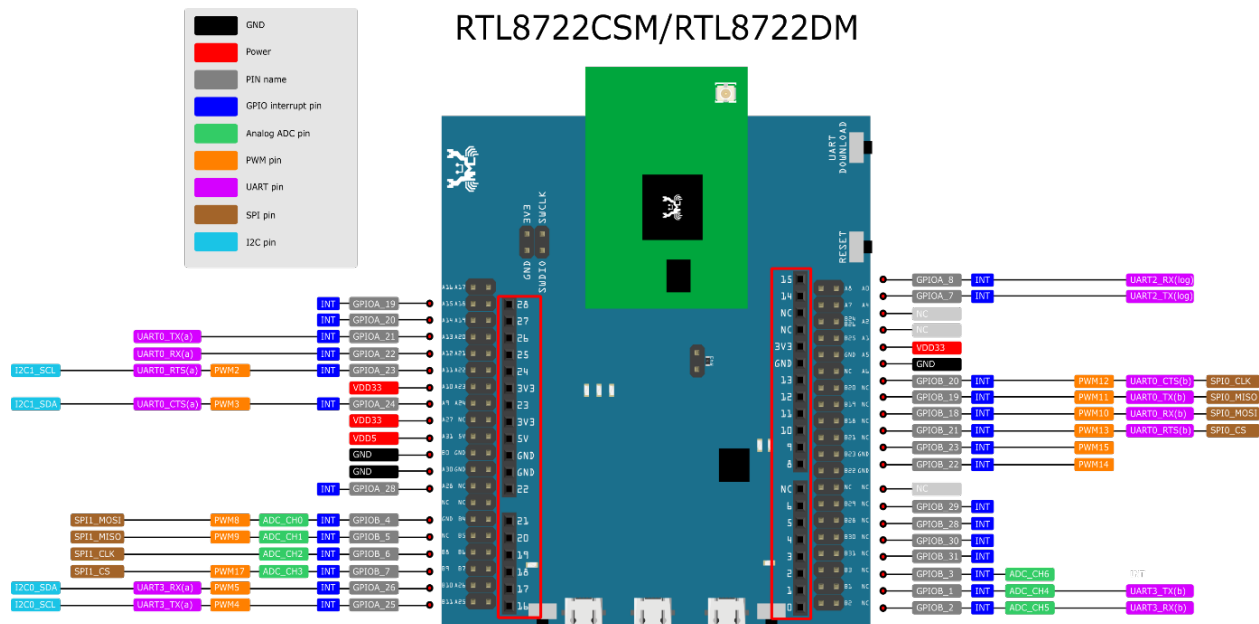

注解:

上图/表中显示的并非所有外围设备都可以在 MicroPython 上使用，请参阅“[API 文档](#)”部分以获取更多信息。

RTL8722 MicroPython 移植简介

基本背景

REPL 代表 Read-Evaluation-Print-Loop，它是一个交互式提示，可用于存取和控制微控制器。

REPL 具有其他强大的特色，例如 tab 处理，行编辑，自动缩排，输入历史记录等。它的基本功能类似于标准的 Python IDLE，但是运行在微控制器上。

要使用 REPL，只需在 PC 上打开任何串行终端软件（最常用的工具是 **TeraTerm**, **Putty** 等），然后连接到微控制器的串行端口，然后将波特率设置为 115200，然后手动重置开发板，即可看到 >>> MicroPython 提示符出现在终端画面上。您就可以在 REPL 上输入任何 Python 脚本。

建议多尝试使用“`help()`”函数以获得更多信息。例如，微控制器上电并显示 REPL 后，只需键入

```
>>> help()
```

You will see a help page giving you more details about this port; also if you type

```
>>> help(modules)
```

它将列出所有可用的内建模块供您使用。

此外，如果您想了解有关模块的更多信息，例如可用的 API 和 CONSTANT，只需键入以下代码来获取该模块的详细信息。

```
>>> help(the module of your interest)
```

让我们以 Pin 模块（GPIO）为例：

```
>>> help(Pin)

object <class 'Pin'> is of type type
id -- <function>
init -- <function>
value -- <function>
off -- <function>
on -- <function>
toggle -- <function>
board -- <class 'board'>
IN -- 0
OUT -- 1
PULL_NONE -- 0
PULL_UP -- 1
PULL_DOWN -- 2
```

REPL 快捷键

- Ctrl + d

MicroPython 将执行软件重启，这在您的微控制器表现异常时非常有用。并且将再次执行“boot.py”中的脚本。请注意，这只会重置 MicroPython interpreter 而不重置硬件，所有先前配置的硬件将保持原样，直到您手动重置开发板为止。

- Ctrl + e

此快捷键会将 REPL 设置粘贴模式，在粘贴模式下，可以一次将一大部分的代码粘贴到 REPL 中，而无需一行一行地执行代码。适合当您找到 MicroPython 库并希望通过复制和贴上立即对其进行测试时。

- Ctrl + b

此快捷键会将 REPL 重置为普通模式，您可以利用该指令解决某些模式下的卡死。


- Ctrl + c

此热键可帮助您快速取消任何输入并另起一行

设置开发环境

步骤 1: 安装驱动程序


首先, 通过 Micro USB 将 AmebaD 连接到计算机:

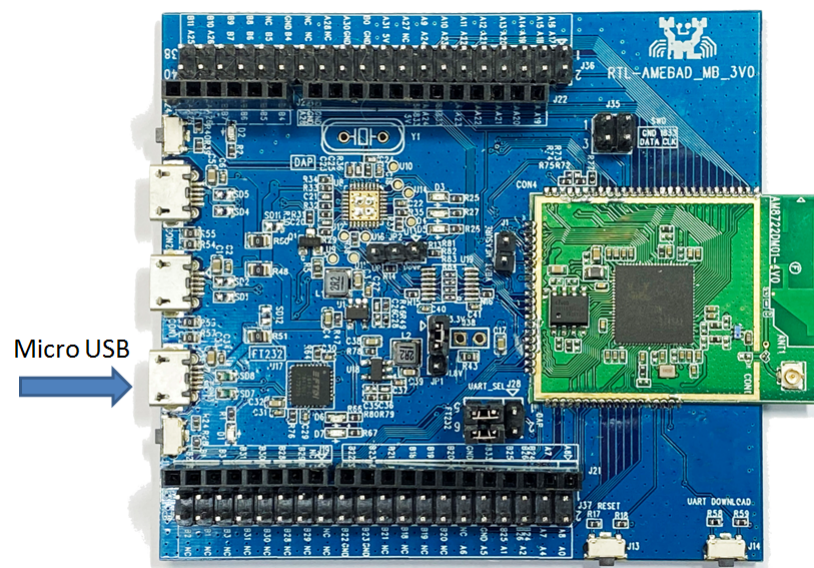

如果这是您第一次将 AmebaD 连接到您的计算机, 那么 AmebaD 的 USB 驱动程序将自动安装。

如果遇到开发板连接到计算机的驱动程序问题, 请参考下列 USB 驱动安装程序 <https://ftdichip.com/drivers/>

你可以在你的计算机的设备管理器中检查 COM 端口号:

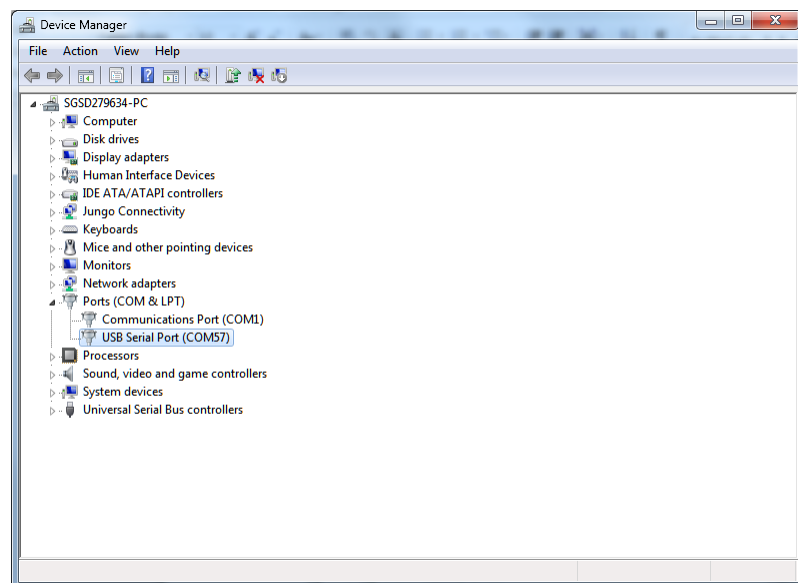

步骤 2: 安装相关工具

Windows 环境

对于 Windows 用户，请安装串行终端软件。最常见的串行终端是 Tera Term 和 Putty，在这里我们建议使用 Tera Term，可以从网络下载。

对于希望从头开始编译 MicroPython 的用户，请确保安装 Cygwin，这是在 Windows 系统上运行的类似 Linux 的环境。选择 Cygwin 安装程序时，我们建议使用 Cygwin 32 位版本。在 Cygwin 安装期间，安装程序将提示用户是否安装其他软件，请确保从“Devel”类别中选择 make 的 GNU 版本（请参见下图），然后选择最新版本。

Cygwin Setup - Select Packages

Select packages to install

View Category Search make Clear

Package	Current	New	Src?	Categories	Size	Description
All		Default				
Archive (1)		Default				
Debug (6)		Default				
Devel (27)		Default				
automake		Skip		Devel	3k	Wrapper for multiple versions of Automake
automake1.10		Skip		Devel	689k	(1.10) a tool for generating GNU-compliant Makefiles
automake1.11		Skip		Devel	836k	(1.11) a tool for generating GNU-compliant Makefiles
automake1.12		Skip		Devel	706k	(1.12) a tool for generating GNU-compliant Makefiles
automake1.13		Skip		Devel	749k	(1.13) a tool for generating GNU-compliant Makefiles
automake1.14		Skip		Devel	773k	(1.14) a tool for generating GNU-compliant Makefiles
automake1.15		Skip		Devel	598k	(1.15) a tool for generating GNU-compliant Makefiles
automake1.16		Skip		Devel	812k	(1.16) a tool for generating GNU-compliant Makefiles
automake1.4		Skip		Devel	248k	(1.4) a tool for generating GNU-compliant Makefiles
automake1.5		Skip		Devel	332k	(1.5) a tool for generating GNU-compliant Makefiles
automake1.6		Skip		Devel	365k	(1.6) a tool for generating GNU-compliant Makefiles
automake1.7		Skip		Devel	426k	(1.7) a tool for generating GNU-compliant Makefiles
automake1.8		Skip		Devel	499k	(1.8) a tool for generating GNU-compliant Makefiles
automake1.9		Skip		Devel	557k	(1.9) a tool for generating GNU-compliant Makefiles
cmake		Skip		Devel	6,111k	Cross-platform makefile generation system
cmake-doc		Skip		Devel	1,723k	Cross-platform makefile generation system (documentation)
cmake-gui		Skip		Devel	1,753k	Cross-platform makefile generation system (GUI)
extra-cmake-modules		Skip		Devel	281k	Extra CMake Modules for KDE
gcc-tools-epoch1-automake		Skip		Devel	420k	(gcc-special) a tool for generating GNU-compliant Makefiles
gcc-tools-epoch2-automake		Skip		Devel	589k	(gcc-special) a tool for generating GNU-compliant Makefiles
gccmakedep		Skip		Devel	6k	X Makefile dependency tool for GCC
imake		Skip		Devel	35k	X Imake legacy build system
make	4.3-1	Keep		Devel	502k	The GNU version of the 'make' utility
makedepend		Skip		Devel	29k	X Makefile dependency tool
mingw64-i686-q4-qmake		Skip		Devel	7,292k	Q4 development tools for Win32 toolchain
mingw64-x86_64-q4-qmake		Skip		Devel	7,290k	Q4 development tools for Win64 toolchain
psl-make-dafsa		Skip		Devel	8k	Generates optimized DAFSA from Public Suffix List

另外，在固件编译过程中需要 Python3，因此请确保从其官方网站下载最新的 Python3，并在安装过程中要求时将其添加为环境变量。

Linux 环境

对于 Linux 用户，请使用 apt-get 安装命令安装您选择的串行终端软件。在这里，我们建议使用 picocom。

对于有兴趣在 C 语言中开发 MicroPython 模块的用户，请确保安装了至少 3.82 或更高版本的 GNU make 软件以及 Python3。


2.1.2 将固件上传到 Ameba

步骤 1: 找到 “Release” 活页夹

从 [GitHub](#) 下载 MicroPython repository 后，会在根目录中看到一个 “Release” 活页夹，并且在该路径下找到一个名为 “Double-Click-Me-to-Upload” 的工具。

步骤 2: 进入 UART 下载模式

请先按住 UART_DOWNLOAD 按钮，然后按 RESET 按钮。如果成功，您应该在 Ameba 上看到绿色的 LED 闪烁。

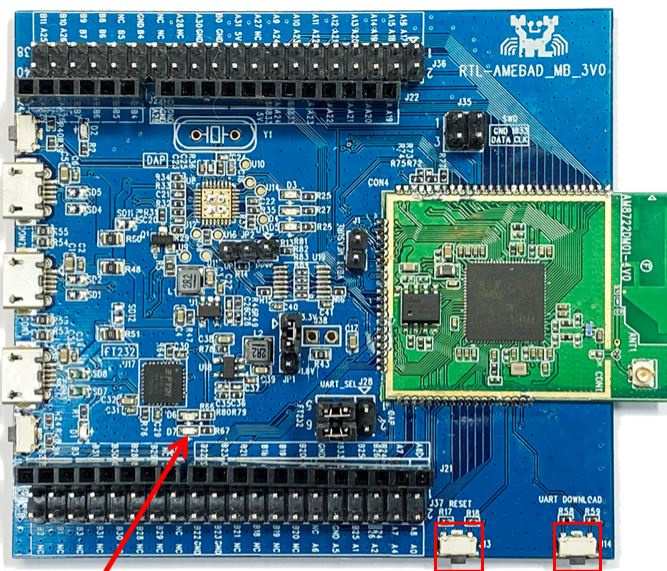

Green LED

RESET button

UART_DOWNLOAD button


步骤 3: 运行 “Double-Click-Me-to-Upload”

顾名思义，双击该文件以运行它，然后按照屏幕上显示的说明更新 Ameba 的串行 COM 端口，这样上传就可以成功进行。上传成功后，您将在屏幕上看到一行日志-“All images are sent successfully”。

2.1.3 尝试第一个范例


步骤 1: 打开 REPL

REPL 代表读取 (Read)，评估 (Evaluation)，打印 (Print) 和循环 (Loop)，它是 MicroPython 的终端，供用户控制微控制器

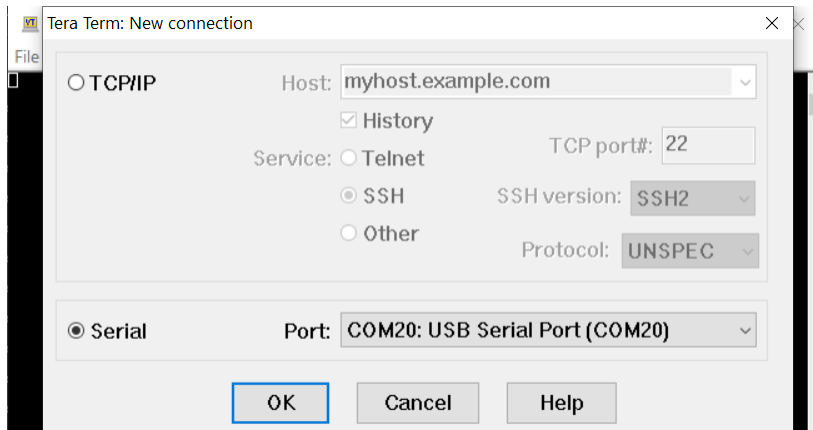

打开 Tera Term 后，如上图所示选择“Serial”，然后使用下拉列表选择 Ameba 的串行端口，然后单击“OK”。如果您的串行终端未配置为 115200 波特率，建议将 115200 设定为默认设置。

现在已经连接了串行端口，在 Ameba 上单击 RESET 按钮，如下所示会看到 MicroPython 的欢迎页面。

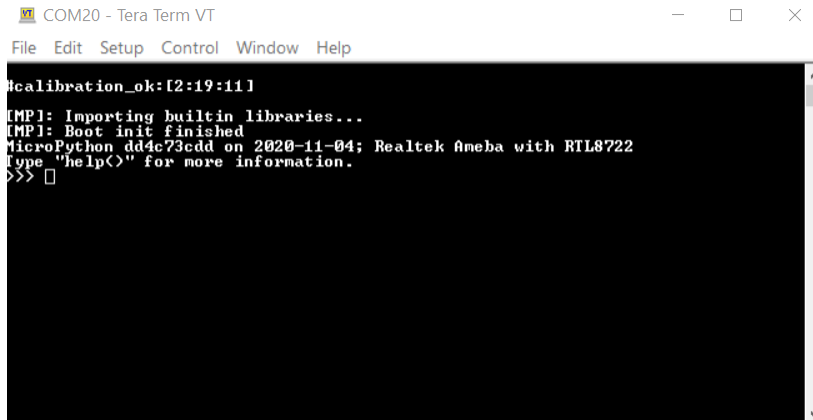

过程为 Ameba 首先检查其校准数据，然后启动 MicroPython 的固件，接着再运行 `boot.py` Python 脚本和导入的内建 python 库。

现在试着输入

```
>>> help()
```

查看更多信息，然后输入

```
>>> help(modules)
```

检查所有现成可用的 python 库。


步骤 2: 执行 WiFi 扫描范例

由于大多数外围设备的范例都需要额外的硬件才能显示该范例是否正常运行，因此我们将仅以 WiFi 扫描范例为例，来了解使用 MicroPython 控制 WiFi 是十分容易的。

现在，请复制并贴上以下代码，或手动将其输入 Tera Term，然后按“Enter”。

```
from wireless import WLAN
wifi = WLAN(mode = WLAN.STA)
wifi.scan()
```

您应该能够看到返回周围无线网络的结果

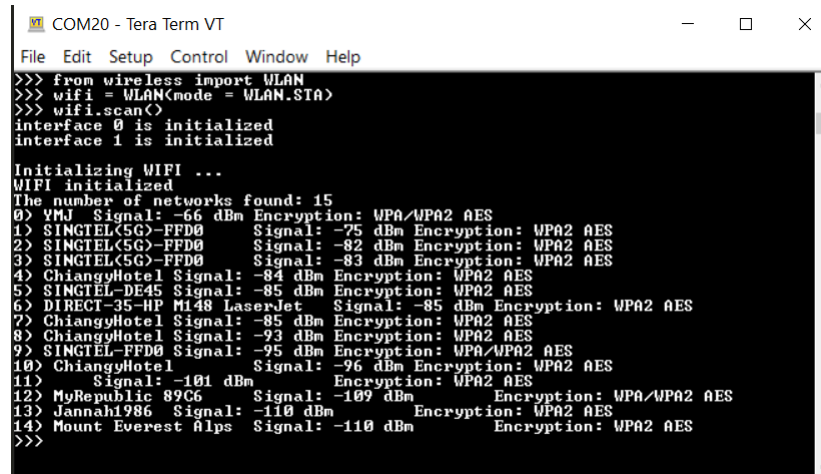

```
COM20 - Tera Term VT
File Edit Setup Control Window Help
>>> from wireless import WLAN
>>> wifi = WLAN(mode = WLAN.STA)
>>> wifi.scan()
interface 0 is initialized
interface 1 is initialized
Initializing WIFI ...
WIFI initialized
The number of networks found: 15
0> VNJ Signal: -66 dBm Encryption: WPA/WPA2 AES
1> SINGTEL(SC)-FFD0 Signal: -75 dBm Encryption: WPA2 AES
2> SINGTEL(SC)-FFD0 Signal: -82 dBm Encryption: WPA2 AES
3> SINGTEL(SC)-FFD0 Signal: -83 dBm Encryption: WPA2 AES
4> ChiangyHotel Signal: -84 dBm Encryption: WPA2 AES
5> SINGTEL-DE45 Signal: -85 dBm Encryption: WPA2 AES
6> DIRECT-35-HP M148 LaserJet Signal: -85 dBm Encryption: WPA2 AES
7> ChiangyHotel Signal: -85 dBm Encryption: WPA2 AES
8> ChiangyHotel Signal: -93 dBm Encryption: WPA2 AES
9> SINGTEL-FFD0 Signal: -95 dBm Encryption: WPA/WPA2 AES
10> ChiangyHotel Signal: -96 dBm Encryption: WPA2 AES
11> Signal: -101 dBm Encryption: WPA2 AES
12> MyRepublic 89C6 Signal: -109 dBm Encryption: WPA/WPA2 AES
13> Jannah1986 Signal: -110 dBm Encryption: WPA2 AES
14> Mount Everest Alps Signal: -110 dBm Encryption: WPA2 AES
>>>
```

(完结)

注解：如果遇到任何问题请参考[常见问题](#)和[故障排除](#)页面。

2.2 资源下载

2.2.1 版本记录

版本 1.0.2 release - 2021/10/14

- 特征
 - 添加 MacOS 工具链以支持在 MacOS 上构建
 - RTL8722DM MINI 的预测试通过

- API 更新
 - 使用新的 API 更新 PWM 模块
 - 重新构建 SDFS 模块，并在没有 SD 卡时删除警告
 - 其他
 - 更新无线局域网和其他库
 - 更新 readme 文档
-

版本 1.0.1 release - 2021/06/07

- 特征
 - 添加了对固件上传（非编译）的 MacOS 支持
 - 修复了循环的 PWM API 问题
 - Implemented SDFS (SD FileSystem) module [Currently only support RTL8722DM_mini]
 - 更新欢迎消息和说明消息
 - 更新 Ameba SDK 和库
 - 固定网络和 WLAN 安全问题
 - 修复与 WiFi 相关的错误
 - 更新 readme 文档
 - 修复与 WiFi 相关的错误
-

版本 1.0.0 release - 2020/11/11

- 特征
 - OS Support Windows and Linux
 - WiFi
 - Socket
 - ADC
 - 内置说明
 - 修复与 WiFi 相关的错误
-

版本 0.0.1 alpha release - 2020/09/29

- 特征
 - 基本功能移植
-

- 实现 REPL 和基本终端功能
- 为 RTL8722 添加了引脚映射
- 添加了外设帮助程序模块：
 - GPIO
 - RTC
 - Time and Delay
 - PWM
 - Timer
 - UART
 - I2C
 - SPI

2.3 范例演示

2.3.1 外围硬件相关范例


[RTL8722CSM] [RTL8722DM] ADC - 读取电位器数值

材料准备

- Ameba x 1
- 电位器 x 1

范例说明

这里我们把 ameba 连接到一个电位器上来读取它的数值，连接方式如下：

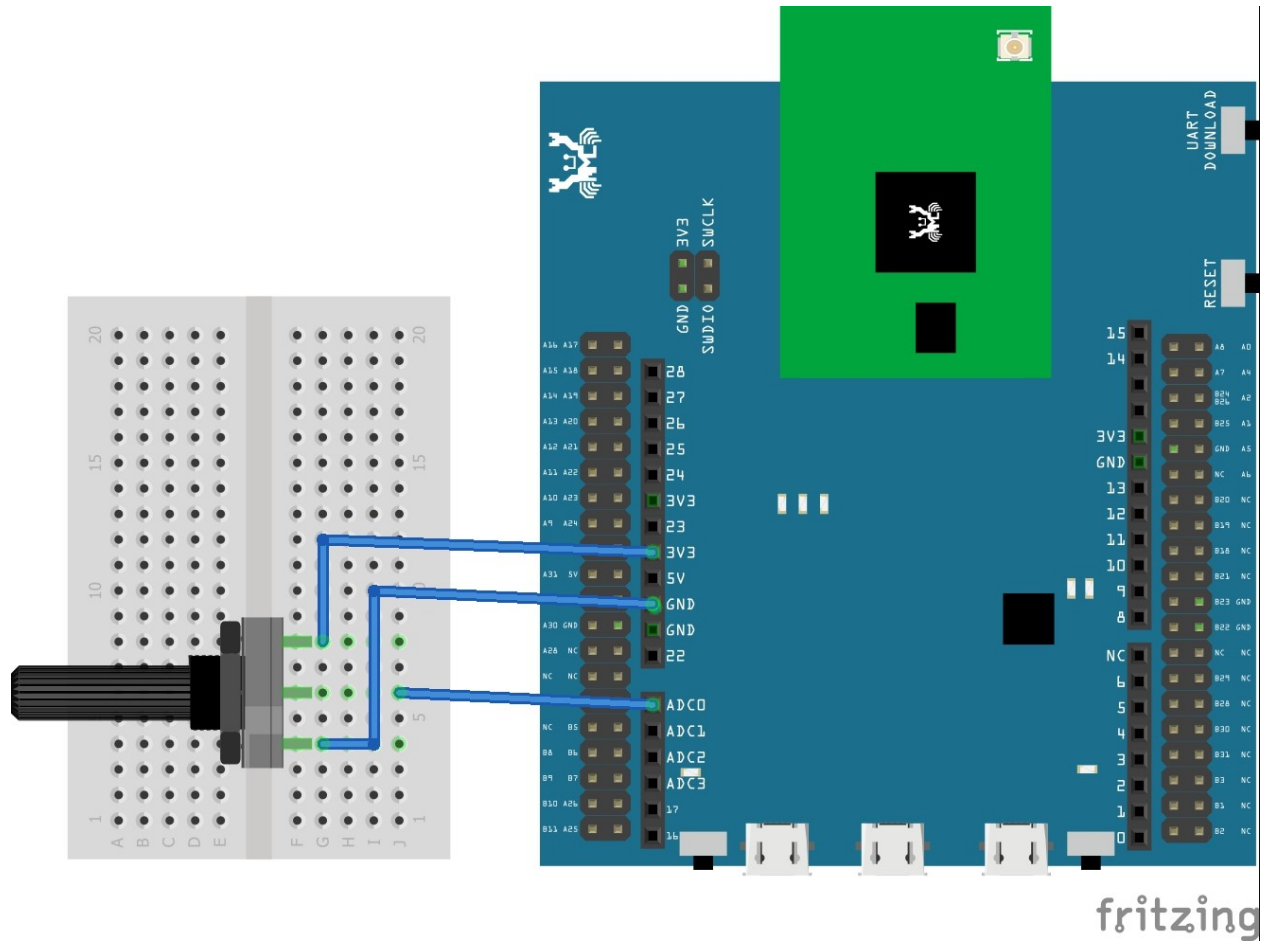

复制粘贴以下代码到 REPL 上

```
1 import socket
2 a = ADC(0)
3 a.read()
```

[RTL8722CSM] [RTL8722DM] GPIO - 闪烁 LED

材料准备

- Ameba x 1
- LED x 1
- 电阻（阻值 200 欧姆）x 1

范例说明

闪烁 LED 是开始了解并使用 MicroPython 最好示例。

首先，如下图所示将 PB_22 引脚连接到与限流电阻串联的 LED 的阳极引脚，再将 GND 连接到 LED 的阴极引脚：



```
from machine import Pin
a = Pin("PB_22", Pin.OUT)
a.value(1)
time.sleep_ms(500)
a.value(0)
time.sleep_ms(500)
a.on()
time.sleep_ms(500)
a.off()
time.sleep_ms(500)
a.toggle()
time.sleep_ms(500)
a.toggle()
```

材料准备

- ## 范例说明

I2C 是一个微控制器上非常常见的模块，它只需要两根线就可以实现最大 3.4Mbps 的传输速度。它使用主从模式，一个主机可以同时连接最多 128 个从机，因此经常用在微控制器与传感器之间的数据传输。


这里我们使用 ameba 作为主机来连接从机 Arduino UNO，来验证 I2C 的发送和接受。

在连接之前，请先将以下代码上传到 Arduino UNO 中 “Examples -> Wire -> Slave_receiver”

接下来，请按以下所示来连接，此处我们选择 PA_26 作为 SDA 引脚，PA_25 作为 SCL。

注解： 目前仅支持一组 I2C 在 MicroPython 上使用，引脚如下

编号	SDA	SCL
0	PA_26	PA_25

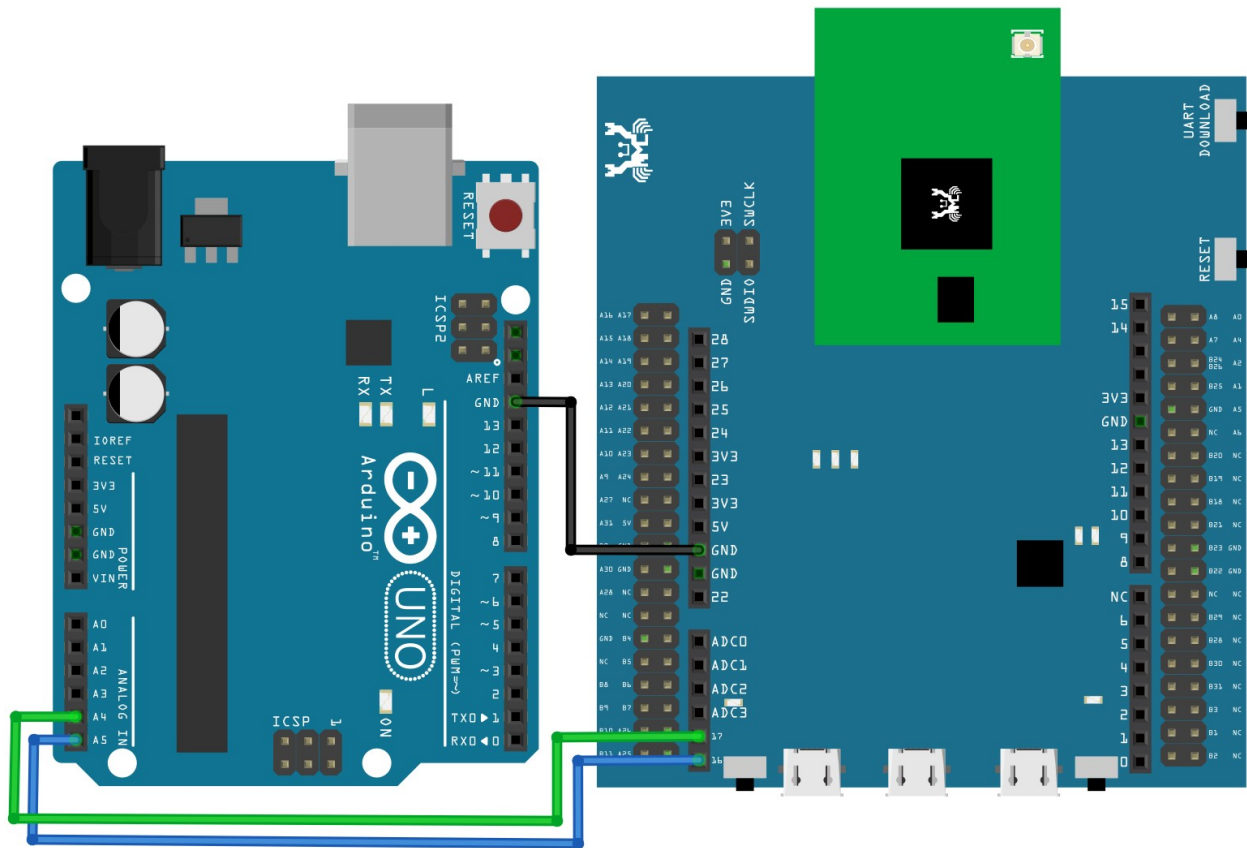

请一行接一行地复制粘贴以下代码到 REPL 上，来观察代码效果。

```

1 from machine import Pin, I2C
2 i2c = I2C(scl = "PA_25", sda = "PA_26", freq=100000) # configure I2C with pins and
  ↳freq. of 100KHz
3 i2c.scan()
```

(下页继续)

(续上页)

```

4 i2c.writeto(8, 123) # send 1 byte to slave with address 8
5 i2c.readfrom(8, 6) # receive 6 bytes from slave

```

[RTL8722CSM] [RTL8722DM] PWM - LED 渐变


材料准备

- Ameba x 1
- LED x 1
- 电阻 (220 欧姆) x 1

范例说明

PWM 脉宽调变控制输出脉波周期来实现对 LED 亮度和马达的控制。下面是我们用 LED 来展示 PWM 是如何来实做的。

连接 PA_26 至 LED 的正极和电阻串联在一起, 然后 GND 接至 LED 负极。如图所示

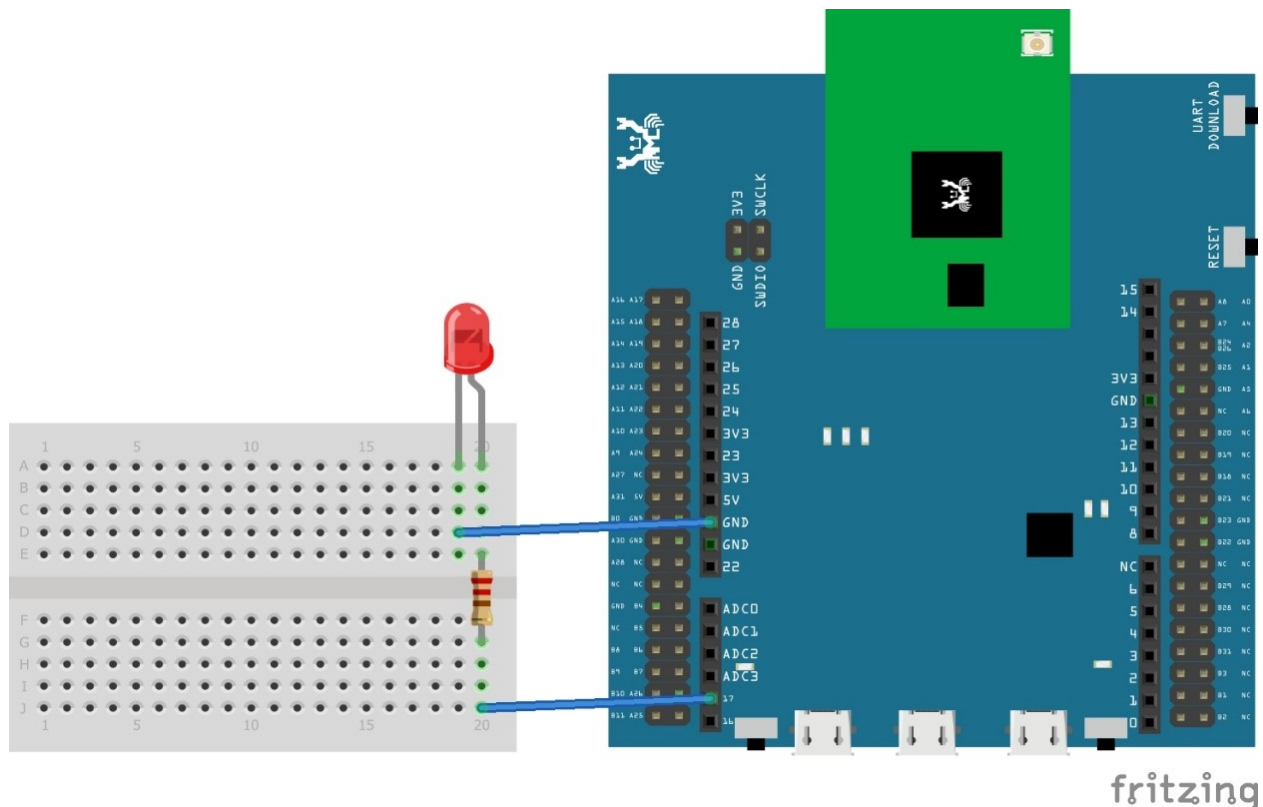

然后, 逐行复制下面的代码去 REPL 并观察结果, LED 会慢慢的渐变明亮。

```

1 from machine import Pin, PWM
2 import time

```

(下页继续)

(续上页)

```
3 p = PWM(pin = "PA_26")
4 # 0 duty cycle thus output 0
5 p.write(0.0)
6 # 10% duty cycle
7 p.write(0.1)
8 # 50% duty cycle
9 p.write(0.5)
10 # 100% duty cycle
11 p.write(1.0)
```

[RTL8722CSM] [RTL8722DM] RTC -时间显示

材料准备

- Ameba x 1

范例说明

RTC 模块会帮助微控制器来追踪时间，是时间模块必须的一部分。我们在这里有一个示例，来展示如何来得到本地时间和上传时间。

复制下面的代码贴至 REPL，观察结果。

```
1 rtc = RTC()
2 rtc.datetime() # get date and time
3 rtc.datetime((2020, 12, 31, 4, 23, 58, 59, 0)) # set a specific date and time (year, ↵
↵month, day, weekday(0 for Monday), hour, minute, second, total seconds)
4 rtc.datetime() # check the updated date and time
```

[RTL8722CSM] [RTL8722DM] Socket - Echo 服务器与客户端


材料准备

- Ameba x 2

范例说明

WiFi 连接完成后即可使用 Socket 来使用网络。Socket 就像一个假想的以太网接口，你可以用它把你的 PC 连接到互联网上的服务器上，比如 Google 或 Github。

即使是像 HTTP 这样的应用层协议也是建立在 socket 之上的。一旦给定了 IP 地址和端口号，就可以自由地连接到远程设备并与其进行通信。连接流程如下图所示。

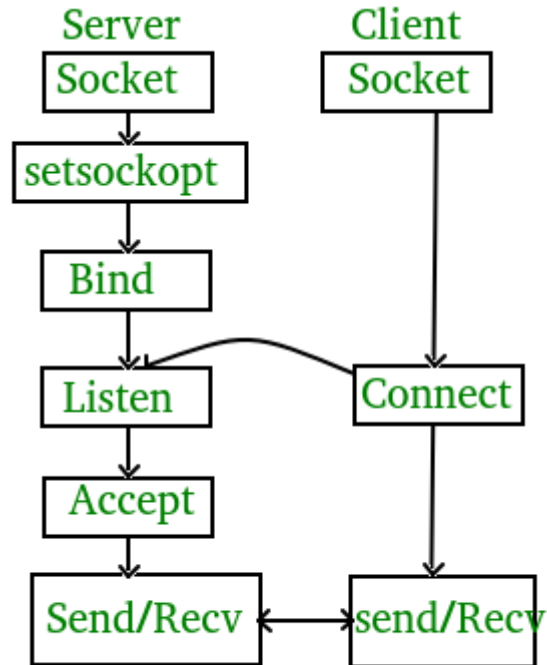

下面是一个使用服务器 socket 和客户端 socket 互相传送消息的范例，要使用这个范例，您需要两个 ameba RTL8722 来运行 MicroPython，在 REPL 的 paste 模式下分别将下面的代码复制并粘贴到两个 Ameba 设备中。

以下是 服务器代码

```

1  import socket
2  from wireless import WLAN
3  wifi = WLAN(mode = WLAN.STA)
4  wifi.connect(ssid = "YourWiFiSSID", pswd = "YourWiFiPassword") # change the ssid and
   ↳pswd to yours
5  s = socket.SOCK()
6  port = 5000
7  s.bind(port)
8  s.listen()
9  conn, addr = s.accept()
10 while True:
11     data = conn.recv(1024)
12     conn.send(data+"from server")

```

以下是 客户端代码

```

1  import socket
2  from wireless import WLAN
3  wifi = WLAN(mode = WLAN.STA)
4  wifi.connect(ssid = "YourWiFiSSID", pswd = "YourWiFiPassword") # change the ssid and
   ↳pswd to yours

```

(下页继续)

(续上页)

```
5 c = socket.SOCK()
6 # make sure to check the server IP address and update in the next line of code
7 c.connect("your server IP address", 5000)
8 c.send("hello world")
9 data = c.recv(1024)
10 print(data)
```

[RTL8722CSM] [RTL8722DM] Socket - 从 HTTP 网站获取信息

材料准备

- Ameba x 1

范例说明

创建 socket 后，我们可以访问 HTTP 网站并从中获取信息。

在粘贴模式下，将以下代码复制并粘贴到 REPL 中。

```
1 import socket
2 from wireless import WLAN
3 wifi = WLAN(mode = WLAN.STA)
4 wifi.connect(ssid = "YourWiFiSSID", pswd = "YourPassword") # change the ssid and pswd
   ↳ to yours
5 def http_get(url):
6     _, _, host, path = url.split('/', 3)
7     c = socket.SOCK()
8     # We are visiting MicroPython official website's test page
9     c.connect(host, 80)
10    c.send(bytes('GET /%s HTTP/1.0\r\nHost: %s\r\n\r\n' % (path, host), 'utf8'))
11    while True:
12        data = c.recv(100)
13        if data:
14            print(str(data, 'utf8'), end='')
15        else:
16            break
17 http_get('http://micropython.org/ks/test.html')
```

[RTL8722CSM] [RTL8722DM] SPI - 作为从设备接收消息

材料准备

- Ameba x 1
- Arduino UNO x 1

范例说明

SPI 是一种快速且强大的通讯协议，并通常在微处理器中被用来接受传感器的数据或输出图像讯号。在这个示例中将示范 ameba 如何透过 MicroPython 以从属模式接收数据。


在通讯连接建立之前，需要先将以下代码刻录到 Arduino UNO。

```

1  //////////////////////////////////////////////////
2  // SPI Master Write //
3  //////////////////////////////////////////////////
4  #include <SPI.h>
5  void setup (void) {
6      Serial.begin(115200); //set baud rate to 115200 for usart
7      digitalWrite(SS, HIGH); // disable Slave Select
8      SPI.begin ();
9  }
10 void loop (void) {
11     char c;
12     digitalWrite(SS, LOW); // enable Slave Select
13     // send test string
14     for (const char * p = "Hello, world!\r" ; c = *p; p++) {
15         SPI.transfer(c);
16         Serial.print(c);
17     }
18     Serial.println();
19     digitalWrite(SS, HIGH); // disable Slave Select
20     delay(2000);
21 }

```

Arduino UNO 将以如下图所示的连接方式和 Ameba 连接，我们使用第“0”组 SPI 作为从机，并将 Arduino UNO 当作 SPI 的主机。

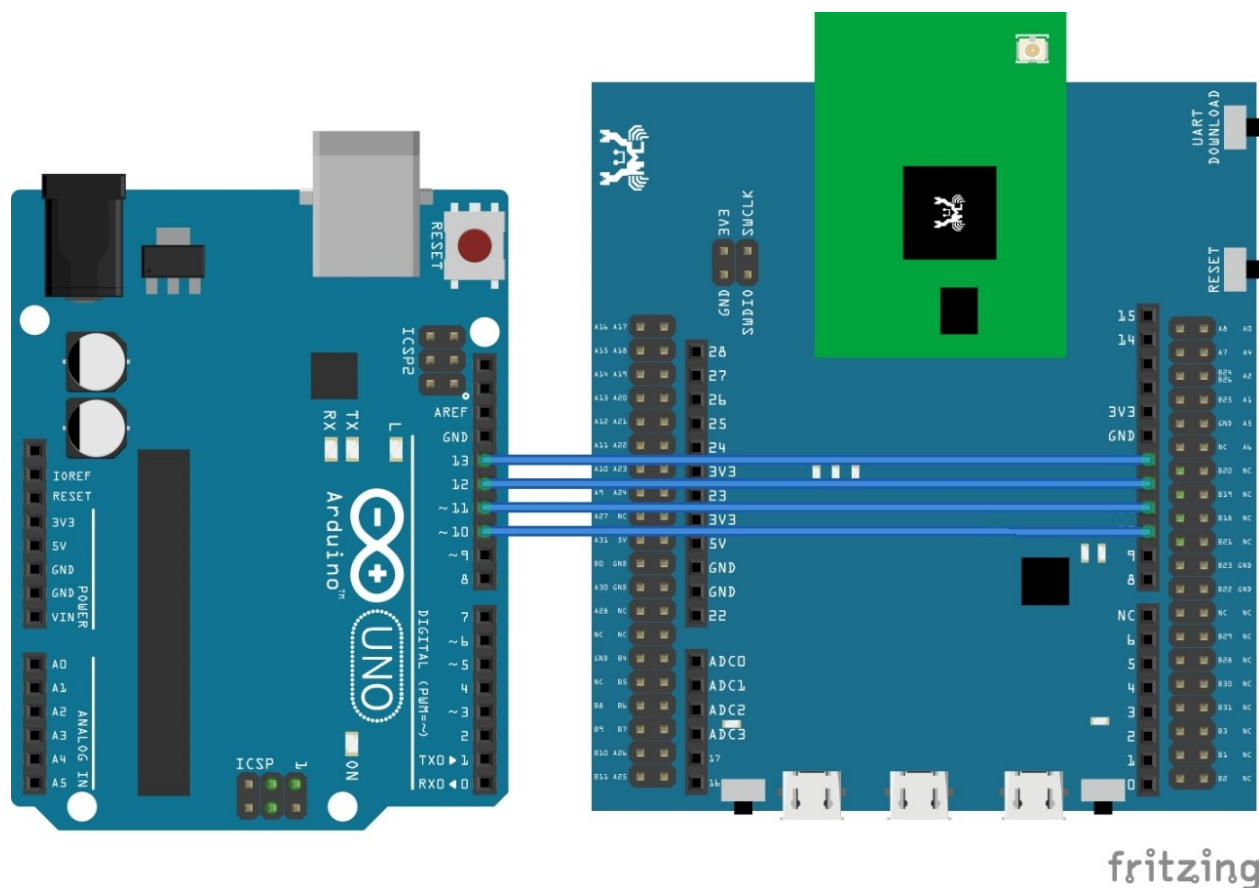

然后复制以下代码并粘贴到 REPL 的粘贴模式窗口，并等待代码生效。

```
1 from machine import SPI
2 s1= SPI(0 , mode = SPI.SLAVE)
3 for i in range(14):
4 chr(s1.read())
```

[RTL8722CSM] [RTL8722DM] Time - 延迟和计时

材料准备

- Ameba x 1

范例说明

MicroPython 提供了很多函数来处理延迟和计时，以下是一些示例。

复制下面的代码至 REP 来观察结果。

```
1 import time
2 time.sleep(1) # sleep for 1 second
3 time.sleep_ms(500) # sleep for 500 milliseconds
```

(下页继续)

(续上页)

```

4 time.sleep_us(10) # sleep for 10 microseconds
5 start = time.ticks_ms() # get millisecond counter

```

[RTL8722CSM] [RTL8722DM] Timer - 周期性定时器

材料准备

- Ameba x 1

范例说明

这里有 3 个定时器可以使用, 全部是 32kHz, 分别是定时器 1/2/3。我们使用定时器 1 来示范一个周期性定时器是怎样工作的。

复制下面最初的 3 行代码至 REPL 来查看结果。

```

1 from machine import Timer
2 t = Timer(1) # Use Timer 1/2/3 only
3 t.start(2000000, t.PERIODICAL) # Set GTimer fired periodically at duration of 2_
  ↳seconds, printing text on the terminal
4 # To stop the periodical timer, type
5 t.stop()

```

一段显示信息为 -timer triggered. to stop: type t.stop()-的 log 将在终端中每隔 2 秒显示一次

请使用 “t.stop()”指令停止定时器计时。

[RTL8722CSM] [RTL8722DM] UART - 发送和接收

材料准备

- Ameba x 1
- USB 转 TTL 串行模块 x 1

范例说明


UART 是一种非常通用的通信协议, 是微控制器的一个重要组成部分。USB 转 TTL 串行传输模块是一种可以将 UART 信号转换为 USB 信号的集成电路, 以便我们可以在 PC 上看到 UART 日志。该模块经常用于包括 Ameba 在内的许多开发板上。但是, 该模块在 Ameba 上的功能被保留用于 LOG UART 和固件上传, 所以我们需要其他独立模块在 Ameba 和 PC 之间进行通信。

当前有 2 组 UART 引脚供 MicroPython 用户使用, 它们分别是

Unit	传输引脚	接收引脚
0	PA_21	PA_22
3	PA_26	PA_25

在此示例中，我们使用第“0”组 UART 引脚来示范 UART 在 Ameba 上的工作方式。

如下图所示，将 USB 转 TTL 串行传输模块连接到引脚 PA_21 和 PA_22

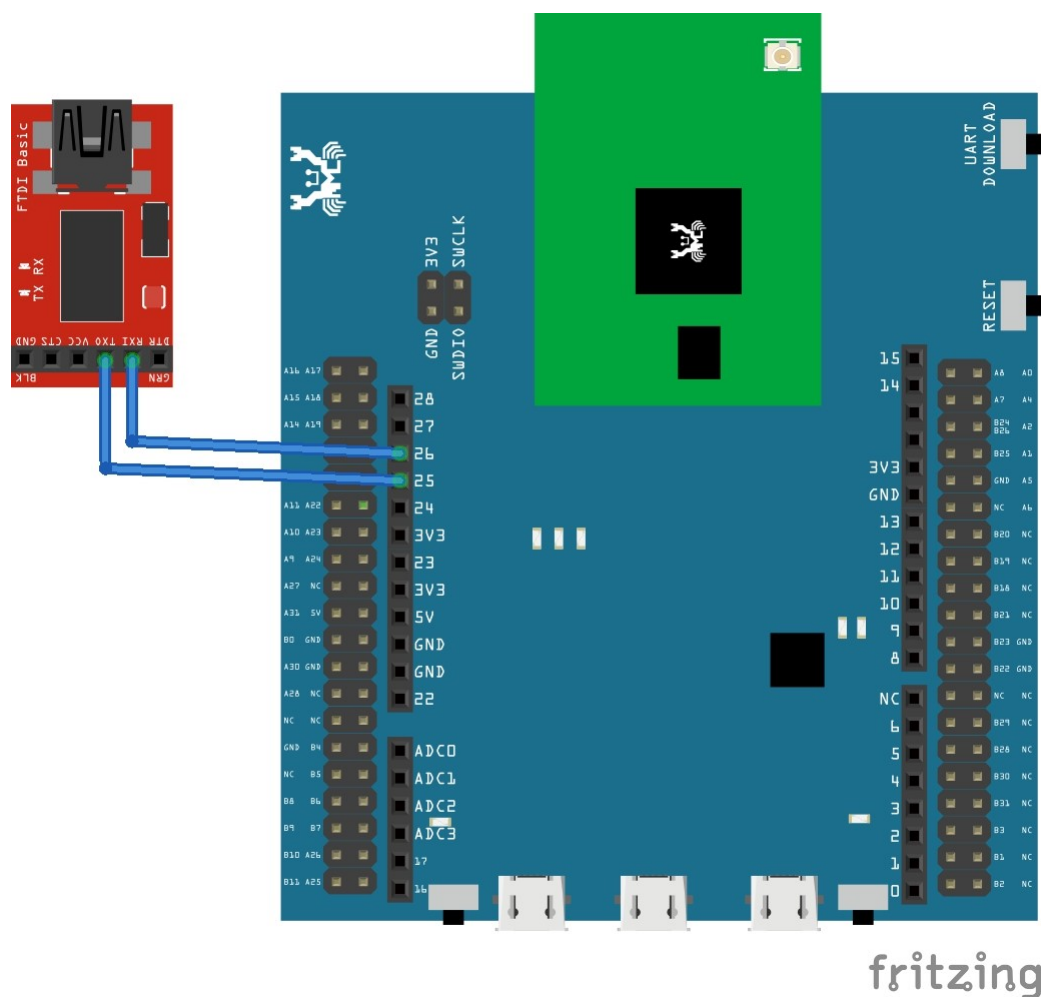

然后，将以下代码逐行复制并粘贴到 REPL 中，以查看其效果。

```

1 from machine import UART
2 uart = UART(tx="PA_21", rx="PA_22")
3 uart.init()
4 uart.write('hello')
5 uart.read(5) # read up to 5 bytes

```

[RTL8722DM_MINI] SDFS 数据编辑

材料准备

- Ameba RTL8722DM_MINI x 1
- MicroSD 卡 x 1 (SD 卡必须 < 32GB, 格式设置为 fatfs)

范例说明

SD 文件系统模块支持 SD 卡数据操作。可以随时控制和查看文件，并将它们保存在非挥发性内存中。

将以下代码逐行复制粘贴到 REPL 中来使用。

```

1 from machine import SDFS
2 s=SDFS()           # create a short form
3 s.create("ameba.txt") # create a file named "ameba.txt"
4 s.write("ameba.txt", "ameba supports sd card file system!") # write a string to the
  ↳file just created
5 s.read("ameba.txt")  # read the content from the same file
6 s.rm("ameba.txt")    # delete the file

```

注解： 不需要打开或关闭文件，API 会自动为您完成。

[RTL8722DM_MINI] SDFS - 目录操作

材料准备

- Ameba RTL8722DM_MINI x 1
- MicroSD 卡 x 1 (SD 卡必须 < 32GB, 格式设置为 fatfs)

范例说明

MicroPython RTL8722 通过从 machine 导入 SDFS 模块来支持 SD 文件系统。该模块是一个简化的文件系统，主要着重于 SD 卡操作，因此它不支持虚拟文件系统。

将以下代码逐行复制粘贴到 REPL 中来使用。

```

1 from machine import SDFS
2 s=SDFS()           # create an instance and mount on file system on SD card
3 s.listdir()        # listing the files and folders under current path
4 s.mkdir("test")    # create a folder named "test" under current path
5 s.chdir("test")    # change directory to test folder
6 s.pwd()            # print out present working directory(current path)
7 s.chdir("/")       # change directory bach to root directory
8 s.rm("test")       # delete the test folder

```

注解: 不需要打开或关闭文件, API 会自动为您完成。

2.3.2 网络相关范例

[RTL8722CSM] [RTL8722DM] WiFi - WiFi 连接

材料准备

- Ameba x 1

范例说明

Ameba 可以使用开放安全性或 WPA2 安全类型连接到 WiFi 接入点, WPA2 安全类型是家用无线路由器中最常用的安全类型。

在这里我们将使用下面的代码连接到 WiFi 接入点, 将以下代码逐行复制并粘贴到 REPL 中, 以查看其作用。

```
1 from wireless import WLAN
2 wifi = WLAN(mode = WLAN.STA)
3 wifi.connect(ssid = "YourWiFiName", pswd = "YourWiFiPassword")
```

[RTL8722CSM] [RTL8722DM] WiFi - WiFi 扫描

材料准备

- Ameba x 1

范例说明

WiFi 扫描功能可以帮助我们快速发现周围有哪些 WiFi 网络。

该范例不需要任何其他硬件, 因此只需复制以下代码并将其粘贴到 REPL 中即可查看其作用。

```
1 from wireless import WLAN
2 wifi = WLAN(mode = WLAN.STA)
3 wifi.scan()
```

2.4 开发板 HDK

2.4.1 开发板

- **HDK-AMEBAD_MB_4V2**
 - Layout
 - Schematic
-

- **HDK-AMEBAD_MB_4V0**
 - Layout
 - Schematic
-

2.4.2 RTL8722DM 模块

- **HDK-AM8722DM01_6V2_WI LPF**
 - Layout
 - Schematic
-

- **HDK-AM8722DM01_6V1_WI LPF**
 - Layout
 - Schematic
-

- **HDK-AM8722DM01_4V1**
 - Layout
 - Schematic
-

2.5 API 文档

RTL8722DM MicroPython 线上 API 文档

2.5.1 ADC

API 文档

构造函数

ADC(*unit* [必填])

以所给的组号来创建一个 ADC 对象，这样就可以从所对应的引脚上读取数值。

- *unit*: 组号，每个组号对应一个引脚。请查[图](#)表来[解](#)更多。

Unit	Pin
0	PB_4
1	PB_5
2	PB_6
3	PB_7
4	PB_1
5	PB_2
6	PB_3

方法

ADC.read()

从引脚读取数值并返回该数值

2.5.2 I2C

API 文档

构造函数

I2C(*unit_id* [选填], “*sda_pin*” [必填], “*scl_pin*” [必填], *frequency* [选填])

创建一个 I2C 对象并关联其到所给的引脚上，使用给的参数来配置该对象。
如此便可在 I2C 上发送以及接收数据。

- *unit_id*: 硬件 I2C 的组号, 如不填则使用默认值
- “*sda_pin*”: SDA 引脚名

- "scl_pin": SCL 引脚名
- frequency: I2C 的运行频率, 如不填则使用默认值

注解: 所有选填参数的默认值如下

参数	Default
默认值	0
Frequency	100000 (Hz)

方法

I2C.reset()

该方法取消 I2C 设备的初始化.

I2C.scan()

该方法扫描并返回可用 I2C 地址.

I2C.readinto(buf[必填], flag[选填])

该方法读取 I2C 缓存器中的数据并存入用 flag 定义的缓存器中

- **buf**: 一个 string / array / byte array 类型的缓存器
- **flag**: 一个布尔标记, 如果是 True 则在数据末尾发送 NACK, 反则反之

I2C.write(buf[必填])

该方法发送已存在 buf 中的数据

- **buf**: 一个 string / array / byte array 类型的缓存器

I2C.readfrom(addr[必填], len[必填], stop[选填])

该方法从所给的地址上读取 len 长度的数据。如果 stop 值为真, 则在传输结尾发送 STOP 字节。

- **addr**: 读取的地址
- **len**: 要读取的数据长度

- **stop**: 布爾標記，若 True 則在傳輸結束發送 STOP 字節

I2C.readfrom_into(*addr*[必填], *buf*[必填], *stop*[選填])

該方法從所給的地址上讀取 *len* 長度的數據。如果 *stop* 值為真，則在傳輸結尾發送 STOP 字節。

- **addr**: 讀取的地址
- **buf**: 一個 string / array / byte array 類型的緩存器
- **stop**: 布爾標記，若 True 則在傳輸結束發送 STOP 字節

I2C.writeto(*addr*[必填], *value*[必填], *stop*[選填])

該方法發送一個整數數據到所給的地址上。如果 *stop* 值為真，則在傳輸結尾發送 STOP 字節。

- **addr**: 寫入的地址
- **value**: 要發送的整數數值
- **stop**: 布爾標記，若 True 則在傳輸結束發送 STOP 字節

2.5.3 Pin

API 文档

構造函數

Pin(“*pin_name*” [必填], *direction*[必填], *pull_mode*[選填], *value*[選填])

創建與給定的 GPIO 引腳名稱關聯的 Pin 對象，使用其他參數進行配置。然後，您可以在引腳上讀/寫數值。

- “*pin_name*”：引腳名稱，必須是字符串格式，可使用 `help(Pin.board)` 查看所有引腳的名稱
- 方向
 - `Pin.IN` - 輸入引腳
 - `Pin.OUT` - 輸出引腳
- 模式
 - `Pin.PULL_NONE` - 沒有上拉電阻或下拉電阻
 - `Pin.PULL_UP` - 啓用上拉電阻
 - `Pin.PULL_DOWN` - 啓用下拉電阻

- 默認值-Pin.PULL_NONE

- value: 初始值, 并且僅適用於輸出, 例如 value = 1。默認值 value = 0.

方法

Pin.id()

聲明 Pin 對象后, 使用此 method 將會返回所對應的 GPIO 引脚名稱

Pin.init("*pin_name*" [必填], *direction*[必填], *pull_mode*[選填], *value*[選填])

此方法與構造函數作用相同, 使用鍵入的參數創建和初始化 Pin 對象。

Pin.value(*number*[選填])

此方法有以下兩種用途,

1. 輸出 *number* 數值

number 的數值可以是 0 或者 1, 用來表示邏輯狀態的 0 或 1

2. 檢查當前引脚狀態

當有數值輸入時, 無論引脚配置方向, 此方法都會查看當前引脚的邏輯狀態 (0/1)

Pin.on()

此方法會向相應的引脚發送邏輯信號 1

Pin.off()

此方法會向相應的引脚發送邏輯信號 0

Pin.toggle()

該方法會切換相應引脚的邏輯信號

2.5.4 PWM

API 文档

构造函数

PWM(*unit*[選填], “*pin_name*” [必填])

使用預設的 *pin* 名字來創建一個 PWM 對象。可以向預設的 *pin* 來編寫 PWM 信號

- *unit*: PWM 的號碼, 如果沒有填寫預設是 0
- “*pin_name*”: *pin* 的名字, 此名字必須是 string 格式. 參考下列 PWM 支援的 pins

注解:

目前只有下列的引腳支援 PWM:

PA_23 , PA_24 , PA_25 , PA_26

方法

PWM.write(*dutycycle_float*[必填])

聲明 Pin 對象後, 此方法將返回關聯的 GPIO 引腳名稱。

- *dutycycle_float*: 浮點 duty cycle, 可以從 0.0 (0%) 到 1.0 (100%)

2.5.5 RTC

API 文档

构造函数

RTC()

創建一個 RTC 對象

方法

RTC.datetime(*array_8*[選填])

以下是該方法的兩種使用方法

- 如果`time`有輸入任何參數，會返還本地時間。
格式如下：
(年, 月, 日, 時, 分, 秒, 周 [0-6 表示`0`一到`6`日], 年 [1-366])。
- 如果是輸入一個 8 位數組的參數，會更新本地時間。格式和上面一致。

2.5.6 SDFS

API 文档

構造函数

SDFS()

Create a `sdfs` object and configure it to the given mode. This then allows you to navigate through the SD card and read/write files as you see.

注解: No parameter is required

Methods

`sdfs.listdir()`

This method listing the files and folders under current path.

`sdfs.mkdir("folder name" [required])`

This method attempts to create a folder under current path.

- **folder name:** the name of the new folder/directory you wish to create, it must be a string less than 128 characters

`sdfs.chdir("folder name" [required])`

This method change directory to the one given in the parameter.

- **folder name:** the name of the folder/directory you wish to navigate to, it must be a string less than 128 characters

注解: Key in “/” as the parameter to this API would navigate back to the root directory.

sdfs.pwd()

This method is to print out present working directory (current path).

sdfs.rm(“*folder name or file name*[required]”)

This method is to delete a file or a folder. Note that, the folder to be deleted has to be empty before it can be deleted successfully.

- **folder name or file name:** the name of the folder or file you wish to delete, it must be a string less than 128 characters

sdfs.create(“*file name*[required]”)

This method is to create a file.

- **file name:** The name of the file you wish to create.

sdfs.write(“*file name*[required]” , “*string*[required]”)

This method is to write your input as a string to a file specified.

- **file name:** The name of the file you wish to read.
- **string:** The data you wish to write.

sdfs.read(“*file name*[required]”)

This method is to read the content from a file.

- **file name:** The name of the file you wish to read.

2.5.7 Socket

API 文档

构造函数

socket.SOCK(*domain*[選填], *type*[選填])

創建一個 SOCK 對象，[☞](#)根據其他所給的參數來進行配置。SOCK 類是 socket 類的子集，我們主要使用 SOCK 類來完成 socket 相關的通訊連接。

- **domain**: 地址域類型. 默認為 AF_INET
 - AF_INET: IPv4, 常見的 IP 地址, 以點[☞](#)分隔符, 正在漸漸被 IPv6 取代
 - AF_INET6: IPv6, 以冒號[☞](#)分隔符的 IP 地址
- **type**: 類型, 默認為 SOCK_STREAM
 - SOCK_STREAM: TCP 類型
 - SOCK_DGRAM: UDP 類型

方法

socket.SOCK.connect(*host*[必填], *port*[必填])

該方法連接一個遠程的服務器

- **host**: 字串格式的服務器地址
- **port**: 整數格式的端口號

socket.SOCK.bind(*port*[必填])

這個方法創建一個服務器 socket, [☞](#)綁定到所指定的端口上

- **port**: 整數格式的端口號

socket.SOCK.listen()

這個方法將服務器 socket 設為 listen 模式, 等待客[☞](#)端的連接

socket.SOCK.accept()

這個方法接受一個客[☞](#)端的連接要求, 生成[☞](#)返回一個新的 socket 對象來進行之後的通信

socket.SOCK.recv(*length*[必填])

這個方法等待接收 *length* 長度的數據

- **length**: 預期接收的數據長度

socket.SOCK.send(*buffer*[必填])

這個方法將儲存在暫存器中的數據發送出去

- **buffer**: 一個 array/bytearray/string 類型的緩存器

socket.SOCK.settimeout(*seconds*[必填])

這個方法將 socket 的 timeout 時間設為 *seconds* 秒

- **seconds**: timeout 時間 (秒)

socket.SOCK.close()

這個方法關閉 socket

2.5.8 SPI

API 文档

構造函數

SPI(*unit_id*[必填], *baudrate*[選填], *polarity*[選填], *phase*[選填], *databits*[選填], *firstbit*[選填], *miso*[選填], *mosi*[選填], *sck*[選填], *mode*[選填])

創建 SPI 對象使用參數進行配置後，可以在 SPI bus 上讀寫數據。

- **unit_id**: 表示 SPI 硬件的 ID，如果保留空白，則用默認值
- **baudrate**: SPI 傳輸速度
- **polarity**: 固定 SPI 工作模式的變量 (不推薦使用)
- **phase**: 固定 SPI 工作模式的變量 (不推薦使用)
- **databits**: 數據字節數量
- **Firstbit**: 固定首字節是最高有效位 (MSB) 或最低有效位 (LSB)

- `miso``: miso 引脚 (不推荐使用)
- `mosi`: mosi 引脚 (不推荐使用)
- `sck`: clock 引脚 (不推荐使用)
- `mode`: 设定 MASTER 模式或是 SLAVE 模式

注解: 所有选项参数的初始值设定如下表所示:

参数	默认值
Baudrate	2000000 Hz
Polarity	Inactive_low
Phase	Toggle_middle
Databits	8
Firstbit	MSB
Miso	N.A.
Mosi	N.A.
Sck	N.A.
Mode	MASTER

目前 Ameba D 支援提供 2 对 SPI 供使用:

unit	MOSI	MISO	SCK	CS
0	PB_18	PB_19	PB_20	PB_21
1	PB_4	PB_5	PB_6	PB_7

注解: 上述所有 SPI 组号都支援主机模式 (Master), 但是仅有 第 0 组适用于从机模式.

方法

SPI.read()

此方法将等待返回从 SPI 缓存区读取的数据, 方法适用于主设备和从设备使用。

SPI.write(value[必填])

该方法将输入一个整数数值, 写入 SPI bus, 方法适用于主设备和从设备使用。

- **value**: 将写入 SPI bus 的一个整数数值

2.5.9 Time

API 文档

构造函数

N.A.

方法

time.sleep(*seconds*[必填])

此方法將會用既定的時間，延遲正在工作的微控制器。

- **seconds:** 秒數，必須是整數

time.sleep_ms(*milliseconds*[必填])

此方法將會用既定的時間，延遲正在工作的微控制器。

- **milliseconds:** 毫秒數，必須是整數

time.sleep_us(*microseconds*[必填])

此方法將會用既定的時間，延遲正在工作的微控制器。

- **microseconds:** 微秒數，必須是整數

time.time()

此方法將會返還一個秒數，此秒數是從 (1970-01-01) 開始計算。

time.localtime()

此方法將會返還 RTC 的本地時間。

(年, 月, 日, 時, 分, 秒, 周 [0-6] 一 到 日, 年 [1-366])。

time.mktime(*tuple*[必填])

此方法的功能相反於 `time.localtime()`。它的參數是一個按照 `time.localtime()` 來表達的完整 8 項元組。它會返還一個整數，此整數是從 2000 年一月一日到現在的秒數。

- **tuple**: 一個來表達的完整 8 項元組

time.ticks_ms()

此方法將會返還一個遞增的毫秒數，參考點可以任意時間。通常和 `ticks_add()`, `ticks_diff()` 一起使用。

time.ticks_add(starting_ticks[必填], ticks_added[必填])

This method add given number of ticks to the starting_ticks.

- **starting_ticks**: 從 `ticks_ms()` 拿到的毫秒數時間
- **ticks_added**: 要增加的 ticks

time.ticks_diff(end_ticks[必填], starting_ticks[必填])

此方法將會返還 `end_ticks` 時間和 `starting_ticks` 時間的差值。

- **end_ticks**: 從 `ticks_ms()` 拿到的毫秒數時間
- **starting_ticks**: 從 `ticks_ms()` 拿到的毫秒數時間

2.5.10 Timer

API 文档

構造函數

Timer(unit[選填])

用特定 ID 創建一個定時器對象

- **unit**: 可以是 1 / 2 / 3，對應定時器 1 / 2 / 3

方法

Timer.start(microseconds[必填], type[必填])

此方法將在給定的微秒時間啟動給定類型的定時器，無論是單次還是周期性的。

- **microseconds**: 微秒數間隔，必須是整數。

- **type**: 單次，或☐期性定時器。

Timer.deinit()

此方法將解除創建的定時器對象☐停止定時器。

Timer.stop()

此方法將停止定時器時鐘和其中斷 handler。

Timer.us ()

此方法將返還定時器的當前微秒 (us)。

Timer.tick ()

此方法將返還定時器的當前 ticks (0~32768)。

Timer.reload (duration_us[必填])

此方法將用時間長度 (us) 來重新設定定時器。

- **duration_us**: 時間長度，計量單位是微秒 us。

2.5.11 UART

API 文档

構造函數

UART(unit[選填], baudrate[選填], databits[選填], stopbit[選填], paritybit[選填], timeout[選填], tx_pin[必填], rx_pin[必填])

創建一個與給定的 TX 和 RX 引☐相關聯的 UART 對象，☐通過使用其他相關參數進行配置后，便可以在引☐上做讀寫。

- **unit**: 代表可使用 UART 引脚組的 ID，可輸入 0 或 3
- **baudrate**: 在 Ameba 上使用 115200
- **databits**: 數據字節的數量，通常為 7 到 8 個字節
- **stopbits**: 停止位的字節數量，通常為 1 字節，1.5 字節或 2 字節

- `paritybit`: 用於奇偶校驗，數值通常為 `none`（無），`odd`（奇）或 `even`（偶）
- `timeout`: 計算 UART 在超時（`timeout`）之前等待的時間（以毫秒為單位）
- `tx_pin`: 發送端引腳，通常與接受器的 RX 引腳連接
- `rx_pin`: 接收端引腳，通常與發送器的 TX 引腳連接

注解： 並非所有參數都是必需的，因此如果不填，MicroPython 將用其默認值，下表為所有選填參數的默認值

參數	默認值
Unit	0
Baudrate	115200
Databits	8
Stopbits	1
Paritybit	0
Timeout	10 (ms)

方法

UART.init()

使用此方法初始化 UART 配置

UART.read(*length*[選填])

此方法用於從 UART 緩存中讀取數據

- **length**: 接收數據的長度

UART.readline()

此方法功能類似於 `read()` 但每次會讀出一行內容

UART.write(*buffer*[*require*])

該方法將字節緩衝區發送到總線，並返回寫入的字節數。

- **buffer**: 字節緩存區，可以存放的數據類型有字符串類型，整型等其他類型。

UART.irq_enable(*bool*[選填])

此方法有兩種使用方式：

1. 當有傳入任何參數，該方法檢查 UART 中斷請求 (IRQ) 的狀態，如果用了 IRQ，它將返回 True；如果禁用 IRQ，則返回 False
2. 通過傳入 True/False 來啓用/禁用 UART IRQ 處理程序

UART.irq_handler(*function*[必填])

將 Python 處理函數傳遞給 UART 中斷請求，以便在發生 UART 事件時將其觸發。

- **function:** 在 Python 中定義的函數或 lambda 函數

2.5.12 WiFi

API 文档

Constructors

WLAN(*mode*[required])

創建一個 WLAN 對象，然後設定對應的模式，之後可以對 WiFi 進行控制和查看狀態。

- **mode:** WLAN.STA 是 station 模式

方法

WLAN.scan()

搜索和列出周圍所有的 WiFi 網路

WLAN.connect(*ssid*[required], *pswd*[optional], *security*[optional])

建立連接至 WiFi 網路

- **ssid:** WiFi 網路的名稱
- **pswd:** WiFi 網路的密碼
- **security:** WiFi 網路的安全協議

注解： 如果有填寫選填的參數，會使用下面的預設數值。

參數	默認值
pswd	NULL
security	WPA2_AES_PSK

注解：

如果連接 **OPEN** 的網路，可以忽視參數 `pswd`，
然後在 `ssid` 後面輸入 `security = WLAN.OPEN`。

WLAN.get_ip()

成功連接至 AP 後返還當前 WLAN 介面的 IP 地址。

WLAN.disconnect()

從當前連接的網路斷開連接，但是 WiFi 模組還在運行

WLAN.on()

This method turns on the WiFi device.

WLAN.off()

關閉 WiFi 且斷開所有連接

WLAN.wifi_is_running()

返還 WiFi 的狀態，WiFi 啟動後返還 `True`，WiFi 關閉返還 `False`

WLAN.is_connect_to_ap()

返還連接狀態，連接到 AP 後返還 `True`，如果有任何連接返還 `False`

2.6 相关资源

2.7 支援

2.7.1 常见问题

什么是 MicroPython 以及如何使用它？

有关更多信息，请参考 [MicroPython 官方网站](#)。

可以使用所有的 Python 标准函数库吗？

不可以，MicroPython 仅支持 Python 标准函数库的一小部分。但是可以通过将标准的 python 库移植到 MicroPython 来使用。

RTL8722CSM / RTL8722DM 上的所有引脚都可用吗？

不可以，那些标有“NC”的因未连接到任何引脚，因此无法使用。

RTL8722CSM 是否支持 5G WiFi？

否。仅 RTL8722DM 支持双频 2.4G + 5G WiFi。RTL8722CSM 仅支持单频段 2.4G WiFi。

如何进入下载模式？

按住 UART DOWNLOAD 按钮。然后按下 RESET 按钮并释放 UART DOWNLOAD 和 RESET 按钮。

2.7.2 故障排除

MicroPython 固件编译失败

在构建过程中，某些用户可能会遇到导致过程暂停的错误，这是由于缺少系统环境设置而导致的，可以通过以下方法进行修复。

1. 与 python 相关的错误

预设下，MicroPython 使用 *Python3* 运行 MicroPython kernal 的构建脚本，如果遇到与 python 相关的错误，可能是因为 *Python3* 档案相关路径未添加到系统环境变量中。

但是，如果已经添加了环境变量，但是构建依旧无法完成，则可以尝试

- 1) 重新启动计算机
- 2) 在终端上输入 “python”，如果显示的 python 是 *Python3*，则请添加
‘PYTHON = python’
 到 “port/rtl8722” 活页夹路径下 “Makefile” 的第二行

2. 与 MPY-CROSS 相关的错误

如果构建过程停止并显示错误为 mpy-cross，则需要执行以下步骤

- 1) 到 “MicroPython_RTL8722/mpy-cross” 活页夹下
- 2) 打开您的 Cygwin/Linux 终端，然后输入
‘make’
 等待 MicroPython Cross Compiler 的构建完成，然后应该可以修复错误

程序代码未按预期运行

尝试使用 **print()** 函数调试程序，并在 API 页面详细了解每个 API。

为什么不断从 REPL 收到 “syntax error”？

请注意 MicroPython 仅支持 **Python3** 语法

如何将 Python 脚本上传到 Ameba 开发板？

有 3 种方式将 Python 代码上传到 Ameba 开发板

1. 通过 REPL normal 模式

在一般的 REPL 模式下，您可以逐行粘贴代码到 REPL 上并按顺序执行它们，但是请注意，在使用条件检查或循环时（例如 “if” 或 “while”），代码将被自动缩排，不正确的缩排将导致脚本错误。

2. 通过 REPL paste 模式

在一般的 REPL 模式下，按 “Ctrl” + “e” 可以进入 paste 模式，paste 模式仅允许粘贴完整的程序代码，粘贴不完整的程序代码或编辑会导致语法错误。

3. 通过 mp_frozenmodules

将 python 脚本放入 “rtl8722” 路径下的 “mp_frozenmodules” 活页夹中，您的程序代码将被嵌入到 MicroPython 固件中并上传到 Ameba，接着您只需导入 python 脚本的名称即可使用它。

连接到 RTL8722CSM / RTL8722DM UART 后，为什么串行终端上没有输出结果？

RTL8722CSM / RTL8722DM 默认配置为 115200` baudrate, 请检查串行终端是否配置为 115200。

程序没有被下载到 RTL8722CSM / RTL8722DM 中？

请按照以下步骤正确下载:

1. 进入下载模式。进入下载模式时，开发板上的绿色 LED 会闪烁
 2. 下载固件时，开发板上的红色 LED 将闪烁
 3. 成功下载后，您将看到类似 “All images sent successfully” 的讯息
-

为什么有时 WiFi 信号较弱？

RTL8722CSM / RTL8722DM 的天线默认是使用 I-Pex 接口。请更换/连接 I-Pex 接口的天线。

为什么我的开发板无法上电？

请确保已连接电阻 R43 旁的 connector J38。该连接器用于将电源链接到 IC。

遇到开发板连接到计算机的驱动程序问题？

请参考下列 USB 驱动程序 <https://ftdichip.com/drivers/>。

欢迎来到瑞昱标准 SDK 线上文档

Ameba RTL8722DM (AMB 21)



3.1 入门指南


3.1.1 GCC 开发环境的设置


在 Windows 上，可以将 Cygwin 用作 GCC 开发环境。Cygwin 是 GNU 和开源工具的集合，类似于提供 Linux 相关的功能在 Windows 平台上使用。

Click <http://cygwin.com/> and download the Cygwin package [setup-x86.exe](#) for your Windows platform.

1. 32 位 Windows 和 64 位 Windows 均支持 32 位 Cygwin。

2. 安装 Cygwin package 过程中, 如下图所示在 Select Packages 页面中选择 **Devel -> make** 与 **Math -> bc** 功能。

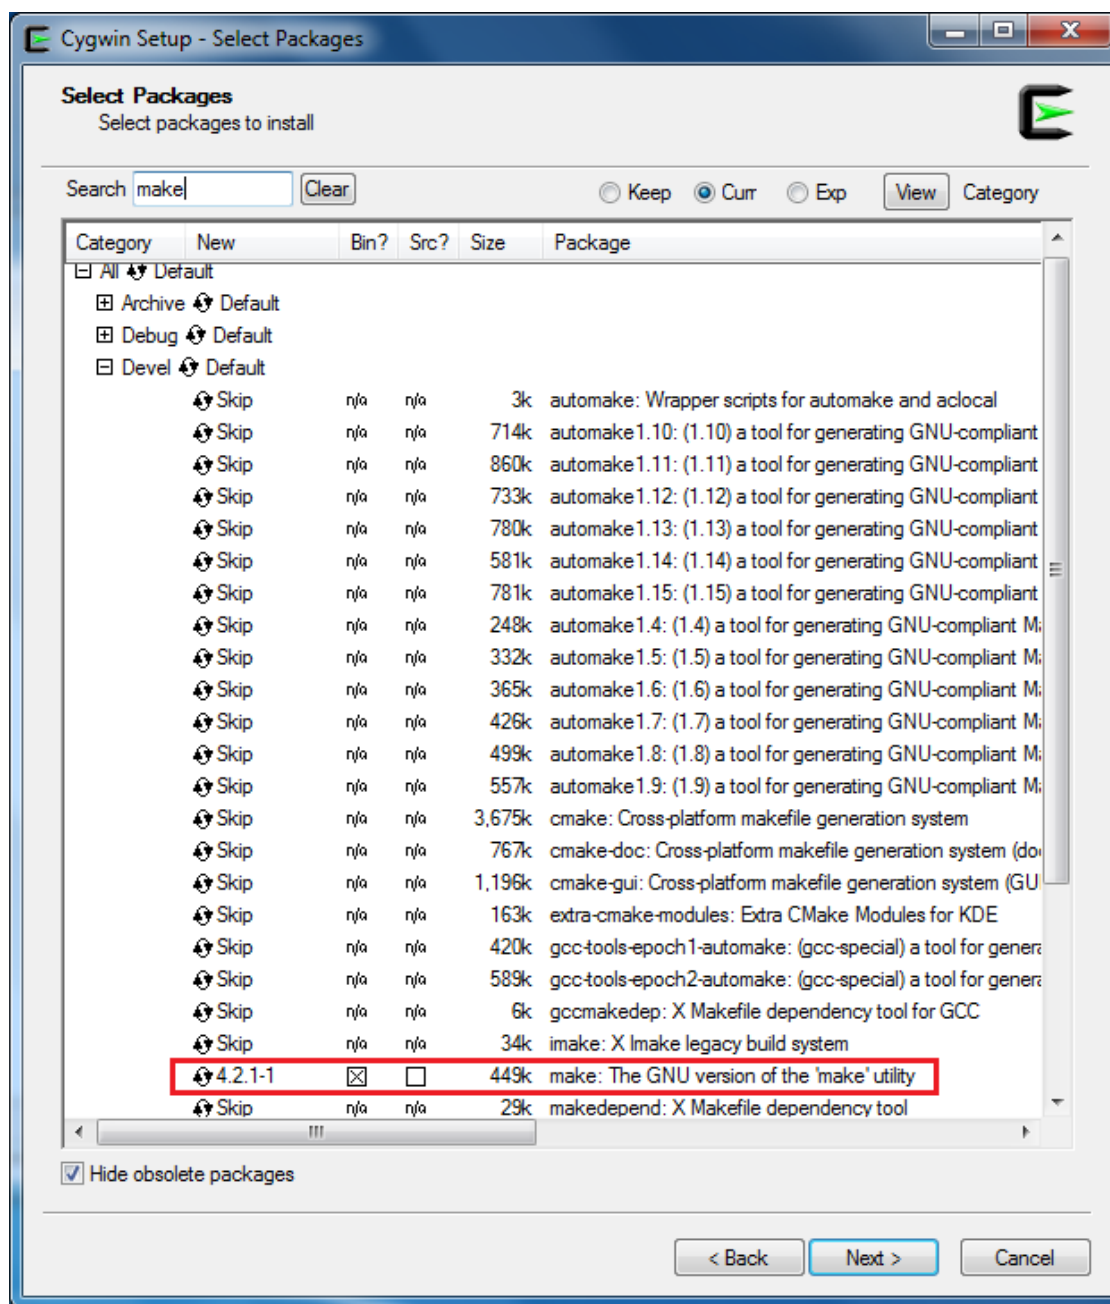

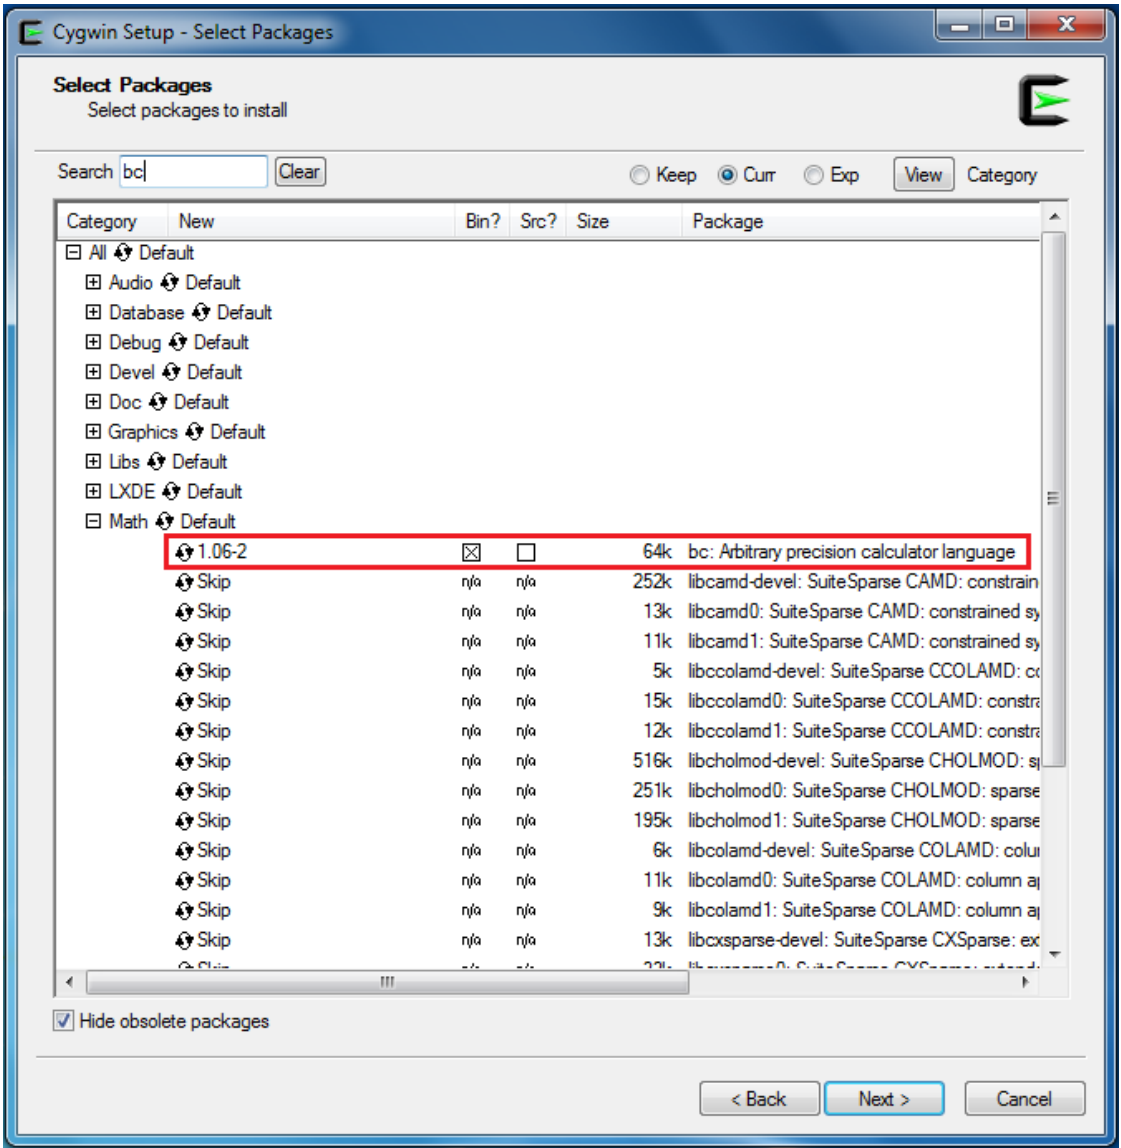

注解：对于 Linux，请参考 AN0400 Ameba-D Application Note v12.pdf 来建立 GCC 开发环境。


3.1.2 Ameba-D 开发板的相关介绍

对于 Ameba-D，有许多类型的芯片组可用，例如 RTL8720CS，RTL8721CSM，RTL8722CSM，RTL8720DN，RTL8720DM，RTL8721DM 和 RTL8722DM。

此外，芯片组可以嵌入在 Ameba-D DEV 开发板上且扩展各种 I/O 接口。我们提供了相应的 HDK（硬件开发工具包）文档，请联系 RTK 了解更多详细信息。

Ameba-D 开发板的硬件图如下所示：


- USB TO UART: 供电和日志打印
- 波特率: 为 115200bps
- SWD: SWD 接口, 用于下载图像和使用 IAR 进行调试
- Reset Button: IAR 完成下载后, 重置 Ameba-D 以运行固件

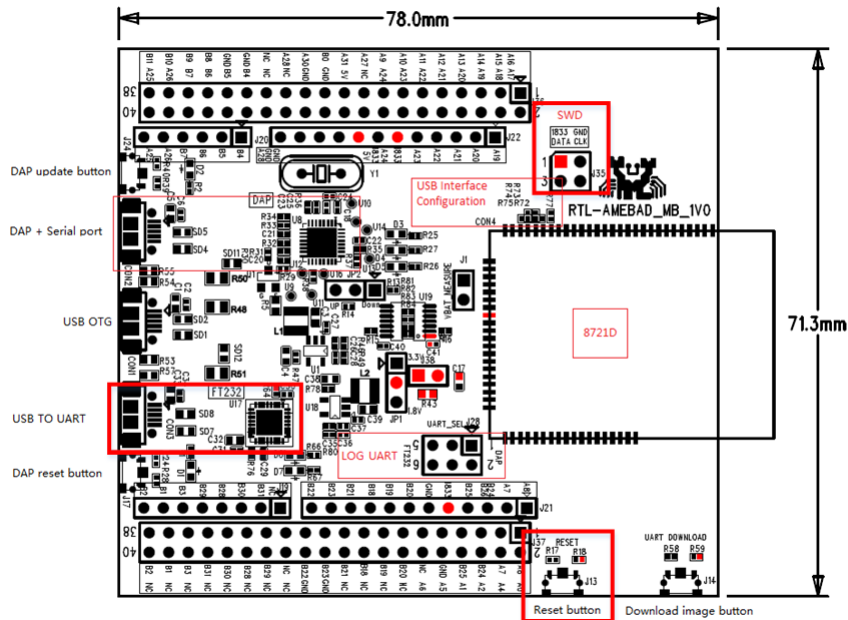

3.1.3 连接串口

在 Ameba-D 板上, FTDI 芯片和 FT232 可用于串口和除错器。可以使用 SecureCRT、Teraterm 与 Putty 等终端工具查看串口讯息。

- 1) 选择相对应的 uart 参数且打开连接端口。
- 2) 然后按 Ameba 上的重置按钮, 在终端中可以找到一些讯息。

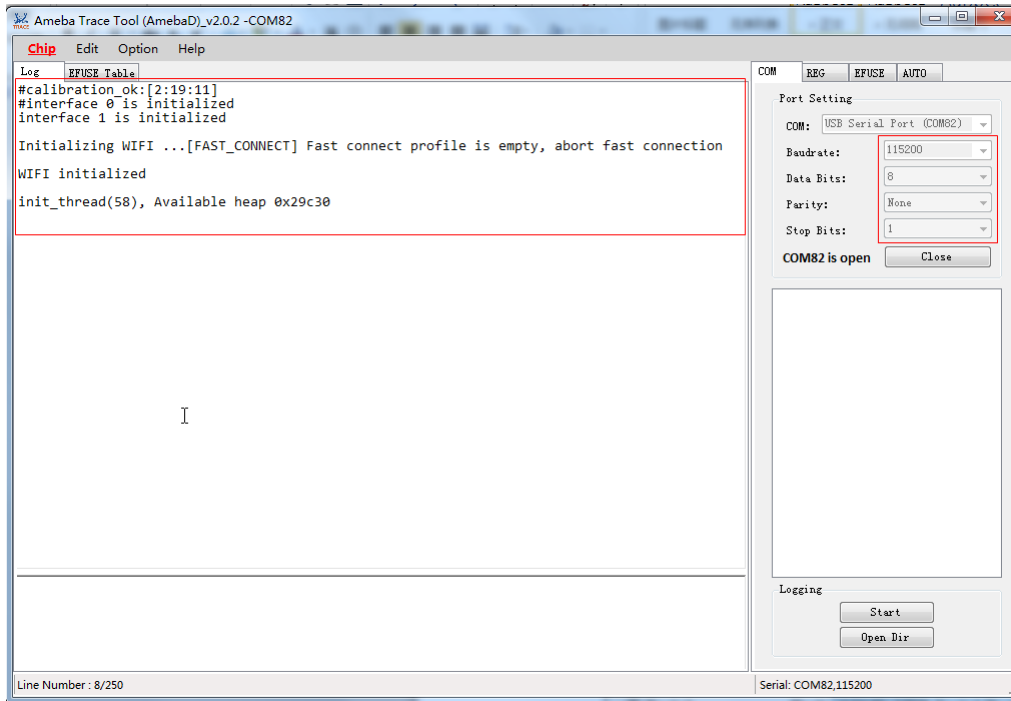

3.1.4 在 Ameba-D 上建立第一个 GCC 项目

以下步骤供首次开发人员在现有 RTK SDK 下构建 GCC 项目。

Building Code This section illustrates how to build SDK.

首先，您需要切换到 GCC 目录。对于 Windows，打开 Cygwin 终端，并使用 `$ cd` 命令将目录更改为 Ameba-D SDK 的 KM0 或 KM4 项目目录。

注解： 需要将 `{path}` 替换成自己的 SDK 位置，并在 SDK 位置前面添加前缀 “cygdrive”，以便 Cygwin 可以访问您的文件系统。

- `$ cd /cygdrive/{path}/project/realtek_amebaD_va0_example/GCC-RELEASE/project_lp`
- `$ cd /cygdrive/{path}/project/realtek_amebaD_va0_example/GCC-RELEASE/project_hp`

对于 Linux，请打开自己的终端，然后使用 `$ cd` 命令将目录更改为 Ameba-D SDK 的 KM0 或 KM4 项目目录。

- `$ cd /{path}/project/realtek_amebaD_va0_example/GCC-RELEASE/project_lp`
- `$ cd /{path}/project/realtek_amebaD_va0_example/GCC-RELEASE/project_hp`

要构建一般固件的 SDK，只需在 Cygwin（Windows）或终端（Linux）上相应目录下使用命令。KM0 project 对于 KM0，如果终端输出讯息包含 “km0_image2_all.bin” 和 “Image manipulating end”，则表示固件已成功构建，如下所示。


```

/cygdrive/d/sdk-amebad-beta_v6.0/project/realtek_amebaD_va0_example/GCC-RELEASE/project_lp
./0/project/realtek_amebaD_va0_example/GCC-RELEASE/project_lp/asdk/image/xip_image2.bin
flash_text_start /cygdrive/d/sdk-amebad-beta_v6.0/project/realtek_amebaD_va0_example/GCC-RELEASE/project_lp/asdk/image/target_img2.map
/cygdrive/d/sdk-amebad-beta_v6.0/project/realtek_amebaD_va0_example/GCC-RELEASE/project_lp/asdk/gnu_utility/prepend_header.sh /cygdrive/d/sdk-amebad-beta_v6.0/project/realtek_amebaD_va0_example/GCC-RELEASE/project_lp/asdk/image/ram_retention.bin
retention_entry_func /cygdrive/d/sdk-amebad-beta_v6.0/project/realtek_amebaD_va0_example/GCC-RELEASE/project_lp/asdk/image/target_img2.map
cat /cygdrive/d/sdk-amebad-beta_v6.0/project/realtek_amebaD_va0_example/GCC-RELEASE/project_lp/asdk/image/xip_image2_prepend.bin /cygdrive/d/sdk-amebad-beta_v6.0/project/realtek_amebaD_va0_example/GCC-RELEASE/project_lp/asdk/image/ram_2_prepend.bin > /cygdrive/d/sdk-amebad-beta_v6.0/project/realtek_amebaD_va0_example/GCC-RELEASE/project_lp/asdk/image/km0_image2_all.bin
/cygdrive/d/sdk-amebad-beta_v6.0/project/realtek_amebaD_va0_example/GCC-RELEASE/project_lp/asdk/gnu_utility/pad.sh /cygdrive/d/sdk-amebad-beta_v6.0/project/realtek_amebaD_va0_example/GCC-RELEASE/project_lp/asdk/image/km0_image2_all.bin
===== Image manipulating end =====
make[1]: Leaving directory '/cygdrive/d/sdk-amebad-beta_v6.0/project/realtek_amebaD_va0_example/GCC-RELEASE/project_lp/asdk'
/cygdrive/d/sdk-amebad-beta_v6.0/project/realtek_amebaD_va0_example/GCC-RELEASE/project_lp
$

```

如果构建失败，请输入 \$ make clean 然后重新执行 make。

成功构建后，固件档案位于 “project/realtek_amebaD_va0_example/GCC-RELEASE/project_lp/asdk/image” 下，如下图所示。

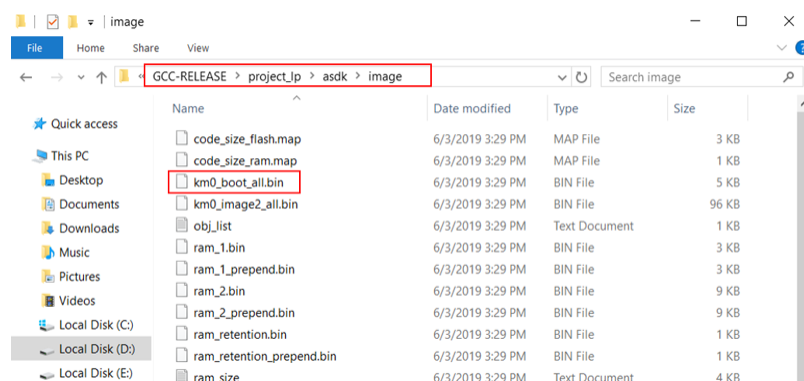

KM4 项目对于 KM4，如果终端输出讯息包含 “km0_image2_all.bin” 和 “Image manipulating end”，则表示固件已成功构建，如下所示。

```

/cygdrive/d/sdk-amebad-beta_v6.0/project/realtek_amebaD_va0_example/GCC-RELEASE/project_hp
.ARM.attributes          54          0
.debug_frame            10024        0
.stabstr                 117         0
Total                   847521

/cygdrive/d/sdk-amebad-beta_v6.0/project/realtek_amebaD_va0_example/GCC-RELEASE/project_hp/asdk/./toolchain/cygwin/as
dk-6.4.1/cygwin/newlib/bin/arm-none-eabi-size -t --radix=10 /cygdrive/d/sdk-amebad-beta_v6.0/project/realtek_amebaD_va
0_example/GCC-RELEASE/project_hp/asdk/image/target_img2.axf
   text    data    bss    dec    hex filename
32592 262416   1936 296944  487f0 /cygdrive/d/sdk-amebad-beta_v6.0/project/realtek_amebaD_va0_example/GCC-RELEAS
E/project_hp/asdk/image/target_img2.axf
32592 262416   1936 296944  487f0 (TOTALS)
===== Image Info DEC =====
rm -f -f ./build/ram/*.o
===== linker img2_ns end =====
===== Image manipulating start =====
/cygdrive/d/sdk-amebad-beta_v6.0/project/realtek_amebaD_va0_example/GCC-RELEASE/project_hp/asdk/gnu_utility/prepend_he
ader.sh /cygdrive/d/sdk-amebad-beta_v6.0/project/realtek_amebaD_va0_example/GCC-RELEASE/project_hp/asdk/image/ram_2.bi
n __ram_image2_text_start__ /cygdrive/d/sdk-amebad-beta_v6.0/project/realtek_amebaD_va0_example/GCC-RELEASE/project_
hp/asdk/image/target_img2.map
/cygdrive/d/sdk-amebad-beta_v6.0/project/realtek_amebaD_va0_example/GCC-RELEASE/project_hp/asdk/gnu_utility/prepend_he
ader.sh /cygdrive/d/sdk-amebad-beta_v6.0/project/realtek_amebaD_va0_example/GCC-RELEASE/project_hp/asdk/image/xip_imag
e2.bin __flash_text_start__ /cygdrive/d/sdk-amebad-beta_v6.0/project/realtek_amebaD_va0_example/GCC-RELEASE/project_
hp/asdk/image/target_img2.map
cat /cygdrive/d/sdk-amebad-beta_v6.0/project/realtek_amebaD_va0_example/GCC-RELEASE/project_hp/asdk/image/xip_image2_p
repend.bin /cygdrive/d/sdk-amebad-beta_v6.0/project/realtek_amebaD_va0_example/GCC-RELEASE/project_hp/asdk/image/ram_2
prepend.bin > /cygdrive/d/sdk-amebad-beta_v6.0/project/realtek_amebaD_va0_example/GCC-RELEASE/project_hp/asdk/image/k
m4_image2_all.bin
/cygdrive/d/sdk-amebad-beta_v6.0/project/realtek_amebaD_va0_example/GCC-RELEASE/project_hp/asdk/gnu_utility/pad.sh /cy
qdrive/d/sdk-amebad-beta_v6.0/project/realtek_amebaD_va0_example/GCC-RELEASE/project_hp/asdk/image/km4_image2_all.bin
===== Image manipulating end =====
make[1]: Leaving directory '/cygdrive/d/sdk-amebad-beta_v6.0/project/realtek_amebaD_va0_example/GCC-RELEASE/project_hp
/asdk'


/cygdrive/d/sdk-amebad-beta_v6.0/project/realtek_amebaD_va0_example/GCC-RELEASE/project_hp
$

```

如果构建失败，请输入 `$ make clean` 然后重新执行 `make`。

成功构建后，固件档案位于



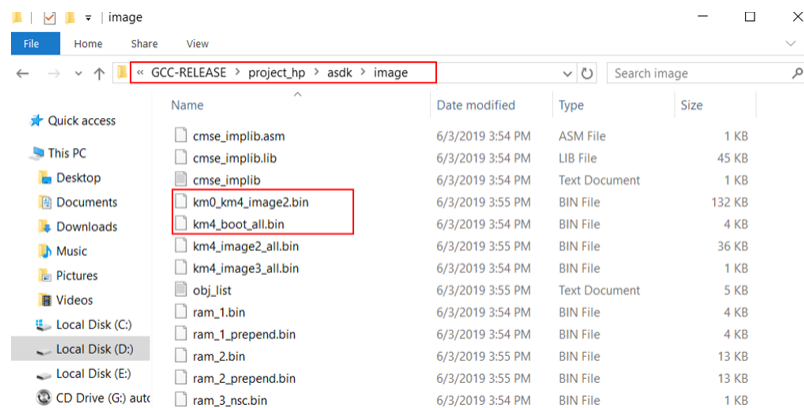










`project/realtek_amebaD_va0_example/GCC-RELEASE/project_hp/asdk/image` 下，如下图所示。



3.1.5 下载固件至 Ameba-D

瑞昱提供了 Image Tool 在 Windows 中可以方便下载固件

- 环境需求: WinXP, Win 7 以上, Microsoft .NET Framework 3.5
- ImageTool.exe 位置: SDK\tools\AmebaD\Image_Tool\ImageTool.exe

Name	Date modified	Type	Size
 ChangeLog.txt	7/29/2019 11:52 AM	Text Document	4 KB
 Download.ini	11/4/2019 5:44 PM	Configuration sett...	2 KB
 Encrypt.ini	11/4/2019 5:44 PM	Configuration sett...	1 KB
 ImageTool.exe	7/29/2019 11:52 AM	Application	282 KB
 ImageTool.pdb	7/29/2019 11:52 AM	VisualStudio.pdb....	178 KB
 ImageTool.vshost.exe	8/20/2018 1:41 PM	Application	14 KB
 ImageTool.vshost.exe.manifest	8/20/2018 1:41 PM	MANIFEST File	1 KB
 imgtool_flashloader_amebad.bin	6/6/2019 3:15 PM	BIN File	5 KB
 imgtool_flashloader_amebaz.bin	6/6/2019 3:15 PM	BIN File	6 KB
 SB.exe	8/20/2018 1:41 PM	Application	189 KB
 system.bin	8/6/2019 9:53 AM	BIN File	4 KB
 TestListView.dll	8/20/2018 1:41 PM	Application extens...	5 KB
 TestListView.pdb	8/20/2018 1:41 PM	VisualStudio.pdb....	14 KB

假设 PC 上的 Image Tool 是服务器，它将通过 UART 将固件档案发送到 Ameba（客户端）。要将档案从服务器下载到客户端，客户端必须首先进入 UART download 模式。

1) 进入 UART_DOWNLOAD 模式

- 按下 UART DOWNLOAD 按钮并保持按下状态
- 重新打开电源，或按重置按钮
- 放开 UART DOWNLOAD 按钮

现在 Ameba 板进入 UART_DOWNLOAD 模式并准备接收数据。

2) 點選 UI 上的 Chip Select（红色），然后选择芯片（AmebaD 或 AmebaZ）

3) 选择相应的串行端口和传输波特率，默认波特率是 1.5Mbps（推荐）

4) 點選浏览按钮以选择要编程的固件（km0_boot_all.bin / km4_boot_all.bin / km0_km4_image2.bin）与其地址

- 固件地址为

```
{path}\project\realtek_amebaD_va0_example\GCC-RELEASE\project_lp\asdk\image
```


与

```
{path}\project\realtek_amebaD_va0_example\GCC-RELEASE\project_hp\asdk\image,
```

为自己计算机上项目的地址。

- 默认目标地址是 SDK 默认固件地址，您可以直接使用它。

5) 點選下载按钮进度条将显示每个固件的传输进度并且可以从日志窗口获取操作成功消息或错误消息。

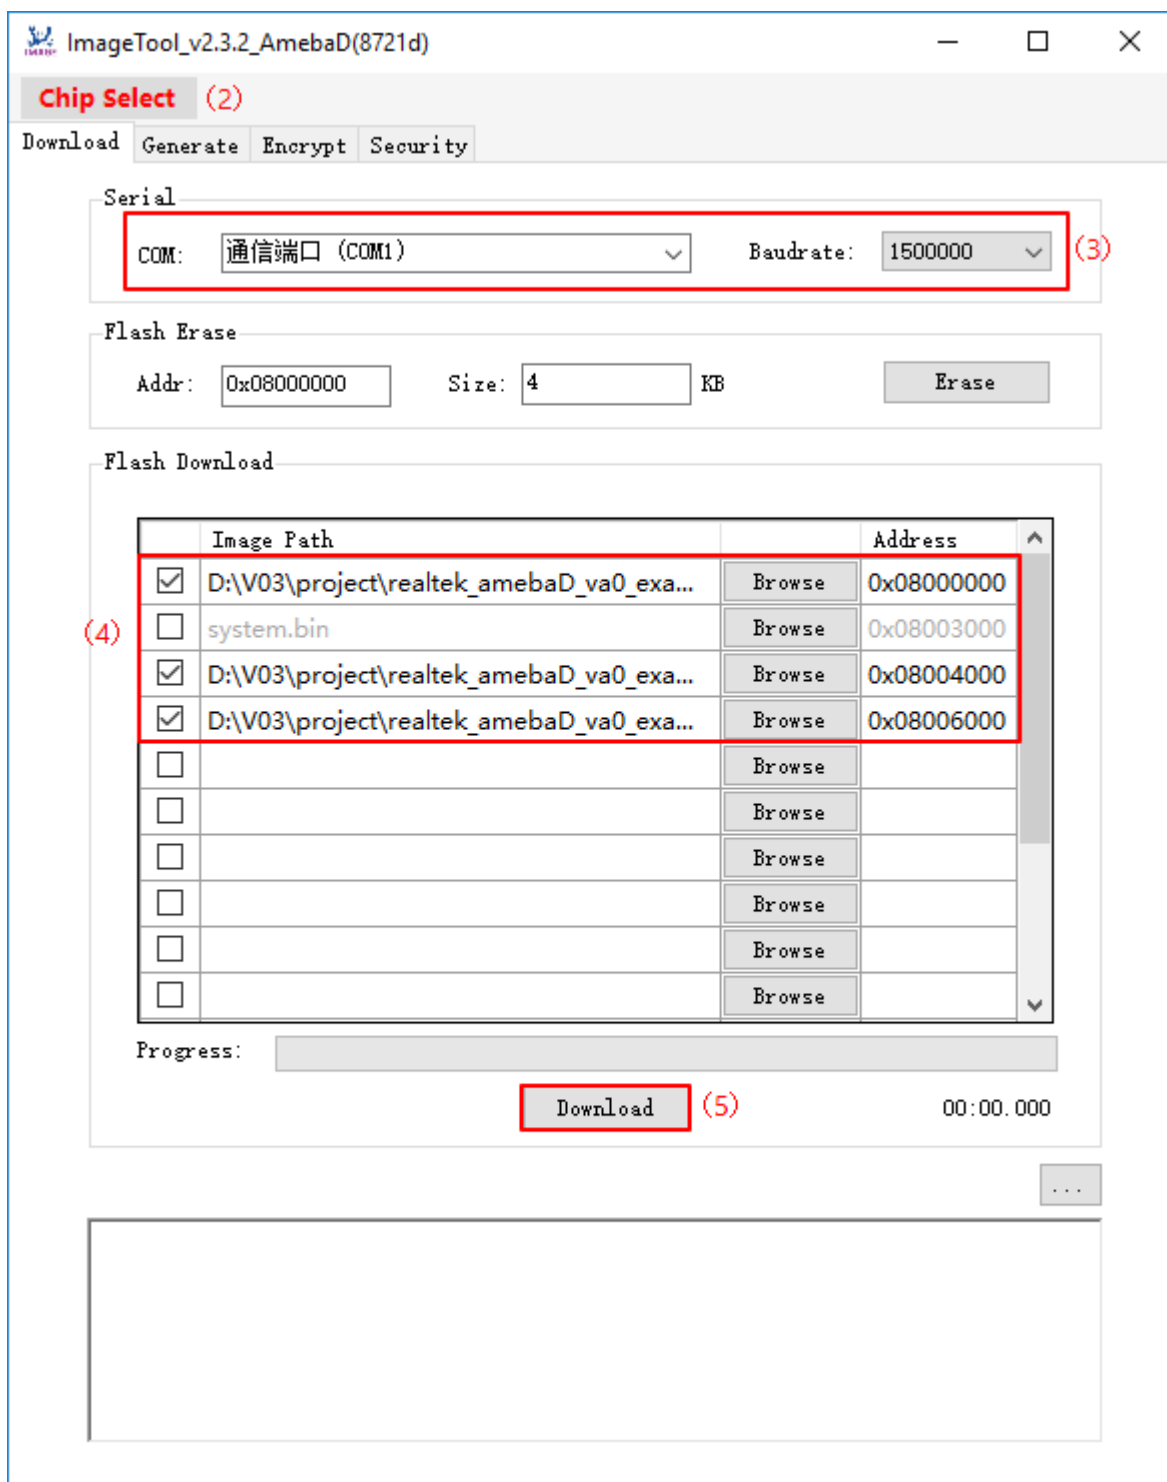

3.2 资源下载

3.2.1 版本纪录

版本 1.0.0 –2021/10/12

- 硬件信息：
 - 中央处理器: 32 位 KM4（Arm Cortex-M33 相容）和 32 位 KM0（Arm Cortex-M23 相容）
 - 内存: 512KB 单片内存 + 4MB 单片内存
- 特征：
 - 集成 802.11a/n 无线局域网 SoC
 - USB 主机/设备
 - SD Host
 - BLE5.0
 - Codec
 - LCDC
 - Key Matrix
 - 1 PCM interface
 - 4 UART interface
 - 1 I2S Interface
 - 2 I2C interface
 - 7 ADC
 - 17 PWM
 - Max 54 GPIO

3.3 开发板 HDK

AmebaD HDK 资源下载

3.3.1 开发板

- **HDK-AMEBAD_MB_4V2**

- Layout
 - Schematic
-

- **HDK-AMEBAD_MB_4V0**

- Layout
- Schematic

3.3.2 RTL8722DM 模組

- **HDK-AM8722DM01_6V2_WI LPF**

- Layout
 - Schematic
-

- **HDK-AM8722DM01_6V1_WI LPF**

- Layout
 - Schematic
-

- **HDK-AM8722DM01_4V1**

- Layout
- Schematic

3.4 支援

3.4.1 常见问题

如何购买 Ameba RTL8722DM Board?

Refer to [Purchase link](#).

3.4.2 故障排除

遇到开发板连接到计算机的驱动程序问题？

请参考下列 USB 驱动程序 <https://ftdichip.com/drivers/>。

小技巧:

We welcome contributions to the our SDKs documentations.

Please read the Ameba contribution-guide below for more details before you make the contribution.
